



CLEAR AIR TURBULENCE
FORECASTING TECHNIQUES.

2

NW
LEVEL II

BY

10
1LT DAVID R. LEE/
CAPT ROLAND B. STULL/
MAJ WILLIAM S. IRVINE/

ADA 083099

DTIC
ELECTE
S D
APR 16 1980
B

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.



DDC FILE COPY

11
DECEMBER 1979

80 4 15 378


UNITED STATES AIR FORCE
AIR WEATHER SERVICE (MAC)
AIR FORCE GLOBAL WEATHER CENTRAL
OFFUTT AFB NE 68113

405-677

This publication approved for public release. There is no objection to unlimited distribution of this document to the public at large, or by the Defense Documentation Center (DDC) to the National Technical Information Service (NTIS).

This technical publication has been reviewed and is approved for publication.


ROBERT C. SABIN, Lt Colonel, USAF


WILLIAM S. IRVINE, Major, USAF

FOR THE COMMANDER


THOMAS D. MADIGAN, Colonel, USAF
Chief, Technical Services Division

PREFACE

This note is a compilation of the latest clear air turbulence (CAT) forecasting techniques used by the Air Force Global Weather Central (AFGWC) forecasters. It is a comprehensive treatment of a complex and unique forecasting subject. The methods are relatively easy to follow and are a step-by-step approach to forecasting this weather phenomenon.

The main references are Sorenson and Beckwith's (1975) CAT classification system and Hopkins' (1976) techniques for forecasting nonconvective turbulence. In addition, Holcomb's (1976) memorandum "Jet Stream Analysis and Turbulence Forecasting" provided much insight into jet stream and turbulence mechanics. Our manual is a further treatment of CAT classifications explained by Holcomb.

David Lee contributed the sections on model relationships of CAT. He collected and verified the information for these sections while serving as a CAT forecaster with the Forecasting Services Division at AFGWC. Roland Stull's primary contributions were the sections dealing with automated aids. He wrote the CATA and MTWVB computer routines while working as a numerical prediction meteorologist in the Technical Services Division of AFGWC. The remaining sections were a joint effort. William Irvine served as technical editor and prepared all charts and figures.

This technical Note replaces AFGWC Tech Memo 70-7 "Turbulence Forecasting Procedures" by Capt Paul T. Burnett, 15 Dec 70. Over the last nine years the automated CAT routines have been totally replaced. Also, synoptic rules of thumb and model relationships are now better understood and documented.

We gratefully acknowledge Capt James Liberda for his expertise in writing the Northern Hemispheric map display for the CATA output. The suggestions and comments from Capts Thomas Andrew, Dennis Regan, Dennis Newsom, and Norman Carron on the operational performance of the models are also appreciated.

Thanks go to Amn Mark Rankin for the tedious work of verifying the output against pilot reports. Amn Mark Rankin and Sgt Patti Sanders also contributed significantly by calculating the terrain roughness over the Continental United States (CONUS). Many of the figures were drafted by Sgt Ronald Jopson. Portions of the manuscript were typed by Mrs Mary Zimmerman, SSgt Gary Rumery, and SSgt Kathy Tittle.

CONTENTS

Paragraph		page
1	INTRODUCTION	1
2	DEFINITIONS	2
2.1	Turbulence	2
2.2	Mountain waves	2
2.3	Clear Air Turbulence (CAT)	2
2.4	AFGWC CAT intensity criteria	2
3	CAUSES AND DESCRIPTION OF CAT	3
3.1	Thermal CAT	3
3.2	Dynamic CAT	3
3.3	Mechanical CAT	4
3.4	Mountain waves	4
4	ANALYSIS AND FORECAST PROBLEM	8
4.1	Problems	8
4.2	Tools	9
4.3	Microscale versus macroscale	11
5	AUTOMATED AIDS	13
5.1	CATA Program	13
5.2	MTWVB Program	23
5.3	CATB Program	32
6	OPERATIONAL CAT FORECASTING BASED ON MODEL OUTPUT AND OTHER INFORMATION	33
6.1	Thermal advection	33
6.2	Areas of considerable vertical shear	46
6.3	Areas of considerable horizontal shear	51
6.4	Mountain-wave turbulence	54
6.5	Stratospheric CAT	62
7	CONCLUDING REMARKS	66
	SELECTED BIBLIOGRAPHY	67
	APPENDIX A - The use of pilot reports in CAT forecasting	69
	APPENDIX B - CATA output	71
	APPENDIX C - MTWVB output	73

ACCESSION for		
NTIS	White Section	<input checked="" type="checkbox"/>
DOC	Buff Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION _____		
BY _____		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	AVAIL.	and/or SPECIAL
A		

FIGURES

Figure		page
1	Location of CAT in a typical jet stream	5
2	Breakup of Kelvin-Helmholz waves	6
3	Cross-section of a mountain wave	7
4	Forecasting CAT potential over an extended time	12
5	Effects of a five-point filter	15
6	Five-point filter weights versus distance	15
7	Relationship between bulk Richardson number and the probability of turbulence	16
8	Turbulence intensity as a function of wind speed and wind shear	16
9	Calculating thickness of a thermal CAT layer	18
10	Estimating intensity of mechanical turbulence	19
11	Terrain roughness values over the CONUS	21
12	Height intervals for CATA display	22
13	Mountain-wave turbulence intensity as a function of wind speed and sea-level pressure differential	26
14	High-level turbulence intensity as a function of tropopause height and temperature	27
15	Evaluating mountain-wave turbulence potential	28
16	Numbered mountain-wave boxes	29
17	CAT forecast areas associated with 500 mb cold- air advection	34
18	CAT forecast areas associated with 500 mb PVA	36
19	Turbulence potential of cyclone-scale cold-air advection	37
20	Severe CAT associated with 700 mb cold-air advection	38
21	Turbulence potential of short-wave cold-air advection	39
22	Turbulence potential in a sharp 300 mb trough	40
23	CAT forecast associated with strong warm-air advection at 500 mb	42
24	Turbulence potential of cyclone-scale warm-air advection	43
25	CAT forecast associated with rapid surface cyclogenesis	45
26	Locating first-guess CAT area associated with surface cyclogenesis	45
27	CAT forecast in outflow area of cold digging jet at 300 mb	47
28	CAT in a 300 mb tilted ridge and trough pattern	48
29	Turbulence potential in tilted troughs associated with vertical directional shear	48
30	Turbulence potential in tilted ridges	50
31	CAT associated with confluent jet streams	50
32	Turbulence potential in sharp ridges	52
33	CAT associated with sharp anticyclonic curvature at 300 mb	52
34	CAT forecast at 300 mb in anticyclonic horizontal shear and speed convergence	53
35	CAT associated with anticyclonic turning of the subtropical jet stream	55

	page
36 CAT associated with the development of a 300 mb cutoff low	56
37 CAT forecast in the throat and base of a 300 mb cutoff low	58
38 CAT in 300 mb diffluent upper flow pattern	59
39 Normal forecast area associated with mountain- wave turbulence	61
40 Stratospheric CAT areas at 100 mb	64
B-1 Northern hemispheric map of CAT values	71
B-2 Tropical and southern hemispheric table of CAT values	72
C MTWVB output	73

TABLES

		pages
Table	1	Criteria for evaluation of low-level mountain-wave turbulence 24
	2	Mid-level mountain-wave turbulence considerations . . 25
	3	High-level mountain-wave turbulence evaluation criteria 25
	4	Mountain-top data associated with 49 specific mountain-wave turbulence regions 31
	5	Empirically derived stratospheric CAT intensities associated with mountain waves 65
	A-1	Turbulence category as determined from aircraft weight and cruising speed 69
	A-2	Turbulence equivalence table to compare and quantify pilot reports 70

CLEAR AIR TURBULENCE
FORECASTING TECHNIQUES

1 INTRODUCTION

The Air Force Global Weather Central (AFGWC) provides forecasts of clear air turbulence (CAT) in support of all levels of military operations. Although CAT is considered by some as only a nuisance, the National Transportation Safety Board (1971) has reported that structural damage to aircraft, passenger and crew injury, and even fatalities have been attributed to extreme CAT encounters. Also CAT can adversely affect air-to-air refueling, precision navigation, and low-level bombing missions. As a result, accurate forecasts of CAT are important for Air Force flight planning and aircraft safety.

Problems encountered in forecasting clear air turbulence include the large temporal and spatial scales of the observation network, the reliability of pilot reports, and the short-lived, random nature of CAT. In other words, CAT is a microscale phenomenon, whereas most existing atmospheric observations are made at the macroscale.

AFGWC turbulence forecasting philosophy is to provide an optimal man-machine mix to produce the best possible forecasts. In this context, computer programs currently check all rawinsonde observations (RAOBs) for microscale phenomena that may indicate turbulence. These computer programs have eliminated the tedious manual searches through stacks of thermodynamic diagrams (skew-T, log P plots). On the other hand, CAT forecasters examine synoptic features that are often associated with CAT. They combine their experience with the automated computer aids to produce comprehensive CAT analyses and forecasts.

Typically, three methods are used at AFGWC to diagnose existing CAT. One method uses the areas encompassing pilot reports of CAT as a first guess. The second method uses an automated diagnosis provided by the computer programs at AFGWC. The third method involves synoptic rules-of-thumb compiled by experienced CAT forecasters.

Model relationships of CAT employing time-tested rules-of-thumb have been developed to aid the CAT forecaster in identifying synoptic patterns that frequently cause turbulence. After analyzing a potential CAT situation, the forecaster, using all the available forecast aids, forecasts the progression of the turbulence potential.

Several automated aids exist at AFGWC to assist the CAT forecaster in diagnosing CAT. These routines use the stability and shear data on a scale approaching the microscale and available from rawinsonde observations. Unfortunately, these automated routines are unable to forecast CAT because of the lack of microscale forecasts at AFGWC.

Both the automated and manual techniques used at AFGWC are described in this tech note. Chapters 2 and 3 define CAT and describe its causes and characteristics. Chapter 4 provides an overview of the problems encountered and tools used. Automated aids are detailed in Chapter 5, and rules-of-thumb are listed in Chapter 6.

2 DEFINITIONS

2.1 Turbulence. Turbulence is the gustiness superimposed on the mean wind. These rapid, turbulent fluctuations in vertical velocity, horizontal velocity, temperature, humidity, and pressure about their mean values are random. Therefore we cannot hope to forecast (specify exact values of these variables in time and space) CAT exactly. Instead, as in molecular physics, we are limited to a statistical description of CAT.

2.2 Mountain waves. In some cases, the wind flowing over hills and mountains is set into smooth oscillation. These mountain waves are not true turbulence as given by the strict definition in the preceding paragraph because nonstatistical equations can be written to describe their motion. Pilots flying through mountain waves at high speed, however, feel the oscillations as rapid bumps. They consequently report this as turbulence or chop. To make matters more difficult, smooth mountain waves can sometimes create conditions favorable to the formation of true turbulence. Mountain waves will be discussed in more detail in Section 6.4 of this tech memo.

2.3 Clear Air Turbulence (CAT). Clear air turbulence is literally that turbulence not associated with convective clouds. This means that turbulence in clear air as well as in clouds is classified as CAT. Although most often associated with turbulence near the jet stream, CAT can also occur near the ground.

2.4 AFGWC CAT intensity criteria. At AFGWC, forecasts are made for frequent (more than one third of the time) moderate or greater turbulence for heavy aircraft (F-4 and larger). The AFGWC specifications for CAT categories are:

Moderate: Moderate changes experienced in aircraft attitude or altitude, but the aircraft remains in positive control at all times. Usually, small variations in air speed (15-25 knots) and changes in accelerometer readings of 0.5 g to 1.0 g at the aircraft's center of gravity occur. Occupants feel strain against seat belts or have difficulty walking and loose objects move about. The vertical gust velocity is 20 to 35 feet per second.

Severe: Abrupt changes in aircraft attitude or altitude are experienced. Aircraft may be out of control for short periods. Usually, large variations in airspeed (25 knots) and changes in accelerometer readings greater than 1.0 g to 2.0 g at the aircraft's center of gravity occur. Occupants are forced violently against seat belts and loose objects are tossed about. The vertical gust velocity is 35 to 50 feet per second.

Extreme: The aircraft is violently tossed about and practically impossible to control. Structural damage may occur. Changes in accelerometer readings greater than 2.0 g and vertical gust velocity greater than 50 feet per second occur. Rapid fluctuations in airspeed are greater than 25 knots.

3 CAUSES AND DESCRIPTION OF CAT

CAT is caused by a number of phenomena:

Hot, rising air tends to be turbulent. Static stability is used to determine whether the air breaks down into rising/descending parcels of hot/cold turbulent air, called thermal turbulence.

Even if the air is statically stable, the wind shear may be strong enough to create turbulence. Dynamic stability is the measure of this phenomenon, known as shear turbulence.

Air just above rough terrain tends to be turbulent. This is called mechanical turbulence. Note that mechanical turbulence is slightly different than the mountain-wave turbulence found at higher altitudes.

All three phenomena are discussed in more detail below.

3.1 Thermal CAT. Thermal CAT is associated with static instabilities. An excellent measure of the static stability of air is the potential temperature lapse rate, L : $L = \Delta T/\Delta Z$, where ΔT is the change in potential temperature over a layer of thickness ΔZ . Dry air is statically stable when L is positive; that is, when temperature decreases with height more slowly than the dry adiabatic lapse rate of $9.8^\circ\text{C}/\text{km}$ ($5.4^\circ\text{F}/1000\text{ ft}$). Statically unstable air occurs with negative L ; that is, it occurs with superadiabatic lapse rates. Neutral stability occurs when L is zero, corresponding to an adiabatic lapse rate.

Turbulent convection starts in statically unstable air. This turbulence is usually felt near the earth's surface as the lumpy thermals of hot, rising air on a sunny day. Some of these thermals can rise far enough to cause clouds. Many other thermals are trapped below cloud base by the temperature inversion just below cloud base. Although this thermal turbulence is found only often near the ground, it can occur higher in the atmosphere where radiational cooling or horizontal advection lowers the lapse rate, such as near cirrus clouds.

3.2 Dynamic CAT. Turbulence can occur in statically stable air if the wind shear is strong enough. The air is dynamically unstable when this occurs. The Richardson number (Ri) is a ratio that compares the relative strength of the static stability versus the wind shear:

$$Ri = \frac{N^2}{(\partial u/\partial z)^2}$$

where N^2 is the buoyancy due to gravity and $(\partial u/\partial z)$ is the vector wind shear over the "mixing length" distance z .

Essentially, wind shear tends to produce turbulent kinetic energy whereas N^2 resists it with all this energy. Dynamic turbulence can exist only when the wind shear is strong enough to overcome the stability:

$$Ri < 0.25$$

where the critical value of Ri is given by both theory and experiment. In other words, dynamic turbulence exists only when the air which contains it is statically stable but dynamically unstable.

Note that statically unstable air (negative L) is also dynamically unstable ($Ri \leq \frac{1}{4}$) because the Richardson number in that case is negative. Thus, the Richardson number is the only number needed to determine whether turbulence will exist. This relation between turbulence and the Richardson number has been derived theoretically by Miles and Howard (1964) and been experimentally proven in the laboratory by Thorpe (1973) and others. It has been verified in the upper troposphere by Browning (1971) using radar and slow-ascent rawinsondes, and has been verified with turbulence sensors in the boundary layer by Businger et al. (1971).

Dynamically caused CAT often occurs near the jet stream at the tropopause (see Figure 1). These occurrences of CAT peak during winter months and reach a minimum in summer. Mechanisms include strong vertical wind shear (speed or direction) and strong horizontal wind shear. Strong shears can first generate Kelvin-Helmholtz waves, which are unstable. These waves amplify, roll-up, and break similar to ocean waves (see Figure 2). Breakup of Kelvin-Helmholtz waves creates CAT.

3.3 Mechanical CAT. Friction at the ground slows the wind speed at ground level and creates very strong wind shears just above the ground. This leads to dynamic instabilities and turbulence. Hence, the Richardson number can be used to predict some cases of low-level turbulence.

Eddies behind mountains, buildings, trees, and other roughness elements are not so easily definable by an average Richardson number over a layer. No theoretical criteria have been derived for such cases of mechanical turbulence. Hence, empirical relationships that include terrain roughness are used here.

3.4 Mountain waves. As will be described in Chapter 6, smooth waves can form in the air flowing over mountains. These waves can exist from just above the mountain to above the tropopause. At the crests or troughs of these waves the wind shear can be enhanced to the point where dynamic instabilities and turbulence can occur (see Figure 3). Strong wind shears also occur where mountain waves hit the earth's surface. In fact, complete overturning under some of the waves can create very turbulent, statically and dynamically unstable rolls and rotor clouds. These mountain-wave phenomena, although sometimes related to dynamic instabilities, are so complex that only the empirical relations described in Section 6 will be used to model them.


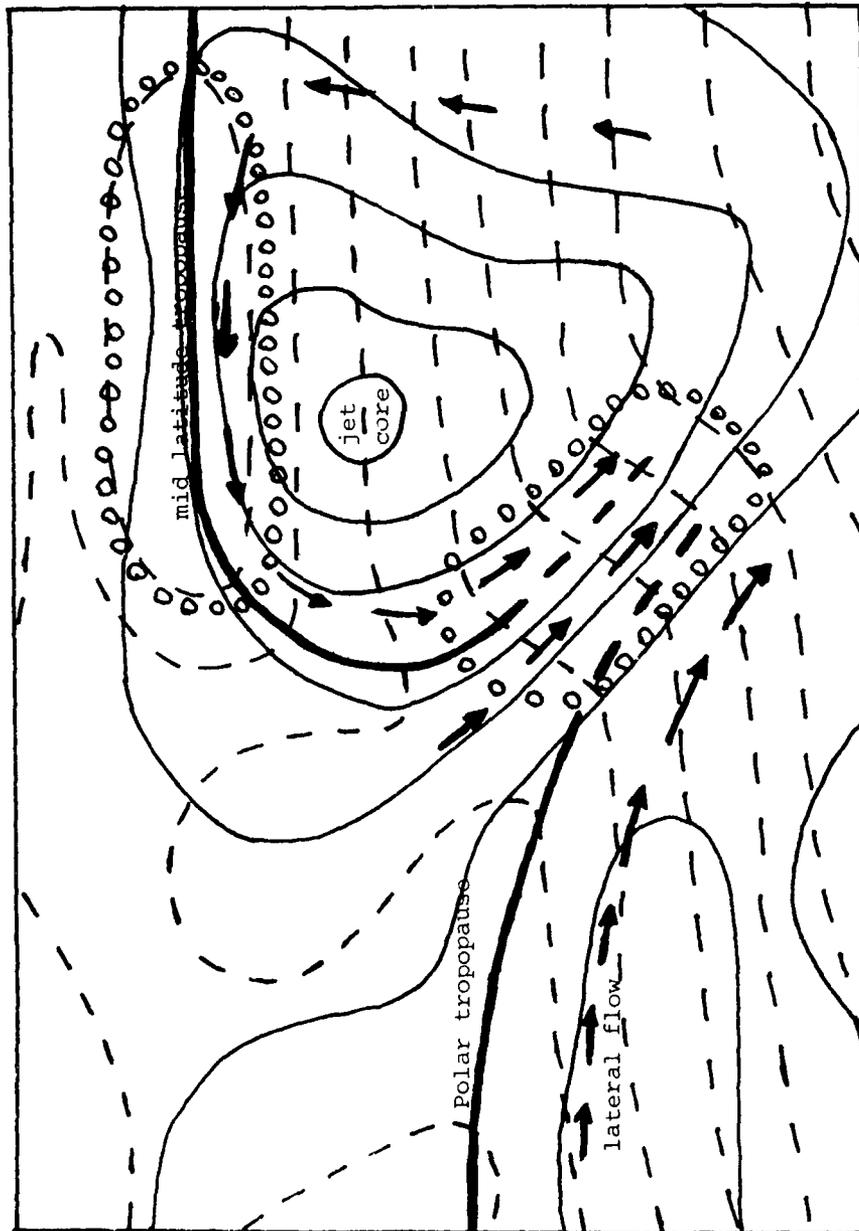


Figure 1. Location of CAT in a typical jet stream. Solid lines are isotachs and dashed lines are isotherms. Open circles indicate regions of possible CAT.

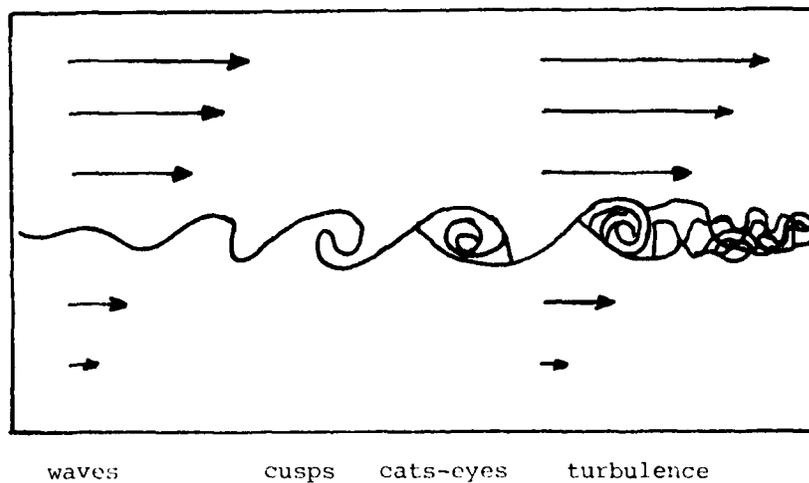

waves cusps cats-eyes turbulence

Figure 2. Breakup of Kelvin-Helmholtz waves showing transformation from waves to cusps, cat's-eyes, and finally turbulence in shear flow.

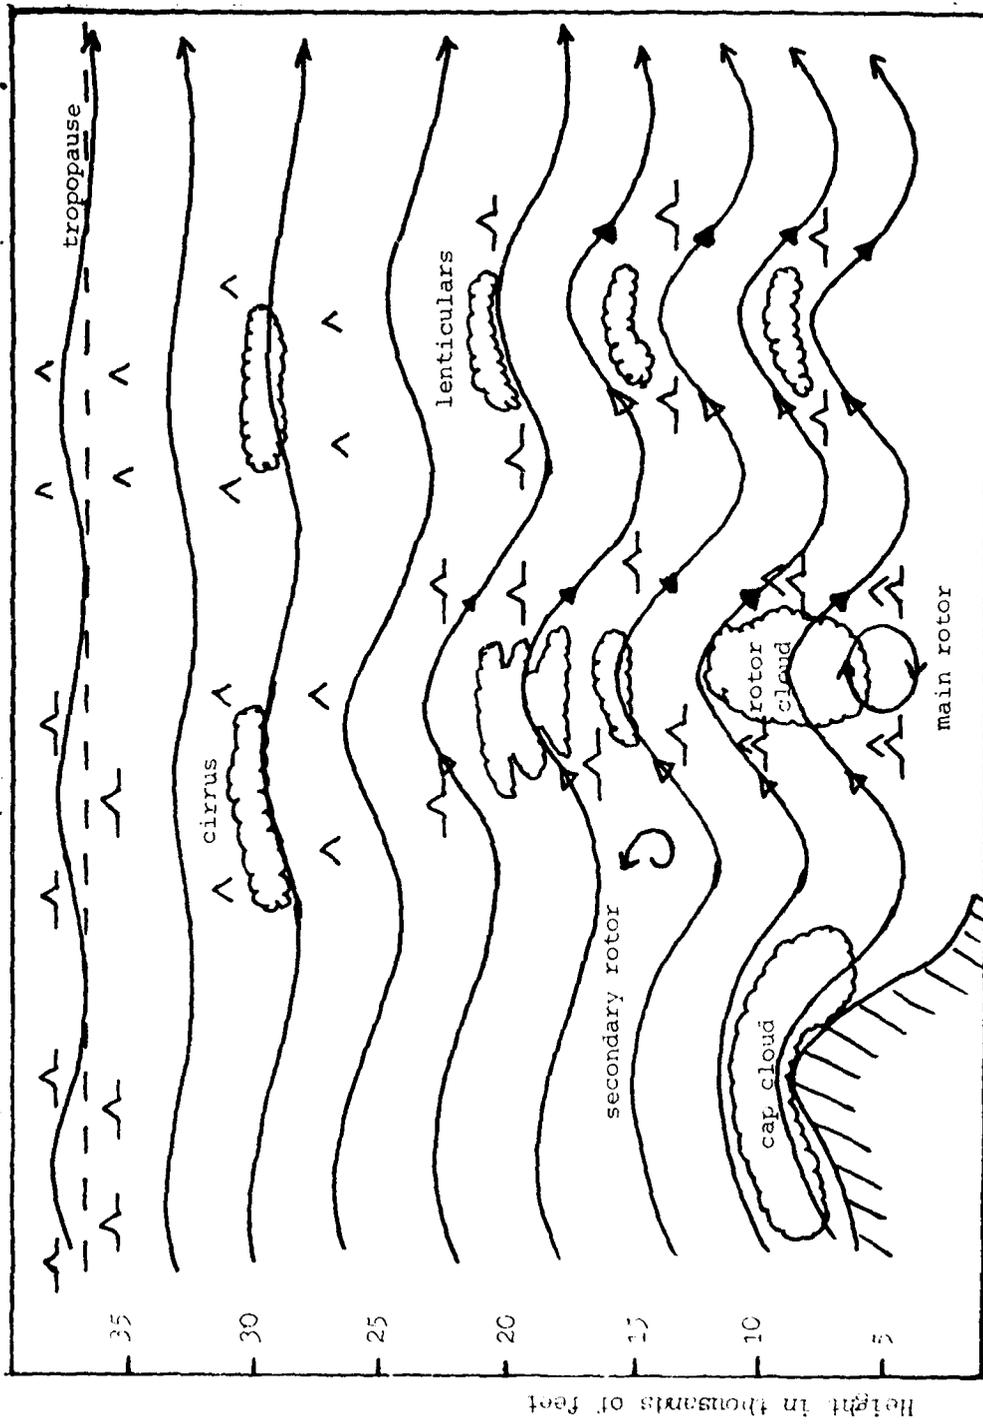


Figure 3. Cross-section of a mountain wave adapted from Ernst (1975). Δ indicates light turbulence, ∇ indicates moderate turbulence, \blacktriangledown indicates severe turbulence, \blacktriangledown are updrafts, and \blacktriangledown are downdrafts.

4 ANALYSIS AND FORECAST PROBLEM

4.1 Problems. Precise forecasts of CAT are beyond our present capabilities even though the characteristics of turbulent regions are well defined. The problem involves the time and spatial characteristics of the upper-air observation network, the representativeness of pilot reports, and the nature of the turbulence field.

4.1.1 The density, frequency, and resolution capability of the present upper-air observation network is incompatible with the micro-scale nature of CAT. Observations are taken at 12-hour intervals at stations averaging several hundred miles separation with a vertical resolution of about 2,000 feet. Over oceanic areas, virtually no stations exist. Therefore, with the current system, it is practically impossible to clearly define existing areas of CAT. Also, if computer forecast models are utilized, the problem is again complicated by the vertical and horizontal smoothing performed in the computer program.

4.1.2 The arguments against the representativeness of pilot reports of turbulence include (from Holcomb, 1976):

4.1.2.1 Poor data coverage. Many areas around the globe are not included in regular commercial airliner routes. Therefore, where aircraft do not fly routinely, pilot reports are not available routinely. This does not help the forecaster accurately evaluate all potential turbulence areas.

4.1.2.2 Aircraft type and mission. Light aircraft (Cessnas, Pipers, etc.) report greater intensities of CAT than heavier aircraft (Boeing-707, DC-9, etc.). Also, commercial aircraft pilots are very concerned with passenger comfort and tend to report CAT intensities based on passenger reactions. See Appendix A for more details.

4.1.2.3 Subjectivity. Individual pilot's interpretations of CAT encounters as well as the responses of different aircraft vary. In general, inexperienced civilian pilots tend to report greater CAT intensities than experienced military pilots. Also, when flying in extremely smooth air, turbulence encounters may surprise the pilot and lead him to report a higher intensity. The opposite applies when flying in rough air; CAT encounters may be downgraded somewhat due to the pilot's adjustment to existing turbulent conditions.

4.1.2.4 Avoidance. If CAT has been forecast, pilots may totally avoid turbulent areas or use avoidance procedures designed to lessen the impact of existing turbulence. Certain cloud formations (for example, altocumulus standing lenticular, and wave clouds) associated with turbulence are well-known and avoided. In mountainous regions, specific turbulence avoidance routes are flown when mountain waves are forecast. The result is a decrease in total turbulence reports and a reduction in CAT intensities.

4.1.3 Nature of turbulence field. CAT is a short-lived, micro-scale, random phenomenon. For example, an aircraft reports severe CAT at a certain altitude and location. Ten minutes later, an aircraft flying through the same area at the same altitude may report no turbulence or light chop. Obviously, the turbulence has either moved out of

the area, decreased in intensity, or completely dissipated.

Through experience and a sound method of equating turbulence reports, a forecaster can reckon with the problem of the unreliability of pilot reports. To overcome the problem of a crude observational network, the CAT forecasters must apply proven model relationships of CAT, a micro-scale phenomenon, to macroscale features to produce rather short-range (up to 36 hour) forecasts. The forecast reliability depends upon the accuracy of the model relationships and the precision of the upper-air forecasts.

4.2 Tools. Many operational analysis and forecast tools are used in identifying and forecasting ideal CAT relationships.

4.2.1 In the analysis, the forecaster attempts to delineate areas of potential CAT, as well as define areas where the phenomenon has been recently reported.

4.2.1.1 The first step in the analysis is a detailed examination of the 250 mb pressure level. This level is studied to determine the current position of the jet stream core and to locate other features associated with CAT.

4.2.1.2 Infrared and visual satellite photographs from the Defense Meteorological Satellite Program (DMSP) and Geostationary Operational Environmental Satellite (GOES) are reviewed and related to 300 mb synoptic systems and scrutinized for certain macroscale and mesoscale cloud features known to be associated with areas of probable CAT. Jet streams and short-wave features can be readily identified from the cloud configuration. Short transverse bands or a general herring-bone appearance and standing mountain-wave clouds are normally associated with moderate or greater CAT. Also, satellite data are highly useful in filling in data-void areas and making short-range turbulence forecasts.

4.2.1.3 Next, the 200 mb analyzed height and temperature fields are inspected for regions of strong isotherm packing in association with strong wind flow. The 200 mb isotherms closely align themselves with the 500 mb vorticity pattern and clearly depict short waves and developing systems.

4.2.1.4 The 500 mb analyses of heights, temperature, and vorticity are used to identify areas of thermal advection, short-wave troughs, and wind components normal to mountain ridges.

4.2.1.5 The 700 mb and 850 mb height and isotherm fields are used to identify regions of thermal advection and wind components normal to mountain ridges.

4.2.1.6 The analyzed surface fronts and pressure centers are checked against the analyzed jet-stream core to determine the stack (tilt) of the system. Dynamic systems must tilt toward the cold air because of hydrostatic considerations and tilt from southwest to northeast to provide for momentum equilibrium. This tilt is important because CAT normally occurs in a dynamic atmosphere.

4.2.1.7 After examining these products and reviewing the latest pilot reports (PIREPs - see appendix A) of occurrence and non-occurrence of CAT, the forecaster reviews the AFGWC CATA automated rawinsonde analysis of turbulence potential. CATA locates areas of strong vertical wind shears (the most effective producer of CAT) and stable layers.

4.2.1.8 In the final analysis, the CAT forecaster checks the AFGWC 250 mb maximum wind analysis to refine and recheck the analysis. Using computer displayed wind fields and aircraft reports, upper-air and CAT forecasters analyze the flow between 200 mb and 300 mb. Shear lines, maximum wind cores, jet diffluence and confluence, and subtropical and polar jet interaction are vividly depicted.

4.2.1.9 To identify areas of possible mechanical or mountain-wave activity, MTWVB, an automated mountain-wave analysis product, is checked and compared with the synoptic situation. MTWVB considers pressure gradient, mountain-top winds, pressure tendencies, surface wind reports, and thermal gradients to determine mountain-wave and mechanical turbulence using the criteria suggested by Sorenson and Beckwith (1975).

4.2.2 After a careful turbulence analysis, the forecaster turns to forecast guidance tools to prepare the turbulence forecast.

4.2.2.1 The 250 mb forecast is the primary tool for determining future jet stream positions. In addition, other 250 mb synoptic features associated with turbulence can be forecast.

4.2.2.2 The 500 mb height and isotach forecast can be used to approximate future jet stream positions and wind components normal to mountain ranges, as well as the general synoptic pattern.

4.2.2.3 The Limited-area Fine-mesh Model (LFM) 500 mb height and vorticity package, which is available from the National Meteorological Center (NMC), is extremely useful in determining regions of possible cyclogenesis and in noting the movement of short waves across North America. For other areas in the Northern Hemisphere, global-scale 500 mb hemisphere height and vorticity fields are used.

4.2.2.4 The forecast surface fronts and pressure centers are inspected for signs of cyclogenesis and checked against the forecast jet stream position.

4.2.2.5 MTWVB also contains 12- and 24-hour forecasts of mechanical and mountain-wave turbulence.

4.2.2.6 Again, the LFM 500 mb height forecast and other 200 mb and 850 mb wind forecasts are particularly useful in verifying MTWVB forecasts and synoptic pattern changes.

4.2.2.7 Significant Meteorological Information reports (SIGMETs) are helpful in identifying existing and potential turbulence areas. This information tends to be pessimistic because it applies to all types of aircraft.


4.2.2.8 The NMC Significant Weather (SIG WX) forecasts (400-150 mb) are consulted for an additional opinion of where turbulence might exist.

4.2.2.9 At AFGWC, continuity is an important forecasting tool. Under no circumstances will a forecast area be added, dropped, or modified unless sufficient data and sound meteorological logic warrant a change.


4.2.3 While reviewing all of these tools, the forecaster must note the progression of turbulence areas. Their movement, growth, intensification, and dissipation are important factors to consider in moving the systems. Once a region of CAT is located, it is possible to move it in time, maintaining association with the same synoptic features. The resulting AFGWC CAT forecast must include the total area swept-out by the moving patch of CAT. However, this approach to CAT forecasting sometimes results in forecast turbulence areas that are too large to be useful. (See Figure 4 for examples).

4.3 Microscale versus macroscale. At first glance, the Richardson number approach for analyzing CAT and the synoptic rules-of-thumb may appear to be completely different. This is not true. The rules-of-thumb compiled by experienced forecasters focus on those synoptic features that also produce low Richardson numbers. The low Richardson numbers are, in turn, always associated with CAT. Hence, we see that both the rules-of-thumb approach and the Richardson number approach should indicate turbulence in the same regions around the globe.


The computer can easily be programmed to look at microscale phenomena. It can calculate Richardson numbers from the upper-air soundings at each RAOB site. From these Richardson numbers, it can then diagnose regions where CAT is likely to occur. However, it is very difficult to program the computer to recognize macroscale patterns such as converging jets; hence, synoptic pattern recognition is left to the CAT forecaster. Lists of synoptic patterns often associated with CAT complete the rules-of-thumb models. Both the rules-of-thumb and the computerized forecast methods are discussed in detail in this tech note.

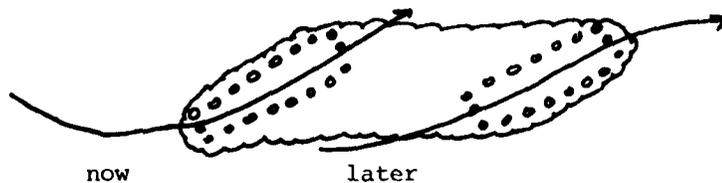

Cold air advection in short-wave trough at middle levels.

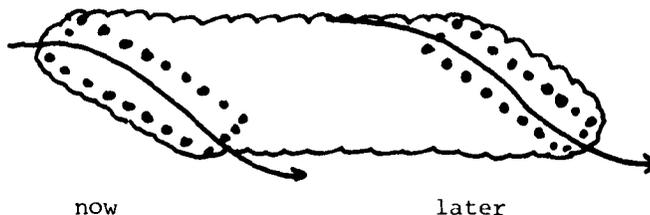

Warm air advection in short-wave ridge at middle levels.

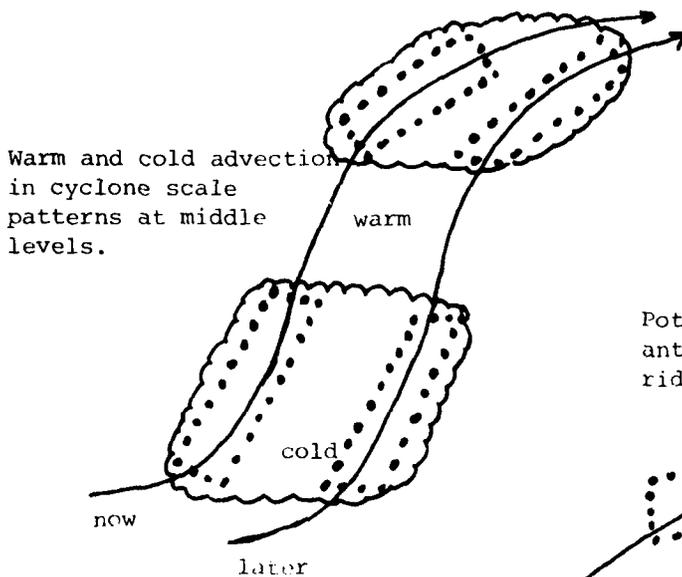

Warm and cold advection in cyclone scale patterns at middle levels.

Potential in strong anticyclonically curved ridge.

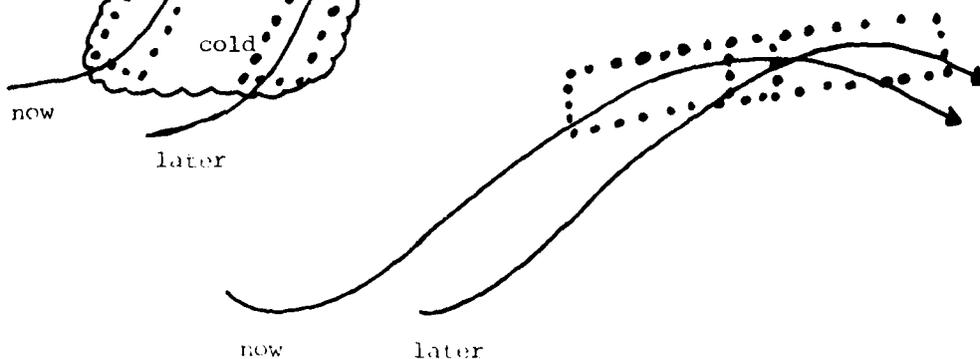


Figure 4. Examples of forecasting CAT potential over an extended period of time, after Holcomb (1976). Potential at start of forecast period is "now", while "later" refers to the end of period. Scallop show the entire forecast area of turbulence potential.

5 AUTOMATED AIDS

AFGWC has two major automated CAT forecasting computer programs, CATA and MTWVB. CATA consists of a system of programs that diagnose CAT based on RAOB data. One portion of CATA uses the Richardson number to diagnose dynamic instabilities between the surface and 80,000 feet. Another portion diagnoses thermal turbulence within the lowest few thousand feet of the atmosphere. The third portion diagnoses mechanical turbulence over rough terrain. MTWVB diagnoses and forecasts mountain-wave turbulence near a specified number of locations over the globe.

CATA is run twice daily on the computer from the 00Z and 12Z RAOB data, whereas MTWVB is run 8 times per day.

Before CATA became operational, CAT forecasters were required to search manually through hundreds of skew-T graphs to find regions of strong wind shear with proper stability. The CATA program now does this search automatically. Using this aid, CAT forecasters save about 1½ hours each day.

5.1 CATA program.

5.1.1 Dynamic CAT. CATA calculates Richardson numbers from rawinsonde wind and temperature observations. It has relatively good vertical resolution because it considers both the mandatory and significant levels. It is a diagnostic model that uses only observed data and cannot make CAT forecasts.

CATA accesses the Northern Hemisphere RAOB data that have been validated and stored in the AFGWC data base. Each RAOB is examined individually and the following calculations are made.

First, CATA splits the winds at each reported level into the U and V components. Next, a five-point filter is used on each of the wind components to smooth unrealistically sharp kinks from the vertical wind profile. These kinks occur when slightly different wind speeds or directions are reported at adjacent mandatory and significant levels. Experience has shown that often these kinks are caused by restrictions imposed on the resolution of reported RAOB data (1 m/s speed and 5° direction change), rather than by true wind shears. The problem of profile kinks is particularly acute when the two levels in question are less than 100 m apart. Hence, this filter is designed to smooth closely spaced levels more strongly than distant levels.

In general terms, five weighting values are calculated and applied to five wind values to calculate a filtered wind value, V_j . If we denote each weight w_{ij} , then

$$w_{ij} = \left\{ \frac{h_i - h_j}{B} \right\}^{-1},$$

where the index i refers to the j th weight, h_i and h_j are the heights (in meters) above the surface, and B is the filter bandwidth ($B = 100$ m).

When j is allowed to vary from $i-2$ to $i+2$ the resulting five weights will be inversely proportional to the vertical separation between reported levels. The filtered value, V_i , can be written

$$V_i = \frac{\sum_{j=-2}^2 V_j \omega_{ij}}{\sum_{j=-2}^2 \omega_{ij}}$$

An example of the use of these weights follows. If $i=3$ and we assume that $h_{i+1} > h_i$, then

$$\begin{aligned} \omega_{31} &= (h_3 - h_1 + B)^{-1} & \omega_{32} &= (h_3 - h_2 + B)^{-1} \\ \omega_{33} &= B^{-1} & \omega_{34} &= (h_4 - h_3 + B)^{-1} \\ \omega_{35} &= (h_5 - h_3 + B)^{-1} \end{aligned}$$

If the wind values depicted by the solid line in Figure 5 are to be filtered, then the filtered V-component wind at h_3 is:

$$V_3 \Big|_{\text{filtered}} = \frac{\omega_{31}V_1 + \omega_{32}V_2 + \omega_{33}V_3 + \omega_{34}V_4 + \omega_{35}V_5}{\omega_{31} + \omega_{32} + \omega_{33} + \omega_{34} + \omega_{35}}$$

This filter is similarly used on both components of the wind in the RAOB report. Figure 6 shows the highly peaked variation of weights with distance from the center point, h_i .

After filtering, the vector wind shears (that is, speed and direction changes) and potential temperature lapse rates are calculated between each pair of adjacent reported levels. Note, that if temperatures or winds are missing at one of the levels, then a substitute value is interpolated from the two closest levels with data. CATA then calculates a Richardson number for each layer.

Unfortunately, the significant and mandatory levels from RAOB data do not offer sufficient vertical resolution to apply the Richardson number criterion of $Ri = \frac{1}{4}$ directly. Even if occasionally there are closely spaced levels, the filter previously described smooths the winds because it cannot distinguish between good and erroneous wind shear data. Consequently, the calculated Richardson numbers will rarely be less than $\frac{1}{4}$.

Hence, we assume that within any reported layer there is a chance that a thinner layer exists having a Richardson number small enough to be turbulent. This chance increases as the Richardson number (over the thicker layer) becomes smaller. The computer thus calculates a probability of CAT occurrence based on the information in Figure 7. There is a 100% chance of CAT if the whole RAOB layer has a Richardson number less than $\frac{1}{4}$.

Although the Richardson number is a proven indicator of CAT occurrence, there is no proven method in the available literature to estimate CAT

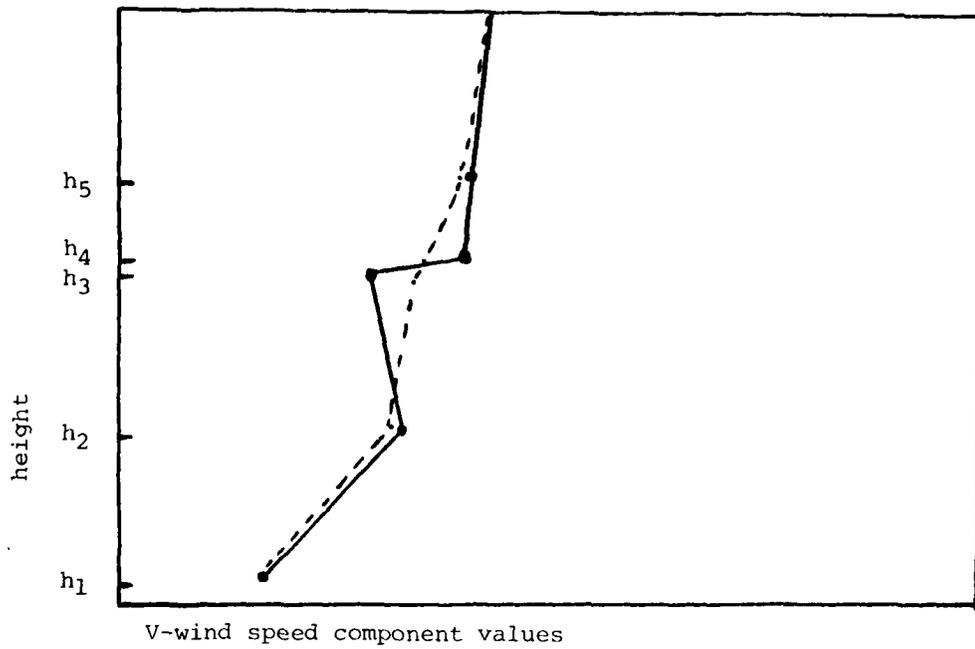


Figure 5. An example of the effects of a five-point filter on raw vertical wind data. Solid line indicates raw wind data and dashed lines the resulting smoothed wind values.

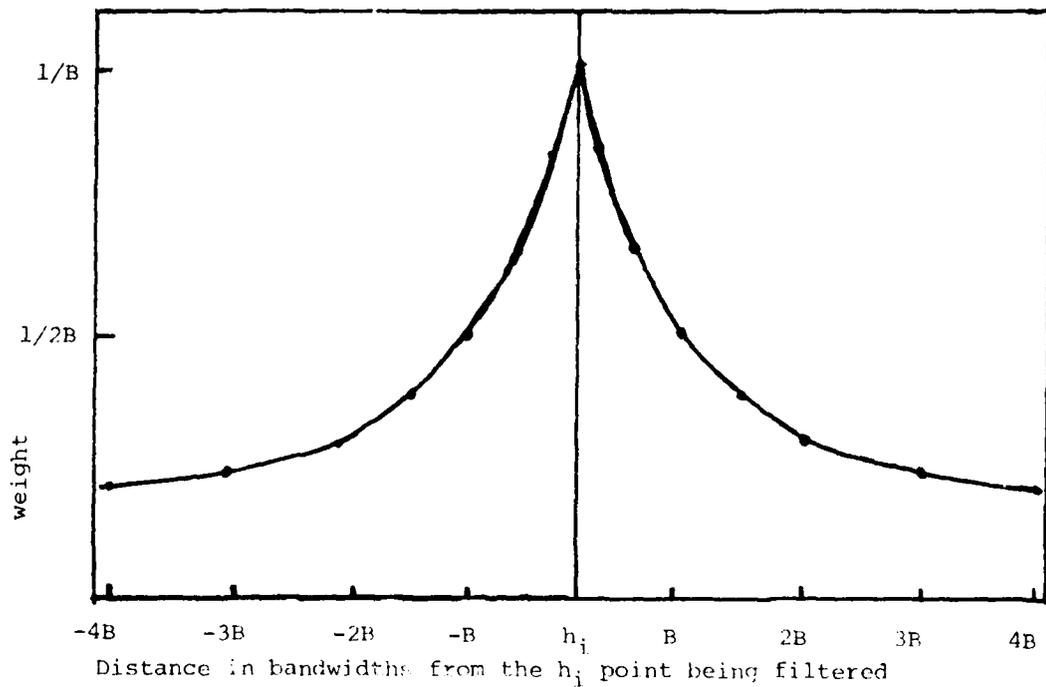


Figure 6. Five-point filter weighted values as a function of distance from the central point, h_i .

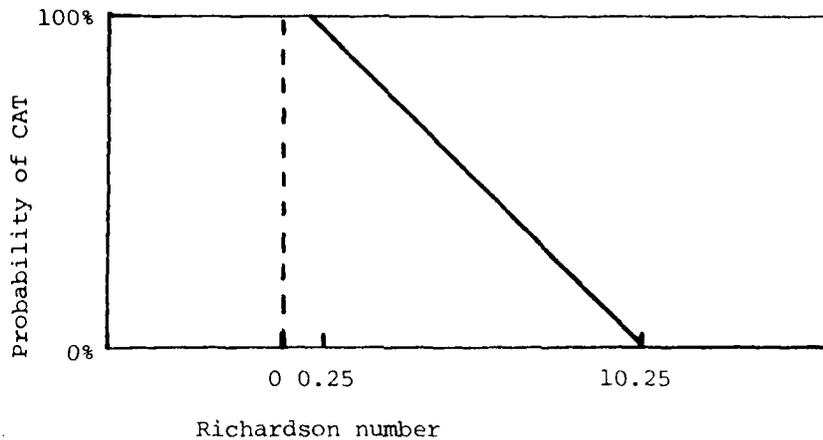


Figure 7. Relationship between the bulk Richardson number, R_i , over a layer and the probability of turbulence within that layer. This curve was developed empirically at AFGWC.

Wind Speed m/s (kt)	Vector wind shear S^{-1} (kt/1000 feet)					
	.0084-.0118 (5-7)	.0118-.0169 (7-10)	.0169-.0338 (10-20)	.0338-.0506 (20-30)	.0506-.0844 (30-50)	.0844--- (50+)
20-30 (40-60)	N	L	L-M	M	M-S	S
30-60 (60-120)	L	L-M	M	M-S	S	S-X
60+ (120+)	L	L-M	M	M-S	S	X

Figure 8. Empirically derived relationship between turbulence intensity and the wind speed and shear. "N" indicates none, "L" is light, "M" is moderate, "S" is severe, and "X" is extreme turbulence.

intensity. CATA, therefore, employs the empirical procedures summarized in Figure 8. That is, CAT intensity increases with wind speed and particularly with wind shear. The exact values in Figure 8 are based on recommendations from experienced CAT forecasters at AFGWC.

Such a relation between intensity and winds is seen to be reasonable. The product of wind speed times wind shear can be related to the change in mean kinetic energy per unit mass (KE) with height. Using basic calculus concepts where U is total wind speed, one can write:

$$U \frac{dU}{dz} = \frac{d}{dz} \left[\frac{1}{2} U^2 \right] = \frac{d}{dz} \left[KE \right]$$

After turbulence occurs, wind shears and kinetic energy gradients become much smaller. Thus, the change in mean wind kinetic energy with height is a measure of the energy available to produce turbulence.

Present policy at AFGWC requires a yes-no forecast of moderate or greater turbulence. Hence, CATA is designed to output a turbulence forecast only if both the probability is greater than or equal to 50% and the intensity is light-moderate or greater. This is equivalent to assuming a modified critical Richardson number of 5.25.

In summary, CATA produces values of CAT probability and intensity for every layer in every RAOB sounding. This information is then converted into a yes-no diagnosis of CAT.

5.1.2 Thermal CAT. Turbulent thermals are assumed to rise from the surface whenever the surface potential temperature is warmer than the boundary layer air just above it. CATA obtains the surface temperature from the RAOB data. CATA assumes that the boundary layer temperature is represented by the temperature at the second reported height above the surface. All thermal CAT is assumed to be of light intensity only. Thermal CAT is diagnosed to exist between the surface and the height where the environmental potential temperature equals the surface potential temperature (see Figure 9).

5.1.3 Mechanical CAT. Mechanical CAT intensity is calculated from the nomogram in Figure 10. This nomogram is defined by the following equation:

$$\text{INTENSITY} = a \times U \times R + b$$

where: U is the average mountain-top wind speed (m/s)
R is the upwind terrain roughness (m)
a is an empirical factor (3.0×10^{-4}) s/m²
b is an empirically derived, dimensionless constant (2.7).

This nomogram states that faster winds blowing over rougher terrain produce turbulence of greater intensity.

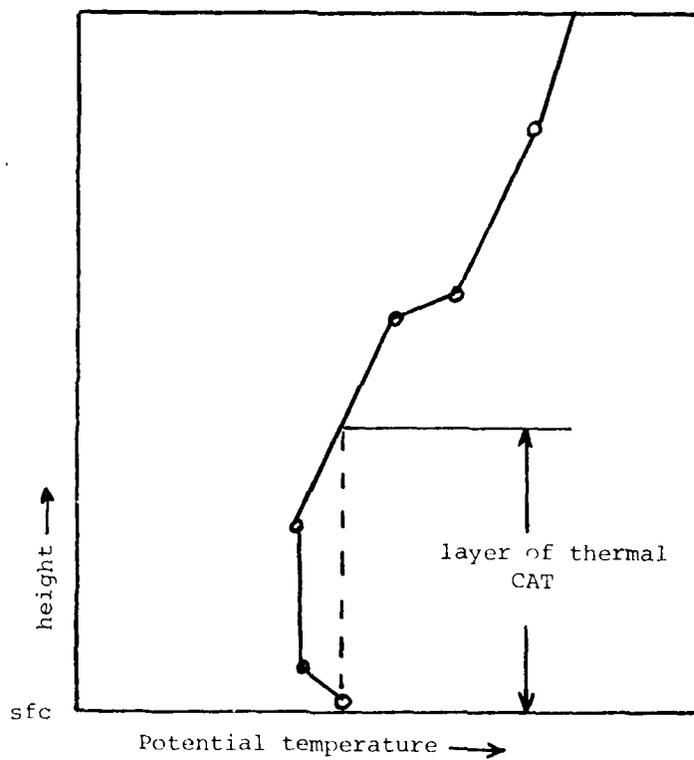


Figure 9. A method used to calculate the thickness of a thermal CAT layer. Reported RAOB temperatures indicated by open circles.

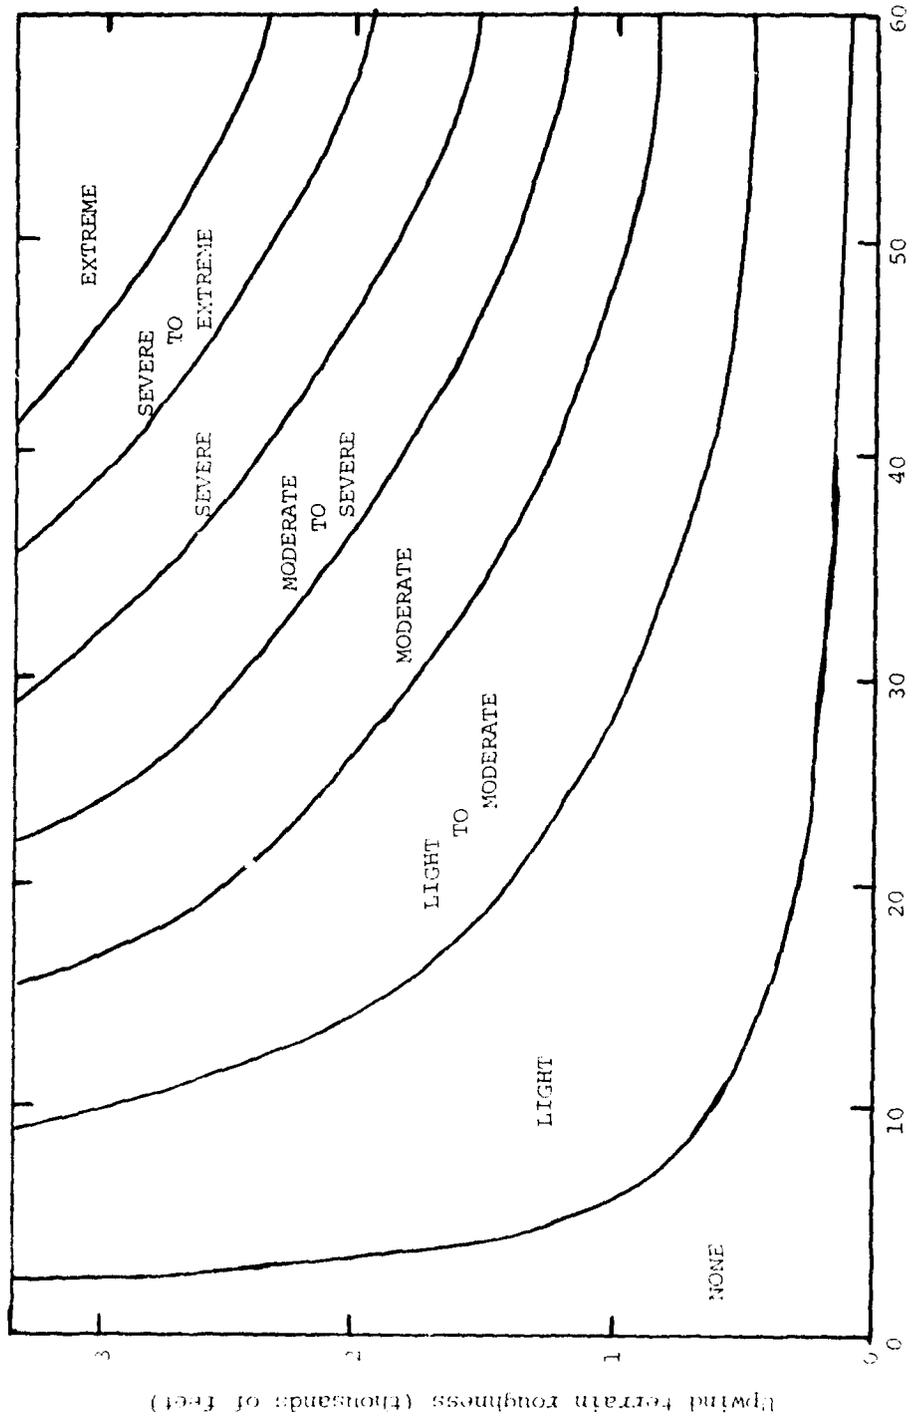


Figure 10. Nomogram used to estimate mechanical turbulence intensity.

Roughness values for the CONUS are displayed in Figure 11. This roughness is the standard deviation of terrain height (in ft). It was derived from WAC aviation charts by picking-off the terrain height every 5 miles along 150-mile long legs. A leg extends from each RAOB station in each of the eight primary compass directions. The standard deviation for each leg was then calculated from these heights. (Actually, the roughness values stored in the computer are slightly different than that displayed in Figure 11. The standard deviations in the computer were found by weighting the terrain heights inversely as the distance from the RAOB station. Thus, mountains far away from the RAOB station would produce less CAT at the station than that produced by closer mountains.)

The CATA routine selects the highest terrain feature within 150 miles upwind of the RAOB station. The RAOB winds from the surface up to 1000 ft above this maximum height are then averaged together. This average wind speed is assumed to be the average mountain-top wind used in Figure 10. The average wind direction is also used to select the proper upwind roughness. Mechanical CAT is assumed to occur throughout the layer from the surface to 1000 feet above the maximum height.

5.1.4 Output products.

5.1.4.1 CATA makes horizontal analyses of CAT from the surface to 80,000 ft. Four Northern Hemispheric charts are printed, each with a different range of heights. Runstreams CATONE and CATRE cause the following charts to be printed by CATA:

CATONE: Surface to 16,000 ft
16,000 to 40,000 ft

CATRE: 40,000 to 56,000 ft
56,000 to 80,000 ft

Each Chart is printed on a 1:15 million scale polar-stereographic map of the Northern Hemisphere. Included on each chart are latitude and longitude lines. These runstreams are executed at the following times every day:

CATONE: 3Z, 15Z and 4Z, 16Z

CATRE: 5Z, 17Z

A sample of the CATA output is included in Appendix B-1.

Note that the Richardson number approach is used to analyze CAT in all layers reported by the RAOB. In addition, thermal and mechanical CAT are analyzed and printed on only the lowest chart (surface to 16,000 feet).

5.1.4.2 CAT values for every RAOB layer are sorted into specified height intervals (see Figure 12). If any one RAOB sounding has more than one layer in a height interval, then only the most intense CAT value is associated with that interval. For example, if the RAOB data show two layers of light CAT, one layer of moderate CAT, and two layers without CAT all between 37,000 and 40,000 feet, then CATA output

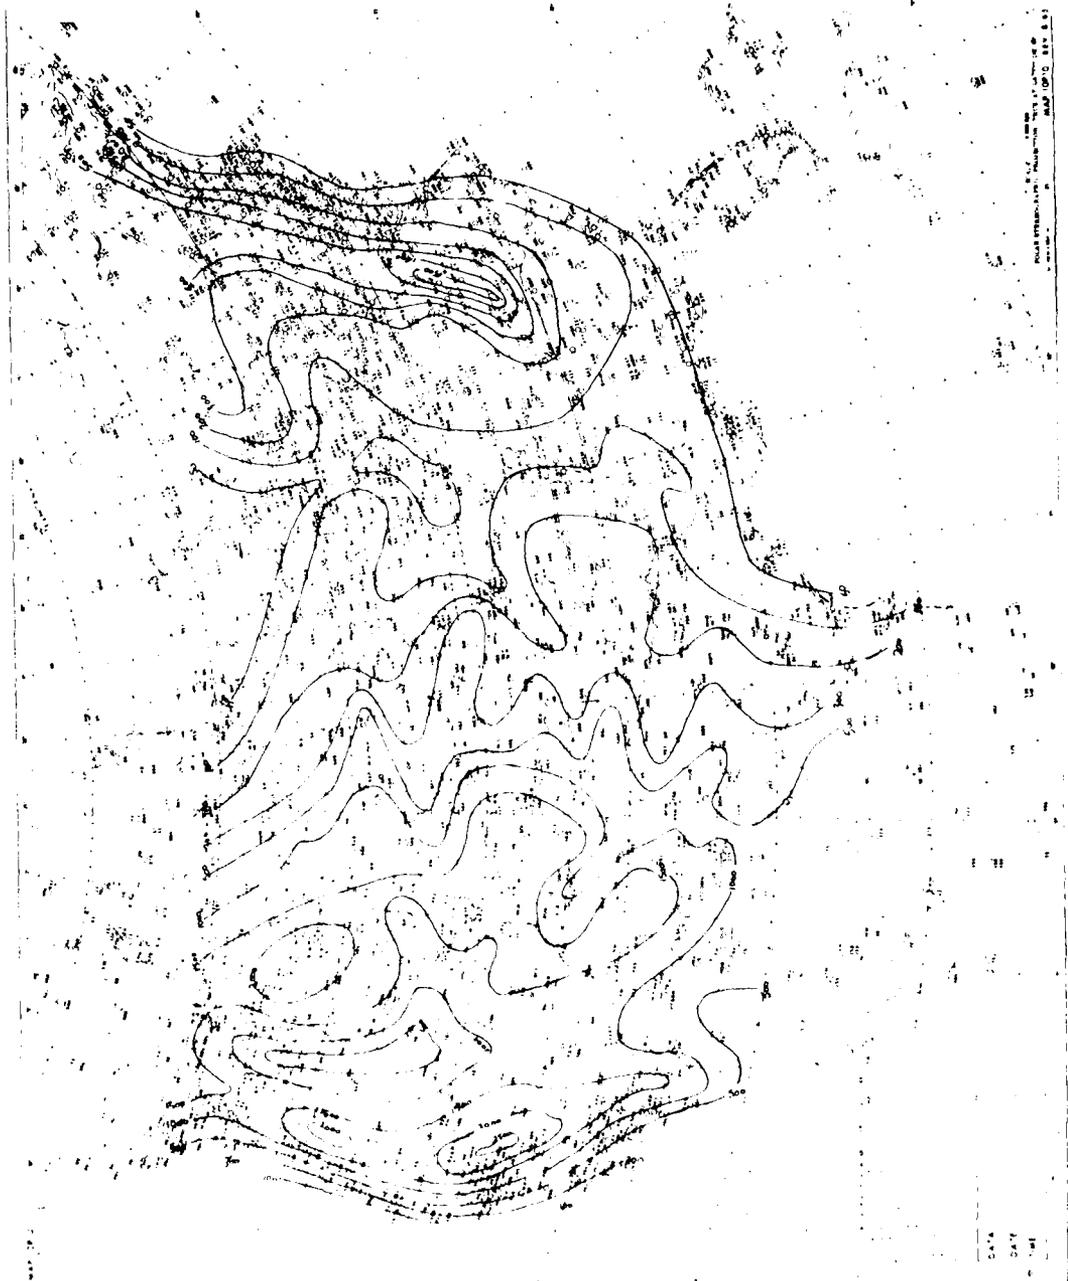


Figure 11. Terrain roughness values over the CONUS in terms of standard deviation of terrain height (ft).

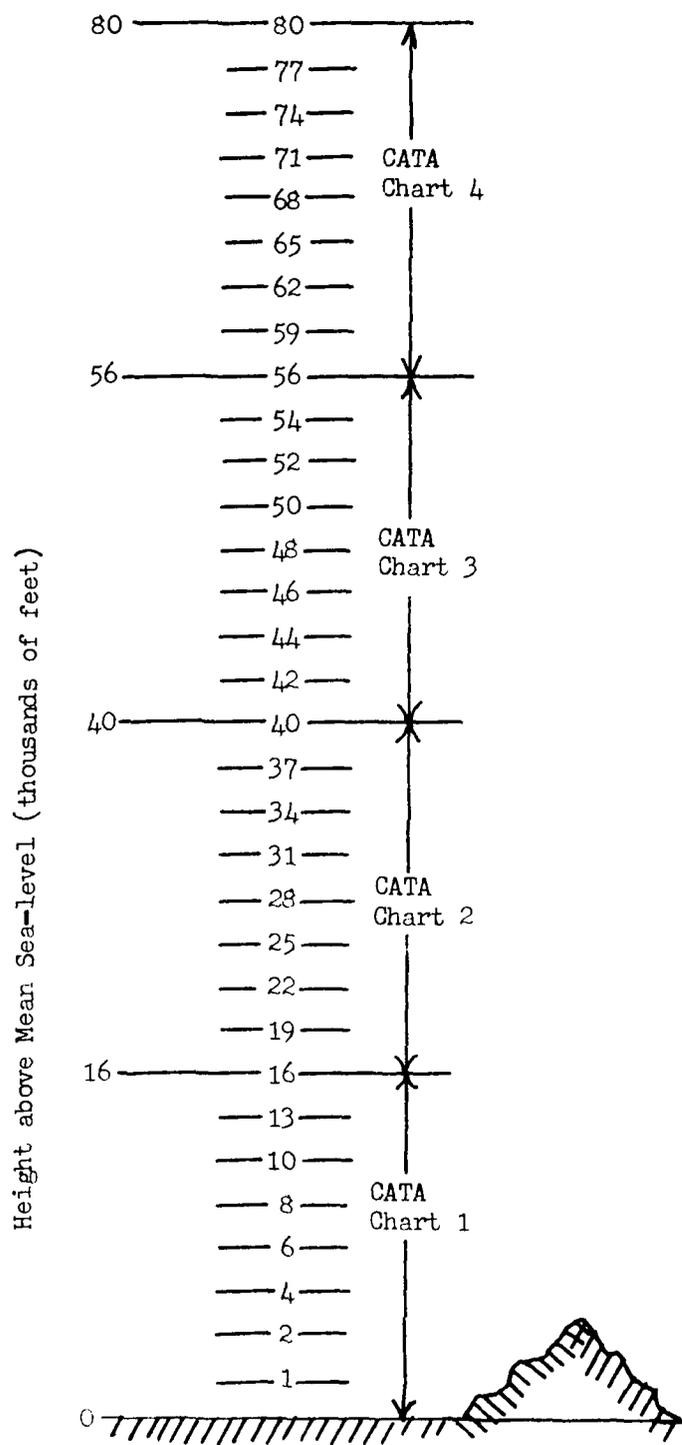


Figure 12. Height intervals for CATA display.

indicates that there is moderate CAT in the 37,000-40,000 foot height interval at that one RAOB station.

5.1.4.3 Tropical and southern hemispheric RAOBs are also analyzed by CATA. CAT diagnoses for these stations are listed in tabular format (see Appendix B-2) rather than being plotted on a map. CAT diagnoses are listed for 16 layers between the surface and 40,000 feet.

5.2 MTWVB program. MTWVB is a computer program that provides analyses and 12- and 24-hour forecasts of mountain-wave turbulence. It does not use the equations of motion to forecast exact air flow over mountains. Such a computer program would take too long to run operationally. Instead, MTWVB uses the rules-of-thumb presented by Sorenson and Beckwith (1975). A sample of MTWVB output is included in Appendix C.

Sacrifices in physics within MTWVB were necessary to enable timely execution of the program. Both the atmospheric stability and the exact mountain shape are neglected. Basically, MTWVB assumes that mountain waves occur when strong winds blow over high mountains. Additionally, turbulence is correlated with other parameters such as surface pressure difference, 850 mb and 200 mb temperature gradients, maximum winds at mountain top and below 500 mb, surface gusts, and tropopause heights and temperatures.

The rules-of-thumb programmed into MTWVB are summarized in Tables 1-3 and Figures 13 and 14. The criteria in these tables are modifications of Sorenson and Beckwith's (1975) proposals. The following paragraphs describe the usage of these parameters in more detail.

5.2.1 Low-level mountain-wave turbulence. Figure 15 shows how data are selected for each mountain-wave region. Certain regions downwind of mountain ranges are known from experience to have more mountain-wave turbulence than other parts of the world. These regions have been selected by hand and delineated by boxes. At present, 49 mountain-wave boxes are being used by the computer (see Figure 16).

For each box, a primary and alternate pair of surface observation stations have been selected. Each pair has an upwind and a downwind station. Surface pressure differences across the mountain range are obtained from these station pairs. Surface gust data are also obtained from the two downwind stations.

Also superimposed on this picture, as is sketched in Figure 15, are four coarse-mesh grid points. The entire array of these points (see the AFGWC Grids Tech Note 79-003) covers much of the Northern and Southern Hemispheres. Analyzed and computer forecast fields of meteorological variables (such as winds, temperatures, humidities) are stored (remembered) at each of these grid point positions for each of the mandatory pressure levels. For each box, the four closest grid points (numbered 1, 2, 3, and 4 in this sketch) have been selected by hand.

These grid points can be used in place of missing surface stations to get surface pressure differences across the mountain range. Grid-point data are also used by the computer to get 850 mb temperature differences and gradients, 200 mb temperature gradients, mountain-top winds, 500 mb winds, and tropopause heights and temperatures. Also,

Low-level feature	Turbulence intensity	Low-level mountain-wave turbulence (surface to 10,000 feet maximum above ridge)		
		LIGHT	MODERATE	SEVERE
Wind component normal to mountain range at mountain top \geq 25 knots -and-	ΔP across mountain at surface	See Figure 13	See Figure 13	See Figure 13
	ΔT across mountain at 850 mb	$< 6^{\circ}\text{C}$	6 - 9°C	$> 9^{\circ}\text{C}$
	$\left \frac{\Delta T}{\Delta X} \right $ across mountain range at 850 mb	$< 4^{\circ}\text{C}/60$	4 - $6^{\circ}\text{C}/60$ nm	$> 6^{\circ}\text{C}/60$ nm
	Lee side surface gust (analysis only)	< 25 knots	25 - 50 knots	> 50 knots
	Winds below 500 mb greater than 50 kts	Increase turbulence intensity (found from the other parameters) by one degree of intensity		

Table 1. Criteria for low-level mountain-wave turbulence.

Low-level turb / High-level turb	MODERATE	SEVERE
LIGHT	---	---
MODERATE	LIGHT	MODERATE
SEVERE	MODERATE	SEVERE
Mid-level turbulence value		

Table 2. Mid-level mountain-wave turbulence values based on low-level considerations. Relationship was established empirically at AFGWC for heavy aircraft.

Feature	Turbulence intensity	High-level clear air turbulence +/- 5000 feet of tropopause	
		MODERATE	SEVERE
MODERATE or SEVERE low-level turbulence - and -	Tropopause height and temperature	MODERATE from Figure 14	SEVERE From Figure 14
	Temperature gradient at 200 mb	< 5°C/120 nm	≥ 5°C/120 nm

Table 3. Criteria for high-level mountain-wave turbulence. Values were determined empirically at AFGWC for heavy aircraft.

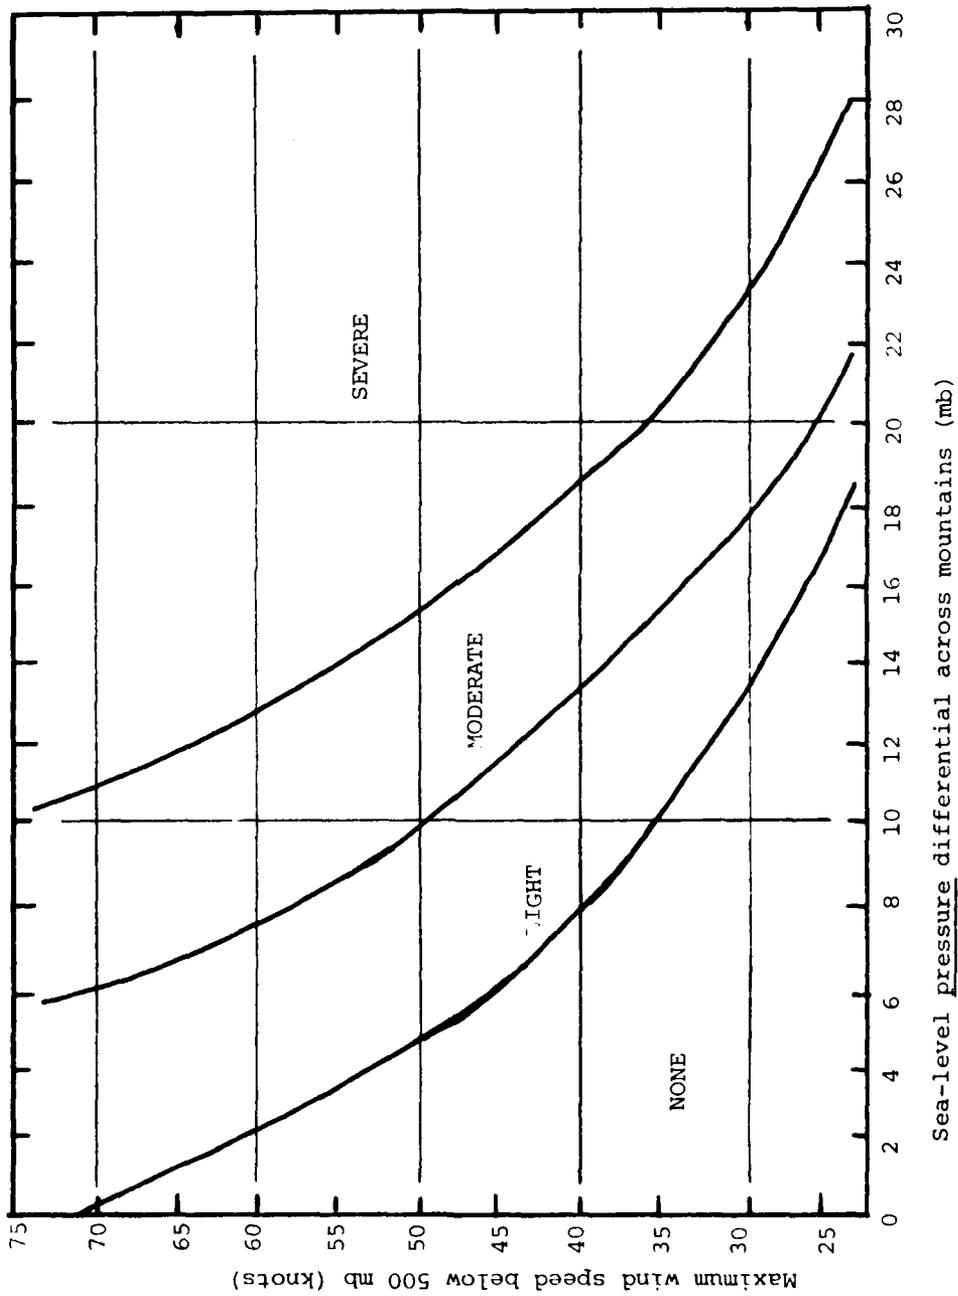


Figure 13. Turbulence intensity as a function of maximum wind speed and sea-level pressure differential, after Harrison (1965).

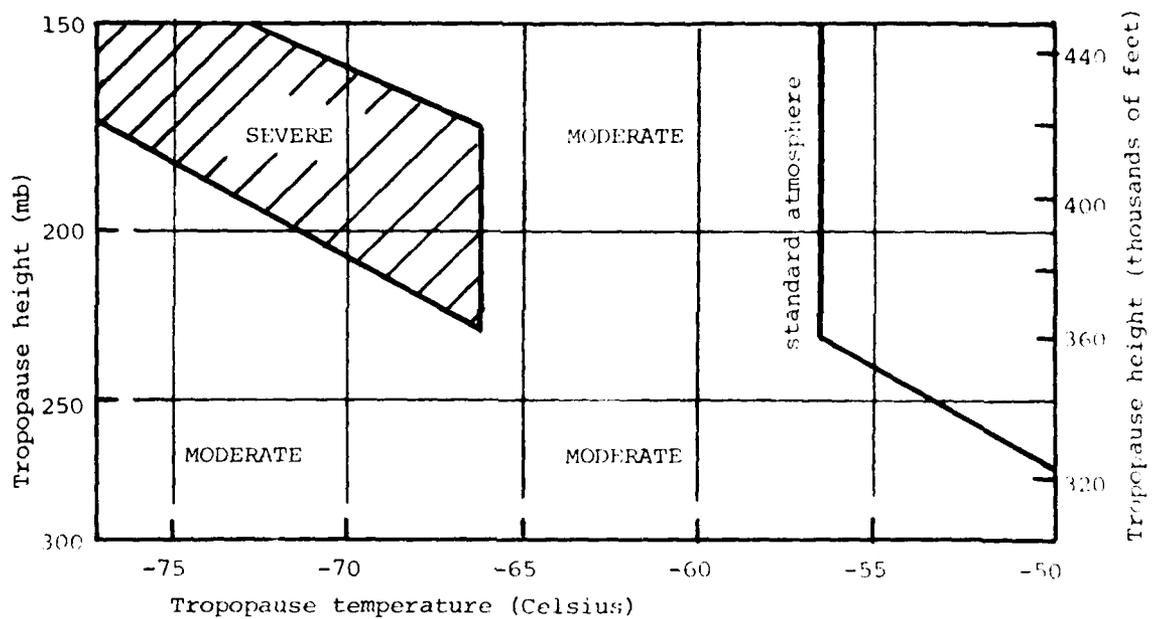


Figure 14. High-level turbulence intensity as a function of tropopause height and temperature. Data from Sorenson and Beckwith (1975).

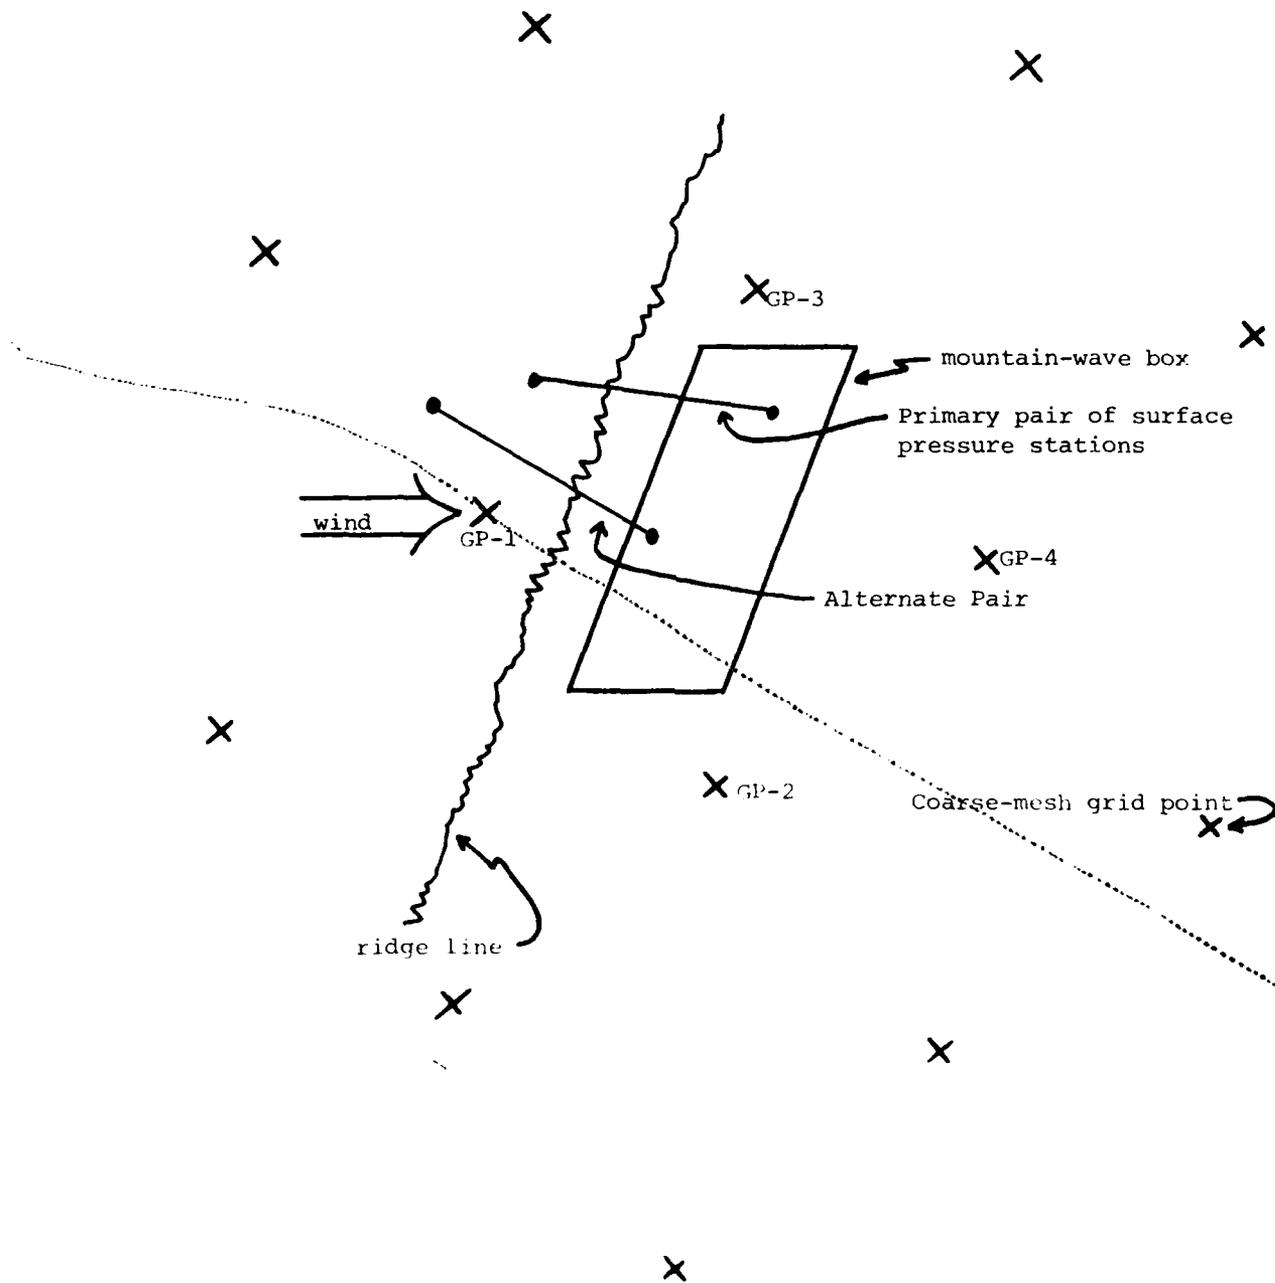


Figure 11. A schematic of data points used to evaluate mountain-wave turbulence potential.



Figure 16. Northern hemisphere mountain-wave boxes.

when available, half-mesh grid points are used instead of coarse-mesh grid points.

Unfortunately, the grid points are not always aligned parallel or perpendicular to the ridge line, and sometimes no one grid point lies within the box. The best grid points to use for each box have been subjectively selected. Refer to the sketch again as an example: grid point one (GP1) may be selected to represent the best conditions inside of the box, GP1 with GP2 may be used for along-the-ridge conditions, while GP1 with GP3 (or GP1 with GP4) may be used for across-the-ridge conditions.

The mandatory pressure level that best represents conditions at mountain top is an arbitrary choice. At present, the lowest mandatory level above the mountain top¹ is used, this choice is partially subjective. The levels used for each box are summarized in Table 4, along with the average ridge heights.

Now, back to the computer routine. First, the computer checks whether the component of the mountain top wind that crosses the ridge within a small range of angles (see Table 4 for list of wind directions) is greater than or equal to 25 knots. If this condition is not satisfied then no turbulence is predicted at any level for that box.

If this condition is satisfied, the computer goes on to consider the other parameters in Table 1. The maximum wind speed below 500 mb and the positive sea-level pressure difference across the mountain range (see Figure 13) are considered². A positive pressure difference means that the upwind pressure is greater than the downwind pressure. This pressure difference can be obtained from either the surface station observations or from grid-point fields. Empirical correction factors (see Table 4) are added to the surface station pressure differences before Figure 13 is used.

MTWVB also considers the absolute values of the 850 mb temperature differences across and along the mountain range. Finally, it looks at gust data at the surface stations on the lee side of the range.

The four parameters (ΔP , ΔT , $\Delta T/\Delta X$, gusts) may predict different values of turbulence intensity for any one box. The maximum value is used. Next, this maximum value is increased one turbulence degree (for example from moderate to severe) if the maximum winds below 500 mb are greater than 50 knots. The resulting intensity is assumed to apply to a region over the mountain-wave box from the surface to 5000 ft above the surface (AGL).

5.2.2 High-level mountain-wave turbulence. Next, the computer finds the turbulence intensity in the high-level part of the mountain-

1. The terms "mountain top" and "average ridge height" have the same meaning in this note.

2. Note that a few boxes accept all wind directions (see Table 4). For these boxes, both positive and negative ΔP are used; that is, the absolute value of ΔP is used in Figure 13.

BOX NUM	ACCEPTABLE WIND DIRECTIONS (DEGREES FROM THE NORTH)	LOWEST MANDATORY PRESSURE LEVEL (MB)	AVERAGE HEIGHT OF RIDGE (FT)	PRESSURE DIFFERENTIAL ADJUSTMENT FACTOR
1	250 - 270 - 290	700	7,000	+4
2	250 - 270 - 290	700	6,500	+4
3	ALL	700	7,000	+4
4	240 - 250 - 290	700	10,000	+4
5	240 - 250 - 270	700	11,000	+2
6	All	700	7,000	+1
7	220 - 250 - 290	700	8,000	-3
8	250 - 280 - 330	700	10,000	+3
9	250 - 270 - 290	700	11,000	-1
10	ALL	700	8,000	0
11	220 - 270 - 290	700	7,000	-1
12	270	700	8,000	+4
13	270	700	10,000	0
14	270	700	10,500	-4
15	260 - 280 - 310	700	10,000	-4
16	ALL	700	11,000	0
17	250 - 270 - 290	700	8,500	+3
18	250 - 270 - 290	700	11,000	0
19	220	700	7,000	+1
20	220	850	2,000	+1
21	240 - 280 - 290	850	3,000	-4
22	260 - 290	850	2,000	-1
23	320	850	4,000	0
24	220	700	8,000	0
25	210 - 220 - 230	700	10,000	-4
26	220	700	8,000	-4
27	220	500	12,000	+1
28	220 - 230 - 240	500	13,500	-4
29	340	700	6,500	-4
30	330 - 350 - 010	700	8,000	0
31	360	700	8,000	+4
32	310 - 330	700	10,000	+3
33	250 - 270 - 290	700	10,000	-8
34	340	700	6,000	0
35	330	850	5,000	-4
36	330	850	5,000	0
37	290	700	6,000	-1
38	270	850	2,000	+2
39	340	700	8,500	0
40	200	700	8,000	0
41	320 - 330	700	6,000	-4
42	330 - 340 - 350	700	9,000	-1
43	300	700	10,000	+5
44	240 - 250	850	3,000	+3
45	330 - 340	850	5,000	+1
46	320	700	6,000	+1
47	280	850	5,500	+2
48	290	850	5,000	0
49	100 - 200 - 300	700	10,000	0

Table 4. Mountain-top data associated with 49 specific mountain-wave turbulence regions. See Figure 16 for the location of each numbered box.

wave box. High-level turbulence is assumed to exist within 5000 feet above and below the tropopause. If moderate or severe low-level turbulence is expected, then moderate high-level turbulence is automatically assumed to exist (see Table 3). In addition, if either the maximum temperature gradient at 200 mb is greater than $2.5^{\circ}\text{C}/60 \text{ nm}$ or if the tropopause height and temperature for any one of the four grid points associated with a box lies within the shaded area of Figure 14, then severe upper-level turbulence is expected.

5.2.3 Mid-level mountain-wave turbulence. Finally, the mid-level turbulence intensity is found using Table 2. Once the low-level turbulence intensity (leftmost column) and the high-level turbulence intensity (top row) are determined, a mid-level turbulence intensity is assigned to this region between the low and high levels.

It is interesting to note that the following predictions will always occur based on the logic just presented:

If the low-level turbulence is MDT,
then the high-level will always be at least MDT,
and the mid-level will always be ICT.

If the low-level turbulence is SVF,
then the high-level will always be at least MDT,
and the mid-level will always be MFT.

Also, note that some mountain ranges are so high that the mountain-top winds are taken from the 500 mb pressure level (see Table 4). For these cases, the mountain top winds that are printed out by the computer are equal to the maximum winds below 500 mb, which are also printed.

The average tropopause height is calculated from the tropopause heights at the four grid points nearest the box. Hence, this average value may differ from the one tropopause height selected that is closest to the shaded area on Figure 14.

5.3 CATP program. Before leaving the subject of CAT forecasting aids, the CATP computer program should be mentioned briefly. This program was unsuccessful, and thus never implemented at AFGWC. Its purpose was to forecast, rather than analyze, CAT.

Basically, CATP was to diagnose CAT from the macroscale forecast fields of wind and temperature. Theoretically, the same physics should hold whether one diagnoses CAT from forecast fields or from observed (RAOB) fields. However, the forecast fields at AFGWC have a resolution too coarse to study microscale phenomena such as CAT. Also, the forecast fields appear increasingly smoother as the forecast progresses. Thus, the CAT forecasts provided by CATP are of insufficient quality to justify operational use.

6 OPERATIONAL CAT FORECASTING BASED ON MODEL OUTPUT AND OTHER INFORMATION

CAT may occur in any of the following situations:

Areas of Thermal Advection

- Cold-air Advection
- Warm-air Advection
- Rapid Surface Cyclogenesis
- Outflow Area of Cold Digging Jet

Areas of Considerable Vertical Directional Shear

- Tilted Trough
- Tilted Ridge
- Confluent Jet Streams
- Sharp Ridge

Areas of Considerable Horizontal Directional and/or Speed Shear

- Sharp Anticyclonic Curvature
- Development of Cutoff Low
- Diffluent Upper Flow

Areas near Mountains

Areas in the Stratosphere

6.1 Thermal advection.

6.1.1 Cold-air advection. CAT frequently occurs in regions of increasing thermal gradients, as best illustrated by cold-air advection in long- and short-wave troughs. Figure 17 shows examples of CAT forecasts associated with cold advection in an upper-air trough. The horizontal temperature gradients associated with the jet front in the middle troposphere are clearly depicted. At 300 mb, there is normally an absence of cold-air advection so a careful analysis of the 200 mb height and temperature fields is necessary. To forecast CAT associated with cold-air advection, Sorenson and Beckwith (1975) suggest that a strong temperature gradient of $5^{\circ}\text{C}/120\text{ nm}$ at 200 mb should exist with one of the following features:

Speed of trough movement of at least 25 knots.

A strong horizontal wind shear of at least 40 knots/120 nm in the region of closely packed isotherms.

A wind component greater than 65 knots normal to the region of closely packed isotherms.

A sharp wind shift of at least 75° in a region of closely packed isotherms.

The 500 mb analysis of observed data may clearly depict the cold-air advection. According to Sorenson and Beckwith (1975), CAT is expected when the amplitude of the 500 mb temperature field exceeds the amplitude of the 500 mb height field by a factor of two, (thus each 500 mb isotherm must cross at least two 500 mb height contours with a trough speed greater than 25 knots.)

The 500 mb height and vorticity fields can be used to identify short waves that are indirectly related to this advection. CAT is forecast in the area of a trough if isotherm packing just ahead of the temperature trough. Areas of considerable positive vorticity advection are indic-

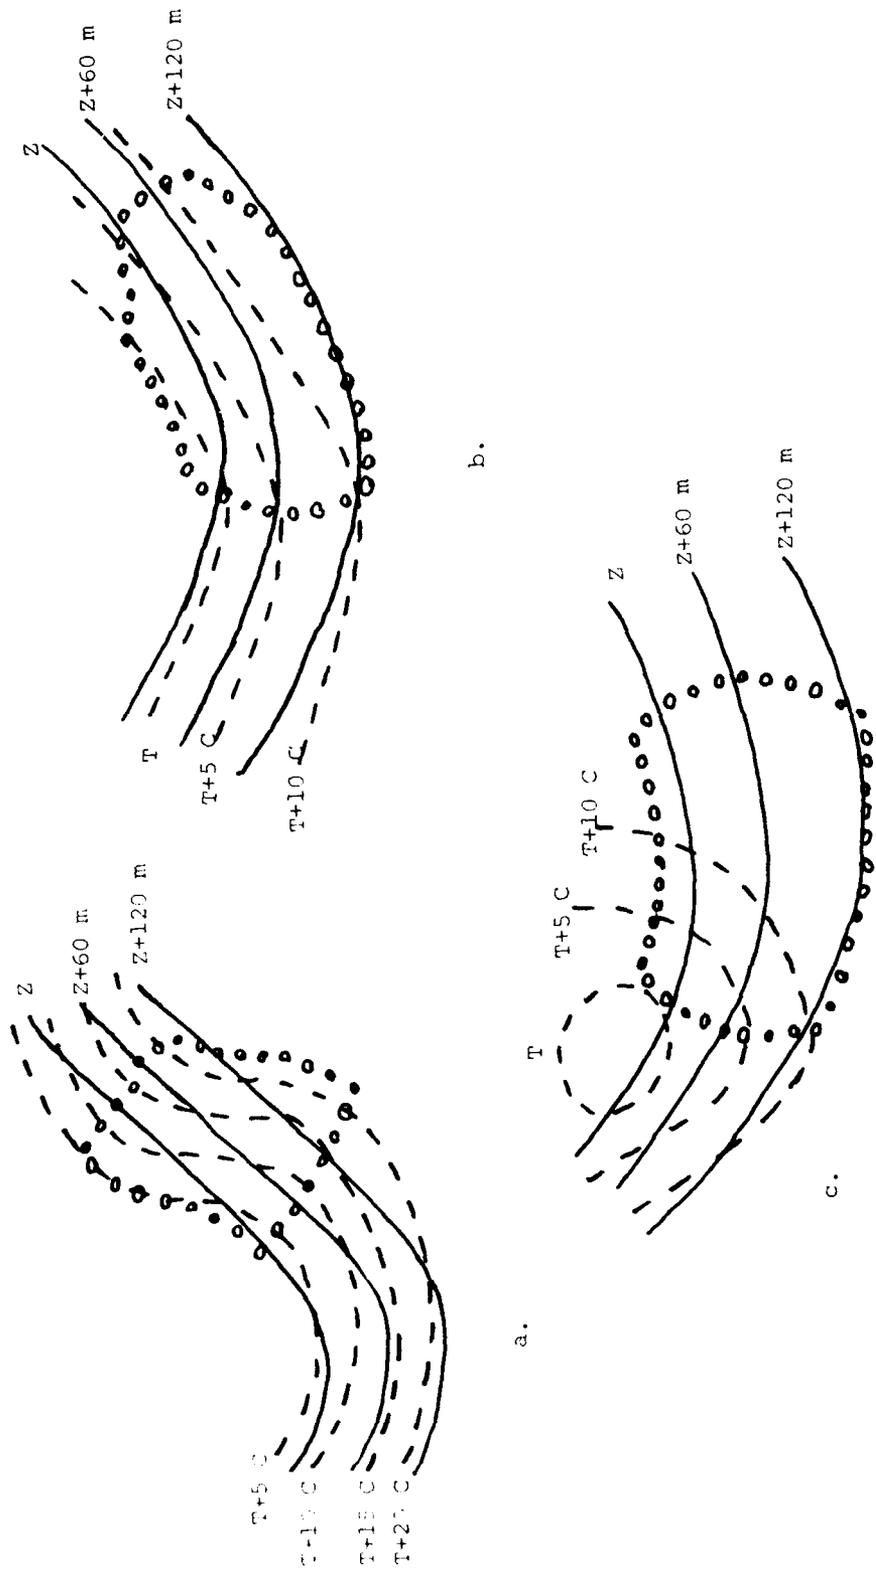


Figure 17. CAT forecast areas associated with 500 mb cold-air advection, after Sorenson and Beckwith (1975).

ative of development and can be used to approximate the future region of cold-air advection (see Figure 18). The vertical placement of CAT varies with the wind speed, the height of the tropopause, and the synoptic situation. Normally, moderate turbulence should be forecast from the height where sufficient vertical shear associated with the cold advection is found to 2,000 feet above the tropopause in cyclone-scale waves. Figure 19 is an example of a CAT forecast in long-wave cold-air advection.

Severe CAT may be forecast for cases of very strong cold-advection ($5^{\circ}\text{C}/120\text{ nm}$) in mountainous regions where large values of vertical shear exist with other turbulence producing mechanisms. CAT will normally continue as long as significant cold-air advection exists.

Sorenson and Beckwith (1975) pointed out that low-level cold advection under a ridge tends to increase the vertical shear and probability of CAT. Figure 20 shows an example of CAT near the jet stream core in an upper-level ridge with low-level cold advection at the 850 mb and 700 mb levels.

6.1.1.1 Short-wave troughs. CAT is also probable when a short-wave trough accompanied by a sharp thermal trough moves out rapidly ahead of a deepening trough. Figure 21 shows where CAT can be expected when a short-wave trough moves through the long-wave pattern. Hopkins (1976) suggests that the major axis of the CAT forecast areas should be approximately 150 nm in length, centered north of the jet stream core and east of the trough line.

One should forecast moderate CAT from 2,000 feet above the tropopause to 6,000 feet below the tropopause. Short-wave troughs may be found anywhere in the flow and CAT can occur as low as 18,000 to 22,000 feet. Forecasts of 500 mb height and vorticity predict positions and intensities well.

6.1.1.2 Sharp troughs. The axis of a sharp, rapidly moving trough in the contour pattern (see Figure 22) denotes another area of potential turbulence. Burnett (1970) noted that the large horizontal wind shears found near the base of the trough, where the direction of flow changes most rapidly, are indicative of large gradients of vertical motion. Tightly packed isotherms are frequently found in these areas. The vertical wind shear is, according to the thermal wind equation, proportional to the horizontal thermal gradient. These conditions are conducive to the formation of the shallow stable layers and coincident layers of wind shear associated with CAT. The trailing edge of the turbulent area is often found to be at the axis of a thermal trough somewhat to the rear of the advancing contour trough. One should forecast moderate turbulence when the wind speeds are between 60 and 120 knots with a wind shift of greater than 120 degrees. (Note: this turning should occur within a 200 nm area.) Forecast severe turbulence when the winds exceed 120 knots with a wind shift of between 90 and 120 degrees or when the winds are greater than 60 knots with a wind shift of greater than 120 degrees.

CAT associated with sharp, rapidly moving troughs is rather short-lived (on the order of 2 to 6 hours), but quite intense. Normally, these systems either weaken and become broad or develop into cutoff lows.


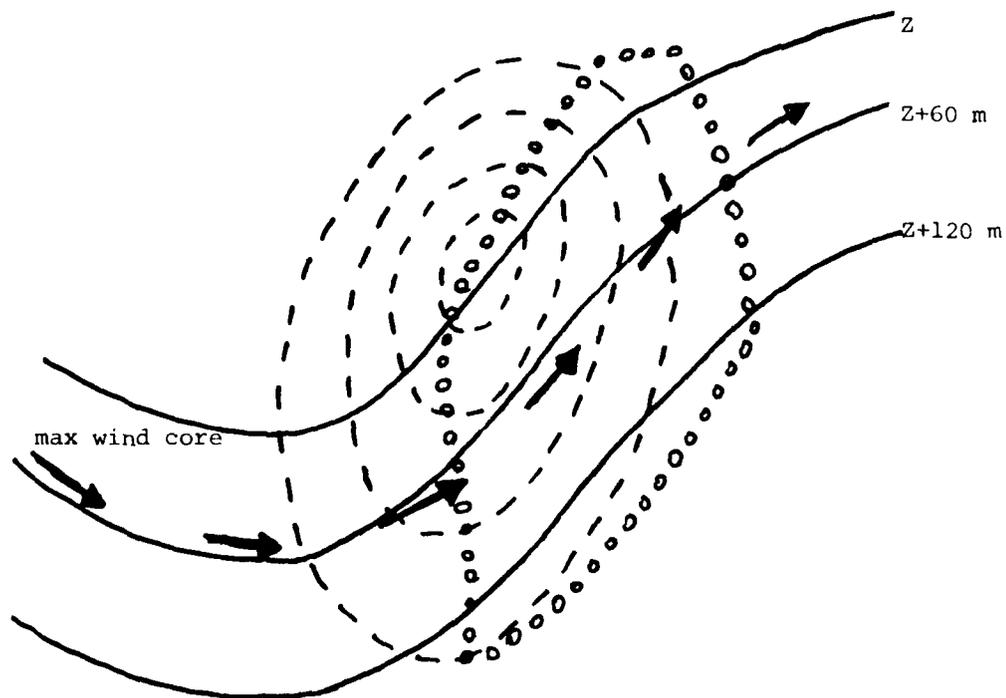


Figure 18. A possible CAT forecast associated with considerable positive vorticity advection (PVA) at 500 mb. Open circles indicate area of possible CAT and dashed lines a vorticity maximum.


a. Early stage.

Potential is greatest between surface wave crest/triple point and upper level thermal trough. This holds for all stages. Vertical extent of maximum potential is middle troposphere (20,000 to 27,000 feet).

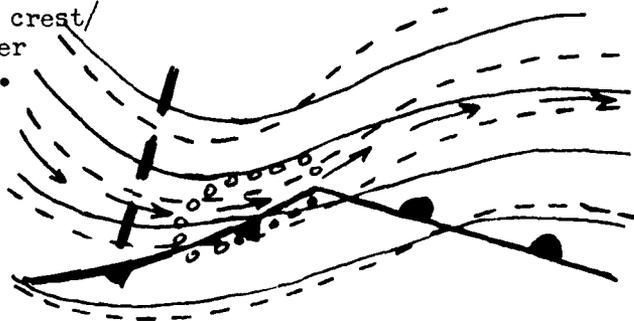

b. Mature stage.

Vertical extent of maximum potential is 15,000 to 30,000 feet. Area is in cold air behind cold front.

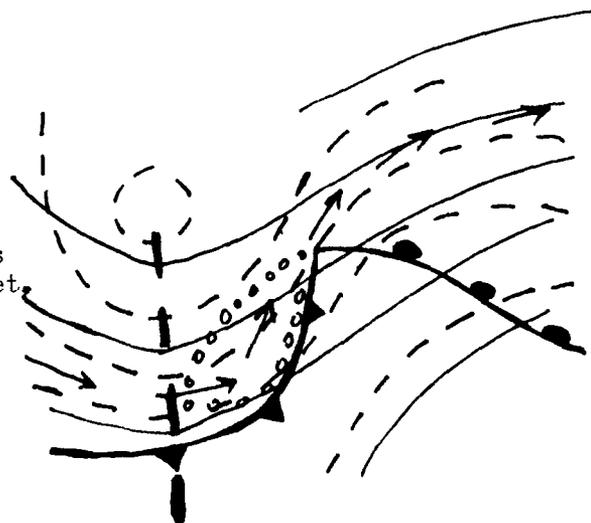

c. Occluded stage.

Potential weakens with upper-air trough, however, watch for reinforcement.

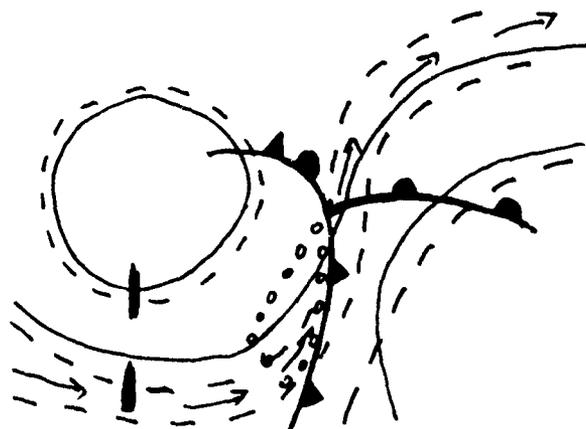


Figure 19. Turbulence potential associated with cyclone-scale advection, after Sorenson (1964). Solid lines are height contours, dashed lines are isotherms, arrows indicate the jet stream core, and open circles potential turbulence.



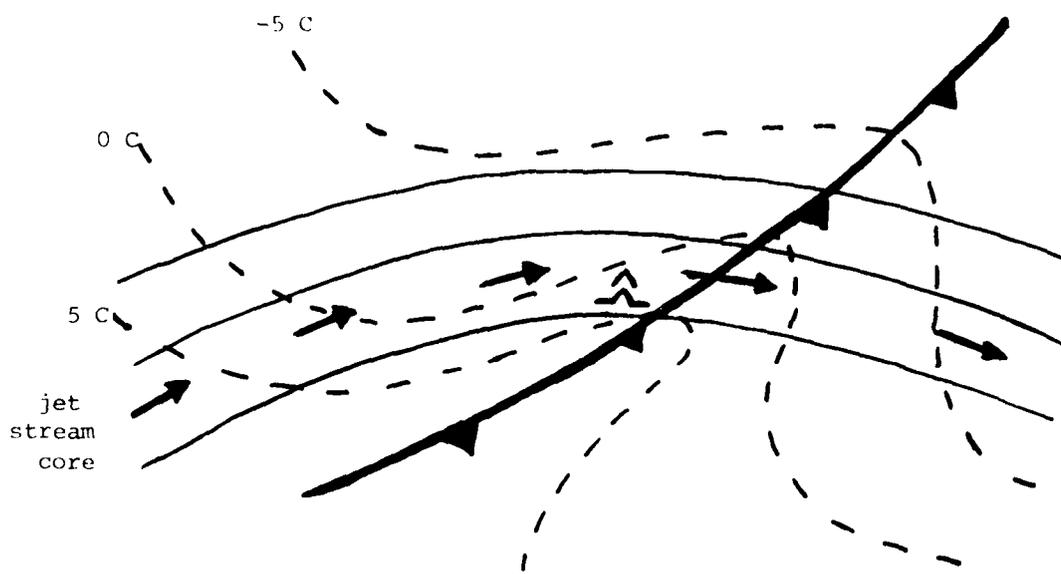


Figure 20. Severe CAT associated with low-level cold advection at 700 mb under a ridge. Example taken from Sorenson and Beckwith (1975).

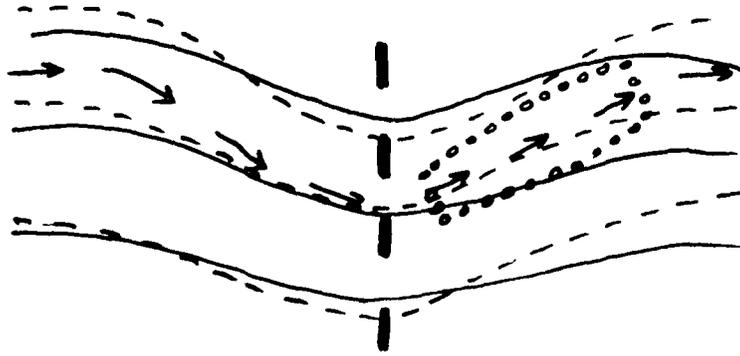

Potential is greatest ahead of and near the thermal trough. Turbulence areas move with short waves and change intensities as waves do. Vorticity forecasts predict intensities well. Vertical extent of maximum potential is middle troposphere (18,000 to 27,000 feet).

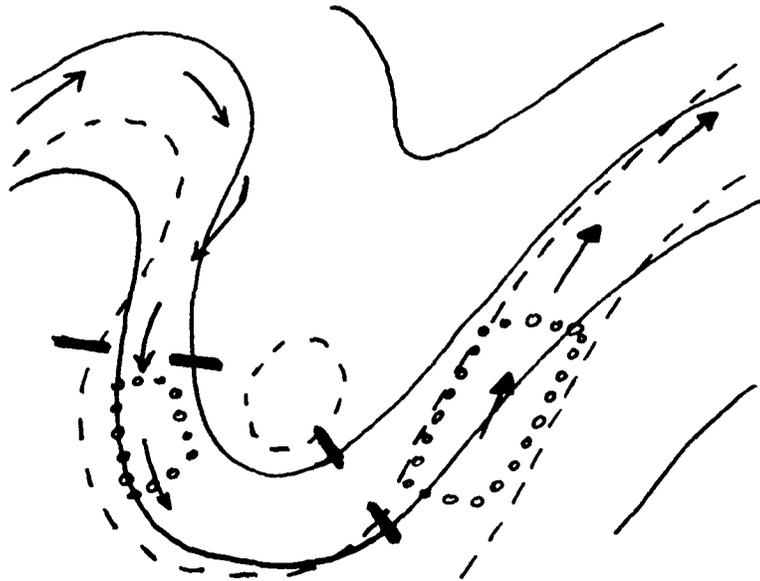

Short wave troughs may be found anywhere in the flow. One area of interest is the rear of cutoff lows. Area merges with preceding area as thermal troughs combine.

Figure 21. Turbulence potential (open circles) of short-wave cold-air advection, from Sorenson (1964).

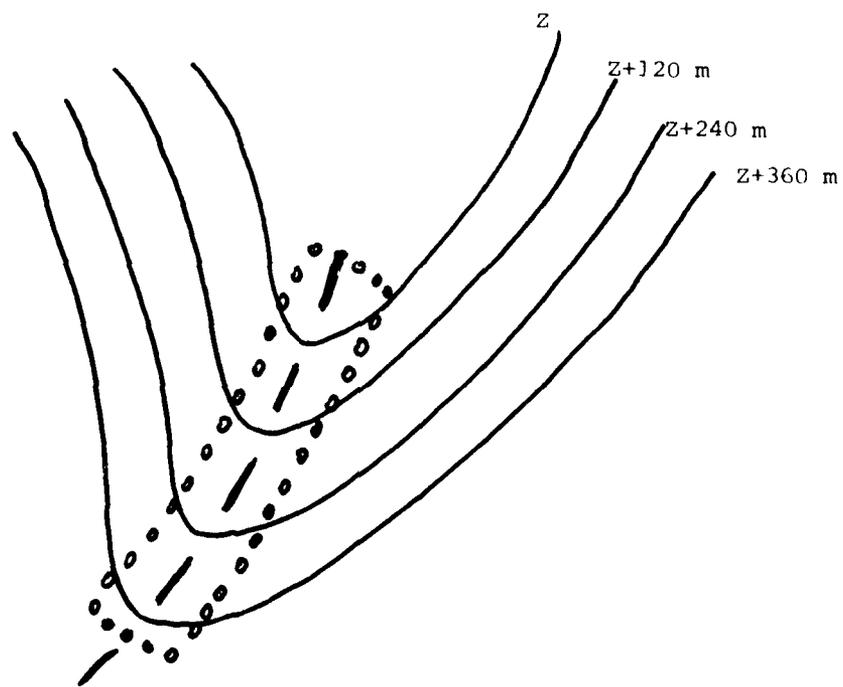


Figure 22. Turbulence potential (open circles) in a sharp trough at 300 mb. Example from Burnett (1970).

6.1.2 Warm-air advection. Warm-air advection can also increase horizontal temperature gradients, though this mechanism is weaker in short waves and may be overlooked when cold-air advection is nearby. Adjacent to the tropopause, however, the association of warm-air advection with anticyclonic accelerations and the resulting horizontal speed shear make an effective combination for turbulence potential (see Figure 23).

Sorenson and Beckwith (1974) showed that CAT is expected near an anticyclonically curved jet stream core in the vicinity of a warm front when the wind speed at the jet stream core is greater than 75 knots, the 850 mb temperature gradient is greater than $1^{\circ}\text{C}/100\text{ nm}$, and there are low-level convergent winds across the front (see Figure 24).

Hopkins (1976) generalized that the CAT forecast area associated with warm-air advection into an upper-level ridge is usually symmetric about the ridge axis and the jet stream core, shifted slightly north of the jet stream core, located up and downstream of the ridge axis. The CAT forecast area should extend vertically for 4,000 feet both above and below the maximum wind level and/or 2,000 feet above the tropopause to 6,000 feet below the tropopause.

Moderate and severe CAT can also occur on both sides of the jet stream core and where the jet stream core experiences the greatest latitudinal displacement in an anticyclonic ridge. The region of maximum CAT is found in the area of greatest anticyclonic curvature, which is usually within 300 nm upstream and downstream of the ridge axis. Hopkins (1976) suggested that severe CAT should be forecast in a ridge when one of the following conditions are met:

Strong temperature shear (20 knots/1000 feet or greater);

Wind speed in excess of 140 kts in a region of strong anti-cyclonic curvature;

A large latitudinal displacement of a jet stream core with wind speeds in excess of 140 kts.

6.1.3 Secondary cyclogenesis. During the early stages of surface cyclogenesis, the main jet stream core is usually 5° to 10° latitude north of the surface low. However, some low centers move or redevelop north of the main jet stream core while still in the early stages of cyclogenesis. This results in a second jet stream core forming 3° to 10° latitude to the left of, and parallel to, the main jet stream core. Because upper-air (300 mb) forecasts indicate little evidence of the new jet stream formation, CAT forecasters often miss these situations entirely.

Rammer (1973) shows the most probable area for CAT to occur with respect to a developing surface low and the main jet stream core (Figure 25). When surface cyclogenesis is forecast, CAT should be forecast to occur near the jet stream core north and east of the surface cyclogenetic area within 300 nm upstream and downstream of the upper-level ridge axis. Figure 26 shows an example used to locate a final forecast area of CAT from the forecast period of surface cyclogenesis.



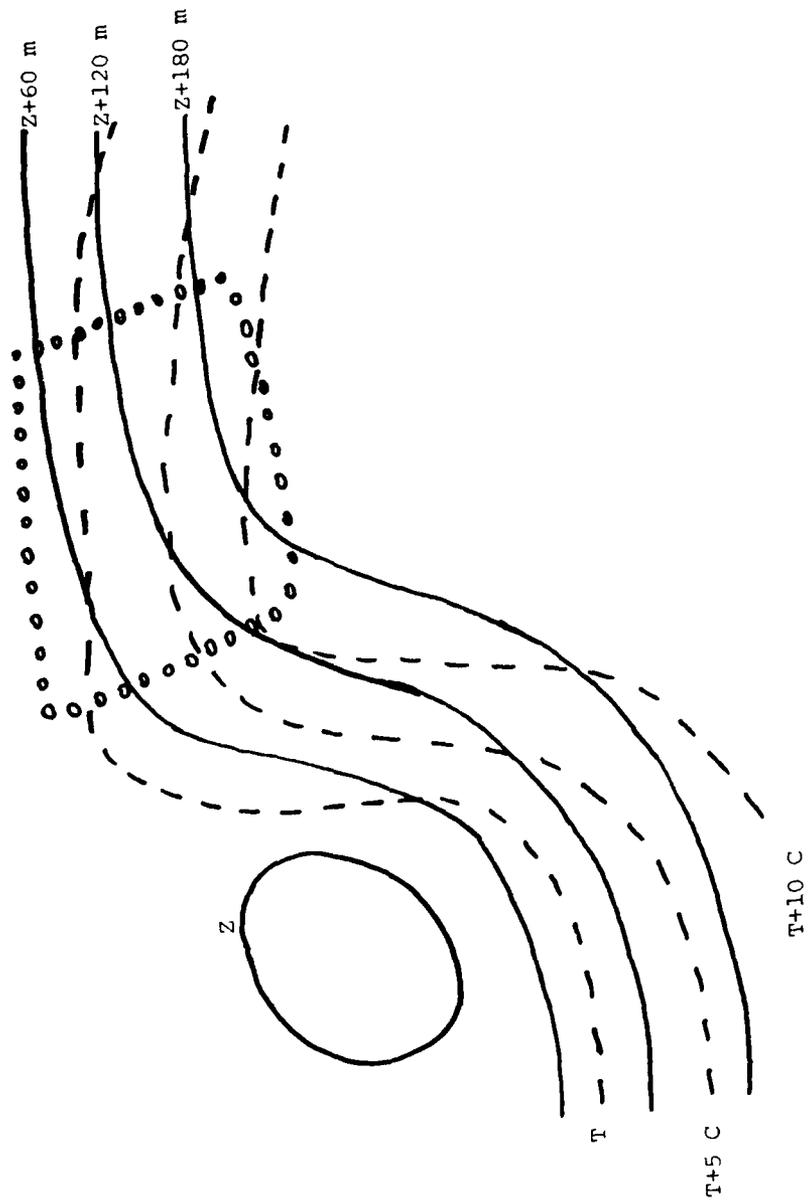


Figure 23. CAT forecast associated with strong warm-air advection at 500 mb, from Sorenson (1964). CAT forecast indicated by open circles.

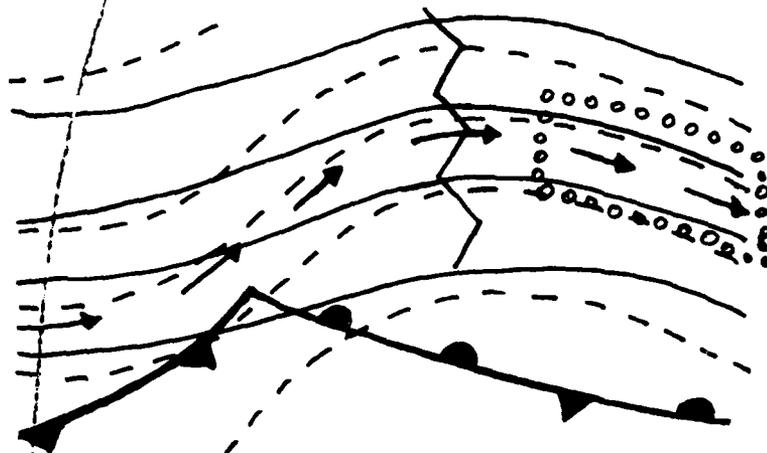


a. Early stage. Potential is greatest ahead of thermal ridge, this holds for all stages. Vertical extent of maximum potential is 25,000 to 33,000 feet, the upper troposphere. Turbulence potential may be slight at this stage.

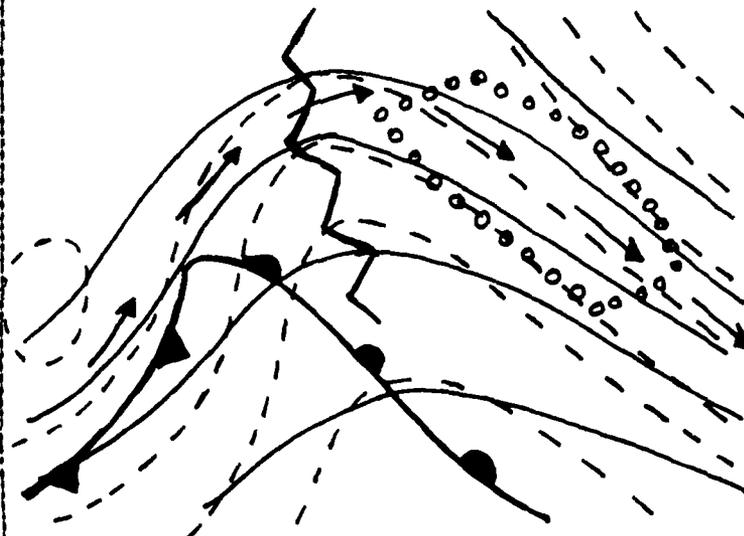


b. Mature stage (1). Vertical extent of maximum potential is 25,000 to 40,000 feet. It may merge with the next case, but is most intense in sharp dynamic ridges. Note that the thermal ridge may lie just ahead of the occlusion so that the potential area is closer to the fronts. Potential decreases as this system occludes.

Figure 24. Turbulence potential (open circles) of cyclone-scale warm-air advection. Example from Sorenson (1964).

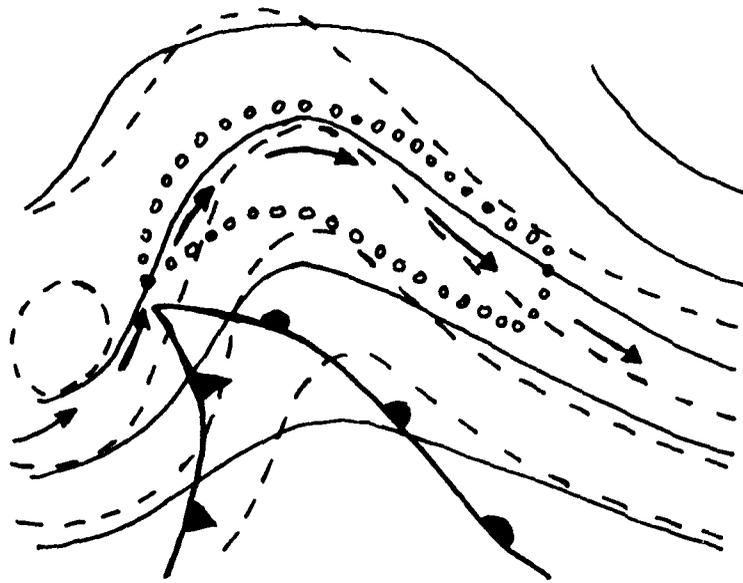

c. Mature stage (2). Strong jet flow with horizontal speed shears over 25 knots per degree latitude generates potential near tropopause in broad ridges. Potential is with and ahead of jet maximum in contour ridge from 35,000 to 45,000 feet.

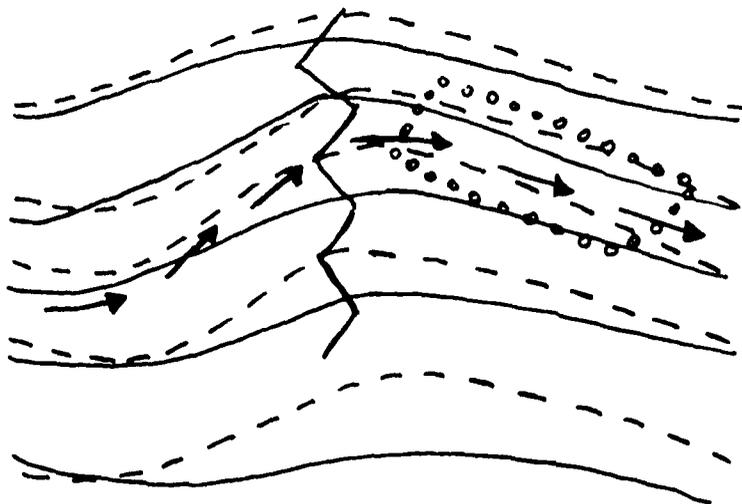

d. Potential is greatest ahead of and near the ridge. Turbulence areas move with short waves and change intensities as waves do. Vorticity forecasts predict future intensities well. Vertical extent of maximum potential is upper troposphere (25,000 to 33,000 feet). Potential is generally limited and insufficient.

Figure 24. Turbulence potential (open circles) of cyclone-scale warm-advection. Example from Sorenson (1964). (Continued.)

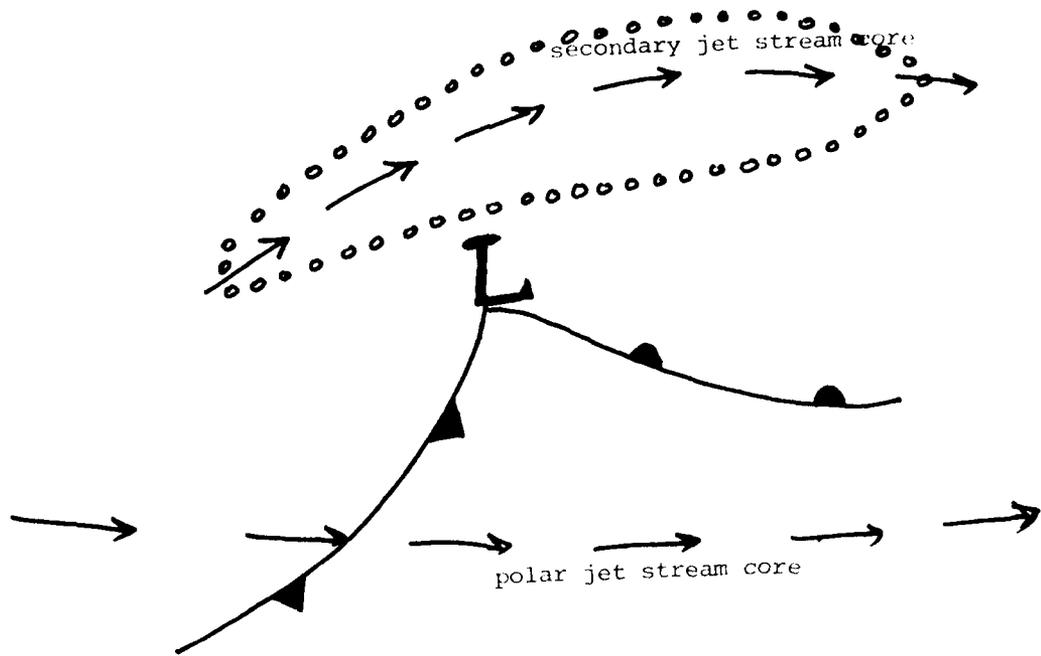


Figure 25. CAT forecast area associated with rapid surface cyclogenesis. Example from Rammer (1973).

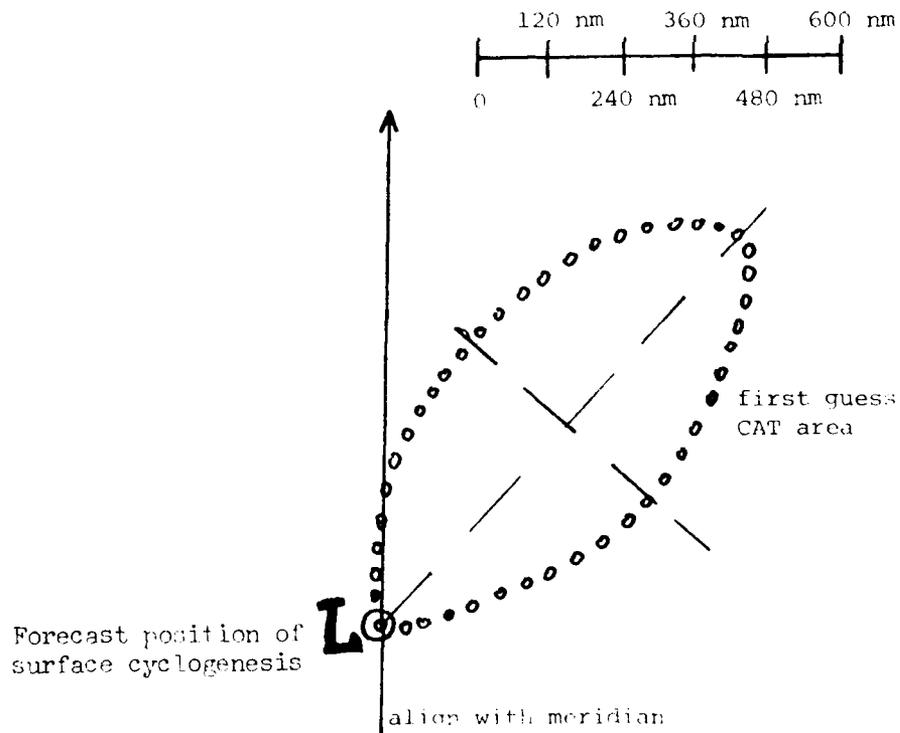


Figure 26. Overlay used to locate first-guess CAT area associated with surface cyclogenesis, from Rammer (1973).

The extent and intensity of CAT associated with surface cyclogenesis is directly related to the rate of cyclogenesis. Moderate CAT is usually forecast with systems that are expected to deepen at a rate of 1 mb/hr and moderate to occasional severe CAT is usually forecast with systems that are expected to deepen at a rate of greater than 1 mb/hr with wind speeds greater than 140 knots. The intensity of this CAT also depends on the proximity of mountains, the strength of the jet stream core, and the degree of amplification and curvature of the downstream ridge. In most cases, the CAT forecast area should extend vertically from about 2,000 feet above to 6,000 feet below the tropopause in the area shown in Figures 25 and 26. Greater thicknesses (surface to 2,000 feet above the tropopause) have been observed in the lee of the Rocky Mountains.

6.1.4 outflow area of a cold digging jet. CAT will occur with a very high probability in the outflow area of a cold digging jet stream core to the rear of an upper trough. The outflow area on the back side of a trough is the area between the wind maximum and the trough line where the instantaneous wind on a horizontal plane decreases. Figure 27 shows where CAT occurs with respect to the wind field in the outflow area. Cold-air advection over the warm ridge decreases the vertical lapse rate making the atmosphere statically unstable. Pronounced deceleration (large amounts of kinetic energy rapidly transformed to other forms of energy with decreasing stability in the outflow area) causes widespread turbulence.

The decrease in wind speed along the jet stream core is directly proportional to the extent and intensity of the turbulence. Generally, at least a 40 knot decrease of wind speed within 10° latitude of the wind maximum must be forecast to justify the issuance of a CAT advisory. A study by Kuessner (1975) shows that if there exists a difference in wind speed of at least 60 knots between the jet stream core minimum in the trough and a point in the jet stream core 10° latitude upstream, there is an 87% probability of moderate or greater CAT in the outflow area. The probability of CAT is also directly proportional to the strength of the jet stream core and is greatly increased in mountainous regions. The CAT forecast area should extend from the isobaric maximum to the base of the trough and should be centered on the warm-air side of the jet stream core as shown in Figure 27. The vertical extent of the CAT forecast area should extend from 2,000 feet above the tropopause to 6,000 feet below the tropopause. Significant CAT has been observed in thicker layers (from 20,000 feet to just above the tropopause) in mountainous areas. Forecast moderate CAT for most outflow stations. Hopkins (1970) suggests that moderate with occasionally severe CAT may be forecast with wind speeds greater than 130 knots in mountainous regions.

6.2 Area of considerable vertical shear. The importance of vertical directional shear is best understood by observing certain highly turbulent synoptic situations.

As a result of wind speed (wind), tilted ridges and troughs move faster in certain directions than others so that a station could lie underneath an upper-air ridge or trough line and report winds from different directions at different levels. Figures 28 show examples of both. The ridge is folding over the trough then analysts have shown that turbulence was reported in vertical directional shear north of the trough line, which

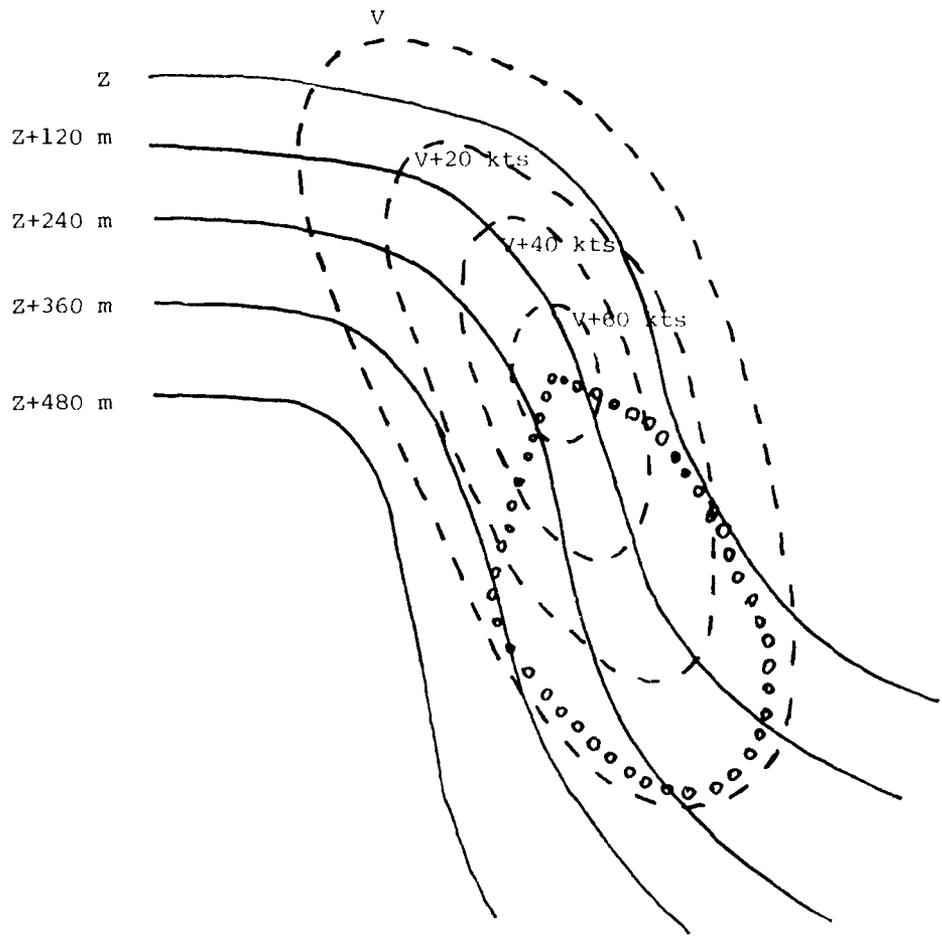


Figure 27. CAT forecast (open circles) in outflow area of cold digging jet at 300 mb, after Eucssner (1975).

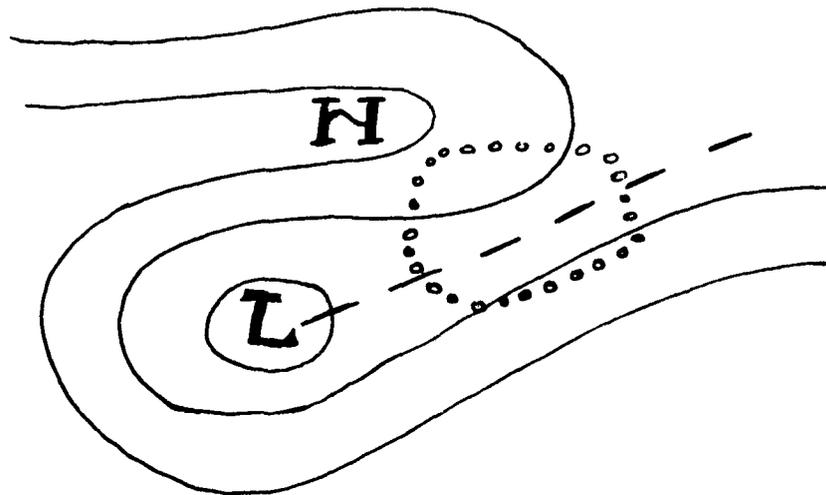


Figure 28. CAT (open circles) in tilted ridge and trough pattern at 300 mb, after Sorenson (1964).

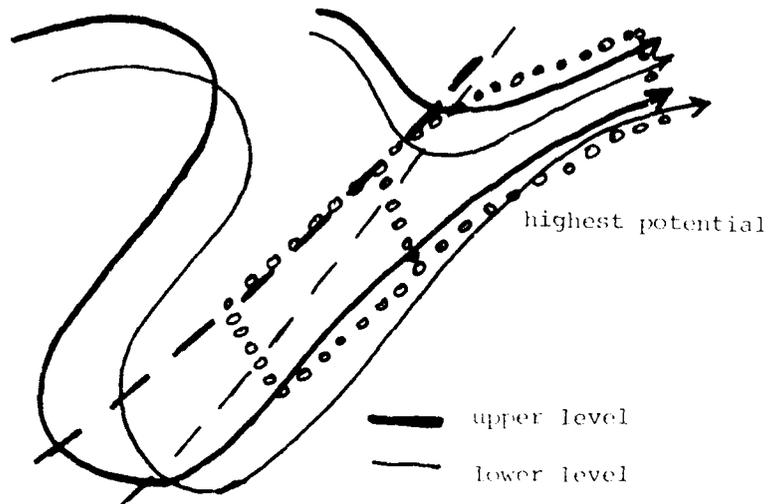


Figure 29. Turbulence potential (open circles) in tilted troughs associated with vertical directional shear. Cutoff troughs may move east faster at lower levels so that there is vertical directional shear ahead of trough and is interacting with near col. This situation coincides closely with warm-air advection case. Potential is highest from 22,000 to 35,000 feet.

is tilted toward the south with increasing altitude. Occurrence of jet stream winds 75 knots or greater may be used to define an area of potential moderate turbulence. Though not a frequent pattern, it usually produces turbulence for a day or two.

6.2.1 Tilted troughs. Tilted troughs usually occur when the cut-off low is pulling out, moving northeastward. Often, the trough moves out faster at lower levels causing this tilt. This feature often occurs with warm-air advection in the ridge near the col (south jet branch). Turbulence occurs near the col in both cases so the predominant cause may be hard to pinpoint. If turbulence is at middle or high levels in the southerly jet stream, warm-air advection is the likely cause. Tilted trough turbulence usually occurs at middle levels (from 22,000 to 35,000 feet) in the nearby col area (see Figure 29). This may be the most common cause of col turbulence. Turbulence intensity is directly proportional to wind speed and vertical directional shear and can reach moderate/occasional severe intensities.

6.2.2 Tilted ridge. Dynamic folding ridges lag at higher levels (such as near the tropopause), so that the low-level jet flow lies under the trough line. The highest potential for turbulence is north of the trough from 27,000 to 40,000 feet (see Figure 30). Moderate CAT is normally forecast for this situation, which occurs rarely.

6.2.3 Confluent jet streams. When two confluent jet stream cores are within 300 nm of each other, there is a high probability of CAT in the confluent zone between the two jet stream cores.

Because the northern jet stream core is associated with colder temperature and thus a lower altitude than the southern jet stream core, it will often cut underneath the southern jet stream. The result is an increase in static stability and strong vertical directional and speed shears in the confluent zone. Also, in the confluence zone a rapid backing of the wind with height is observed between the levels of the two jet stream cores.

In Figure 31, Sorenson (1964) shows that CAT is most likely to occur in the confluent zone between the two jet stream cores from a point where the jet stream cores approach within 5° latitude of each other to where the jet stream cores begin to diverge. Vertically, CAT is forecast to occur between the heights of the two jet stream cores, normally from 25,000 feet to 37,000 feet.

CAT associated with subtropical jet stream interaction normally occurs above 30,000 feet and is fairly difficult to forecast. Because subtropical jet streams are gradient induced, one should look for the deepening of a 300 mb trough at low latitudes (equatorward of 30°). Moderate CAT is forecast for most confluent jet stream cases. However, when jet stream cores of approximately 120 knots or greater approach at an angle greater than 45° , forecast moderate with occasionally severe turbulence for the period when the 90 knot isotach of the northern jet stream core passes under the southern jet stream core. Normally, this situation will persist for approximately six hours.

6.2.4 Sharp ridge. Holcomb (1976) concluded that turbulence in

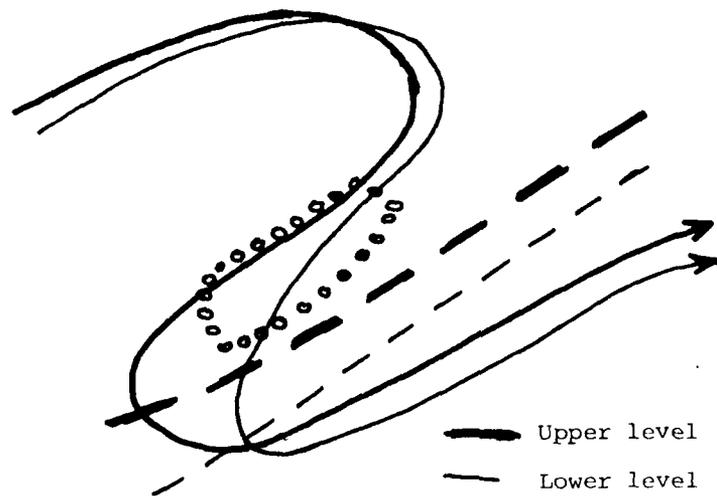


Figure 30. Turbulence potential (open circles) in tilted ridges. Dynamic folding ridges lag at higher levels (tropopause), so that low-level jet flow lies under trough line. Highest potential is north of trough and 27,000 to 40,000 feet. Potential may be slight. Example from Sorenson (1964).

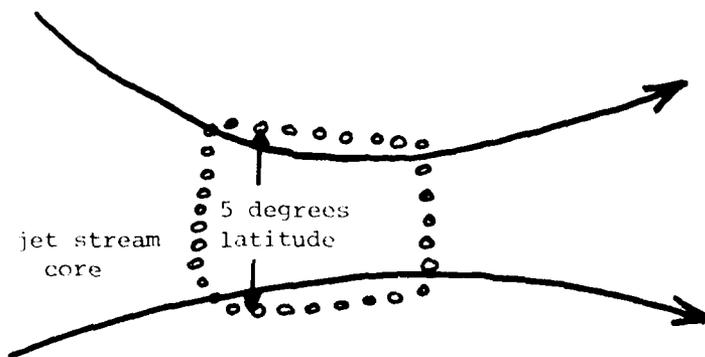


Figure 31. CAT (open circles) associated with confluent jet streams, after Sorenson (1964).

sharp ridges is neither widespread nor often long lasting. Winds here cannot be geostrophic due to the strong positive effect of the Coriolis force. The feature may be tilted with thermal ridging displaced from the contours and the ridge axis may vary greatly in the vertical (see Figure 32). All these factors may combine to produce turbulence. Winds are relatively light (50 kts or greater for moderate CAT); however, reports do occur but are rather uncommon. Generally, forecast moderate CAT from 25,000 to 33,000 feet.

6.3 Areas of considerable horizontal shear.

6.3.1 Sharp anticyclonic curvature. A study by Binding (1965) of CAT observations over the North Atlantic shows that 61% of the moderate or greater CAT reports were associated with anticyclonically curved jet stream cores compared with 27% associated with sharp troughs.

Studies by Endlich (1964) and Sorenson and Beckwith (1975) show that CAT is more likely to occur to the north of the jet stream core in the region of strong cyclonic horizontal shear. If a change in wind direction of at least $15^{\circ}/120$ nm occurs near the jet stream core (Sorenson and Beckwith, 1975) or horizontal speed shearing over 25 knots per degree latitude exists in a large-amplitude ridge, CAT should be forecast in the region of sharpest anticyclonic curvature.

These areas of strong horizontal directional or speed shear can be easily detected using satellite imagery and upper-level isotach analyses and forecasts. It can be shown, based on dynamics, that horizontal wind shear greater than 25 knots per degree latitude at middle latitudes is sufficient to generate large transverse waves that are best observed when transverse banding (herringbone cloud pattern) is noted on satellite imagery. This concept is best applied south of the jet axis where strong anticyclonic horizontal shear exists and slightly north of the jet stream core where strong cyclonic horizontal shear exists. These large waves alternately expand and compress the shear zone at the tropopause, and in the process amplify existing turbulence.

Hopkins (1976) states that the CAT forecast area associated with a sharp upper-level ridge is shifted slightly to the north of the jet stream core and to the downstream side of the ridge axis (see Figure 33). Normally, forecast moderate CAT 2,000 feet above the tropopause to 6,000 feet below the tropopause when 100 to 140 knot winds with horizontal shear of 25 to 50 knots per degree latitude are expected in a sharp anticyclonic ridge. Forecast moderate with occasionally severe turbulence when strong winds in excess of 140 knots and horizontal shears greater than 50 knots per degree latitude exist in a sharply turning ridge. In any case, look for strong wind maxima entering sharp ridges.

CAT can also occur in strong troughs where there is considerable anticyclonic horizontal shear (see Figure 34). CAT can be rather intense but is fairly short lived (around six hours duration) and uncommon. Look for jet stream maxima climbing into strong ridge patterns and the resulting strong anticyclonic turning and transverse banding.

Sharp anticyclonic subtropical jet streams are a well-known producer of CAT. These jets are fairly easy to analyze but practically impossible to forecast. Using satellite imagery, look for anticyclonically curved

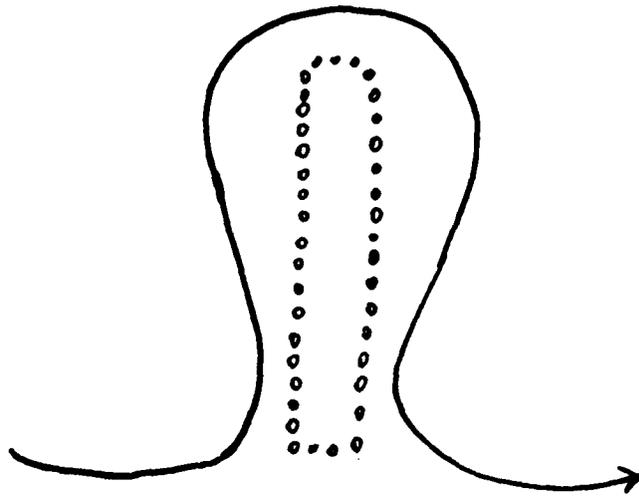


Figure 32. Turbulence potential (open circles) in sharp ridges at 300 mb. Unstable ridge axis may vary greatly in the vertical. Reports are uncommon but do occur, especially at neck or ridge near 25,000 to 33,000 feet. Example after Sorenson (1964).

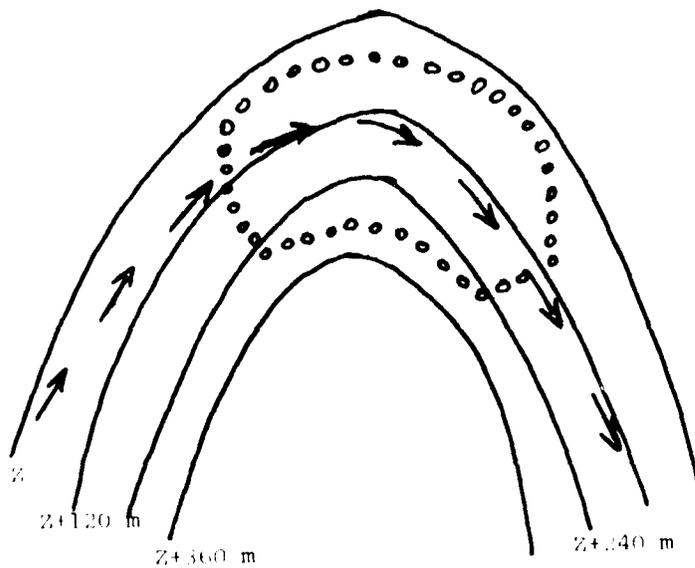


Figure 33. CAT (open circles) associated with sharp anticyclonic curvature at 300 mb. after Hopkins (1976).

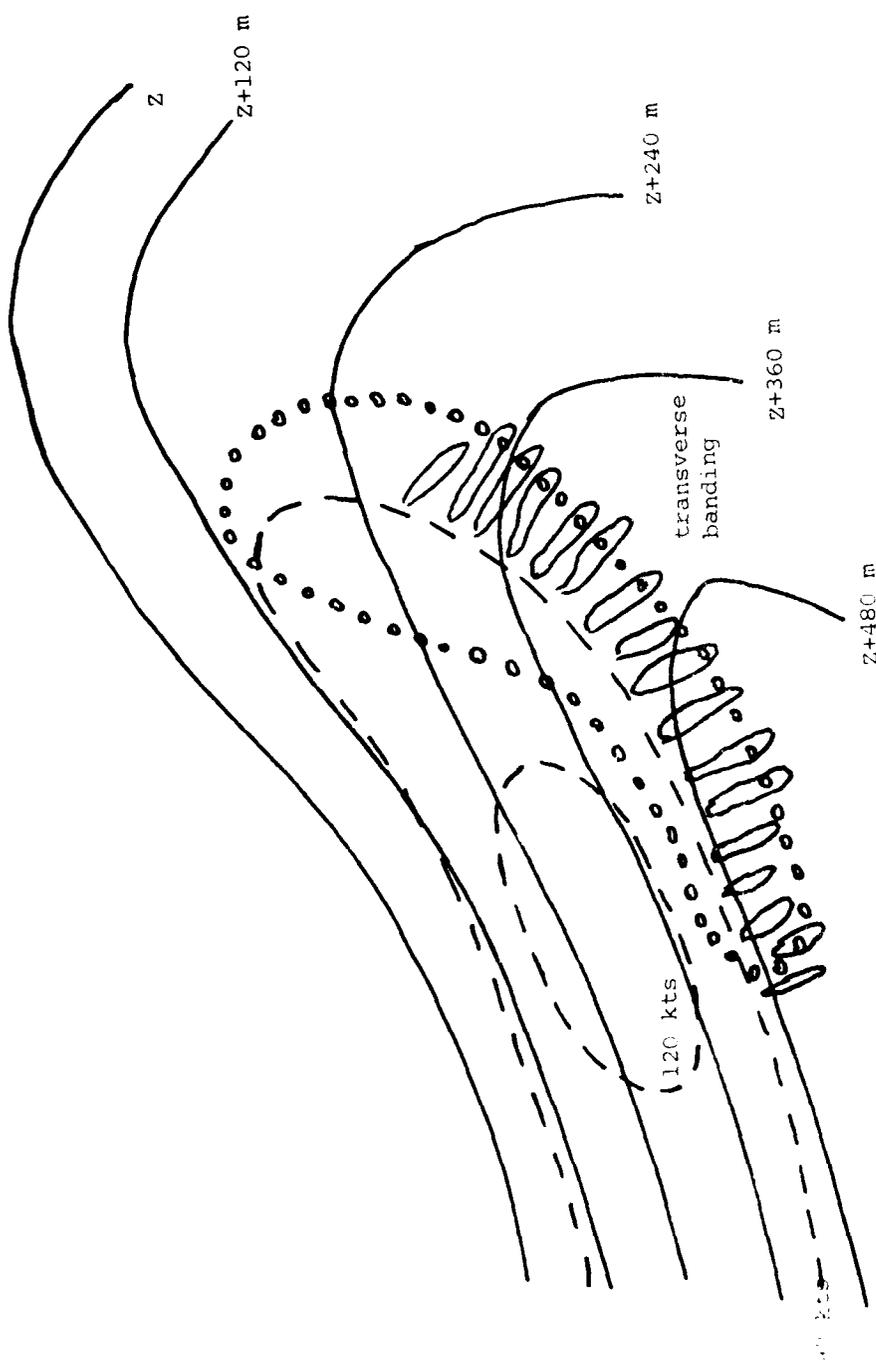


Figure 34. CAT (open circles) forecast in anticyclonic horizontal shear and speed convergence at 300 mb.

jet stream's cirrus shields. At times, transverse banding will be apparent and depict exactly where the CAT exists. Using the 300 mb analyses, look for deep troughs that reach equatorward of 30° . The AFGWC 250 mb maximum wind analysis will pinpoint these jet streams and vividly depict their curvature (see Figure 35). There is presently no accurate upper-air forecast tool for latitudes equatorward of 25° , so a forecaster must maintain forecast continuity until sufficient IREPs and new 250 mb isotach analyses signal the end of turbulence potential. Normally, it will take approximately 90 knots of wind and sufficient anticyclonic curvature (greater than $15^{\circ}/120$ nm) to produce moderate or greater turbulence in subtropical jet streams. Severe turbulence associated with sharp anticyclonic subtropical jet streams is rare.

6.3.2 Development of cutoff low. With the development of an upper-level cutoff low (Figure 36), CAT often occurs in the zones of confluent and diffluent flow with converging axes of maximum wind and large wind shear. The flow is subjected to rapid acceleration in the diffluent flow and rapid deceleration in the confluent flow. Hopkins (1976) theorizes that after the cutoff low forms only light CAT can be expected in the region just north of the low center. The 300 mb analyses and forecasts handle this situation well. The 250 mb isotach analysis can be used to refine the analysis. Forecast moderate turbulence (severe CAT is rare) from 2,000 feet above the tropopause to 5,000 feet below the tropopause.

CAT may also occur in the trough and base of high-level cutoff lows. CAT can be expected to occur along the horizontal wind shear line separating the two opposing anticyclonic vorticity centers. If the jet stream at the base of the trough exceeds 50 knots and is associated with strong cyclonic horizontal shear may exist up to 5,000 feet. If the strength of the two opposing jet stream cores is at least moderate, forecast moderate turbulence from 2,000 feet above the tropopause to 6,000 feet below the tropopause. When the forecast axis of shear for both the opposing jet stream cores exceeds 100 knots and the potential CAT area spreads the forecast to a length with a central area of turbulence. In the tropics, even with lower winds (at least 30 knots) horizontal wind shear lines are often associated with the occurrence of moderate CAT.

6.3.3 Diffluent upper flow. CAT can occur in the formation of a diffluent upper flow pattern. Hopkins (1976) reports that once the diffluent flow pattern has been established, the probability of CAT in the region of flow divergence is increased. It is decreased if a surface frontal system is nearby. CAT is more likely where. Also likely during the formation of a diffluent upper flow pattern. As you fly, look for a wind maximum at greater than 30 knots approaching or beyond diffluent flow. Upper-air forecasts normally depict turbulence zones fairly well. Forecast moderate CAT from 2,000 feet above the tropopause to 6,000 feet below the tropopause in the zone of anticyclonic shear between the northern and southern maximum winds and maximum curvature of the jet and confluence of the jet stream. Moderate turbulence is also possible in the zone of diffluent flow above the tropopause. Moderate turbulence is more likely below the tropopause.

6.3.4 Vorticity maxima. CAT can occur in the zone of vorticity maxima.

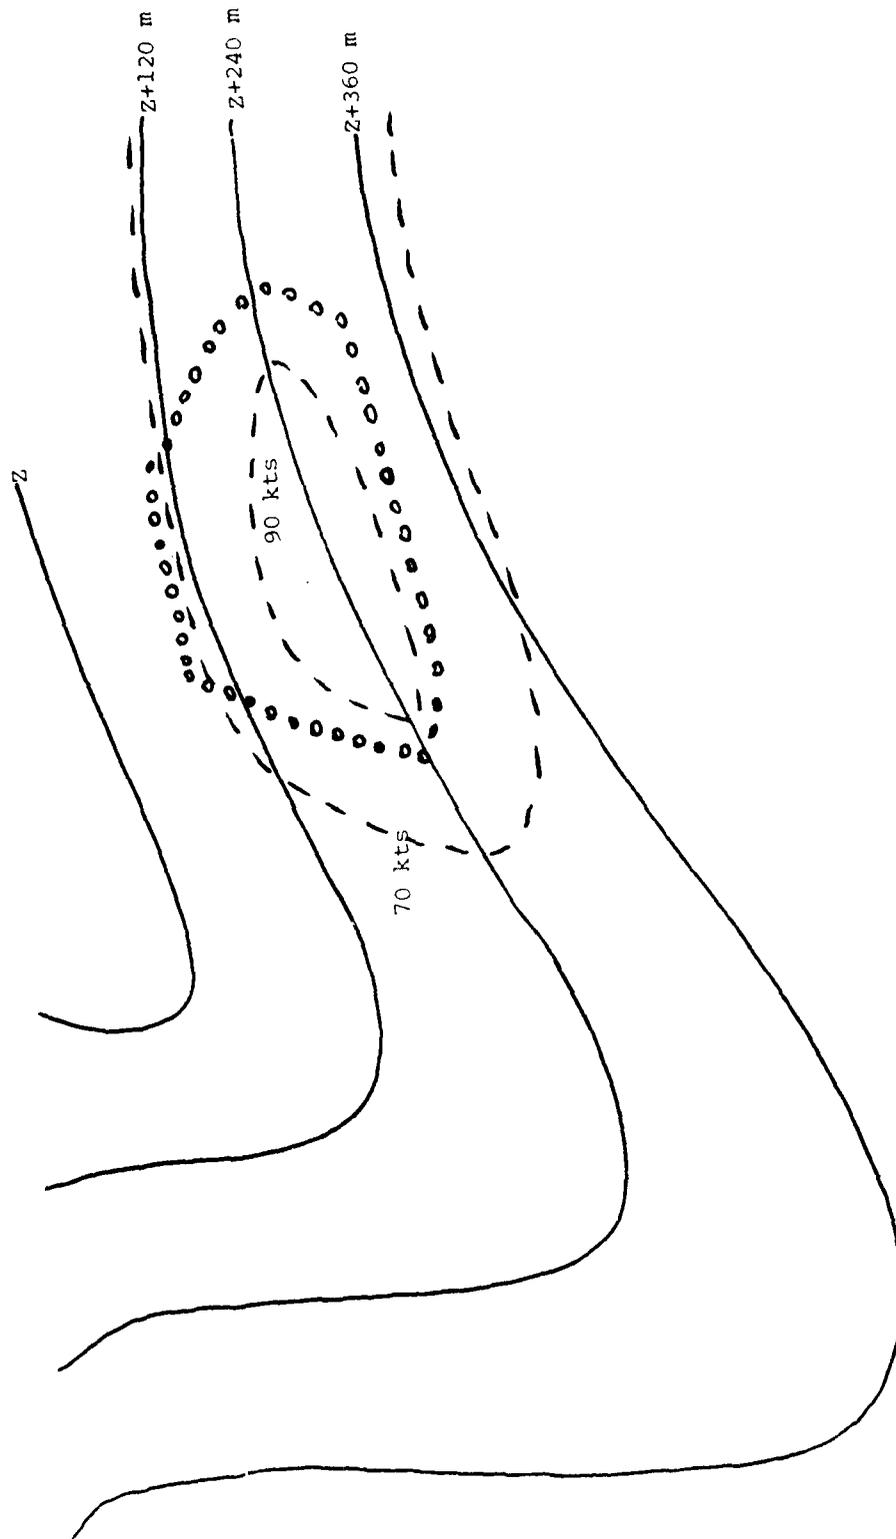


Figure 35. CAT (open circles) associated with anticyclonic turning of a subtropical jet stream at 300 mb.

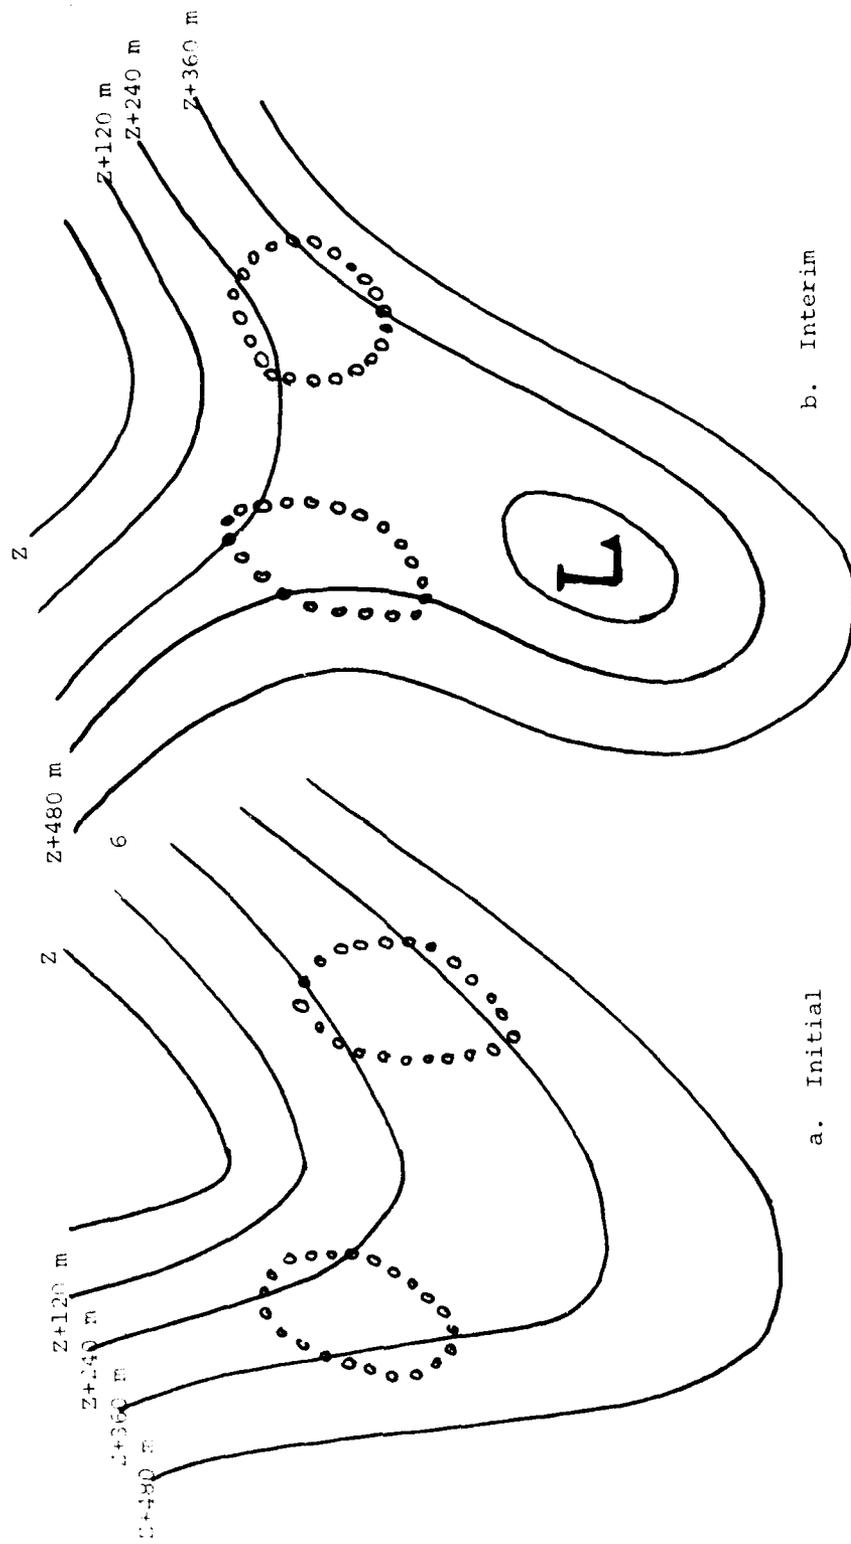


Figure 36. CAT associated with three stages in the development of a cutoff low at 300 mb, from Hopkins (1976).

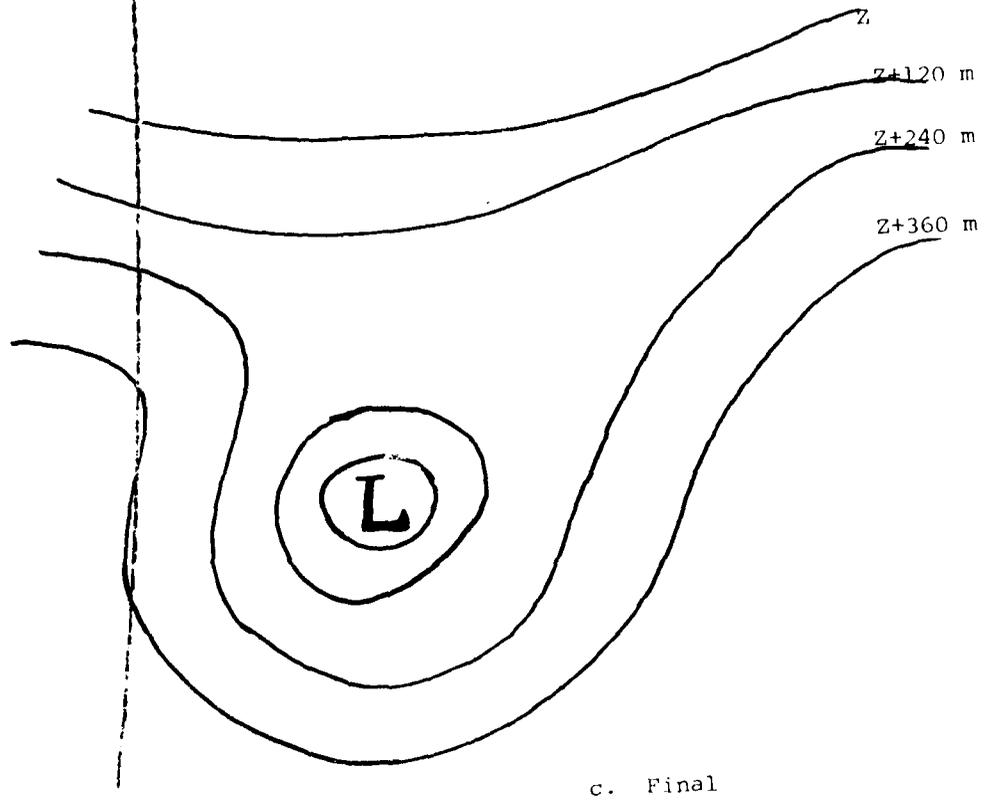


Figure 36. (continued).

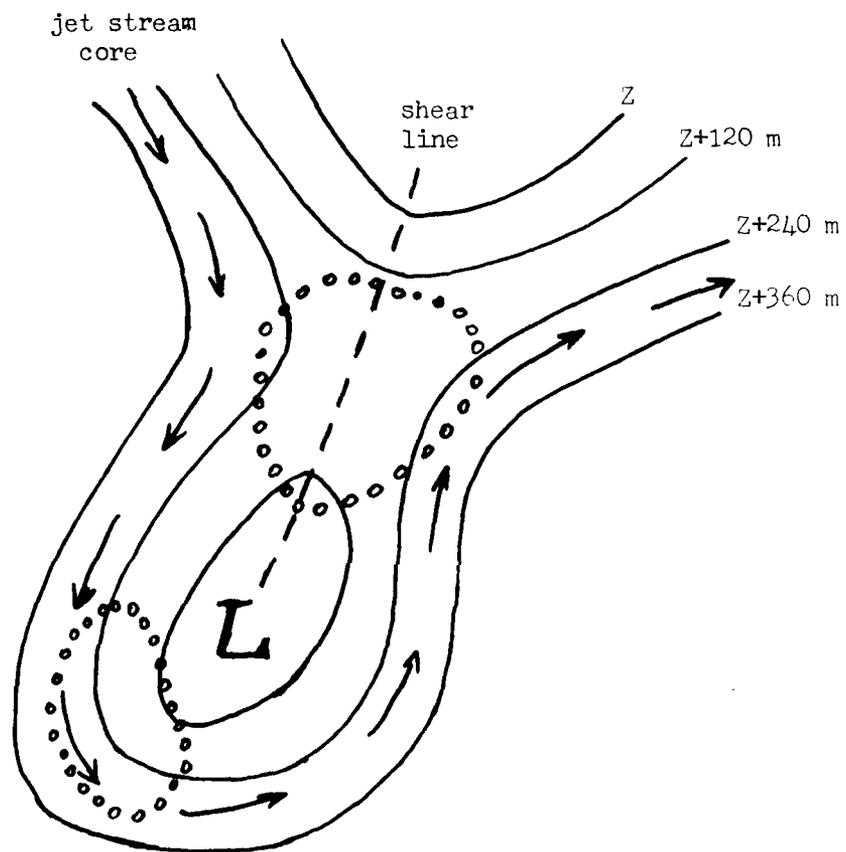


Figure 37. CAT forecast in the throat and base of a 300 mb cutoff low, adapted from Hopkins (1976).

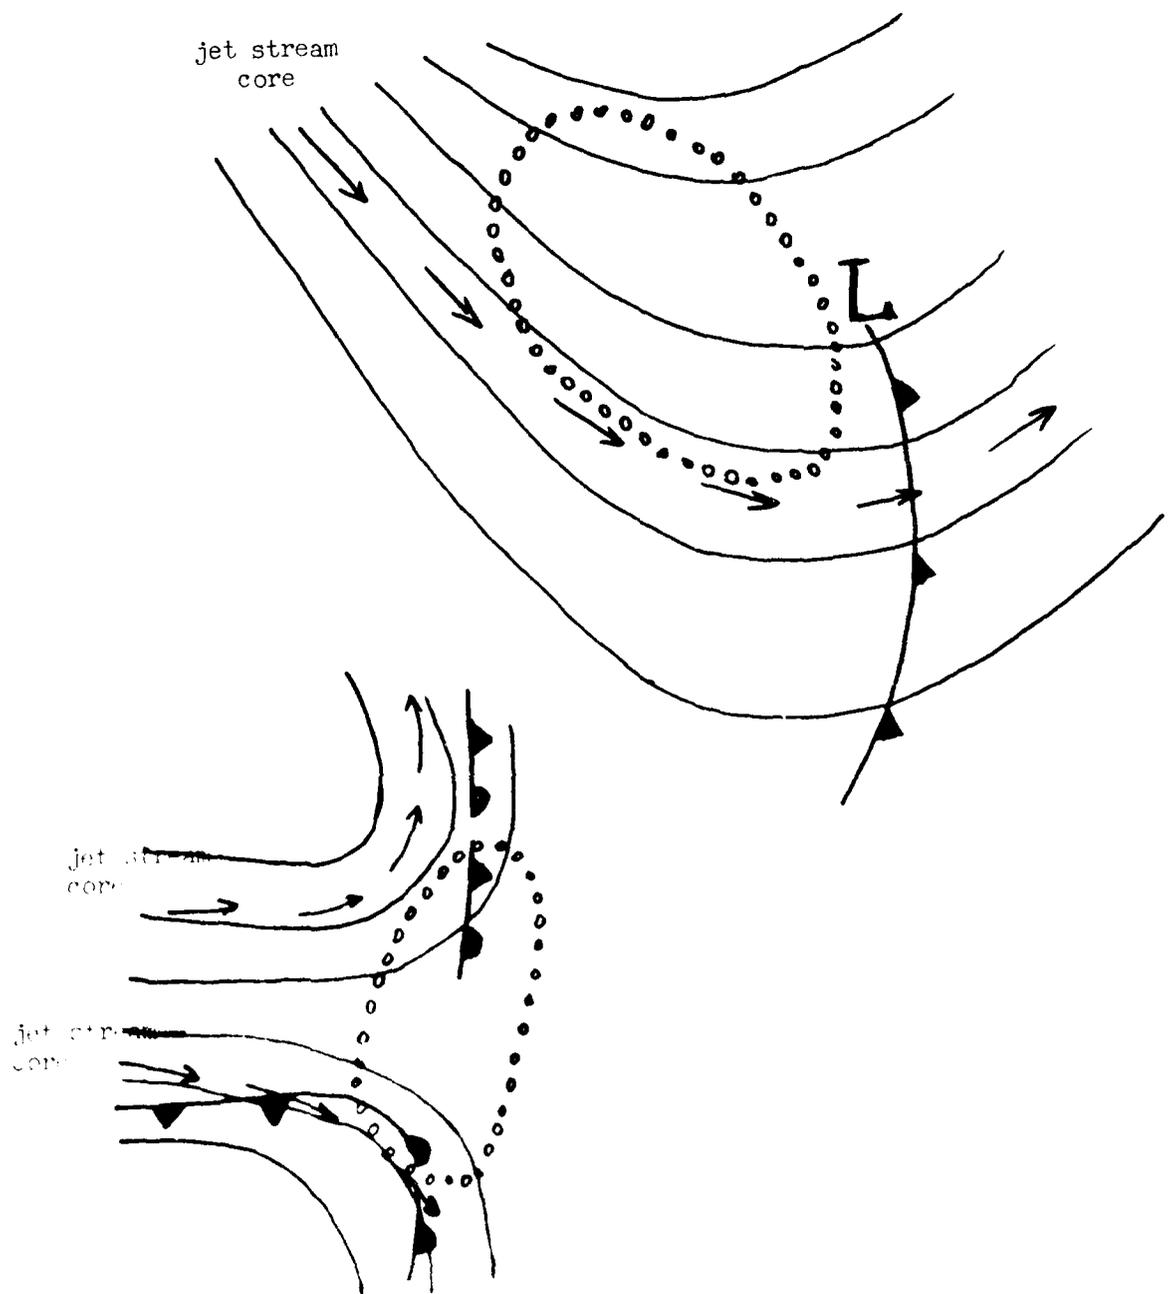


Figure 10. Jet stream core in a curved channel, upper-flow pattern at 300 rpm. Adapted from Baker (1951).

casting mountain-wave turbulence have been incorporated into the MTWVB computer program. The CAT forecaster can trust MTWVB products. If the MTWVB products are missing, the CAT forecaster can manually produce similar forecasts using the same tables and figures as in Section 5.2 of this memo. Some additional pointers are described below.

Mountain-wave turbulence is often associated with a sufficient, strong wind component normal to a ridge line at the mountain top level. Exact wind conditions sufficient to cause CAT vary with respect to the topography. Generally, winds of 35 knots or more crossing the ridge line within 30° of normal are necessary for most mountain ranges except the Denver area where only 25 knots are needed. In Japan and the eastern U.S. (Appalachian ranges) 40 knots or more are required at mountain-top. Sorenson (1976) states that the severity and extent of mountain-wave activity are greater in the lee of ridges than in the lee of isolated peaks. The shape of the ridge top and the existence of mountain passes are thought to influence the wave production capacity of a mountain barrier.

According to Sorenson (1976), gusty surface winds greater than 25 knots and reports of pressure falling rapidly in the lee of the mountain range are good indicators of the existence of standing mountain waves. Also, surface observations such as AoSL, CoSL, rotor clouds, etc., and pilot reports are other useful indicators of standing mountain waves. Sate-lite images depicting wave clouds in mountainous areas are another important aid. Horizontal temperature gradients are indicators of vertical wind shears, as implied by the thermal wind equation. At 850 mb look for temperature gradients greater than 6°C across the mountain range and greater than $6^{\circ}\text{C}/60$ mi. along the mountain range.

The issuance of a mountain-wave forecast is a highly significant event. The Strategic Air Command's low-level routes and many high-level flights are diverted from forecast mountain-wave areas because treacherous turbulence is often found there (mountain-wave downdrafts can reach 80 feet per second or 3 to 4 g loading). Therefore, forecasting mountain waves at AFWC follows a time-consuming and painstaking process.

If MTWVB shows a mountain-wave potential, then forecast turbulence when one of the following seven statements is true:

1. The wind meets the mountain top wind criteria.
2. A trough or approaching short-wave trough is seen on 500 or 300 mb charts.
3. The wind is either approaching or stationary to the north.
4. The wind reports indicate a stable atmosphere at and above mountain-top level. Stability is a critical factor in forecasting mountain-wave formation.

The CAT program is related to the Mountain Wave. The actual CAT area will be centered on the jet stream core, immediately downstream from the mountain ridge line as illustrated in Figure 29. It will extend about 1000 mi. on both sides of the jet stream core and will be about 1000 mi. long.

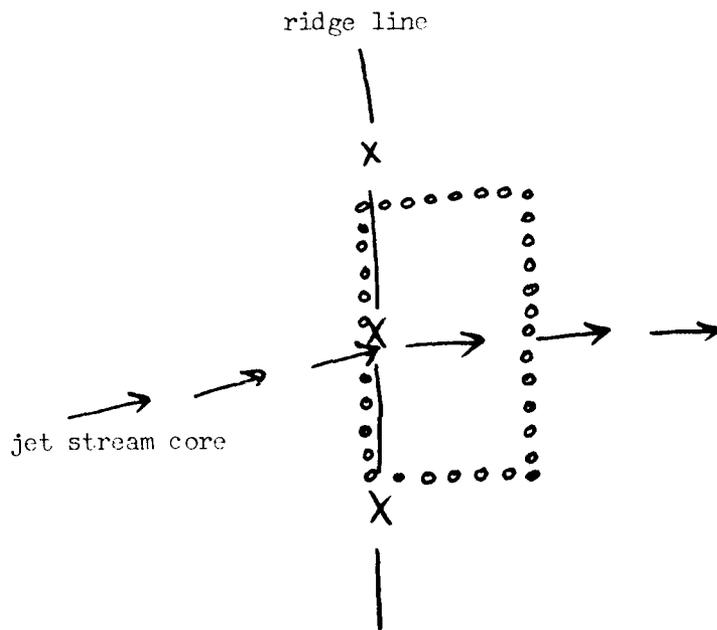


Figure 39. Normal forecast area associated with mountain wave. Example from Hopkins (1976). Open circles indicate CAT area.

The tropopause height is above 250 mb.

Pilot reports of at least light to moderate intensity are received from heavy aircraft.

Mountain-wave intensity is computed by the MTWVB output and/or by manual means. Normally, forecast severe turbulence when the wind component perpendicular to the mountain ridge exceeds 50 knots and a strong thermal gradient exists at low levels. Forecast areas are included in the MTWVB listing for most areas in the Northern Hemisphere.

The vertical extent of the forecast areas is automatically provided by MTWVB. Manually, the vertical extent is determined according to the mountain-wave intensity. For a moderate mountain wave, forecast moderate CAT up to 5,000 feet above the maximum mountain tops and 5,000 feet above and below the tropopause. For a strong mountain wave, forecast moderate with occasionally severe turbulence up to 10,000 feet above the maximum mountain tops, 5,000 feet above and below the tropopause, and moderate CAT in between. For a very strong mountain wave, forecast severe CAT for all levels up to 5,000 feet above the tropopause.

Sorenson (1976) states that the start of mountain-wave activity is indicated by:

The occurrence of the first low-level temperature falls over the mountain range or sharply increasing 500 mb windspeeds in the mountain-wave zone.

The end of such activity occurs when one of the following happens:

The low-level wind is no longer normal to the mountain range.

The isotherms packing at the 200 mb weaken.

The tropopause height drops below 250 mb.

Surface frontal passage occurs in the area.

Lee-wave turbulence (low-level oscillating flow) is similar to mountain-wave turbulence except that it does not extend into higher levels (the vicinity of the tropopause). If the atmosphere directly over the mountain tops is unstable, lee waves may form but will dissipate rapidly as they propagate upward. Alt. clouds can form and turbulence may be reported at relatively low levels; however, the important dynamic effects of waves affecting the tropopause do not occur. Forecast moderate turbulence from 5,000 to 10,000 feet above the maximum mountain tops when the mountain top wind (within 50° of a line normal to the ridge line) exceeds 30 knots (25 knots for Denver and 40 knots for Japan and eastern U.S.). If the winds exceed 50 knots, consider forecasting moderate with occasionally severe turbulence.

6.2. Stratospheric CAT. The present knowledge of stratospheric CAT is incomplete because of limited high-altitude data; however, there is a consensus that CAT decreases with height upward from the tropopause.

Stratospheric turbulence is thought to be caused by vertically propagating waves interacting with pre-existing vertical wind shears. These gravity waves can be caused by dynamic perturbation motions in a stable atmosphere, similar to generation of CAT at the tropopause. Stratospheric CAT occurs in thin homogeneous stable layers with thickness of 500 to 4,000 feet. Thicknesses less than 500 feet are considered trivial, while those much over 4,000 feet are probably multiple layers. Stratospheric CAT is usually less severe than tropospheric CAT. However, many pilots of supersonic stratospheric aircraft (U-2, YF12A, XB-70) have reported severe CAT while their aircraft accelerometers record only 0.6 to 1.0 g peak-to-peak accelerations. Amplification of turbulent vibrations from the aircraft center of gravity to the cockpit may be the reason that pilots report greater turbulence than meteorological conditions seem to warrant.

The current knowledge of stratospheric CAT is confined to the middle latitudes where significant vertical shears are known to exist. In the lower stratosphere, a mean vertical wind shear exists as the westerlies decrease with height. Above the winter hemispheric region of decreasing westerlies, the wind speed increases with height up to the level of the mesospheric jet stream core, which is at about 90,000 feet between 55°N and 70°N. Strong vertical wind shears associated with this jet stream core often extend down to 60,000 feet and below. The vertical wind shears can be as strong as the shears encountered near tropospheric jet stream cores.

Large horizontal temperature gradients at high levels with the associated vertical shears are indicative of stratospheric CAT:

2°C/100 nm at 100 mb (53,000 feet)

1°C/100 nm at 50 mb (68,000 feet)

1°C/100 nm at 30 mb (78,000 feet)

Radiosonde ascents yielding vertical temperature and wind profiles can be studied for vertical shears occurring in stable layers. CATA, the AFGWC automated rawinsonde CAT analysis tool, computes layers with low Richardson numbers and determines an intensity using vertical shear and mean-height wind data. Wind shears of greater than 10 knots per 1000 feet and mean winds greater than 50 knots are generally necessary to produce moderate or greater CAT.

Circulation features generally associated with stratospheric CAT include ridges and cutoff highs. The turbulence aligns itself with anticyclonic curvature from inflection point to inflection point (see Figure 40). Lower stratospheric CAT can also be related to and forecast with underlying tropospheric systems.

Forecast turbulence of the intensity and height computed by CATA when two or more stations report similar layers associated with the same upper-air feature. Turbulence tends to occur 1,000 feet below the reported stable layers so the forecast should be extended downward to include it.

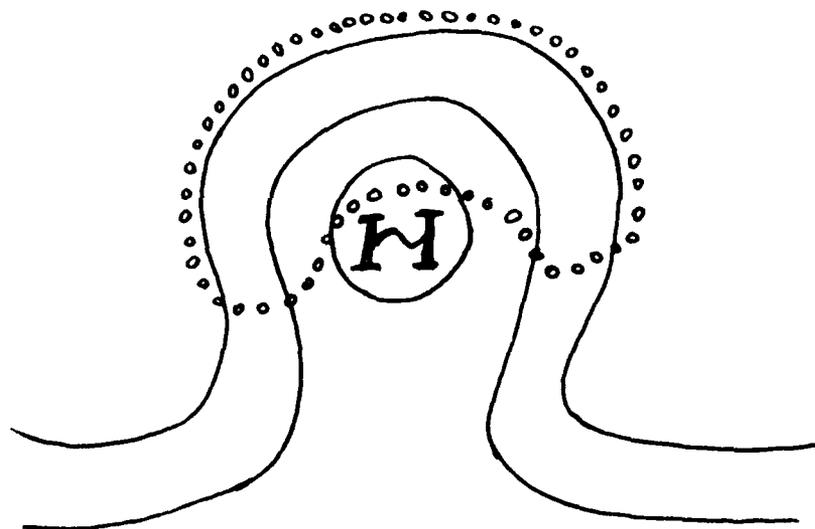
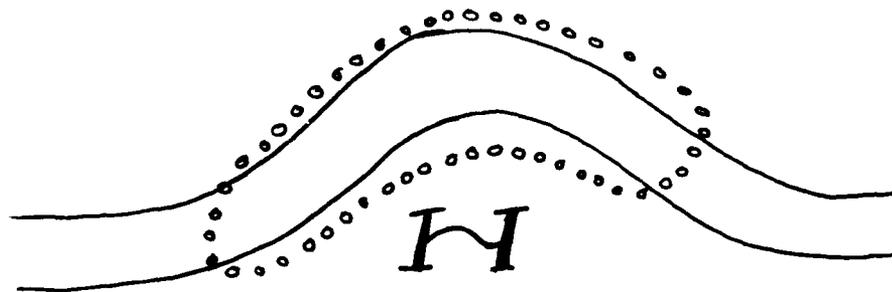


Figure 40. Stratospheric CAT (open circles) forecast area at 100 mb.

Stratospheric mountain-wave CAT can also be caused by the propagation of mountain waves upward into the stratosphere from the lower tropopause. If mountain-wave turbulence is forecast or observed near the tropopause, it should also be forecast in regions approximately over the mountain-wave area according to Table 5.

If CAT due to mountain wave +/- 5000 feet of tropopause is:	Then forecast stratospheric CAT tropopause to 60,000 feet:
MODERATE	LIGHT
SEVERE	MODERATE

Table 5. Empirically derived stratospheric CAT intensities associated with mountain-wave turbulence.

7 CONCLUDING REMARKS

Many of these models relating CAT to atmospheric flow are simplifications of the highly complex real atmosphere. At times, many of the turbulence mechanisms (thermal advection, horizontal shear, etc.) may be acting in unison. In those cases, the probability of encounter, the horizontal and vertical extents, and the intensity of turbulence is much greater.

Overforecasting in size and intensity is a common failure of CAT forecasters. At times, CAT forecasters "chase" pilot reports and issue large area CAT advisories just to cover the reports and protect themselves from any repercussions should an aircraft file a hazard report. To avoid "crying wolf" all of the time, forecasters will have to, at times, suffer a few isolated missed occurrences of CAT. If a CAT report cannot be associated with a specific synoptic feature, then ignore it unless other reports are received in the same area. In any case, the area forecasts must be made as small as possible.

As can be seen in this tech note, CAT forecasting is still more of an art than a science. The automated products that are produced at AFGWC are very limited in capability. This reflects the infancy of the science. The art of successful CAT forecasting can only be gained by experience. A CAT forecaster must combine personal skills with the automated aids to produce the final CAT forecast. This man-machine mix results in the best possible forecast within the limitations of the present state of the art.

A Selected Bibliography

- Balzer, M. E., and H. T. Harrison, 1959: The nature of clear air turbulence. United Air Lines Meteorology Circular 48, 46 pp.
- Binding, A. A., 1965: Association of clear-air turbulence with 300 mb contour patterns. Meteor. Mag., 94, 11-19.
- Browning, K. A., 1971: Structure of the atmosphere in the vicinity of large-amplitude Kelvin-Helmholtz billows. Quart. J. Roy. Meteor. Soc., 97, 283-299.
- Burnett, P. T., 1970: Turbulence forecasting procedures. AFGWC Tech. Memo. 70-7, Air Force Global Weather Central, Offutt AFB, NE 68113, 83 pp.
- Businger, J. A., J. C. Wyngaard, Y. Izumi, and E. F. Bradley, 1971: Flux-profile relationships in the atmospheric surface layer. J. Atmos. Sci., 28, 181-189.
- Clodman, J. G. M. Morgan, and J. T. Ball, 1960: High level turbulence. AWS Tech. Report 158, Air Weather Service, Scott AFB, IL 62225, 81 pp.
- Colson, D., 1963: Summary of high level turbulence over United States. Mon. Wea. Rev., 91, 605-609.
- Endlich, R. M., 1964: The mesoscale structure of some regions of clear-air turbulence. J. Appl. Meteor., 3, 261-276.
- Ernst, J. A., 1976: SMS-1 nighttime infrared imagery of low-level mountain waves. Mon. Wea. Rev., 104, 207-213.
- George, J. J., 1968: Prediction of clear air turbulence. Eastern Airline Inc., Atlanta Airport, 76 pp.
- Harrison, H. T., 1965: The mountain wave. NASA Contractor Rep., CR-135, 56 pp.
- Hayes, J. L., and J. E. Hoke, 1979: AFGWC maps and grids. AFGWC Tech. Note 79-003, Air Force Global Weather Central, Offutt AFB, NE 68113, under preparation.
- Holcomb, M. L., 1976: Jet-stream analysis and turbulence forecasting. AFGWC Tech. Memo. 76-1, Air Force Global Weather Central, Offutt AFB, NE 68113, 101 pp.
- Hopkins, F. H., 1976: Forecasting techniques for non-convective turbulence (CAT). WMO Tech. Note.
- Shaner, S., 1975: A case study of clear air turbulence on the cold side of high altitude troughs. NMC Tech. Attachment 75-3, 8 pp.

Miles, J. W. and L. N. Howard, 1964: Note on a heterogeneous shear flow. J. Fluid Mech., 20, 331-336.

National Transportation Safety Board, 1971: Study of lessons to be learned from accidents attributed to turbulence. Report adopted 15 Dec 71.

Rammer, W. A., 1973: Forecasting significant CAT associated with cyclogenesis and related jetstream genesis. NMC Tech. Attachment 73-7.

Thorpe, S. A., 1973: Turbulence in stably stratified fluids: a review of laboratory experiments. Bound. Layer Meteor., 5, 95-119.

Sorenson, J. E., 1964: Synoptic pattern of clear air turbulence. United Air Lines Meteorology Circular 56, 64 pp.

_____, 1976: Mountains and clear air turbulence. United Air Lines Meteorology Circular 63, 22 pp.

_____, and W. B. Beckwith, 1975: Clear air turbulence as practiced in airline operations. Presented at FAA Symposium on Clear Air Turbulence Forecasting, Wash. D. C., 12 Aug 75, 22 pp.

Appendix A

The Use of Pilot Reports in CAT Forecasting

Pilot reports (PIREPs) and aircraft reports (AIREPs) of CAT are the most reliable indicators of the existence or nonexistence of CAT. They also partially fill the void in the upper-air observation network. However, it is well-known that individual pilot's interpretations of turbulence encounters as well as the responses of different aircraft (in various aerodynamic attitudes) vary. In general, inexperienced civilian pilots tend to report more intense CAT than experienced military pilots. In addition, commercial aircraft pilots are more concerned with passenger comfort than with aircraft structural integrity and tend to report CAT intensities based upon passenger reactions.

The current procedure at AFGWC is to continuously monitor pilot reports received for the entire Northern Hemisphere. Forecasters are immediately warned of all reports of light to moderate or greater turbulence at or above 10,000 feet. Turbulence reports from large aircraft (F-4 and larger) are usually taken at face value while reports from light aircraft (T-39 and smaller) are downgraded according to Table A-1. The aircraft category depends upon the aircraft weight and cruising speed and is determined by the following formula:

$$N = \frac{\text{weight (lbs)}}{1000 \text{ (lbs)}} + \frac{\text{cruising speed (knots)}}{5 \text{ (knots)}}$$

Table A-1. Use of N, calculated from aircraft weight and cruising speed, to determine turbulence category.

(N < 50)	= CAT A
(50 ≤ N < 150)	= CAT B
(150 ≤ N < 250)	= CAT C
(250 ≤ N < 350)	= CAT D
(350 ≤ N)	= CAT E


One should note that there is much debate over the turbulence intensity values in Table A-2. Also, the formula above gives a very poor indication of aircraft response to turbulence. At best, one should consider Table A-2 as only an example of how turbulence reports from different weight aircraft could relate to each other. During 1979, the Air Force Dynamics Laboratory is working with the Air Weather Service to learn better relationships between aircraft response and turbulent vertical velocities. The results of their study, once available, should be used in place of Table A-2.

CATEGORIES				
A	B	C	D	E
(L) or L	(L)	N	N	N
L-M	L	(L)	(L)	N
M	L-M	L	L	(L)
M-S	M	L-M	L-M	L
S	M-S	M	M	L-M
X	S	M-S	M-S	M
-	X	S	S	M-S
-	-	X	X	S
-	-	-	-	X

Reported turbulence

Symbol	Code	Reported turbulence
	N	None
	(L)	Occasional light
^	L	Light
^ - ^	L-M	Light occasional moderate
~	M	Moderate
~ - ^	M-S	Moderate occasional severe
^^	S	Severe
	X	Extreme

Table A-2 Turbulence equivalence table used to quantify and compare pilot reports. Do not adjust category when one aircraft changes speed.

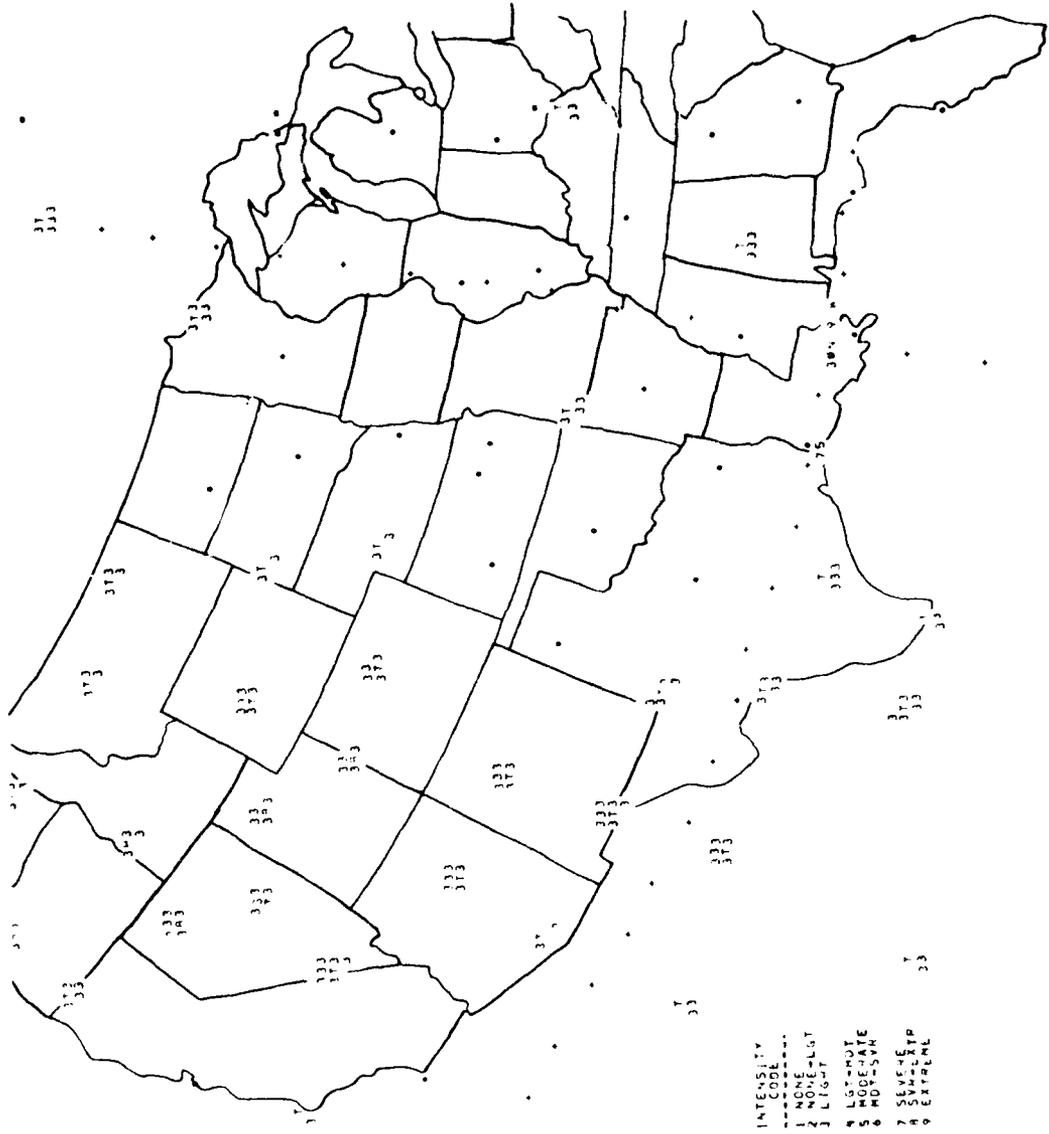

24 10 1145
 26 11 14
 27 12 14
 28 13 14
 29 14 14
 30 15 14
 31 16 14
 32 17 14
 33 18 14
 34 19 14
 35 20 14
 36 21 14
 37 22 14
 38 23 14
 39 24 14
 40 25 14
 41 26 14
 42 27 14
 43 28 14
 44 29 14
 45 30 14
 46 31 14
 47 32 14
 48 33 14
 49 34 14
 50 35 14
 51 36 14
 52 37 14
 53 38 14
 54 39 14
 55 40 14
 56 41 14
 57 42 14
 58 43 14
 59 44 14
 60 45 14
 61 46 14
 62 47 14
 63 48 14
 64 49 14
 65 50 14
 66 51 14
 67 52 14
 68 53 14
 69 54 14
 70 55 14
 71 56 14
 72 57 14
 73 58 14
 74 59 14
 75 60 14
 76 61 14
 77 62 14
 78 63 14
 79 64 14
 80 65 14
 81 66 14
 82 67 14
 83 68 14
 84 69 14
 85 70 14
 86 71 14
 87 72 14
 88 73 14
 89 74 14
 90 75 14
 91 76 14
 92 77 14
 93 78 14
 94 79 14
 95 80 14
 96 81 14
 97 82 14
 98 83 14
 99 84 14
 100 85 14
 101 86 14
 102 87 14
 103 88 14
 104 89 14
 105 90 14
 106 91 14
 107 92 14
 108 93 14
 109 94 14
 110 95 14
 111 96 14
 112 97 14
 113 98 14
 114 99 14
 115 100 14
 116 101 14
 117 102 14
 118 103 14
 119 104 14
 120 105 14
 121 106 14
 122 107 14
 123 108 14
 124 109 14
 125 110 14
 126 111 14
 127 112 14
 128 113 14
 129 114 14
 130 115 14
 131 116 14
 132 117 14
 133 118 14
 134 119 14
 135 120 14
 136 121 14
 137 122 14
 138 123 14
 139 124 14
 140 125 14
 141 126 14
 142 127 14
 143 128 14
 144 129 14
 145 130 14
 146 131 14
 147 132 14
 148 133 14
 149 134 14
 150 135 14
 151 136 14
 152 137 14
 153 138 14
 154 139 14
 155 140 14
 156 141 14
 157 142 14
 158 143 14
 159 144 14
 160 145 14
 161 146 14
 162 147 14
 163 148 14
 164 149 14
 165 150 14
 166 151 14
 167 152 14
 168 153 14
 169 154 14
 170 155 14
 171 156 14
 172 157 14
 173 158 14
 174 159 14
 175 160 14
 176 161 14
 177 162 14
 178 163 14
 179 164 14
 180 165 14
 181 166 14
 182 167 14
 183 168 14
 184 169 14
 185 170 14
 186 171 14
 187 172 14
 188 173 14
 189 174 14
 190 175 14
 191 176 14
 192 177 14
 193 178 14
 194 179 14
 195 180 14
 196 181 14
 197 182 14
 198 183 14
 199 184 14
 200 185 14
 201 186 14
 202 187 14
 203 188 14
 204 189 14
 205 190 14
 206 191 14
 207 192 14
 208 193 14
 209 194 14
 210 195 14
 211 196 14
 212 197 14
 213 198 14
 214 199 14
 215 200 14
 216 201 14
 217 202 14
 218 203 14
 219 204 14
 220 205 14
 221 206 14
 222 207 14
 223 208 14
 224 209 14
 225 210 14
 226 211 14
 227 212 14
 228 213 14
 229 214 14
 230 215 14
 231 216 14
 232 217 14
 233 218 14
 234 219 14
 235 220 14
 236 221 14
 237 222 14
 238 223 14
 239 224 14
 240 225 14
 241 226 14
 242 227 14
 243 228 14
 244 229 14
 245 230 14
 246 231 14
 247 232 14
 248 233 14
 249 234 14
 250 235 14
 251 236 14
 252 237 14
 253 238 14
 254 239 14
 255 240 14
 256 241 14
 257 242 14
 258 243 14
 259 244 14
 260 245 14
 261 246 14
 262 247 14
 263 248 14
 264 249 14
 265 250 14
 266 251 14
 267 252 14
 268 253 14
 269 254 14
 270 255 14
 271 256 14
 272 257 14
 273 258 14
 274 259 14
 275 260 14
 276 261 14
 277 262 14
 278 263 14
 279 264 14
 280 265 14
 281 266 14
 282 267 14
 283 268 14
 284 269 14
 285 270 14
 286 271 14
 287 272 14
 288 273 14
 289 274 14
 290 275 14
 291 276 14
 292 277 14
 293 278 14
 294 279 14
 295 280 14
 296 281 14
 297 282 14
 298 283 14
 299 284 14
 300 285 14
 301 286 14
 302 287 14
 303 288 14
 304 289 14
 305 290 14
 306 291 14
 307 292 14
 308 293 14
 309 294 14
 310 295 14
 311 296 14
 312 297 14
 313 298 14
 314 299 14
 315 300 14
 316 301 14
 317 302 14
 318 303 14
 319 304 14
 320 305 14
 321 306 14
 322 307 14
 323 308 14
 324 309 14
 325 310 14
 326 311 14
 327 312 14
 328 313 14
 329 314 14
 330 315 14
 331 316 14
 332 317 14
 333 318 14
 334 319 14
 335 320 14
 336 321 14
 337 322 14
 338 323 14
 339 324 14
 340 325 14
 341 326 14
 342 327 14
 343 328 14
 344 329 14
 345 330 14
 346 331 14
 347 332 14
 348 333 14
 349 334 14
 350 335 14
 351 336 14
 352 337 14
 353 338 14
 354 339 14
 355 340 14
 356 341 14
 357 342 14
 358 343 14
 359 344 14
 360 345 14
 361 346 14
 362 347 14
 363 348 14
 364 349 14
 365 350 14
 366 351 14
 367 352 14
 368 353 14
 369 354 14
 370 355 14
 371 356 14
 372 357 14
 373 358 14
 374 359 14
 375 360 14
 376 361 14
 377 362 14
 378 363 14
 379 364 14
 380 365 14
 381 366 14
 382 367 14
 383 368 14
 384 369 14
 385 370 14
 386 371 14
 387 372 14
 388 373 14
 389 374 14
 390 375 14
 391 376 14
 392 377 14
 393 378 14
 394 379 14
 395 380 14
 396 381 14
 397 382 14
 398 383 14
 399 384 14
 400 385 14
 401 386 14
 402 387 14
 403 388 14
 404 389 14
 405 390 14
 406 391 14
 407 392 14
 408 393 14
 409 394 14
 410 395 14
 411 396 14
 412 397 14
 413 398 14
 414 399 14
 415 400 14
 416 401 14
 417 402 14
 418 403 14
 419 404 14
 420 405 14
 421 406 14
 422 407 14
 423 408 14
 424 409 14
 425 410 14
 426 411 14
 427 412 14
 428 413 14
 429 414 14
 430 415 14
 431 416 14
 432 417 14
 433 418 14
 434 419 14
 435 420 14
 436 421 14
 437 422 14
 438 423 14
 439 424 14
 440 425 14
 441 426 14
 442 427 14
 443 428 14
 444 429 14
 445 430 14
 446 431 14
 447 432 14
 448 433 14
 449 434 14
 450 435 14
 451 436 14
 452 437 14
 453 438 14
 454 439 14
 455 440 14
 456 441 14
 457 442 14
 458 443 14
 459 444 14
 460 445 14
 461 446 14
 462 447 14
 463 448 14
 464 449 14
 465 450 14
 466 451 14
 467 452 14
 468 453 14
 469 454 14
 470 455 14
 471 456 14
 472 457 14
 473 458 14
 474 459 14
 475 460 14
 476 461 14
 477 462 14
 478 463 14
 479 464 14
 480 465 14
 481 466 14
 482 467 14
 483 468 14
 484 469 14
 485 470 14
 486 471 14
 487 472 14
 488 473 14
 489 474 14
 490 475 14
 491 476 14
 492 477 14
 493 478 14
 494 479 14
 495 480 14
 496 481 14
 497 482 14
 498 483 14
 499 484 14
 500 485 14
 501 486 14
 502 487 14
 503 488 14
 504 489 14
 505 490 14
 506 491 14
 507 492 14
 508 493 14
 509 494 14
 510 495 14
 511 496 14
 512 497 14
 513 498 14
 514 499 14
 515 500 14
 516 501 14
 517 502 14
 518 503 14
 519 504 14
 520 505 14
 521 506 14
 522 507 14
 523 508 14
 524 509 14
 525 510 14
 526 511 14
 527 512 14
 528 513 14
 529 514 14
 530 515 14
 531 516 14
 532 517 14
 533 518 14
 534 519 14
 535 520 14
 536 521 14
 537 522 14
 538 523 14
 539 524 14
 540 525 14
 541 526 14
 542 527 14
 543 528 14
 544 529 14
 545 530 14
 546 531 14
 547 532 14
 548 533 14
 549 534 14
 550 535 14
 551 536 14
 552 537 14
 553 538 14
 554 539 14
 555 540 14
 556 541 14
 557 542 14
 558 543 14
 559 544 14
 560 545 14
 561 546 14
 562 547 14
 563 548 14
 564 549 14
 565 550 14
 566 551 14
 567 552 14
 568 553 14
 569 554 14
 570 555 14
 571 556 14
 572 557 14
 573 558 14
 574 559 14
 575 560 14
 576 561 14
 577 562 14
 578 563 14
 579 564 14
 580 565 14
 581 566 14
 582 567 14
 583 568 14
 584 569 14
 585 570 14
 586 571 14
 587 572 14
 588 573 14
 589 574 14
 590 575 14
 591 576 14
 592 577 14
 593 578 14
 594 579 14
 595 580 14
 596 581 14
 597 582 14
 598 583 14
 599 584 14
 600 585 14
 601 586 14
 602 587 14
 603 588 14
 604 589 14
 605 590 14
 606 591 14
 607 592 14
 608 593 14
 609 594 14
 610 595 14
 611 596 14
 612 597 14
 613 598 14
 614 599 14
 615 600 14
 616 601 14
 617 602 14
 618 603 14
 619 604 14
 620 605 14
 621 606 14
 622 607 14
 623 608 14
 624 609 14
 625 610 14
 626 611 14
 627 612 14
 628 613 14
 629 614 14
 630 615 14
 631 616 14
 632 617 14
 633 618 14
 634 619 14
 635 620 14
 636 621 14
 637 622 14
 638 623 14
 639 624 14
 640 625 14
 641 626 14
 642 627 14
 643 628 14
 644 629 14
 645 630 14
 646 631 14
 647 632 14
 648 633 14
 649 634 14
 650 635 14
 651 636 14
 652 637 14
 653 638 14
 654 639 14
 655 640 14
 656 641 14
 657 642 14
 658 643 14
 659 644 14
 660 645 14
 661 646 14
 662 647 14
 663 648 14
 664 649 14
 665 650 14
 666 651 14
 667 652 14
 668 653 14
 669 654 14
 670 655 14
 671 656 14
 672 657 14
 673 658 14
 674 659 14
 675 660 14
 676 661 14
 677 662 14
 678 663 14
 679 664 14
 680 665 14
 681 666 14
 682 667 14
 683 668 14
 684 669 14
 685 670 14
 686 671 14
 687 672 14
 688 673 14
 689 674 14
 690 675 14
 691 676 14
 692 677 14
 693 678 14
 694 679 14
 695 680 14
 696 681 14
 697 682 14
 698 683 14
 699 684 14
 700 685 14
 701 686 14
 702 687 14
 703 688 14
 704 689 14
 705 690 14
 706 691 14
 707 692 14
 708 693 14
 709 694 14
 710 695 14
 711 696 14
 712 697 14
 713 698 14
 714 699 14
 715 700 14
 716 701 14
 717 702 14
 718 703 14
 719 704 14
 720 705 14
 721 706 14
 722 707 14
 723 708 14
 724 709 14
 725 710 14
 726 711 14
 727 712 14
 728 713 14
 729 714 14
 730 715 14
 731 716 14
 732 717 14
 733 718 14
 734 719 14
 735 720 14
 736 721 14
 737 722 14
 738 723 14
 739 724 14
 740 725 14
 741 726 14
 742 727 14
 743 728 14
 744 729 14
 745 730 14
 746 731 14
 747 732 14
 748 733 14
 749 734 14
 750 735 14
 751 736 14
 752 737 14
 753 738 14
 754 739 14
 755 740 14
 756 741 14
 757 742 14
 758 743 14
 759 744 14
 760 745 14
 761 746 14
 762 747 14
 763 748 14
 764 749 14
 765 750 14
 766 751 14
 767 752 14
 768 753 14
 769 754 14
 770 755 14
 771 756 14
 772 757 14
 773 758 14
 774 759 14
 775 760 14
 776 761 14
 777 762 14
 778 763 14
 779 764 14
 780 765 14
 781 766 14
 782 767 14
 783 768 14
 784 769 14
 785 770 14
 786 771 14
 787 772 14
 788 773 14
 789 774 14
 790 775 14
 791 776 14
 792 777 14
 793 778 14
 794 779 14
 795 780 14
 796 781 14
 797 782 14
 798 783 14
 799 784 14
 800 785 14
 801 786 14
 802 787 14
 803 788 14
 804 789 14
 805 790 14
 806 791 14
 807 792 14
 808 793 14
 809 794 14
 810 795 14
 811 796 14
 812 797 14
 813 798 14
 814 799 14
 815 800 14
 816 801 14
 817 802 14
 818 803 14
 819 804 14
 820 805 14
 821 806 14
 822 807 14
 823 808 14
 824 809 14
 825 810 14
 826 811 14
 827 812 14
 828 813 14
 829 814 14
 830 815 14
 831 816 14
 832 817 14
 833 818 14
 834 819 14
 835 820 14
 836 821 14
 837 822 14
 838 823 14
 839 824 14
 840 825 14
 841 826 14
 842 827 14
 843 828 14
 844 829 14
 845 830 14
 846 831 14
 847 832 14
 848 833 14
 849 834 14
 850 835 14
 851 836 14

TRUP THUP MT
MTN PEAK MT
AVG RIDGE MT
(P-TALLER)

TRUP
HI(FT)
TRUP
TEMP(°F)

SFC
WSTS
(KTS)

TEMP GRAD
AT 200 MB
AT 850 MB
(C/° RM)

ALIMUM
WINDING
JURAH
JURAH

MAX WIND
BELOW 500MB
MIN TOP
WIND

850 MB TEMP
DIFF(°F)
850 MB
DIFF(°F)

TEMPERATURE
FORECAST
DATE
TIME

TIME

DATE

2/3
183

263

284

-03

3

-2

7

8

9

13

14

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

15

322

342

363

-05

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

372

392

413

-06

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

422

442

463

-06

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

472

492

513

-06

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

522

542

563

-06

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

572

592

613

-06

3

3

5

7

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

11

622

642

663

</