

AD-A085 331

UTAH STATE UNIV LOGAN SPACE MEASUREMENTS LAB F/G 80/14
DEVELOPMENT OF A SMALL ROCKET SYSTEM FOR CONDUCTIVITY MEASUREMENTS--ETC(U)
JUN 79 D A BURT, E F POUND, G D ALLRED DNA001-78-C-0362

DNA-5039F


NL

UNCLASSIFIED

1 of 1
AD
FORM 101



END
DATE
FILMED
5 80
DTIC

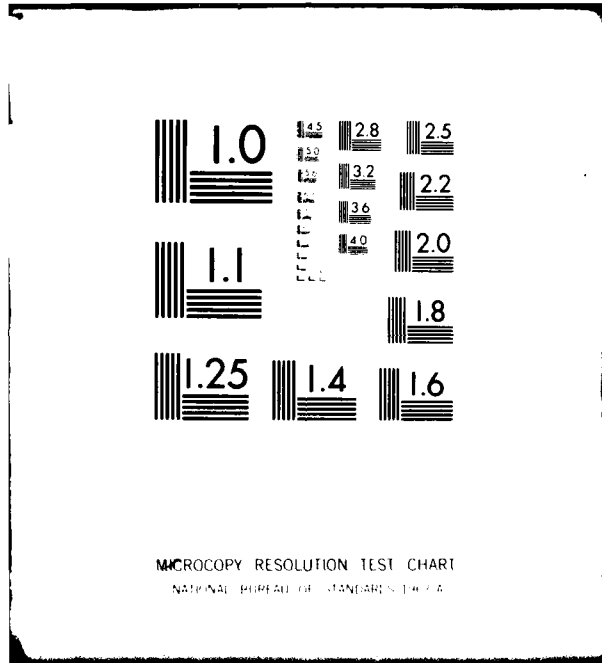

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1977-A

12 **LEVEL III**
NW

AD-E 300 715

DNA 5039F

ADA 083331

DEVELOPMENT OF A SMALL ROCKET SYSTEM FOR CONDUCTIVITY MEASUREMENTS IN THE HIGH LATITUDE DISTURBED D-REGION IN SUPPORT OF ELF/VLF PROPAGATION STUDIES

D. A. Burt, E. F. Pound, and
G. D. Allred
Space Measurements Laboratory
Utah State University
Logan, Utah 84322

30 June 1979

Final Report for Period 9 October 1978—20 June 1979

CONTRACT No. DNA 001-78-C-0342

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

DTIC
ELECTE
S **D**
APR 23 1980
B

THIS WORK SPONSORED BY THE DEFENSE NUCLEAR AGENCY
UNDER RDT&E RMSS CODE B322078462 I11CAXHX64101 H2590D.

DDC FILE COPY

Prepared for
Director
DEFENSE NUCLEAR AGENCY
Washington, D. C. 20305

80 3 10 110

11514

Destroy this report when it is no longer
needed. Do not return to sender.

PLEASE NOTIFY THE DEFENSE NUCLEAR AGENCY,
ATTN: STTI, WASHINGTON, D.C. 20305, IF
YOUR ADDRESS IS INCORRECT, IF YOU WISH TO
BE DELETED FROM THE DISTRIBUTION LIST, OR
IF THE ADDRESSEE IS NO LONGER EMPLOYED BY
YOUR ORGANIZATION.



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER DNA 5039F	2. GOVT ACCESSION NO. AD- A083 334	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) DEVELOPMENT OF A SMALL ROCKET SYSTEM FOR CONDUCTIVITY MEASUREMENTS IN THE HIGH LATITUDE DISTURBED D-REGION IN SUPPORT OF ELF/VLF PROPAGATION STUDIES		5. TYPE OF REPORT & PERIOD COVERED Final Report for Period 9 Oct 78—20 Jun 79
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) D. A. Burt E. F. Pound G. D. Allred		8. CONTRACT OR GRANT NUMBER(s) DNA 001-78-C-0342 <i>new</i>
9. PERFORMING ORGANIZATION NAME AND ADDRESS Space Measurements Laboratory Utah State University Logan, Utah 84322		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Subtask I11CAXHX641-01
11. CONTROLLING OFFICE NAME AND ADDRESS Director Defense Nuclear Agency Washington, D.C. 20305		12. REPORT DATE 30 June 1979
		13. NUMBER OF PAGES 28
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) ONRRR, University of California 239 Campbell Hall Berkeley, California 94720		15. SECURITY CLASS (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES This work sponsored by the Defense Nuclear Agency under RDT&E RMSS Code B322078462 I11CAXHX64101 H2590D.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Atmospheric Conductivity Gerdien Condensers Small Rocket Instrumentation Measurements of the Lower Atmosphere		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) An ultra-miniature conductivity probe for small rocket applications has been developed for measurements within the lower atmosphere (D-region and below). The probe is contained within a MET rocket and may be launched from standard MET sites with a minimum of personnel and equipment. The measuring instrument is a miniature Gerdien condenser, which is ejected near apogee and is trailed by a starute to reduce descent speeds below sonic		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

20. ABSTRACT (Continued)

values. Accumulated data are transmitted via telemetry to a recording ground station.

The initial application of this instrument was at the White Sands Small Missile Range on 14 December 1978. After payload ejection near apogee data were recorded for over an hour as the instrument descended on the starute. Some modifications are indicated, but basically the concept and experiment appear sound.

ACCESSION for		
NTIS	White Section	<input checked="" type="checkbox"/>
ODC	Buff Section	<input type="checkbox"/>
UNANNOUNCED		<input type="checkbox"/>
JUSTIFICATION		
BY		
DISTRIBUTION/AVAILABILITY CODES		
Dist.	Avail.	and/or SPECIAL
A		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

Table of Contents	1
List of Figures	1
Introduction	3
Instrument Operation and Design	6
Theory of Operation	7
Mechanical Design	9
Electrical Design	11
Launch Configuration	15
Results	15
Conclusions and Recommendations	17
References	19

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Scenario of the flight of WSMR GC-1	5
2	Fundamentals of Gerdien Condenser operation	8
3	Idealized characteristic curve of Gerdien Condenser	8
4	Graphic portrayal of the physical configuration of the Gerdien Condenser	10
5	A photograph of the Gerdien Condenser, also showing staves and end caps	12
6	A block diagram of the Gerdien Condenser and telemetry circuitry	13
7	Schematic diagram of Gerdien Condenser electronics	14
8	Example of telemetry record of Gerdien current	16
9	Positive ion conductivity	18

INTRODUCTION

The conductivity of the lower regions of the ionosphere, particularly during disturbed conditions, is important due to the effects upon ELF and VLF radio propagation. In this highly collisionally-dominated regime the measurement of conductivity directly by use of a Gerdien condenser [Gerdien, 1905] has proven useful.


In simplest terms, this device consists of two, concentric cylinders through which the air flows and the atmospheric conductivity is determined by applying a potential across the two electrodes and monitoring the resultant current. Such instruments have been developed and used aboard rockets for measurement of atmospheric conductivity of the lower ionosphere [Pederson, 1965; Burt, 1967; Mitchell and Hale, 1973; Conley, 1974; Widdel et al., 1976]. Under contract DNA001-78-C-0342, Utah State University undertook development of a miniature Gerdien condenser payload suitable for use on meteorological rocket-Dart system that was producible at minimal cost and incorporating simplicity of operation in order that launches could be effected with a minimum of field personnel. Such design criteria would provide the opportunity to utilize the instrument at remote sites such as Thule, Greenland and Andoya, Norway without the necessity for a large field party. In fact, such a simplified instrument could be left at the launch site to be launched by site personnel when desirable conditions occurred.

To accomplish these goals a modified Viper IIIA Dart vehicle configuration was developed to house the instrument and provide the measurements scenario described by Figure 1. This configuration employed a larger than normal inside diameter Dart (necessary to house the Gerdien condenser). The instrument itself was housed within the Dart portion of the vehicle and was constructed such that the complete electronics circuitry, including telemetry transmitter, is housed within the center electrode of the condenser. The instrument was ejected from the Dart at apogee along with an attached starute decelerator. The starute provided the proper axial orientation for the instrument and reduced its velocity to sub-sonic speeds, thereby simplifying

the determination of the mass rate of air flow through the condenser.

Two such payloads were designed and built, and one of these (WSMR GM-1) was launched from the White Sands Missile Range (New Mexico) on 14 December 1978 at 1238:59 (Local) to test the total concept of the experiment. The rocket and payload performed satisfactorily, achieving the desired altitude and proper deployment of the Gerdien condenser and starute. The telemetry system performed as designed and data were received for well over one hour as the payload descended on the starute. The operation of the Gerdien condenser sweep and current collection was normal throughout the flight; however, the operation was complicated by the fact that the charge neutralization of the condenser was not achieved. It was possible to derive conductivities from the measured results, but derivation of densities was not possible with any degree of accuracy since the reference potential of the Gerdien system was not known.

The remainder of this report details the theory, design, operation, and results associated with the payload and instrument, and discusses some proposed modifications that would eliminate the charge neutralization difficulties experienced.

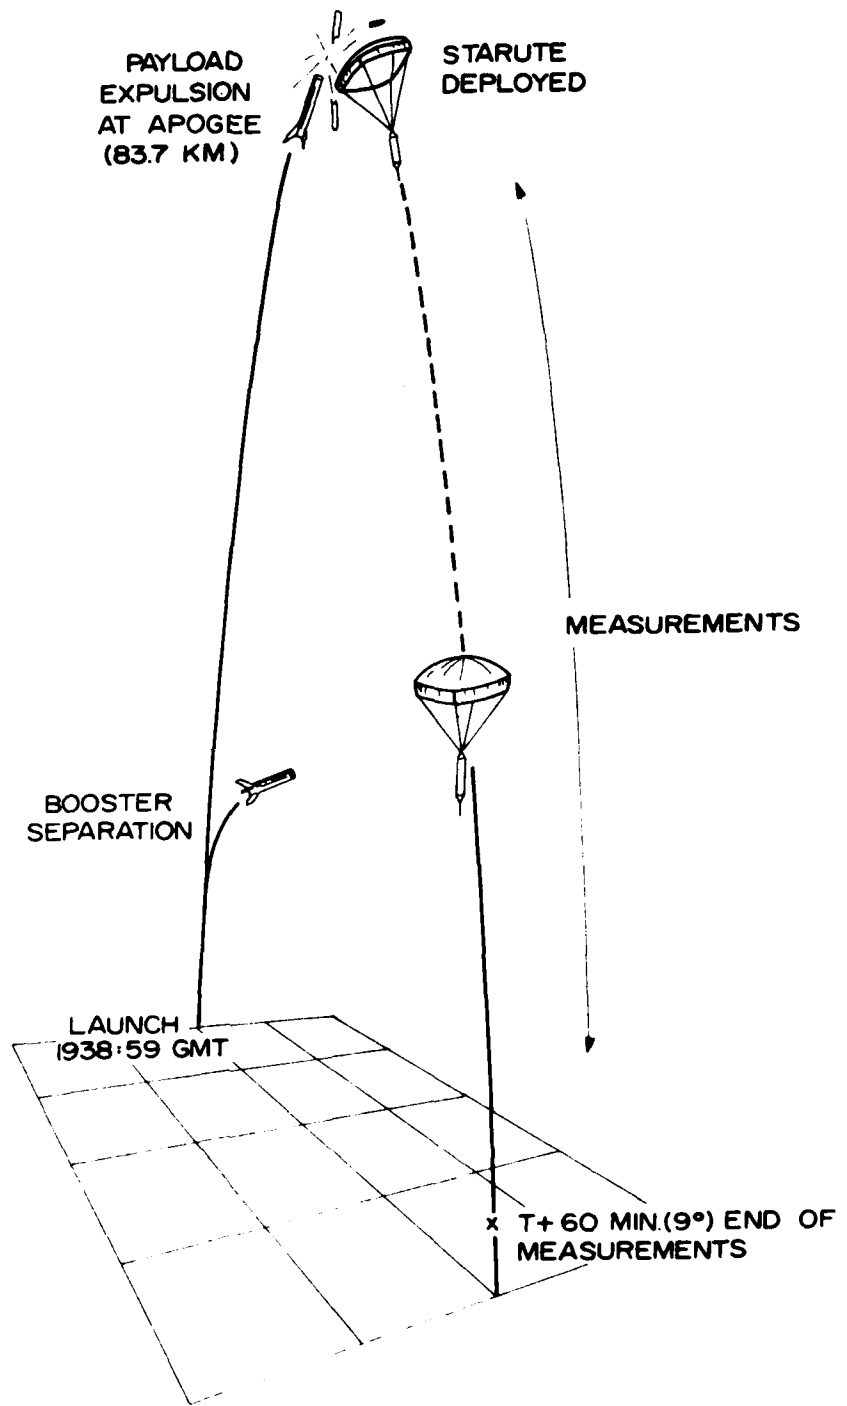

FLIGHT OF WSMR GC-1

Figure 1. Scenario of the flight of WSMR GC-1.

INSTRUMENT OPERATION AND DESIGN

As shown in Figure 1, the Dart payload system was boosted along its trajectory with a Viper IIIA motor. This vehicle configuration is not a 2-stage motor system; the Dart portion is merely a projectile that receives its impetus from the Viper IIIA motor. All of the energy of the Dart section is imparted by the approximately 2.5 second burn of the Viper. After burnout, atmospheric drag separates the Viper motor from the Dart and the projectile simply coasts to altitude. The payload must be extremely rugged in order to survive the "G" stresses attendant to launch. Although the magnitude of these stresses is not precisely known, reports indicate that it may run to excess of 200 G's. A pyro ejection system is used to deploy the Gerdien condenser and starute from the Dart near apogee in order that the measurements can be accomplished. This ejection sequence is initiated at launch by simultaneously igniting a delay fuse which ignites a gas generator to expel the starute and Gerdien condenser package at apogee.

The measurements of ion current are translated to electrical signals and are transmitted to the ground station via a 1680 MHz transmitter. Trajectory data are obtained by radar which is able to track the payload by using the aluminized coating of the starute as a reflector.

The system was designed around the following specifications and constraints.

1. Physical Size
 - (a) Maximum Gerdien Diameter: 2-3/4 inches.
 - (b) Optimum Payload Length: 16 inches.
 - (c) Payload Weight: under 4 lbs.
2. Electrical Power
 - (a) Minimum battery lifetime: 1-1/2 hours
3. Ruggedized to survive high accelerations (>200 G's) due to booster thrust.
4. Dart Spin Rate: 20 rps.

5. Minimum Cost

- (a) Minimum field requirements so that if necessary, the units can be left in the field and launched by range personnel with a minimum of training.
- (b) Provide a highly mobile launching system that can be used at all MET ranges without major launcher changes or costs.

Theory of Operation

Basically, the Gerdien condenser operates by applying a sweep voltage between the two elements of a cylindrical capacitor and measuring the resulting current collected from the air flowing through the condenser, as shown in Figure 2. With the polarity indicated, positive ions will be accelerated toward and collected on the center conductor. Reversal of the voltage allows collection of negative ions. If a plasma having positive ions of a single species enters the cylinder at a constant velocity directed parallel to the cylinder axis, the current as a function of applied voltage will be as shown in the ideal characteristic curve of Figure 3. Assuming that many collisions occur within the condenser, the voltage-current relationship is linear until a voltage is reached at which all charged particles are collected (saturation).

The slope of the initial portion of the current-voltage curve will be proportional to the conductivity as can be seen from the expression for current I [Conley, 1974]:

$$I = \sigma \frac{2\pi L}{\ln b/a} \phi_p = \sigma \frac{C}{\epsilon} \phi_p \quad (1)$$

- where:
- σ = the conductivity
 - ϕ_p = the voltage across the condenser
 - L = condenser length
 - a, b = radii of inner and outer electrodes, respectively
 - C = the free space capacitance of the condenser
 - ϵ = the permittivity of free space

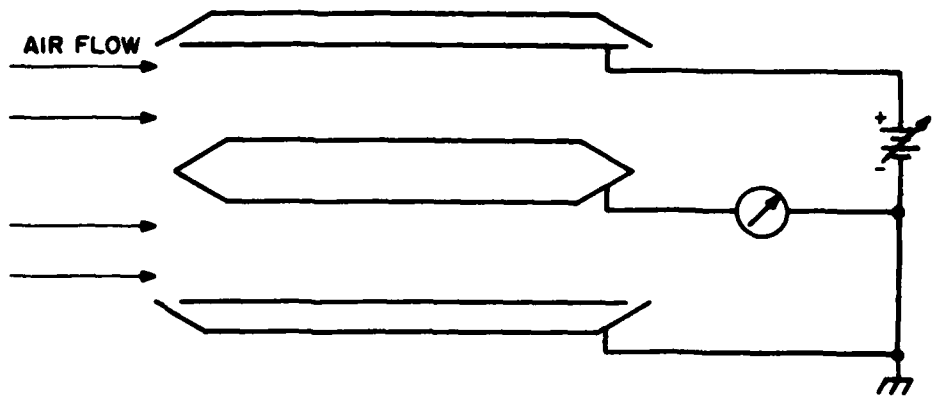


Figure 2. Fundamentals of Gerdien Condenser operation.

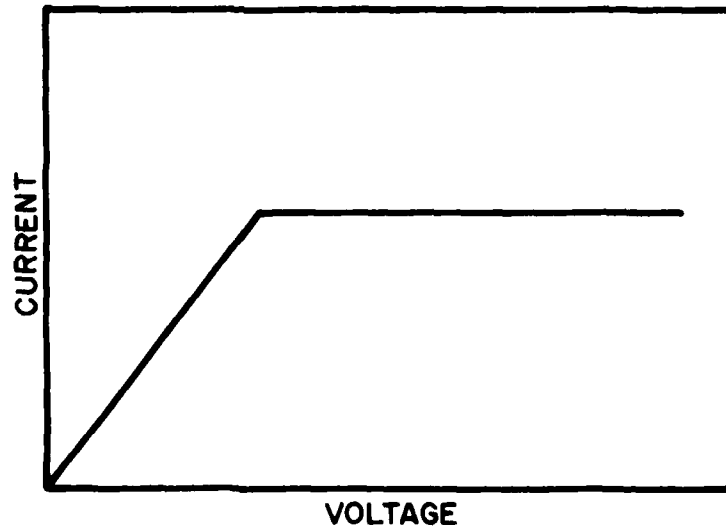


Figure 3. Idealized characteristic curve of Gerdien Condenser.

In terms of ion mobility k , and ion density N_i , the conductivity is

$$\sigma = kN_i \epsilon \quad (2)$$

The ion density can be calculated from the current in the saturation region, hence, mobility can also be derived.

The conductivity concept requiring a large number of collisions within the condenser limits the operation to the region below about 65 km, where the mean free path of any particle is much less than the distance between the two elements.

In the actual atmospheric case where more than one species of ions may be present, the curve will not have a single slope and hence, the analysis will be more complicated. The following facts, however, can be utilized:

1. The current in the saturated region will be proportional to the total ion density.
2. The initial slope of the curve will be proportional to the total ion conductivity.
3. The derivative of the curve gives information about individual ion species.
4. Ion mobilities can be derived from the ion density and conductivity results (1 and 2 above).

Mechanical Design

A special 3-inch diameter Dart to be propelled by a Viper IIIA motor was designed by Space Data Corporation as part of this program. The 3-inch Dart fixed the maximum diameter available for the Gerdien condenser as 2-3/4 inches. The physical configuration of the Gerdien condenser showing the locations of component subassemblies is shown in Figure 4. The complete electronics, including transmitter and batteries were contained inside the inner electrode. The size of batteries obtainable to power the device fixed the diameter of the inner electrode to 0.69 inches. The minimum length of the inner electrode was determined by the space required for the electronics, and the maximum length by the space available. Calculations on the sensitivity

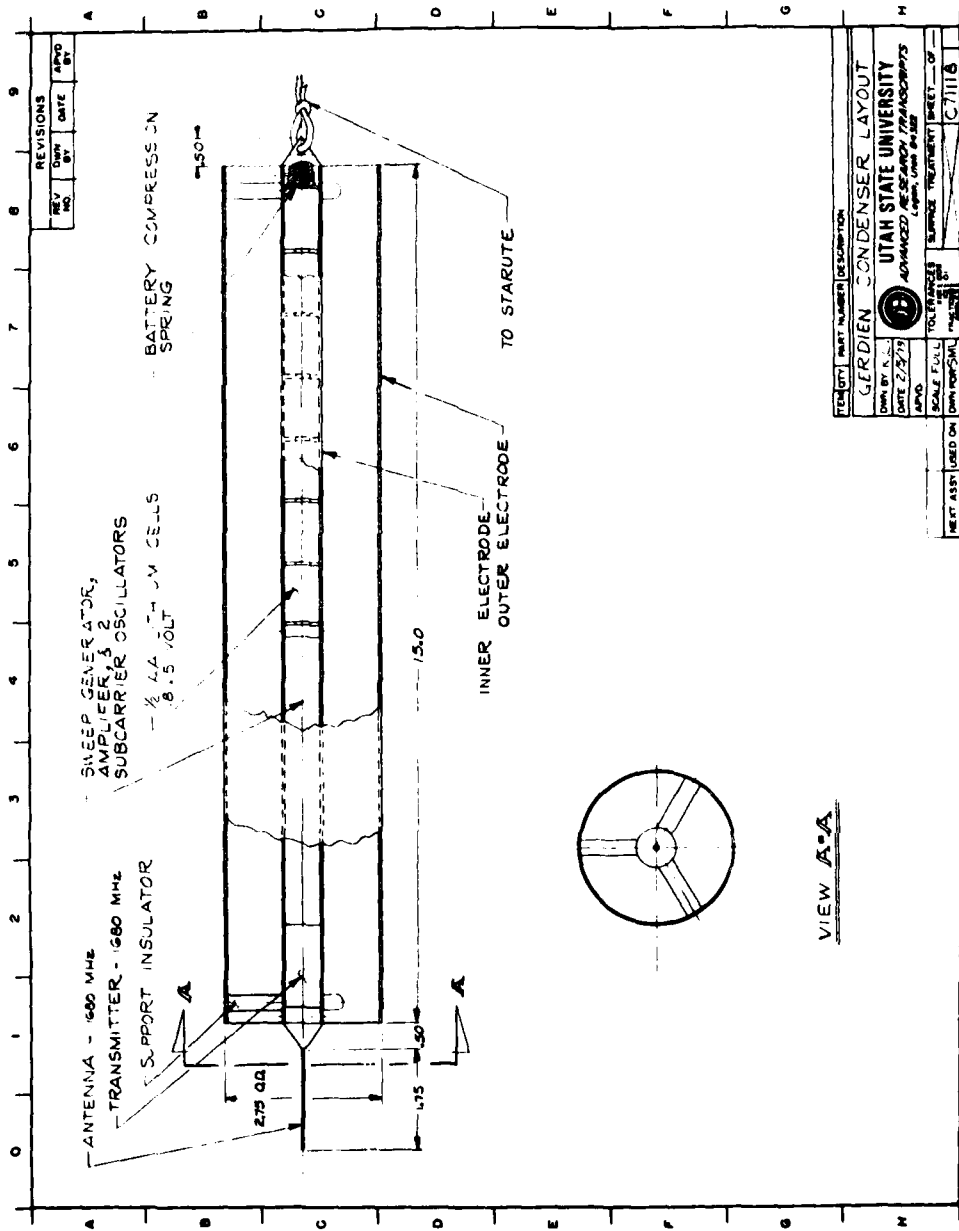


Figure 4. Graphic portrayal of the physical configuration of the Gerdien Condenser.

and desired operating range of the instrument showed that a 15-inch long condenser should provide reasonable current flow and that an 8-volt sweep would be sufficient to achieve the current saturation region at the altitudes of interest.

The final configuration of the instrument is shown in Figure 5. This assembly was held within the Dart vehicle between two end caps with two staves between them to provide the support to the condenser during launch and ejection. The 14-foot starute decelerator was attached to the rear end (opposite the antenna) by a lanyard suspending the condenser below the starute during its descent.

Electrical Design

The electronic system of the Gerdien condenser is shown in block diagram form in Figure 6. As shown in Figure 6, a sawtooth waveshape voltage (ranging from -7 volts to +8.8 volts, with a repetition rate of ~ 1 Hz) was applied to the outer electrode with respect to the inner electrode. The collected ion current flowing between these elements as a result of this voltage was detected and converted to a proportional output voltage. The sensitivity was set to monitor a current ranging from 10^{-10} to 10^{-7} amperes. The voltage output from the current detector was applied directly to a voltage-controlled oscillator (VCO) set to a center frequency of 40 KHz. A second gain range was provided by amplifying the current detector output (by a factor of 10) and modulating a 22 Hz VCO. The outputs of the two subcarrier oscillators were linearly mixed at the input of the telemetry transmitter to frequency modulate the transmitter. The transmitter was a self-excited strip line oscillator operating at 1680 MHz with an output power of 200 mw.

The power for the instrument was provided by seven-1/2 AA Lithium primary batteries which together produced +18.5 volts. The required negative voltage was generated from the +18.5V source with a simple low-power inverter.

In operation, the instrument was turned on simply by inserting the batteries and screwing on the end cap. After instrument turn-on, the batteries provided at least 1-1/2 hours of operation.

Figure 7 is a schematic diagram of the Gerdien condenser circuitry.

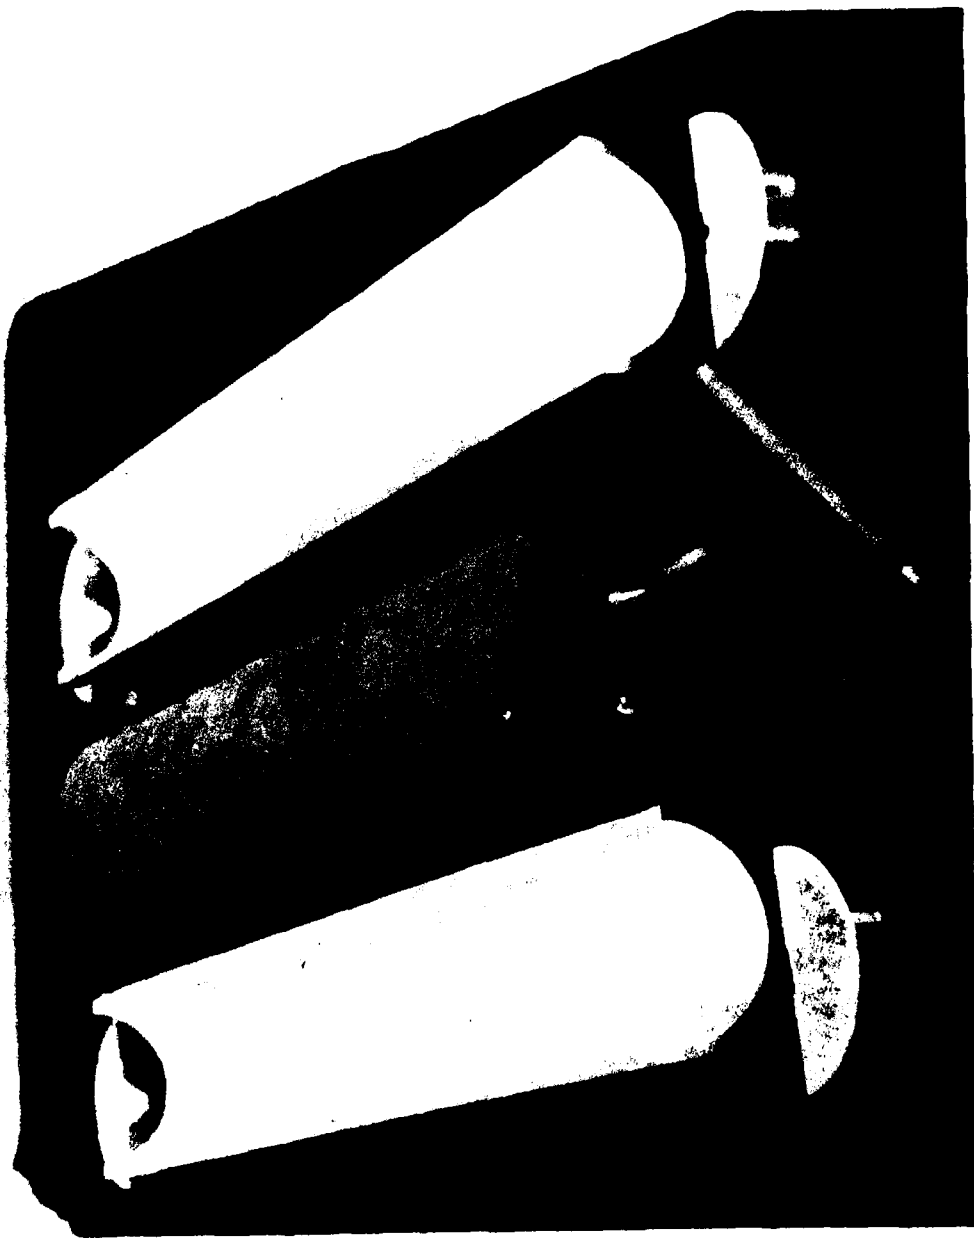


Figure 5. A photograph of the Gerdien Condenser, also showing staves and end caps.


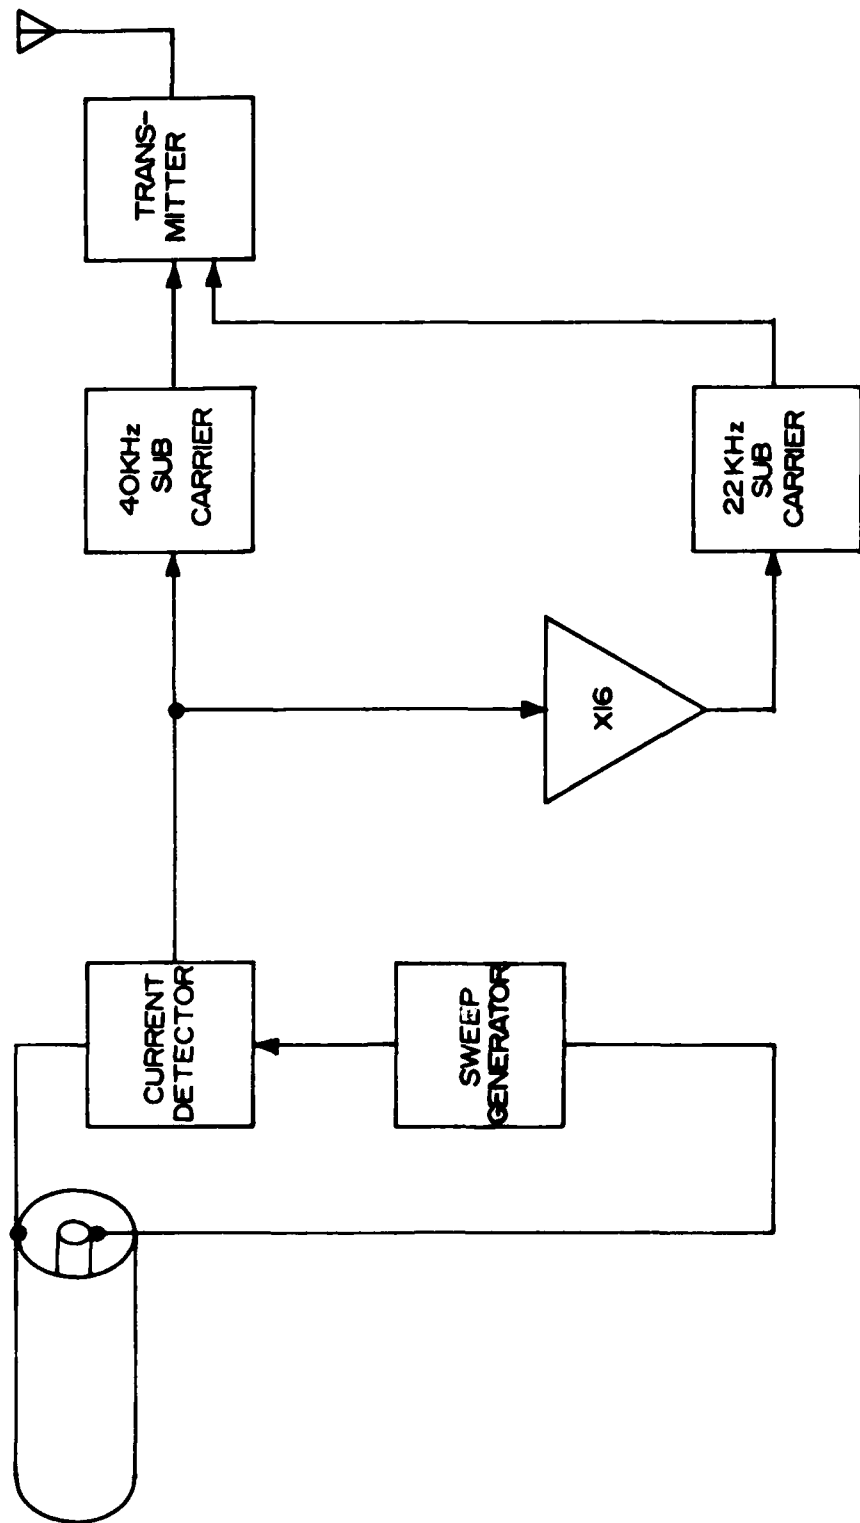


Figure 6. A block diagram of the Gerdien Condenser and telemetry circuitry.

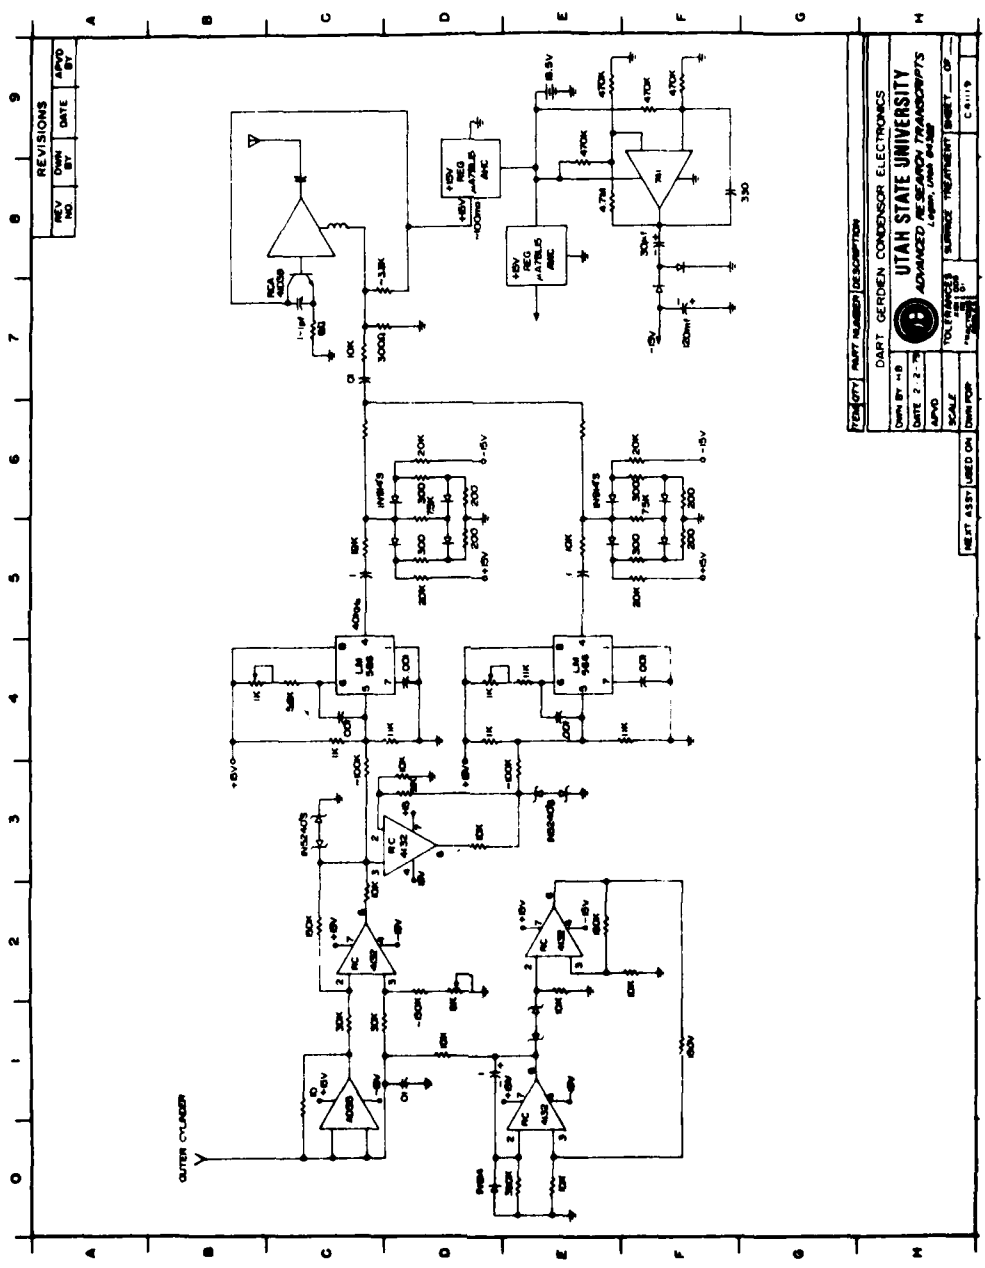

Launch Configuration

The launcher employed to fly the Viper IIIA-Dart (WSMR GC-1) was a standard Super Loki pedestal with a straight rail in place of the spiral rail. This straight rail was necessary to accommodate the Dart which incorporates a larger fixed tail than the standard MET system Darts. Launch crews at the standard MET sites are familiar with the Super Loki systems and it is felt that with minimal instruction they would be able to satisfactorily load, arm and launch the Viper IIIA-Dart configuration.

RESULTS

The initial flight of this payload design was successfully accomplished from the White Sands Small Missile Range, New Mexico on 14 December 1978. The vehicle was launched at 1938:59 (GMT) and attained an apogee of 83.7 km with a ground range of 14.1 km on a 356.6° azimuth. Those flight parameters match an effective launch elevation (QE) of 85.2°. The actual launcher settings were 80.9° QE and 348° azimuth. Launches are not wind weighted on the Small Missile Range, so the amount of dispersion due to winds and that due to the vehicle itself are not known. One important factor related to dispersion was noted however; the booster was stable (as it was during the October 1978 test firing of the vehicle only), so no problems are anticipated with booster impacts. The performance data from this flight indicate that an altitude of approximately 68.5 km would be achievable for a launch from sea level.

The instrument and starute separated satisfactorily at apogee and descent required more than an hour. Data were recorded for a period of 1/2 hour on a prime recorder and continued on a secondary recorder (discriminated data only) until T+1 hour at which time the payload was still at an elevation of 9°. Recordings were not continued past the T+60 minute point since range equipment was necessarily diverted to support another launch. Throughout the total recording period good telemetry signals were received with very little dropout.

Figure 8 is an example of the data obtained from the Gerdien at an altitude of ~67 km. Two slopes are obvious for the positive ion region,

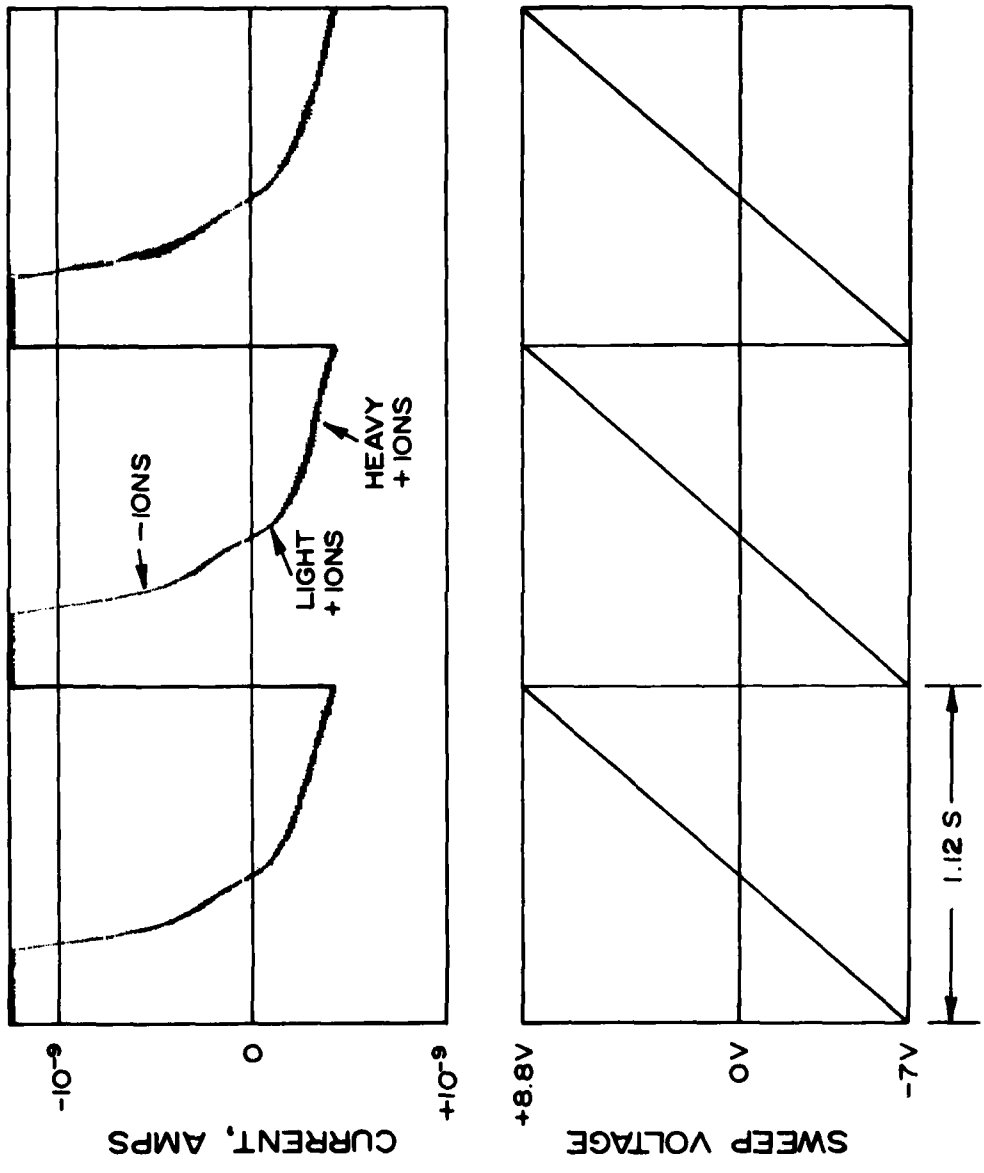


Figure 8. Example of telemetry record of Gerdien current (upper trace) with the voltage sweep shown in the lower trace. The upper portion of the current corresponds to negative ion collection (-ions) and the lower to positive ions. The break in the positive ion slope indicates two different ions (light and heavy ions).

indicating the measurement of ions of two vastly different mobilities. The measurements of light and heavy ions at this altitude have been measured by *Rose and Widdel* [1972] and indicate that the mobility of the light ions is about an order of magnitude higher than that for the heavy ions.

The conductivities calculated from Equation 1 from the curve measured at this altitude are 3.2×10^{-12} mhos/cm for positive ions and about 10^{-11} for negative ions with the heavy ions giving about 2.7×10^{-13} mhos/cm. The positive ion conductivity is plotted every 10 km in Figure 9 along with a comparison with measurements of conductivity determined with the Gerdien condenser by *Widdel et al.*, [1977] and the average blunt probe results of *Hale et al.* [1978]. Except for the 40 km point, the results of this flight are consistent with those of the other workers.

CONCLUSIONS AND RECOMMENDATIONS

The 14 December flight of the Viper Dart Gerdien condenser payload proved the validity of the basic approach. The larger Dart package with the Gerdien condenser achieved a satisfactory altitude (84 km) which leads to a predicted 68 km for a sea level launch. The starute and Gerdien package ejected and descended as desired and a solid telemetry record was achieved. The Gerdien package survived the rigors of launch, electronically performed as designed and data were accumulated on ion conductivities that compare favorably with results from other workers. One difficulty encountered in the flight was the inadequate neutralization of collected charge so that the actual voltage of the reference with respect to the plasma was not known.

The improvements in the Gerdien condenser system that are being incorporated into the modified design are (1) the addition of a charge neutralizer on the aft end of the condenser; (2) use of guard rings on the ends of the condenser to minimize stray electric fields; (3) and investigation of the incorporation of a 400 MHz transponder in the instrument package to provide tracking of the payload at remote sites where no radar facilities are available.

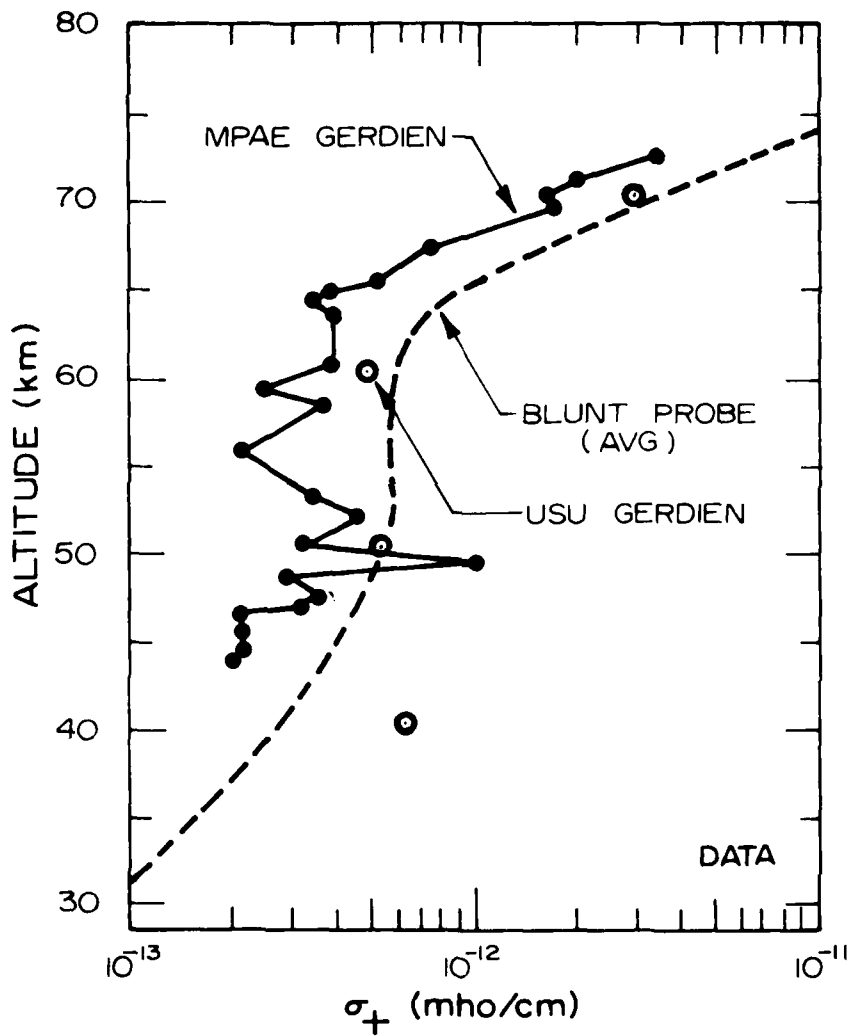


Figure 9. Positive ion conductivity from the Utah State University (USU) Gerdien condenser compared with Gerdien condenser measurements (MPAE) of *Widdel et al.* [1977] and average blunt probe results of *Hale et al.* [1978].

REFERENCES

- Burt, D.A., The development of a Gerdien condenser for sounding rockets, *Sci. Rept. No. 8, AFCHL 67-0343*, 47 pp., Contract AF19(628)-4995, Upper Air Research Laboratory, University of Utah, Salt Lake City, May 1967.
- Conley, T.D., Mesospheric positive ion concentrations mobilities and loss rates obtained from rocket-borne Gerdien condenser measurements, *Radio Science* 9(6):575-595, 1976.
- Gerdien, H., Demonstration eines apparatus zur absoluten messung der elektrischen leitfahig der luft, *Physikalische Zeitschrift*, 6:800, 1905.
- Hale, L.C., C.L. Croskey and J.D. Mitchell, Middle atmosphere ion measurements during January 1976, *Space Research* 18:143-146, 1978, edited by M.J. Rycroft.
- Mitchell, J.D. and L.C. Hale, Observations of the lowest ionosphere, in *Space Research XIII, proceedings of the fifteenth plenary meeting of COSPAR*, edited by M.J. Rycroft and S.K. Runcorn, p. 471, Akademie-Verlag, Berlin, 1973.
- Mitchell, J.D., R.S. Sagar and R.O. Olsen, Positive ions in the middle atmosphere during sunrise conditions, in *Space Research XVII, proceedings of the nineteenth plenary meeting of COSPAR*, edited by M.J. Rycroft, p. 199, Pergamon Press, New York, 1977.
- Pederson, A., Measurements of ion concentrations in the D-region of the ionosphere with a Gerdien condenser rocket probe, *Tellus XVII*, 1(1):--, 1965.
- Rose, G. and H. Widdel, Results of concentration and mobility measurements for positively and negatively charged particles taken between 85 and 22 km in sounding rocket experiments, *Radio Science* 7(1):81, 1972.
- Widdel, H.V., G. Rose and R. Borchers, Experimental results on the variation of electric conductivity and ion mobility in the mesosphere, *J. Geophys. Res.*, 81(34):6217-6220, 1976.
- Widdel, H.V., G. Rose, and R. Borchers, Payload BIII--an instrument package for the measurement of conductivity, concentration and mobility of positive and negative ions in the mesosphere, *J. Geophys. Res.*, 44:179-188, 1977.

DISTRIBUTION LIST

DEPARTMENT OF DEFENSE

Assistant to the Secretary of Defense
Atomic Energy
ATTN: Executive Assistant

Defense Advanced Rsch. Proj. Agency
ATTN: TIO

Defense Nuclear Agency
ATTN: DDST
2 cy ATTN: RAAE
4 cy ATTN: TITL

Defense Technical Information Center
12 cy ATTN: DD

Field Command
Defense Nuclear Agency
ATTN: FCPR

Field Command Defense Nuclear Agency
Livermore Division
ATTN: FCPRL

Interservice Nuclear Weapons School
ATTN: TTV

Undersecretary of Def. for Rsch. & Engrg.
Department of Defense
ATTN: Strategic & Space Systems (OS)

DEPARTMENT OF THE ARMY

Atmospheric Sciences Laboratory
U.S. Army Electronics R & D Command
ATTN: DELAS-EO-ME, K. Ballard
ATTN: DELAS-EO-MO, M. Heaps
ATTN: DELAS-EO, F. Niles

BMD Advanced Technology Center
Department of the Army
ATTN: ATC-T, M. Capps
ATTN: ATC-O, W. Davies

Harry Diamond Laboratories
Department of the Army
ATTN: DELHD-N-P
ATTN: DELHD-I-TL, M. Weiner
ATTN: DELHD-I-TL, Technical Library

U.S. Army Ballistic Research Labs.
ATTN: DRDAR-BLB, M. Kregel
ATTN: DRDAR-TSB-S, Technical Library
ATTN: DRDAR-BLP, J. Heimerl
ATTN: DRDAR-BLI, J. Vanderhoff

U.S. Army Foreign Science & Tech. Ctr.
ATTN: DRXST-SD-3

U.S. Army Missile R&D Command
ATTN: Bedstone Scientific Info. Ctr.

U.S. Army Nuclear & Chemical Agency
ATTN: Library

DEPARTMENT OF THE ARMY (Continued)

U.S. Army Research Office
ATTN: R. Mace

U.S. Army TRADOC Systems Analysis Activity
ATTN: ATAA-PL

White Sands Missile Range
Department of the Army
ATTN: STEWS-TE-AN, M. Squires

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
ATTN: ELEX 03
ATTN: PME 117-20
ATTN: Code 501A

Naval Intelligence Support Ctr.
ATTN: Document Control

Naval Ocean Systems Center
ATTN: Code 532, R. Pappert
ATTN: Code 5321, I. Rothmueller
ATTN: Code 5322, H. Hughes
ATTN: Code 5324, W. Moier
ATTN: Code 532, J. Richter
ATTN: Code 4471, Technical Library

Naval Postgraduate School
ATTN: Code 0142, Library

Naval Research Laboratory
ATTN: Code 6701, J. Brown
ATTN: Code 7122, D. McNutt
ATTN: Code 6750, D. Strobel
ATTN: Code 6709, W. Ali
ATTN: Code 7175, J. Johnson
ATTN: Code 6780, S. Ossakow
ATTN: Code 7101, P. Mange
ATTN: Code 6780, J. Fedder
ATTN: Code 1434, E. Brancato
ATTN: Code 7120, R. Kinzer
ATTN: Code 6750, K. Hain
ATTN: Code 2627, Technical Library
ATTN: Code 6700, T. Coffey
ATTN: Code 7550, J. Davis
ATTN: Code 7175H, D. Horan

Naval Surface Weapons Center
ATTN: L. Kudlin
ATTN: Code R41, D. Land
ATTN: Code F31
ATTN: Code F46, D. Hudson

Nuclear Weapons Tng. Group Pacific
Department of the Navy
ATTN: Nuclear Warfare Department

Office of Naval Research
ATTN: Code 421, B. Junker
ATTN: Code 465, G. Joiner

DEPARTMENT OF THE AIR FORCE

Air Force Geophysics Laboratory

ATTN: SULL
ATTN: LKB, E. Murad
ATTN: LKO, R. Huffman
ATTN: OPR-1, J. Ulwick
ATTN: LKB, W. Swider, Jr.
ATTN: LKB, J. Paulson
ATTN: LKB, K. Champion
ATTN: LKB, T. Keneshea
ATTN: LKO, R. Van Tassel
ATTN: LKD, C. Philbrick
ATTN: LKD, R. Narcisi
ATTN: PHG, F. Innes
ATTN: OPR, H. Gardiner
ATTN: OP, J. Garing
ATTN: OPR, A. Stair
ATTN: OPR, F. Delgreco
ATTN: OPR, J. Kennealy
ATTN: OPR, R. O'Neill
ATTN: OPR, T. Connolly

Air Force Technical Applications Center

ATTN: TF, L. Seiler
ATTN: STINFO Office/TF
ATTN: TD

Air Force Weapons Laboratory

ATTN: SUL
ATTN: DYV, E. Copus

Foreign Technology Division

ATTN: NIIS Library
ATTN: WE

Rome Air Development Center

ATTN: OCS, V. Coyne
ATTN: OCSA, J. Simons

USAFETAC

ATTN: CVTL, Stop 825

OTHER GOVERNMENT AGENCIES

Research Director
Bureau of Mines
Pittsburgh Mining & Safety Rsch. Ctr.
ATTN: J. Murphy

Department of Commerce
National Bureau of Standards

ATTN: W. Lineberger
ATTN: A. Phelps
ATTN: S. Leone

Department of Commerce
National Bureau of Standards

ATTN: Security Officer for D. Garvin
ATTN: Security Officer for S. Abramowitz
ATTN: Security Officer for J. Cooper
ATTN: Security Officer for M. Scheer
ATTN: Security Officer for M. Krauss
ATTN: Security Officer for L. Gevantman
ATTN: Security Officer for R. Hampson, Jr.
ATTN: Security Officer for J. Devoe
ATTN: Security Officer for D. Lide

OTHER GOVERNMENT AGENCIES (Continued)

Department of Commerce
National Oceanic & Atmospheric Admin.
National Weather Service
ATTN: L. Machta
ATTN: J. Angell

Department of Commerce
National Oceanic & Atmospheric Admin.
ATTN: Assistant Administrator, RD

Department of Commerce
National Oceanic & Atmospheric Admin.
Environmental Research Laboratories
ATTN: D. Albritton
ATTN: W. Spjeldvik
ATTN: E. Ferguson
ATTN: F. Fehsenfeld

Department of Transportation
Transportation Rsch. System Center
ATTN: F. Marmo

NASA

Goddard Space Flight Center
ATTN: A. Aikin
ATTN: J. Vette
ATTN: S. Bauer
ATTN: Technical Library
ATTN: Code 625, M. Sugiura
ATTN: Code 625, J. Heppner

NASA

George C. Marshall Space Flight Center
ATTN: W. Roberts

NASA

ATTN: D. Dement
ATTN: N. Roman
ATTN: R. Schiffer
ATTN: E. Schmerling

NASA

Johnson Space Center
ATTN: Code JM6, Technical Library

NASA Ames Research Center

ATTN: W. Starr
ATTN: G. Poppoff
ATTN: N-245-3, R. Whitten

National Science Foundation

ATTN: R. Sinclair
ATTN: Div. of Atmos. Sci., R. McNeal

DEPARTMENT OF ENERGY CONTRACTORS

EG&G, Inc.

Los Alamos Division
ATTN: Document Control for J. Colvin
ATTN: Document Control for P. Lucero
ATTN: Document Control for D. Wright

Lawrence Livermore Laboratory

ATTN: Document Control for L-71, J. Chang

DEPARTMENT OF ENERGY CONTRACTORS (Continued)

Los Alamos Scientific Laboratory
ATTN: Document Control for MS 644, J. Zinn
ATTN: Document Control for MS 560, W. Hughes
ATTN: Document Control for MS 668, H. Hoerlin
ATTN: Document Control for MS 668, J. Malik
ATTN: Document Control for MS 212, W. Barfield

Sandia Laboratories
ATTN: Document Control for Org. 4241, T. Wright
ATTN: Document Control for Org. 1250, W. Brown

DEPARTMENT OF DEFENSE CONTRACTORS

Aero-Chem Research Labs, Inc.
ATTN: A. Fontijn

Aerodyne Research, Inc.
ATTN: F. Bien
ATTN: M. Faist
ATTN: M. Camac
ATTN: Librarian, B. Duston

Aeronautical Rsch. Assoc. of Princeton, Inc.
ATTN: H. Pergament

Aerospace Corp.
ATTN: M. Whitson
ATTN: Library
ATTN: R. Cohen
ATTN: H. Mayer
ATTN: T. Taylor

University of Alaska
Geophysical Institute
ATTN: R. Parthasarathy
ATTN: N. Brown
ATTN: Technical Library

Avco Everett Research Lab., Inc.
ATTN: C. Von Rosenberg, Jr.

Berkeley Research Associates, Inc.
ATTN: J. Workman

Boston College
ATTN: Chairman, Dept. of Physics
ATTN: Dept. of Chemistry, D. McFadden
ATTN: Science Library, F. McElroy

University of California at San Diego
ATTN: D. Miller

University of California at Santa Barbara
ATTN: M. Steinberg

California Institute of Technology
ATTN: S. Trajmar
ATTN: V. Anicich

University of California
ATTN: H. Johnston

Calspan Corp.
ATTN: Library
ATTN: W. Wurster
ATTN: C. Treanor

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Chem Data Research
ATTN: K. Schofield

University of Colorado
ATTN: Dept. of Chemistry, V. Bierbaum

Columbia University
ATTN: Security Officer for H. Foley

University of Denver
Denver Research Institute
ATTN: Security Officer for D. Murcay
ATTN: Security Officer for B. Van Zyl

Epsilon Labs., Inc.
ATTN: C. Accardo

ESL, Inc.
ATTN: W. Bell

General Electric Co.
ATTN: M. Linevsky
ATTN: J. Burns
ATTN: P. Zavitsanos
ATTN: J. Peden
ATTN: R. Edsall
ATTN: Technical Information Center
5 cy ATTN: T. Baurer
6 cy ATTN: M. Bortner

General Electric Co.
ATTN: J. Schroeder

General Electric Company-TEMPO
ATTN: B. Gambill
ATTN: T. Stevens
ATTN: DASTAC
ATTN: D. Chandler
ATTN: D. Reitz
ATTN: M. Dudash
ATTN: W. Knapp
ATTN: M. Stanton
ATTN: J. Thompson

General Research Corp.
ATTN: J. Ise, Jr.

General Research Corp.
ATTN: T. Zakrzewski

Howard University
ATTN: W. Jackson

HSS, Inc.
ATTN: M. Shuler
ATTN: D. Hansen

Information Science, Inc.
ATTN: W. Dudziak

Institute for Defense Analyses
ATTN: E. Bauer
ATTN: H. Wolfhard

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Ion Physics Corp.
ATTN: C. Hauer

IRT Corp.
ATTN: R. Overmyer
ATTN: R. Neynaber
ATTN: D. Vroom
ATTN: J. Rutherford

Johns Hopkins University
ATTN: Document Librarian

Johns Hopkins University
ATTN: J. Kaufman

Kaman Sciences Corp.
ATTN: D. Foxwell
ATTN: W. Rich

KMS Fusion, Inc.
ATTN: Library

Lockheed Missiles & Space Co., Inc.
ATTN: R. Gunton
ATTN: J. Evans
ATTN: B. McCormac
ATTN: J. Reagan
ATTN: T. James
ATTN: M. Walt
ATTN: J. Kumer
ATTN: R. Sears

University of Lowell
Center for Atmospheric Research
ATTN: G. Best

M.I.T. Lincoln Lab.
ATTN: B. Watkins

University of Maryland
ATTN: Chemistry Dept., J. Vanderslice

University of Massachusetts
Astronomy Research Facility
ATTN: H. Sakai

University of Minnesota
ATTN: C. Winkler

University of Minnesota
ATTN: M. Birsch

Mission Research Corp.
ATTN: D. Archer
ATTN: M. Scheibe
ATTN: P. Eilb
ATTN: R. Hendrick
ATTN: W. White
ATTN: V. Van lint
ATTN: M. Messier
ATTN: D. Sappenfield

National Academy of Sciences
National Materials Advisory Board
ATTN: J. Sievers

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

State University of New York at Buffalo
Nuclear Science & Technology Facility
ATTN: G. Brink

Nichols Research Corp., Inc.
ATTN: N. Byrn

Pacific-Sierra Research Corp.
ATTN: E. Field, Jr.

Panametrics, Inc.
ATTN: B. Sellers

Pennsylvania State University
Industrial Security Office
ATTN: J. Nisbet
ATTN: L. Hale

Photometric, Inc.
ATTN: I. Kofsky

Physical Dynamics, Inc.
ATTN: A. Thompson

Physical Science Lab.
ATTN: W. Berning

Physical Sciences, Inc.
ATTN: G. Caledonia
ATTN: K. Wray
ATTN: R. Taylor

University of Pittsburgh
Cathedral of Learning
ATTN: W. Fite
ATTN: M. Biondi
ATTN: F. Kaufman

Quantum Systems, Inc.
ATTN: S. Ormonde

R & D Associates
ATTN: J. Rosengren
ATTN: H. Mitchell
ATTN: B. Yoon

Radiation Research Associates, Inc.
ATTN: H. Schaeffer

Rand Corp.
ATTN: C. Crain

Science Applications, Inc.
ATTN: D. Hamlin

Science Applications, Inc.
ATTN: N. Byrn
ATTN: D. Divis

Science Applications, Inc.
ATTN: R. Johnston

Professor Chalmers F. Sechrist
University of Illinois
ATTN: S. Bowhill
ATTN: C. Sechrist

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

SRI International
ATTN: C. Hulbert

SRI International
ATTN: J. Peterson
ATTN: A. Peterson
ATTN: G. Black
ATTN: A. Whitson
ATTN: J. Moseley
ATTN: F. Kindermann
ATTN: M. Baron
ATTN: D. Hildenbrand
ATTN: R. Hake, Jr.
ATTN: R. Leadabrand
ATTN: V. Wickwar
ATTN: T. Slanger

Technology International Corp.
ATTN: W. Boquist

University of Texas System
ATTN: J. Browne

TRW Defense & Space Sys. Group
ATTN: J. Frichtenicht
ATTN: Technical Information Center

William Marsh Rice University
Department of Space Physics & Astronomy
ATTN: R. Stebbings

William Marsh Rice University
ATTN: Industrial Sec. Super.
for J. Chamberlain

DEPARTMENT OF DEFENSE CONTRACTORS (Continued)

Utah State University
ATTN: K. Baker
ATTN: D. Burt
ATTN: E. Pound
ATTN: G. Ailred

University of Virginia
School of Engineering & Appl. Sciences
ATTN: R. Ritter
ATTN: H. Kelly
ATTN: R. McKnight

Visidyne, Inc.
ATTN: Y. Degges
ATTN: H. Smith
ATTN: O. Manley
ATTN: C. Humphrey
ATTN: J. Carpenter

Wayne State University
ATTN: R. Kummier
ATTN: P. Roi

Westinghouse Electric Corp.
Research and Development Center
ATTN: P. Chantry

University of Washington
ATTN: Physics, FM15, K. Clark

R & D Associates
ATTN: B. Gabbard
ATTN: C. MacDonald
ATTN: R. Turco
ATTN: R. Lelevier
ATTN: F. Gilmore
ATTN: H. Ory

DA
FILM
5-