

AD-A083 359

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OH  
HARDWARE ELEMENTS OF THE UNIFIED SYSTEM OF DIGITAL COMPUTERS PE--ETC(U)  
JUL 79 J PELC, J SOBANIEC, F SWIDERSKI

F/G 9/2


UNCLASSIFIED

FTD-ID(RS)T-0547-79

NL

1 OF 1  
40  
AD-A08359

END  
DATE  
FILED  
DTIC

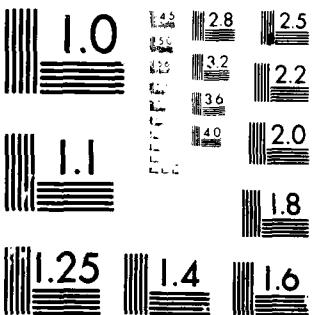


MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963

PHOTOGRAPH THIS SHEET

ADA0833359

DTIC ACCESSION NUMBER



LEVEL



INVENTORY

ETD-ID(CRS)T-0547-79  
DOCUMENT IDENTIFICATION

DISTRIBUTION STATEMENT A

Approved for public release;  
Distribution Unlimited

DISTRIBUTION STATEMENT

ACCESSION FOR

NTIS GRA&I

DTIC TAB

UNANNOUNCED

JUSTIFICATION

BY

DISTRIBUTION /  
AVAILABILITY CODES

DIST

AVAIL AND/OR SPECIAL

A

DISTRIBUTION STAMP

DTIC  
ELECTED  
S APR 24 1980 D  
D

DATE ACCESSIONED

79 11 13 217

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

FTD-ID(RS)T-0547-79

FOREIGN TECHNOLOGY DIVISION

ADA 083359



HARDWARE ELEMENTS OF THE UNIFIED SYSTEM OF  
DIGITAL COMPUTERS PERIPHERAL DEVICES OF THE  
UNIFIED SYSTEM

by

J. Pelc, J. Sobaniec, F. Swiderski



Approved for public release;  
distribution unlimited.

FTD -ID(RS)T-0547-79

## EDITED TRANSLATION

FTD-ID(RS)T-0547-79

11 July 1979

MICROFICHE NR: *AD-79-C-000917*

HARDWARE ELEMENTS OF THE UNIFIED SYSTEM OF  
DIGITAL COMPUTERS PERIPHERAL DEVICES OF THE  
UNIFIED SYSTEM

By: J. Pelc, J. Sobaniec, F. Swiderski

English pages: 35

Source: Informatyka, Vol. 9, Nr. 9, September  
1973, pp. 15-28.

Country of origin: Poland  
Translated by: SCITRAN

F33657-78-D-0619

Requester: FTD/TQTA

Approved for public release; distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION  
FOREIGN TECHNOLOGY DIVISION  
WP-AFB, OHIO.

FTD

-ID(RS)T-0547-79

Date 11 Jul 1979

**Hardware Elements of the Unified System of Digital Computers**

**Peripheral Devices of the Unified System**

by

J. Pielc, J. Sobaniec, F. Swiderski

**Abstract:** The technical data on the peripheral devices exhibited on the Unified System of Digital Computers (USDC) Exhibition in Moscow during May-June 1973 are presented. Described are the magnetic tape, drum and disc storage systems and the I/O devices.

In the program of the Unified System of Digital Computers the great attention was given to the production of wide assortment of peripheral devices, and in particular: drum, disc and magnetic tape storages, punched cards and paper tape I/O devices, X-Y plotters, printers and the direct interface of operator with the machine. On the USDC Exhibition in Moscow, held in May-June 1973, this type of equipment was shown, developed and produced by the cooperating countries.

**External Storage**

**Magnetic Tape**

The magnetic tape storage is a group of peripherals with large storage capacity. Its characteristics is a relatively large average access time due to the sequential access principle. The magnetic tape storage interfaces with the machine through an appropriate controller unit connected to the selector channel.

The majority of the countries cooperating in the USDC, manufactures similar tape units. Poland manufactures the EC-5019 (PT-3) tape storage in Warsaw

EDP Works MERAMAT.

The selected technical data on the USDC magnetic tape storage are given in Table 1. Subclassification of these units is made according to the following parameters:

- maximum rate of information flow
- writing density
- tape speed.

The analysis of the basic technical data indicates that the following devices have the best parameters: EF- 5014, EC- 5019 and EC-5022. All the devices have basically the writing density of 8 and 32B/mm ( 200 and 600 bpi) except for the EC - 5014 which has the writing density of 63 b/mm (1600 bpi).

The slowest is the EC - 5016 tape storage. The parameters of the remaining tape storage systems of USDC do not differ significantly. All the devices use the medium with the identical parameters.

#### Drum Storage

The drum memory is the group of peripherals based on rotating magnetic medium. One has to add, that this type of auxiliary storage, despite its high data transfer rate and short access time due to the random addressing, is becoming obsolete with the exception of specialized machines.

The drum memories within the USDC are manufactured in USSR and Poland. The subclassification of these memories is done according to the following criteria:

- storage capacity
- average access time
- maximum data transfer rate.

Table 3 compares the drum memories of the USSR make (EC-5033) and Polish (EC-5035) from the point of view of parameters in Table 2.

#### Disc Memory

The magnetic disc memory combine the advantages of magnetic tape (large capacity, portability of media) and the drum memories (direct addressing, rapid access). They can be interfaced to the machine through the special controller units, which are rather complex, and the cost of which most often exceeds the cost of single disc drive.

Among the disc units one can single out two basic groups: units with removable media and fixed medium discs. Each of the groups can then be classified according to their capacities.

The disc memories shown on the USOC Exhibition have small capacities. The Bulgarian booth was showing the removable disc packets designated EC-5053 corresponding to the IBM model 321 and Memorex model 630.

The selected technical data for the discs with the removable media are shown in Table 4, and for the fixed media in Table 5. The data for EC-5053 disc pack are given below:

capacity of the pack - 7.25 Mbytes

maximum speed- 2500 rpm

maximum number of tracks on one surface - 203

number of surfaces- 10

operating temperature - 5 to 10° C

humidity - 10 - 80%

weight - 4400 g

height - 105 mm

width - 378 mm

The EC - 5053 disc pack can be used with the EC -5052 discs.

### Punched Card Based I/O devices

#### Punched Readers

The exhibited USSR manufactured readers, EC-6012, and EC - 6013, are designed to read the information from the 45 and 80 column punched cards.

The reading takes place on column-by column base in two modes:

- reading of data in standard 12 row code KPK-12 and converting it into DKOI code on output,
- reading any code without conversion.

The reading mode is set by a program. The device checks the read information for the illegal combination of holes, checks the readiness of reading and synchronization channels before feeding the card, checks for mis-feed or double feed of card, and controls the synchronization system at the end of the card reading cycle. The units contain the operator's console with the control buttons and signalization lights. The control buttons allow for the following commands: START, STOP, EOF, FEED. The signalization lights indicate the errors as found by the control systems.

The basic difference between the Ec-6012 and the EC-6013 readers is in the twice as high reading speed of the latter. Both devices can be connected to the multiplex or selector channel of any USOC machine, only the EC-6016 machine requires a special adapter.

The Czechoslovakian booth exhibited the EC-6016 reader (ARITMA 1114) similar to the Soviet EC-6013 reader.

All these devices operate in the start-stop mode, with the photoelectric reader. They are built using the integrated circuits and discrete components. The basic technical data for the card readers are given in Table 6.

#### Card Punch

The card punches are used to output the information from the computer

in the form of electrical impulses into 80 column punched paper cards. The EC-7010 and EC-7012 devices manufactured in the USSR can be connected to any USDC through the multiplex channel. The information from the channel is stored in a buffer equal to one card size and then punched out on the card. The punching takes place in all 12 positions, with the 0.7 fill coefficient. The information can be punched out with conversion on to standard KPK-12 code, or any other code without conversion. The mode of operation is set by the program.

The EC-7010 punch checks out the punched information by the readout and comparison with the buffer content, and the EC-7012 punch by comparison of the buffer content and the echo signal from the punching mechanism. The EC-7012 punch is five times as fast as EC-7010.

Czechoslovakia manufactures two types of card punch designated as EC-7013 and EC-7014. EC-7013 is similar in its performance to the EC-7012. The check of the punched out information takes place by a comparison of the photoelectric reader output and the buffer memory. The card is then diverted to one of two bins. The bins can be filled or emptied without interrupting the punch operation.

The EC-7014 card punch is about half as fast as EC-7012, but here the punching speed depends on the number of columns to be punched, and increases for the smaller number of columns. The checking and rejection of mispunched card is similar as in EC-7013.

The basic parameters and characteristics of these devices are given in Table 7.

#### Punched Paper Tape and Edge-punched card I/O Devices

Another group of I/O devices shown at the Exhibition are the devices which use the paper tape as an information medium. This group includes: the

controller of punched paper tape reader designated as EC-6022 and manufactured by Poland, USSR and Hungary, paper tape punch controllers EC-7024 manufactured by Poland and Ec-7022 manufactured by the USSR. Another variant is a paper tape reader punch combination controller. These devices are made in Czechoslovakia and East Germany under the designation EC-7902.

The devices described above have built-in channel interfaces and can operate both in the multiplex and selector mode. The basic parameter such as reading or punching speed is limited by the mechanism itself and not by the electronics.

The paper tape units EC-7902, made by East Germany, can be easily connected to another reader without the interface expansion. The described unit used EC-6122 reader and EC-7122 punch, both made in Poland.

The technical data of the paper tape devices are given in Tables 8, 9, 10.

#### Punched Paper Tape Input Devices ( mechanisms)

The paper tape readers are manufactured in Hungary, Poland and Czechoslovakia in two basic groups differing mainly in reading speed. The slow readers EC-6121 have the start-stop mode speed from 150 to 300 char/s, and the fast devices, Ec-6122, read with the speeds of 1000-2000 char/s. These devices are designed to work with the USDC through the appropriate controllers. In addition, they can be used as one of the I/O channel devices of the control device for the numerical control machines. All the devices work in the start-stop mode with the photoelectric readout of 5 and 8 track tape. The basic reliability data are as follows:

- average time between failures: 400-500 hours
- error rate:  $1 - 5 \times 10^{-7}$
- availability factor: 0.975

The basic technical data for paper tape readers are given in Table 11.

#### Paper Tape and Edge-punched Card Input Devices (mechanisms)

The EC-6191 devices, are manufactured by Hungary and Czechoslovakia read information from 5 and 6 track paper tape and edge punched cards. These devices are rather slow, with the bidirectional reading capability. They are driven by a stepper motor. The readout is photoelectric.

These devices can be used for:

- device for slow data transmission,
- data preparation device,
- numerical control machine readout device,
- process control devices, etc.

The EC-6111 device differs from the EC-6191 only that it reads 80 column cards. The basic parameters are given in Table 12.

#### Devices to output the information on paper tape and edge punched cards (mechanisms)

The EC-7191 devices made in Hungary and EC-7192 made in Czechoslovakia, are used to write the information on the edge punched cards and on the paper tape with 5 and 6 tracks in 5, 6, 7 and 8 bit code. The devices have the bidirectional feed capability.

The FC-7191 device has the option of echo-control allowing for the comparison of output and punched information. The Ec-7192 device has this option already built-in. The devices can be used for slow data transmission and for the date preparation, or they can be used as I/O devices for small computers and automated production control. The basic parameters are given in Table 13.

### Paper Tape Punch

The EC-7122 paper tape punch made in Poland converts the electrical impulses into the appropriate combination of holes on the paper tape. The punching speed is 110 char/s. The information can be punched on 5 or 8 tracks. The punch can be used as an output device for the computer, or in data transmission channels. The electronics is based on the integrated circuits. The basic technical parameters of EC-7122 punch are given below:

- punching speed - 110 char/sec
- width of 5 track tape -  $17.46 \pm 0.05$  mm
- width of 8 track tape -  $25.4 \pm 0.05$  mm
- tape thickness -  $0.1 \pm 0.008$  mm
- maximum reel diameter - 203 mm
- punching time for 1 reel - about 20 min.
- power supply - 220V, 50 Hz
- power consumption - 200 VA
- dimensions - 380 X 280 X 170 mm
- weight - 21 kg

The device similar to the above, designated as EC-7121, punching 5 and 8 track tape with the speed of 150 char/sec is made in the USSR.

### X-Y Plotters

The X-Y plotters are the devices for the automatic drawing of lines and symbols on the paper sheets or reels using the data obtained from the computer paper tape readers, or magnetic storage systems.

USSR exhibited two drum type devices: EC-7052 and EC-7053. Each device contained: control system data preparation system and the X-Y writing unit. The control in the Y direction takes place by the drum rotation, and in the X direction by the pen motion. It is possible to move in both

directions simultaneously. The smallest pen step is 0.1 and 0.5 mm, and all the symbols can be drawn in three scales: 1:2, 1:1, and 2:1. The devices have the capability of 3 color writing, under the program control. The EC-7052 plotter has a smaller number of symbols and smaller work area as compared with the EC-7053.

The USSR made EC-7051 and Czechoslovakian EC-7054 plotters differ in the design from the above ones, the plotting is done on the flat table. All four devices use the stepping motors for the drive. The differences are mainly in the plotting speed, size of the work area, number of symbols and the type of drawn lines, orientation of symbols and coding of the input information.

The comparative technical data on the X-Y plotters are given in Table 14.

#### Line Printers

A large group of peripheral devices on the USDC Exhibition consisted of printers, which present the information in the form of a printout. These devices in addition to the printing mechanism are equipped with the control system and the interface allowing for the connection to the USDC channel. The majority of the exhibited printers belonging to the USDC family are the rotating drum type. The data to be printed are stored in the buffer. The control system compares the stored data with the approaching character. In the case of match the hammer is electromagnetically activated, and the character is printed. After the line is printed out, the paper is advanced, using the edge perforation. The paper motion is controlled by the program or using the punched paper tape. The printers can be interfaced to the computer selector or multiplex channel.

To ease the maintenance and repair, the printers are equipped with the testers allowing for the operation test (autonomous mode).

Doubling of the numerals printing speed, in EC-7031 and EC-7035 as compared with other USDC printers, was achieved by doubling the number of these characters on the drum. Printing of the information from the buffer is initiated by the PRINT command. In addition, the EC-7030 and EC-7032 start the printout as soon as the buffer is full.

The basic technical data and characteristics of printers are given in Table 15.

Devices for the direct communication with the machine

#### Keyboard

The keyboard is designed for the manual entry of data using an appropriately coded signal, and this is the reason why their main application is in the data preparation systems on the magnetic tape, punched cards and paper tape, and as an integral form of display monitors.

The EC-0101 keyboard, made in Hungary and Czechoslovakia, has the advantage of being electronic, contactless and of high reliability. It can also be used in the industrial applications where the high reliability, lack of contact vibration is required, and where the humidity may be high. The contactless keyboard, made in Czechoslovakia allows for the 128 code combinations with the parity bit. Pressing of the same key, depending on the shift key position or the CONTROL key position, produces three different code combinations. The electronic key roll protection is also provided.

The keys are placed in four rows and their designations on the keyboard follows the USDC standard. The output signal levels are the TTL compatible.

The basic technical data for the keyboards are given in Table 16.

### Electric Typewriters with the Controllers and the Channel Interface

The electric typewriter with the controller and the channel interface plays the role of the operator's console and provide the direct communication with the machine. The complete device performs the following functions:

- provides the documentation on the executed program
- enters the data necessary for the CPU control,
- outputs the information for the operator,
- displays the information on the machine status.

The typewriter is controlled by the system interfaced directly to I/O channel of USDC. The device can be connected to the selector or multiplex channel. The entire device consists of:

- electric typewriter,
- connecting system
- channel interface
- operator's desk
- power supply
- control system allowing for the control of transferred information, and in the local mode, the control of the entire device.

The following control devices were exhibited:

EC - 7070 (USSR) with the EC- 7172 typewriter

EC - 7071 (Czechoslovakian) with the EC-7172 typewriter

EC- 7073 (E. Germany) with the EC-7173 typewriter

EC-7074 (Bulgaria) with the EC-7174 typewriter

The technical data are given in Table 17.

### Typewriters

The typewriters are classified as the group of peripherals allowing the direct interface with the computer, or as the I/O device in the data preparation or accounting systems.

It performs the following functions:

- enters the information to the computer from the keyboard,
- prints out the information from the computer,
- prepares data for the computer.

The energy is provided by the electric motor, which using the driving reel activates the appropriate lever, causing the printout. Special connectors are used to connect it with the control unit. The machine contain key roll protection.

The basic technical data are given in Table 18.

#### Alphanumeric and Graphic Displays

Alphanumeric and graphic displays serve as a means of a direct interface of man with machine. They are intended to output the information from the computer in alphanumeric or graphic form, and also to enter the information to the computer from the keyboard or light pen.

On input, the text is displayed on the screen, and after verification and correction is transferred to the computer. Also, on the output, the text can be corrected and reentered back.

The basic technical data on the displays are given in Table 19.

Hungary manufactures EC-7061 and EC-7063 alphanumeric displays with the similar parameters. The devices consist of two basic modules, that is, screen monitor with the keyboard, and the operator's desk with the controller. The displays can be interfaced to the standard I/O channels of medium and large computers.

USSR manufactures the alphanumeric display EC-7066 with the parameters

similar to the Hungarian device. The display serves as a portable operator's console and it can be interfaced to the computer through the EC-7566 control unit. Communication between EC-7066 and EC-7566 takes place in the internal code of the EC-7066 device. Entire system of EC-7066 monitors connected to the EC-7566 controller, has the designation of Ec-7906. The block diagram is shown in Fig. 4. The maximum number of displays connected to one of the control block branches is 16. The displayed information can have four formats as given below

Number	Format Code	No. of Lines	No. of Characters
1	00	12	80
2	01	6	80
3	10	12	40
4	11	6	40

Depending on a format, the controller can drive four EC-7066 displays with 00 format eight with 01 or 10, or sixteen with 11 format. The format is set manually on a display unit. The maximum size of the displayed data is determined by the capacity of the control system and doesn't exceed 3840 characters.

The displayed data can be printed out using the printer controller and the KONSUL-260 typewriter.

The technical parameter of the EC-7906 system are given below:

- channel connection: standard I/O interface,
- maximum number of simultaneously operating terminals: 4
- total display capacity: 3840 characters,
- maximum length of the interconnecting cable - 500 m
- power supply 380/220V<sup>+10%</sup> -15%; 50 Hz ± Hz
- power consumption 1.5 KVA
- dimensions 500 x 1200 x 1190

USSR manufactures the graphic display designated as EC-7064. The full

system consists of the following elements:

- control
- operational memory
- channel interface
- vector generator
- screen display
- keyboard
- power supply
- desk

The EC-7064 display can be connected to the computer through selector or multiplex channel.

An interesting device exhibited by Hungary was the EC - 7065 (GD-71) graphic display. The unit is controlled by a minicomputer and can be connected to a large computer or work as stand -alone, by adding to the minicomputer a magnetic tape or disc storage.

Both configuration require proper control program. A special language and a translator was developed for the EC - 7065, which can be run on any USDC.

The device is especially useful for the following tasks: logic design, printed circuit design, intergrated circuit design or to program numerical control machines.



15

Fig 1. Polish booth: EC-5019 (PT-3) tape units.



Fig 2. Polish booth: paper tape readers.



Fig 3. X-Y plotters



Fig 5 USSR booth EC-7064 graphic display.

Table 1. Technical data for USDC magnetic tapes.

1- country, 2- USSR, 3- Bulgaria, 4- E. Germany, 5- Poland, 6- Czechoslovakia, 7- tape units - USDC designation, 8- controller-USDC designation, 9- recording method, 10- access time (seconds), 11-tape speed (m/s), 12- reel rewind time (minutes), 13-no. of tracks, 14-data transfer rate (Kbytes/s), 15-recording density (b/mm) 16- interrecord gap (mm), 17-outside reel diameter (mm), 18-outside container diameter (mm), 19- tape dimensions, 20- max length (mm), 21 - width (mm), 22- EDT sensor, 23- yes, 24- bidirectional reading capability, 25- power supply (V), 26- line frequency, 27- power consumption (KA), 28- weight (kg), 29- dimension (mm).

Tablica 1. Wymiary techniczne pasek taśmowych JS EMC

① Kraj produkujący	② ZSRR LKB	③ ZSRR	④ NRD	⑤ ZSRK	⑥ PRL	⑦ CSEA
Pasek taśmowe — oznaczenia w JS EMC <sup>⑦</sup>	EU-5012	EU-5014	EU-5016	EU-5017	EU-5019	EU-5022
Jedzadki sterujące — oznaczenia w JS EMC <sup>⑧</sup>	EU-5512	EU-5516	EU-5516	EU-5517	EU-5519	EU-5516 EU-5517
Spód zapisu <sup>⑨</sup>	NRZ-1	.	NRZ-1	NRZ-1	NRZ	NRZ-1
Czas dostępu [sekundy] <sup>⑩</sup>	75 (śred.)	75 (śred.)	250	75 (śred.)	100-250	.
Szybkość przenosu taśmy [m/s] <sup>⑪</sup>	2	2,0	1,524	2	3	4
Czas przesunięcia standard. krótka [minuty] <sup>⑫</sup>	2,5	2,5	4,2	2,5	2,1	.
Liczba ścieżek <sup>⑬</sup>	9	9	9	9	9	9
Max szybkość przenoszenia informacji [Kbytes/s] <sup>⑭</sup>	64	128	48	64	120	128
Gęstość zapisu [bit/mm] <sup>⑮</sup>	8 1 32	64	32	8 1 32	8 1 32	8 1 32
Odstęp między strefami [mm] <sup>⑯</sup>	12,6-15,7	12,7-15,2	15,2	12,7-15,2	15,2	12,7-15
Zewnętrzna średnica osługi [mm] <sup>⑰</sup>	267	267	267	267	.	268,7
Zewnętrzna średnica pojemnika [mm] <sup>⑱</sup>	296	296	.	296	.	.
Wymiary taśmy:						
Max. długość [mm] <sup>⑲</sup>	750	750	750	750	750	750
Szerokość [m] <sup>⑳</sup>	12,7	12,7	12,7	12,7	12,7	12,7
Czajnik kodów taśmy <sup>㉑</sup>	jest	jest	jest	jest	jest	jest
Mozliwość czytania w obu kierunkach <sup>㉒</sup>	jest	jest	jest	jest	jest	jest
Napięcie zasil. [V] <sup>㉓</sup>	220/300	230/300 <sup>+10</sup> -15				
Częstotliwość sieci [Hz] <sup>㉔</sup>	50	50±1	50±1	50±1	50±1	50±1
Pobór mocy [KA] <sup>㉕</sup>	1,5	2,0	2,0	2,0	1,6	2,0
Ciężar [kg] <sup>㉖</sup>	450	.	400	.	.	550
Wymiary [mm] <sup>㉗</sup>	1900×900×700	750×750×1600	99×970×1748	1600×750×700	1700×700×700	900×600×600

Table 2 Classification of USDC drum memories.

1- USDC designation, 2- avg. access time, 3- capacity (MB), 4 - max. transfer rate, 5- above. 6-less

TABELA 2. Klasifikacja pamięci dyskowych 38 EMC

Oznaczenie w JS XEYC	Srednia czas dostepu (ms)				Pojemność pamięci (MB)				Max szybkość przenoszenia informacji (kB/s)			
	0	2	5	10	50	100	500	1000	50	100	500	1000
EC-5033	x				x							x
EC-5035	x				x				x			

Table 3. Technical data of USDC drum memories.

Country	USSR	Poland
USDC designation	EC-5033	EC-5035
DrumControl Unit USDC designation	EC-5533	EC-5551
Max. no. of drums to the controller	up to 8	up to 8
Recording mode	frequency	NRZ
No. of tracks	800	460
No. of aux. tracks	2	40 + 3 + 9
No. of bits per track	--	34,000
Capacity (Mbytes)	6	2
Avg. access time (ms)	-	20
Max. data rate kB/sec	1200	100
Avg. drum rotation time (ms)	22	41
Recording density (b/mm)	36	33
Recording frequency (MHz)	1.25	0.4
Drum rpm	1500	1500
Power Supply (V)	220/380 ±10	220/380 ±10
Line frequency (Hz)	50 ± 1	50 ± 1
Power consumption(VA)	1700	1500

<u>Country</u>	<u>USSR</u>	<u>Poland</u>
Weight (kg)	500	400
Length (mm)	1200	1200
Height	750	700
Width	1600	1600
working temperature (°C)	5-40	5-35
Humidity (%)	-	30-60
Error rate	$9 \times 10^{-10}$	$10^{-10}$

Table 4. Technical data of USDC disc units with removable media.

1- country, 2- USSR, 3- Bulgaria, 4- E. Germany, 5-USDC disc designation,  
 6- USDC controller designation, 7- max. no. of discs per controller,  
 8- recording method, 9- no. of discs in packet, 10- no. of surfaces  
 in packet, 11- no. of tracks on surface, 12- no. of bytes per track,  
 13- no. of bytes per cylinder, 14- capacity (MB), 15- avg. cylinder  
 access time, 16 - avg. access time (ms), 17 - max. data transfer rate  
 (Kb/sec), 18- recording density on 000 track (b/mm), 19 - recording  
 density on 202 track (b/mm), 20- power supply (V), 21- line frequency  
 (Hz), 22- Power consumption, 23 - weight, 24- length (mm), 25- height  
 (mm), 26- width (mm), 27- operating temperature (°C), 28- humidity (%),  
 29- error rate, 30- time for pack change, 31- disc rotation (rpm). 32-Czechoslovakia  
 33- serial with DF

Kraj produkujący ①	② ZSRR	③ LRB	④ ZSRB	⑤ NRD	⑥ CSR5	⑦ ZSRB LRB
Pamięć dyskowa ⑤ — oznaczenie w JS EMC	EC-5060	EC-5062	EC-5066	EC-5065	EC-5066	EC-5061
Jednostki sterujące współpracujące z dyskami — oznaczenie w JS EMC ⑥	EC-5551	EC-5558 EC-5552 EC-5554	EC-5551	EC-5556	EC-5558 EC-5554 EC-5552	.
Maks. ilość dysków mogących współpracować z jednostką sterującą (instukti) ⑦	do 8	do 8	do 8	do 8	do 8	.
Dopuszczalny czas zapisu ⑧	przeg. z DP	przeg. z DP	przeg. z DP	przeg. z DP	przeg. z DP	przeg. z DP
Ilość dysków w pakiecie (instukti) ⑨	33 6	33 6	33 6	23 6	33 6	33 11
Ilość powierzchni pracujących w pakiecie ⑩	10	10	10	10	10	20
Ilość głowisk na każdej powierzchni dysku ⑪	200+3 zap	200+3 zap	200+3 zap	200+3 zap	200+3 zap	200+3 zap
Dane informacji na głowisku [bajty] ⑫	.	.	3625	3625	.	.
Dane informacji w cylinderze [bajty] ⑬	.	.	36200	36200	.	.
Pojemność pamięci [Mibajty] ⑭	7,25	7,25	7,25	7,25	7,25	200
Sredni czas dostępu do cylindra [ms] ⑮	75	80	75	80	90	50
Sredni czas dostępu do informacji [ms] ⑯	90	75	87	.	100	.
Maks. ilość przekazywanych informacji [Kbajty/s] ⑰	150	150	150	150	150	2500
Częstotliwość zapisu na głowisku Nr 000 [bit/mm] ⑯	.	30	30	.	.	00
Częstotliwość zapisu na głowisku Nr 202 [bit/mm] ⑯	.	44	44	.	.	00
Napięcie sieci [V] ⑳	220/230 +10/-15	220/230 +10/-15	220/230 +10/-15	220/230 +10/-15	220/230 +10/-15	220/230 +10/-15
Czynnik bezpieczeństwa sieci Rz ㉑	50±1	50±1	50±1	50±1	50±1	50±1
Pobór prądu lub mocy ㉒	<1 kA	.	1,5 kA	1,65 kA	1 kA	1,5 A
Ochrona [kA] ㉓	.	167	300	270	200	100
Długość [mm] ㉔	800	772	900	1050	800	810
Wysokość [mm] ㉕	890	875	1050	1105	1000	975
Szerokość [mm] ㉖	658	610	780	610	600	775
Temperatura pracy [°C] ㉗	.	15-35	.	15-35	15-35	15-32
Wilgotność powietrza [%] ㉘	.	40-80	.	40-80	40-80	40-80
Stopa błędu ㉙	.	.	10 <sup>-10</sup>	10 <sup>-10</sup>	1	.
Czas wymiany pakietu [min] ㉚	1	1,5	1	1,5	1	.
Przyśpieszenie obrótów dysku [ob/min] ㉛	2100	2400±2%	2400	2400±2%	2400±2%	2400±2%

\* Przytoczone w kolumnie dane techniczne odnoszą się do pamięci dyskowej produkcji LRB

Table 5. Characteristics of fixed discs in USDC

Country	USSR	Hungary
Disc unit - USDC designation	EC-5051	EC-5060
Disc controller USDC designation	EC-5551	--
Max. n. of discs per controller	up to 8	--
Recording method	--	serial OF
Avg. access time (ms)	250	10
Nominal data transfer rate		
for 8 heads (Mb/sec)	--	225
Nominal data transfer rate for		
16 heads (Mb/s)	--	169
Max. data rate	63.3	150.0
Track data capacity (bits)	--	27,000
Track data capacity at half disc cap.	--	36,000
Total capacity	100 Mb	7 Mb
Operating temperature		0 - 50
Power supply	380/220V + 10% - 15%	110, 120, 220, 240V
Line frequency (Hz)	50 ± 1	50/60 ± 1
Power consumption	1.5 Kw	2 A at 220V
Error rate	$7 \times 10^{-10}$	$10^{-10}$
Velocity (rpm)	900	6,000
Dimensions (mm)	--	1200 × 950 × 1630

Table 6. Characteristics of USOC card readers.

1- country, 2-USSR, 3- Czechoslovakia, 4- USOC designation, 5- manufacturers code, 6-parameter, 7-channel connection, 8-standard I/O interface, 9-adapter, 10-card feed, 11-synchronous, 12-mechanical, 13-readout, 14-photoelectric, columns, 15-reading rate (cards/m), 16-hopper capacity, 17-feeding, 18-receiving, 19-card type, 20-columns, 21-binary readout only, 22-card code, 23-output code, 24-components, 25-IC's, 26-discrete elements, 27-power supply, 28-power consumption, 29-dimensions (mm).

TABELA 6. Charakterystyka techniczna czytników kart papierowych JS EMO

Parametry i cechy 6	Kraj produkcyjny ①		
	ZSRR ②	ČSR ③	OSRS
	Oznaczenie w JS EMO ④		
	EC-6012	EC-6013	EC-6016
Oznaczenie wytwórczy ⑤			ARITMA 1114
Sposób podłączenia do kanału ⑦	standardowy interfejs we - wy ⑩	standardowy interfejs we - wy ⑪	przejednawczo dopasowujący ⑫
Sposób podania kart ⑩	synchroniczny za pomocą rąk ⑬	synchroniczny za pomocą rąk ⑭	mechaniczny ⑮
Sposób czytania ⑯	fotoelektryczny, kolumnami ⑯	fotoelektryczny, kolumnami ⑯	fotoelektryczny, kolumnami ⑯
Prędkość czytania [kart/min.] ⑯	500	1 000	1 000
Pojemność zasobników	podającego ⑯ odbiierającego ⑯	1 000 kart 1 000 kart	2 000 kart 2 000 kart
Typ kart ⑯	45 i 80 kolumnowe ⑯	45 i 80 kolumnowe ⑯	80 i 90 kolumnowe (odczyt tylko binarny) ⑯ ⑯
Kod przedstawienia informacji na kartach ⑯	KPK - 12	KPK - 13	KPK - 13
Kod informacji na wyjściu urządzenia ⑯	DKOI	DKOI	DKOI
Baza elementowa ⑯	uklady scalone i elementy pół- przewodnikowe ⑯, ⑯	uklady scalone i elementy pół- przewodnikowe ⑯, ⑯	uklady scalone ⑯
Zasilanie ⑯	380/220V +10% 50±1Hz -15%	380/220V +10% 50±1Hz -15%	380/220V +10% 50±1Hz -15%
Pobór mocy [kVA] ⑯	1	1,5	0,75
Wymiary [mm] ⑯	1200 × 500 × 1220	1200 × 750 × 1100	815 × 561 × 1248

Table 7. Characteristics of USDC card punches

1- country, 2-USSR, 3- Czechoslovakia, 4- USOC designation, 5- manufacturer's code, 6- parameters, 7- channel connection, 8- standard I/O interface, 9- punching speed, 10- for 80 columns, 11- number and capacity of feed card hopper, 12- no. and capacity of receiving card hoppers, 13- punched card code, 14- input code, 15- checking, 16- read and comparison, 17- punch echo comparison, 18- card type, 19- 80 columns, 12 lines, 20- card fill coefficient, 21- power supply, 22- power consumption, 23- dimensions.

TABELA 2. Charakterystyka techniczna dławikarki kart papierowych JS EMC

Parametry i cechy 6	Kraj produkujący ①			
	ZSRR ②		③	
	Oznaczenie w JS EMC ④			
	EC-7010	EC-7012	EC-7013	EC-7014
Oznaczenie wytwórcy ⑤				
7				ARITMA 1212
standardowy interfejs wejścia — wyjścia	standardowy interfejs wejścia — wyjścia			
100	250	250*)		55—117 przy dławieniu 80 kolumn**) ⑩
11	1 × 700	1 × 1200	1 × 1500	1 × 1500
12	2 po 700	2 po 1200	2 po 1300	2 po 1400
13	KPK-12	KPK-12	KPK-12	KPK-12
DKO I	DKO I	DKO I	DKO I	DKO I
przes porównanie i porównanie	przes porównanie i porównanie	przes porównanie informacji z bloku dającego echo przy dławieniu z informacją w pamięci buforowej ⑯	przes porównanie informacji z cyfrową kontrolującą i informacją w pamięci buforowej ⑯	przes porównanie informacji z cyfrową kontrolującą i informacją w pamięci buforowej ⑯
17	16			
18	80 kolumnowe, 12 pozycjowe ⑯	80 kolumnowe, 12 pozycjowe ⑯	80 kolumnowe	80 kolumnowe
19	do 0,7	do 0,7		
20	±10%; 50Hz±3%	±10%; 50Hz±3%		±350V
21	220/230V	220/230V		
22	±15%	±15%		
23	<1	<2		0,8
Wymiary (mm)	1350 × 550 × 1200	1350 × 550 × 1270	960 × 600 × 1361	1200 × 600 × 1154

Table 8. Characteristics of USDC paper tape controller

1- country, 2- Hungary, 3- Poland, 4- USSR, 5- USDC designation, 6- manufacturer's designation, 7- parameter, 8- channel connection, 9- standard I/O interface, 10-reading speed, 11- continuous, 12- start stop, 13- reading method, 14- photoelectric, 15- no. of tracks, 16- punched code, 17- on input with conversion or arbitrary while copying, 18- output code, 19- USDC code, 20- check principle, 21- reading check, 22- reading and conversion, 23- buffer memory, 24- yes, 25- no, 26- components, 27- IC's and discrete, 28-power supply, 29- power consumption, 30- dimension, 31- weight.

Kraj produkujący			
WRL ④	PRL ③	4 . ZSRR	
Oznaczenia w JS EMC			
EC-6022	EC-6022	EC-6022	
Oznaczenie wytwórcy ⑥			
ERCU-1			
Spodek podłączenia do kanału ⑧	standardowy interfejs we — wy ⑨	standardowy interfejs we — wy ⑨	
Szybkość czytania: — praca ciągła [znak/s] ⑪ — praca start-stopowa [znak/s] ⑫	1500 0—1000	2000 do 2000	1500 do 1500
Metoda odczytu ⑬	fotoelektryczna ⑭	fotoelektryczna ⑭	fotoelektryczna ⑭
Ilość czytanych ścieżek ⑮	5, 6, 7 lub 8	5 i 8	5, 6, 7, 8
Kod informacji przedstawiony na taśmie papierowej ⑯	ISO-7, ISO-8	.	KOI-7 przy wejściu z przekształceniem informacji lub dowolny kod w reżimie kopowania ⑯
Kod informacji na wyjściu urządzenia ⑰	ISO-8 lub kod JS EMC ⑯	.	KOI-8 przy wprowadzeniu z przekształcaniem lub dowolny kod w reżimie kopowania ⑯
Zasada kontroli ⑲	Kontrola układowa czytania ⑳	Kontrola układowa czytania ⑳	Kontrola układowa czytania i przekształcania kodu. ㉑
Obejmność buforowego bloku pamięci ㉒	jest ㉓	.	brak ㉔
Baza elementowa ㉕	.	.	Układy scalone i elementy dyskretnie. ㉖
Zasilanie ㉗	220V +10% -10% 50Hz ± 2%	220V +10% -15% 50Hz ± 2%	380/220V +10% -15% 50Hz ± 2%
Pożar mocy [VA] ㉘	400, z przystawkami 1000	300	800
Wymiary [mm] ㉙	1200 × 620 × 1000	.	1200 × 500 × 1100
Waga [kg] ㉚	120	.	100

Table 9. Characteristics of USDC paper tape punch controller

Parameter	Country	
	USSR	Poland
	USDC EC-7022	Designation EC-7024
Channel connection	std. I/O interface	std. I/O interface
Tracks	5, 8	5, 8
Punching speed, start stop (ch/s)	150	110
Tape code	KOI-7 with conversion; any while copying	
Input code	KOI-8 with conversion; any while copying	
Check method	parity and legal combination	
Buffer memory components	9-bit register IC's and discrete	IC's
Power supply	220/38 V $\pm 10\%$ 50 Hz $\pm 1$ Hz	220V $\pm 10\%$ 50 Hz $\pm 1$ Hz
Power consumption VA	800	
Dimension (MM)	1200 x 500 x 1190	
Weight	100 kg.	

Table 10. Characteristics of Paper Tape Unit

1- country, 2-Czech. 3- E. Germany, 4- parameter, 5- USDC designation,  
 6- channel connection, 7- std. I/O interface, 8- tracks, 9- input code,  
 10- arbitrary, 11- check base, 12- control bit, 13- operation mode,  
 14- start-stop, 15- buffer memory, 16- yes, 17- no. of readers,  
 18- maximum reading speed, 19- no. of punching mechanisms, 20- max.  
 punching rate, 21- power supply, 22- power consumption, 23- basic con-  
 figuration - 1 reader, 1 punch, 24- expanded configuration; 2 readers,  
 1 punch, 25- dimensions, 26- basic conf., 27- extended conf., 28- weight,  
 29- components, 30- IC's.

Parametr 4.	Kraj J	
	CZES 2	NRD 3
	Oznaczenie w JSIEMO 5	
	EO-7002	EO-7003
Spodek podłączenia do komputera 6	.	7 standardowy interfejs wej-wy
Ilość ścieżek 8	5,6,7,8	5,6,7,8
Kod informacji na wyciąganie serwisa 9	.	dowolny 10
Zasada kontroli 11	14	na poziomie bitu kontrolnego 12
Rezim pracy 13	start-stopowy	start-stopowy 14
Buforowy blok pamięci 15	.	jest 16
Urządzenie wprowadzania z taśmy 17	.	.
— max. ilość 17	1	3
— max. szybkość czyszczenia [m/s] 18	1500	1000
Urządzenie wyprowadzania na taśmę 19	.	.
— max. ilość 19	1	1
— max. szybkość datowowania [m/s] 20	150	100
Kontrola 21	.	230; 50Hz±1Ms
Pobór mocy 22	.	.
— podstawniowy zasuw 1 czytnik, 1 perforator [VA]	.	600
— rozszerzony zasuw 2 czytnik, 1 perforator [EVA]	.	1000
Wydajny:		
zestaw podstawowy [mm]	1400×610× ×1392	1500×600×800
zestaw rozszerzony [mm]	.	2300×600×800
ciężar:		
zestaw podstawowy [kg]	.	250
zestaw rozszerzony [kg]	.	250
Dane elementowe	.	układy systemu 17

Table 11. Characteristics of USDC paper tape readers.

1- country, 2- Hungary, 3- Poland, 4- Czechoslovakia, 5- USDC designation, 6- manufacturer's designation, 7- parameters, 8- channel connection, 9- sta. I/u interface, 10- operation mode, 11- reading method, 12- photoelectric, 13- reading rate, in start-stop, 14- continuous reading rate, 15- tracks, 16- power supply, 17- power consumption, 18- dimensions, 19-weight, 20 operating temperature, 21- humidity, 22- mean time between failures, 23 information rate between failure, 24- error rate, 25- availability.

TABELA 11. Charakterystyka techniczna czytników taśmy papierowej JS EMC

Parametry i cochy 7	Kraj produkujący 1				
	WRL 2		PRL 3	WRL 2	PRL 3
	Oznaczenie w JS EMC 5				
	EC-6121	EC-6121	EC-6122	EC-6122	EC-6122
	Oznaczenie wytwórcy 6				
Speedb dołączenia do kanału 8	standardowy interfejs we - wy 9				
Reżim pracy 10	start - stop/stop-start	start - stop/stop-start	start - stop/stop-start	start - stop/stop-start	start - stop/stop-start
Spodek czynienia 11	fotoelektryczny 12	fotoelektryczny 12	fotoelektryczny 12	fotoelektryczny 12	fotoelektryczny 12
Szybkość czynienia w reż. start-stopowym 13 (wiersz./s)	0,12 0-150 albo 0-300	0,12 150 albo 300	0-1000	2000 albo 1000	
Szybkość czynienia w reż. start-stopowym (wiersz./s) 14	0,12 >275 albo 250		>1500		1000 +10% -15%
Liczba znaków informacyjnych 15	5, 6, 7 albo 8	5 albo 8	5, 6, 7 albo 8	5 albo 8	5 albo 8
Zasilanie 16	220V +10% -15%; 50Hz±2%	220V +10% -15%; 50Hz±2%			
Przebieg mocy (kVA) 17	≤0,18	0,2	≤0,35	0,2	≤0,2
Wymiary (mm) 18	470×246×220	340×240×170	455×300×225	340×240×170	520×223×205
Ciphon (kg) 19	24	18	25	16	18
Temperatura pracy (°C) 20	+5 - +40	+10 - +30	+5 - +35	+10 - +35	
Wilgotność (%) 21	40-90	40-90	40-90	40-90	
Średnia czas między zauważeniami (godz.) 22	>400	500	500	500	500
Średnia ilość przetwarzanej informacji między zauważeniami minutów 23	2,0 .10³		7,5 .10³		7,5 .10³
Stopa błędu 24	10⁻⁷	10⁻⁷	5 .10⁻⁷	10⁻⁷	5 .10⁻⁷
Wydajność technologiczna wykorzystania 25	0,975		0,975		0,975

Table 12. Paper Tape and edge punched card reader ( mechanism)

1- country, 2- Hungary, 3- Czechoslovakia, 4- USSR, 5- USDC designation,  
 6- manufacturer's code, 7- parameters, 8- reading speed for start-stop  
 mode, 9- continuous reading speed, 10- operating modes, 11- continuous,  
 12- direction, 13- bidirectional, 14- possibility of rereading, 15-  
 tracks, 16- reading mechanism, 17- photoelectric, 18- tape width,  
 19- card width, 20- information code, 21- arbitrary, 22- components,  
 23- IC's, 24- power, 25- power consumption, 26- operating temperature,  
 27- humidity, 28- mean time between failures, 29- volume of data between  
 failures, 30- error rate. 31- 80 column cards.

TABELA 12. Urządzenia wczytywania informacji z taśmy papierowej i kart obrzędów dziurkowanych JS EMC (mechanizmy)

Parametry i cechy 7	Kraj produkujący 8		
	WRL 2	CSRS 3	4 ZSRR
	Oznaczenie w JS EMC 5		
	EV-6101	EC-6101	EC-6111
	Oznaczenie wytwórcy 6		
Poziom czystości w reżimie start-stopowym 8	ER-40	.	.
Poziom czystości w reżimie ciągłym (znak/s) 9	MAX 10 znaków/s ch/s	40-100 znaków/s taśmy, 40-50 znaków/s z kart ch/s	50 Column/s
Reżimy pracy 10	start - stopowy - ciągły 11	300	start - stopowy
Przewód taśmy 12	w obu kierunkach 13	w obu kierunkach 13	inicjowanie możliwości powtarzania czytania karty 14
Liczba ścieżek 15	5, 6, 7 albo 8	5, 6, 7	.
Spodek czytania 16	fotoelektryczny 17	.	fotoelektryczny 17
Szerokość taśmy papierowej [mm] 18	17,4; 25,4	.	.
Szerokość karty [mm] 19	76,2; 85,6	76,2	karty 80 kolumnowe 21 dowolny 24
Spodek przedstawienia informacji 20	dowolny 21	.	.
Działanie elementowe 22	układły scalone 23	.	.
Zasilanie 24	230V +10%; -15%; 50Hz±2%	12V +0,5V; -0,2V; 5-24V	230/230V +10%; -15%; 50Hz±2% 24V
Pobór mocy [W] 25	50	.	60
Wymiary [mm] 26	150 x 200 x 100	.	370 x 270 x 210
Ciązar [kg] 27	2,1	.	.
Temperatura pracy [°C] 28	+5 - +40	.	.
Wilgotność [%] 29	25-90	.	.
Sredni czas między niespodzianiami (sek.) 30	450	.	.
Sredni czas pomiędzy niespodzianiami (sek.) 31	0,7-1,0	.	.
Stopa błędów 30	10 <sup>-4</sup>	.	.

Table 13. Paper Tape and Edge punched Cards Output Mechanisms

Parameters	Country	
	Hungary	Czechoslovakia
	USOC	designation
Manufacturer's code		
EP 35		
Punch code	33 lines/s	50 ch/s
Operating mode	start-stop, bidirectional	
Tracks	5,6,7,8	5,6,7,8
Tape width	17.5; 25.4	
Card width	76.2, 82.6	76.2
Reverse feed check	manual & auto on request during punch	
power		yes
Power supply	220V +10% -15% 50 Hz	12V +0.5 -0.2 2.5A
		220V +10% -15%
Power consumption	70	120
dimensions	240 x 226 x 150	270 x 200 x 217
weight	6.5	
Size of the Sheet with edge perforation	195 x 210	

Table 14. Characteristics of USDC XY plotters

1- country, 2- USSR, 3- Czechoslovakia, 4- USDC designation,  
 5- manufacturer's designation, 6- parameters, 7- type, 8- drum,  
 9- table, 10- channel connection, 11- standard I/O interface, 12- con-  
 trol system, 13- unit pen travel, 14- maximum speed, 15- simultaneous  
 XY motion, 16- yes, 17- paper size, 18- working area, 19- no. of  
 colors, 20- means of color change, 21- automatic, 22- line width,  
 23- no. of symbols, 24- orientation of characters, 25- horizontal and  
 vertical, 26- 16 positions every 22.5°, 27- input code, 28- serial  
 parallel, 29- 9 rows binary, 30- 150- 96 characters own 5 track code,  
 31- type of line, 32- continuous, 33- points, segment-points, 34- power  
 supply, 35- power consumption, 36- dimensions, 37- plotter,  
 38- controller, 39- encoder, 40- programmed, 41- scale of symbols

Parametry i cechy	Kraj produkcyjny 1			
	ZSRR 2			
	Oznaczenie w JS EMC 4			
	EC-7062	EC-7063	EC-7061	EC-7064
	Oznaczenie wytwórcy 5			
				DIGIGRAF 1812
Typ 7	bębnowy 8	bębnowy 8	ze stołem 9	ze stołem 9
Spodek podcięcia do kanału 10	standardowy interfejs wejścia — wyjścia 11	standardowy interfejs wejścia — wyjścia 11	standardowy interfejs wejścia — wyjścia 11	przez urządzenie sterujące 12
Elementarny przenos piórka [mm] 13	0,1 i 0,06	0,1 i 0,06	0,06 albo 0,025	0,06
Maksymalna prędkość [mm/s] 14	200	150	50	50
Motliwość jednoczesnego ruchu w kierunku radialnych i odciętych 15	jest 16	jest 16	.	.
Format papiera [mm] 17	420×50000	878×20000	1200×1150	1750×1270
Wymiary obiektu roboczego 18	380×600	841×1000 albo 730×1000	1050×1000	1000×1200
Liczba możliwych kolorów piórka 19	3	3	3	4
Spodek zmiany koloru 20	automatyczny 21	automatyczny 21	automatyczny 21	programowy 20
Szerokość listu zapisu [mm] 22	0,3; 0,5; 0,8	0,3; 0,5; 0,8	0,3; 0,5; 0,8	0,1—1,2
Liczba kreślących symboli 23	64	do 253	do 253	64
Skala kreślących symboli 41	1 : 2, 1 : 1, 2 : 1	1 : 2, 1 : 1, 2 : 1	1 : 2, 1 : 1, 2 : 1	1 : 2, 1 : 1, 2 : 1
Orientacja kreślących symboli 24	pozioma i pionowa 25	16 pozycji co 22,5° 26	16 w pozycji co 22,5° 26	16 pozycji co 22,5° 26
Kod informacji na wejściu urządzenia 27	asetygowo-równoległy 28 9-radikowy, binarny 29	asetygowo-równoległy 28	asetygowo-równoległy 28	ISO-96 znaków, 30 włączny kod 3 określony
Typ kreślania listu 31	ciągły 32	ciągły, punktowy, kreślono-punktowy 33	ciągły, punktowy, kreślono-punktowy 33	ciągły, kreślony, kreślono-punktowy 33
Zasilanie 34	380/220V +10% -15%; 50Hz ± 2%	380/220V +10% -15%; 50Hz ± 2%	380/220V +10% -15%; 50Hz ± 2%	3×380V/220V; 50Hz
Połów mocny [kVA] 35	1,2	1,5	2	1,7
Wymiary: [mm] 36	600×1200×1370 (calvit)	865×425×318	1710×1640×970	2420×1630×1710
— rozmiar piórka 37		500×1200×1050	800×1200×1050	750×705×1000
— blok sterowania 38		500×1200×1050	500×1200×1050	
— blok przekodowania 39				

Table 15. Characteristics of USDC line printers

1- country, 2- USSR, 3- E. Germany, 4- Poland, 5- Czechoslovakia,  
6- USDC designation, 7- manufacturer's designation, 8- parameters,  
9- channel connection, 10- standard I/O interface, 11- adapter system,  
12- information check, 13- internal, 14- parity, 15- paper feed,  
16- asynchronous, 17- paper feed time, 18- first line, 19-next line,  
20- line feed control, 21- 4 track tape, 22- program or paper tape,  
23- no. of paper tracks, 24- printing speed, single space (lpm) ,  
25- printing speed, numeric only (lpm), 26- character set, 27- no. of  
characters/line, 28- line separation, 29- character separation, 30-  
input code, 31- paper width, 32- no. of copies, 33- memory buffer,  
34- one line capacity, 35- components, 36- IO's, 37- power supply,  
38- power consumption, 39- dimensions, 40- weight.

TABELA 15. Charakterystyka techniczna drukarek wierszowych JS EMC

Lp.	Parametry i cechy	Kraj produkcyjny						
		ZUR 2	NED 3	ZUR 2	PRL 4	CBS 5	NED 3	CBS 5
		EC-7030	EC-7031	EC-7032	EC-7033	EC-7034	EC-7035	EC-7036
		Oznaczenia wytwórcy						
		Siemens 478		DW 3		Siemens 479		
1	Sposób przyłączenia do kanału 9	standardowy interface we-wy	standardowy interface we-wy	standardowy interface we-wy	standardowy interface we-wy	standardowy interface we-wy	standardowy interface we-wy	prze- właściwo- wany w zwa- cielnie blok- poligrafia z kanałem
2	Kontrola przesyłanej infor- macji 12	układowa, 13 sprawdzanie 14 parzystości		układowa 16	układowa 13			
3	Sposób podawania papieru	asynchroniczny	asynchroniczny	asynchroniczny	asynchroniczny	asynchroniczny	asynchroniczny	synchroniczny
4	Czas przeniesienia papieru: 17 — pierwego wiersza [ms] — każdego następnego 18 wiersza [ms]	16 18 10	20,7 6	16 10	13,5 4,00 lub 5,30	26 7,8 8	20,7 8 7,8	20 7,8
5	Sterowanie wycinaniem papieru 20	sterowanie tań- cze 4-ro skie- kowa 21	programowe lub tańcze pa- piernicza 22	tańcze papiero- we 4-ro skie- kowa 23	programowe lub tańcze pa- piernicza 24	tańcze papiero- we 12 skie- kowa 25		
6	Liczba traktów papieru 23	1	1 lub 2	1	1	1	1	1 lub 2
7	Szybkość druku pełnego zestawu znaków przy poje- dynczym odstępie między wierszami [wierszy/min]	650-800	900	900	600 lub 1100	600-800	900	750-1000
8	Szybkość druku znaków cyfr priy pojedynczym odstępie między wierszami [wierszy/min]		1800				1800	
9	Reportarnie znaków		63		96	64	63	
10	Liczba znaków w wierszu	128	156	128	128 lub 160	128	120	
11	Odległość między wierszami		4,28		4,28 lub 5,17		4,28	
12	Odległość między znakami w wierszu [mm]		2,54		2,54		2,54	
13	Kod informacji na wejściu urządzenia		EBCDIC		DKOI	KOI	EBCDIC	
14	Szerokość papieru [mm]	80-420	80-420	80-420	max 420	max 420	80-420	max 420
15	Liczba kopii	2	3	5	5	2-5	3	3-5
16	Obecność buforowego bloku pamięci	pojemność 2 wiersza 34	pojemność 1 wiersza 34	pojemność 1 wiersza 34	pojemność 1 wiersza 34	pojemność 1 wiersza 34	pojemność 1 wiersza 34	pojemność 1 wiersza 34
17	Baza elementowa	układy scalone 3G	układy scalone DTL 3G	układy scalone 3G	układy scalone 3G	układy scalone 3G	układy scalone 3G	układy scalone 3G
18	Zasilanie	220V/380V +10% -15%	220V/380V +10% -15%	220V/380V +10% -15%	220V/380V +10% -15%	220V/380V +10% -15%	220V/380V +10% -15%	220V/380V +10% -15%
19	Pobór mocy [kVA]	1,5	2	2	3,5		2	
20	Wymiary [mm]	1520 x 660 x x 1425	2770 x 670 x x 1261	1600 x 660 x x 1270	1250 x 380 x x 1270	1370 x 780 x x 1400	2770 x 670 x x 1261	1500 x 780 x x 1400
21	Ciązar [kg]		750		700		750	

Table 16. Characteristics of USDC keyboards


1- country, 2- Czechoslovakia, 3- Hungary, 4- USDC designation,  
 5- parameters, 6- switching method, 7- contact less, 8- power supply,  
 9- current requirements, 10-output, 11- TTL logic level, 12- information  
 output, 13- 7 bits, 14- information check, 15- parity, 16- minimum  
 character number, 17- no. of keys, 18- speed, 19- code, 20- USDC  
 compatible, 21- key roll off protection, 22- electronic.

TABELA 16. Charakterystyka techniczna klawiszy znakowych JS EMC

Parametry i cechy 5	Kraj produkcyjny 6		
	CSRS 2	WRL 3	WEI 3
	Oznaczenie w JS EMC 4		
	EU-0101	EU-0101	EC-0102
System przełączania 6	beztykowy 7	beztykowy 7	beztykowy 7
Napięcie zasilania [V] 8	+5	+5	+5
Potrzebne natężenie prądu [A] 9	max. 0,6		0,1
Wyjścia 10	logiczne poziomy układów TTL 11	logiczne poziomy układów TTL 11	logiczne poziomy układów TTL 11
Wyjście informacyjne 12	7 bitowe 13	7 bitowe 13	
Kontrola informacji 14	bit parzystości lub nieparzystości 15	bit nieparzystości 15	
Maksymalna liczba znaków 16	96	96	10 (cyfry)
Liczba klawiszy 17	76	76	10
Szybkość robocza [zm/c] 18	15 20	15 20	do 35
Kod 19	zgodny z wymaganiami JS EMC	zgodny z wymaganiami JS EMC	
Składnia przesyłek jednorazowej zwiększonej niż 1. klawisza 21	elektroniczna 22	elektroniczna 22	

Fig 4. Block diagram of EC-7906 character display

1- channel, 2- connecting system, 3- controller, 4- control unit  
EC-7566, 5- printing system, 6- character display.

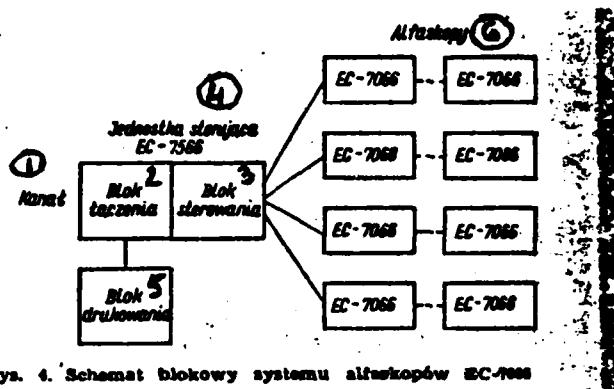

Rys. 4. Schemat blokowy systemu alfabetów EC-7906

Table 17. Characteristics of USDC typewriter controllers.

1- country, 2- USSR, 3- Czechoslovakia, 4- E. Germany, 5- Bulgaria,  
 6- USDC designation, 7- parameters, 8- channel connection, 9- std.  
 10- interface, 11- additional controllers and indicators, 12- yes,  
 13- typewriter, 14- no. of characters, 15- typing speed, 16- paper  
 width, 17- max. no. of copies, 18- carriage width, 19- input code,  
 20- output code, 21- power supply, 22- power consumption, 23- dimensions  
 (including table height), 24- weight.

TABELA 17. Charakterystyka techniczna jednostek sterujących elektrycznymi maszynami do pisania JS EMC

Parametry i cechy	Kraj produkujący			
	ZSRR 2	CSSR 3	NRD 4	PRŁB 5
	Oznaczenia w JS EMC 6			
	EO-7070	EO-7071	EO-7073	EO-7074
Prędkość przyłączenia do kanału 8	standardowy interfejs 9 we — wy	.	standardowy interfejs 9 we — wy	standardowy interfejs 9 we — wy
Dodatkowe elementy sterowania i wskazówek 10	posiada 11	posiada 11	posiada 11	posiada 11
Maszyny do pisania 12				
— ilość symboli 13	93	92	92	93
— szybkość pisania [zm/s] 14	do 10	10	10	10
— szerokość papiera [mm] 15	230	310	297	.
— max. ilość kopii 16	5	4	5	6
— szerokość karetki [mm] 17			320	280-320
Kod informacji na wejściu urządzenia 18	.	SKOI	.	.
Kod informacji na wejściu urządzenia 19	.	KDOI	.	.
Zasilanie 20	220V +10% 50Hz±1Hz -15%	220V +10% 50Hz±1Hz -15%	.	220V +10% 50Hz±1Hz -15%
Pobór mocy [VA] 21	200	600	250	500
Wymiary [mm] 22	1000×620×900	1200×600×700	2070×690×900 730	1200×700×1100
Ciężar [kg] 23	.	.	190	.

Table 18. Characteristics of USOC typewriters.

1- country, 2- Czechoslovakia, 3- E. Germany, 4- Bulgaria, 5- USOC designation, 6- manufacturer's designation, 7- typing speed, 8- no. of copies, 9- no. of keys, 10- character size, 11- no. of printed characters, 12- max. no. of characters/ line, 13- line distance, 14- reel width, 15- power supply, 16- power consumption, 17- dimensions, 18- weight, 19- character separation, 20- spacing, 21- lines, 22- ribbon width.

TABELA 18. Charakterystyka techniczna elektrycznych maszyn do pisania JS EMC

Parametry i cechy	Kraj produkujący		
	CSR 8	NRD 3	LBR 4
	Oznaczenia w JS EMC		
	EC-7172	EC-7173	EC-7174
Oznaczenia wytwórcy			
CONSUL 264.8			
SORMTRON 889			
MARICA 141			
Prędkość pisania (im/s)	10	9,5	10
Ilość kopii	3	6	6
Ilość klawiszy	46	46	46
Rozmiar znaków [mm]	1,0	2,5	2,5
Wielkość drukowanych symboli	1,6	0,8	0,8
Max. ilość znaków w wierszu	12	106	117
Poziomy odstęp wiersza [mm]	1,3	4,25	4,25
Szerokość rolki papieru [mm]	14	200, 215, 234, 250	max. 320
Zasilanie	15	220V +10% -15%	220V +10% -15%; 50±1Hz
Moc prądu mocy (VA)	16	56	100
Wymiary [mm]	17	455×500×285	615×570×310
Waga [kg]	18	.	37
Odległość między średniami znaków [mm]	19	.	2,6
Przedziałek odstępów między wierszami	20	.	1, 2, 3 wiersze ±1
Szerokość taśmy barwionej [mm]	22	.	16
			18

Table 19. Characteristics of USDC character and graphic displays.

1- country, 2- Hungary, 3- USSR, 4- USDC designation, 5- manufacturer's designation, 6- parameters, 7- channel connection, 8- control system, 9- std. I/O interface, 10- through EC-7566 device, 11- through minicomputer, (1010B), 12- no. of characters on screen, 13- no. of symbols, 14- screen size, 15- data rate (KB/s), 16- refresh rate (frame/s), 17- character generation, 18- vector, 19- horizontal, vertical and 45° lines, 20- raster, 21- screen color, 22- green, 23- no. of function keys, 24- power supply, 25- buffer capacity, 26- components, 27- IC's, 28- discrete, 29- power consumption, 30- dimensions, 31- control unit, 32- desk, 33-character size

TABELA 19. Charakterystyka techniczna alfabetów i grafików JS EMC

Parametry i cechy	Kraj produkujący				
	WRL 2		ZSRR 3		WRL 2
	Oznaczenie w JS EMC 4				
	EC-7061	EC-7063	EC-7064	EC-7066	EC-7065
	Oznaczenie wytwórcy 5				
	ADV 1000				GD' 71
Spodek przyłączenia do kanału 7	przez blok sterowania i połączenia z kanałem	przez blok sterowania i połączenia z kanałem	standardowy 9 interface we — wy	poprzecznym urządzeniem sterującym EC-7566	poprzecznym urządzeniem sterującym EMC (1010B)
Liczba znaków informacyjnych na ekranie 12	1024 albo 960	1024 albo 960	2100	960	2000
Liczba symboli 13	min. 64	96, min. 64	.	128	64
Wymiary ekranu [mm] 14 (pole roboczego)	150 × 200	150 × 200	250 × 250	320 × 180	380 × 300
Wymiary znaku [mm] 15	2,4 × 3,6	2,4 × 3,6	.	3,5 × 2,5 albo 7 × 5	4 × 6
Maksymalna prędkość przekazu danych [kB/s] 16	100	100	.	.	.
Częstotliwość regeneracji obrazu [kadrów/s] 16	okolo 50	okolo 50	50	50	10–100
Spodek przedstawienia znaków 17	wektorowy 18	wektorowy 18	.	krańce poziome, pionowe i nachylone pod kątem 45° 19	z linią 20
Kolor ekranu 21	zielony 22	zielony 22	zielony 22	.	zielony 22
Liczba funkcjonalnych klawiszy 23	18	22	32	.	.
Pojemność pamięci buforowej [kB] 25	1024	1024	2–4096	.	.
Baza elementowa 26	układy scalone 27	układy scalone 27	układy scalone i elementy dyskretnie 27, 28	układy scalone i elementy dyskretnie 27, 28	.
Zasilanie 24	220V +10% – 15%; 50Hz ± 2Hz	220V +10% – 15%; 50Hz ± 2Hz	380/220V +10% – 15%; 50Hz ± 1Hz	380/220V +10% – 15%; 50Hz ± 1Hz	.
Poziom mocy [VA] 29	320	320	2000	.	.
Wymiary [mm] 30	420 × 620 × 360	420 × 620 × 360	660 × 660 × 660 1200 × 750 × 1000 1490 × 660 × 700	.	.
— urządzenie sterującego 31					.
— rozmiar 32					.

## DISTRIBUTION LIST

## DISTRIBUTION DIRECT TO RECIPIENT

<u>ORGANIZATION</u>	<u>MICROFICHE</u>	<u>ORGANIZATION</u>	<u>MICROFICHE</u>
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/RDXTR-W	1
B344 DIA/RDS-3C	9	E403 AFSC/INA	1
C043 USAMIIA	1	E404 AEDC	1
C509 BALLISTIC RES LABS	1	E408 AFWL	1
C510 AIR MOBILITY R&D LAB/F10	1	E410 ADTC	1
C513 PICATINNY ARSENAL	1	FTD	
C535 AVIATION SYS COMD	1	CCN	1
C591 FSTC	5	ASD/FTD/ NIIS	3
C619 MIA REDSTONE	1	NIA/PHS	1
D008 NISC	1	NIIS	2
H300 USAICE (USAREUR)	1		
P005 DOE	1		
P050 CIA/CRS/ADD/SD	2		
NAVORDSTA (50L)	1		
NASA/NST-44	1		
AFIT/LD	1		
LLL/Code L-389	1		
NSA/1213/TDL	2		