

AD-A088 288

SRI INTERNATIONAL MENLO PARK CA
TWO-DIMENSIONAL MESH ADJUSTMENT ALGORITHM.(U)
JUL 80 C M ABLOW, S SCHECHTER

F/G 12/1

F49620-77-C-0114

UNCLASSIFIED


AFOSR-TR-80-0626

NL

UP
AD-A088 288



END
DATE
FILMED
9-80
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AFOSR-TR- 80-06216

LEVEL

4073060

(3)

25 July 1980

Annual Technical Report
For Period 1 June 1979 to 31 May 1980

TWO-DIMENSIONAL MESH ADJUSTMENT ALGORITHM

Prepared for:


Director, Mathematical and Informational Science
Air Force Office of Scientific Research/NM
Building 410
Bolling Air Force Base, D.C. 20332

Attn: Major Carl Edward Oliver
Program Manager


Prepared by:

C. M. Ablow, Staff Scientist
S. Schechter, Senior Research Mathematician
Physical Sciences Division

Contract No. F49620-77-C-0114


C. M. Ablow, Principal Investigator

Approved:


Paul J. Jorgensen, Vice President
Physical and Life Sciences Group

Approved for public release;
distribution unlimited.

333 Ravenswood Ave. • Menlo Park, California 94025
(415) 326-6200 • Cable: SRI INTL MPK • TWX: 910-373-1246

80 8 20 0.93

AD A088288

SRI International

FILE COPY



AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)
NOTICE OF TRANSMITTAL TO DDC
This technical report has been reviewed and is
approved for public release IAW AFR 190-12 (7b).
Distribution is unlimited.
A. D. BLOSE
Technical Information Officer

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFOSR-TR-80-0626	2. GOVT ACCESSION NO. AD-A088288	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) TWO-DIMENSIONAL MESH ADJUSTMENT ALGORITHM		5. TYPE OF REPORT Interim
7. AUTHOR(s) C. M. Ablow S. Schechter		6. PERFORMING ORG. REPORT NUMBER SRI 6469
9. PERFORMING ORGANIZATION NAME AND ADDRESS SRI International 333 Ravenswood Avenue Menlo Park, CA 94025		8. CONTRACT OR GRANT NUMBER(s) F49620-77-C-0114
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Office of Scientific Research Building 410 Bolling Air Force Base, DC 20332		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61102F 2384A3
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 9. H. W. L. Rept. 1 11 Jul 79 - 31 Mar 80		12. REPORT DATE 25 Jul 1980
		13. NUMBER OF PAGES 7
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Finite Difference Methods Mesh Adjustment Numerical Solution of Differential Equations		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) During this third year of research the particular, previously presented, mesh adjustment algorithms for the finite difference solution of ordinary differential equation systems have been shown to be instances of the use of monitor functions intrinsic to the system and its solution. These monitors have been found to be nearly as accurate as the monitor that minimizes the truncation error. The weighted normalizing monitor, which uses the sum of the squares of derivatives of the solution function, has been applied in a two-dimensional mesh adjustment algorithm.		

I RESEARCH TASKS

The general objective of this research is to establish a transformation of coordinates that facilitates the finite difference solution of partial differential equations in two dimensions. The objective can be attained by completion of the following tasks.

A. Coupled Systems of Ordinary Differential Equations

Two-dimensional mesh adjustment is obtained from an appropriately coupled system of one-dimensional boundary-value problems. The one-dimensional algorithm has been tested on single differential equations of low order. We must verify that the method is successful with coupled systems. A coupled system of this kind is provided by the equations for conservation of mass and energy in a steadily fed chemical reaction.

B. Known Boundary Layer

An example in which the mesh adjustment can be well approximated in advance is provided by a partial differential equation with a solution having a boundary layer in known position. Difficulties in such examples concern the adequacy of the difference scheme to couple the one-dimensional problems on the coordinate lines transverse to the boundary layer. Problems of viscous flow past obstacles are of this type.

C. Unknown Boundary Layer

The exceptional size of a parameter in a problem generally causes the sharp variations in the boundary layer. Continuation of the solution from the readily calculated smooth variations for a parameter of ordinary size is successful in one dimension. Continuation will apply in two dimensions provided that a way is found to ensure that the coordinate lines transverse to the developing boundary layer are identified early in the continuation process. Internal boundary layers whose location is determined by the solution itself arise, for example, in flow-through chemical reactors and field-effect transistors.

II STATUS OF THE RESEARCH EFFORT

During the past year the algorithm for automatic mesh adjustment by transformation to a campylotropic coordinate^{1*} that depends on the length and curvature of the solution curve has been shown to be in the general class of algorithms based on monitor functions--that is, on functions that take equally spaced values at mesh points. Intrinsic monitor functions that depend on the solution itself are particularly useful for mesh adjustment. We have compared² several functions of this kind by application to a typical second-order ordinary differential equation. The normalizing monitor, based on a weighted sum of the squares of the derivatives of the dependent variables, and the campylotropic coordinate were found to give difference approximations with much greater accuracy for the same number of mesh points than a uniform mesh does. The accuracy was similar to that of the optimal monitor that minimizes the truncation error.

A. Coupled Systems of Ordinary Differential Equations

The normalizing monitor function has immediate application to systems, while the other intrinsic monitors require extension and generalization. The normalizing monitor has been shown² to be effective on the example of three, coupled nonlinear, second-order, ordinary differential equations that model the steady decomposition of ozone in a flow-through reactor. A curvature-dependent monitor requires a more intricate computation than does the normalizing monitor, and the results are not necessarily more accurate. The optimal monitor involves the fifth derivatives of the functions appearing in the equations and is therefore probably too complex for general use.

*Numbers denote papers in the Publication List, Section III.

B. Known Boundary Layer

See discussion for Task C.

C. Unknown Boundary Layer

Tasks B and C for partial differential systems in two dimensions have been considered together because, as with the one-dimensional algorithms, no a priori knowledge of the location of the boundary layers is used in the mesh adjustment process. The mesh adjustment is made by a transformation of coordinates to a solution-dependent monitor function for one independent variable and an orthogonal coordinate for the second variable. The method has been applied³ to a boundary value problem for Poisson's equation with an analytic solution having a sharp variation along a chord of a circular disc. An initially arbitrary coordinate is iteratively improved under the normalizing monitor requirement to an orientation with one coordinate along the chord and the desired small spacing in the other coordinate across the chord. Application to flows over airfoils with viscous boundary layers or detached shocks is now under way.

III PUBLICATIONS LIST

1. C. M. Ablow and S. Schechter, "Campylotropic Coordinates," Computational Physics (June 1978).
2. C. M. Ablow, S. Schechter, and W. E. Zwisler, "Node Selection for Two-Boundary Value Problems," submitted to Computational Physics.
3. C. M. Ablow and S. Schechter, "Generation of Boundary and Boundary-Layer Fitting Grids," in preparation. An abstract is attached.

IV PERSONNEL

Mr. W. E. Zwisler joined the co-investigators, Drs. C. M. Ablow and S. Schechter, in the research effort.

V INTERACTIONS

The contents of the second paper in the publications list were presented at the fall meeting of S.I.A.M. in Denver, November 12-14, 1979.

VI SPECIFIC APPLICATIONS

The ozone decomposition example presented in the second publication is an application of the method to a chemical process in a flow-through reactor. Direct application to jet or rocket engines in one-dimensional steady-state approximation should be possible.

Accession For	
NTIS GRA&I	☒
DDC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or special
A	

Generation of Boundary and Boundary-Layer Fitting Grids

by

C. M. Ablow and S. Schechter
SRI International

ABSTRACT


A grid that improves the accuracy and speed of computation with a given finite difference approximation to a boundary value problem for a differential equation is more satisfactory than other grids. A best method of grid generation will therefore depend on the problem domain, the solution, and the difference scheme.

An automatic generator for the grid that minimizes the truncation error of a given difference scheme for two-point boundary value problems over a finite one-dimensional interval has been previously presented.* This truncation error minimizing (TEM) generator changes the independent variable to one in which uniformly spaced nodes fit the boundaries and cluster in any boundary layers where the solution has a sharp variation. The number of nodes and the complexity of the calculation are known in advance so that the time and cost of the calculation can be estimated. Other generators producing grids that equally distribute measures of the solution curve arc length or length and curvature were found to be about as accurate as the TEM generator but more easily implemented. The arc length coordinate can also be defined as the transformation that minimizes the sum of the squares of the derivatives of the dependent and independent variables, a definition that readily generalizes to higher dimensions.

Experience with two-dimensional grid generation, as applied to a Dirichlet problem for the Poisson equation on the unit disc, is presented. The example has an analytic solution with sharp variation across a

*C. M. Ablow, S. Schechter, and W. H. Zwisler, "Node Selection for Two-Boundary Value Problems," submitted to Computational Physics.

diameter of the disc. The grid is uniformly rectangular on the unit square in the transformed coordinates. Transformations were chosen to minimize the sum of the squares of the derivatives of the dependent variable and of the dependent and originally independent variables. The TEM transformation was judged too complex to be practical. The results show that the grid fits the boundaries, clusters about the boundary layer, and rotates into alignment with it as desired.

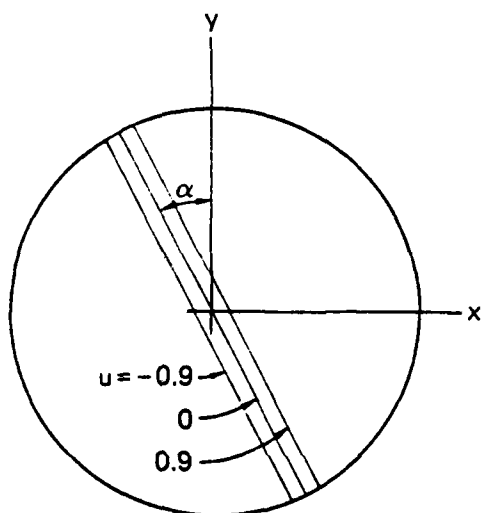

$$u_{xx} + u_{yy} = 2p^2 \operatorname{sech}^2 pz \tanh pz$$

$$u = \tanh pz$$


$$z = x \cos \alpha + y \sin \alpha$$

$$p = 20$$

$$\alpha = \pi/6$$

SA-6469-8

FIGURE 1 PROBLEM DOMAIN

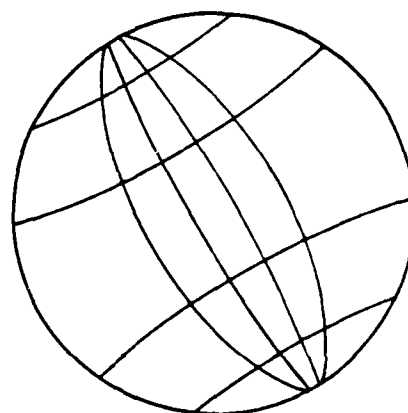

SA-6469-9

FIGURE 2 SOLUTION GRID (SKETCH)