

**LEVEL** <sup>II</sup>

(12) <sup>FR</sup>

USAAEFA PROJECT NO. 77-25

AD A 089625



**PRELIMINARY AIRWORTHINESS EVALUATION  
AH-1S HELICOPTER WITH OGEE  
TIP SHAPE ROTOR BLADES**

FINAL REPORT

GARY L. BENDER  
PROJECT OFFICER

RALPH WORATSCHEK  
PROJECT ENGINEER

DAVID OTTOMEYER  
PROJECT ENGINEER

HENRY ARNAIZ  
PROJECT ENGINEER

LARRY HIGGINS  
MAJ, INF  
US ARMY  
PROJECT PILOT

JOHN S. TULLOCH  
CW4, USA  
PROJECT PILOT

MAY 1980

DTIC  
ELECTE  
S SEP 29 1980 D

Approved for public release; distribution unlimited.

A

UNITED STATES ARMY AVIATION ENGINEERING FLIGHT ACTIVITY  
EDWARDS AIR FORCE BASE, CALIFORNIA 93523

DDC FILE COPY

80 9 26 025

#### **DISCLAIMER NOTICE**

**The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.**

#### **DISPOSITION INSTRUCTIONS**

**Destroy this report when it is no longer needed. Do not return it to the originator.**

#### **TRADE NAMES**

**The use of trade names in this report does not constitute an official endorsement or approval of the use of the commercial hardware and software.**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER USAAEFA Report No. 77-25	2. GOVT ACCESSION NO. AD-A089	3. RECIPIENT'S CATALOG NUMBER 625
4. TITLE (and Subtitle) PRELIMINARY AIRWORTHINESS EVALUATION AH-1S HELICOPTER WITH OGEE TIP SHAPE ROTOR BLADES	5. TYPE OF REPORT & PERIOD COVERED FINAL REPORT NOV 79-APR 80	PERFORMING ORG. REPORT NUMBER
7. AUTHOR(S) GARY L BENDER HENRY ARNAIZ DAVID OTTOMEYER	RALPH WORATSCHEK MAJ LARRY HIGGINS EW4 JOHN S. TULLOCH	8. CONTRACT OR GRANT NUMBER(s) 11 May 80
PERFORMING ORGANIZATION NAME AND ADDRESS US ARMY AVIATION ENGINEERING FLIGHT ACTIVITY EDWARDS AFB, CA 93523	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS ET-9-RT028-01-ET-EG 12 4	
11. CONTROLLING OFFICE NAME AND ADDRESS US ARMY AVIATION ENGINEERING FLIGHT ACTIVITY EDWARDS AFB, CA 93523	12. REPORT DATE MAY 1980	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 14 USAAEFA-77-25	13. NUMBER OF PAGES	
	15. SECURITY CLASS. (of this report) UNCLASSIFIED	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) AH-1S Helicopter Hover Performance K747 Rotor Blades Level Flight Performance Low-speed Flight Characteristics OGEE Tip Shape Rotor Blades		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The United States Army Aviation Engineering Flight Activity conducted a Preliminary Airworthiness Evaluation of the AH-1S helicopter with OGEE tip-shape main rotor blades to determine if any improvement in performance or handling qualities resulted from replacing the K747 blades. Additionally, the acoustics signature of the OGEE blades were measured by the US Army Research and Technology Laboratories (Aeromechanics Lab). Tests were conducted at Edwards Air Force Base (elevation 2302 feet) and Coyote Flats (elevation 9980 feet), California from 1 November 1979 through 8 April 1980. Forty-five test flights were flown for a total of 36.6 productive hours (63.2 total hours). Both hover and level flight performance were degraded by installation of OGEE tip-shape		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED  
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

409025 sel

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

main rotor blades. Low-speed handling qualities were unaffected by the OGEE blades. Other handling qualities tests were not accomplished. Results of acoustics tests will be reported by the laboratories under a separate cover.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)



**DEPARTMENT OF THE ARMY**  
HQ, US ARMY AVIATION RESEARCH AND DEVELOPMENT COMMAND  
4300 GOODFELLOW BOULEVARD, ST. LOUIS, MO 63120

DRDAV-DI

14 JUL 1980

**SUBJECT: Directorate for Development and Qualification Position on the  
Final Report of USAAEFA Project No. 77-25, Preliminary  
Airworthiness Evaluation, AH-1S Helicopter with Ogee Tip Rotor Blades**

SEE DISTRIBUTION

1. The purpose of this letter is to establish the Directorate for Development and Qualification position on the subject report. The evaluation was conducted as a research and development effort to evaluate performance, handling qualities, and acoustics characteristics of an AH-1S helicopter configured with Kaman K747 rotor blades modified with an Ogee tip shape.
2. This Directorate agrees with the report findings and conclusions. Based on the test results, the AH-1S with the modified Kaman K747 rotor blades exhibited degraded performance and handling qualities characteristics.

FOR THE COMMANDER:

*Charles C. Crawford, Jr.*  
**CHARLES C. CRAWFORD, JR.**  
Director of Development  
and Qualification

Recession For	
NIAS - General	<input checked="" type="checkbox"/>
DDC - 2nd	<input type="checkbox"/>
Unprocessed	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By	
Distribution	
Availability/Spec	
Dist	special

*AA*



AH-1S Equipped with Kaman K747 Rotor Blades

# TABLE OF CONTENTS

	<u>Page</u>	
<b>INTRODUCTION</b>		
Background . . . . .	1	
Test Objectives . . . . .	1	
Description . . . . .	1	
Test Scope . . . . .	2	
Test Methodology . . . . .	2	
<b>RESULTS AND DISCUSSIONS</b>		
General . . . . .	4	
Performance . . . . .	4	
Hover Performance . . . . .	4	
Level Flight Performance . . . . .	4	
Handling Qualities . . . . .	5	
Low-speed Flight Characteristics . . . . .	5	
<b>CONCLUSIONS . . . . .</b>		<b>6</b>
<b>RECOMMENDATIONS . . . . .</b>		<b>7</b>
<b>APPENDIXES</b>		
A. References . . . . .	8	
B. Aircraft Description . . . . .	9	
C. Instrumentation . . . . .	14	
D. Test Techniques and Data Analysis Methods . . . . .	16	
E. Test Data . . . . .	20	
<b>DISTRIBUTION</b>		

# INTRODUCTION

## BACKGROUND

1. The U.S. Army and the National Aeronautics and Space Administration (NASA) are engaged in an effort to develop rotor blades which will improve the acoustic signature, vibratory loads, and performance of helicopters. Various rotor tip planforms have been investigated for that purpose. To evaluate the potential improvements on an AH-1 helicopter, two Kaman K747 main rotor blades have been fabricated with an OGEE tip shape. Kaman Aerospace Corporation conducted initial testing of OGEE tip rotor blades to obtain flight loads measurements prior to government testing. The U.S. Army Aviation Research and Development Command (AVRADCOM) requested that the U.S. Army Aviation Engineering Flight Activity (USAAEFA) conduct a preliminary airworthiness evaluation (PAE) of an AH-1S helicopter with OGEE tip main rotor blades (Ref 1, App A). A test plan (Ref 2) was prepared by USAAEFA and approved by AVRADCOM (Ref 3).

## TEST OBJECTIVES

2. The objectives of the test were as follows:
- a. To compare the hover and level flight performance of the OGEE tip rotor blades to the performance of the K747 rotor blades.
  - b. To gather sufficient data to allow the US Army Research and Technology Laboratories (Aeromechanics Lab) to compare the acoustics signature of the K747 and the OGEE tip blades .
  - c. Compare the handling qualities of the AH-1S with OGEE blades to the handling qualities with K747 blades.

## DESCRIPTION

3. The production AH-1S is a tandem seat, two-place helicopter with a two-bladed main rotor and a two-bladed Model 212 tractor tail rotor. The helicopter is powered by a Lycoming T53-L-703 turboshaft engine derated from 1800 shaft horsepower (SHP) at sea-level, standard-day conditions to 1290 SHP for 30 minutes and 1134 SHP for continuous operation of the main transmission. Distinctive features of the helicopter include the narrow fuselage, stub wings with four stores stations and a flat-plate canopy. A more complete description of the AH-1S is presented in the operator's manual (Ref 4). Items affecting aerodynamic drag are documented in Appendix B.

4. The Kaman K747 rotor blade incorporates an advanced design airfoil, a tapered tip planform, composite material construction, and a multicell ballistically tolerant spar. The blades are designed to be individually interchangeable and when used as a set, may be used to replace the standard AH-1 main rotor blades (B540). A complete description of the K747 blade is contained in Reference 5.



5. The OGEE tip rotor blade is a Kaman K747 blade with the tip modified to the OGEE shape. In order to quickly and economically make this modification, the K747 tip weights were left out of the OGEE configuration. This resulted in a low inertia rotor by comparison to either K747 or B540 blades, rotor/engine fuel control matching which was not optimized, and rotor and aircraft dynamic stability which was not representative of a possible future production configuration of OGEE blades. Therefore, most handling qualities tests in Reference 2 were deleted by the Reference 6 message.

### TEST SCOPE

6. This PAE was conducted at Coyote Flats, California (elevation 9980 feet) and Edwards Air Force Base, California (elevation 2302 feet) from 1 November 1979 through 8 April 1980. Forty-five tests flights were flown for a total of 36.6 productive test hours (63.2 total flight hours). Flight restrictions contained in the operator's manual (Ref 4, App A) and the airworthiness release (Ref 7) were observed during the tests. Tests were conducted primarily with the OGEE blades installed. Some comparison flights were made with the K747 blades installed. Additional flights were made in support of the Aeromechanics Lab to gather acoustics data. Results of those acoustics measurements will be reported by the Aeromechanics Lab under a separate cover. Test conditions are shown in Table 1.

Table 1. Test Conditions<sup>1</sup>

Type of Test	Avg Gross Weight (lb)	Avg Long CG (FS)	Avg Density Altitude (ft)	Avg OAT (°C)	Avg Rotor Speed (RPM)	Thrust Coefficient	Rotor Blades
Hover performance <sup>2</sup>	7300 to 8060	196.0	10000	-3.5 to 8.0	300 to 325	0.003720 to 0.006750	OGEE
			400	-2.0			
Level Flight Performance <sup>3</sup>	8280	195.1	6000	10.0	321	0.004959	OGEE
	8680	193.6	6580	6.5	319	0.005358	
	8860	194.0	10320	1.0	315	0.006299	
	8700	194.2	8980	-1.5	314	0.005969	K747
Low-speed flight	8480	195.0	10520	2.5	324	N/A	OGEE

Notes: <sup>1</sup>All tests were flown in clean wing configuration.

<sup>2</sup>Hover performance tests were flown out-of-ground effect using the tether technique while varying main rotor speed.

<sup>3</sup>Level flight performance tests were flown at a constant referred main rotor speed of 324 RPM.

<sup>4</sup>Average thrust coefficient. Thrust coefficient varied with fuel burn off during flight.

## TEST METHODOLOGY

7. The flight test techniques and data reduction procedures used during this evaluation are described in Appendix D or the appropriate Results and Discussions section of this report. Data were obtained from instrumentation displayed on the pilot and copilot/engineer panels and recorded on magnetic tape. The on-board data acquisition system is further described in Appendix C.

# RESULTS AND DISCUSSIONS

## GENERAL

8. A PAE of the AH-1S helicopter was conducted to determine any differences in performance or handling qualities caused by the OGEE main rotor blades. Both hover and level flight performance was degraded by installation of the OGEE blades. Except for low-speed characteristics (which were unchanged) the handling qualities were not evaluated.

## PERFORMANCE

### Hover Performance

9. Out-of-ground effect (OGE) hover performance testing was accomplished with OGEE blades at 9980-foot and 2302-foot elevations using the tethered hover method. With K747 blades, limited hover testing was conducted at the 2302-foot elevation site to verify the performance data presented in Reference 8, Appendix A. This data fell within the scatter of the data presented in Reference 8. Results of the hover performance testing is presented in Figures 1 and 2, Appendix E.

10. Figure 1 presents the hover capability of the AH-1S on a standard day and on a 35°C day with K747 and OGEE blades. It is apparent that the hover performance is degraded by OGEE shaped blade tips. At a pressure altitude of 4000 feet with an air temperature of 35°C, the AH-1S with the OGEE blades can hover at 9056 pounds, gross weight. This represents a reduction of 315 pounds (3.5%) when compared to the K747 performance. At 10,000 feet on a standard day, the degradation is 528 pounds (5.5%).

### Level Flight Performance

11. Level flight performance testing was conducted with both K747 and OGEE blades, using the test methods described in Appendix D. Figures 3 through 9, Appendix E, present the level flight performance data.

12. A nondimensional summary of the level flight performance with OGEE blades is presented in Figures 3 through 5. Figures 6 through 8 present the test data from which the summary was derived. Figure 9 presents data gathered with the K747 blades and for comparative purposes, two curves are shown. One curve (derived from Ref 8, App A) is representative of the K747 data gathered during the program. The other is derived from Figures 3 through 5, Appendix E and represents AH-1S level flight performance with OGEE blades installed. At these conditions, an 8-knot reduction in maximum level flight speed resulted from the OGEE tip installation.

13. It should be noted that data gathered during this program with K747 blades indicate an increase in airframe drag when compared to results from Reference 8, Appendix A. The drag change was approximately 2.5 square feet of equivalent flat plate area. A portion of the drag could be attributed to the main rotor mast extension installed to accommodate instrumentation slip rings and to the associated strain gages and wiring on the hub for the OGEE test program. The rest of the drag change could be explained by a change in aircraft pitch attitude. During these tests the aircraft flew in a more nose down pitch attitude than it did at similar

conditions during Reference 8 tests. The aircraft tail boom was replaced between the tests of Reference 8 and the current tests. Although the elevator was rigged properly for both tests, other differences in the tail booms may have resulted in the change in aircraft flight attitude.

## HANDLING QUALITIES

### Low-speed Flight Characteristics

14. The low-speed flight characteristics of the AH-1S with OGEE blades installed were evaluated at the conditions listed in Table 1. Testing was performed to 30 knots true airspeed (KTAS) rearward, 35 KTAS forward, 35 KTAS in left sideward flight and 12 KTAS in right sideward flight. A ground pace vehicle was used as a speed reference. Surface wind conditions were 5 knots or less. Tests were flown in ground effect at a 10-foot skid height. The low-speed flight data are presented in Figures 10 and 11, Appendix E.

15. Longitudinal and lateral control margins were adequate at all test conditions. Directional control margin was less than 10% in right sideward flight. Inadequate directional control margin at high gross weights and high density altitudes, a previously documented shortcoming of the AH-1S series aircraft, still exists. The problem is slightly worse with OGEE blades because of the increased power required to hover (and therefore increased anti-torque tail rotor thrust requirements).

16. A directional control trim shift of more than 2 inches occurs between 10 and 20 KTAS in left sideward flight. This trim shift will make hovering in gusty left crosswinds difficult. This trim shift is a characteristic of AH-1 aircraft and is not caused by the OGEE main rotor blades.

## CONCLUSIONS

17. Both hover and level flight performance of the AH-1S are degraded by installation of OGEE main rotor blades (paras 9 and 11).

## **RECOMMENDATIONS**

18. None.

## APPENDIX A. REFERENCES

1. Letter, U.S. Army Aviation Research and Development Command (AVRADCOM), DRDAV-EQI, 8 June 1979, subject: *Preliminary Airworthiness Evaluation of the AH-1 Advanced (OGEE) Tip Shape Rotor Blades*.
2. Test Plan, U.S. Army Aviation Engineering Flight Activity (USAAEFA), Project 77-25, *Preliminary Airworthiness Evaluation of the AH-1 Advanced (OGEE) Tip Shape Rotor Blades*, July 1979.
3. Letter, AVRADCOM, DRDAV-DI, 21 August 1979, subject: Advance Test Plan, *Preliminary Airworthiness Evaluation of the AH-1 Advanced (OGEE) Tip Shape Rotor Blades*, USAAEFA Project 77-25.
4. Technical Manual, TM 55-1520-236-10, *Operator's Manual, Army Model AH-1S Helicopter*, 17 November 1976.
5. Technical Data Package for Main Rotor Blade Assembly K747-033-1 TDPR1397.
6. Message, AVRADCOM, DRDAV-DI, 131930Z March 1980, subject: Test Plan, *Preliminary Airworthiness Evaluation of the AH-1S Advanced (OGEE) Tip Shape Rotor Blades*, USAAEFA Project 77-25.
7. Letter, AVRADCOM, DRDAV-DI, 17 October 1979, (with revisions 19 October, 4 December 1979, and 27 March 1980), subject: Airworthiness Release for Airworthiness Evaluation (PAE) of the AH-1 Advanced OGEE Tip Shape Rotor Blades, USAAEFA Project No. 77-25.
8. Final Report, USAAEFA, Project No. 77-38, *Production Validation Test-Government, Kaman K747 Improved Main Rotor Blade*, to be published.
9. Final Report, US Army Aviation Test Activity (USAAVNTA) Project No. 66-06, *Engineering Flight Test AH-1G Helicopter (Hueycobra), Phase D, Part 2, Performance*, April 1970.

## APPENDIX B. AIRCRAFT DESCRIPTION

### GENERAL

1. The test helicopter, S/N 76-22573, was a production AH-1S. The AH-1S main rotor mast and hub assembly had been replaced with a mast and hub assembly from an AH-1G. The AH-1G hub was instrumented for structural loads measurements at several locations, and the mast incorporated wiring and slip rings to transmit loads information from the rotor and hub to the data systems.

### MAIN ROTOR BLADES

2. The tests were conducted with two sets of main rotor blades, the K747 blades and K747 blades modified with OGEE-shaped tips. The K747 blade tip weights were removed to facilitate installation of the OGEE tips. The OGEE blades therefore, had much lower rotational inertia than the K747 blades.

3. The blades utilize a multicell filament wound fiberglass spar, a nomex honeycomb core afterbody, and a Kevlar trailing edge spline, all enclosed by fiberglass skin. At the inboard end, cheekplates carry blade loads to an aluminum adapter which is attached to the hub with a pin.

4. The K747 blade airfoil shape is based on a family of airfoils developed by Boeing Vertol. To incorporate the OGEE-shaped tip, the outer 15% of the K747 blade was replaced by the OGEE tip (Fig 1). The airfoil shape varies from blade tip to root as follows:

#### r/R (Blade Radius Station)

#### Airfoil Design

From tip to 0.85  
From 0.85 to 0.67

(K747) 8% thick Boeing Vertol VR-8  
Linear Transition to 12% thick  
Boeing Vertol VR-7  
12% thick Boeing Vertol VR-7  
Gradual buildup to 25% thick  
by cheekplates

From 0.67 to 0.25  
From 0.25 to 0.18

### ENGINE AND TRANSMISSION/TAIL ROTOR DRIVE

5. The T53-L-703 turboshaft engine is installed in the AH-1S helicopter. This engine employs a two-stage, axial-flow free power turbine; a separate two-stage, axial-flow turbine driving a five-stage axial and one-stage centrifugal compressor; variable inlet guide vanes; and an external annular combustor. A 3.2105:1 reduction gear box located in the air inlet housing reduces power turbine speed to a nominal output shaft speed of 6600 RPM at 100 percent  $N_2$ . The engine reduction gear box is limited to 1175 foot pounds (ft-lb) torque for 30 minutes and to 1110 ft lb torque for continuous operation. A  $T_7$  interstage turbine temperature sensor harness measures interstage turbine temperatures and displays this information in the cockpit as turbine gas temperature on the cockpit instruments.



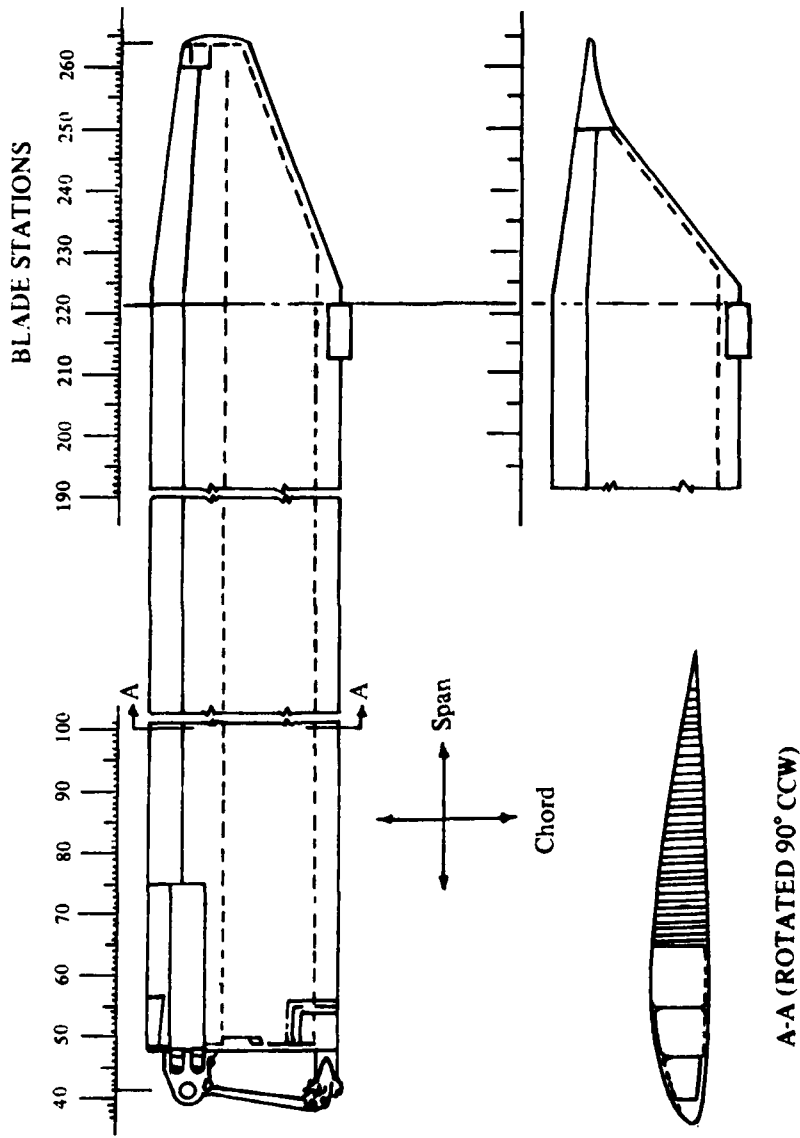


FIGURE 1  
K747 - 003 IMPROVED MAIN ROTOR BLADE  
AND OGEE TIP SHAPE

6. The main transmission has a 1290 SHP limit for 30 minutes and a 1134 SHP limit for continuous operation at a rotor speed of 324 RPM (100 percent  $N_{opt}$ ). The aircraft is further limited to 88% torque above 100 knots indicated airspeed (KIAS). The tail rotor drive system has a 260 SHP transient limit for 4 seconds and a 187 SHP limit for continuous operation. The engine used during this test had serial number LE 13145Z.

### PRINCIPAL DIMENSIONS

7. The principal dimensions and general data concerning the AH-1S helicopters are as follows:

#### Overall Dimensions

Length, rotor turning	53 ft, 1 in (K747)
	53 ft, 1.35 in (OGEE)
Height, tail rotor vertical	13 ft, 9.0 in
Length, rotors removed	44 ft, 7 in

#### Main Rotor

	<u>K747</u>	<u>OGEE</u>
Diameter	44 ft	44 ft, 0.7 in
Disc area	1520.5 ft <sup>2</sup>	1524.6 ft <sup>2</sup>
Number of blades	2	2
Blade chord	See Figure 1	See Figure 1
Blade twist	-0.556 deg/ft	-0.556 deg/ft
Airfoil	See paragraph 2	See paragraph 2

#### Tail Rotor

Diameter	8 ft, 6 in
Disc area	56.75 ft <sup>2</sup>
Solidity	0.1436
Number of blades	2
Blade chord, constant	11.5 in
Blade twist	0.0 deg/ft
Airfoil	NACA 0018 at the blade root changing linearly to a special cambered section at 8.27 percent of the tip

#### Fuselage

Length: 44 ft, 7 in

#### Height:

To tip of tail fine	10 ft, 8 in
Ground to top of mast	12 ft, 3 in
Ground to top of transmission fairing	10 ft, 2 in

**Width:**

Fuselage only	3 ft
Wing span	10 ft, 9 in
Skid gear tread	7 ft

**Elevator:**

Span	6 ft, 11 in
Airfoil	Inverted Clark Y

**Vertical Fin:**

Area	18.5 ft <sup>2</sup>
Airfoil	Special cambered
Height	5 ft, 6 in

**Wing:**

Span	10 ft, 9 in
Incidence	17 deg
Airfoil (root)	NACA 0030
Airfoil (tip)	NACA 0024

8. A flight control rigging check performed in accordance with procedures outlined in TM 55-1520-234-20 demonstrated that the cyclic collective pitch, and directional controls, and the elevator were within prescribed limits. The swashplate angles measured with respect to aircraft axes and tail rotor blade pitch angles are as follows:

**SWASHPLATE ANGLES**

<u>Control Position</u>	<u>Lateral Angle</u>	<u>Longitudinal Angle</u>
Neutral	1.5 deg L down	1.0 deg nose up
Full Forward	5.0 deg R down	10.0 deg nose down
Full AFT	5.0 deg R down	12.5 deg nose up
Full Right	7.0 deg R down	4.5 deg nose up
Full Left	7.5 deg L down	3.5 deg nose down

**TAIL ROTOR BLADE PITCH ANGLES**

<u>Pedal Position</u>	<u>Blade Angle</u>
Full Left	19.9 deg
Full Right	-11.0 deg

### Weight and Balance

9. The aircraft weight, longitudinal center-of-gravity (cg) location and lateral cg location were determined prior to testing and checked periodically throughout the tests. A fuel cell calibration was also performed prior to testing. All weighings were accomplished with instrumentation installed without external stores or chin turret weapons installed.

10. The fuel loading for each test flight was determined prior to engine start and following engine shutdown by using a calibrated external sight gage to determine fuel volume and by measuring the fuel specific gravity. Fuel used in flight was recorded by a sensitive fuel-used system and verified with the pre- and postflight sight gage readings.

## APPENDIX C. INSTRUMENTATION

1. The test instrumentation system was installed, calibrated, and maintained by USAAEFA. Data were obtained from calibrated instrumentation and recorded on magnetic tape and/or displayed in the cockpit. The digital instrumentation system consisted of various transducers, signal conditioning units, a 10-bit PCM encoder, with a sample rate of 200 samples per second, and a magnetic tape recorder. The data were also telemetered to a ground station for monitoring/test control. Time correlation was accomplished with pilot/engineer event switches, and on-board recorded and displayed Inter Range Instrumentation Group (IRIG) B time. Additionally, during the acoustics measurement flights, a "beep" tone was transmitted once per main rotor revolution from the AH-1S to the Y0-3A over an FM radio frequency. The tone was generated when one main rotor blade was at the 82.75 degree azimuth position (measured from the nose in the direction opposite to rotor rotation).

2. Cockpit displayed parameters and special equipment are listed below:

### Pilot Station

Pressure altitude (boom)  
Pressure altitude (ship)  
Airspeed (boom)  
Airspeed (ship)  
Main rotor speed  
Engine torque  
Engine turbine gas temperature  
Engine gas producer speed  
Angle of sideslip  
Event switch  
Tether cable angles (longitudinal and lateral)

### Copilot/Engineer Station

Airspeed (boom)  
Altitude (boom)  
Main rotor speed  
Engine torque  
Engine gas producer speed  
Total air temperature  
Fuel used  
Cable tension  
Time code display  
Event switch  
Data system controls

3. Parameters recorded on magnetic tape were as follows:

### PCM Parameters

Time code  
Event  
Flight number

Run number  
Main rotor speed  
Fuel temperature  
Fuel used  
Engine fuel flow rate  
Engine gas producer speed  
Engine power turbine speed  
Airspeed (boom)  
Altitude (boom)  
Total air temperature  
Angle of attack  
Angle of sideslip  
Tether cable tension  
Tether cable angle (longitudinal and lateral)  
Engine torque  
Engine exhaust gas temperature  
Control positions  
    Longitudinal cyclic  
    Lateral cyclic  
    Pedal  
    Collective  
Aircraft attitudes  
    Pitch  
    Roll  
Aircraft angular velocities  
    Pitch  
    Roll  
    Yaw  
Center-of-gravity accelerations  
    Vertical  
    Lateral  
    Longitudinal  
Main rotor hub flapwise bending moment  
    At station 5 (both blades)  
    At station 8 (both blades)  
    At station 11 (one blade)  
    At station 20 (one blade)  
    At station 37 (one blade)  
    At station 68 (one blade)  
Main rotor pitch link axial load  
Main rotor drag brace axial load (both blades)  
Main rotor shaft torque  
Main rotor blade angle

## APPENDIX D. TEST TECHNIQUES AND DATA ANALYSIS METHODS

### GENERAL

1. Helicopter performance test data were generalized by use of nondimensional coefficients. The purpose of this generalization was to accurately predict performance at aircraft gross weight/ambient air condition combinations not specifically tested. The following coefficients were used:

- a. Coefficient of power ( $C_P$ ):

$$C_P = \frac{\text{SHP} \times 550}{\rho A (\Omega R)^3} \quad (1)$$

- b. Coefficient of thrust ( $C_T$ ):

$$C_T = \frac{\text{GW}}{\rho A (\Omega R)^2} \quad (2)$$

- c. Advance ratio ( $\mu$ ):

$$\mu = \frac{1.6878 \times V_T}{\Omega R} \quad (3)$$

- d. Advancing tip mach number ( $M_{TIP}$ ):

$$M_{TIP} = \frac{1.6878 V_T + \Omega R}{a} \quad (4)$$

Where:

SHP = Engine output shaft horsepower

550 = Conversion factor (ft-lb/sec/SHP)

$\rho$  = Air density (slugs/ft<sup>3</sup>)

A = Main rotor disc area (ft<sup>2</sup>)

$\Omega$  = Main rotor angular velocity (rad/sec)

R = Main rotor radius

GW = Gross weight (lb)

1.6878 = Conversion factor (ft/sec/kt)

$V_T$  = True airspeed (kt)

$a$  = Speed of sound (ft/sec)

2. Engine output SHP was determined from the engine torque pressure. Torque pressure as a function of the power output of the engine was obtained from the engine manufacturer's test cell calibration. Horsepower was determined by the following equation:

$$SHP = \frac{N \times GR \times T_q}{63025} \quad (5)$$

Where:

$N$  = Main rotor speed (RPM)

$GR$  = Engine to main rotor gear ratio = 20.38362

$T_q$  = Engine output shaft torque (in-lb)

63025 = Conversion factor (in-lb rev/min/SHP)

3. Shaft horsepower available and specification fuel flow were obtained from Lycoming Model Specification T53-L-703 (LTCJK-4G) Mo. 104-43 by using computer program file number LS19.04.32.00 dated 1 May 1974 and the inlet characteristics described in Reference 9, Appendix A.

#### HOVER PERFORMANCE

4. The tethered method of hover performance testing was used. This method required that the aircraft be at a very light gross weight, that it be tied to the ground by a 100-foot cable, and that a load cell be used to measure cable tension. During the test, the cable was kept taut and vertical at all times. To get a maximum variation of  $C_T$  (equation 2), rotor speed and cable tension were varied during the test. The technique used to vary cable tension was to set various torque settings from minimum required to hover out-of-ground effect (OGE) to the maximum allowed at the test conditions. Cable angle was displayed to the pilot in the cockpit in order to maintain the aircraft directly over the ground tie-down point.

5. The data were plotted as  $C_p$  versus  $C_T$  using equations 1 and 2. The gross weight in equation 2 was determined by adding cable tension to the engine start gross weight, and then subtracting the weight of the fuel burned prior to each data point. The data points obtained with the OGEE tip-shape blades were then fitted with a curve using a multiple linear regression program. The equation of the resulting line is:

$$C_p = 0.000126 + 0.495915 C_T^{3/2} + 1203.1898 C_T^3 \quad (6)$$

This equation is valid only for the range of  $C_T$  actually tested and should not be used to extrapolate to higher or lower values of  $C_T$ .



## LEVEL FLIGHT PERFORMANCE

6. Each level flight performance flight was designed to obtain one curve of  $C_p$  versus  $\mu$  at a constant value of  $C_T$ . The flight technique was to stabilize at zero sideslip at incremental airspeeds from approximately 40 KIAS to the maximum attainable. Torque, altitude, airspeed, and rotor speed were held constant at each airspeed for at least 1 minute prior to recording data. Altitude was increased between data points as a function of fuel burnoff in order to maintain a constant ratio of gross weight to air pressure ratio ( $GW/\delta$ ). Also, rotor speed ( $N$ ) was varied as a function of ambient air temperature in order to maintain a constant ratio of rotor speed to square root of the air temperature ratio ( $N/\sqrt{\theta}$ ). By rearranging equation 2 as follows:

$$C_T = \frac{GW/\delta}{\rho_o A \left(\frac{2\pi R}{60}\right)^2 \left(\frac{N}{\sqrt{\theta}}\right)^2} \quad (7)$$

it can be seen that  $C_T$  will also be constant if  $GW/\delta$  and  $N/\sqrt{\theta}$  are constant. During these tests, the target  $GW/\delta$  was different for each flight in a given aircraft configuration, but the target  $N/\sqrt{\theta}$  was 324 RPM for all flights. The reason for maintaining constant  $N/\sqrt{\theta}$  was to minimize the difference in compressibility effects between flights.

7. Airspeed and altitude were obtained from a boom-mounted pitot-static probe. Corrections for position error determined during Reference 8 testing were applied.

8. For the OGEE blade data, the  $C_p$  versus  $\mu$  curves were cross plotted as  $C_p$  versus  $C_T$  with lines of constant  $\mu$ . From these curves (Figs 3 through 5, App E) level flight performance at any combination of gross weight, rotor speed, pressure altitude, and air temperature can be determined.

9. Measured (test) level flight power for both sets of rotor blades was corrected to the average dimensional (standard) conditions by assuming that the test dimensionless parameters,  $C_p$ ,  $C_T$ , and  $\mu_t$  are independent of atmospheric conditions. Consequently, the standard dimensionless parameters  $C_p$ ,  $C_T$ , and  $\mu_s$  are identical to  $C_p$ ,  $C_T$ , and  $\mu_t$ , respectively. From the definition of equation 1 the following relationship can be derived:

$$SHP_s = SHP_t \times \frac{\rho_s}{\rho_t} \times \left(\frac{\Omega_s}{\Omega_t}\right)^3 \quad (8)$$

Where:

t = Test day (measured)

s = Standard day (corrected)

For K747 blade data, a curve of  $C_p$  versus  $\mu$  was obtained from Reference 8 at the appropriate value of  $C_T$ . The data was then corrected for a drag increase of

2.5 square feet. A similar correction for  $V_T$  could be derived from the definition of  $\mu$  (equation 3). This correction was insignificant and therefore not made.

10. Specific range was calculated using measured values of  $V_T$  and fuel flow as follows:

$$\text{NAMPP} = \frac{V_T}{W_f}$$

Where:

NAMPP = Specific range (nautical air miles per pound of fuel)

$W_f$  = Fuel flow (lb/hr)

# APPENDIX E. TEST DATA

## INDEX

<u>Figure</u>	<u>Figure Number</u>
Summary Hover Performance	1
Nondimensional Hover Performance	2
Nondimensional Level Flight Performance	3 through 5
Level Flight Performance	6 through 9
Low-Speed Flight Characteristics	10 and 11

**FIGURE 1**  
**STEEL PLATE BEHAVIOR**  
**UNDER COMPRESSION**  
**FOR 1/2" THICK PLATES**  
**SPACED AT 24" ON CENTER**

- NOTES:**
1. RIGID END RESTRAINTS
  2. SHEAR STRESS = 1000 PSI
  3. END MOMENT ON COLUMN  
 IS 1/2 THE MOMENT AT  
 JOINT

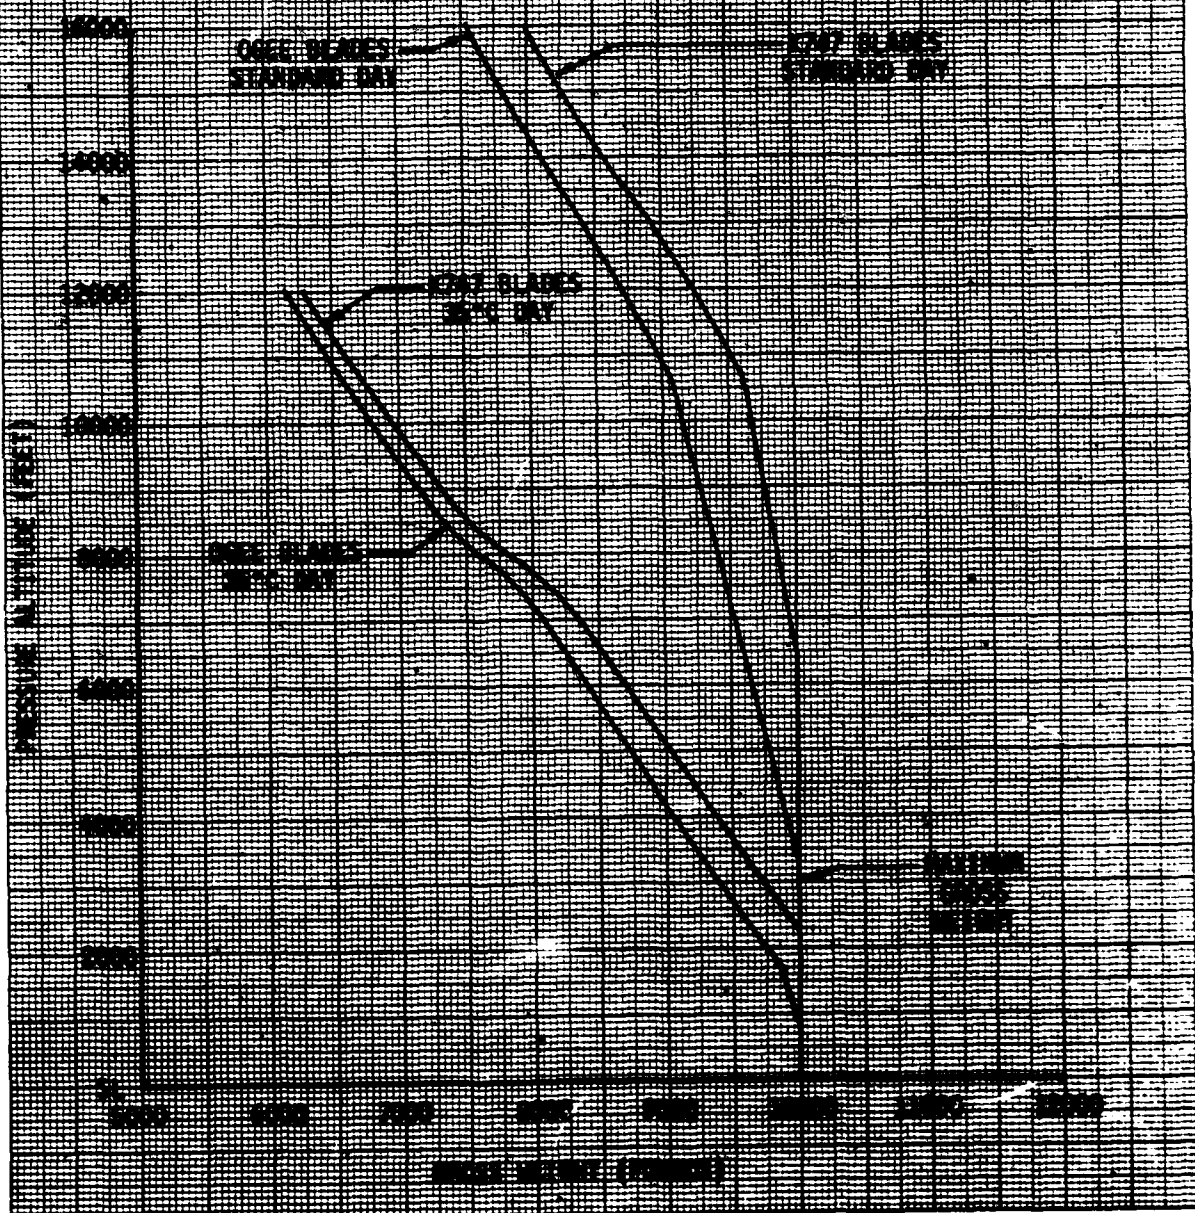


FIGURE 1  
 PERFORMANCE OF OCEE BLADES  
 AND K747 BLADES (REF. 2)  
 AT 1000 RPM

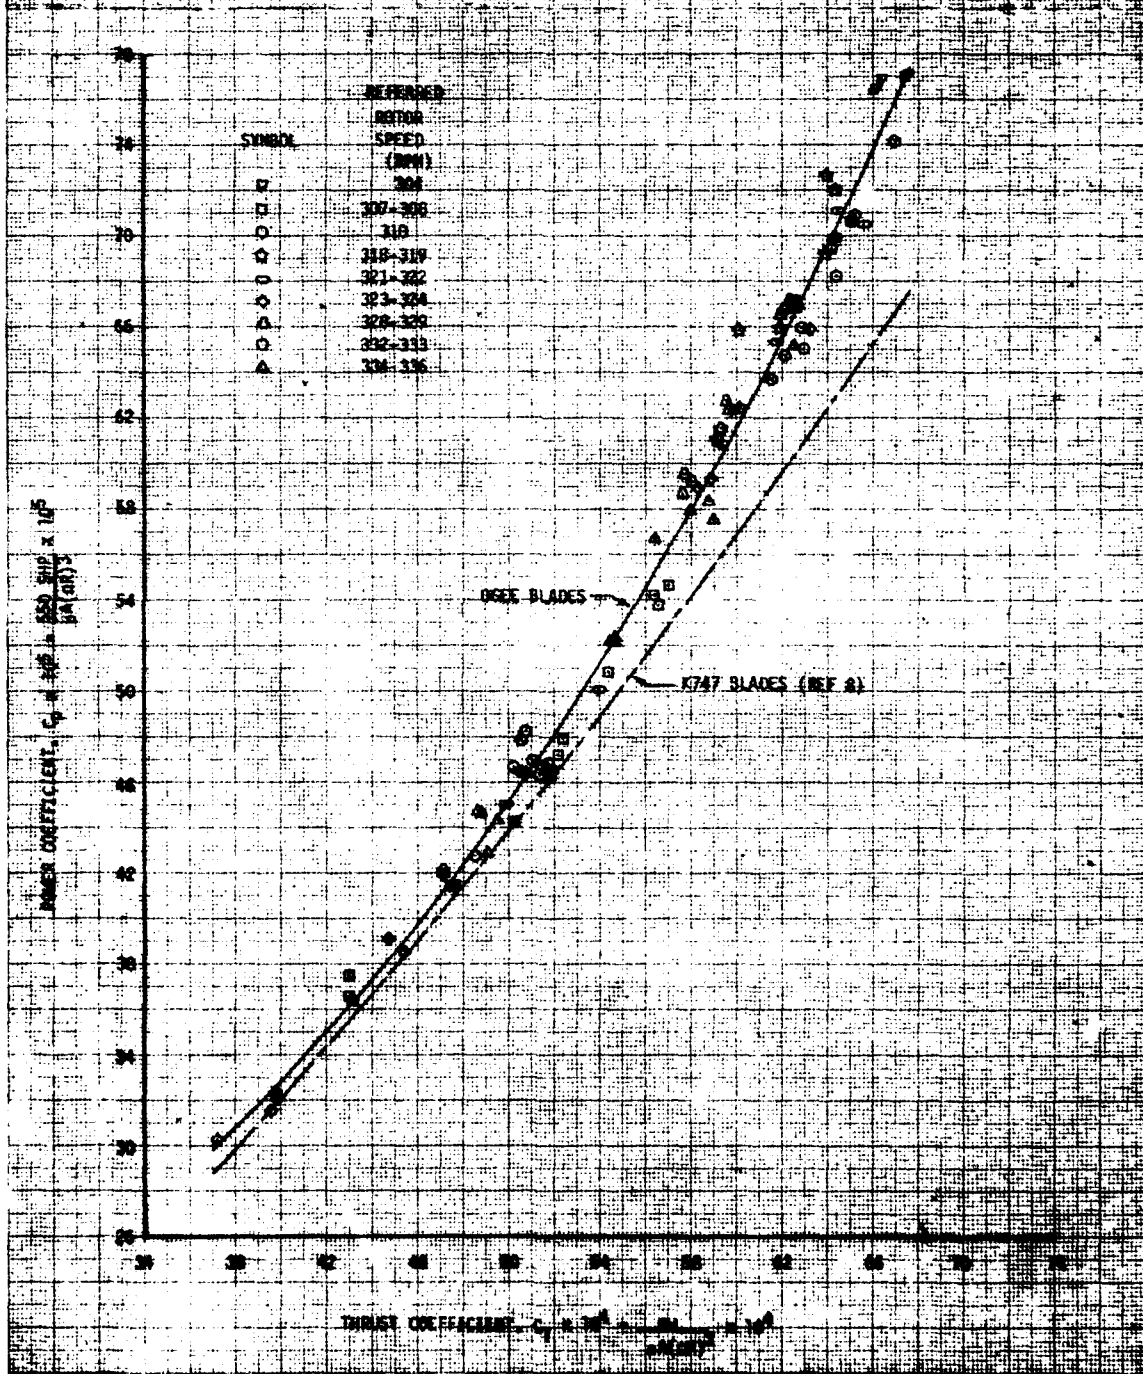


FIGURE 3  
 NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE  
 JAN-75 USA S/N 75-22572

- NOTES:
1. 1740 RPM WITH ONE TERA
  2. REFERRED ROTOR SPEED = 321 RPM
  3. FORWARD LONGITUDINAL CG
  4. CLEAN CONFIGURATION
  5. CURVES DERIVED FROM FIGS. 4 THROUGH 8
  6. ZERO SIDESLIP


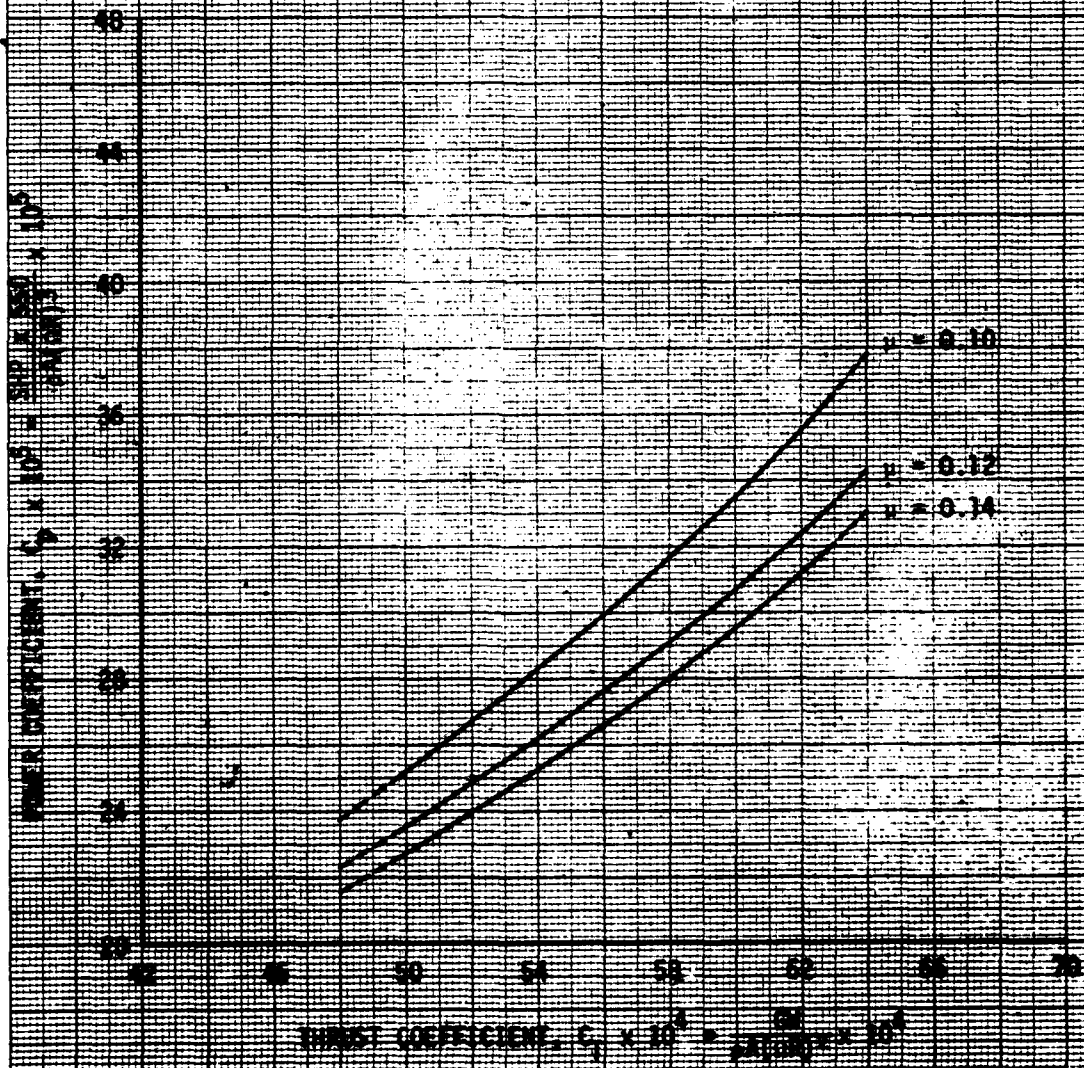


FIGURE 4  
 NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE  
 JAH-19 USA S/N 76-22573

- NOTES: 1. K747 BLADES WITH OGEE TIPS  
 2. REFERRED ROTOR SPEED = 324 RPM  
 3. FORWARD LONGITUDINAL CG  
 4. CLEAN CONFIGURATION  
 5. CURVES DERIVED FROM FIGS. 6 THROUGH 8  
 6. ZERO SIDESLIP

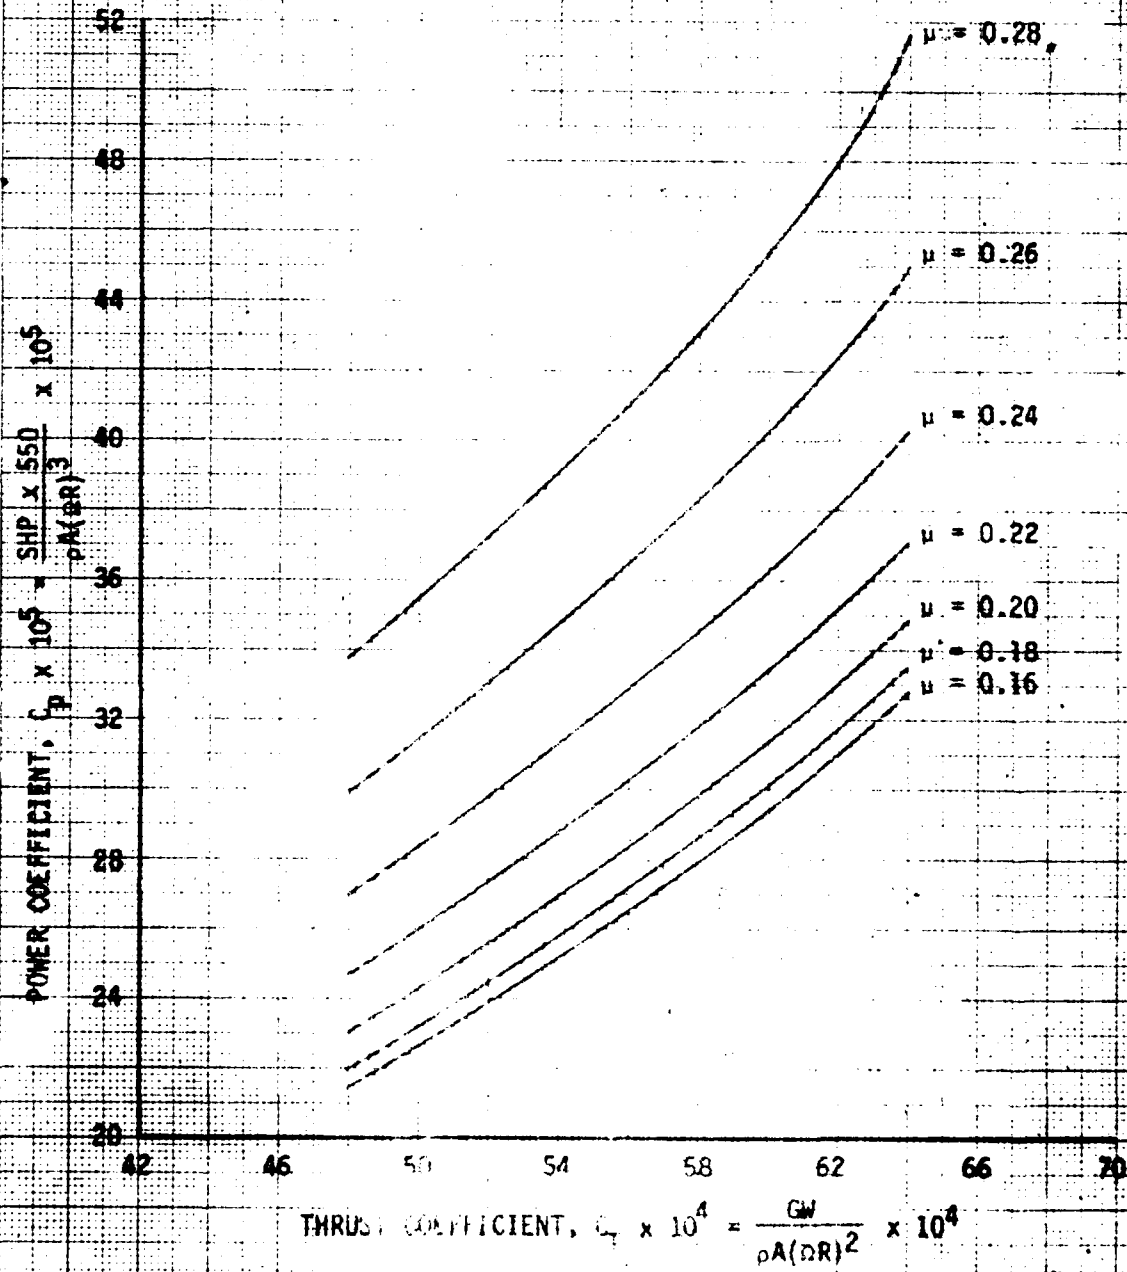

**FIGURE 1**  
**NONDIMENSIONAL THRUST PERFORMANCE**  
 JAN 53 USA 520 70-2573

- NOTES:**
1. K247 BLADES WITH DART TYPE
  2. REFERRED ROTOR SPEED = 200 RPM
  3. FORWARD LONGITUDINAL CG
  4. CLEAN CONFIGURATION
  5. CURVES DERIVED FROM FIGS. 3 THROUGH 8
  6. ZERO SIDESLIP

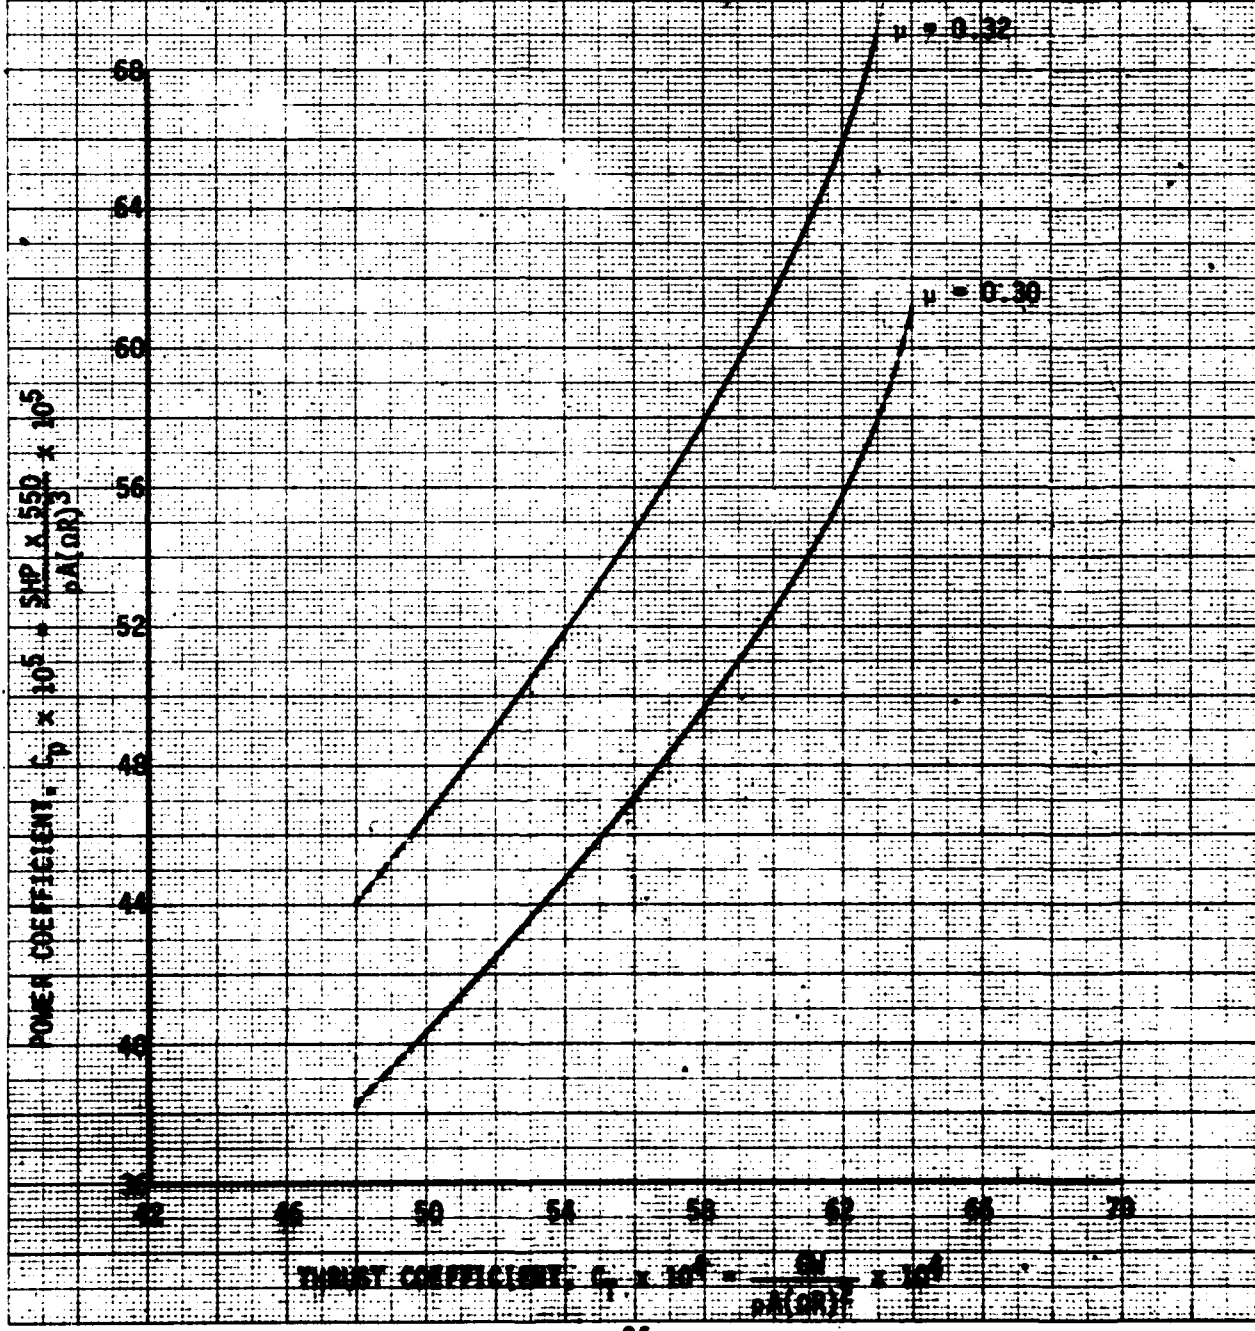
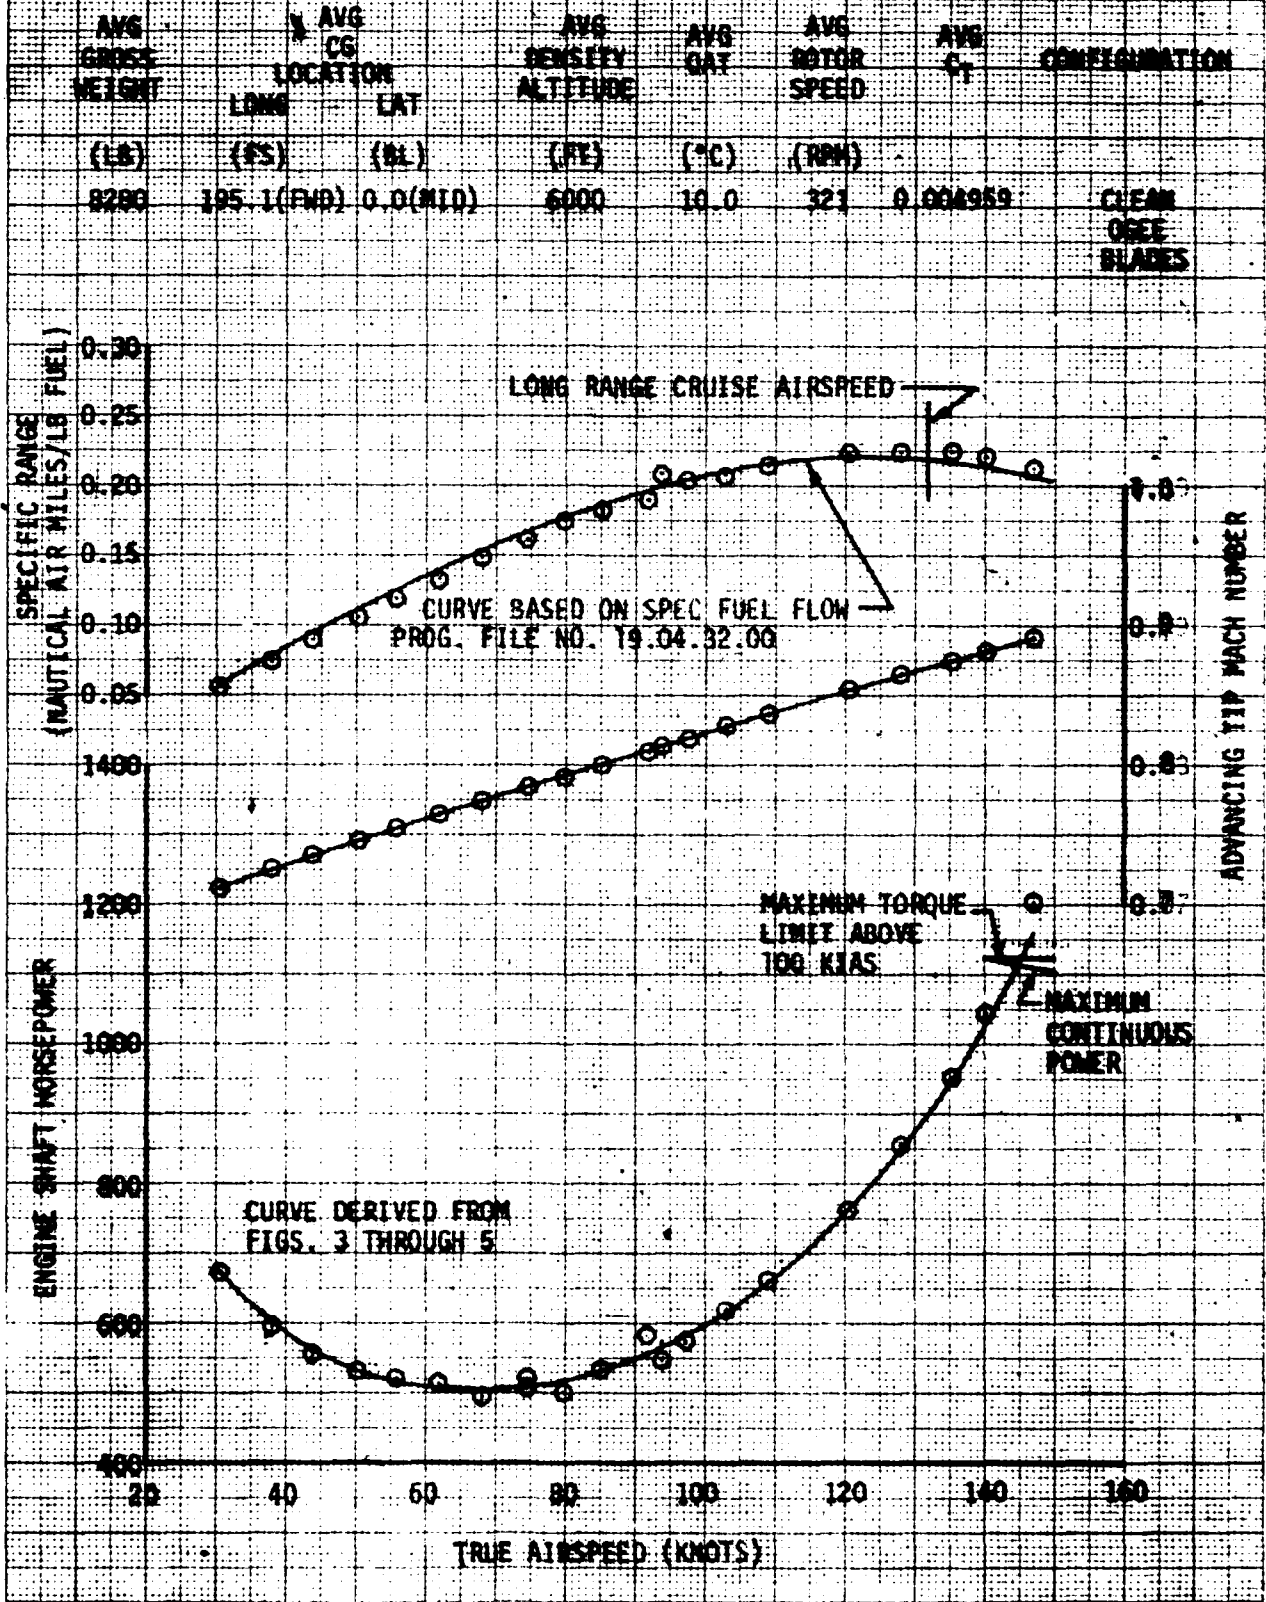


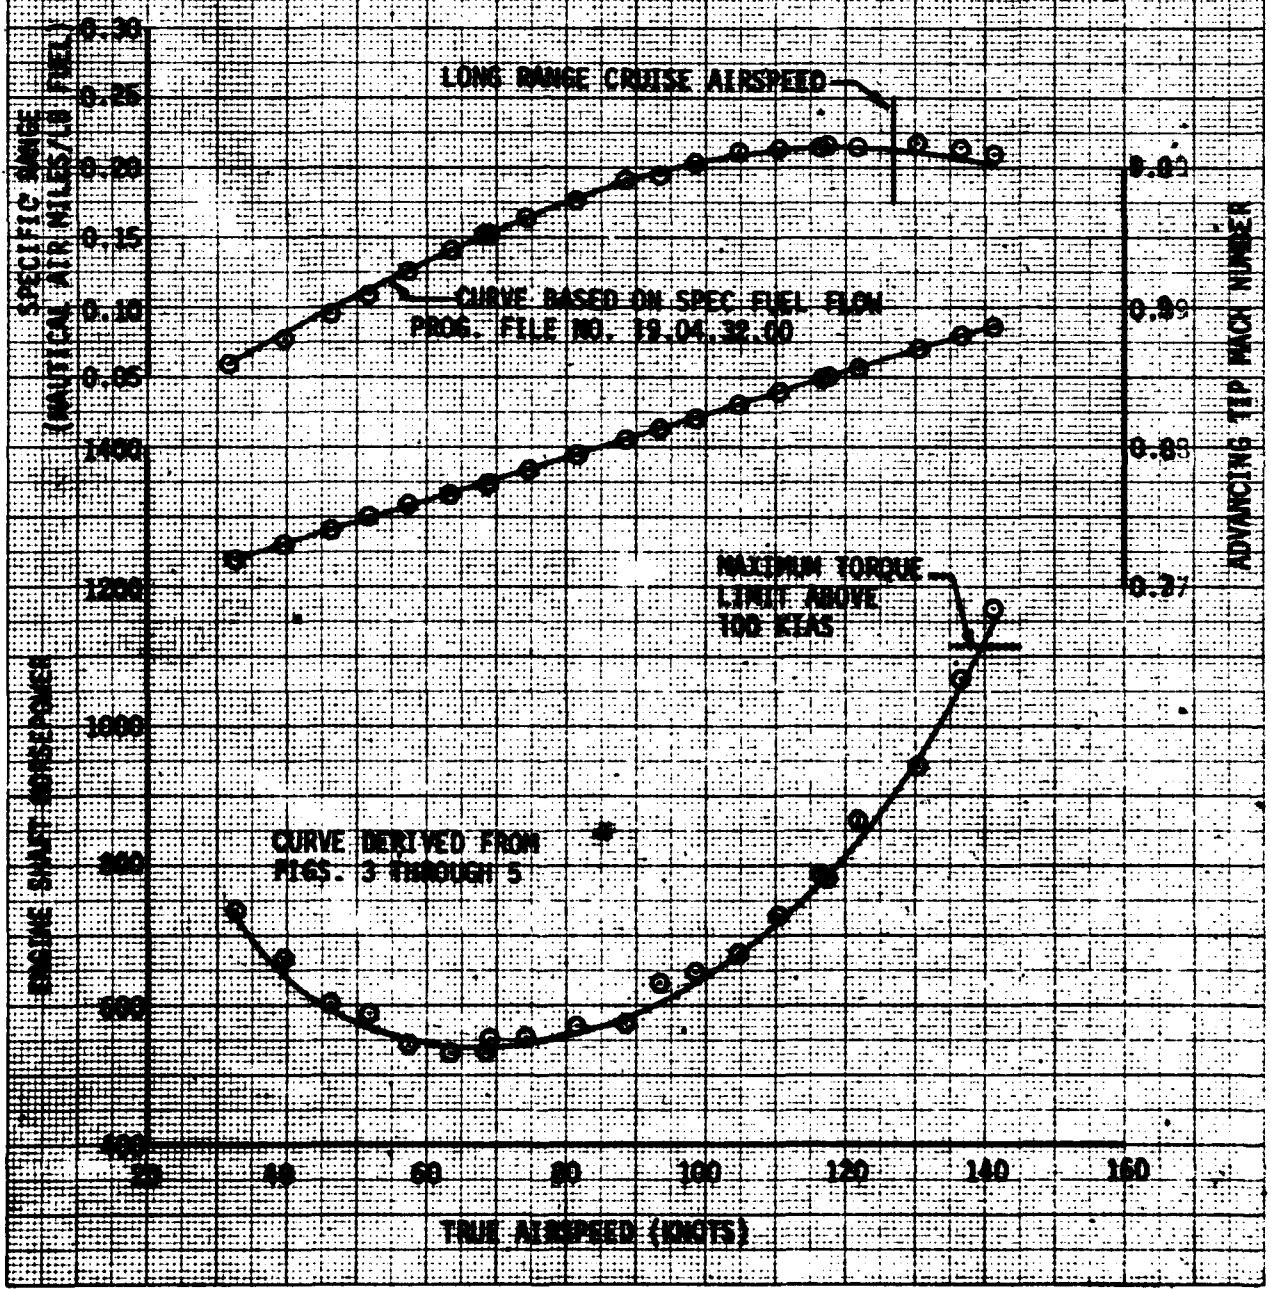


FIGURE 6  
 LEVEL FLIGHT PERFORMANCE  
 JAH-15 USA 5/8 76-22573  
 T53-L-702 57W LET3145Z




**TABLE 7  
LEVEL FLIGHT PERFORMANCE  
ON 12 SEP 19 75-2373  
153-0 703 578 1515Z**

AVG GROSS WEIGHT	AVG LOCATION	AVG WIND DIRECTION ALTITUDE	AVG WIND SPEED	AVG MOTOR SPEED	AVG C <sub>T</sub>	CONFIGURATION
(LB)	(LONG LAT)	(KT)	(KT)	(RPM)		
5500	103.6(140) 0.0(110)	6500	4.5	319	0.006358	CLEAN OBEK BLADES



**FIGURE 3  
LEVEL FLIGHT PERFORMANCE  
JAH-15 USA S/N 74-22573  
Y63-L-703 S/N 131852**

AVG EMPTY WEIGHT	AVG CG LOCATION		AVG DENSITY ALTITUDE	AVG DAY	AVG ROTOR SPEED	AVG C <sub>T</sub>	CONFIGURATION
(LB)	(FS)	(BL)	(FT)	(°C)	(RPM)		
8860	194.0(FWD)	0.0(MID)	10320	1.0	315	0.006299	CLEAN OGEE BLADES

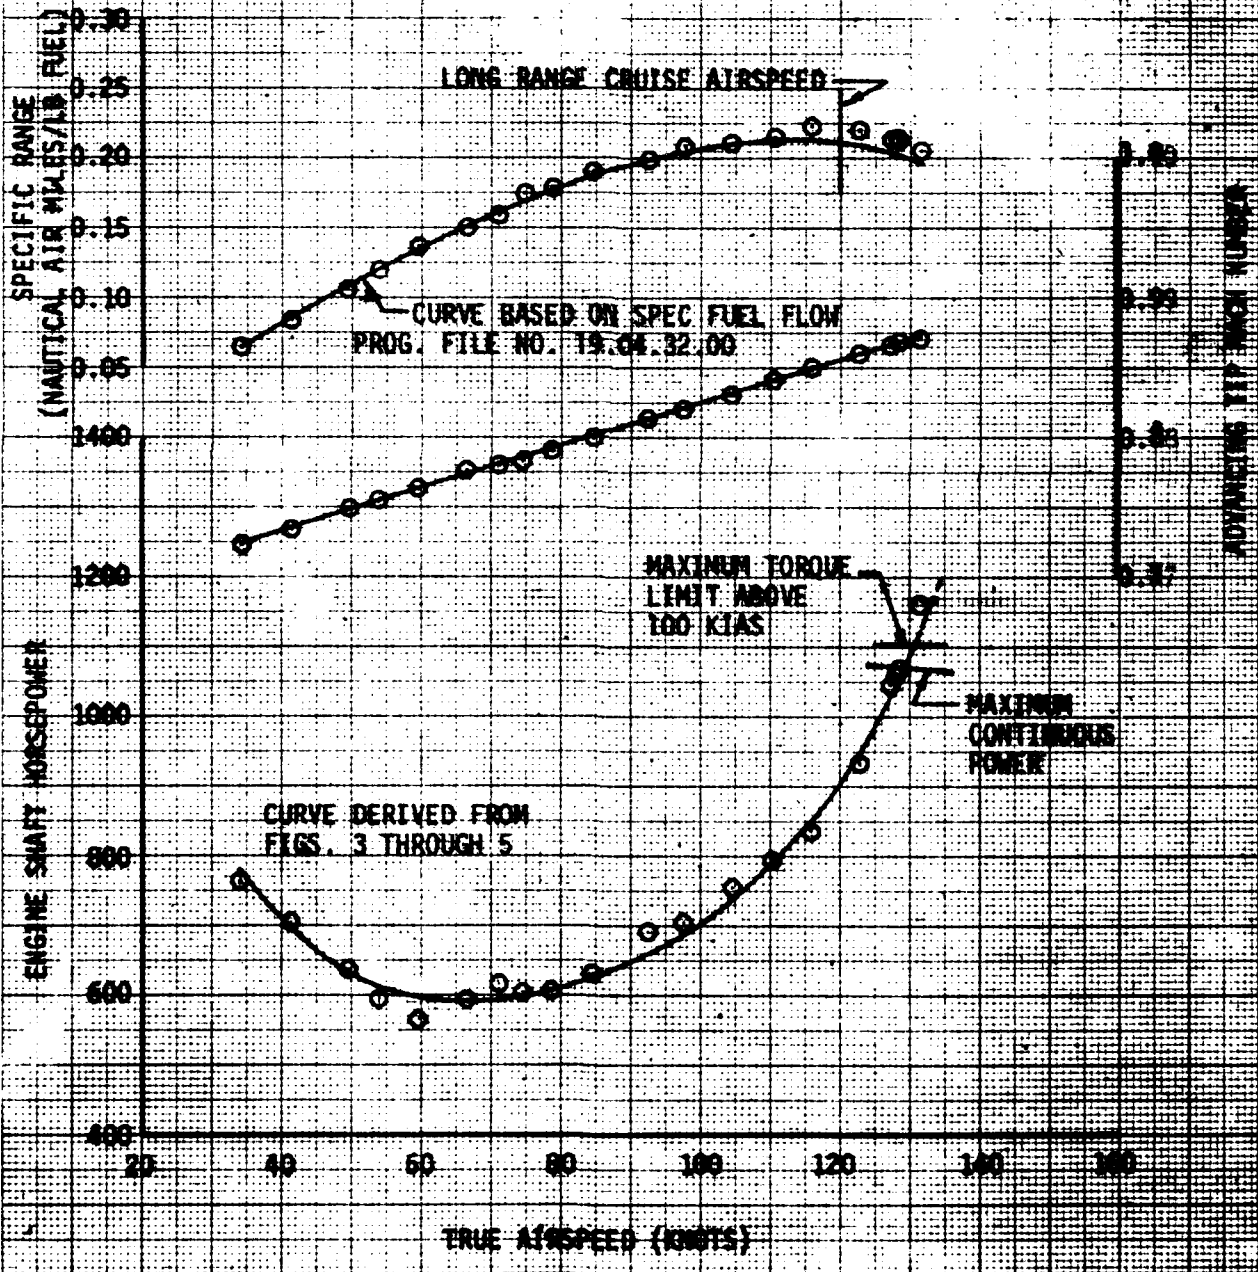

**FIGURE 9  
LEVEL FLIGHT PERFORMANCE  
JAN 15 USA 1/11 76-22873  
153-L-703 5/11 131452**

AVE GROSS WEIGHT (LB)	AVE CG LOCATION (LONG (FS) LAT (DL))		AVE DENSITY ALTITUDE (FT)	AVE OAT (°C)	AVE MOTOR SPEED (RPM)	AVE $C_T$	CONFIGURATION
8700	194.2 (IND)	0.0 (IND)	8980	-1.5	314	0.005969	CLEAN K767 BLADES


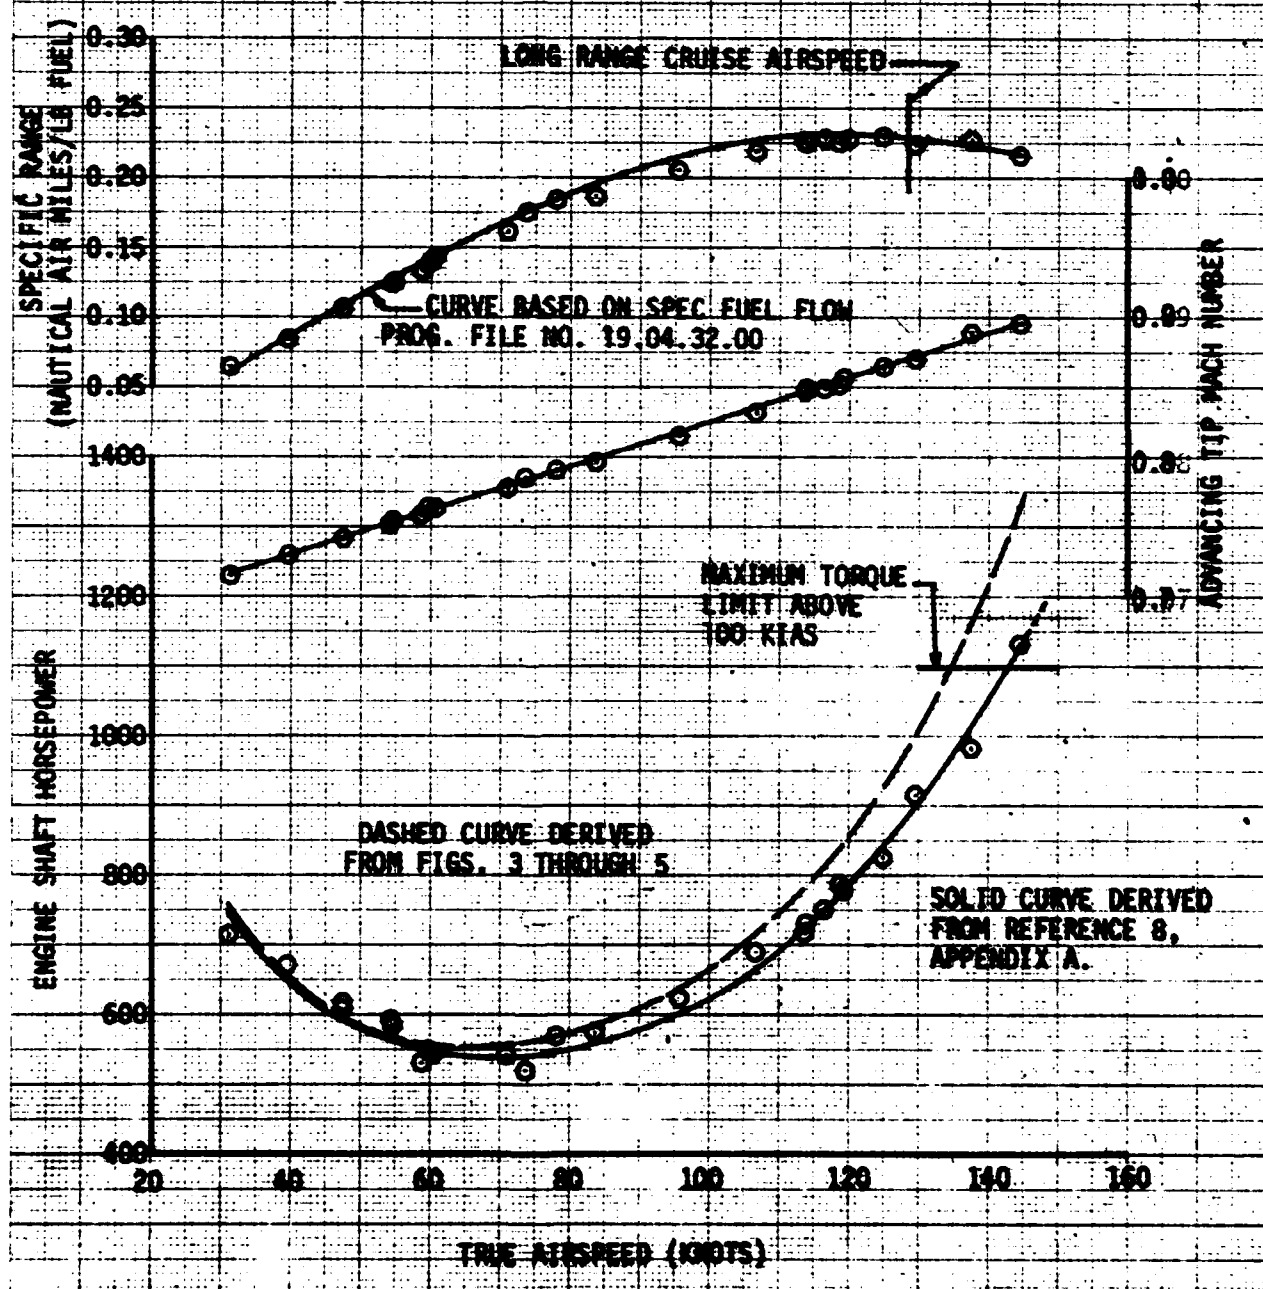


FIGURE 10  
LOW SPEED STAGNANT FLIGHT  
SAS-20 (NASA 174-22-72)

Avg GROSS WEIGHT (LB)	Avg CG LOCATION (IN)	Avg DENSITY ALTITUDE (FT)	Avg OAT (°C)	Avg ROTOR SPEED (RPM)
8760	1953	10400	1.5	324


NOTE: 1. CLEAR CONFIGURATION  
2. ONE BLADES INSTALLED

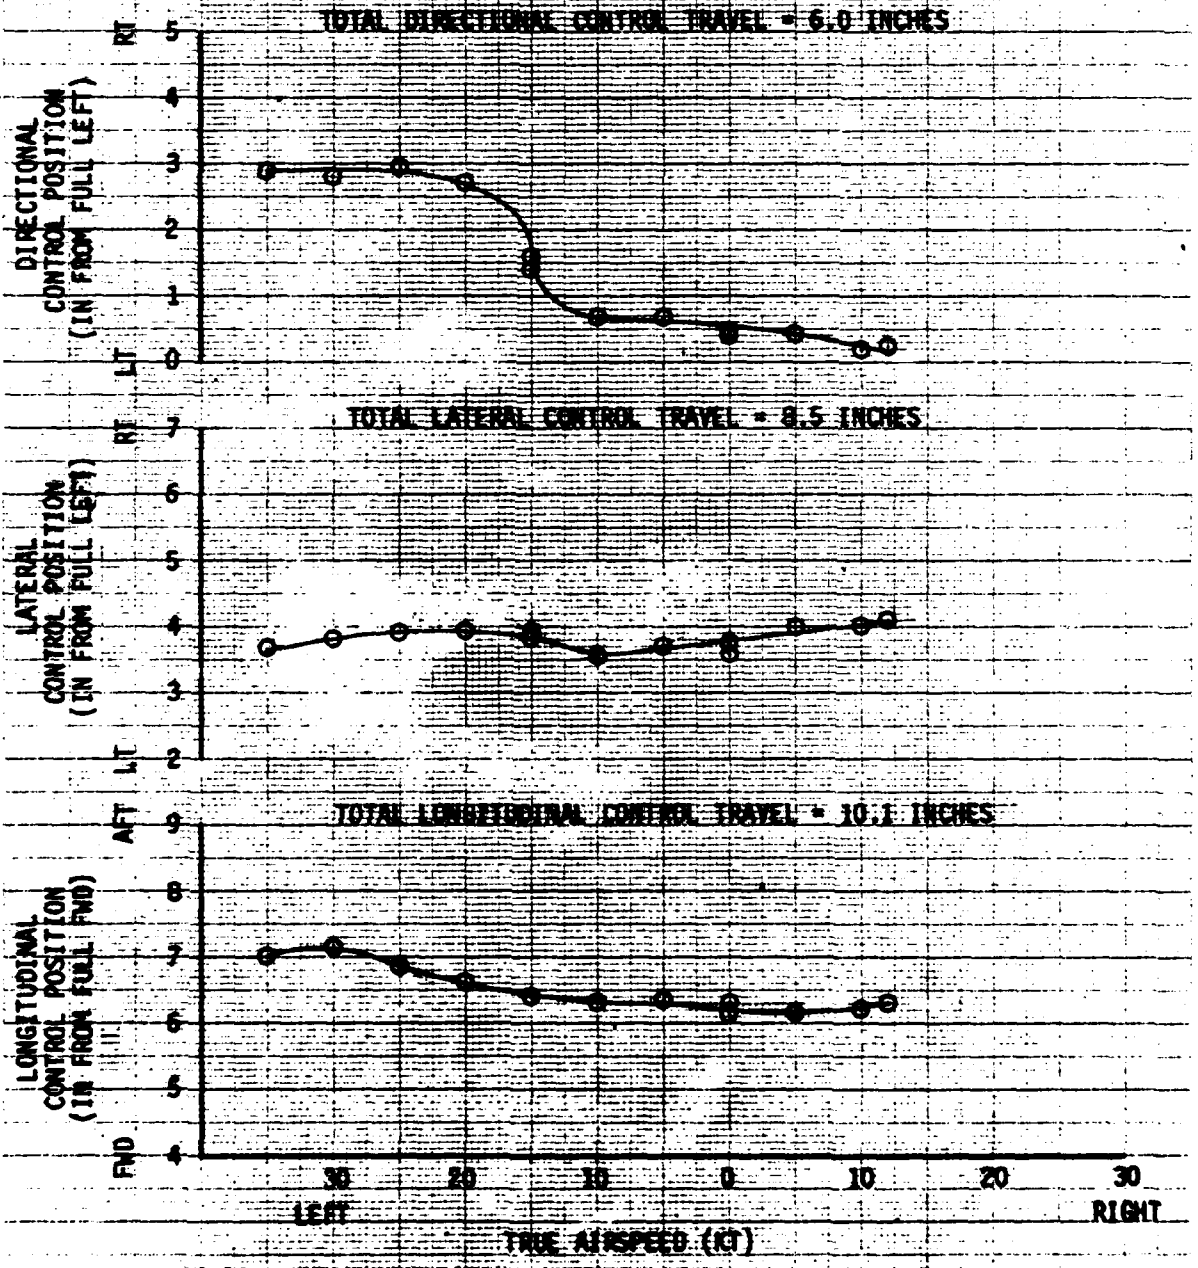

**FIGURE 11**  
**LOW SPEED FORWARD AND REARWARD FLIGHT**  
 JAN 15 1954 S/N 76-23573-77

Avg GROSS WEIGHT (LB)	Avg CG LOCATION (FS)	Avg DENSITY ALTITUDE (FT)	Avg OAT (°C)	Avg ROTOR SPEED (RPM)
8220	194.7	10640	3.5	324

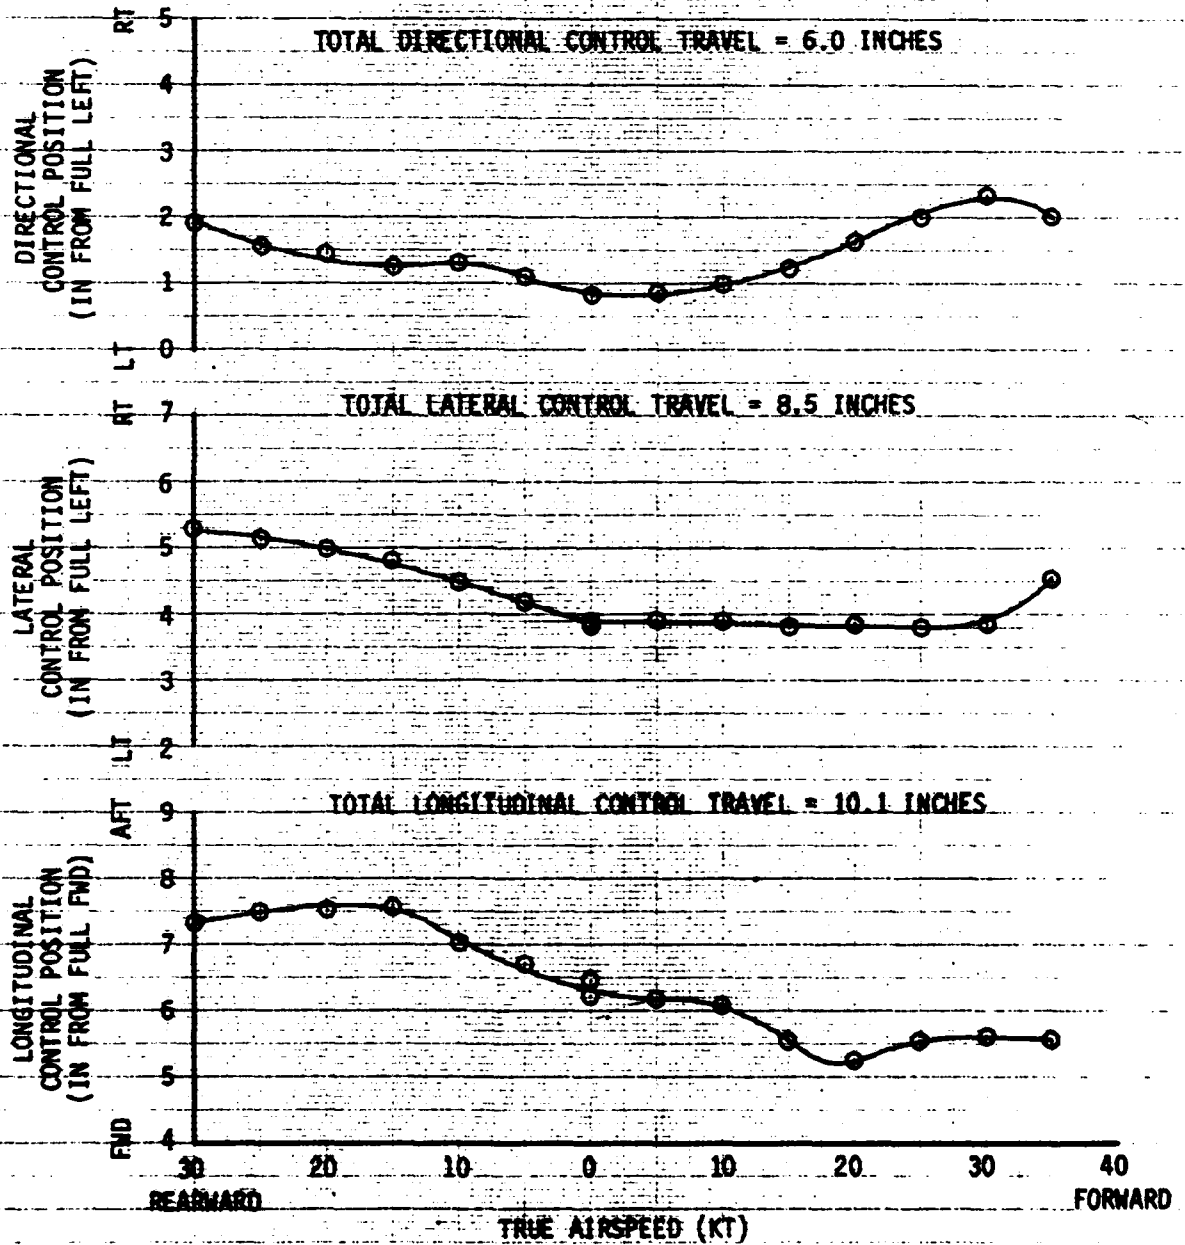NOTE: 1. CLEAN CONFIGURATION  
 2. OGEE BLADES INSTALLED



## DISTRIBUTION

Assistant Secretary of the Army (R&D)	1
Deputy Chief of Staff for Logistics (DALO-SMM)	1
Deputy Chief of Staff for Operations (DAMO-RQ)	1
Deputy Chief of Staff for Personnel (DAPE-HRS)	1
Deputy Chief of Staff for Research Development and Acquisition (DAMA-PPM-T, DAMA-RA, DAMA-WSA)	3
Comptroller of the Army (DACA-EA)	1
US Army Materiel Development and Readiness Command (DRCDE-DH, DRCQA-E, DRCRE-I, DRCDE-RT)	4
US Army Training and Doctrine Command (ATTG-U, ATCD-T, ATCD-ET, ATCD-B)	4
US Army Aviation Research and Development Command (DRDAV-DI, DRDAV-EE, DRDAV-EG)	10
US Army Test and Evaluation Command (DRSTS-CT, DRSTS-AD)	2
US Army Troop Support and Aviation Materiel Readiness Command (DRSTS-Q)	1
US Army Logistics Evaluation Agency (DALO-LEI)	1
US Army Materiel Systems Analysis Agency (DRXSY-R)	1
US Army Operational Test and Evaluation Agency (CSTE-POD)	1
US Army Armor Center (ATZK-CD-TE)	1
US Army Aviation Center (ATZQ-D-T, ATZQ-TSM-A, ATZQ-TSM-S)	3
US Army Combined Arms Center (ATZLCA-DM)	1
US Army Infantry Center (ATSH-TSM-BH)	1
US Army Systems Center (IGAR-TA, IGAR-Library)	2

## DISTRIBUTION CONT.

US Army Research and Technology Laboratories/ Applied Technology Laboratory (DAVDL-ATL-D, DAVDL-Library)	2
US Army Research and Technology Laboratories/ Aeromechanics Laboratory (DAVDL-AL-D)	1
US Army Research and Technology Laboratories/ Propulsion Laboratory (DAVDL-PL-D)	1
US Army Troop Support and Aviation Materiel Readiness Command (DRCPM-CO-T)	1
Defense Technical Information Center (DDR)	12