



AD-A093 737 ARMY MOBILITY EQUIPMENT RESEARCH AND DEVELOPMENT COMM--ETC F/6 13/6
BASELINE TESTS OF THE OE-100 CENTENNIAL ELECTRIC PASSENGER VEHI--ETC(U)
SEP 80 E J DOWGIALLO, I R SNELLINGS EC-77-A-31-1042
UNCLASSIFIED MERADCOM-2308 NL

1 of 2
200000

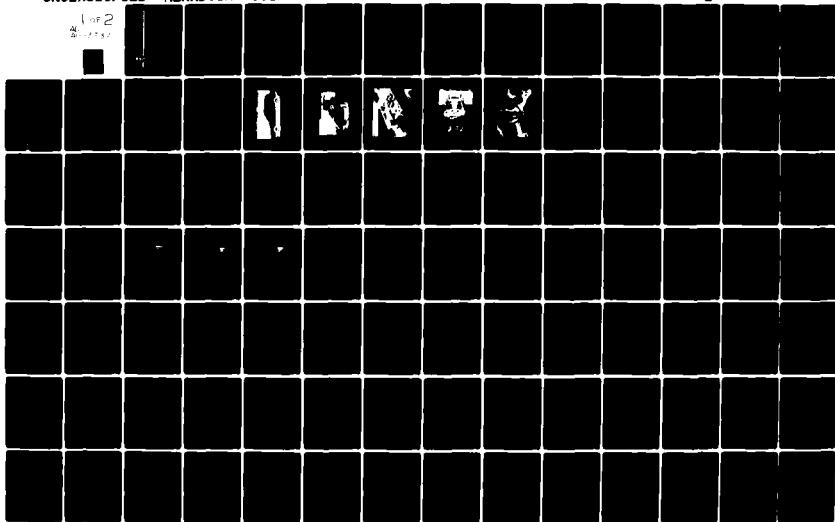

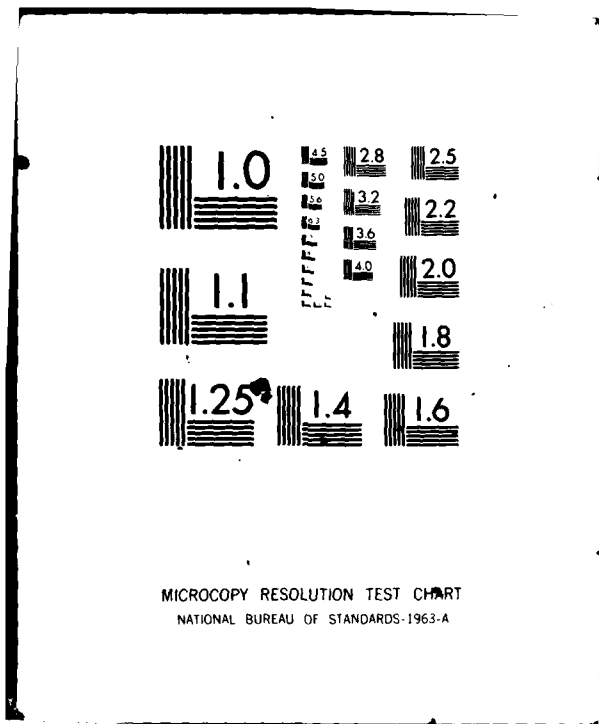

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A 093737

DOC FILE



AD


12

Report 2308

LEVEL II

**BASELINE TESTS OF THE GE-100 CENTENNIAL
ELECTRIC PASSENGER VEHICLE**

by
Edward J. Dowgiallo, Jr.
Ivan R. Snellings
and
William H. Blake



September 1980

Approved for public release; distribution unlimited.

**U.S. ARMY MOBILITY EQUIPMENT
RESEARCH AND DEVELOPMENT COMMAND
FORT BELVOIR, VIRGINIA**

81 1 • 13 004

**Destroy this report when no longer needed.
Do not return it to the originator.**


(14) MERADCOM-2308

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|--|---|---|
| 1. REPORT NUMBER 2308 | 2. GOVT ACCESSION NO. AD-A093737 | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) BASELINE TESTS OF THE GE-100 CENTENNIAL ELECTRIC PASSENGER VEHICLE | 5. TYPE OF REPORT & PERIOD COVERED Final Technical Memorandum | 6. PERFORMING ORG. REPORT NUMBER |
| 7. AUTHOR(s) Edward J. Dowgiallo, Jr. Ivan R. Snellings and William H. Blake | 8. CONTRACT OR GRANT NUMBER(s) Interagency Agreement EC-77-A-31-1042 | 9. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS US Army Mobility Equipment Research And Development Command Fort Belvoir, Virginia 22060 | 10. CONTROLLING OFFICE NAME AND ADDRESS Department of Energy Division of Transportation Energy Conservation Washington, DC 20545 | 11. REPORT DATE September 1980 |
| 11. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 12. NUMBER OF PAGES 105 | 12. SECURITY CLASS. (of this report) UNCLASSIFIED | 13. SECURITY CLASS. (of this report) UNCLASSIFIED |
| 14. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited. | 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) 15. SECURITY CLASS. (of this report) UNCLASSIFIED | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 16. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | 15. SECURITY CLASS. (of this report) UNCLASSIFIED | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 17. SUPPLEMENTARY NOTES | 15. SECURITY CLASS. (of this report) UNCLASSIFIED | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 18. KEY WORDS (Continue on reverse side if necessary and identify by block number) Electric Vehicle Traction Battery Charger | 15. SECURITY CLASS. (of this report) UNCLASSIFIED | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |
| 19. ABSTRACT (Continue on reverse side if necessary and identify by block number) The GE-100 Centennial electric vehicle is a one-of-a-kind prototype. Results of performance tests, speed, acceleration, gradeability, range, and efficiencies are presented. The GE-100 is powered by eighteen 6-volt lead-acid batteries driving a 16.3-kW d.c. series motor through an EV-1C controller. The motor drives the wheels through a chain drive to the differential. No regenerative braking was provided. | 15. SECURITY CLASS. (of this report) UNCLASSIFIED | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE |

403160

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

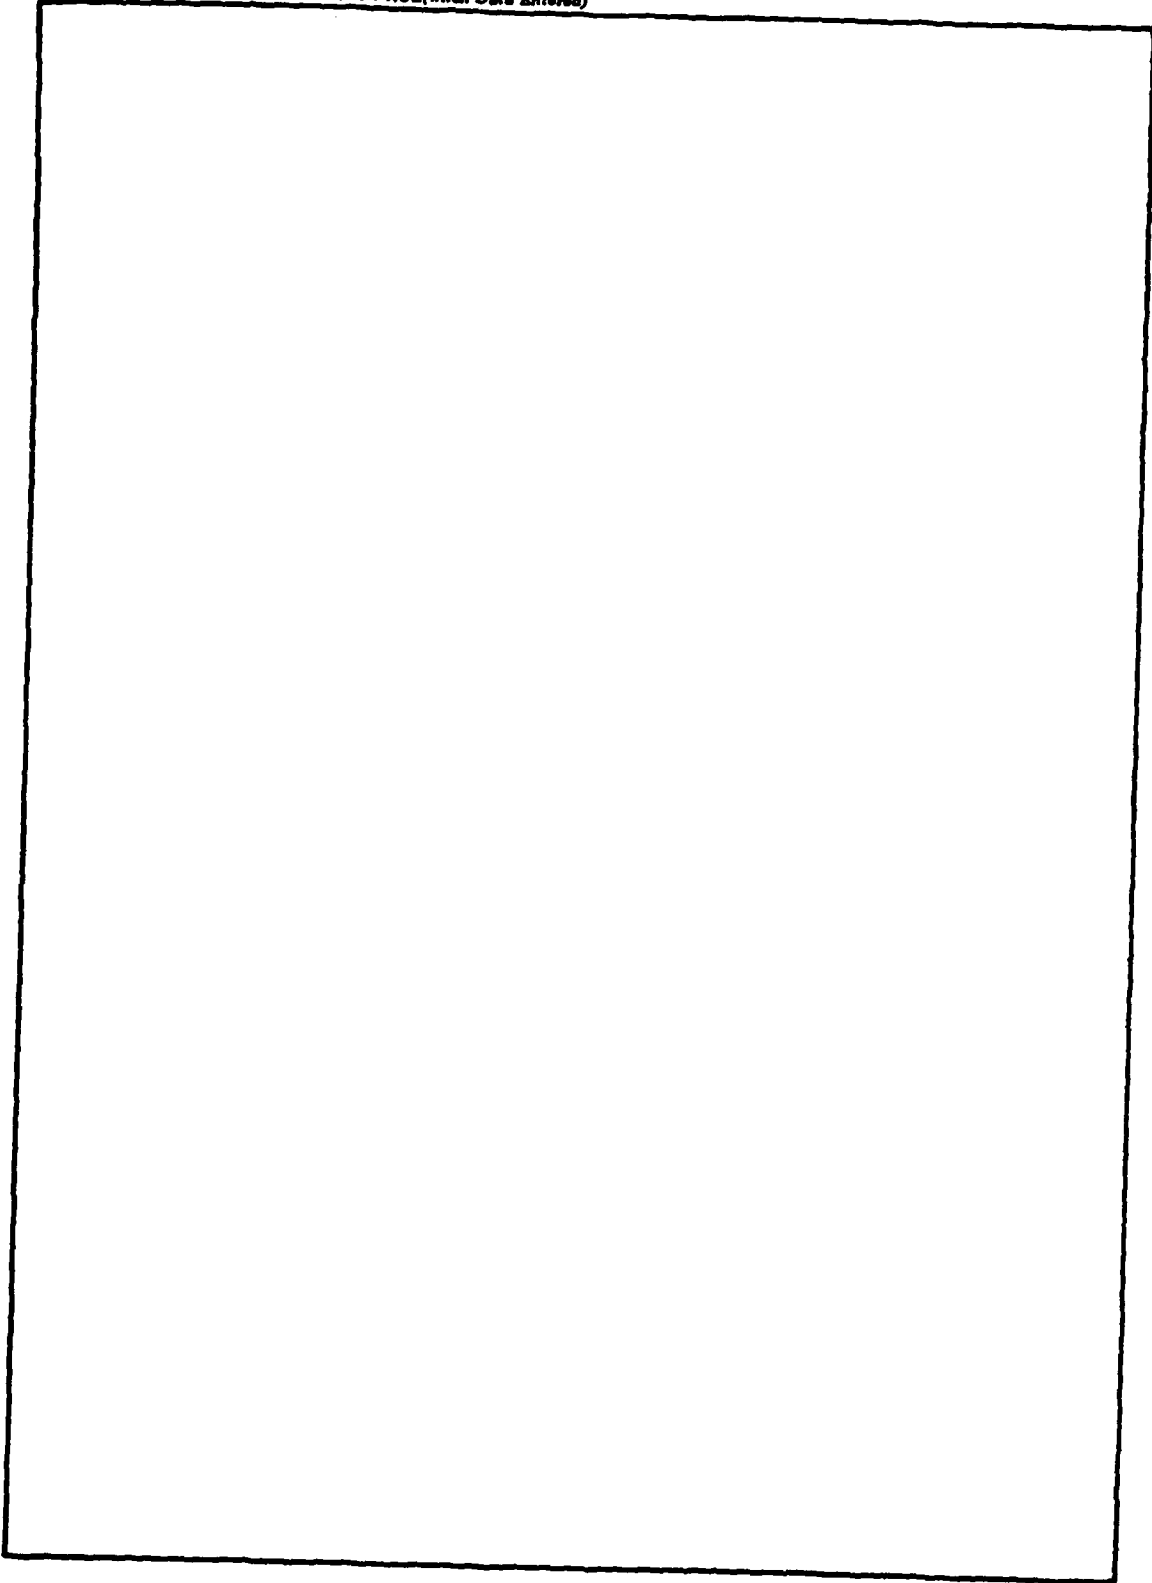

UNCLASSIFIED

ii

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

PREFACE

The Electric and Hybrid Vehicle Test was conducted by the US Army Mobility Equipment Research and Development Command (MERADCOM) under the guidance of the US Department of Energy (DOE).

Michael E. Johnson, P.E. of VSE Corporation was responsible for aspects of calibration of the signal conditioning circuits and recording instruments as well as data tabulations, plotting, and preparation of the report. Richard Boyd of VSE Corporation was responsible for aspects of the report and data analysis.

Computer programming and some data tabulations and plots were made by David Scott and Arthur Nickless of the Systems Technology & Management Division, Management Information Systems Directorate, MERADCOM.

James A. Queen and Calvin T. Bushrod of the Environmental & Field Division, Product Assurance & Testing Directorate, assisted in vehicle operation and data collection.

| Accession For | |
|--------------------|-------------------------------------|
| NTIS GRA&I | <input checked="" type="checkbox"/> |
| DTIC TAB | <input type="checkbox"/> |
| Unannounced | <input type="checkbox"/> |
| Justification | |
| By | |
| Date | |
| Availability Codes | |
| and/or | |
| Distribution | |
| A | |

CONTENTS

| Section | Title | Page |
|---------|--|------|
| | PREFACE | iii |
| | ILLUSTRATIONS | vi |
| | TABLES | viii |
| I | SUMMARY | 1 |
| II | INTRODUCTION | 3 |
| III | OBJECTIVES | 3 |
| IV | TEST VEHICLE DESCRIPTION | |
| | 1. Description | 5 |
| | 2. Operating Characteristics | 5 |
| V | INSTRUMENTATION | 5 |
| VI | TEST PROCEDURES | |
| | 1. Maximum Cruise Speed | 12 |
| | 2. Range Tests – Constant Speed | 12 |
| | 3. Range When Operated in a Selected Driving Pattern | 12 |
| | 4. Maximum Acceleration | 13 |
| | 5. Coast-Down Tests | 13 |
| | 6. Tractive Force Tests | 13 |
| | 7. Charger Efficiency Tests | 13 |
| VII | TEST RESULTS AND DISCUSSION | |
| | 1. Maximum Speed | 14 |
| | 2. Range | 14 |
| | 3. Maximum Acceleration | 14 |
| | 4. Gradeability | 14 |
| | 5. Gradeability Limit | 31 |
| | 6. Road Energy Consumption | 35 |
| | 7. Road Power Requirements | 35 |
| | 8. Indicated Energy Economy | 40 |

CONTENTS (CONT'D)

| Section | Title | Page |
|---------|--------------------------------------|------|
| VIII | COMPONENT PERFORMANCE AND EFFICIENCY | |
| | 1. Battery Charger | 40 |
| | 2. Battery Characteristics | 40 |
| | 3. Controller | 44 |
| | 4. Motor | 44 |
| | 5. Drive Train | 44 |
| IX | RELIABILITY | 44 |
| | APPENDICES | |
| | A. VEHICLE SUMMARY DATA SHEET | 45 |
| | B. TABULATIONS OF GRAPHED DATA | 50 |
| | C. DERIVATION OF ROAD LOAD POWER | 87 |

ILLUSTRATIONS

| Figure | Title | Page |
|--------|---|------|
| 1 | Side View of GE-100 Centennial Vehicle | 6 |
| 2 | Front/Left Side View of GE-100 with All Doors Open | 7 |
| 3 | Front View of GE-100 Showing SCR Controller and Gasoline-Fired Heater and Motor | 8 |
| 4 | Rear View of GE-100 Showing Battery Removal Apparatus | 9 |
| 5 | Inside View from Driver's Seat of GE-100 | 10 |
| 6 | Block Diagram of Propulsion System and Instrumentation | 11 |
| 7 | "B" Cycle, Velocity vs Time | 15 |
| 8 | "B" Cycle, Battery Voltage vs Time | 16 |
| 9 | "B" Cycle, Battery Current vs Time | 17 |
| 10 | "B" Cycle, Battery Power vs Time | 18 |
| 11 | "C" Cycle, Velocity vs Time | 19 |
| 12 | "C" Cycle, Battery Voltage vs Time | 20 |
| 13 | "C" Cycle, Battery Current vs Time | 21 |
| 14 | "C" Cycle, Battery Power vs Time | 22 |
| 15 | "D" Cycle, Velocity vs Time | 23 |
| 16 | "D" Cycle, Battery Voltage vs Time | 24 |
| 17 | "D" Cycle, Battery Current vs Time | 25 |
| 18 | "D" Cycle, Battery Power vs Time | 26 |

ILLUSTRATIONS (CONT'D)

| Figure | Title | Page |
|--------|--|------|
| 19 | Acceleration vs Velocity | 27 |
| 20 | 0% Depth of Discharge, Velocity vs Time | 28 |
| 21 | 40% Depth of Discharge, Velocity vs Time | 29 |
| 22 | 80% Depth of Discharge, Velocity vs Time | 30 |
| 23 | 0% Depth of Discharge, Percent Gradeability vs Velocity | 32 |
| 24 | 40% Depth of Discharge, Percent Gradeability vs Velocity | 33 |
| 25 | 80% Depth of Discharge, Percent Gradeability vs Velocity | 34 |
| 26 | Coast-Down Cycle 1, Velocity vs Time | 36 |
| 27 | Coast-Down Cycle 4, Velocity vs Time | 37 |
| 28 | Coast-Down Cycle 7, Velocity vs Time | 38 |
| 29 | Road Energy vs Velocity | 39 |
| 30 | Road Power vs Velocity | 41 |
| 31 | Constant Speed Battery Performance, First 25% of Range | 42 |
| 32 | Constant Speed Battery Performance, Last 25% of Range | 43 |

TABLES

| Table | Title | Page |
|-------|--|------|
| 1 | Summary of Test Results for GE-100 Centennial Electric Vehicle | 2 |
| 2 | Conversion Factors | 4 |

BASELINE TESTS OF THE GE-100 CENTENNIAL

ELECTRIC PASSENGER VEHICLE

I. SUMMARY

The GE-100 Centennial Electric, an electric vehicle manufactured by General Electric and Triad Services, Inc., was tested under the direction of the U.S. Army Mobility Equipment Research and Development Command (MERADCOM) from 4 June to 20 June and from 2 July to 27 July 1979. The tests are part of a Department of Energy (DOE) project to access advances in electric vehicle design. This report presents the performance test results on the GE-100 Centennial Electric.

The GE-100 Centennial Vehicle is a one-of-a-kind experimental prototype. The concept was developed by GE and Triad Services, Inc., under DOE contract EY-76-C-03-1294, phase one of the Near-Term Electric Vehicle Program. The conceptual study explored electric vehicle performance available with standard production components. The vehicle was built and funded by General Electric, using available hardware, i.e., standard production components. It is powered by eighteen 6-volt lead-acid traction batteries driving a 16.3-kW (21.8-hp) (3200-r/min) motor through an EV-1C armature chopper and control. All items are 1978 or earlier technology. Front brakes are inboard Chevelle with copper drums; rear brakes are Subaru drums. The vehicle did not employ regenerative braking.

The vehicle was provided by General Electric. The intent of testing was not to verify vehicle performance, as this prototype is not a candidate for the DOE demonstration programs. However, the available standard production components used in this vehicle will be used in prospective vehicles. The testing was performed to expose the electric-hybrid-vehicle (EHV) community to the results available with 1978 electrical technology.

The results of the tests are shown in Table 1.

Table 1. Summary of Test Results for

| Date (July) | Test Speed or Driving Pattern | Range | Number of Cycles | Energy Out of Battery | Battery Energy Economy* | Energy Out of Charger (Into Battery) | Batt. Efficiency |
|-------------|-------------------------------|-------------------|------------------|-----------------------|---|--------------------------------------|------------------|
| 13 | 40 km/h (25 mi/h) | 112 km (70 mi) | - | 15.5 kWh | .138 $\frac{\text{kWh}}{\text{km}}$ (.221 $\frac{\text{kWh}}{\text{mi}}$) | 27.8 kWh | 55.8% |
| 18 | 56 km/h (35 mi/h) | 96 km (60 mi) | - | 15.3 kWh | .159 $\frac{\text{kWh}}{\text{km}}$ (.255 $\frac{\text{kWh}}{\text{mi}}$) | 26.0 kWh | 56.3% |
| 12 | 80 km/h (50 mi/h) | 69 km (43 mi) | - | 12.9 kWh | .187 $\frac{\text{kWh}}{\text{km}}$ (.300 $\frac{\text{kWh}}{\text{mi}}$) | 21.6 kWh | 59.7% |
| 6 | SAE J227a B | 80 km (50 mi) | 227 | 16.3 kWh | .204 $\frac{\text{kWh}}{\text{km}}$ (.326 $\frac{\text{kWh}}{\text{mi}}$) | 29.7 kWh | 54.9% |
| 10 | SAE J227a C | 67 km (42 mi) | 122 | 14.4 kWh | .215 $\frac{\text{kWh}}{\text{km}}$ (.343 $\frac{\text{kWh}}{\text{mi}}$) | 25.0 kWh | 57.6% |
| 24 | SAE J227a D | 62 km (39 mi) | 42 | 14.1 kWh | .227 $\frac{\text{kWh}}{\text{km}}$ (.362 $\frac{\text{kWh}}{\text{mi}}$) | 20.5 kWh | 68.8% |

* Battery Energy Economy = Energy out of battery per mile of range.

Results for GE Centennial Electric Vehicle

| Battery Efficiency | Energy into Charger | Charger Efficiency | Vehicle Energy Economy | Wind Start of Test | Wind End of Test | Temperature Start of Test | Temperature End of Test |
|--------------------|---------------------|--------------------|---|------------------------------|---------------------------------|---------------------------|-------------------------|
| 55.8% | 33 kWh | 84.3% | .295 $\frac{\text{kWh}}{\text{km}}$ (.471 $\frac{\text{kWh}}{\text{mi}}$) | Calm | South 7.4 km/h (4.6 mi/h) | 23°C (74°F) | 30°C (86°F) |
| 56.3% | 31 kWh | 83.4% | .517 $\frac{\text{kWh}}{\text{km}}$ (.323 $\frac{\text{kWh}}{\text{mi}}$) | Calm | NW 9.3 km/h (5.8 mi/h) | 26°C (79°F) | 27°C (81°F) |
| 59.7% | 27 kWh | 80.2% | .391 $\frac{\text{kWh}}{\text{km}}$ (.628 $\frac{\text{kWh}}{\text{mi}}$) | Calm | Calm | 22°C (72°F) | 26°C (78°F) |
| 54.9% | 37 kWh | 80.3% | .463 $\frac{\text{kWh}}{\text{km}}$ (.740 $\frac{\text{kWh}}{\text{mi}}$) | Calm | NW 3.7 km/h (2.3 mi/h) | 16°C (61°F) | 27°C (80°F) |
| 57.6% | 30 kWh | 83.3% | .448 $\frac{\text{kWh}}{\text{km}}$ (.714 $\frac{\text{kWh}}{\text{mi}}$) | NW 3.7 km/h (2.3 mi/h) | South 7.4 km/h (4.6 mi/h) | 26°C (78°F) | 25°C (77°F) |
| 68.8% | 25 kWh | 82.0% | .403 $\frac{\text{kWh}}{\text{km}}$ (.641 $\frac{\text{kWh}}{\text{mi}}$) | Calm | SW 4.8 km/h (3 mi/h) | 26°C (78°F) | 29°C (85°F) |

1

2

II. INTRODUCTION

The vehicle tested and the data presented in this report are in support of Public Law 94-413 enacted by Congress on 17 September 1976. The law requires the Department of Energy (DOE) to develop data characterizing the state-of-the-art with respect to electric and hybrid vehicles. The data so developed are to serve as a baseline to compare improvements in electric and hybrid-vehicle technologies, to assist in establishing performance standards for electric and hybrid vehicles, and to help guide future research and development activities.

The U.S. Army Mobility Equipment Research and Development Command (MERADCOM) under the direction of the Electric and Hybrid Research, Development, and Demonstration Office; Division of Transportation Energy Conservation; DOE, has conducted track tests of electric vehicles to measure their performance characteristics and vehicle component efficiencies. The tests were conducted using a DOE test procedure "ERDA-EHV-TEP," described in Appendix A of MERADCOM Report 2244.¹ This procedure uses the "Electric Vehicle Test Procedure SAE J227a," revised February 1976. U.S. customary units were used in the collection and reduction of data. The units were converted to the International System of Units for presentation in this report. U.S. customary units are presented in parentheses. Number values are truncated to reflect nominal values except where precision is required. Conversion factors are shown in Table 2.

The assistance and cooperation of General Electric Industrial Control Division and Corporate Research and Development were greatly appreciated. The Department of Energy supplied funding support and guidance during this project.

III. OBJECTIVES

The characteristics of interest for the GE-100 Centennial Vehicle are vehicle speed, range at constant speed, range when operated in a selected driving pattern, maximum acceleration, gradeability, gradeability limit, road energy consumption, road power, and vehicle energy economy.

¹ E. J. Dowgiatto, Jr.; C. E. Bailey, Jr.; I. R. Snellings; and W. H. Blake; "Baseline Tests of the EVA Metro Electric Passenger Vehicle," MERADCOM Report 2244 (July 1978).

Table 2. Conversion Factors

| Quantity | To Convert | | Multiply by |
|---------------|---------------------|------------------|------------------------------|
| | from | to | |
| Acceleration | ft/s ² | m/s ² | 3.048 x 10 ⁻¹ |
| | mi/h.s | m/s ² | 4.470 4 x 10 ⁻¹ |
| Energy (work) | ft · lbf | J | 1.355 818 |
| | Wh | Btu | 3.412 141 x 10 ³ |
| | Wh | J | 3.600 x 10 ³ |
| | Btu (IT) | J | 1.055 056 |
| Force | lbf | N | 4.448 222 |
| Length | ft | m | 3.048 x 10 ⁻¹ |
| | mi | km | 1.609 344 |
| Mass | lb | kg | 4.535 924 x 10 ⁻¹ |
| Power | hp (550 ft · lbf/s) | W | 7.456 999 x 10 ² |
| Velocity | mi/h | km/h | 1.609 344 |
| Pressure | lbf/in ² | kPa | 6.895 |

IV. TEST VEHICLE DESCRIPTION

1. Description. The GE-100 Centennial Vehicle is the Near-Term Reference Electric Vehicle. It is a 3-door, 4-passenger commuter car driven by 18 6-volt lead-acid batteries. It was designed from the ground up as an electric vehicle. Design features worthy of noting are the reduced aerodynamic drag, rear facing passenger seats, mechanical transmission replaced by electrical controls, batteries removable as a single unit from the ventilated tunnel, side doors open parallel to the body, and the use of selected materials for weight reduction. The vehicle is shown in Figures 1 through 5. The vehicle is described in Appendix A.

2. Operating Characteristics. The vehicle is similar to a comparable-size internal-combustion vehicle. Controls are located in similar positions and the driving characteristics are similar. A key switch is required to activate the vehicle. The "accelerator" pedal controls a signal voltage to the EV-1C controller which, in turn, programs the pulse width (on time) and pulse frequency of battery voltage connected to the 16.2-kW (21.8-hp) (3200-r/min) motor. The controller reacts to the "accelerator" position to control the vehicle speed and acceleration as controlled by the driver. A relay bypasses the controller for high-power or high-speed conditions. The controller employs field weakening to increase top speed. Reversing is accomplished electrically, but the operator actions are similar to those for a vehicle with an automatic transmission. No regenerative braking is provided on this vehicle. A block diagram is shown in Figure 6.

V. INSTRUMENTATION

The GE Centennial was instrumented to measure vehicle speed and range, battery voltage, current, averaged current, instantaneous power and averaged power, motor voltage, the temperature of the motor frame, and the battery charger power. Battery electrolyte temperatures were measured with thermometers. A brief description of the instrumentation system is given in the following paragraphs. Details of the recorder are given in Appendix D of MERADCOM Report 2244.²

Instrumentation consisted of signal-conditioning circuits and a magnetic tape recorder for recording analog signals of electrical parameters. The magnetic tape recorder was operated in the frequency modulation mode at 4.763 cm (1-7/8 in.) per second. The signal-conditioning circuitry to the recorder consisted of a main battery voltage divider, a shunt-voltage amplifier for current monitor, an analog multiplier, and circuits for averaging power and current.

² E. J. Dowgiallo, Jr.; C. E. Bailey, Jr.; I. R. Snellings; and W. H. Blake; "Baseline Tests of the EVA Metro Electric Passenger Vehicle," MERADCOM Report 2244 (July 1978).



Figure 1. Side view of GE-100 Centennial Vehicle.



Figure 2. Front/left side view of GE-100 with all doors open.



Figure 3. Front view of GE-100 showing SCR controller and gasoline-fired heater and motor.

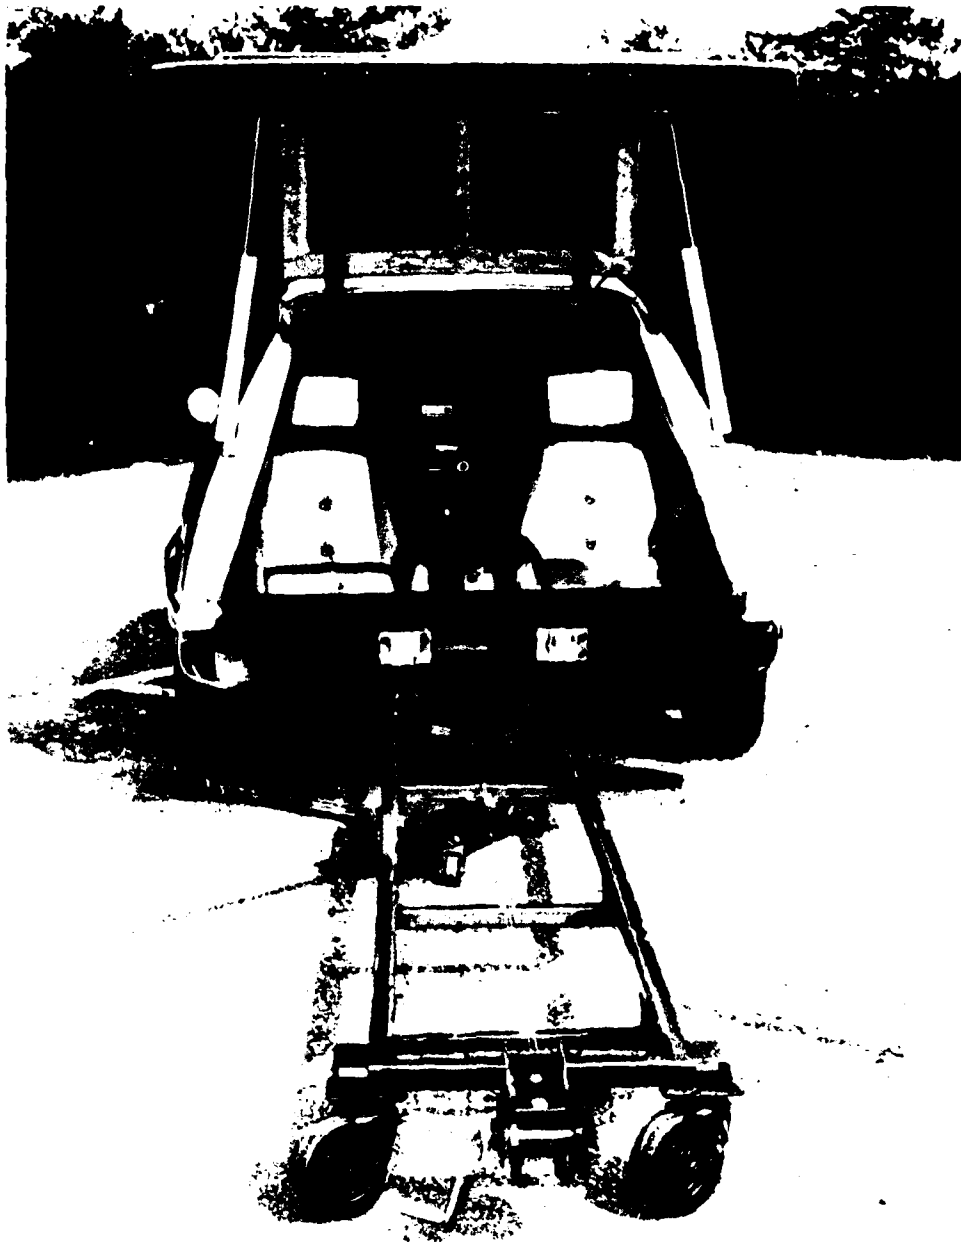


Figure 4. Rear view of GE-100 showing battery removal apparatus.

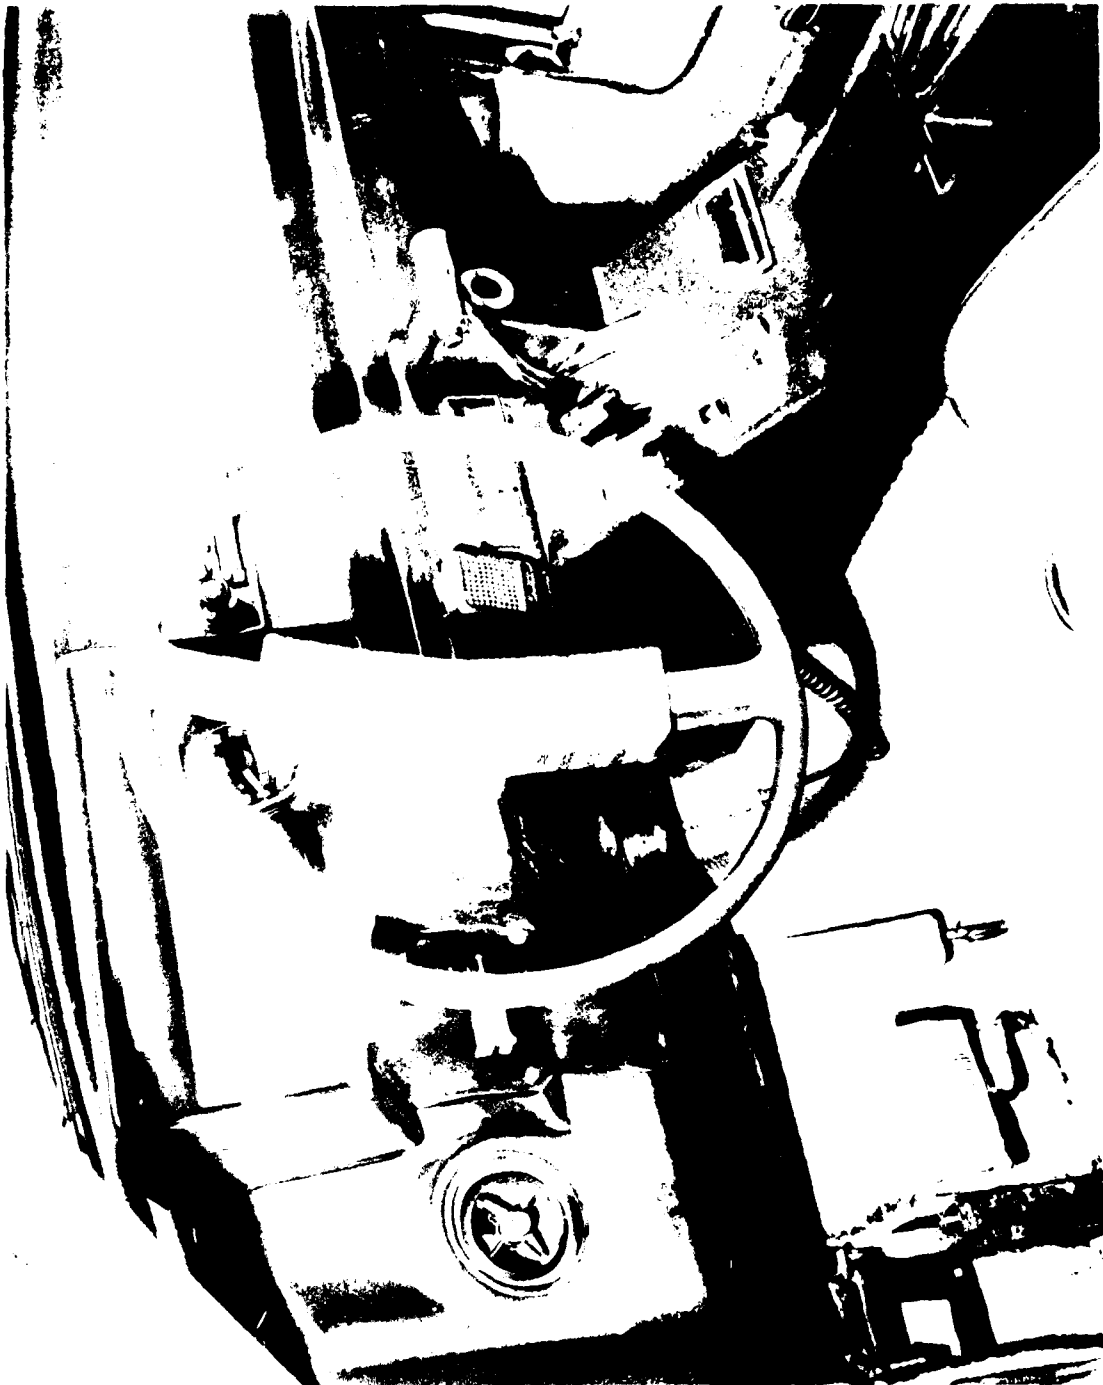


Figure 5. Inside view from driver's seat of GE-100.

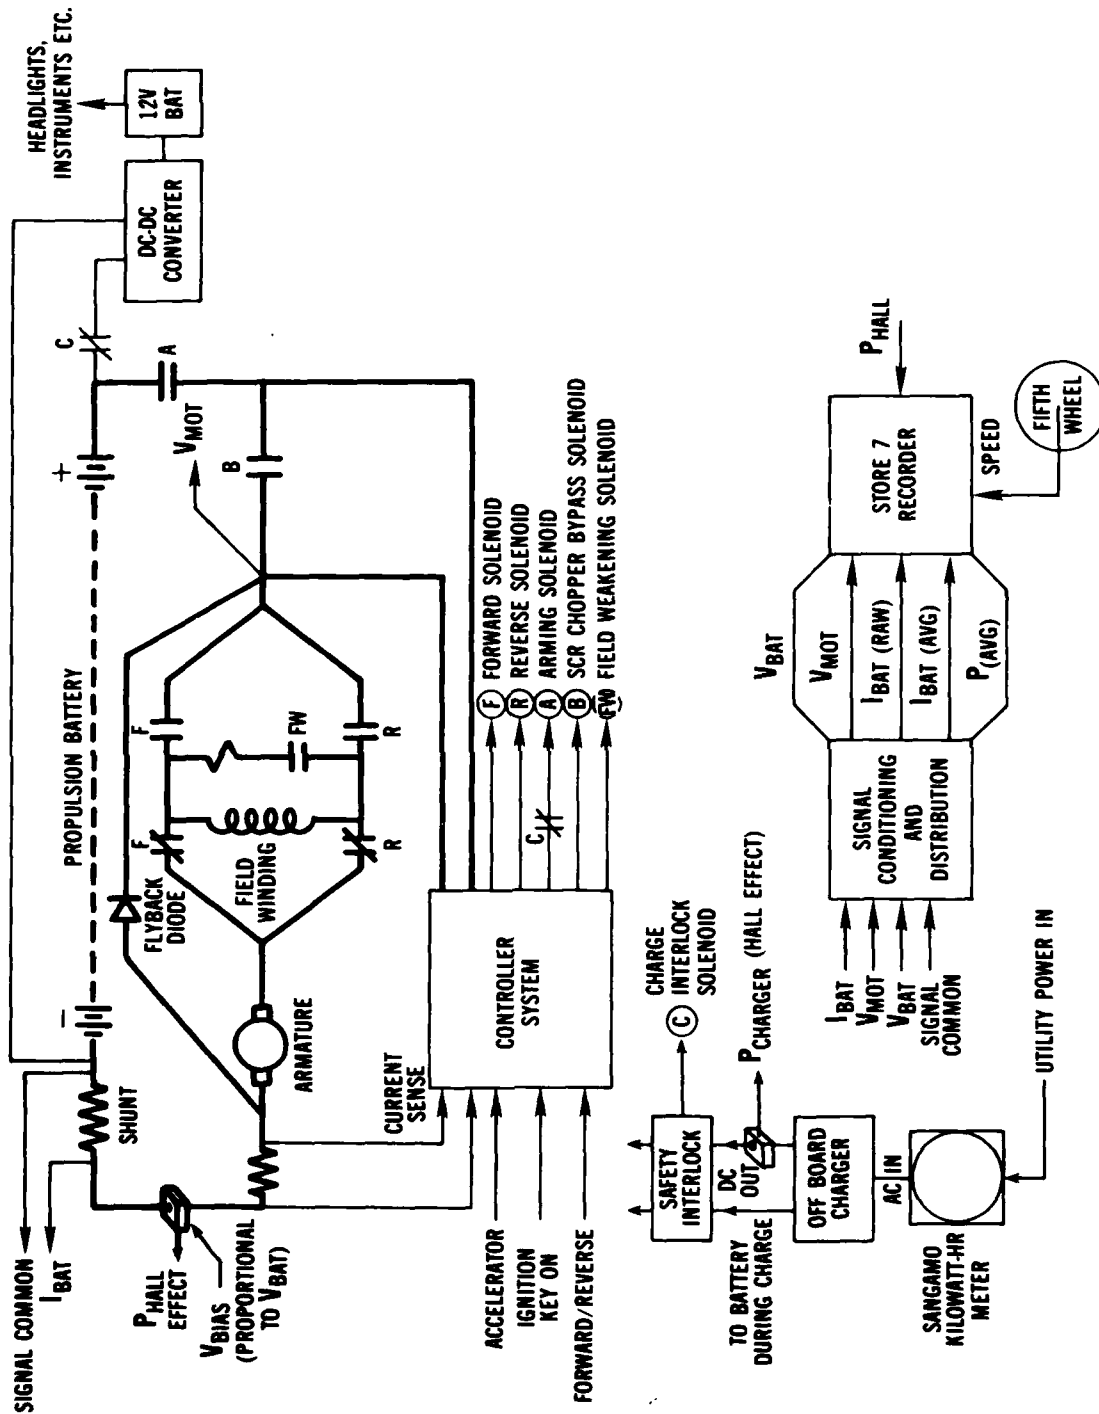


Figure 6. Block diagram of propulsion system and instrumentation.

A voltage proportional to power was produced by the instantaneous multiplication of voltage and current. Current and power were recorded both raw and electronically averaged. The raw values include the rapid switching transients associated with the solid-state controller.

VI. TEST PROCEDURES

The tests were performed at the MERADCOM test facility, Fort Belvoir, and at the Aberdeen Proving Ground (APG) test facility at Aberdeen, Maryland. When the vehicle was delivered to MERADCOM, the pretest checks described in Appendix F of MERADCOM Report 2244³ were conducted. A shakedown run was performed to familiarize the driver with the operating characteristics of the vehicle and to verify proper operation of all instrumentation systems. All tests were run in accordance with the DOE Electric and Hybrid Vehicle Test and Evaluation procedure, Appendix A of MERADCOM Report 2244.⁴ All tests were performed with a full load of 227 kg (500 lb).

1. Maximum Cruise Speed. The vehicle was capable of sustaining 88 km/h (55 mi/h) on level straightaway. The MERADCOM facility has a 2.0-km (1¼-mi) loop with a 3-percent and a 5-percent grade. The vehicle could sustain 80 km/h (50 mi/h) but not 88 km/h on this course. The highest speed used for the constant-speed range test was 80 km/h. The vehicle was operated to a maximum speed of 97 km/h (60.3 mi/h) on a level track (\pm 1-percent grade) at Aberdeen Proving Ground.

2. Range Tests — Constant Speed. Range tests at constant speed were carried out at 40 km/h (25 mi/h), 56 km/h (35 mi/h), and 80 km/h (50 mi/h); speeds were held constant within 1.6 km/h (1 mi/h), and the test was terminated when the vehicle could no longer maintain 95 percent of the designated test speed. Range at 40 km/h was 112 km (70 mi). Range at 56 km/h was 96 km (60 mi). Range at 80 km/h was 69 km (43 mi).

3. Range When Operated in a Selected Driving Pattern. Test Schedules "B," 32 km/h (20 mi/h); "C," 48 km/h (30 mi/h); and "D," 72 km/h (45 mi/h) of SAE J227a were run. Range on the "B" schedule was 80 km (50 mi). Range on the "C" schedule was 67 km (42 mi). Range on the "D" schedule was 62 km (39 mi).

³ E. J. Dowgiallo, Jr.; C. E. Bailey, Jr.; I. R. Snellings; and W. H. Blake: "Basic Tests of the EVA Metro Electric Passenger Vehicle." MERADCOM Report 2244 (July 1978).

⁴ *Ibid.*

4. Maximum Acceleration. Maximum acceleration was calculated from the recorded time and velocity data. The tests were conducted on the 3-mile straightaway at APG. Time to accelerate to 32 km/h (20 mi/h) was 4.5 s and to 50 km/h (31 mi/h) was 8.5 s. Gradeability at speed was calculated from the acceleration data and from draw-bar tests. To ensure the passenger comfort with a smooth start, the controller delays maximum torque until the vehicle begins to roll.

5. Coast-Down Tests. The vehicle coasted to a stop from the maximum speed reached during the acceleration test. The velocity was recorded on an analog recorder. The analog recording was analyzed for the SAE J227a vehicle road energy consumption and vehicle road load power. The unique design feature of coupling the motor directly to the drive train did not allow mechanical isolation.

6. Tractive Force Tests. The maximum-grade capability of the test vehicle was determined from tractive force tests by towing a field dynamometer at approximately 1.6 km/h (1 mi/h) while the test vehicle was being driven with wide-open throttle. The force was measured by the dynamometer instrumentation from a load cell attached between the vehicles. The test was run with the batteries 0 percent, 40 percent, and 80 percent discharged. This test was used to compute the gradeability limit. Gradeability was a function of controller action rather than battery discharge, at least up to 80-percent depth of discharge (DOD). Tractive tests were terminated at 80-percent DOD as determined by measurement of energy with a Hall-effect watt-hour meter. A DOD was achieved by operating the vehicle at 56 km/h (35 mi/h).

7. Charger Efficiency Tests. A residential kilowatt-hour meter was used to measure input energy to the charger. The charger output power and energy were measured with a Hall-effect watt-hour meter which responds to inputs from d.c. to considerably higher than 5 kHz. Charger efficiency was calculated as the ratio of energy to the battery, as measured by a Hall sensor, to the energy to the charger as measured by a rotating watt-hour meter. The efficiency was calculated to be in the range of 80 percent to 84.3 percent. The ferro-resonant transformer corrected for changes in the line voltage and was programmed for 27.5-amp peak current demand, with the charge rate tapering off based on battery voltage. A complete test was not performed on the charger characteristics. The auxiliary battery was charged from the on board charger by a d.c. to d.c. converter from the propulsion batteries during vehicle operation.

VII. TEST RESULTS AND DISCUSSION

The data collected from all range tests are summarized in Table 1. The table shows the test data, type of test, environmental conditions, the range test results, energy into and out of the battery, and the energy into the charger. These data are used to determine vehicle range, energy economy, and efficiencies.

1. Maximum Speed. The maximum speed of the vehicle was measured during the acceleration coast down tests. It is defined as the maximum speed that could be reached on the track under full power. The measured maximum speed was 97 km/h (60.3 mi/h) for this vehicle.

2. Range. The following range tests were run: 40-km/h (25-mi/h), 56-km/h (35-mi/h), 70-km/h (44-mi/h), 80-km/h (50-mi/h), B-cycle, C-cycle, and D-cycle. The test results are shown in Table 1. These tests were run one time each due to the limited availability of the vehicle. The speed, velocity, current, and power profiles for the third cycle and next to the last cycle for each "B," "C," and "D" driving schedule are presented in Figures 7 through 18. The data for these figures are shown in Appendix B.

3. Maximum Acceleration. The average maximum acceleration of the vehicle was measured with the batteries fully charged, 40 percent discharged, and 80 percent discharged. The results of the tests are shown in Figure 19 and Appendix B. Maximum observed acceleration was 10.14 km/h.s (6.3 mi/h.s) at 4.8 km/h (3.0 mi/h). Velocity as a function of time is shown in Figures 20, 21, and 22 for the 0-percent, 40-percent, and 80-percent depths of discharge of the battery, respectively. Note that the first-cycle (0 percent DOD) acceleration has some initial anomolous behavior which is reflected in the other derived graphs of road energy and road power. This initial cycle problem probably arises from vehicle lubricant stiffness and controller considerations. The jagged appearance of the graphs is due to road and vehicle irregularities; the impact becomes pronounced as velocity and acceleration flatten. Selection of the cycles representing 40-percent and 80-percent DOD was affected by track considerations.

4. Gradeability. The grade in percent which the vehicle is able to traverse at any selected speed is calculated from maximum acceleration tests by using the equation:

$$G = 100 \tan (\sin^{-1} 0.0455 \bar{a}_n) \%$$

where:

\bar{a}_n = acceleration in miles per hour per second at speed n.

VELOCITY-B CYCLE START/STOP-JULY 6, 1979

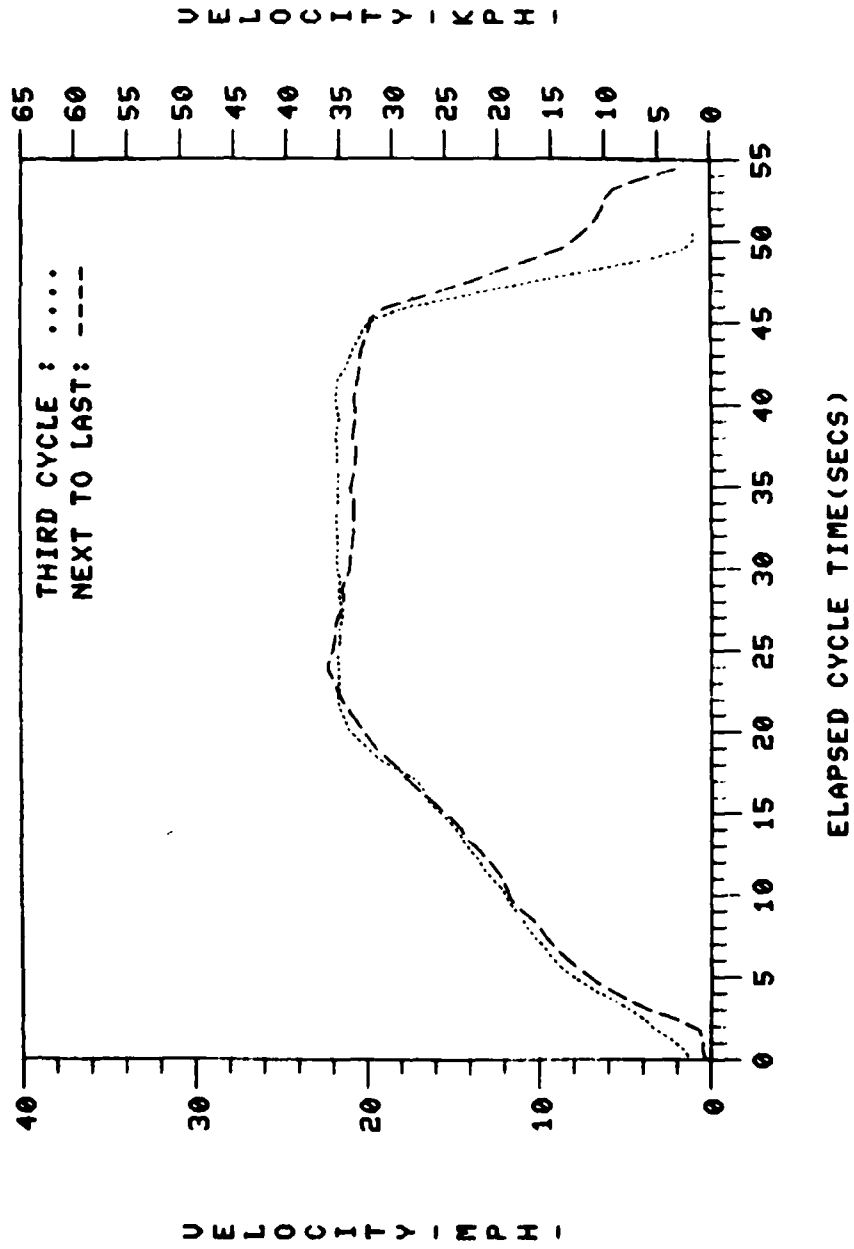


Figure 7. "B" Cycle, velocity vs time.

VOLTAGE-B CYCLE START/STOP-JULY 10, 1979

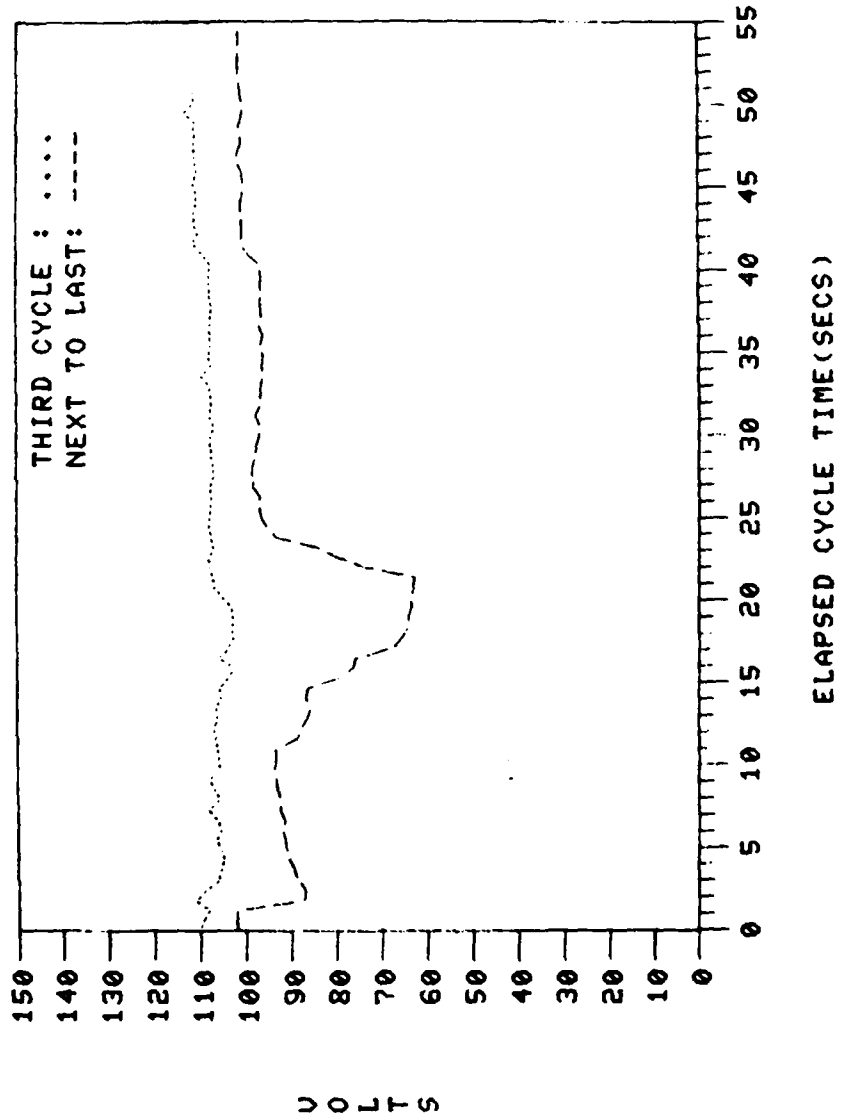


Figure 8. "B" Cycle, battery voltage vs time.

CURRENT-B CYCLE START/STOP-JULY 6, 1979

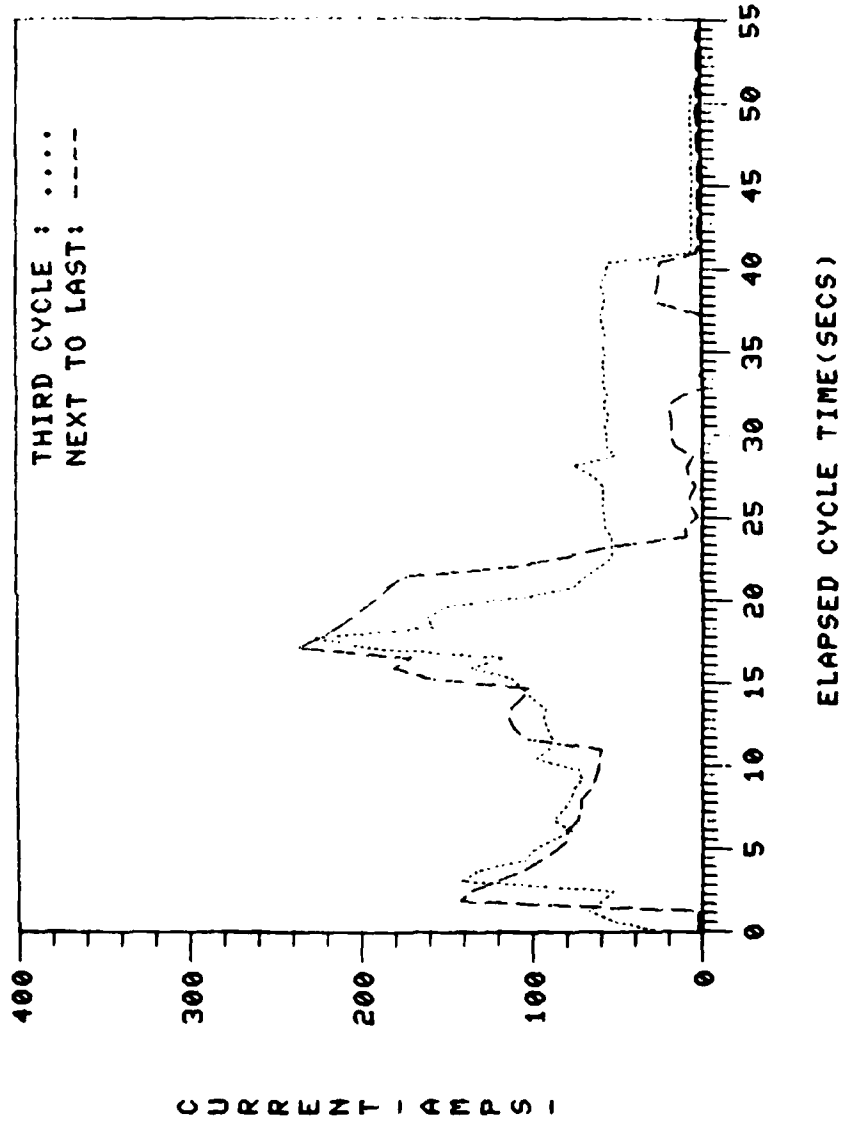


Figure 9. "B" Cycle, battery current vs time.

POWER-B CYCLE START/STOP-JULY 6, 1979

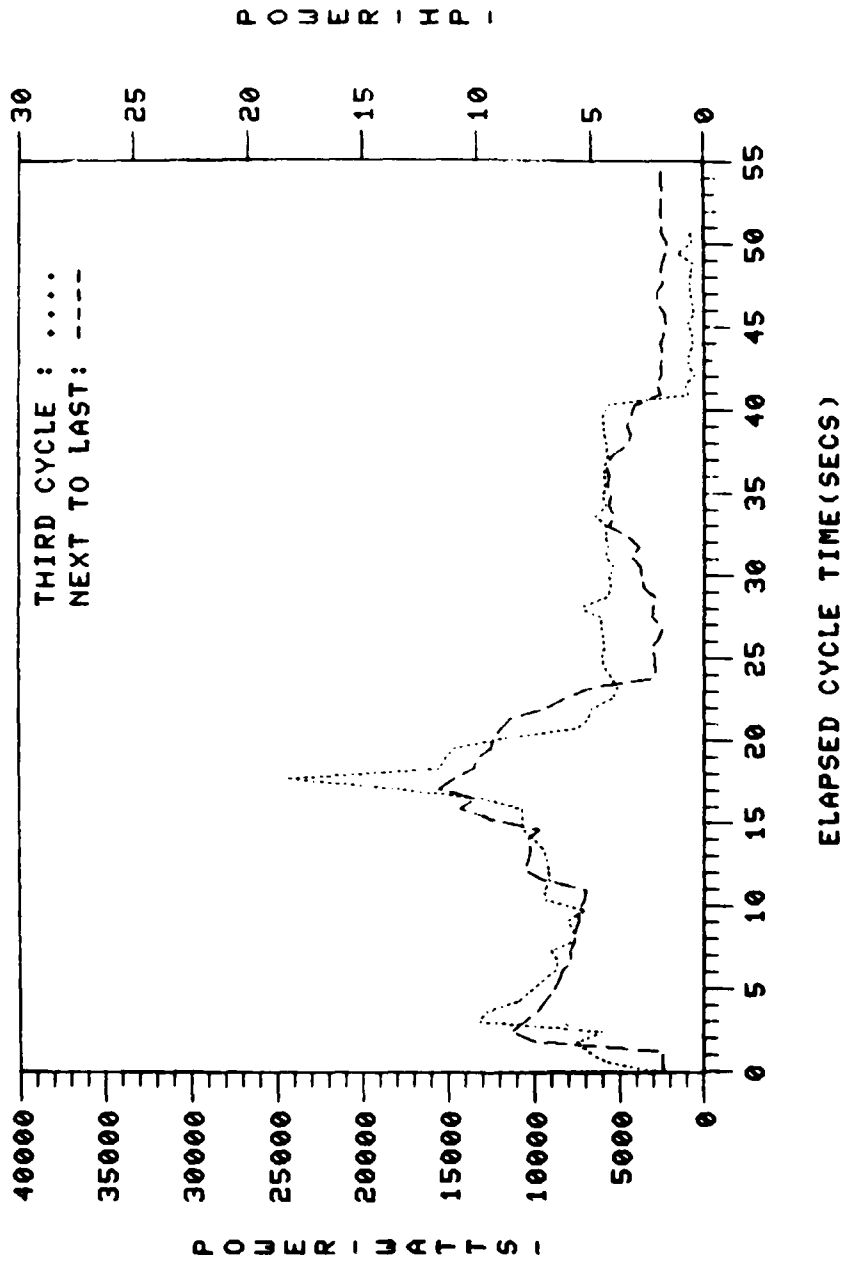


Figure 10. "B" Cycle, battery power vs time.

VELOCITY-C CYCLE START/STOP-JULY 10, 1979


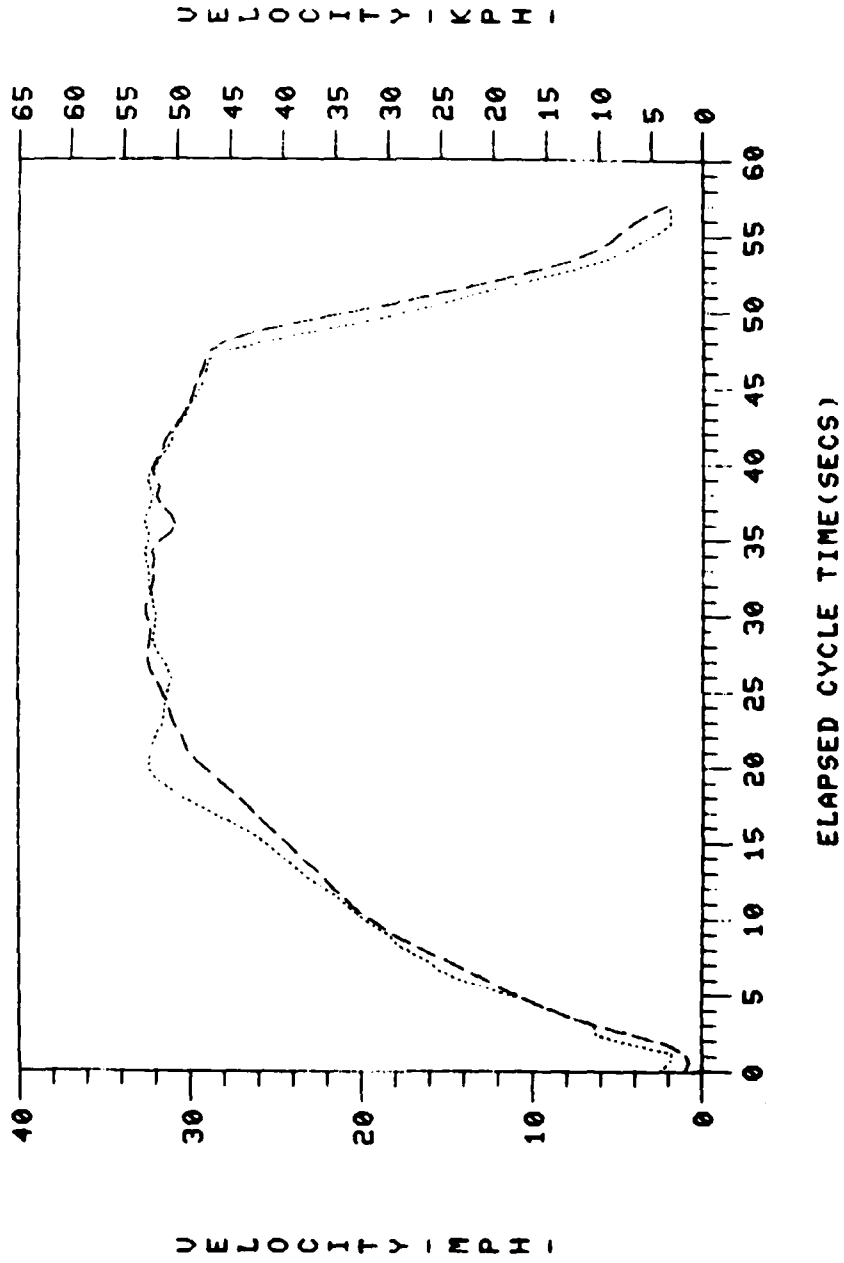


Figure 11. "C" Cycle, velocity vs time.


VOLTAGE-C CYCLE START/STOP-JULY 10, 1979

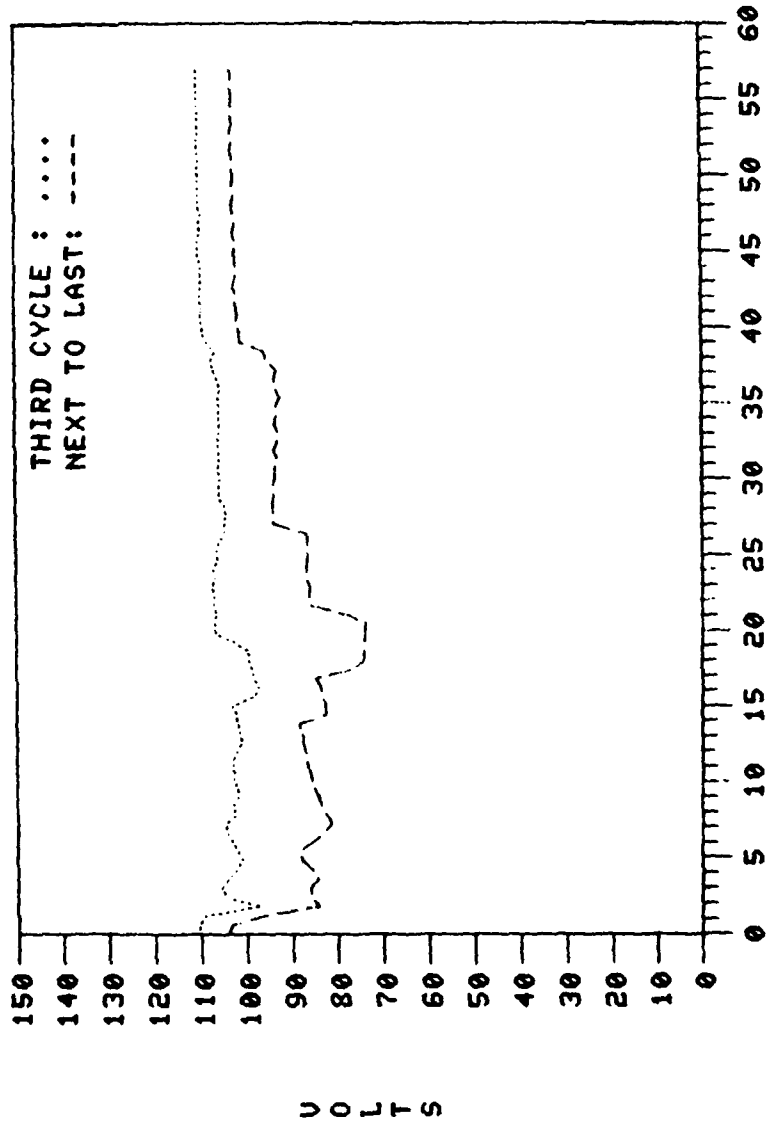

ELAPSED CYCLE TIME (SECS)

Figure 12. "C" Cycle, battery voltage vs time.

CURRENT-C CYCLE START/STOP-JULY 10, 1979

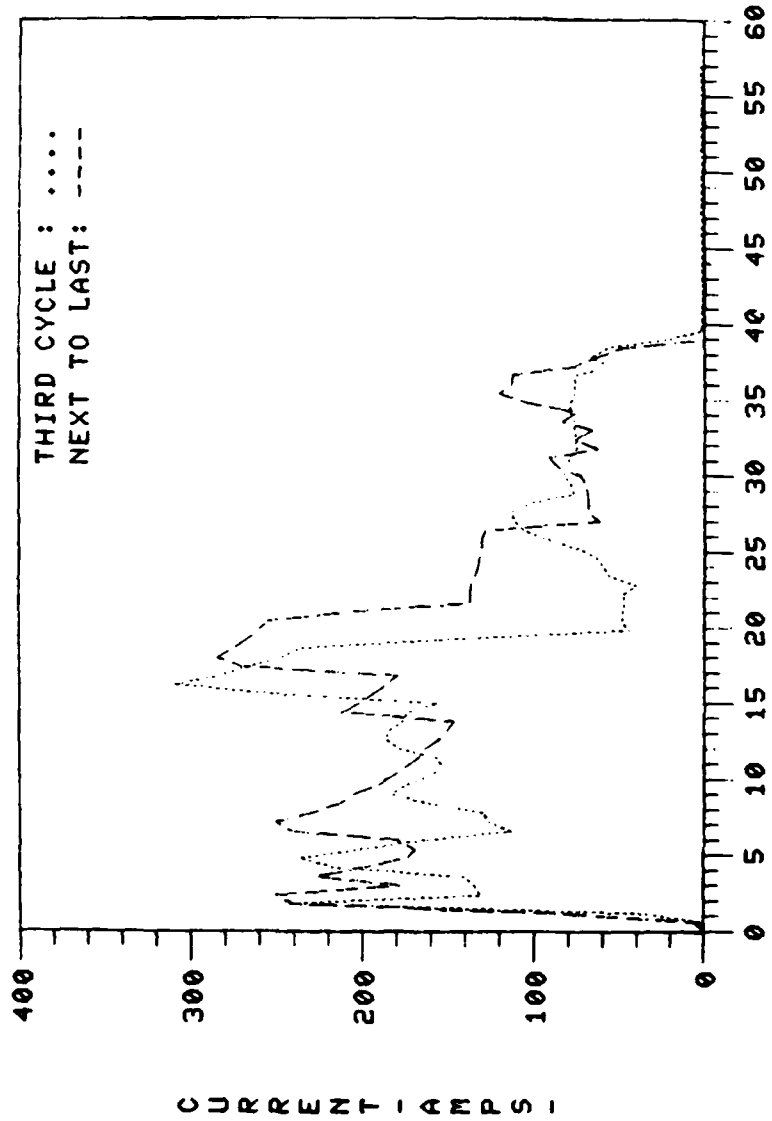

ELAPSED CYCLE TIME (SECS)

Figure 13. "C" Cycle, battery current vs time.

POWER - C CYCLE START/STOP - JULY 10, 1979

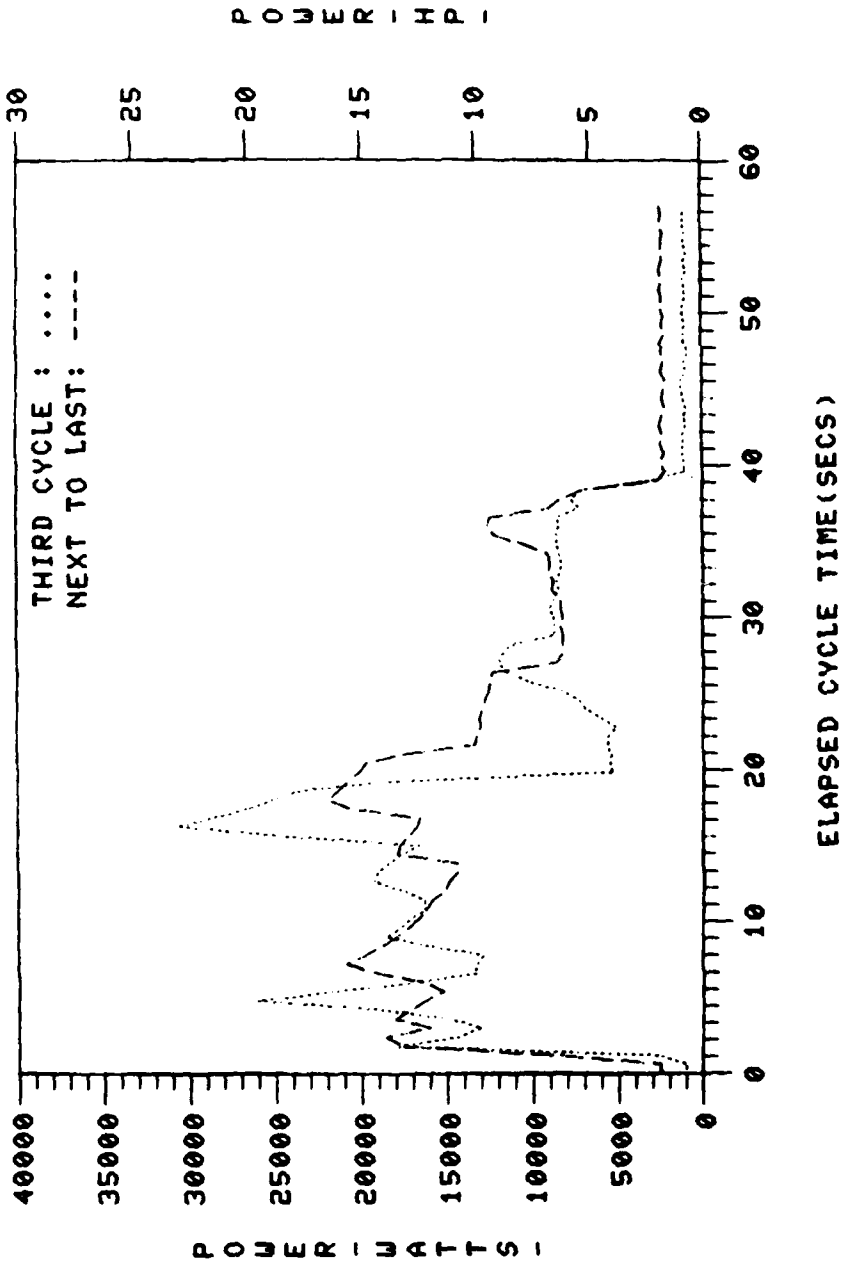


Figure 14. "C" Cycle, battery power vs time.

VELOCITY - D CYCLE START/STOP - JULY 24, 1979

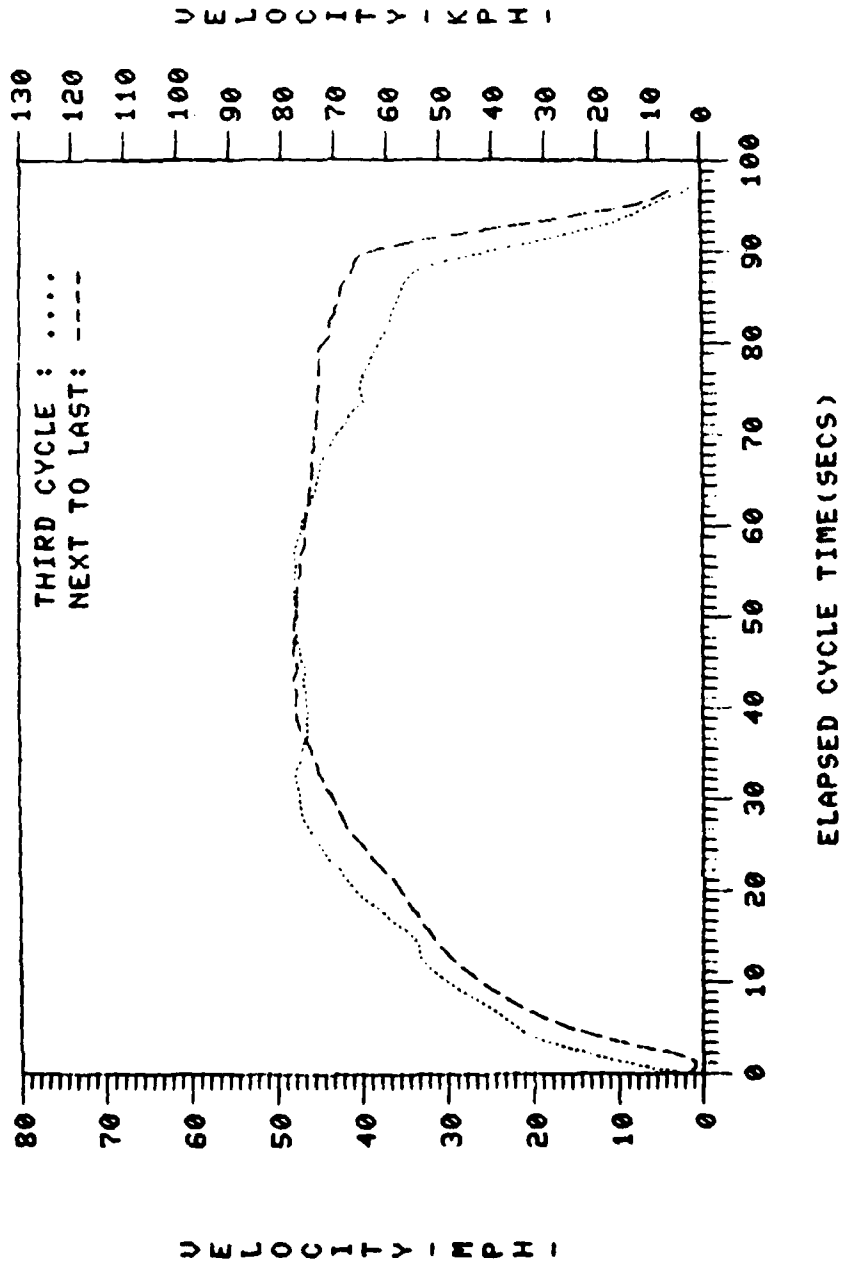


Figure 15. "D" Cycle, velocity vs time.

VOLTAGE- D CYCLE START/STOP-JULY 24, 1979

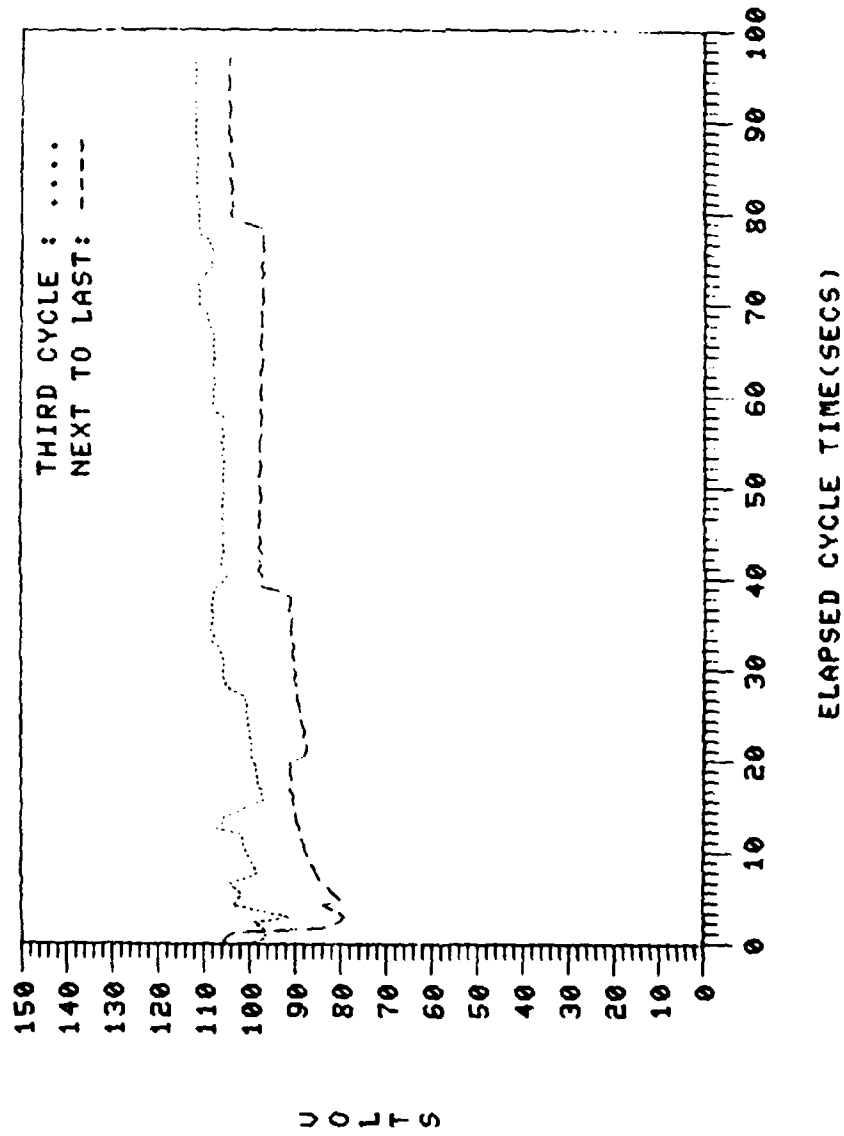


Figure 16. "D" Cycle, battery voltage vs time.

CURRENT-D CYCLE START/STOP-JULY 24,1979


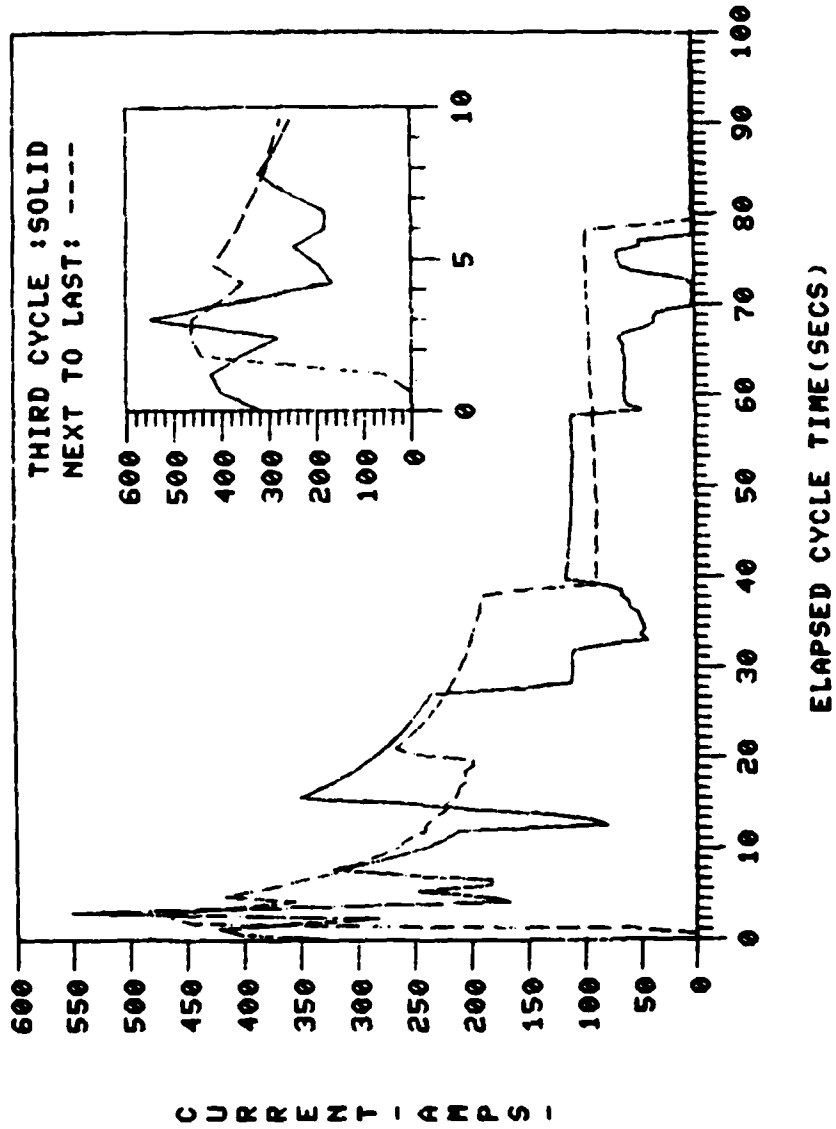


Figure 17. "D" Cycle, battery current vs time.

POWER - D CYCLE START/STOP - JULY 24, 1979

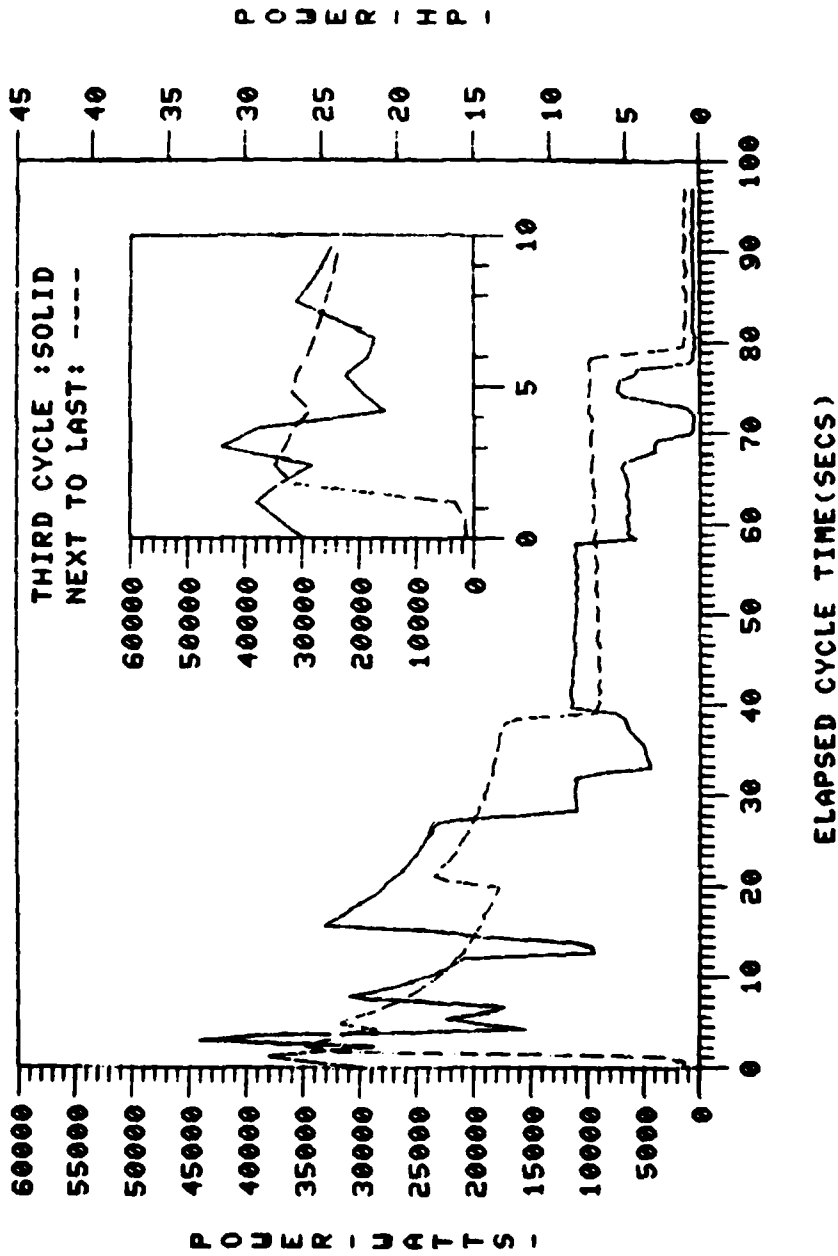

(INSET: 1ST TEN SECONDS OF RUN)

Figure 18. "D" Cycle, battery power vs time.

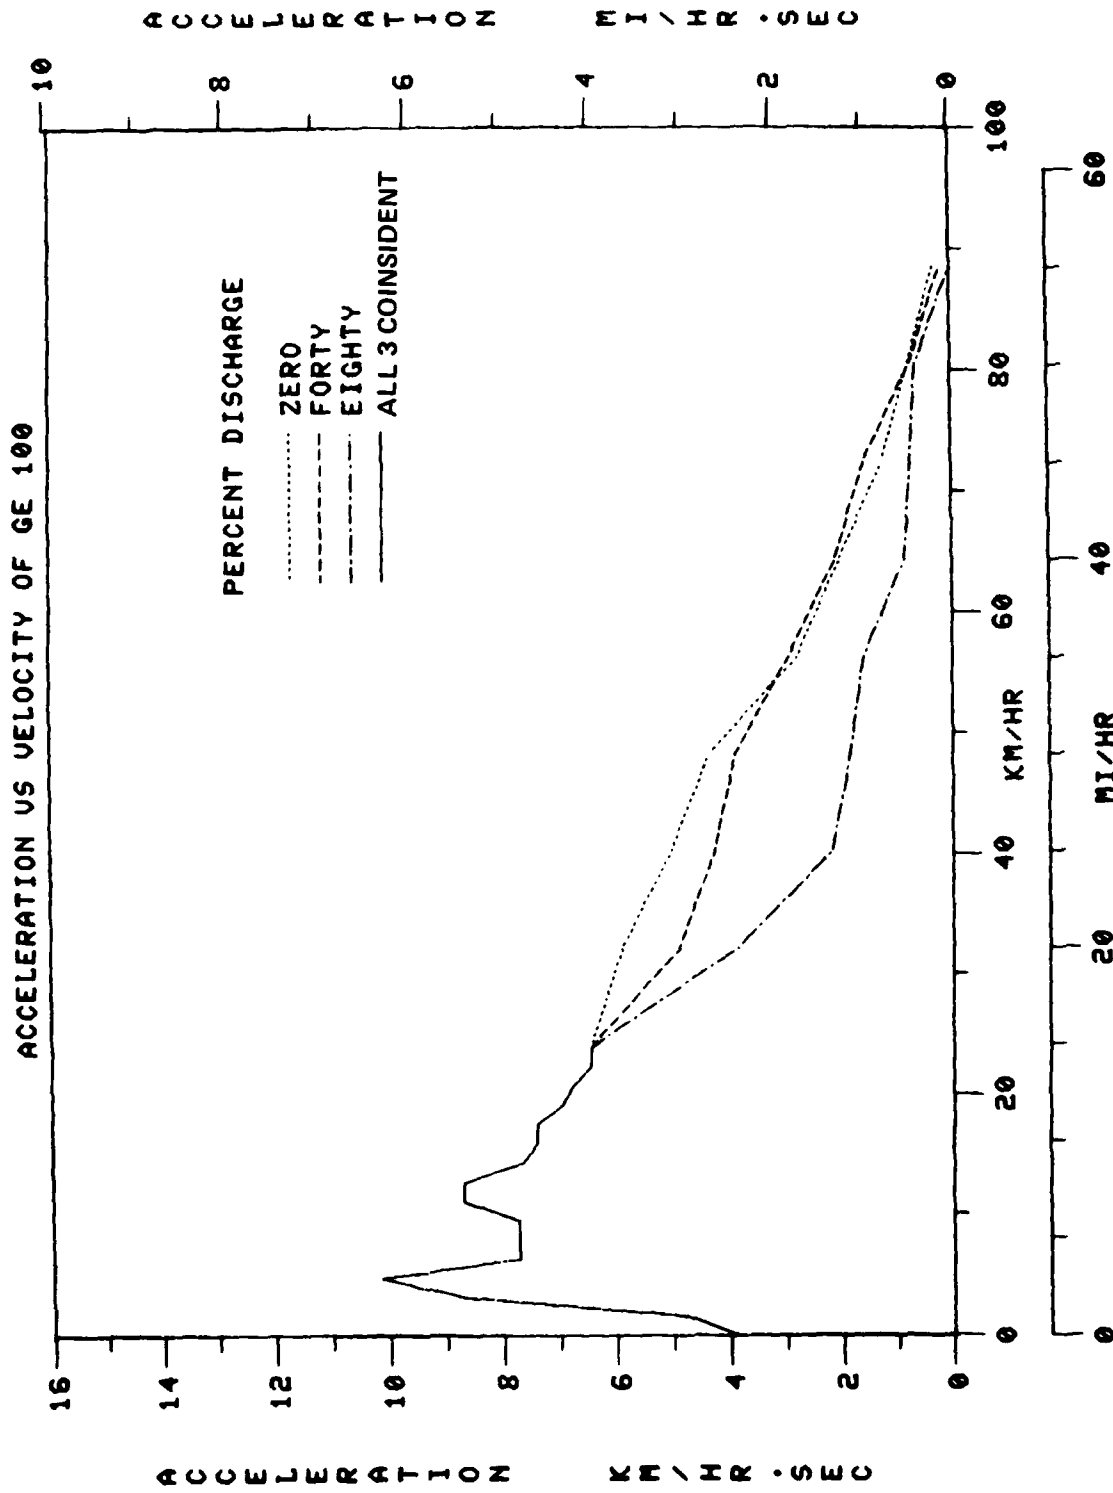


Figure 19. Acceleration vs velocity.

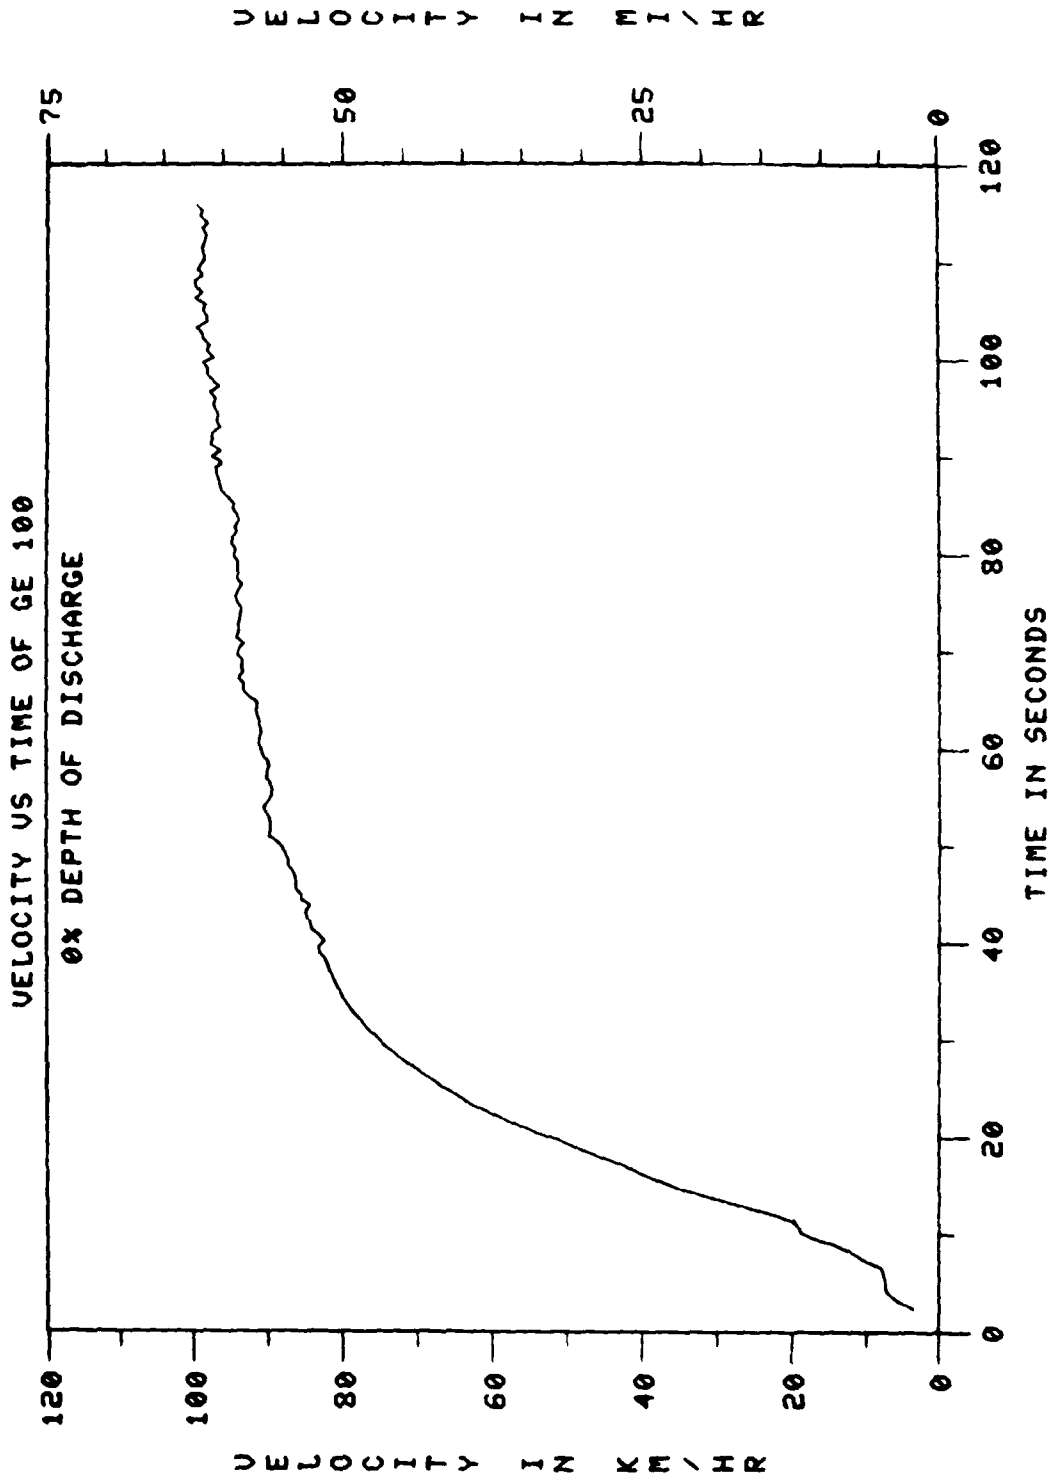


Figure 20. 0% depth of discharge, velocity vs time.

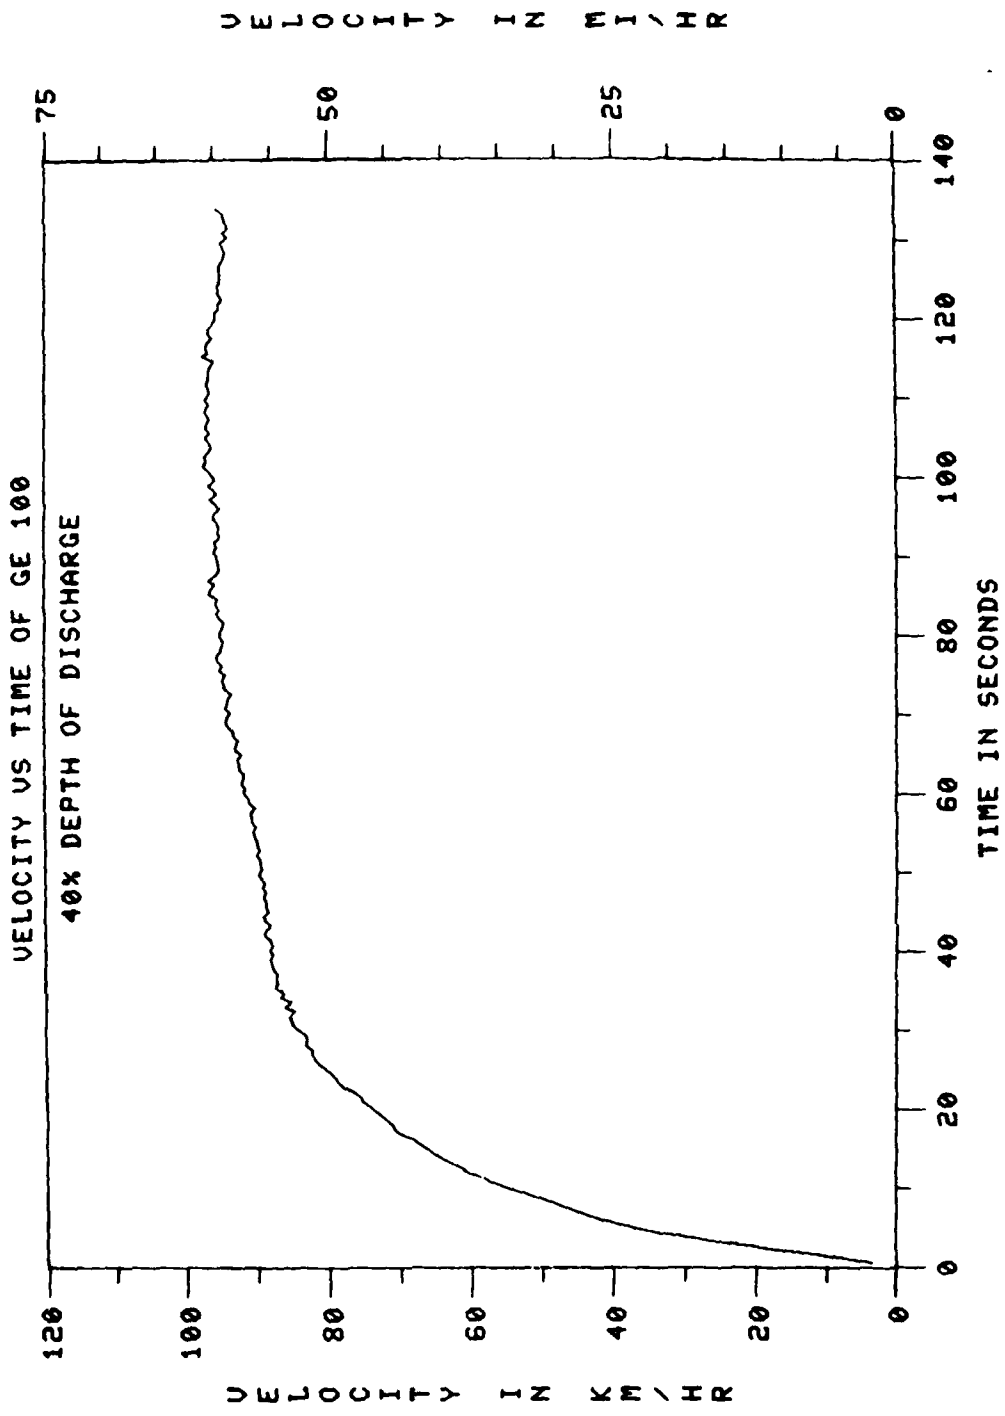


Figure 21. 40% depth of discharge, velocity vs time.

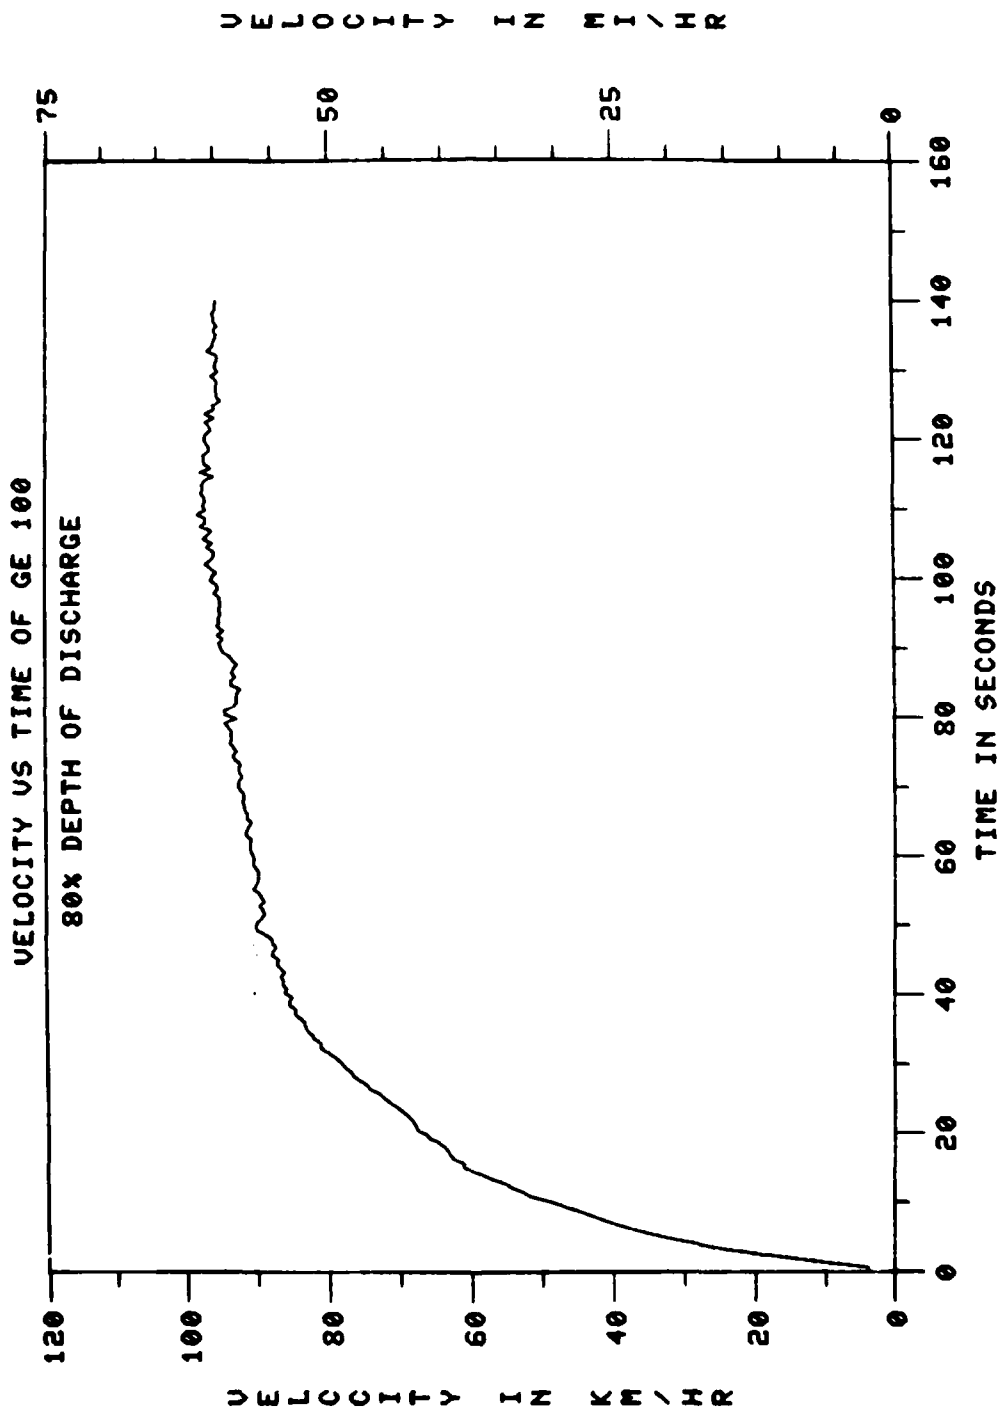


Figure 22. 80% depth of discharge, velocity vs time.

The controller limited the acceleration at low speeds to minimize jerk; therefore, gradeability at low speeds was calculated from draw-bar forces. The gradeability versus velocity results are graphed in Figures 23, 24, and 25; the tabulated results are shown in Appendix B.

5. Gradeability Limit. Gradeability limit is defined by the SAE J227a procedure as the maximum grade on which the vehicle can just move forward. The limit is determined by measuring the tractive force with a load cell while towing a dynamometer at about 1.6 km/h (1 mi/h). It is calculated from:

$$\text{Gradeability limit in percent} = 100 \tan \left(\sin^{-1} \frac{P}{W} \right)$$

where:

P = tractive force (lb).

W = gross vehicle weight (lb).

The tractive forces that the GE-100 Centennial was capable of exerting for three states of battery discharge were:

0% Discharged — 3115 N (700 lbf).

40% Discharged — 4448 N (1000 lbf).

80% Discharged — 4717 N (1060 lbf).

At a vehicle test weight of 1778 kg (3920 lb), the resulting gradeability limits were:

0% Discharged and cold — 18.1 %

40% Discharged — 26.4 %

80% Discharged and hot — 28.1 %

The values at the 40-percent and 80-percent discharged state were greater than at the 0-percent discharged state for the tractive force measurements. The cause was a combination of controller action and an increase in battery temperature. Lower tire and bearing friction with a warmed-up vehicle also decreased the propulsion forces required.

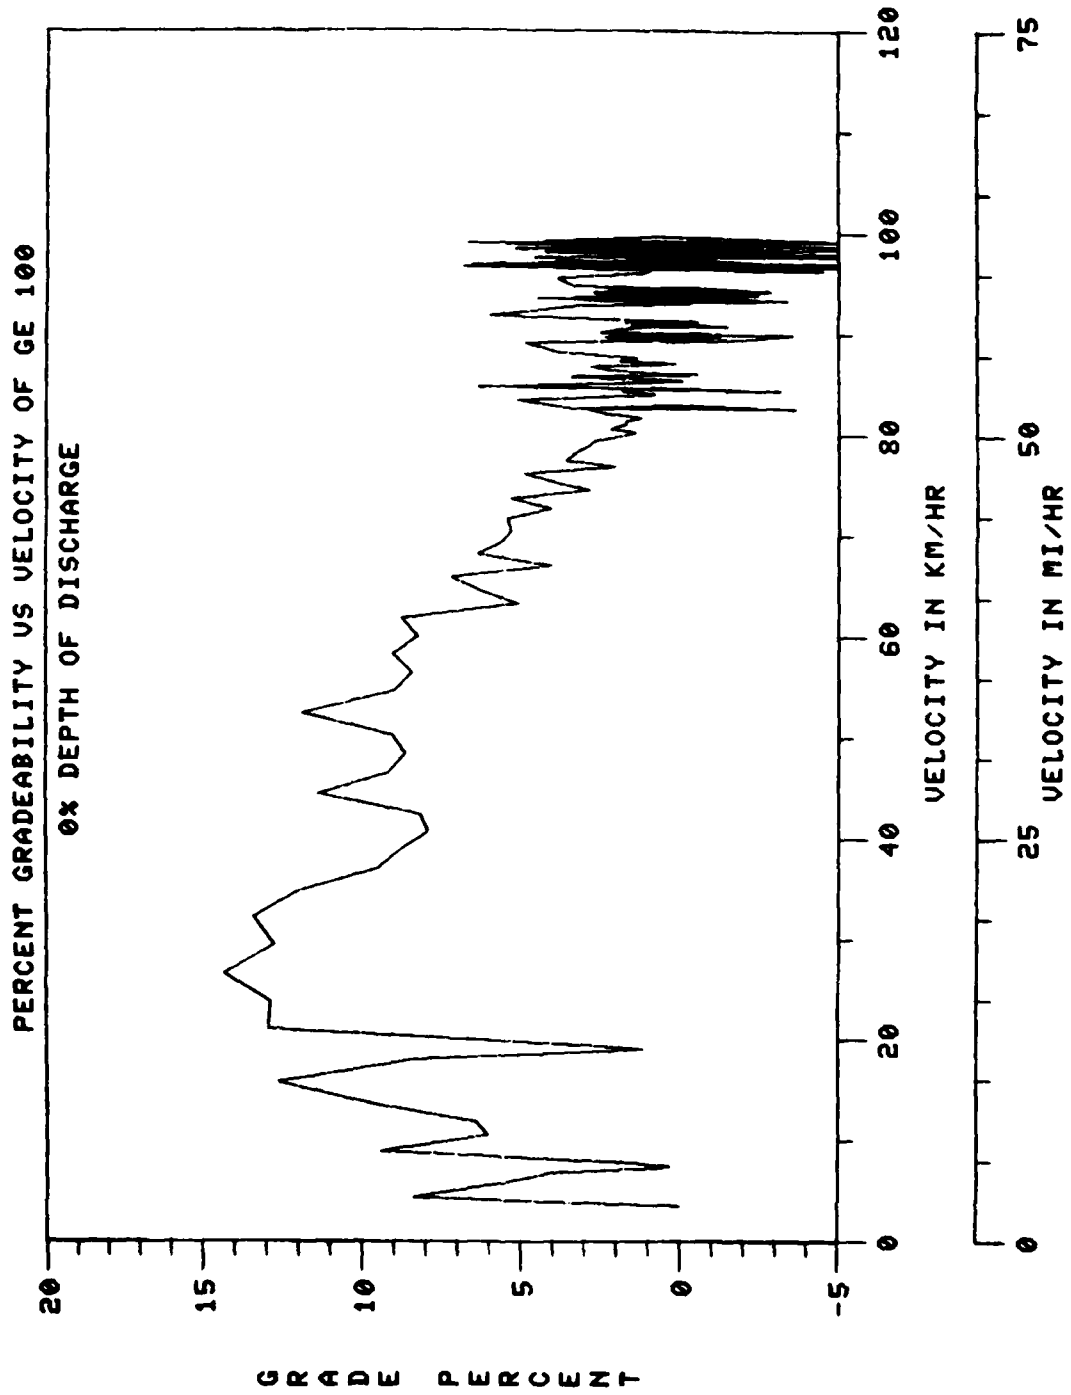


Figure 23. 0% depth of discharge, percent gradeability vs velocity.

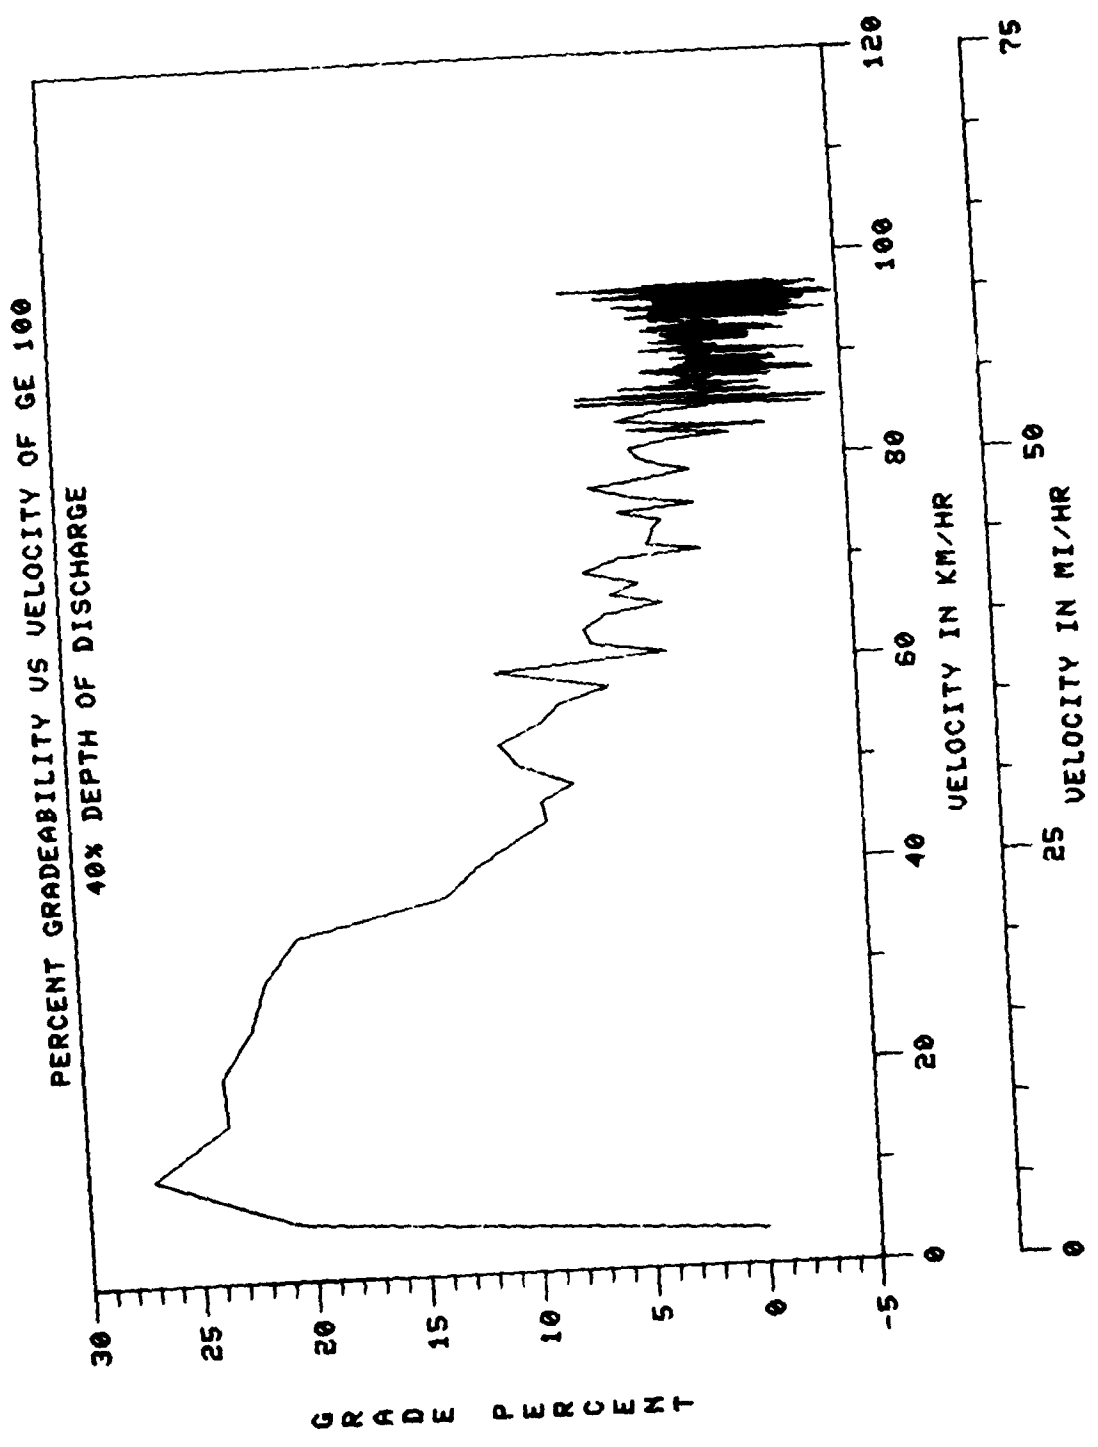


Figure 24. 40% depth of discharge, percent gradeability vs velocity.

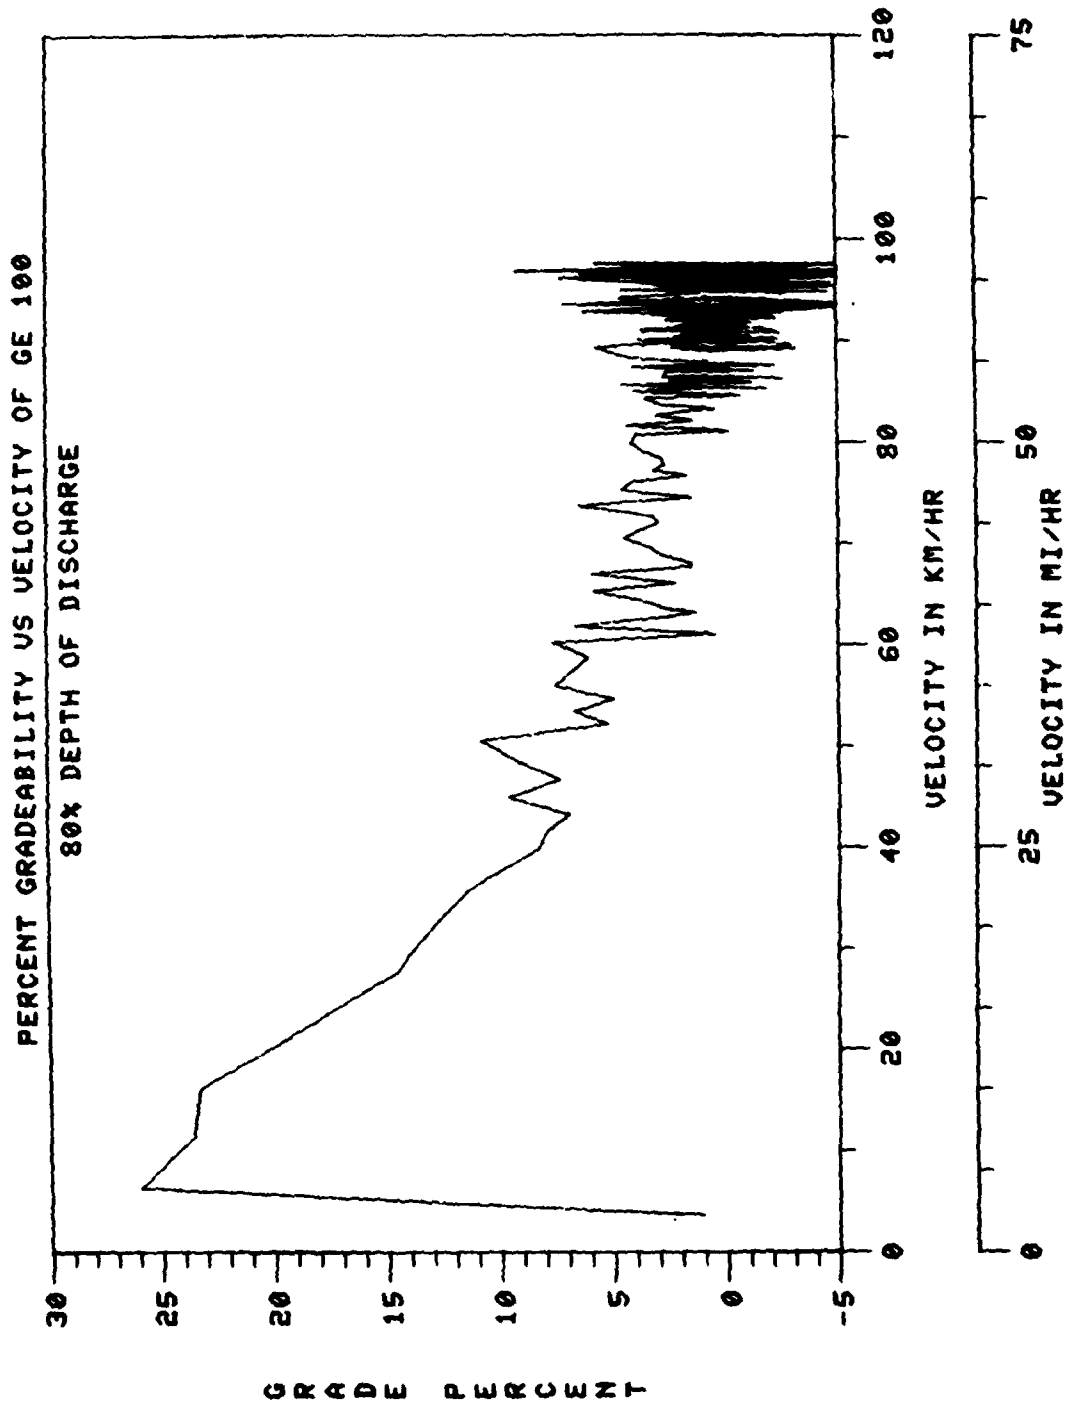


Figure 25. 80% depth of discharge, percent gradeability vs velocity.

The depth of discharge was determined by measuring the energy drawn from the battery using a Hall-effect meter. The battery was discharged by accelerating the vehicle for coast-down tests. This procedure raised the electrolyte temperature from 27°C to 52°C (80°F to 125°F) or, in effect, increased the battery capacity by 31 percent (0.7 percent capacity increase per degree Fahrenheit change). Acceleration runs also changed the drive train friction. This testing was not intended to investigate drive train friction or temperature effects on battery capacity, hence the greatest value of draw-bar force was used to calculate gradeability limit.

6. Road Energy Consumption. Road energy is a measure of the energy consumed in overcoming the vehicle's aerodynamic and rolling resistance.

The road energy for the vehicle at various speeds and the losses in the drive train were determined from coast-down tests (Figures 26, 27, and 28). Road energy E_n is calculated from the following equation:

$$E_n = 7.72 \times 10^{-5} W \frac{V_{n-1} - V_n}{t_n - t_{n-1}} \frac{\text{kWh}}{\text{km}} - E_d$$

where:

- V = vehicle speed, km/h
- W = gross vehicle weight, kg
- t = time, s
- E_d = drive train energy

$$\frac{V_{n-1} - V_n}{t_n - t_{n-1}} = a, \text{ km/h.s}$$

The results of the road energy determination are shown in Figure 29 and Appendix B.

7. Road Power Requirements. Road power is a measure of vehicle aerodynamic and rolling resistance. The road power, P_n , required to propel a vehicle at speed n is determined from coast-down tests. The following equation was used:

$$P_n = 6.08 \times 10^{-5} W \frac{V_{n-1}^2 - V_n^2}{t_n - t_{n-1}}$$

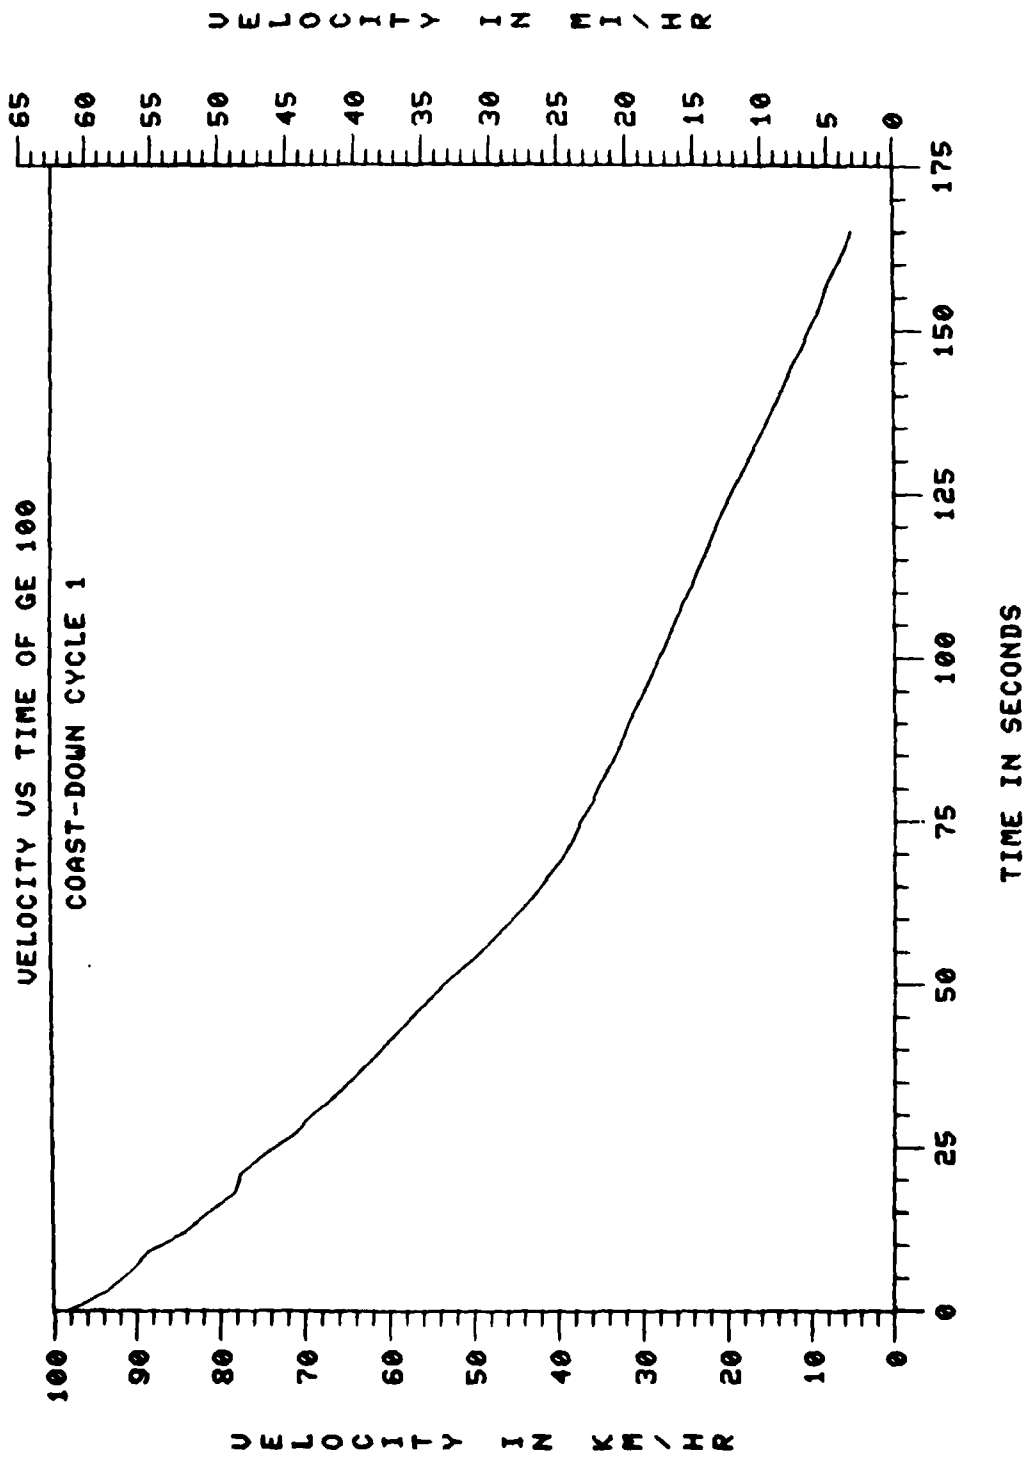


Figure 26. Coast-down cycle 1, velocity vs time.

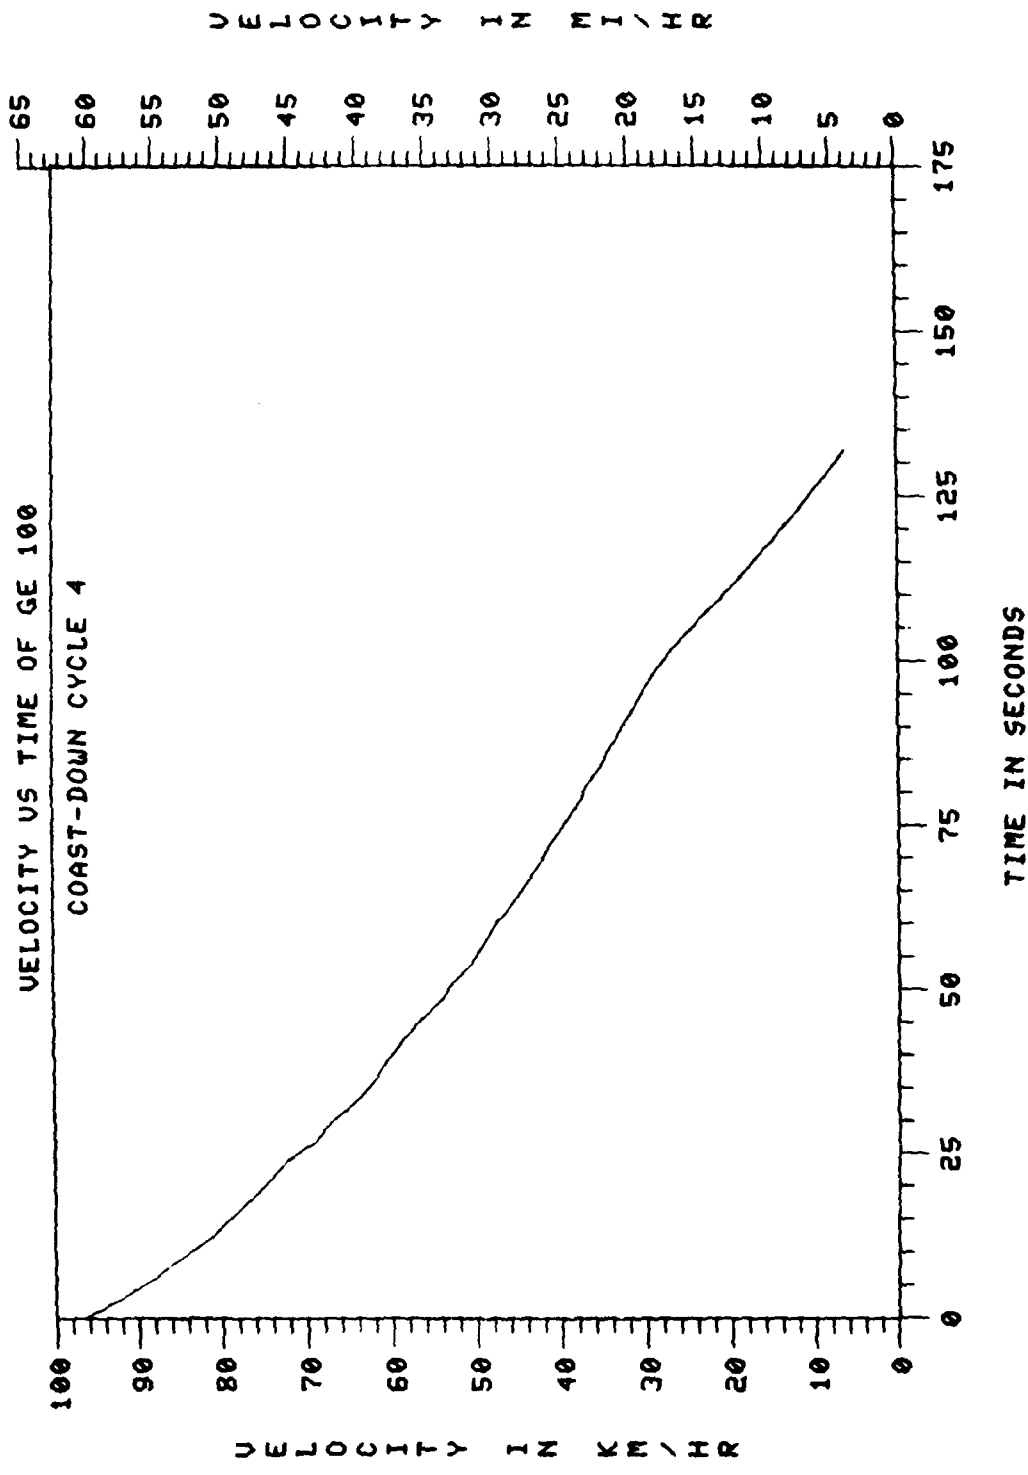


Figure 27. Coast-down cycle 4, velocity vs time.

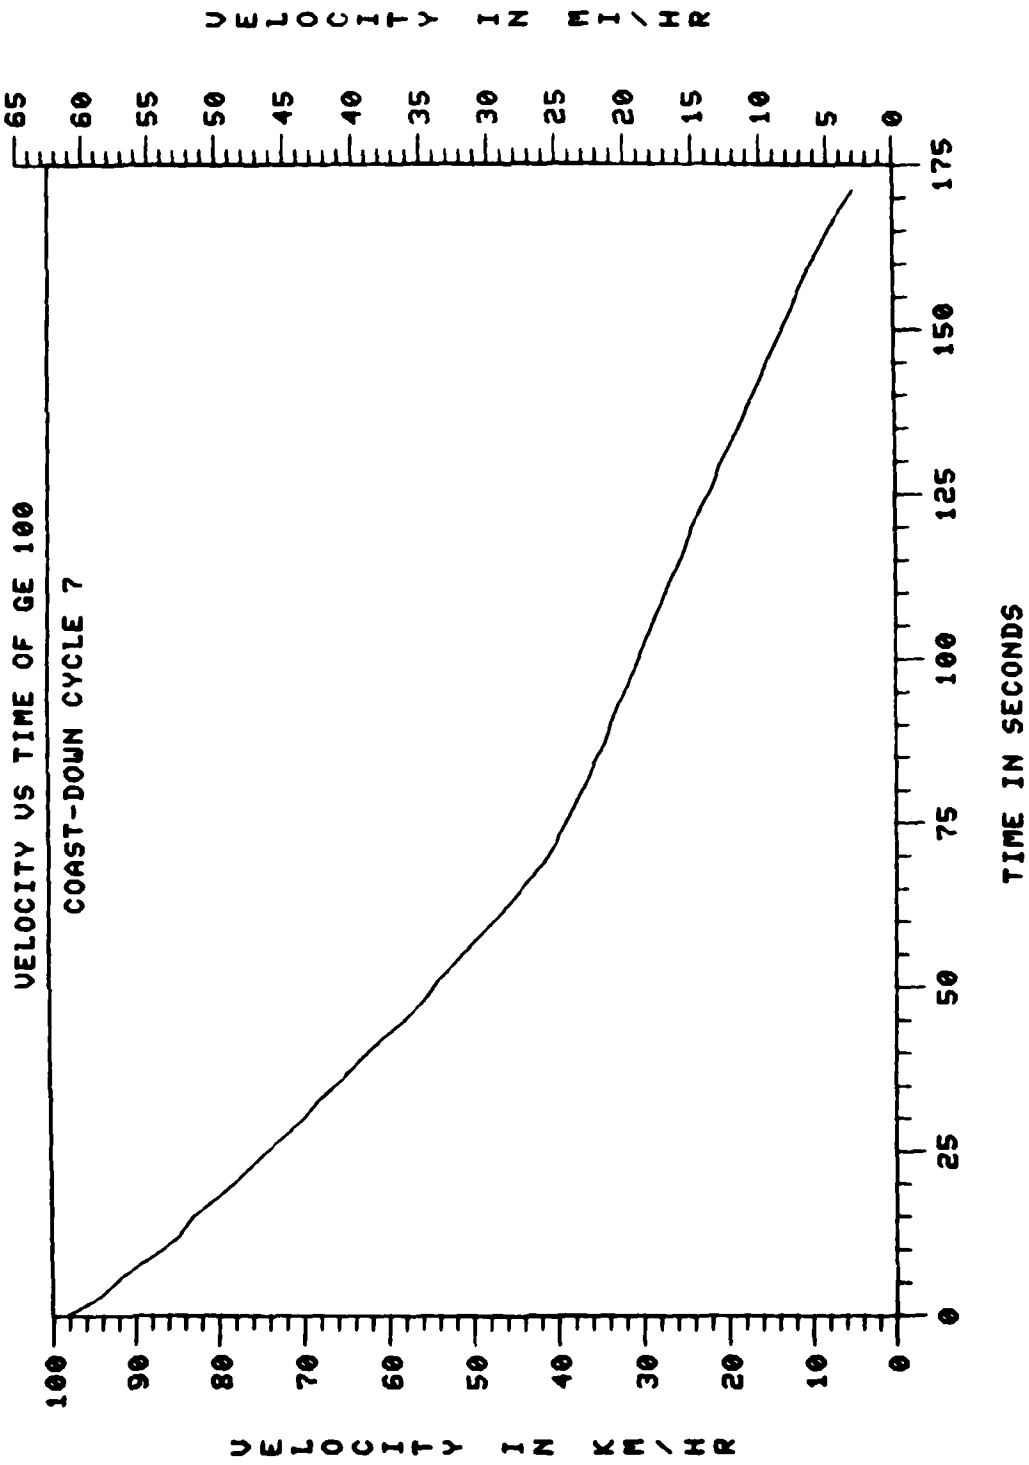


Figure 28. Coast-down cycle 7, velocity vs time.

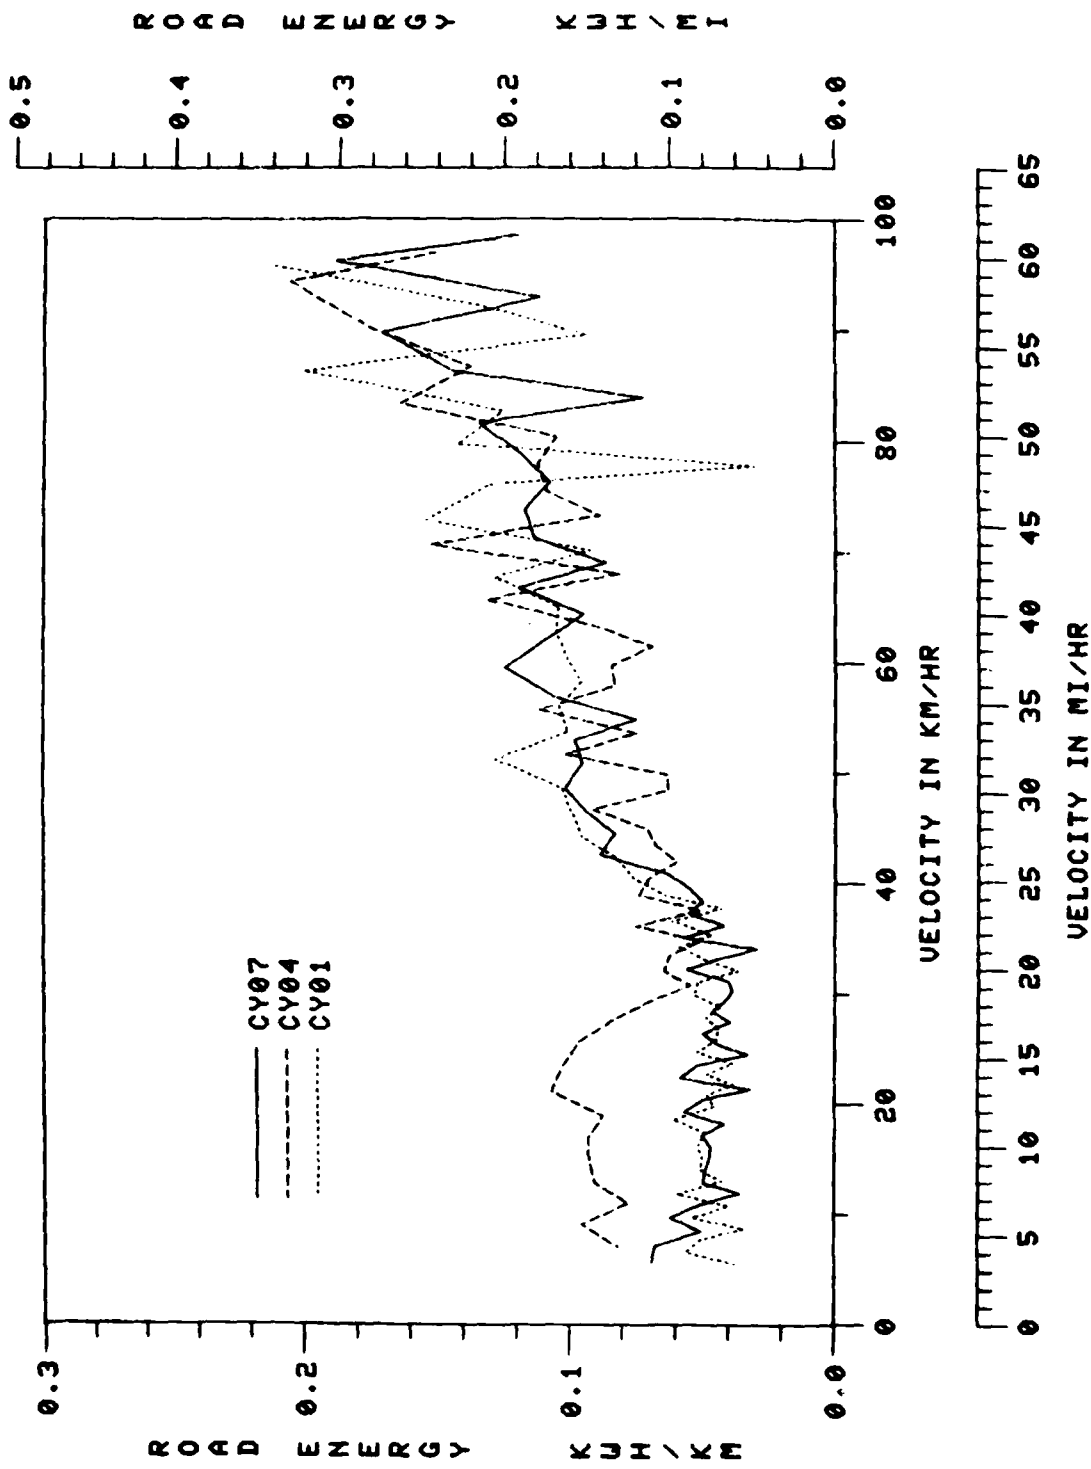


Figure 29. Road energy vs velocity.

Because there is no way to disengage the motor, these calculations include motor windage losses. The results of road power calculations are shown in Figure 30 and Appendix B. Appendix C shows a calculation approach to take windage losses into account.

8. Indicated Energy Economy. SAE J227a defines energy economy as "the vehicle range in various operating modes divided into the AC energy required to return the battery to its original state of charge. The test procedure monitored electrical power transfer at three points. A rotating watt-hour meter measured the 60-Hz a.c. input to the charger. A Hall-effect device measured the d.c. energy into the battery. A Hall-effect device also measured the d.c. energy out of the battery. The efficiency of the charger, the battery, and the overall system were then calculated as the ratio of energy out to energy in.

The Vehicle Energy Economy column of Table 1 is the system economy, which is the a.c. energy into the charger divided by the distance covered at the test speed or over the driving pattern. The Battery Energy Economy column is the d.c. energy out of the battery divided by the distance covered during the test.

Charger efficiency is the ratio of output d.c. energy to input a.c. energy expressed as a percentage. The Hall-effect devices responded from d.c. to frequencies beyond 5 kHz.

VIII. COMPONENT PERFORMANCE AND EFFICIENCY

1. Battery Charger. The GE CRD Ferro-Resonant laboratory model battery charger and the on-board accessory battery charger are described in Appendix A. The Ferro-Resonant unit charges the main propulsion batteries during a non-operating period. The auxiliary battery was charged from the propulsion batteries during operation of the vehicle. Charger efficiency was calculated to be as high as 84.3 percent. During portions of the test the auxiliary battery was charged with a separate charger at the same time the propulsion batteries were being charged.

2. Battery Characteristics. The GE-100 Centennial used the Globe-Union GC-419 lead-acid batteries for propulsion. Eighteen modules of 6 volts each were connected in series to provide a nominal operating level of 108 volts. The propulsion batteries are rated at 132.5 Ah on a discharge current of 75 A for 106 min. Figures 31 and 32 display the battery characteristics for the first 25 percent and the last 25 percent of operating range, respectively. The reduced power at speed for the last 25 percent of range reflects the reduced chassis forces due to warmed-up tires, etc. The roll-off of voltage with increasing range is a characteristic of the battery, but control of current and power is due to the motor controller.

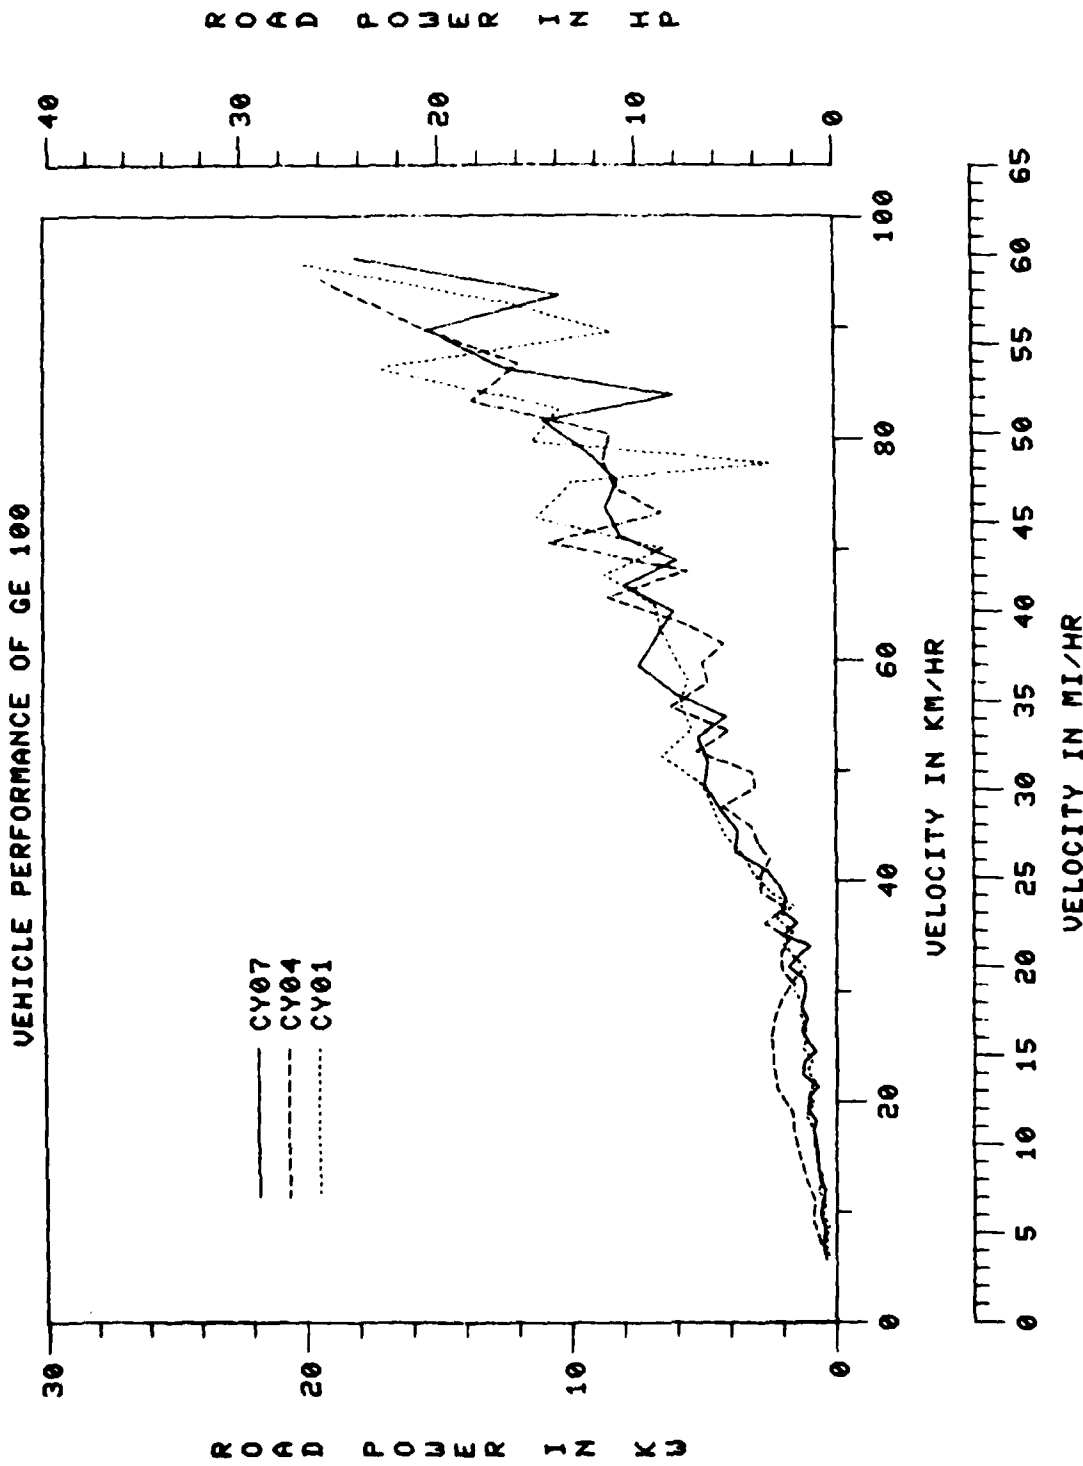


Figure 30. Road power vs velocity.

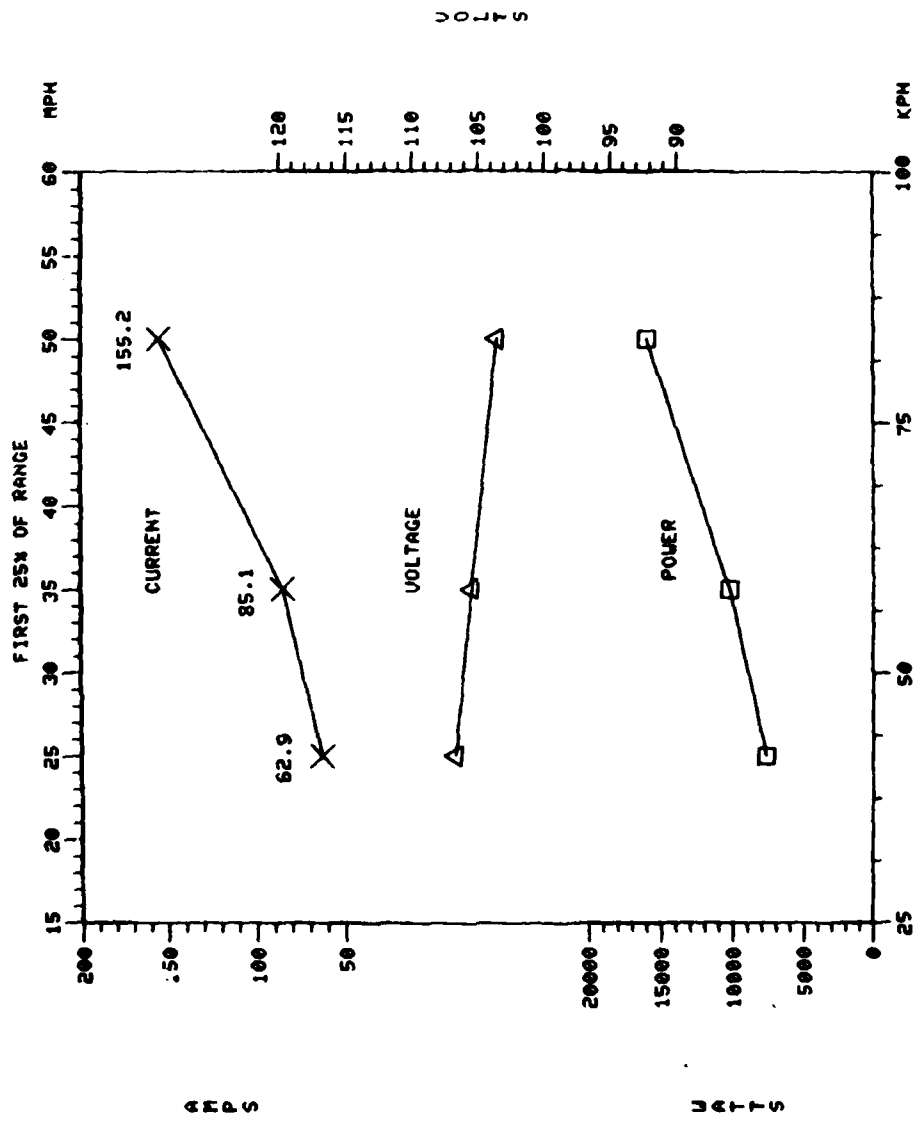


Figure 31. Constant-speed battery performance, first 25% of range.

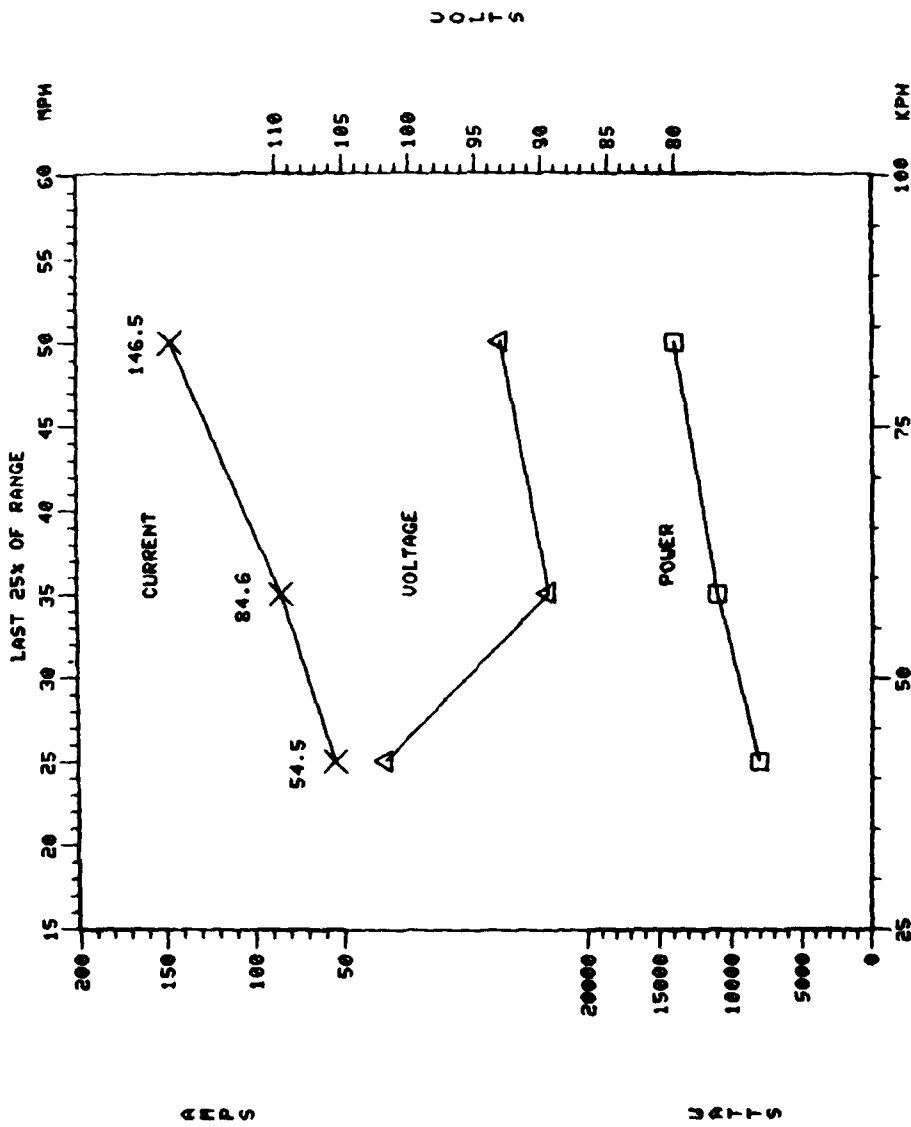


Figure 32. Constant-speed battery performance, last 25 percent of range.

3. Controller. The General Electric EV-1 Silicon Control Rectifier (SCR), model C, with current limiting and demand pickup of a contractor to bypass the controller was used. The controller has two adjustable features — creep speed and controlled acceleration — and one fixed feature — top speed. The SCR is switched on and off by an oscillator card at a rate of 50 Hz to 300 Hz with duty cycle varying from 5 percent at 50 Hz to 50 percent at 300 Hz. When the oscillator reaches approximately 95 percent at 50 Hz, the bypass relay is energized to provide uninterrupted battery voltage directly to the motor. The oscillator is controlled by the position of the accelerator pedal.

Wave form analysis of the controller for harmonic content was calculated by Fourier Transformation. The analysis indicates that 98 percent of the energy is transferred at frequencies below 5 kHz in all modes.

4. Motor. The d.c. series 5BT2364 CII (S/N J142-99) motor is described in Appendix A. The significant design feature of this vehicle is that the motor is connected directly to the drive train, without clutch or transmission. This feature not only allows lower weight, but optimizes the electro-mechanical characteristics of a d.c. series motor for starting torque, speed regulation, and reversing. The vehicle did not have regeneration or plugging in the tested configuration. Having the motor connected directly to the drive train required a correction to the coast-down tests to develop the aerodynamic drag plus rolling resistance. See Appendix C for procedure.

5. Drive Train. The vehicle employed a chain drive with a 1.36:1 ratio and a differential with 4.135:1 ratio for an overall drive line ratio of 5.62:1. Motor/vehicle speed ratio is 80.5 r/min/mi/h. Tires, brakes, etc., are described in Appendix A. Manufacturer's figure of 98-percent drive train mechanical efficiency was provided.

IX. RELIABILITY

The vehicle was not available long enough to conduct an evaluation of reliability. However, there was an interruption in the testing to allow the car to be demonstrated to the public. When the car was returned, it required 2.5 gal of water to service the battery and one module had to be replaced because of a burned post. These problems are associated with training the operators concerning routine maintenance.

The on-board auxiliary charger was bypassed in favor of charging from a MERAD-COM charger because of excessive draw from the on-board charger.

APPENDIX A

VEHICLE SUMMARY DATA SHEET

1. Vehicle Manufacturer:

General Electric Co.
Corporate Research and Development
1 River Road Bldg K-1
Schenectady, NY 12345

Triad Associates
32049 Howard
Madison Heights, MI 48071

2. Vehicle Description:

Name: Centennial Electric
Model: GE-100
Availability: One-of-a-kind experimental prototype
Price: Estimated replacement value \$250K

3. Vehicle Weight:

Curb weight: 1551 kg (3420 lb)
Driver weight: 68 kg (150 lb)
Passenger weight (3): 159 kg (350 lb)
Gross weight: 1778 kg (3920 lb)

4. Vehicle Size:

Wheelbase: 2.34 m (92 in.)
Length: 4.06 m (160 in.)
Width: 1.68 m (66.1 in.)
Height: 1.36 m (53.6 in.)
Headroom: 0.97 m (38.3 in.)
Leg room: 1.06 m (41.9 in.)
Frontal area: 1.77 m² (19 ft²)
Road clearance: 0.15 m (6 in.)
Number of seats: 4
Wheel track: 1.38 m (54.5 in.) front; 1.47 m (58.0 in.) rear

5. Auxiliaries and Options:

Lights: Headlights (4), front parking and direction, front side markers (parking and direction), rear lamp assembly (backup, taillight, directional, stop), rear license plate lamp, rear side markers, dome light, 2 courtesy lamps, dash cluster illumination lamps.

Windshield wipers: Yes
Radio: Yes CB transceiver, Am/Fm stereo
Ampmeter: Yes
Speedometer: Yes
Left-hand drive: Yes
Regenerative braking: No
Power steering: No
Windshield washers: Yes
Heater: Yes (gas)
Fuel gage: Yes (state of charge)
Tachometer: No
Odometer: Yes
Direct-drive transmission
Mirrors: Yes (3)
Power brakes: No

6. Propulsion Batteries:

Types: Lead-acid (motive GC-419)
Modules: 18 (6 volts)
Battery voltage: 108 volts
Size: 0.26L x 0.18W x 0.29H; 0.014 m³ each 0.252 m³ total (10.2L x 7.1W x 11.4 H; 826 in³ each, 14859 in³, 8.6 ft³ total)
Manufacturer: Globe Union
Cells: 3 per module 54 total
Capacity: 132.5 Ah (75 A for 106 min)
Weight: 30.9 kg each, 556.2 kg total (68.1 lb ea, 1226 lb total)

7. Auxiliary Battery:

Type: Lead-acid (SCI)
Manufacturer: Globe Union
Cells: 6
Voltage: 12 volts
Capacity: 30 Ah @ 20-h rate
Size: 0.197L x 0.130W x 0.187H m, (7.75L x 5.13W x 7.38H in.)
Weight: 10 kg (21.8 lb)

8. Controller:

Type: SCR EV-1C
Manufacturer: General Electric
Voltage rating: 84 to 144 volts
Current rating: 850A peak 375 max avg batt.
Size: 0.356L x 0.205W x 0.177H m (14L x 8W x 7H in.)
Weight: 23.1 kg (51 lb)

9. Propulsion Motor:

Type: d.c. series 5BT 2364 CII S/N JL 42-99 blower vent
Manufacturer: General Electric
Voltage: 109 V at rated power
Power: 16.26 kW (21.8 hp)
Insulation class: F
Current: 170A at rated power
Size: 0.29 m dia. (11.38 in.), 0.51 mL (20.0 in.)
Weight: 104.4 kg (230 lb)
Rated speed: 3270 r/min
Maximum speed: 6800 r/min

10. Battery Charger (Propulsion):

Manufacturer: General Electric
Input voltage: 220 V single-phase
Recharge time: 6 to 8 h
Type: Laboratory Model Ferro-Resonant
Off board
Peak current demand: 27.5 A
Automatic turn off: Adj. time 12 h max
Weight: 43 kg (95 lb)

11. Battery Charger (On Board):

Type: d.c.-d.c. transformer isolated
Manufacturer: EVA
Peak current: 2.5 A
Size: 0.32L x 0.010W x 0.08H m (12.5L x 4.0W x 3.0H in.)
Weight: 2.7 kg (6 lb)
Automatic turn off: Yes, regulated
Input voltage: 85- to 125-V d.c.
Recharge time: 4 to 6 h

12. Body:

Manufacturer: GE/Triad

Type: Hatchback

Materials: Stainless steel under body; steel and fiberglass body

Doors: 3, 2 parallelogram linkage side, 1 gull-wing rear hatch

Windows: Glass windshield: Lexan® -2 fixed-in side doors, 2 sliding-in doors, 2 fixed-in rear quarters, 1 fixed-in rear door

Seats: 2 full bucket in front — 2 removable rear facing jump seats.

Cargo space volume: 1.36 m³ (48 ft³) to window level

Cargo space dimension: 1.83L x 1.22W x 0.61 H m (6.0L x 4.0W x 2.0H ft)

13. Chassis:

Type: Unibody

Manufacturer: Triad Services

Material: Stainless steel backbone, fiberglass panels

Modification: None — original design

Springs and shocks: Coil, Monroe take-aparts

Axles: Audi Fox Front; Subaru hubs, no axle-rear Morse Hyvo chain, Chrysler parking pawl, BW differential 1.36: 1 chain, 4.135: 1 differential, 5.620:1 driveline ratio (80.5 r/min/mi/h)

Steering: Triad Services, new design, 18.5: 1 turning ratio, 9.75 m (32 ft) turning diameter

Brakes: Front, inboard Chevelle, copper drums; rear, subaru drums

Parking: Vega coupled to front Chevelle

Regenerative: No

Tires: Michelin B78-13 radial 165 to 179 K Pa (24 to 26 lb/in.²)*
0.30 m (11.8 in.) rolling radius

Wheel track: 1.38 m (54.5 in.) front; 1.47 m (58.0 in.) rear

* This pressure range is the normal manufacturer's recommended operating band; however, with permission of the tire manufacturer GE increased the pressure to 283 kPa (41 lb/in.²). The pressure of 283 kPa was maintained for the tests in this report.

Motor Characteristics Data

| IBATT | IARM | VM | TORQUE | RPM | HP | LOSSES WATTS | EFF. |
|-------|------|-------|--------|-------|-------|-----------------|------|
| 177. | 560. | 27.2 | 166.5 | 0. | 0 | 15012. | 0 |
| 171. | 459. | 34.9 | 129.5 | 312. | 7.68 | 10299. | 35.8 |
| 221. | 377. | 59.5 | 101.8 | 1046. | 20.27 | 7306. | 67.4 |
| 280. | 309. | 96.2 | 78.7 | 2164. | 32.45 | 5494. | 81.5 |
| 245. | 253 | 105.4 | 60.8 | 2620. | 30.33 | 4075. | 84.7 |
| 201. | 208. | 107.5 | 46.6 | 2916. | 25.88 | 3023. | 86.5 |
| 165. | 170. | 109.2 | 35.0 | 3272. | 21.82 | 2325. | 87.5 |
| 135. | 140. | 110.6 | 25.4 | 3750. | 18.17 | 1899. | 87.7 |
| 111. | 114. | 111.8 | 17.8 | 4404. | 14.90 | 1688. | 86.8 |
| 91. | 94. | 112.8 | 11.6 | 5372. | 11.87 | 1732. | 83.6 |
| 74. | 77. | 113.5 | 6.8 | 6778. | 8.80 | 2178. | 75.1 |

APPENDIX B. TABULATIONS OF GRAPHED DATA.

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | 26.437885000 | 110.196660500 | 2698.087800000 | 1.201100000 |
| 1.59999760 | 52.152788800 | 109.408334000 | 5823.201610000 | 1.504400000 |
| 3.19999520 | 66.816932200 | 108.130717000 | 6956.823080000 | 2.385400000 |
| 4.79999280 | 59.744053100 | 110.504591000 | 6030.358800000 | 3.231200000 |
| 6.39999040 | 52.916572700 | 108.858803000 | 6030.358800000 | 3.999200000 |
| 7.99998800 | 141.594167000 | 105.895041000 | 13228.273700000 | 4.768500000 |
| 9.59998560 | 131.842661000 | 105.333393000 | 12759.454000000 | 5.626500000 |
| 11.19998320 | 104.440268000 | 104.734844000 | 10934.157200000 | 6.524400000 |
| 12.79998080 | 100.458949000 | 102.286543000 | 10285.126300000 | 7.469200000 |
| 14.39997840 | 89.834486300 | 106.236801000 | 9590.636570000 | 8.463600000 |
| 15.99997600 | 77.372882500 | 105.340094000 | 8821.114040000 | 9.420470000 |
| 17.59997360 | 87.565972000 | 106.1508815000 | 8617.536660000 | 10.382800000 |
| 19.19997120 | 82.666082600 | 108.188685000 | 9057.263810000 | 11.341000000 |
| 20.79996880 | 78.342203000 | 105.642718000 | 7678.172430000 | 12.299200000 |
| 22.39996640 | 76.111751000 | 106.569643000 | 7700.275120000 | 13.257400000 |
| 23.99996400 | 71.234698900 | 107.935245000 | 8057.906700000 | 14.215600000 |
| 25.59996160 | 73.457538500 | 105.636018000 | 7089.542950000 | 15.173800000 |
| 27.19995920 | 97.662636800 | 105.752155000 | 9365.538140000 | 16.132000000 |
| 28.79995680 | 90.471395800 | 106.030212000 | 9430.101260000 | 17.090200000 |
| 30.39995440 | 88.162281700 | 106.491407000 | 9134.041570000 | 18.048400000 |
| 31.99995200 | 91.110842800 | 106.710280000 | 9177.665300000 | 19.006600000 |
| 33.59994960 | 93.523993900 | 106.033562000 | 9293.995230000 | 20.000000000 |
| 35.19994720 | 92.613035700 | 106.365221000 | 9478.378180000 | 21.000000000 |
| 36.79994480 | 100.032651000 | 105.227307000 | 10037.343500000 | 22.000000000 |
| 38.39994240 | 105.511087000 | 105.509831000 | 10703.914100000 | 23.000000000 |
| 39.99994000 | 112.169456000 | 103.9486900000 | 10701.095800000 | 24.000000000 |
| 41.59993760 | 135.405234000 | 102.107258000 | 10735.904800000 | 25.000000000 |
| 43.19993520 | 116.523786000 | 105.819156000 | 12908.366300000 | 26.000000000 |
| 44.79993280 | 194.584530000 | 103.615915000 | 17334.922800000 | 27.000000000 |
| 46.39993040 | 227.688599000 | 102.508152000 | 24411.652000000 | 28.000000000 |
| 47.99992800 | 158.255314000 | 102.592971000 | 15527.534800000 | 29.000000000 |
| 49.59992560 | 160.838477000 | 102.511502000 | 15291.811000000 | 30.000000000 |
| 51.19992320 | 151.419321000 | 102.789560000 | 14751.032500000 | 31.000000000 |
| 52.79992080 | 105.008665000 | 104.894532000 | 11782.874200000 | 32.000000000 |
| 54.39991840 | 76.078763600 | 106.475774000 | 7588.598380000 | 33.000000000 |
| 55.99991600 | 68.844385200 | 106.821134000 | 6849.321640000 | 34.000000000 |
| 57.59991360 | 60.980709700 | 107.751041000 | 6677.153330000 | 35.000000000 |
| 59.19991120 | 53.195696400 | 107.692972000 | 5427.188180000 | 36.000000000 |
| 60.79990880 | 53.675281500 | 106.951536000 | 5141.598180000 | 37.000000000 |
| 62.39990640 | 53.462132700 | 107.399281000 | 5406.086140000 | 38.000000000 |
| 63.99990400 | 57.478976200 | 107.795709000 | 5903.559260000 | 39.000000000 |
| 65.59990160 | 57.902736700 | 107.742107000 | 6026.287340000 | 40.000000000 |
| 67.19989920 | 59.151189900 | 107.491967000 | 5938.324420000 | 41.000000000 |
| 68.79989680 | 57.338261600 | 107.366966000 | 5668.123300000 | 42.000000000 |
| 70.39989440 | 58.514271400 | 107.623737000 | 6090.859460000 | 43.000000000 |

CYCLE 3, B CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 27.00000000 | 64.358106300 | 106.811899000 | 6114.116450000 | 21.391000000 |
| 27.59999760 | 75.822477300 | 106.727030000 | 7413.521820000 | 21.577000000 |
| 28.19999520 | 51.716340900 | 107.268628000 | 5751.748700000 | 21.565000000 |
| 28.80000000 | 56.466518500 | 107.496434000 | 5527.813570000 | 21.547000000 |
| 29.39999760 | 56.354859000 | 107.392581000 | 5653.449900000 | 21.702000000 |
| 29.99999520 | 57.841837000 | 106.790682000 | 5399.850640000 | 21.730000000 |
| 30.60000000 | 55.136874800 | 107.571253000 | 5811.076960000 | 21.680000000 |
| 31.19999760 | 58.542183700 | 107.399281000 | 5718.013020000 | 21.707000000 |
| 31.79999520 | 56.148332500 | 107.459583000 | 5817.475110000 | 21.692000000 |
| 32.40000000 | 58.750237700 | 107.471867000 | 5805.260470000 | 21.723300000 |
| 32.99999760 | 57.689587700 | 109.364667000 | 6472.994300000 | 21.662000000 |
| 33.59999520 | 58.308734800 | 107.424965000 | 5826.199860000 | 21.636000000 |
| 34.20000000 | 57.258214800 | 107.763324000 | 5980.918670000 | 21.653000000 |
| 34.79999760 | 58.534571300 | 107.508718000 | 5872.150180000 | 21.597000000 |
| 35.39999520 | 57.121190400 | 107.589120000 | 5916.937200000 | 21.676000000 |
| 36.00000000 | 58.955794300 | 107.591353000 | 5877.585030000 | 21.722000000 |
| 36.59999760 | 59.562253900 | 107.21837000 | 5729.964360000 | 21.703000000 |
| 37.19999520 | 57.542413400 | 107.266395000 | 5775.596330000 | 21.772000000 |
| 37.80000000 | 57.800000000 | 107.493084000 | 5899.487710000 | 21.719000000 |
| 38.39999760 | 59.699278300 | 107.703023000 | 5961.742580000 | 21.594000000 |
| 38.99999520 | 56.469056000 | 107.761091000 | 6015.817650000 | 21.710000000 |
| 39.60000000 | 55.651984800 | 107.423840000 | 5716.268070000 | 21.749000000 |
| 40.19999760 | 6.287692380 | 109.106710000 | 911.841730000 | 21.713000000 |
| 40.79999520 | 5.633020460 | 111.954220000 | 1124.143260000 | 21.632000000 |
| 41.40000000 | 5.770044820 | 110.930218000 | 559.362025000 | 21.231000000 |
| 41.99999760 | 5.369121710 | 110.910174000 | 943.832462000 | 20.987000000 |
| 42.59999520 | 5.876619320 | 110.863273000 | 918.239876000 | 20.753000000 |
| 43.20000000 | 5.54298380 | 110.320559000 | 657.079171000 | 20.397000000 |
| 43.79999760 | 5.43258910 | 110.515980000 | 693.41451000 | 20.124000000 |
| 44.39999520 | 5.186422570 | 111.107829000 | 929.291220000 | 19.467000000 |
| 45.00000000 | 5.881694290 | 110.318325000 | 576.229866000 | 17.849000000 |
| 45.59999760 | 5.605108100 | 110.712519000 | 725.71383000 | 15.211000000 |
| 46.19999520 | 5.219499910 | 110.877900000 | 771.664157000 | 12.31400000 |
| 46.80000000 | 5.270159670 | 110.961542000 | 821.104380000 | 9.376500000 |
| 47.39999760 | 5.409721520 | 110.837589000 | 758.286215000 | 6.466000000 |
| 47.99999520 | 5.645707900 | 110.742670000 | 678.600200000 | 3.670000000 |
| 48.60000000 | 5.901994200 | 113.075448000 | 1534.788530000 | 1.582600000 |
| 49.19999760 | 5.607645580 | 111.002860000 | 728.040432000 | 1.001500000 |
| 49.79999520 | 5.280309630 | 111.145797000 | 777.480654000 | 1.062300000 |

.416 CP SECONDS EXECUTION TIME

CYCLE 3, B CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | 2.184574210 | 101.909603000 | 2390.976860000 | .315750000 |
| 1.599976000 | 1.871425210 | 102.053657000 | 2471.826160000 | .580190000 |
| 1.199988000 | 1.895300570 | 102.079407000 | 2475.316060000 | .467560000 |
| 1.800000000 | 141.906279000 | 87.142412900 | 9944.279570000 | .729230000 |
| 2.399976000 | 136.567404000 | 86.999475000 | 11328.024200000 | 2.037100000 |
| 2.999988000 | 120.581229000 | 88.616852000 | 10695.615300000 | 3.691000000 |
| 3.600000000 | 105.594825000 | 89.201600500 | 9888.755200000 | 4.378700000 |
| 4.199976000 | 95.741758500 | 90.368731300 | 9409.743520000 | 6.042700000 |
| 4.999988000 | 87.398497800 | 90.988314500 | 8935.117380000 | 6.920600000 |
| 5.400000000 | 80.653854500 | 91.252204900 | 8580.392730000 | 7.702300000 |
| 5.999976000 | 80.326518600 | 91.878321300 | 8330.865240000 | 8.371900000 |
| 6.599988000 | 73.670687500 | 91.483010000 | 7874.770020000 | 9.006200000 |
| 7.200000000 | 71.782796300 | 92.373017000 | 7914.903850000 | 9.529800000 |
| 7.799976000 | 71.572184800 | 92.256813000 | 7664.794490000 | 9.955500000 |
| 8.399988000 | 66.476908800 | 92.877764400 | 7691.972320000 | 10.402000000 |
| 9.000000000 | 63.612084800 | 93.149121600 | 7376.208250000 | 11.128000000 |
| 9.599976000 | 61.752106100 | 93.673968800 | 7432.134610000 | 11.633000000 |
| 10.199988000 | 61.026384500 | 93.163638600 | 7073.838410000 | 11.856000000 |
| 10.800000000 | 59.813465200 | 93.302109000 | 6983.682710000 | 12.113000000 |
| 11.399976000 | 104.077407000 | 88.716254300 | 9485.357980000 | 12.530000000 |
| 11.999988000 | 110.403364000 | 87.500872400 | 10562.573200000 | 13.005000000 |
| 12.600000000 | 113.874648000 | 86.336041600 | 10357.175300000 | 13.576000000 |
| 13.199976000 | 112.532317000 | 85.654973600 | 10217.654900000 | 14.168000000 |
| 13.799988000 | 106.460108000 | 86.592998400 | 10422.392600000 | 14.525000000 |
| 14.400000000 | 102.156528000 | 86.273506600 | 9724.415990000 | 15.087000000 |
| PAUSE | | | | |
| 14.999976000 | 161.734210000 | 79.449559400 | 12482.598800000 | 15.740000000 |
| 15.599988000 | 180.544609000 | 76.201023800 | 14322.938300000 | 16.365000000 |
| 16.200000000 | 170.518994000 | 75.706327400 | 13476.056400000 | 17.061000000 |
| 16.799976000 | 237.110293000 | 67.505442000 | 15566.035700000 | 17.675000000 |
| 17.399988000 | 223.773255000 | 65.593526900 | 14710.317000000 | 18.163000000 |
| 18.000000000 | 213.547173000 | 64.089403600 | 13537.129600000 | 18.795000000 |
| 18.599976000 | 205.150631000 | 64.023452100 | 13328.317400000 | 19.454000000 |
| 19.199988000 | 197.967002000 | 63.373118400 | 12557.631600000 | 19.893000000 |
| 19.800000000 | 189.369992000 | 63.411502600 | 12370.922000000 | 20.332000000 |
| 20.399976000 | 183.764681000 | 62.927973200 | 11969.583700000 | 20.770000000 |
| 20.999988000 | 175.101697000 | 62.658849400 | 11493.451000000 | 21.083000000 |
| 21.600000000 | 110.969224000 | 73.441667600 | 9336.456600000 | 21.481000000 |
| 22.199976000 | 80.831478700 | 79.449559400 | 8206.891900000 | 21.715000000 |
| 22.799988000 | 56.565400500 | 84.266920300 | 6827.806600000 | 21.978000000 |
| 23.400000000 | 9.180428750 | 93.097753600 | 2941.799100000 | 22.257000000 |
| 23.999976000 | 9.685388870 | 95.019587700 | 2992.828580000 | 22.189000000 |
| 24.599988000 | 2.712371720 | 96.376373500 | 2901.083630000 | 21.950000000 |
| 25.200000000 | 6.450091620 | 96.783967600 | 3094.729700000 | 21.845000000 |
| 25.799976000 | 6.691152980 | 96.694631900 | 2644.576120000 | 21.848000000 |
| 26.399988000 | 3.521830410 | 92.244606200 | 2451.468430000 | 21.726000000 |

CYCLE N-1, B CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AVG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 27.00000000 | 7.551361430 | 98.245722000 | 3090.701420000 | 20.372000000 |
| 27.599976000 | 8.848017820 | 98.180954500 | 3023.811171000 | 21.448000000 |
| 28.199952000 | 4.190986320 | 97.7403109100 | 3586.266950000 | 21.404000000 |
| 28.399928000 | 16.161058400 | 97.409317500 | 3736.302560000 | 21.193000000 |
| 28.599904000 | 18.465007500 | 96.705798900 | 3784.609490000 | 20.964000000 |
| 29.199880000 | 18.218961200 | 96.565095200 | 3784.609490000 | 20.964000000 |
| 29.399856000 | 18.470172500 | 97.520971000 | 4273.195220000 | 20.856000000 |
| 30.000000000 | 20.200739300 | 96.598335000 | 3864.295490000 | 20.793000000 |
| 31.199976000 | 11.811803900 | 96.598335000 | 4518.651380000 | 20.734000000 |
| 32.400000000 | -7.391985580 | 95.880560400 | 5350.410420000 | 20.721000000 |
| 32.999976000 | 1.116291740 | 96.139623900 | 5637.745360000 | 20.715000000 |
| 33.599952000 | -2.905626810 | 95.801275000 | 5509.200780000 | 20.919000000 |
| 34.200000000 | -1.078635420 | 96.490276500 | 5718.594660000 | 20.787000000 |
| 34.799976000 | -3.806435070 | 96.043598100 | 5645.305810000 | 20.687000000 |
| 35.399952000 | -2.872639470 | 96.723666000 | 5805.260470000 | 20.631000000 |
| 36.000000000 | -3.978984260 | 96.165317900 | 5449.290860000 | 20.579000000 |
| 36.599976000 | .997029803 | 96.463475800 | 4556.458610000 | 20.503000000 |
| 37.199952000 | 25.788288000 | 96.157501100 | 4350.554620000 | 20.731000000 |
| 37.800000000 | 26.963145000 | 96.534944000 | 4581.469350000 | 20.650000000 |
| 38.399976000 | 25.620813800 | 96.339522500 | 4348.228020000 | 20.659000000 |
| 38.999952000 | 25.587826500 | 96.636563700 | 4137.089190000 | 20.685000000 |
| 39.600000000 | 24.887479800 | 99.158063700 | 2571.288260000 | 20.616000000 |
| 40.199976000 | 3.670157540 | 100.756056000 | 2788.243590000 | 20.470000000 |
| 40.799952000 | 1.090916860 | 100.349578000 | 2537.552580000 | 20.396000000 |
| 41.400000000 | 1.778576120 | | | |
| PAUSE | | | | |
| 41.999976000 | 1.408102870 | 100.479115000 | 2560.236920000 | 20.372000000 |
| 42.599952000 | 1.248241120 | 100.565101000 | 2495.673800000 | 20.286000000 |
| 43.200000000 | 1.661851670 | 100.700210000 | 2569.543100000 | 20.022000000 |
| 43.799976000 | 1.793801050 | 100.310434000 | 2360.731090000 | 19.810000000 |
| 44.399952000 | 1.669464140 | 100.146340000 | 2257.197430000 | 19.743000000 |
| 45.000000000 | 1.819175930 | 100.368562000 | 2354.332930000 | 18.999000000 |
| 45.599976000 | .837168056 | 101.485258000 | 2783.008740000 | 17.156000000 |
| 46.199952000 | .936130090 | 101.505350000 | 2785.33540000 | 15.256000000 |
| 46.800000000 | 1.644089260 | 100.705805000 | 2414.242850000 | 13.458000000 |
| 47.399976000 | 1.694839020 | 100.999496000 | 2531.736080000 | 11.940000000 |
| 47.999952000 | 1.51952340 | 100.939194000 | 2481.132560000 | 10.266000000 |
| 48.600000000 | 2.453547940 | 100.515966000 | 2268.248780000 | 8.658600000 |
| 49.199976000 | 1.545127220 | 100.479115000 | 2207.175660000 | 7.858600000 |
| 49.799952000 | 2.12879470 | 101.009546000 | 2492.183900000 | 7.214200000 |
| 50.400000000 | 1.49437460 | 101.217251000 | 2513.704900000 | 6.683900000 |
| 50.999976000 | 1.600951960 | 101.184867000 | 2543.369800000 | 6.340000000 |
| 51.599952000 | 1.285150620 | 101.275320000 | 2550.348870000 | 6.165900000 |
| 52.200000000 | 1.737976310 | 101.266386000 | 2505.561850000 | 5.642700000 |
| 52.799976000 | 1.694839020 | 101.252986000 | 2511.378340000 | 4.186400000 |
| 53.399952000 | 1.496914950 | 101.296553700 | 2517.194840000 | 2.043700000 |

CYCLE N-1, B CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | 1.256442280 | 110.422781000 | 967.394471000 | 2.529400000 |
| 1.599999760 | 1.099118020 | 110.749783000 | 1107.171256000 | 1.931200000 |
| 1.800000000 | 30.163076200 | 109.174873000 | 2656.569550000 | 1.840600000 |
| 2.399999760 | 242.736402000 | 97.218577000 | 17880.134500000 | 4.382100000 |
| 3.600000000 | 130.894169000 | 104.182066000 | 14392.931700000 | 6.290700000 |
| 4.199999760 | 134.428890000 | 105.511510000 | 13953.016300000 | 6.384600000 |
| 5.400000000 | 140.797985000 | 104.033045000 | 14890.582600000 | 7.824100000 |
| 6.599999760 | 216.777990000 | 102.423886000 | 18793.073000000 | 9.259700000 |
| 7.200000000 | 236.227835000 | 100.870562000 | 26677.253200000 | 10.622900000 |
| 8.399999980 | 201.786510000 | 101.785036000 | 21834.642600000 | 12.315000000 |
| 9.000000000 | 163.845980000 | 103.068220000 | 16921.667600000 | 14.212000000 |
| 10.800000000 | 113.459089000 | 104.140807000 | 13365.122000000 | 15.384000000 |
| 11.399999760 | 126.661639000 | 104.738797000 | 13238.877000000 | 16.039000000 |
| 13.799999980 | 129.366601000 | 102.468554000 | 12910.466200000 | 17.114000000 |
| 14.400000000 | 160.298581000 | 102.968834000 | 16066.521500000 | 17.913000000 |
| 15.599999760 | 182.811175000 | 101.572908000 | 18522.464500000 | 18.393000000 |
| 16.200000000 | 174.800325000 | 102.019084000 | 17757.908000000 | 19.347000000 |
| 17.399999980 | 161.067439000 | 102.741028000 | 17180.568800000 | 20.672000000 |
| 18.000000000 | 153.409301000 | 102.786813000 | 16260.574700000 | 20.754000000 |
| 19.199999980 | 155.733640000 | 102.915233000 | 16354.674000000 | 21.369000000 |
| 20.399999760 | 178.324896000 | 102.062635000 | 17585.498800000 | 22.127000000 |
| 21.600000000 | 186.244396000 | 101.981160000 | 19331.922200000 | 23.044000000 |
| 22.600000000 | 183.798257000 | 101.415510000 | 17997.580600000 | 23.668000000 |
| 23.799999980 | 176.259380000 | 101.842645000 | 18419.013700000 | 24.283000000 |
| 24.400000000 | 173.305740000 | 102.027459000 | 17677.324300000 | 25.009000000 |
| 25.599999760 | 156.532948000 | 103.083854000 | 16663.272900000 | 25.630000000 |
| 26.200000000 | 251.955186000 | 98.179882500 | 24544.234600000 | 26.309000000 |
| 27.399999980 | 309.495265000 | 97.387586500 | 30226.148800000 | 27.381000000 |
| 28.000000000 | 283.607812000 | 98.320027000 | 28674.082900000 | 28.405000000 |
| 29.199999980 | 265.198336000 | 98.562350000 | 26568.246000000 | 29.440000000 |
| 30.399999760 | 248.420456000 | 99.357438500 | 25319.294700000 | 30.412000000 |
| 31.600000000 | 235.918262000 | 99.450682700 | 23767.477100000 | 31.206000000 |
| 32.600000000 | 155.292117000 | 102.571120000 | 18511.359600000 | 31.924000000 |
| 33.799999980 | 44.875861800 | 106.616522000 | 5402.334920000 | 32.344000000 |
| 34.400000000 | 48.570444000 | 106.737684000 | 5540.259280000 | 32.384000000 |
| 35.599999760 | 46.890627300 | 106.476377000 | 5441.494250000 | 32.269000000 |
| 36.200000000 | 47.989359600 | 106.823669000 | 5604.560720000 | 32.131000000 |
| 37.399999980 | 40.333758200 | 106.848237000 | 5618.756880000 | 31.933000000 |
| 38.400000000 | 56.378295100 | 107.306490000 | 5138.740010000 | 31.583000000 |
| 39.000000000 | 59.423280800 | 106.703666000 | 5980.373400000 | 31.530000000 |
| 40.199999980 | 63.643123400 | 106.997315000 | 6940.869280000 | 31.498000000 |
| 41.399999760 | 74.039211900 | 106.262529000 | 7310.037290000 | 31.380000000 |
| 42.600000000 | 91.900590300 | 106.306630000 | 8405.914120000 | 31.232000000 |
| 43.799999980 | 106.280535000 | 105.915237000 | 10305.433900000 | 31.032000000 |
| 44.400000000 | 106.280535000 | 104.514900000 | 11478.460500000 | 31.263000000 |

CYCLE 3, C CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 27.00000000 | 111.20729900 | 104.52885900 | 12038.96500000 | 31.51900000 |
| 27.59999976 | 113.24847700 | 104.52836700 | 11706.99540000 | 31.87300000 |
| 28.19999980 | 101.65723200 | 104.52965100 | 11275.96580000 | 32.12100000 |
| 28.80000000 | 76.85328620 | 105.77066600 | 8744.32080000 | 32.08800000 |
| 29.39999976 | 78.69804000 | 105.64778800 | 8589.38092000 | 31.98400000 |
| 29.99999980 | 82.63622100 | 105.52495200 | 8773.54426000 | 31.94000000 |
| 30.60000000 | 80.42860680 | 105.85951000 | 9001.48664000 | 32.09800000 |
| 31.19999976 | 79.38823670 | 105.72873000 | 8774.12873000 | 32.17500000 |
| 31.79999980 | 75.35616820 | 105.77900000 | 8462.60748000 | 32.31100000 |
| 32.40000000 | 75.52281200 | 105.86721900 | 8590.02142000 | 32.34600000 |
| 32.99999976 | 76.93956800 | 105.62768800 | 8437.47537000 | 32.37500000 |
| 33.59999980 | 76.94717320 | 105.61372900 | 8333.44013000 | 32.53200000 |
| 34.20000000 | 79.01268850 | 105.81696800 | 8466.11428000 | 32.56400000 |
| 34.79999976 | 79.02533850 | 105.72763200 | 8594.11270000 | 32.39000000 |
| 35.39999980 | 76.62481220 | 105.96158000 | 8519.82927000 | 32.38500000 |
| 36.00000000 | 76.63506220 | 105.54896100 | 8471.37449000 | 32.62700000 |
| 36.59999976 | 76.07681480 | 106.14583500 | 8531.57466000 | 32.51700000 |
| 37.19999980 | 55.65226100 | 106.84544500 | 7338.09174000 | 32.26200000 |
| 37.80000000 | 66.87842070 | 107.58581400 | 7129.68566000 | 32.14200000 |
| 38.39999976 | 57.59375190 | 106.60423800 | 7073.32790000 | 32.34400000 |
| 38.99999980 | 20.65568830 | 108.36247700 | 3128.75580000 | 32.42200000 |
| 39.60000000 | 1.14733030 | 109.31725200 | 1035.19272000 | 32.05900000 |
| 40.19999976 | 1.109267370 | 109.38592900 | 1036.94612000 | 31.81000000 |
| 40.79999980 | 1.048368260 | 109.64165200 | 1156.17520000 | 31.40300000 |
| 41.40000000 | 7.33719744 | 109.52774900 | 1084.28800000 | 31.02300000 |
| PAUSE | | | | |
| 41.99999976 | 9.34181299 | 109.65114400 | 1117.60265000 | 30.96500000 |
| 42.59999980 | 1.035680820 | 109.50820700 | 953.95171600 | 30.64200000 |
| 43.20000000 | 9.95021012 | 109.70865400 | 1034.60825000 | 30.22400000 |
| 43.79999976 | 9.84931060 | 109.61261800 | 942.81683000 | 30.00400000 |
| 44.39999980 | 1.177780150 | 109.83372400 | 1083.70353000 | 29.64800000 |
| 45.00000000 | 8.98656467 | 110.06432100 | 1211.11748000 | 29.39700000 |
| 45.59999976 | 8.85669122 | 110.14919000 | 1254.95255000 | 29.14200000 |
| 46.19999980 | 1.236142380 | 109.70697900 | 928.81960700 | 29.00700000 |
| 46.80000000 | 1.322416970 | 109.94595200 | 1060.90929000 | 28.92500000 |
| 47.39999976 | 1.413766540 | 109.61931800 | 843.48733200 | 27.72400000 |
| 47.99999980 | 1.010305840 | 109.94539300 | 1007.13827000 | 25.43200000 |
| 48.60000000 | 1.299429630 | 110.00092100 | 1050.38888000 | 22.78700000 |
| 49.19999976 | 9.92543524 | 109.91300900 | 998.95572400 | 20.12400000 |
| 49.79999980 | 1.043293390 | 110.20058000 | 1084.28800000 | 17.70700000 |
| 50.40000000 | 8.45369218 | 110.17040800 | 1118.18712000 | 15.52000000 |
| 50.99999976 | 1.406154080 | 110.01742000 | 977.33042100 | 13.61400000 |
| 51.59999980 | 1.454366350 | 110.06488000 | 998.95572400 | 11.71700000 |
| 52.20000000 | 5.98232586 | 110.23903400 | 1104.74437000 | 9.50630000 |
| 52.79999976 | 1.553323380 | 110.07604700 | 919.46812500 | 7.44430000 |
| 53.39999980 | 7.776857040 | 110.25136800 | 1091.88608000 | 5.74470000 |

CYCLE 3, C CYCLE START/STOP

```

A
CYCLE TIME(SECS)    BAT. CURRENT(AMPS)    BAT. VOLTAGE(VOLTS)    AVG. POWER(WATTS)    VELOCITY(MPH)
54.000000000        1.319879480          109.096781000         920.052593000        4.548600000
54.599999760        .969706132           110.208375000         1035.192720000        3.672000000
55.199999880        1.248859820          110.160916000         969.732342000        2.643000000
55.800000000        .723569791           110.229034000         1035.192720000        1.940800000
56.399999760        1.360479290          110.254150000         1025.256770000        1.886600000
56.999999880        1.233604890          110.300503000         1021.165490000        1.978100000
STOP

```

.486 CP SECONDS EXECUTION TIME

CYCLE 3, C CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | -2.351865720 | 104.886044000 | 2474.736510000 | .997390000 |
| 1.599976000 | 5.334185570 | 103.452877000 | 2532.414340000 | .792310000 |
| 1.199988000 | 85.583744600 | 96.126233600 | 8643.792440000 | 1.061900000 |
| 1.800000000 | 240.759789000 | 84.163067500 | 17585.562900000 | 2.204800000 |
| 2.399976000 | 250.257607000 | 85.689591200 | 18592.916100000 | 4.153700000 |
| 2.999988000 | 178.248717000 | 86.186657120 | 16000.186660000 | 6.319000000 |
| 3.600000000 | 226.872117000 | 84.326105200 | 18023.329100000 | 7.875400000 |
| 4.199976000 | 198.348214000 | 85.839228500 | 17129.893360000 | 9.249700000 |
| 4.799988000 | 173.272570000 | 87.591827400 | 16278.510700000 | 10.579000000 |
| 5.400000000 | 169.151876000 | 88.481331600 | 15248.861200000 | 11.637000000 |
| 5.999976000 | 180.063075000 | 85.679549000 | 16365.194400000 | 12.701000000 |
| 6.599988000 | 241.429686000 | 83.404830800 | 19091.151500000 | 13.761000000 |
| 7.200000000 | 250.485981000 | 81.412644900 | 20851.568000000 | 14.882000000 |
| 7.799976000 | 229.767391000 | 82.521524100 | 19762.120300000 | 16.051000000 |
| 8.399988000 | 204.651134000 | 84.113932900 | 17921.631700000 | 17.147000000 |
| 9.000000000 | 191.207722000 | 85.180377700 | 17290.106700000 | 18.089000000 |
| 10.199988000 | 182.552351000 | 85.781160300 | 16670.871000000 | 18.960000000 |
| 10.800000000 | 174.896749000 | 86.346208500 | 16200.374600000 | 19.767000000 |
| 11.399976000 | 167.038149000 | 86.741519000 | 15868.981400000 | 20.472000000 |
| 11.999988000 | 163.787627000 | 87.022926400 | 15151.839600000 | 21.000000000 |
| 12.600000000 | 155.439291000 | 87.701877700 | 14930.326400000 | 21.653000000 |
| 13.199976000 | 150.272955000 | 87.651625300 | 14422.424000000 | 22.099000000 |
| 13.799988000 | 146.646895000 | 88.455647600 | 14334.753800000 | 22.608000000 |
| 14.400000000 | 211.670026000 | 82.527107600 | 17864.938400000 | 23.330000000 |
| PAUSE | | | | |
| 14.999976000 | 201.367825000 | 82.628727000 | 17730.510800000 | 24.349000000 |
| 15.599988000 | 193.770585000 | 83.359660300 | 17243.649300000 | 24.972000000 |
| 16.200000000 | 186.028709000 | 83.795674500 | 16735.746900000 | 25.564000000 |
| 16.799976000 | 179.847388000 | 84.771666900 | 16622.944700000 | 26.155000000 |
| 17.399988000 | 270.313912000 | 76.876625000 | 20767.989200000 | 26.612000000 |
| 18.000000000 | 284.447721000 | 74.110565800 | 21953.874000000 | 27.095000000 |
| 18.599976000 | 275.203652000 | 74.214421300 | 21342.520800000 | 27.812000000 |
| 19.199988000 | 267.428788000 | 74.877067700 | 20762.144500000 | 28.390000000 |
| 19.800000000 | 260.681608000 | 74.908949300 | 20192.873000000 | 28.970000000 |
| 20.399976000 | 254.649999000 | 73.788960100 | 19727.052300000 | 29.615000000 |
| 20.999988000 | 209.315237000 | 77.781371700 | 17686.675800000 | 30.109000000 |
| 21.600000000 | 137.187139000 | 85.761059700 | 13355.186100000 | 30.327000000 |
| 22.199976000 | 136.996828000 | 86.039117100 | 13267.515900000 | 30.563000000 |
| 22.799988000 | 136.740542000 | 86.001149400 | 13052.431800000 | 30.909000000 |
| 23.400000000 | 134.465952000 | 86.492495700 | 13081.655200000 | 31.111000000 |
| 23.999976000 | 132.617123000 | 86.739285600 | 12934.369400000 | 31.288000000 |
| 24.599988000 | 131.825427000 | 86.503662700 | 12861.935400000 | 31.482000000 |
| 25.200000000 | 130.820582000 | 86.503662700 | 12581.935400000 | 31.688000000 |
| 25.799976000 | 130.02123000 | 86.460111500 | 12483.160400000 | 32.000000000 |
| 26.399988000 | 128.432866000 | 86.566197700 | 12387.307700000 | 32.313000000 |

CYCLE N-1, C CYCLE START/STOP

| CYCLE TIME (SECS) | DAT. | CURRENT (AMPS) | DAT. | VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (RPM) |
|-------------------|--------------|----------------|---------------|-----------------|--------------------|----------------|
| 27.00000000 | 62.06480580 | 93.87940900 | 8667.17150000 | 31.13200000 | 32.40200000 | 32.40200000 |
| 27.59976000 | 68.00252790 | 93.80350550 | 93.80350550 | 30.73300000 | 32.38900000 | 32.38900000 |
| 28.19998000 | 68.25627670 | 93.98527000 | 93.98527000 | 30.37100000 | 32.37000000 | 32.37000000 |
| 28.80000000 | 68.69274600 | 93.72888690 | 93.72888690 | 29.84400000 | 32.28900000 | 32.28900000 |
| 29.39997600 | 70.15178020 | 93.43164570 | 93.43164570 | 29.72700000 | 32.26500000 | 32.26500000 |
| 29.99998000 | 72.76031790 | 93.49104730 | 93.49104730 | 29.48500000 | 32.51500000 | 32.51500000 |
| 30.60000000 | 85.45700810 | 92.92242230 | 92.92242230 | 29.19500000 | 32.56200000 | 32.56200000 |
| 31.19997600 | 90.88595100 | 93.73020300 | 93.73020300 | 28.82000000 | 32.35000000 | 32.35000000 |
| 31.79998000 | 62.74902760 | 92.94141610 | 92.94141610 | 28.80000000 | 32.17400000 | 32.17400000 |
| 32.40000000 | 76.49803780 | 92.58854100 | 92.58854100 | 28.79900000 | 32.07900000 | 32.07900000 |
| 32.99976000 | 65.78222580 | 93.58239700 | 93.58239700 | 32.14600000 | 32.14600000 | 32.14600000 |
| 33.59998000 | 83.92702800 | 93.06936280 | 93.06936280 | 32.06600000 | 32.06600000 | 32.06600000 |
| 34.20000000 | 75.24933700 | 93.21277300 | 93.21277300 | 32.13000000 | 32.13000000 | 32.13000000 |
| 34.79997600 | 104.14143300 | 92.41542200 | 92.41542200 | 31.83000000 | 31.83000000 | 31.83000000 |
| 35.39998000 | 120.49543000 | 93.56564300 | 93.56564300 | 31.15000000 | 31.15000000 | 31.15000000 |
| 36.00000000 | 113.37532000 | 93.52321480 | 93.52321480 | 30.86300000 | 30.86300000 | 30.86300000 |
| 36.59997600 | 76.21130170 | 93.21277300 | 93.21277300 | 31.85000000 | 31.85000000 | 31.85000000 |
| 37.19998000 | 64.32063270 | 95.47854980 | 95.47854980 | 31.59000000 | 31.59000000 | 31.59000000 |
| 37.80000000 | 48.50700720 | 95.80797200 | 95.80797200 | 31.77000000 | 31.77000000 | 31.77000000 |
| 38.39997600 | -2.438140310 | 101.174817000 | 101.174817000 | 32.01200000 | 32.01200000 | 32.01200000 |
| 38.99998000 | -1.986467440 | 101.180400000 | 101.180400000 | 32.15300000 | 32.15300000 | 32.15300000 |
| 39.60000000 | -2.280816060 | 101.892853000 | 101.892853000 | 31.91800000 | 31.91800000 | 31.91800000 |
| 40.19997600 | -1.836755650 | 101.537713000 | 101.537713000 | 31.59500000 | 31.59500000 | 31.59500000 |
| 40.79998000 | -2.458440220 | 102.058124000 | 102.058124000 | 31.44300000 | 31.44300000 | 31.44300000 |
| 41.40000000 | PAUSE | | | | | |
| 41.99997600 | -1.775955930 | 101.851535000 | 101.851535000 | 2319.352590000 | 31.13200000 | 31.13200000 |
| 42.59998000 | -2.529489880 | 102.403183000 | 102.403183000 | 2400.517140000 | 30.73300000 | 30.73300000 |
| 43.20000000 | -2.341715770 | 102.166326000 | 102.166326000 | 2384.728500000 | 30.37100000 | 30.37100000 |
| 43.79997600 | -2.268128620 | 101.886152000 | 101.886152000 | 2186.009500000 | 30.04900000 | 30.04900000 |
| 44.39998000 | -1.849443090 | 102.160960000 | 102.160960000 | 2338.555550000 | 29.84400000 | 29.84400000 |
| 45.00000000 | -2.171704070 | 102.118425000 | 102.118425000 | 2280.693260000 | 29.72700000 | 29.72700000 |
| 45.59997600 | -2.133641750 | 102.531603000 | 102.531603000 | 2215.817350000 | 29.48500000 | 29.48500000 |
| 46.19998000 | -2.565014720 | 102.526979000 | 102.526979000 | 2437.330580000 | 29.25000000 | 29.25000000 |
| 46.80000000 | -2.293503560 | 102.671190000 | 102.671190000 | 2305.240900000 | 29.19500000 | 29.19500000 |
| 47.39997600 | -2.384853070 | 102.572921000 | 102.572921000 | 2426.810170000 | 28.82000000 | 28.82000000 |
| 47.99998000 | -2.278278570 | 102.250195000 | 102.250195000 | 2413.367410000 | 27.88000000 | 27.88000000 |
| 48.60000000 | -2.136179240 | 102.593021000 | 102.593021000 | 2194.192050000 | 26.16000000 | 26.16000000 |
| 49.19997600 | -2.118416820 | 102.457001000 | 102.457001000 | 2351.413840000 | 23.89000000 | 23.89000000 |
| 49.79998000 | -1.877355460 | 102.599721000 | 102.599721000 | 2263.150230000 | 21.15800000 | 21.15800000 |
| 50.40000000 | -2.567552200 | 102.824177000 | 102.824177000 | 2380.052760000 | 18.48000000 | 18.48000000 |
| 50.99976000 | -1.857055550 | 102.599721000 | 102.599721000 | 2370.116810000 | 15.96100000 | 15.96100000 |
| 51.59998000 | -2.557402250 | 103.040816000 | 103.040816000 | 2466.553970000 | 13.67000000 | 13.67000000 |
| 52.20000000 | -2.166629090 | 102.713624000 | 102.713624000 | 2339.724490000 | 11.43700000 | 11.43700000 |
| 52.79997600 | -2.161326290 | 102.677890000 | 102.677890000 | 2491.101610000 | 9.38320000 | 9.38320000 |
| 53.39998000 | -2.222453830 | | | 2372.454680000 | 7.65070000 | 7.65070000 |

CYCLE N-1, C CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 54.00000000 | -2.28081866 | 102.81971000 | 2396.41785000 | 6.37260000 |
| 54.50007600 | -2.13617924 | 102.82752700 | 2398.17125000 | 5.48720000 |
| 55.10000000 | -1.97124251 | 102.50703500 | 2273.09518000 | 4.85780000 |
| 55.80000000 | -2.22245383 | 102.92021300 | 2448.43547000 | 4.18930000 |
| 56.30007600 | -1.84944380 | 102.82417700 | 2318.89913000 | 3.28510000 |
| 56.90000000 | -2.21484138 | 103.02964900 | 2442.06633000 | 2.12000000 |
| STOP | | | | |

.488 CP SECONDS EXECUTION TIME

CYCLE N-1, C CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | 319.07071000 | 100.02970000 | 29765.26730000 | 2.70170000 |
| 1.50000000 | 401.87408100 | 96.905687500 | 34030.504400000 | 5.995400000 |
| 1.100000000 | 422.17144800 | 96.343300300 | 38028.764300000 | 9.224300000 |
| 1.800000000 | 359.670579000 | 97.163644300 | 34021.198000000 | 12.070000000 |
| 2.300000000 | 281.696109000 | 99.122329400 | 28436.197800000 | 14.431000000 |
| 2.900000000 | 551.096140000 | 91.104450900 | 44107.003400000 | 16.555000000 |
| 3.600000000 | 350.421506000 | 97.221712500 | 38207.912400000 | 18.850000000 |
| 4.100000000 | 166.712376000 | 103.393692000 | 15501.472300000 | 20.650000000 |
| 4.700000000 | 193.883798000 | 102.520476000 | 19414.229600000 | 21.586000000 |
| 5.400000000 | 247.130447000 | 101.665947000 | 22406.235600000 | 22.442000000 |
| 5.900000000 | 183.802358000 | 102.747125000 | 18487.661700000 | 23.401000000 |
| 6.500000000 | 182.353452000 | 100.121446400 | 17360.424600000 | 24.255000000 |
| 7.200000000 | 264.446266000 | 100.312728000 | 23889.442300000 | 25.041000000 |
| 7.700000000 | 321.623484000 | 97.852645800 | 30990.803200000 | 26.097000000 |
| 8.300000000 | 293.302580000 | 98.923557500 | 28639.775200000 | 27.404000000 |
| 9.000000000 | 272.073955000 | 99.379169500 | 26588.735300000 | 28.501000000 |
| 9.500000000 | 254.410500000 | 100.136290000 | 25012.026100000 | 29.407000000 |
| 10.100000000 | 240.964351000 | 100.662253000 | 23675.976800000 | 30.359000000 |
| 10.800000000 | 228.936658000 | 101.268619000 | 22734.867700000 | 31.180000000 |
| 11.300000000 | 219.098817000 | 101.514293000 | 21675.101900000 | 31.953000000 |
| 11.900000000 | 210.580820000 | 101.705248000 | 20874.752000000 | 32.688000000 |
| 12.600000000 | 80.475844700 | 106.845400000 | 9542.471320000 | 33.180000000 |
| 13.100000000 | 93.691082400 | 105.754388000 | 9611.105980000 | 33.356000000 |
| 13.700000000 | 129.325027000 | 105.532165000 | 11420.618100000 | 33.337000000 |
| 14.400000000 | 201.983460000 | 102.364098000 | 19817.894500000 | 33.613000000 |
| PAUSE | | | | |
| 14.999999760 | 254.042565000 | 100.445614000 | 22785.471200000 | 34.098000000 |
| 15.599999880 | 350.017975000 | 96.964872400 | 33081.833800000 | 34.809000000 |
| 16.200000000 | 339.539537000 | 97.298764500 | 32425.151300000 | 35.763000000 |
| 16.700000000 | 329.997194000 | 97.227296000 | 31411.917500000 | 36.728000000 |
| 17.300000000 | 320.684613000 | 98.062584700 | 30850.625600000 | 37.411000000 |
| 18.000000000 | 311.394869000 | 97.936398100 | 29886.832100000 | 38.112000000 |
| 18.500000000 | 302.620236000 | 98.477995700 | 29253.415600000 | 39.061000000 |
| 19.100000000 | 296.081129000 | 98.431094500 | 28408.278600000 | 39.986000000 |
| 19.800000000 | 288.494040000 | 98.944774700 | 27961.571700000 | 40.764000000 |
| 20.300000000 | 282.191457000 | 99.542207200 | 27578.846200000 | 41.319000000 |
| 20.900000000 | 275.953240000 | 99.506472900 | 26898.316000000 | 41.720000000 |
| 21.600000000 | 271.119859000 | 99.447288000 | 26283.512300000 | 42.120000000 |
| 22.100000000 | 265.895171000 | 99.541090500 | 25793.181700000 | 42.541000000 |
| 22.700000000 | 258.552960000 | 100.080455000 | 25508.173300000 | 43.184000000 |
| 23.400000000 | 256.257792000 | 99.864932300 | 24959.096000000 | 43.910000000 |
| 23.900000000 | 252.593659000 | 100.254650000 | 24686.302300000 | 44.329000000 |
| 24.500000000 | 249.043713000 | 100.357395000 | 24360.578500000 | 44.753000000 |
| 25.200000000 | 244.727460000 | 100.726207000 | 24165.144200000 | 45.175000000 |
| 25.700000000 | 242.450932000 | 100.429981000 | 23632.353100000 | 45.606000000 |
| 26.300000000 | 238.140127000 | 100.747122000 | 23396.203300000 | 46.109000000 |

CYCLE 3, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 27.00000000 | 235.18870000 | 100.72478000 | 23078.04100000 | 46.53100000 |
| 27.59999976 | 156.38226200 | 103.72870100 | 17199.88930000 | 46.77600000 |
| 28.19999952 | 111.91024700 | 105.12568000 | 11012.30010000 | 46.97600000 |
| 28.80000000 | 111.07541300 | 105.40374500 | 11026.84130000 | 47.15800000 |
| 29.39999976 | 110.84703000 | 105.74545400 | 11052.90360000 | 47.28500000 |
| 29.99999952 | 110.74554000 | 105.77565000 | 11130.95660000 | 47.29700000 |
| 30.60000000 | 110.81551000 | 105.70300000 | 11113.50710000 | 47.23700000 |
| 31.19999976 | 111.00943000 | 105.51415000 | 11002.41200000 | 47.45800000 |
| 31.79999952 | 110.02995800 | 105.92300000 | 11103.03740000 | 47.69000000 |
| 32.40000000 | 83.655317200 | 106.64668000 | 9057.95714000 | 47.72400000 |
| 32.99999976 | 42.695185200 | 108.20218000 | 4475.72080000 | 47.72000000 |
| 33.59999952 | 49.921951100 | 107.66505000 | 4559.47853000 | 47.53000000 |
| 34.20000000 | 45.610758900 | 108.50257000 | 4853.21162000 | 47.27000000 |
| 34.79999976 | 47.549399800 | 108.24127000 | 4899.74360000 | 47.02300000 |
| 35.39999952 | 50.289886900 | 108.31050500 | 4968.95991000 | 47.03200000 |
| 36.00000000 | 51.632218100 | 108.07599000 | 5466.85203000 | 46.92200000 |
| 36.59999976 | 59.818154500 | 108.03914800 | 5885.05815000 | 46.57100000 |
| 37.19999952 | 60.353564500 | 108.12174000 | 6429.48250000 | 46.36500000 |
| 37.80000000 | 66.978945800 | 107.87387000 | 6570.24147000 | 46.39700000 |
| 38.39999976 | 66.283674100 | 107.78007500 | 6791.26830000 | 46.47400000 |
| 38.99999952 | 79.430399600 | 107.18156000 | 7496.22776000 | 46.32200000 |
| 39.60000000 | 116.003215000 | 105.700787000 | 11496.23260000 | 46.26100000 |
| 40.19999976 | 115.995802000 | 105.133505000 | 11345.00370000 | 46.42000000 |
| 40.79999952 | 115.254656000 | 105.851541000 | 11567.19380000 | 46.53600000 |
| 41.40000000 | 114.318323000 | 105.918542000 | 11593.36810000 | 46.55700000 |
| PAUSE | | | | |
| 41.99999976 | 113.975762000 | 105.825856000 | 11483.43630000 | 46.65500000 |
| 42.59999952 | 114.153386000 | 105.639388000 | 11373.50450000 | 46.21800000 |
| 43.20000000 | 113.775300000 | 105.649418000 | 11363.03480000 | 46.80400000 |
| 43.79999976 | 113.387065000 | 105.698553000 | 11363.61650000 | 46.68100000 |
| 44.39999952 | 112.760305000 | 105.840374000 | 11313.01290000 | 46.79300000 |
| 45.00000000 | 112.668956000 | 105.710837000 | 11294.98180000 | 47.07300000 |
| 45.59999976 | 112.077721000 | 105.660585000 | 11128.66000000 | 47.17800000 |
| 46.19999952 | 111.653960000 | 105.815806000 | 11193.19310000 | 47.19600000 |
| 46.80000000 | 112.062406000 | 105.775505000 | 11212.38750000 | 47.44800000 |
| 47.39999976 | 111.674266000 | 105.764388000 | 11233.90860000 | 47.55600000 |
| 48.00000000 | 111.334237000 | 105.804639000 | 11151.31430000 | 47.51000000 |
| 48.60000000 | 110.978989000 | 105.829207000 | 11153.05930000 | 47.50400000 |
| 49.19999976 | 111.014513000 | 105.641602000 | 11038.47430000 | 47.45200000 |
| 49.79999952 | 111.255750000 | 105.732054000 | 11055.34210000 | 47.49000000 |
| 50.40000000 | 110.583140000 | 105.575717000 | 10973.32950000 | 47.59100000 |
| 50.99999976 | 110.156842000 | 105.201792000 | 11063.48520000 | 47.72100000 |
| 51.59999952 | 110.337004000 | 105.442830000 | 10876.77570000 | 47.71900000 |
| 52.20000000 | 110.047730000 | 105.748804000 | 11036.07100000 | 47.75900000 |
| 52.79999976 | 110.227890000 | 105.447596000 | 10869.21420000 | 47.84200000 |
| 53.39999952 | 109.928468000 | 106.069296000 | 11094.89430000 | 47.83300000 |

CYCLE 3, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 54.00000000 | 110.164455000 | 105.730937000 | 10886.663700000 | 47.923000000 |
| 54.599999760 | 110.362379000 | 105.947576000 | 11091.986100000 | 47.869000000 |
| 55.199999880 | 110.298942000 | 105.586884000 | 10819.236100000 | 47.735000000 |
| 55.800000000 | 110.704940000 | 105.695203000 | 11043.127500000 | 47.702000000 |
| 56.399999760 | 110.468953000 | 105.948693000 | 11176.906690000 | 47.740000000 |
| 56.999999880 | 111.524548000 | 105.485264000 | 10977.982700000 | 47.754000000 |
| 57.600000000 | 111.143925000 | 105.755621000 | 11125.221700000 | 47.501000000 |
| 58.199999760 | 46.303493200 | 108.212700000 | 5723.359540000 | 47.505000000 |
| 58.799999880 | 61.563046600 | 108.273504000 | 6583.619410000 | 47.153000000 |
| 59.400000000 | 62.434304700 | 107.641604000 | 6365.500780000 | 46.893000000 |
| 59.999999760 | 63.631090000 | 107.714190000 | 6421.339150000 | 47.027000000 |
| 60.599999880 | 63.104201500 | 107.892861000 | 6571.986420000 | 46.749000000 |
| 61.200000000 | 63.365562800 | 107.411555000 | 6286.396430000 | 46.376000000 |
| 61.799999760 | 62.368330000 | 107.852660000 | 6198.116910000 | 46.162000000 |
| 62.399999880 | 63.454374900 | 107.561202000 | 6348.951290000 | 46.027000000 |
| 63.000000000 | 62.997627000 | 108.002297000 | 6637.131180000 | 45.759000000 |
| 63.599999760 | 63.170176200 | 107.931945000 | 6526.936090000 | 45.493000000 |
| 64.199999880 | 63.048376800 | 107.662822000 | 6419.504200000 | 45.377000000 |
| 64.800000000 | 64.720581400 | 107.642721000 | 6565.906620000 | 45.126000000 |
| 65.399999760 | 64.053222100 | 107.862409000 | 6747.644620000 | 44.948000000 |
| 65.999999880 | 69.219547700 | 107.832560000 | 7109.430720000 | 44.746000000 |
| 66.600000000 | 63.550799400 | 107.928595000 | 6749.971220000 | 44.697000000 |
| 67.199999760 | 47.379388100 | 108.549478000 | 5314.459820000 | 44.415000000 |
| 67.799999880 | 36.787913000 | 109.07475000 | 3962.124320000 | 44.098000000 |
| 68.400000000 | 37.313173000 | 109.931076000 | 4102.983540000 | 43.741000000 |
| PAUSE | | | | |
| 68.999999760 | 33.722627400 | 109.302584000 | 3853.355830000 | 43.336000000 |
| 69.599999880 | 1.580266360 | 110.80023000 | 885.197521000 | 43.047000000 |
| 70.200000000 | 1.176805760 | 110.916874000 | 618.801969000 | 42.454000000 |
| 70.799999760 | 940819368 | 111.003977000 | 643.812905000 | 41.922000000 |
| 71.399999880 | 1.334130020 | 110.932508000 | 558.310403000 | 41.563000000 |
| 72.000000000 | .890005907 | 111.592084000 | 676.966937000 | 41.382000000 |
| 72.599999760 | 7.068853000 | 110.820838000 | 1161.481120000 | 40.778000000 |
| 73.199999880 | 40.335321300 | 109.405984000 | 3773.888170000 | 39.847000000 |
| 73.800000000 | 65.080904700 | 102.357407000 | 6762.767510000 | 39.772000000 |
| 74.399999760 | 68.427851500 | 102.272538000 | 7412.470200000 | 40.028000000 |
| 74.999999880 | 68.922661600 | 102.933556000 | 7340.345640000 | 40.065200000 |
| 75.600000000 | 69.577333500 | 102.942498000 | 7202.494670000 | 39.957000000 |
| 76.199999760 | 49.333253900 | 108.767234000 | 5783.269460000 | 39.708000000 |
| 76.799999880 | 49.906726200 | 102.87787000 | 5569.804020000 | 39.448000000 |
| 77.400000000 | 1.400184700 | 110.891190000 | 963.720230000 | 39.107000000 |
| 77.999999760 | 1.364579870 | 111.131280000 | 616.475370000 | 38.858000000 |
| 78.599999880 | 1.534591570 | 111.270857000 | 650.211052000 | 38.558000000 |
| 79.200000000 | 1.582803840 | 110.902370000 | 465.828104000 | 38.223000000 |
| 79.799999760 | 1.197105660 | 111.155847000 | 539.697613000 | 37.892000000 |
| 80.399999880 | 1.803565300 | 110.893424000 | 439.072219000 | 37.530000000 |

CYCLE 3, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AVG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 81.00000000 | 1.10823580 | 111.34233600 | 612.40323000 | 37.15200000 |
| 81.599999760 | 1.080381210 | 111.58354200 | 721.753962000 | 36.86600000 |
| 82.190000000 | 1.428017070 | 111.442838000 | 628.108364000 | 36.55000000 |
| 82.800000000 | 1.232630490 | 111.565675000 | 658.354147000 | 36.48700000 |
| 83.399999760 | 1.549816500 | 111.426082000 | 629.853313000 | 36.13800000 |
| 83.999999880 | 1.065156280 | 111.561209000 | 649.067792000 | 35.91100000 |
| 84.600000000 | 1.646241040 | 111.435021000 | 578.086492000 | 35.60800000 |
| 85.199999760 | 1.521841300 | 111.403754000 | 580.994740000 | 35.33700000 |
| 85.799999880 | 1.530666550 | 111.439488000 | 565.871848000 | 35.13600000 |
| 86.400000000 | 1.001719080 | 111.480806000 | 566.453498000 | 34.73300000 |
| 86.999999760 | 1.354439920 | 111.612576000 | 594.372623000 | 34.26300000 |
| 87.599999880 | 1.430554560 | 111.787897000 | 624.618466000 | 33.39300000 |
| 88.200000000 | 1.813715260 | 111.639377000 | 604.260727000 | 31.56700000 |
| 88.799999760 | 1.141280920 | 111.790131000 | 633.924861000 | 29.13200000 |
| 89.399999880 | 1.245317930 | 111.831951000 | 697.324675000 | 28.32100000 |
| 90.000000000 | 1.488916790 | 111.752163000 | 619.383619000 | 23.39500000 |
| 90.600000000 | 1.235167980 | 111.967685000 | 715.355815000 | 20.52800000 |
| 91.199999880 | 1.483841810 | 111.730946000 | 598.444230000 | 17.65800000 |
| 91.800000000 | .953506808 | 112.012353000 | 768.285936000 | 14.81100000 |
| 92.399999760 | 1.372193340 | 111.764470000 | 632.179912000 | 12.22500000 |
| 92.999999880 | .594106617 | 111.815815000 | 607.750625000 | 10.15100000 |
| 93.600000000 | 1.212330590 | 111.849316000 | 639.741357000 | 8.607900000 |
| 94.199999760 | .819019942 | 111.952052000 | 699.651274000 | 7.278700000 |
| 94.799999880 | 1.212330590 | 111.813581000 | 624.036816000 | 5.955100000 |
| 95.400000000 | 1.242780450 | 111.786781000 | 587.392886000 | 4.562500000 |
| 95.999999760 | 1.268155330 | 112.010712000 | 649.047752000 | 2.627200000 |
| 96.599999880 | 1.382342290 | 111.997836000 | 651.956001000 | 1.373600000 |

STOP
.814 CP SECONDS EXECUTION TIME

CYCLE 3, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 0.00000000 | -1.33032420 | 105.470681000 | 1360.986960000 | 1.516300000 |
| .50000000 | -.995284011 | 105.453997000 | 1355.752110000 | .952220000 |
| 1.10000000 | 58.897046400 | 103.997434000 | 3334.527310000 | .973030000 |
| 1.80000000 | 442.392690000 | 83.991096300 | 31655.623800000 | 2.169800000 |
| 2.30000000 | 483.496978000 | 80.480203500 | 34848.303800000 | 4.906100000 |
| 2.90000000 | 463.037693000 | 79.095500300 | 33460.312700000 | 7.916400000 |
| 3.60000000 | 401.130597000 | 80.685675600 | 31566.054700000 | 10.778000000 |
| 4.10000000 | 355.537011000 | 83.830292100 | 28532.170000000 | 13.177000000 |
| 4.70000000 | 417.21573000 | 79.981040400 | 31694.017600000 | 15.173000000 |
| 5.40000000 | 391.09006000 | 81.365743500 | 30973.935300000 | 17.002000000 |
| 5.999976000 | 367.272894000 | 82.414321300 | 29160.933300000 | 18.620000000 |
| 6.599988000 | 347.056726000 | 83.621469900 | 27878.977400000 | 20.065000000 |
| 7.20000000 | 327.683005000 | 84.856535800 | 26877.958300000 | 21.376000000 |
| 7.799976000 | 308.824394000 | 85.351322200 | 25922.889500000 | 22.618000000 |
| 8.399988000 | 298.400393000 | 85.825281000 | 24987.015200000 | 23.633000000 |
| 9.00000000 | 288.011917000 | 86.636549500 | 24317.536400000 | 24.614000000 |
| 9.599976000 | 274.464268000 | 87.112621000 | 23524.166300000 | 25.539000000 |
| 10.199988000 | 263.910856000 | 87.720861500 | 23047.213500000 | 26.383000000 |
| 10.80000000 | 259.990437000 | 88.991102000 | 22391.693300000 | 27.250000000 |
| 11.399976000 | 250.670243000 | 88.639902500 | 21927.537900000 | 28.083000000 |
| 11.999988000 | 240.822522000 | 89.142415700 | 21550.517000000 | 28.897000000 |
| 12.60000000 | 240.530441000 | 88.695737300 | 20928.263000000 | 29.629000000 |
| 13.199976000 | 235.569652000 | 89.621478400 | 20779.055000000 | 30.163000000 |
| 13.799988000 | 229.309669000 | 89.757153000 | 20317.531600000 | 30.807000000 |
| 14.40000000 | 221.730192000 | 89.920753000 | 20037.758100000 | 31.420000000 |
| 15.00000000 | 222.166640000 | 90.243782000 | 19773.689100000 | 31.852000000 |
| 15.599988000 | 214.023841000 | 90.476867000 | 19438.658900000 | 32.334000000 |
| 16.20000000 | 211.658902000 | 90.357381200 | 19126.313100000 | 32.889000000 |
| 16.799976000 | 210.671819000 | 91.203836900 | 19160.048700000 | 33.239000000 |
| 17.399988000 | 204.109875000 | 90.866594600 | 18730.791300000 | 33.679000000 |
| 18.00000000 | 205.335482000 | 90.594120700 | 18425.425200000 | 34.246000000 |
| 12.599976000 | 205.160395000 | 91.133850000 | 18417.282100000 | 34.596000000 |
| 19.199988000 | 198.093491000 | 90.953696900 | 17988.606300000 | 34.878000000 |
| 19.80000000 | 198.834437000 | 91.040799200 | 17865.878200000 | 35.489000000 |
| 20.399976000 | 253.694929000 | 88.065920600 | 21821.095000000 | 35.976000000 |
| 20.999988000 | 266.582830000 | 87.561174000 | 23485.777400000 | 36.252000000 |
| 21.60000000 | 261.160219000 | 87.436104000 | 22939.026700000 | 36.846000000 |
| 22.199976000 | 255.308771000 | 88.090487900 | 22934.867700000 | 37.519000000 |
| 22.799988000 | 250.1576000 | 87.985518500 | 22008.542900000 | 38.161000000 |
| 23.40000000 | 244.915220000 | 88.044703400 | 21636.134000000 | 38.820000000 |
| 23.999976000 | 240.430016000 | 88.432197000 | 21342.980000000 | 39.318000000 |
| 24.599988000 | 236.462847000 | 88.714721100 | 21165.576800000 | 39.717000000 |
| 25.20000000 | 232.857077000 | 88.992778400 | 20889.293200000 | 40.310000000 |
| 25.799976000 | 228.741271000 | 89.025162600 | 20591.332900000 | 40.979000000 |
| PAUSE | | | | |
| 26.399988000 | 225.602399000 | 89.369105100 | 20364.645200000 | 41.509000000 |

CYCLE N-1, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 27.00000000 | 221.92557800 | 89.447273800 | 20051.136000000 | 41.899000000 |
| 27.599976000 | 218.789243000 | 89.649395800 | 19835.340000000 | 42.221000000 |
| 28.199952000 | 216.650410000 | 89.138508700 | 19536.957700000 | 42.459000000 |
| 28.800000000 | 213.445203000 | 89.730914600 | 19023.025200000 | 42.884000000 |
| 29.399976000 | 211.554865000 | 90.362964600 | 19151.324000000 | 43.353000000 |
| 29.999952000 | 208.753478000 | 90.882673900 | 18801.179000000 | 43.867000000 |
| 30.600000000 | 207.294422000 | 90.342864100 | 18717.995000000 | 44.235000000 |
| 31.199976000 | 204.269737000 | 90.512601900 | 18527.213000000 | 44.514000000 |
| 31.799952000 | 203.236979000 | 90.258878500 | 18321.309000000 | 44.769000000 |
| 32.400000000 | 201.777823000 | 90.788325400 | 18359.171000000 | 45.158000000 |
| 32.999976000 | 199.600759000 | 90.788425900 | 18195.091900000 | 45.239000000 |
| 33.599952000 | 197.991991000 | 90.965980600 | 18140.998500000 | 45.568000000 |
| 34.200000000 | 196.411136000 | 90.825276900 | 17953.013700000 | 45.859000000 |
| 34.799976000 | 195.108217000 | 90.878878300 | 17821.678000000 | 45.988000000 |
| 35.399952000 | 193.599599000 | 91.187136700 | 17786.773900000 | 46.389000000 |
| 36.000000000 | 191.945157000 | 91.293172600 | 17779.794100000 | 46.822000000 |
| 36.599976000 | 191.161873000 | 90.961513800 | 17434.294100000 | 47.072000000 |
| 37.199952000 | 190.914937000 | 90.926896200 | 17351.699800000 | 47.282000000 |
| 37.800000000 | 188.676872000 | 92.747111000 | 16163.971300000 | 47.470000000 |
| 38.399976000 | 161.525750000 | 97.249629900 | 9202.787910000 | 47.653000000 |
| 38.999952000 | 89.311378100 | 97.660574100 | 9194.648100000 | 47.810000000 |
| 39.600000000 | 89.034791900 | 97.683130800 | 8963.728900000 | 47.882000000 |
| 40.199976000 | 89.359590400 | 97.943098200 | 9279.565670000 | 47.701000000 |
| 40.799952000 | 88.704918400 | 97.208312200 | 8857.869650000 | 47.637000000 |
| 41.400000000 | 89.674238900 | | | |
| PAUSE | | | | |
| 41.999976000 | 88.857167700 | 97.832545300 | 9213.832500000 | 47.745000000 |
| 42.599952000 | 89.268340800 | 97.153594000 | 8909.054820000 | 48.015000000 |
| 43.200000000 | 88.499381900 | 97.939748100 | 9238.268540000 | 47.978000000 |
| 43.799976000 | 89.346902900 | 97.364649600 | 8917.193200000 | 47.722000000 |
| 44.399952000 | 88.918667400 | 97.672857800 | 9116.703760000 | 47.577000000 |
| 45.000000000 | 88.907917500 | 97.667274300 | 9084.713030000 | 47.691000000 |
| 45.599976000 | 88.892692500 | 97.767776900 | 9115.540460000 | 47.935000000 |
| 46.199952000 | 89.379980300 | 97.440505000 | 8972.454000000 | 47.930000000 |
| 46.800000000 | 88.636406300 | 97.740976200 | 9149.857790000 | 47.908000000 |
| 47.399976000 | 88.699343500 | 97.892846900 | 9148.694490000 | 47.776000000 |
| 47.999952000 | 88.938367300 | 97.743209600 | 9066.100400000 | 47.751000000 |
| 48.600000000 | 89.176891200 | 97.421601100 | 8966.638140000 | 47.888000000 |
| 49.199976000 | 89.521989600 | 97.685141400 | 9079.478180000 | 47.849000000 |
| 49.799952000 | 89.225103500 | 97.804627900 | 9183.593470000 | 47.670000000 |
| 50.400000000 | 89.808125700 | 97.512953500 | 9069.590130000 | 47.540000000 |
| 50.999976000 | 89.757976000 | 97.844829000 | 9292.650610000 | 47.598000000 |
| 51.599952000 | 90.034562200 | 97.450121700 | 9162.654080000 | 47.605000000 |
| 52.200000000 | 90.440563000 | 97.571751900 | 9159.745830000 | 47.605000000 |
| 52.799976000 | 90.125911700 | 97.762193500 | 9302.250000000 | 47.551000000 |
| 53.399952000 | 90.100536900 | 97.496419800 | 9189.991620000 | 47.537000000 |

CYCLE N-1, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 54.00000000 | 90.285773500 | 97.852645800 | 9266.371230000 | 47.461000000 |
| 54.59976000 | 90.823721000 | 97.746597900 | 9348.741980000 | 47.143000000 |
| 55.19952000 | 91.237331500 | 97.381400100 | 9060.993130000 | 47.188000000 |
| 55.80000000 | 91.447843000 | 97.317748400 | 9177.195328000 | 47.287000000 |
| 56.39976000 | 91.452718100 | 97.565654900 | 9349.945280000 | 47.118000000 |
| 56.99952000 | 92.211726900 | 97.242929700 | 9185.920070000 | 46.875000000 |
| 57.60000000 | 92.095002500 | 97.315515000 | 9274.912470000 | 46.600000000 |
| 58.19976000 | 91.985890500 | 97.717525600 | 9471.518060000 | 46.567000000 |
| 58.79952000 | 92.309530800 | 97.423834500 | 9352.853530000 | 46.666000000 |
| 59.40000000 | 92.658324800 | 97.473911800 | 9282.473920000 | 46.692000000 |
| 59.99976000 | 92.561909300 | 97.527687300 | 9536.073170000 | 46.548000000 |
| 60.59952000 | 93.185545900 | 97.416432000 | 9480.816460000 | 46.509000000 |
| 61.20000000 | 94.117380400 | 97.215012300 | 9390.091100000 | 46.594000000 |
| 61.79976000 | 92.983123300 | 97.554488000 | 9504.082440000 | 46.440000000 |
| 62.39952000 | 93.754519800 | 97.624839800 | 9592.493190000 | 46.144000000 |
| 63.00000000 | 94.432029000 | 97.162644300 | 9443.508880000 | 46.116000000 |
| 63.59976000 | 94.662940400 | 97.113393800 | 9438.029430000 | 46.184000000 |
| 64.19952000 | 94.289920600 | 97.385168000 | 9562.247100000 | 45.989000000 |
| 64.80000000 | 94.858476800 | 97.229595800 | 9552.359370000 | 45.875000000 |
| 65.39976000 | 94.526665800 | 97.575705200 | 9789.407800000 | 45.785000000 |
| 65.99952000 | 94.833851800 | 97.569005000 | 9692.536940000 | 45.655000000 |
| 66.60000000 | 94.721302600 | 97.385983500 | 9668.689300000 | 45.672000000 |
| 67.19976000 | 95.474935500 | 97.185978200 | 9591.329890000 | 45.689000000 |
| 67.79952000 | 95.383587000 | 97.424951200 | 9773.148460000 | 45.694000000 |
| 68.40000000 | 95.987509100 | 97.397033800 | 9742.558810000 | 45.492000000 |
| 68.99976000 | 95.731222000 | 97.287597600 | 9740.232100000 | 45.464000000 |
| 69.59952000 | 96.218808100 | 97.297645800 | 9763.498200000 | 45.495000000 |
| 70.20000000 | 96.538443900 | 96.913737800 | 9591.339890000 | 45.319000000 |
| 70.79976000 | 96.170208300 | 97.255213400 | 9767.569750000 | 45.256000000 |
| 71.39952000 | 96.657406000 | 96.969339200 | 9680.903940000 | 45.260000000 |
| 72.00000000 | 96.730993100 | 97.392567000 | 9982.512470000 | 45.157000000 |
| 72.60000000 | 96.746218100 | 97.364649600 | 9871.103390000 | 45.111000000 |
| 73.19976000 | 96.139528700 | 96.931673100 | 9979.290230000 | 45.095000000 |
| 73.80000000 | 96.812192700 | 97.496419800 | 9734.415710000 | 45.095000000 |
| 74.39976000 | 97.471939600 | 97.056441500 | 9781.417380000 | 45.034000000 |
| 74.99952000 | 97.801813100 | 97.098875900 | 9853.653900000 | 44.867000000 |
| 75.60000000 | 97.728225900 | 96.972689300 | 9766.466450000 | 44.905000000 |
| 76.19976000 | 97.413577400 | 97.324486800 | 9939.156400000 | 44.844000000 |
| 76.79952000 | 97.593739100 | 97.067608400 | 9814.101720000 | 44.874000000 |
| 77.40000000 | 97.119228800 | 97.266380400 | 9911.237220000 | 44.918000000 |
| 77.99976000 | 97.422802300 | 97.067558200 | 9787.345840000 | 44.861000000 |
| 78.59952000 | 36.181453400 | 100.967111000 | 5799.556650000 | 44.340000000 |
| 79.20000000 | -1.677868300 | 103.866055000 | 1512.797520000 | 44.866000000 |
| 79.79976000 | -1.373369730 | 103.994475000 | 1455.795850000 | 44.309000000 |
| 80.39952000 | - .657798101 | 103.717534000 | 1366.311890000 | 43.705000000 |

CYCLE N-1, D CYCLE START/STOP

| CYCLE TIME (SECS) | BAT. CURRENT (AMPS) | BAT. VOLTAGE (VOLTS) | AUG. POWER (WATTS) | VELOCITY (MPH) |
|-------------------|---------------------|----------------------|--------------------|----------------|
| 81.00000000 | -1.388594660 | 103.889895000 | 1369.130050000 | 43.471000000 |
| 81.599976000 | -1.342919870 | 104.059243000 | 1416.825230000 | 43.770000000 |
| 82.199988000 | -1.231270400 | 103.861588000 | 1254.545970000 | 43.590000000 |
| 82.800000000 | -1.535788970 | 104.000958000 | 1319.108180000 | 43.096000000 |
| 83.399976000 | -1.129770880 | 104.138299000 | 1356.915410000 | 42.998000000 |
| 83.999988000 | -1.342919870 | 104.175880000 | 1359.242010000 | 42.662000000 |
| 84.600000000 | -1.794822456 | 103.787886000 | 1193.471850000 | 42.459000000 |
| 85.199976000 | -1.698397910 | 103.911839000 | 1230.115780000 | 42.428000000 |
| 85.799988000 | -1.462131810 | 104.364101000 | 1400.539140000 | 41.810000000 |
| 86.400000000 | -1.616968580 | 104.471304000 | 1399.957490000 | 41.288000000 |
| 86.999976000 | -1.188133100 | 104.630209000 | 1199.288350000 | 41.082000000 |
| 87.599988000 | -1.228732910 | 104.404302000 | 1396.467590000 | 40.761000000 |
| 88.200000000 | -1.312470020 | 104.404302000 | 1396.467590000 | 40.761000000 |
| 88.800000000 | -1.606818630 | 104.530489000 | 1414.498730000 | 40.551000000 |
| 89.399976000 | -1.380982190 | 104.614241000 | 1455.214210000 | 39.859000000 |
| 90.000000000 | -1.637268490 | 104.519322000 | 1440.672960000 | 37.711000000 |
| 90.600000000 | -1.606818630 | 104.435570000 | 1382.508000000 | 34.571000000 |
| 90.999976000 | -1.241420350 | 104.230898000 | 1328.996230000 | 30.875000000 |
| 91.199988000 | -2.000129280 | 104.601957000 | 1493.603880000 | 27.076000000 |
| 91.800000000 | -1.738768010 | 104.674543000 | 1477.316890000 | 23.087000000 |
| 92.399976000 | -2.068641460 | 104.671193000 | 1462.194800000 | 18.956000000 |
| 92.999988000 | -1.317544990 | 104.406536000 | 1324.924880000 | 14.863000000 |
| 93.600000000 | -1.487556690 | 104.469871000 | 1390.069440000 | 11.104000000 |
| 94.199976000 | -1.518006550 | 104.687943000 | 1447.652760000 | 8.056400000 |
| 94.799988000 | -1.873254880 | 104.634430000 | 1379.599750000 | 5.295100000 |
| 95.400000000 | -1.439344420 | 104.542773000 | 1335.076020000 | 4.421000000 |
| 95.999976000 | -1.495169160 | 104.580740000 | 1372.038300000 | 3.338500000 |
| 96.599988000 | | | | |
| STOP | | | | |

.820 CP SECONDS EXECUTION TIME

CYCLE N-1, D CYCLE START/STOP

Maximum Acceleration Data

Acceleration to 24 km/h (15 mi/h) for GE-100
 (Same for 0%, 40% and 80% discharge)

| Time Seconds | Velocity | | Acceleration | |
|-----------------|----------|-------|--------------|----------|
| | km/h | mi/h | km/h·sec | mi/h·sec |
| 0.00 | 0.0 | 0.00 | 3.86 | 2.40 |
| 0.42 | 1.6 | 1.00 | 4.78 | 2.97 |
| 0.76 | 3.2 | 2.00 | 8.69 | 5.40 |
| 0.94 | 4.8 | 3.00 | 10.14 | 6.3 |
| 1.10 | 6.4 | 4.00 | 7.72 | 4.8 |
| 1.31 | 8.0 | 5.00 | 7.72 | 4.8 |
| 1.52 | 9.6 | 6.00 | 7.72 | 4.8 |
| 1.73 | 11.2 | 7.00 | 8.69 | 5.4 |
| 1.91 | 12.8 | 8.00 | 8.69 | 5.4 |
| 2.09 | 14.4 | 9.00 | 7.64 | 4.75 |
| 2.31 | 16.0 | 10.00 | 7.40 | 4.6 |
| 2.52 | 17.6 | 11.00 | 7.40 | 4.6 |
| 2.75 | 19.2 | 12.00 | 6.95 | 4.32 |
| 2.99 | 20.8 | 13.00 | 6.76 | 4.20 |
| 3.24 | 22.4 | 14.00 | 6.44 | 4.0 |
| 3.49 | 24.00 | 15.00 | 6.44 | 4.0 |

Maximum Acceleration Data

Acceleration from 24 km/h at Various States of Discharge for the GE-100

| Velocity | | 0% Discharge | | 40% Discharge | | 80% Discharge | |
|----------|------|--------------|----------|---------------|----------|---------------|----------|
| km/h | mi/h | km/h sec | mi/h sec | km/h sec | mi/h sec | km/h sec | mi/h sec |
| 24.0 | 15.0 | 6.44 | 4.00 | 6.44 | 4.00 | 6.44 | 4.00 |
| 32.2 | 20.0 | 5.89 | 3.66 | 4.88 | 3.03 | 3.86 | 2.40 |
| 40.2 | 25.0 | 5.02 | 3.12 | 4.26 | 2.65 | 2.19 | 1.36 |
| 48.3 | 30.0 | 4.35 | 2.70 | 3.89 | 2.42 | 1.85 | 1.15 |
| 56.3 | 35.0 | 2.80 | 1.74 | 2.95 | 1.83 | 1.61 | 1.00 |
| 64.4 | 40.0 | 2.03 | 1.26 | 2.11 | 1.31 | 0.85 | 0.53 |
| 72.4 | 45.0 | 1.26 | 0.78 | 1.59 | 0.99 | 0.74 | 0.46 |
| 80.5 | 50.0 | 0.77 | 0.48 | 0.74 | 0.46 | 0.64 | 0.40 |
| 88.5 | 55.0 | 0.31 | 0.19 | 0.18 | 0.11 | 0.0 | 0.0 |

0% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 1.20 | 3.50 | 0.00 |
| 1.80 | 5.26 | 8.38 |
| 2.40 | 6.42 | 5.53 |
| 3.00 | 7.27 | 4.03 |
| 3.60 | 7.41 | .68 |
| 4.20 | 7.48 | .33 |
| 4.80 | 7.67 | .90 |
| 5.40 | 7.99 | 1.51 |
| 6.00 | 9.96 | 9.39 |
| 6.60 | 11.23 | 6.04 |
| 7.20 | 12.58 | 6.42 |
| 7.80 | 14.56 | 9.45 |
| 8.40 | 17.19 | 12.61 |
| 9.00 | 18.95 | 8.39 |
| 9.60 | 19.20 | 1.17 |
| 10.20 | 19.80 | 2.85 |
| 10.80 | 22.49 | 12.90 |
| 11.40 | 25.17 | 12.83 |
| 12.00 | 28.14 | 14.28 |
| 12.60 | 30.80 | 12.71 |
| 13.20 | 33.59 | 13.36 |
| 13.80 | 36.09 | 11.96 |
| 14.40 | 38.07 | 9.48 |
| 15.00 | 39.91 | 8.75 |
| 15.60 | 41.57 | 7.89 |
| 16.20 | 43.27 | 8.14 |
| 16.80 | 45.64 | 11.31 |
| 17.40 | 47.55 | 9.12 |
| 18.00 | 49.36 | 8.62 |
| 18.60 | 51.25 | 9.03 |
| 19.20 | 53.73 | 11.84 |
| 19.80 | 55.61 | 8.98 |
| 20.40 | 57.37 | 8.39 |
| 21.00 | 59.26 | 9.00 |
| 21.60 | 60.98 | 8.21 |
| 22.20 | 62.81 | 8.71 |
| 22.80 | 63.88 | 5.07 |
| 23.40 | 65.18 | 6.20 |
| 24.00 | 66.68 | 7.15 |
| 24.60 | 67.53 | 4.04 |
| 25.20 | 68.87 | 6.34 |
| 25.80 | 70.03 | 5.55 |
| 26.40 | 71.15 | 5.30 |
| 27.00 | 72.28 | 5.41 |
| 27.60 | 73.14 | 4.05 |
| 28.20 | 74.25 | 5.30 |
| 28.80 | 74.85 | 2.85 |
| 29.40 | 75.65 | 3.81 |
| 30.00 | 76.68 | 4.87 |

0% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 30.60 | 77.11 | 2.05 |
| 31.20 | 77.86 | 3.58 |
| 31.80 | 78.56 | 3.30 |
| 32.40 | 79.16 | 2.88 |
| 33.00 | 79.73 | 2.68 |
| 33.60 | 80.11 | 1.81 |
| 34.20 | 80.40 | 1.40 |
| 34.80 | 80.86 | 2.19 |
| 35.40 | 81.23 | 1.72 |
| 36.00 | 81.58 | 1.70 |
| 36.60 | 81.84 | 1.22 |
| 37.20 | 82.30 | 2.18 |
| 37.80 | 82.93 | 3.01 |
| 38.40 | 83.02 | .39 |
| 39.00 | 82.25 | -3.63 |
| 39.60 | 82.93 | 3.22 |
| 40.20 | 84.00 | 5.08 |
| 40.80 | 84.17 | .81 |
| 41.40 | 84.95 | 1.82 |
| 42.00 | 84.75 | .92 |
| 42.60 | 84.08 | -3.16 |
| 43.20 | 85.41 | 6.31 |
| 43.80 | 85.40 | -.04 |
| 44.40 | 86.11 | 3.40 |
| 45.00 | 86.00 | -.52 |
| 45.60 | 86.10 | .47 |
| 46.20 | 86.48 | 1.79 |
| 46.80 | 87.07 | 2.79 |
| 47.40 | 87.10 | .15 |
| 48.00 | 87.49 | 1.87 |
| 48.60 | 87.78 | 1.36 |
| 49.20 | 88.58 | 3.81 |
| 49.80 | 89.60 | 4.85 |
| 50.40 | 89.41 | -.88 |
| 51.00 | 89.46 | .21 |
| 51.60 | 89.61 | .73 |
| 52.20 | 89.91 | 1.39 |
| 52.80 | 90.31 | 1.93 |
| 53.40 | 89.57 | -3.54 |
| 54.00 | 89.21 | -1.70 |
| 54.60 | 89.29 | .37 |
| 55.20 | 89.43 | .67 |
| 55.80 | 89.92 | 2.36 |
| 56.40 | 89.86 | -.29 |
| 57.00 | 89.60 | -1.25 |
| 57.60 | 89.89 | 1.35 |
| 58.20 | 90.41 | 2.49 |
| 58.80 | 90.73 | 1.52 |
| 59.40 | 90.92 | .90 |
| 60.00 | 90.91 | -.06 |

0% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 60.60 | 90.60 | -1.48 |
| 61.20 | 90.91 | 1.51 |
| 61.80 | 90.92 | .04 |
| 62.40 | 91.28 | 1.70 |
| 63.00 | 91.24 | -.21 |
| 63.60 | 91.12 | -.54 |
| 64.20 | 92.38 | 5.98 |
| 64.80 | 93.07 | 3.31 |
| 65.40 | 93.02 | -.27 |
| 66.00 | 93.69 | 3.21 |
| 66.60 | 92.99 | -3.35 |
| 67.20 | 93.23 | 1.16 |
| 67.80 | 93.13 | -.50 |
| 68.40 | 93.86 | 3.49 |
| 69.00 | 93.59 | -1.27 |
| 69.60 | 93.03 | -2.70 |
| 70.20 | 93.96 | 4.46 |
| 70.80 | 93.67 | -1.38 |
| 71.40 | 93.70 | .14 |
| 72.00 | 93.49 | -1.03 |
| 72.60 | 93.43 | -.27 |
| 73.20 | 93.27 | -.74 |
| 73.80 | 93.85 | 2.75 |
| 74.40 | 94.01 | .72 |
| 75.00 | 93.68 | -1.54 |
| 75.60 | 93.25 | -2.03 |
| 76.20 | 93.95 | 3.33 |
| 76.80 | 93.78 | -.80 |
| 77.40 | 93.69 | -.46 |
| 78.00 | 93.76 | .35 |
| 78.60 | 94.33 | 2.71 |
| 79.20 | 94.13 | -.97 |
| 79.80 | 94.60 | 2.24 |
| 80.40 | 94.53 | -.33 |
| 81.00 | 93.92 | -2.89 |
| 81.60 | 94.17 | 1.18 |
| 82.20 | 93.66 | -2.43 |
| 82.80 | 93.88 | 1.05 |
| 83.40 | 94.41 | 2.51 |
| 84.00 | 94.38 | -.11 |
| 84.60 | 95.08 | 3.33 |
| 85.20 | 95.90 | 3.86 |
| 85.80 | 96.15 | 1.20 |
| 86.40 | 96.35 | .95 |
| 87.00 | 96.70 | 1.66 |
| 87.60 | 96.79 | .44 |
| 88.20 | 95.84 | -4.52 |
| 88.80 | 97.26 | 6.80 |
| 89.40 | 96.08 | -5.65 |
| 90.00 | 97.45 | 6.54 |

0% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 90.60 | 97.28 | -.84 |
| 91.20 | 97.20 | -.38 |
| 91.80 | 96.11 | -5.15 |
| 92.40 | 96.68 | 2.68 |
| 93.00 | 96.49 | -.88 |
| 93.60 | 96.72 | 1.07 |
| 94.20 | 97.17 | 2.17 |
| 94.80 | 96.73 | -2.11 |
| 95.40 | 97.55 | 3.88 |
| 96.00 | 96.38 | -5.53 |
| 96.60 | 97.15 | 3.64 |
| 97.20 | 97.91 | 3.63 |
| 97.80 | 97.94 | .11 |
| 98.40 | 98.52 | 2.76 |
| 99.00 | 97.03 | -7.07 |
| 99.60 | 97.99 | 4.56 |
| 100.20 | 97.64 | -1.65 |
| 100.80 | 98.54 | 4.25 |
| 101.40 | 98.71 | .82 |
| 102.00 | 99.32 | 2.89 |
| 102.60 | 97.86 | -6.95 |
| 103.20 | 98.03 | .83 |
| 103.80 | 98.60 | 2.71 |
| 104.40 | 98.23 | -1.77 |
| 105.00 | 99.63 | 6.69 |
| 105.60 | 98.62 | -4.80 |
| 106.20 | 99.51 | 4.21 |
| 106.80 | 99.68 | .79 |
| 107.40 | 98.62 | -5.05 |
| 108.00 | 99.30 | 3.27 |
| 108.60 | 98.79 | -2.43 |
| 109.20 | 98.27 | -2.50 |
| 109.80 | 98.67 | 1.91 |
| 110.40 | 98.54 | -.59 |
| 111.00 | 98.22 | -1.52 |
| 111.60 | 98.21 | -.08 |
| 112.20 | 98.74 | 2.55 |
| 112.80 | 97.86 | -4.21 |
| 113.40 | 98.94 | 5.16 |
| 114.00 | 98.68 | -1.26 |
| 114.60 | 99.56 | 4.20 |

40% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 1.20 | 3.50 | |
| 1.80 | 8.20 | 0.00 |
| 2.40 | | 22.93 |
| 3.00 | 13.44 | 25.67 |
| 3.60 | 18.56 | 25.09 |
| 4.20 | 22.98 | 21.49 |
| 4.80 | 27.07 | 19.77 |
| 5.40 | 30.16 | 14.87 |
| 6.00 | 33.28 | 14.95 |
| 6.60 | 35.82 | 12.16 |
| 7.20 | 38.96 | 15.08 |
| 7.80 | 42.49 | 17.03 |
| 8.40 | 46.01 | 16.92 |
| 9.00 | 48.26 | 10.77 |
| 9.60 | 50.70 | 11.68 |
| 10.20 | 52.83 | 10.17 |
| 10.80 | 54.73 | 9.06 |
| 11.40 | 56.76 | 9.69 |
| 12.00 | 58.36 | 7.62 |
| 12.60 | 59.70 | 6.38 |
| 13.20 | 61.29 | 7.58 |
| 13.80 | 62.70 | 6.70 |
| 14.40 | 64.43 | 8.26 |
| 15.00 | 65.56 | 5.34 |
| 15.60 | 66.78 | 5.83 |
| 16.20 | 67.75 | 4.62 |
| 16.80 | 68.76 | 4.82 |
| 17.40 | 69.55 | 3.73 |
| 18.00 | 70.36 | 3.87 |
| 18.60 | 71.37 | 4.79 |
| 19.20 | 72.06 | 3.26 |
| 19.80 | 72.70 | 3.04 |
| 20.40 | 73.33 | 2.99 |
| 21.00 | 74.25 | 4.37 |
| 21.60 | 74.71 | 2.20 |
| 22.20 | 75.36 | 3.10 |
| 22.80 | 75.44 | .40 |
| 23.40 | 75.71 | 1.25 |
| 24.00 | 76.87 | 5.52 |
| 24.60 | 77.75 | 4.16 |
| 25.20 | 78.39 | 3.05 |
| 25.80 | 78.73 | 1.64 |
| 26.40 | 79.14 | 1.92 |
| 27.00 | 79.44 | 1.45 |
| 27.60 | 80.02 | 2.73 |
| 28.20 | 80.44 | 2.03 |
| 28.80 | 80.95 | 2.40 |
| 29.40 | 81.16 | 1.01 |
| 30.00 | 81.67 | 2.42 |
| | 82.20 | 2.52 |

40% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 30.60 | 82.41 | 1.00 |
| 31.20 | 82.85 | 2.09 |
| 31.80 | 83.33 | 2.29 |
| 32.40 | 84.01 | 3.21 |
| 33.00 | 84.20 | .93 |
| 33.60 | 84.75 | 2.59 |
| 34.20 | 84.74 | -.04 |
| 34.80 | 85.51 | 3.68 |
| 35.40 | 86.02 | 2.42 |
| 36.00 | 86.30 | 1.32 |
| 36.60 | 86.32 | .09 |
| 37.20 | 86.14 | -.82 |
| 37.80 | 86.52 | 1.78 |
| 38.40 | 87.99 | 7.01 |
| 39.00 | 87.82 | -.80 |
| 39.60 | 88.05 | 1.10 |
| 40.20 | 89.07 | 4.82 |
| 40.80 | 90.04 | 4.60 |
| 41.40 | 89.91 | -.58 |
| 42.00 | 90.71 | 3.77 |
| 42.60 | 89.91 | -3.80 |
| 43.20 | 90.04 | .64 |
| 43.80 | 89.25 | -3.76 |
| 44.40 | 89.83 | 2.73 |
| 45.00 | 90.12 | 1.39 |
| 45.60 | 90.89 | 3.68 |
| 46.20 | 91.23 | 1.60 |
| 46.80 | 91.38 | .73 |
| 47.40 | 91.48 | .45 |
| 48.00 | 91.75 | 1.28 |
| 48.60 | 92.31 | 2.68 |
| 49.20 | 92.26 | -.21 |
| 49.80 | 92.62 | 1.69 |
| 50.40 | 92.57 | -.25 |
| 51.00 | 92.73 | .77 |
| 51.60 | 92.76 | .17 |
| 52.20 | 92.95 | .88 |
| 52.80 | 92.69 | -1.21 |
| 53.40 | 93.34 | 3.08 |
| 54.00 | 93.11 | -1.11 |
| 54.60 | 93.72 | 2.93 |
| 55.20 | 93.42 | -1.47 |
| 55.80 | 93.09 | -1.56 |
| 56.40 | 94.24 | 5.48 |
| 57.00 | 94.35 | .51 |
| 57.60 | 93.88 | -2.23 |
| 58.20 | 94.41 | 2.53 |
| 58.80 | 94.34 | -.31 |
| 59.40 | 93.76 | -2.77 |
| 60.00 | 94.30 | 2.57 |

40% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 60.60 | 94.50 | .93 |
| 61.20 | 94.21 | -1.39 |
| 61.80 | 94.42 | 1.00 |
| 62.40 | 94.79 | 1.75 |
| 63.00 | 95.02 | 1.09 |
| 63.60 | 94.70 | -1.48 |
| 64.20 | 95.46 | 3.59 |
| 64.80 | 94.92 | -2.55 |
| 65.40 | 94.73 | -.90 |
| 66.00 | 96.33 | 7.62 |
| 66.60 | 96.18 | -.74 |
| 67.20 | 95.49 | -3.25 |
| 67.80 | 95.92 | 2.03 |
| 68.40 | 95.26 | -3.15 |
| 69.00 | 95.80 | 2.56 |
| 69.60 | 96.17 | 1.77 |
| 70.20 | 96.18 | .07 |
| 70.80 | 96.80 | 2.94 |
| 71.40 | 95.89 | -4.34 |
| 72.00 | 96.65 | 3.64 |
| 72.60 | 97.33 | 3.22 |
| 73.20 | 96.38 | -4.50 |
| 73.80 | 96.32 | -.28 |
| 74.40 | 96.83 | 2.42 |
| 75.00 | 96.39 | -2.10 |
| 75.60 | 97.14 | 3.55 |
| 76.20 | 96.98 | -.77 |
| 76.80 | 96.90 | -.39 |
| 77.40 | 97.20 | 1.45 |
| 78.00 | 97.75 | 2.60 |
| 78.60 | 97.02 | -3.45 |
| 79.20 | 97.98 | 4.58 |
| 79.80 | 97.32 | -3.17 |
| 80.40 | 98.42 | 5.26 |
| 81.00 | 98.23 | -.92 |
| 81.60 | 99.10 | 4.13 |
| 82.20 | 97.61 | -7.09 |
| 82.80 | 98.47 | 4.10 |
| 83.40 | 98.24 | -1.11 |
| 84.00 | 98.08 | -.75 |
| 84.60 | 98.17 | .44 |
| 85.20 | 97.72 | -2.12 |
| 85.80 | 98.58 | 4.08 |
| 86.40 | 98.28 | -1.45 |
| 87.00 | 98.47 | .94 |
| 87.60 | 97.82 | -3.12 |
| 88.20 | 98.46 | 3.07 |
| 88.80 | 98.35 | -.51 |
| 89.40 | 99.51 | 5.51 |
| 90.00 | 99.19 | -1.53 |

40% Discharge Gradability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 90.60 | 99.39 | .95 |
| 91.20 | 98.65 | -3.51 |
| 91.80 | 98.76 | .51 |
| 92.40 | 97.69 | -5.11 |
| 93.00 | 98.11 | 2.01 |
| 93.60 | 98.10 | -.03 |
| 94.20 | 98.92 | 3.87 |
| 94.80 | 97.72 | -5.69 |
| 95.40 | 97.92 | .92 |
| 96.00 | 97.80 | -.56 |
| 96.60 | 98.00 | .97 |
| 97.20 | 97.94 | -.32 |
| 97.80 | 97.25 | -3.26 |
| 98.40 | 97.53 | 1.32 |
| 99.00 | 97.08 | -2.12 |
| 99.60 | 97.17 | .41 |
| 100.20 | 97.43 | 1.24 |

80% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 1.20 | 3.50 | 0.00 |
| 1.80 | 3.87 | 1.73 |
| 2.40 | 7.60 | 18.04 |
| 3.00 | 12.74 | 25.18 |
| 3.60 | 17.61 | 23.75 |
| 4.20 | 22.38 | 23.27 |
| 4.80 | 26.65 | 20.72 |
| 5.40 | 31.30 | 22.65 |
| 6.00 | 35.53 | 20.53 |
| 6.60 | 38.72 | 15.32 |
| 7.20 | 42.00 | 15.76 |
| 7.80 | 45.09 | 14.82 |
| 8.40 | 48.07 | 14.33 |
| 9.00 | 50.85 | 13.31 |
| 9.60 | 53.32 | 11.83 |
| 10.20 | 55.76 | 11.67 |
| 10.80 | 57.90 | 10.21 |
| 11.40 | 59.34 | 6.84 |
| 12.00 | 61.13 | 8.56 |
| 12.60 | 62.78 | 7.85 |
| 13.20 | 64.11 | 6.31 |
| 13.80 | 65.68 | 7.49 |
| 14.40 | 67.14 | 6.97 |
| 15.00 | 68.16 | 4.82 |
| 15.60 | 69.34 | 5.64 |
| 16.20 | 70.27 | 4.42 |
| 16.80 | 71.30 | 4.87 |
| 17.40 | 72.26 | 4.58 |
| 18.00 | 73.38 | 5.32 |
| 18.60 | 74.40 | 4.83 |
| 19.20 | 75.46 | 5.04 |
| 19.80 | 76.31 | 4.04 |
| 20.40 | 76.47 | .77 |
| 21.00 | 77.86 | 6.64 |
| 21.60 | 78.70 | 3.97 |
| 22.20 | 79.37 | 3.19 |
| 22.80 | 79.96 | 2.82 |
| 23.40 | 80.57 | 2.88 |
| 24.00 | 81.06 | 2.32 |
| 24.60 | 81.59 | 2.54 |
| 25.20 | 81.83 | 1.15 |
| 25.80 | 82.28 | 2.14 |
| 26.40 | 82.91 | 3.01 |
| 27.00 | 83.46 | 2.59 |
| 27.60 | 83.06 | -1.88 |
| 28.20 | 84.09 | 4.86 |
| 28.80 | 84.68 | 2.84 |
| 29.40 | 84.37 | -1.49 |
| 30.00 | 85.27 | 4.27 |

80% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 30.60 | 85.08 | -.87 |
| 31.20 | 86.06 | 4.62 |
| 31.80 | 85.56 | -2.35 |
| 32.40 | 85.95 | 1.85 |
| 33.00 | 86.99 | 4.96 |
| 33.60 | 87.22 | 1.07 |
| 34.20 | 86.93 | -1.36 |
| 34.80 | 88.09 | 5.54 |
| 35.40 | 87.83 | -1.27 |
| 36.00 | 88.08 | 1.21 |
| 36.60 | 88.54 | 2.18 |
| 37.20 | 88.21 | -1.56 |
| 37.80 | 88.06 | -.71 |
| 38.40 | 89.02 | 4.56 |
| 39.00 | 89.30 | 1.32 |
| 39.60 | 89.29 | -.02 |
| 40.20 | 89.43 | .63 |
| 40.80 | 89.78 | 1.69 |
| 41.40 | 90.22 | 2.08 |
| 42.00 | 90.02 | -.94 |
| 42.60 | 90.09 | .33 |
| 43.20 | 90.58 | 2.31 |
| 43.80 | 90.77 | .92 |
| 44.40 | 90.06 | -3.38 |
| 45.00 | 91.07 | 4.78 |
| 45.60 | 91.43 | 1.74 |
| 46.20 | 91.71 | 1.31 |
| 46.80 | 91.60 | -.50 |
| 47.40 | 91.88 | 1.32 |
| 48.00 | 92.11 | 1.08 |
| 48.60 | 91.96 | -.70 |
| 49.20 | 92.19 | 1.07 |
| 49.80 | 92.22 | .15 |
| 50.40 | 92.93 | 3.40 |
| 51.00 | 93.11 | .83 |
| 51.60 | 92.97 | -.65 |
| 52.20 | 93.15 | .84 |
| 52.80 | 93.49 | 1.63 |
| 53.40 | 93.74 | 1.16 |
| 54.00 | 93.74 | 0.00 |
| 54.60 | 93.80 | .28 |
| 55.20 | 93.75 | -.21 |
| 55.80 | 95.43 | 8.01 |
| 56.40 | 95.03 | -1.90 |
| 57.00 | 94.17 | -4.10 |
| 57.60 | 95.20 | 4.88 |
| 58.20 | 94.89 | -1.43 |
| 58.80 | 94.30 | -2.82 |
| 59.40 | 94.67 | 1.76 |
| 60.00 | 94.69 | .10 |

80% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 60.60 | 95.78 | 5.15 |
| 61.20 | 95.58 | -.91 |
| 61.80 | 95.40 | -.86 |
| 62.40 | 95.35 | -.23 |
| 63.00 | 97.09 | 8.28 |
| 63.60 | 95.88 | -5.75 |
| 64.20 | 96.81 | 4.43 |
| 64.80 | 97.02 | .99 |
| 65.40 | 95.68 | -6.39 |
| 66.00 | 95.45 | -1.09 |
| 66.60 | 96.16 | 3.38 |
| 67.20 | 95.77 | -1.86 |
| 67.80 | 96.02 | 1.18 |
| 68.40 | 95.67 | -1.65 |
| 69.00 | 96.24 | 2.71 |
| 69.60 | 95.43 | -3.88 |
| 70.20 | 95.21 | -1.03 |
| 70.80 | 96.03 | 3.92 |
| 71.40 | 95.94 | -.42 |
| 72.00 | 95.44 | -2.41 |
| 72.60 | 95.99 | 2.65 |
| 73.20 | 96.25 | 1.20 |
| 73.80 | 97.23 | 4.69 |
| 74.40 | 97.12 | -.54 |
| 75.00 | 97.58 | 2.15 |
| 75.60 | 97.62 | .23 |
| 76.20 | 97.22 | -1.93 |
| 76.80 | 96.43 | -3.73 |
| 77.40 | 97.20 | 3.66 |
| 78.00 | 97.66 | 2.15 |
| 78.60 | 96.96 | -3.29 |
| 79.20 | 97.95 | 4.69 |
| 79.80 | 97.59 | -1.70 |
| 80.40 | 97.63 | .20 |
| 81.00 | 98.36 | 3.47 |
| 81.60 | 97.80 | -2.68 |
| 82.20 | 99.68 | 8.98 |
| 82.80 | 98.11 | -7.46 |
| 83.40 | 98.93 | 3.90 |
| 84.00 | 98.91 | -.11 |
| 84.60 | 99.66 | 3.59 |
| 85.20 | 99.90 | 1.13 |
| 85.80 | 98.72 | -5.71 |
| 86.40 | 99.66 | 4.45 |
| 87.00 | 99.36 | -1.42 |
| 87.60 | 99.04 | -1.54 |
| 88.20 | 98.82 | -1.05 |
| 88.80 | 99.24 | 2.03 |
| 89.40 | 98.90 | -1.62 |
| 90.00 | 99.53 | 3.00 |

80% Discharge Gradeability at Speed

| Elapsed Time (Sec) | Velocity (km/hr) | Grade (%) |
|--------------------|------------------|-----------|
| 90.60 | 99.20 | -1.60 |
| 91.20 | 99.67 | 2.23 |
| 91.80 | 99.89 | 1.06 |
| 92.40 | 99.72 | -.79 |
| 93.00 | 100.14 | 2.00 |
| 93.60 | 100.42 | 1.33 |
| 94.20 | 100.10 | -1.52 |
| 94.80 | 100.30 | .95 |
| 95.40 | 100.51 | .97 |
| 96.00 | 100.12 | -1.85 |
| 96.60 | 100.64 | 2.49 |
| 97.20 | 100.87 | 1.11 |
| 97.80 | 100.46 | -1.98 |
| 98.40 | 100.12 | -1.62 |
| 99.00 | 99.57 | -2.61 |
| 99.60 | 99.84 | 1.30 |
| 100.20 | 99.21 | -3.01 |
| 100.80 | 99.63 | 2.01 |

Cycle 1, Coast Down

| ELAPSED TIME (SEC) | VELOCITY (KM/HR) | ROAD ENERGY (KUM/KM) | ROAD POWER (KU) | AUG. VEL. (KM/HR) |
|-----------------------|---------------------|-------------------------|--------------------|----------------------|
| 0.00 | 98.22 | .0028 | .2721 | 98.22 |
| 3.00 | 93.49 | .2124 | 20.3609 | 95.85 |
| 6.00 | 90.57 | .1315 | 12.1006 | 92.03 |
| 9.00 | 88.48 | .0938 | 8.3987 | 89.52 |
| 12.00 | 84.04 | .1997 | 17.2277 | 86.26 |
| 15.00 | 81.25 | .1253 | 10.3530 | 82.64 |
| 18.00 | 78.09 | .1421 | 11.3236 | 79.67 |
| 21.00 | 77.41 | .0306 | 2.3783 | 77.75 |
| 24.00 | 74.50 | .1305 | 9.9123 | 75.96 |
| 27.00 | 71.08 | .1539 | 11.2037 | 72.79 |
| 30.00 | 69.02 | .0925 | 6.4809 | 70.05 |
| 33.00 | 66.18 | .1279 | 8.6444 | 67.60 |
| 36.00 | 63.86 | .1043 | 6.7795 | 65.02 |
| 39.00 | 61.53 | .1048 | 6.5673 | 62.69 |
| 42.00 | 59.28 | .1009 | 6.0964 | 60.41 |
| 45.00 | 57.16 | .0957 | 5.5728 | 58.22 |
| 48.00 | 54.85 | .1038 | 5.8149 | 56.00 |
| 51.00 | 52.61 | .1007 | 5.4104 | 53.73 |
| 54.00 | 49.76 | .1278 | 6.5390 | 51.16 |
| 57.00 | 47.48 | .1027 | 4.9913 | 48.02 |
| 60.00 | 45.28 | .0990 | 4.5935 | 46.38 |
| 63.00 | 43.15 | .0954 | 4.2195 | 44.22 |
| 66.00 | 41.33 | .0821 | 3.4694 | 42.24 |
| 69.00 | 39.64 | .0758 | 3.0696 | 40.48 |
| 72.00 | 38.21 | .0643 | 2.5033 | 38.93 |
| 75.00 | 37.26 | .0425 | 1.6034 | 37.74 |
| 78.00 ^A | 35.90 | .0616 | 2.2521 | 36.58 |
| 81.00 | 34.85 | .0468 | 1.6572 | 35.37 |
| 84.00 | 33.55 | .0585 | 1.9994 | 34.20 |
| 87.00 | 32.49 | .0480 | 1.5851 | 33.02 |
| 90.00 | 31.67 | .0367 | 1.1782 | 32.08 |
| 93.00 | 30.51 | .0519 | 1.6138 | 31.09 |
| 96.00 | 29.34 | .0530 | 1.5850 | 29.92 |
| 99.00 | 28.37 | .0432 | 1.2468 | 28.85 |
| 102.00 | 27.29 | .0487 | 1.3542 | 27.83 |
| 105.00 | 26.32 | .0439 | 1.1763 | 26.80 |
| 108.00 | 25.32 | .0448 | 1.1579 | 25.82 |
| 111.00 | 24.16 | .0520 | 1.2854 | 24.74 |
| 114.00 | 23.30 | .0386 | .9163 | 23.73 |
| 117.00 | 22.23 | .0483 | 1.0989 | 22.77 |
| 120.00 | 21.37 | .0387 | .8428 | 21.80 |
| 123.00 | 20.30 | .0481 | 1.0017 | 20.84 |
| 126.00 | 19.29 | .0456 | .9034 | 19.79 |
| 129.00 | 17.93 | .0609 | 1.1339 | 18.61 |
| 132.00 | 16.83 | .0493 | .8562 | 17.38 |
| 135.00 | 15.69 | .0515 | .8370 | 16.26 |
| 138.00 | 14.57 | .0502 | .7599 | 15.13 |
| 141.00 | 13.44 | .0507 | .7106 | 14.01 |
| 144.00 | 12.49 | .0427 | .5535 | 12.97 |

| ELAPSED TIME (SEC) | VELOCITY (KM/HR) | ROAD ENERGY (KUM/KM) | ROAD POWER (KW) | AUG. VEL. (KM/HR) |
|-----------------------|---------------------|-------------------------|--------------------|----------------------|
| 147.00 | 11.17 | .0594 | .7026 | 11.83 |
| 150.00 | 10.28 | .0401 | .4300 | 10.73 |
| 153.00 | 9.09 | .0535 | .5187 | 9.69 |
| 156.00 | 8.33 | .0342 | .2979 | 8.71 |
| 159.00 | 7.21 | .0502 | .3903 | 7.77 |
| 162.00 | 5.97 | .0559 | .3686 | 6.59 |
| 165.00 | 5.13 | .0379 | .2101 | 5.55 |

Cycle 4, Coast Down

| ELAPSED TIME (SEC) | VELOCITY (KM/HR) | ROAD ENERGY (KWH/KM) | ROAD POWER (KW) | AUG. VEL. (KM/HR) |
|-----------------------|---------------------|-------------------------|--------------------|----------------------|
| 0.00 | 96.63 | .1503 | 14.5732 | 96.96 |
| 3.00 | 92.07 | .2050 | 19.3433 | 94.35 |
| 6.00 | 88.17 | .1751 | 15.7784 | 90.12 |
| 9.00 | 85.12 | .1373 | 11.8936 | 86.65 |
| 12.00 | 81.48 | .1636 | 13.6292 | 83.30 |
| 15.00 | 79.14 | .1050 | 8.4302 | 80.31 |
| 18.00 | 76.66 | .1118 | 8.7118 | 77.90 |
| 21.00 | 74.24 | .1087 | 8.1977 | 75.45 |
| 24.00 | 72.27 | .0887 | 6.5000 | 73.25 |
| 27.00 | 68.88 | .1520 | 10.7264 | 70.58 |
| 30.00 | 67.06 | .0818 | 5.5618 | 67.97 |
| 33.00 | 64.16 | .1306 | 8.5703 | 65.61 |
| 36.00 | 62.19 | .0856 | 5.5951 | 63.17 |
| 39.00 | 60.06 | .0689 | 4.2298 | 61.42 |
| 42.00 | 58.79 | .0846 | 5.0147 | 59.72 |
| 45.00 | 56.94 | .0832 | 4.8167 | 57.86 |
| 48.00 | 54.46 | .1112 | 6.1957 | 55.70 |
| 51.00 | 52.80 | .0749 | 4.0149 | 53.63 |
| 54.00 | 50.44 | .1014 | 5.2408 | 51.67 |
| 57.00 | 49.13 | .0634 | 3.1618 | 49.84 |
| 60.00 | 47.74 | .0628 | 3.0401 | 48.43 |
| 63.00 | 45.70 | .0913 | 4.2671 | 46.72 |
| 66.00 | 44.13 | .0707 | 3.1764 | 44.92 |
| 69.00 | 42.63 | .0675 | 2.9267 | 43.38 |
| 72.00 | 41.30 | .0596 | 2.4998 | 41.97 |
| 75.00 | 39.75 | .0697 | 2.8261 | 40.53 |
| 78.00 | 38.11 | .0738 | 2.8742 | 38.93 |
| 81.00 | 36.98 | .0508 | 1.9055 | 37.55 |
| 84.00 | 35.32 | .0750 | 2.7092 | 36.15 |
| 87.00 | 34.18 | .0508 | 1.7063 | 34.75 |
| 90.00 | 32.80 | .0623 | 2.0069 | 33.49 |
| 93.00 | 31.37 | .0644 | 2.0055 | 32.08 |
| 96.00 | 30.15 | .0548 | 1.6501 | 30.76 |
| 99.00 | 28.60 | .0695 | 2.0405 | 29.37 |
| 102.00 | 26.75 | .0834 | 2.3077 | 27.67 |
| 105.00 | 24.60 | .0963 | 2.4731 | 25.68 |
| 108.00 | 22.32 | .1026 | 2.4069 | 23.46 |
| 111.00 | 19.95 | .1066 | 2.2528 | 21.14 |
| 114.00 | 18.01 | .0873 | 1.6572 | 18.98 |
| 117.00 | 15.94 | .0930 | 1.5782 | 16.98 |
| 120.00 | 13.88 | .0927 | 1.3823 | 14.91 |
| 123.00 | 11.87 | .0904 | 1.1637 | 12.87 |
| 126.00 | 10.13 | .0779 | .8575 | 11.00 |
| 129.00 | 8.01 | .0953 | .8647 | 9.07 |
| 132.00 | 6.20 | .0815 | .5794 | 7.11 |

Cycle 7, Coast Down

| ELAPSED TIME (SEC) | VELOCITY (KM/HR) | ROAD ENERGY (KUH/KM) | ROAD POWER (KW) | AUG. VEL. (KM/HR) |
|--------------------|------------------|----------------------|-----------------|-------------------|
| 0.00 | 98.27 | .1191 | 11.7368 | 98.54 |
| 3.00 | 94.10 | .1878 | 18.0616 | 96.19 |
| 6.00 | 91.62 | .1112 | 10.3290 | 92.86 |
| 9.00 | 87.84 | .1700 | 15.2505 | 89.73 |
| 12.00 | 84.64 | .1441 | 12.4280 | 86.24 |
| 15.00 | 83.02 | .0726 | 6.0877 | 83.83 |
| 18.00 | 80.05 | .1338 | 10.9054 | 81.53 |
| 21.00 | 77.42 | .1180 | 9.2887 | 78.73 |
| 24.00 | 75.03 | .1075 | 8.1942 | 76.23 |
| 27.00 | 72.43 | .1168 | 8.6098 | 73.73 |
| 30.00 | 69.92 | .1131 | 8.0490 | 71.18 |
| 33.00 | 67.99 | .0865 | 5.9643 | 68.96 |
| 36.00 | 65.35 | .1189 | 7.9283 | 66.67 |
| 39.00 | 63.24 | .0948 | 6.0924 | 64.30 |
| 42.00 | 60.83 | .1085 | 6.7299 | 62.03 |
| 45.00 | 58.07 | .1242 | 7.3841 | 59.45 |
| 48.00 | 55.71 | .1057 | 6.0154 | 56.89 |
| 51.00 | 54.04 | .0751 | 4.1201 | 54.88 |
| 54.00 | 51.87 | .0979 | 5.1848 | 52.95 |
| 57.00 | 49.75 | .0952 | 4.8375 | 50.81 |
| 60.00 | 47.49 | .1016 | 4.9394 | 48.62 |
| 63.00 | 45.41 | .0934 | 4.3375 | 46.45 |
| 66.00 | 43.56 | .0830 | 3.6915 | 44.49 |
| 69.00 | 41.60 | .0885 | 3.7681 | 42.58 |
| 72.00 | 40.19 | .0632 | 2.5836 | 40.89 |
| 75.00 | 38.96 | .0552 | 2.1858 | 39.58 |
| 78.00 | 37.85 | .0501 | 1.9259 | 38.40 |
| 81.00 | 36.63 | .0548 | 2.0396 | 37.24 |
| 84.00 | 35.70 | .0418 | 1.5130 | 36.16 |
| 87.00 | 34.43 | .0571 | 2.0007 | 35.06 |
| 90.00 | 33.77 | .0294 | 1.0029 | 34.10 |
| 93.00 | 32.83 | .0423 | 1.4086 | 33.30 |
| 96.00 | 31.59 | .0561 | 1.8069 | 32.21 |
| 99.00 | 30.69 | .0403 | 1.2555 | 31.14 |
| 102.00 | 29.82 | .0389 | 1.1769 | 30.26 |
| 105.00 | 28.90 | .0414 | 1.2158 | 29.36 |
| 108.00 | 27.87 | .0463 | 1.3135 | 28.39 |
| 111.00 | 26.99 | .0397 | 1.0895 | 27.43 |
| 114.00 | 25.88 | .0498 | 1.3168 | 26.44 |
| 117.00 | 24.90 | .0441 | 1.1204 | 25.39 |
| 120.00 | 24.17 | .0330 | .8090 | 24.53 |
| 123.00 | 23.02 | .0516 | 1.2172 | 23.59 |
| 126.00 | 21.73 | .0581 | 1.2993 | 22.37 |
| 129.00 | 21.02 | .0319 | .6826 | 21.37 |
| 132.00 | 19.92 | .0495 | 1.0126 | 20.47 |
| 135.00 | 18.66 | .0426 | 1.0917 | 19.29 |
| 138.00 | 17.72 | .0420 | .7645 | 18.19 |
| 141.00 | 16.60 | .0503 | .8628 | 17.16 |
| 144.00 | 15.56 | .0469 | .7538 | 16.08 |

AD-A093 737


ARMY MOBILITY EQUIPMENT RESEARCH AND DEVELOPMENT COMM--ETC F/6 13/6
BASELINE TESTS OF THE GE-100 CENTENNIAL ELECTRIC PASSENGER VEHIC--ETC(U)
SEP 80 E J DOWDIALLO, I R SNELLINGS EC-77-A-31-1092
MERADCOM-2308 NL

UNCLASSIFIED

1 of 2
20/11/7



| |
|----------|
| END |
| DATE |
| FORMED |
| 2 JUN 78 |
| DTIC |

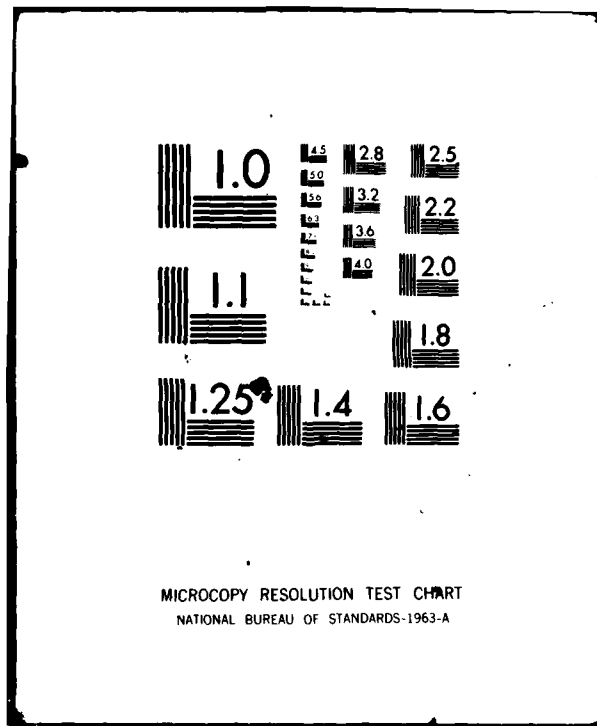

| ELAPSED TIME (SEC) | VELOCITY (KM/HR) | ROAD ENERGY (KWH/KM) | ROAD POWER (KW) | AUG. VEL. (KM/HR) |
|-----------------------|---------------------|-------------------------|--------------------|----------------------|
| 147.00 | 14.50 | .0476 | .7151 | 15.03 |
| 150.00 | 13.41 | .0489 | .6832 | 13.96 |
| 153.00 | 12.31 | .0497 | .6397 | 12.86 |
| 156.00 | 11.51 | .0361 | .4299 | 11.91 |
| 159.00 | 10.39 | .0500 | .5470 | 10.95 |
| 162.00 | 9.02 | .0519 | .6006 | 9.71 |
| 165.00 | 7.89 | .0505 | .4271 | 8.46 |
| 168.00 | 6.39 | .0676 | .4830 | 7.14 |
| 171.00 | 4.86 | .0689 | .3876 | 5.62 |

APPENDIX C

GRAPHICAL DERIVATION OF ROAD LOAD POWER

General

The acceleration and deceleration of the GE-100 electric vehicle can be determined using graphical methods. A Soltec model 3312 chart recorder was used to play back the velocity as a function of time. Tangents to the velocity curve were selected at increments of speed to reflect significant changes in acceleration. There is slow acceleration at zero speed with an increase in acceleration for about the first second. This can be attributed to the design characteristics of the controller which insure a smooth start, rather than a jerk, which might otherwise be associated with the maximum torque of a locked-rotor series d.c. motor.

Controller Effect

At about 4 seconds, under maximum acceleration, the vehicle has achieved sufficient speed for a bypass relay to shunt out the controller. Acceleration to about 24 km/h (15 mi/h) was independent of battery charge. The vehicle was accelerated under various states of battery charge, the effect of thermal cut back was noted on several runs. This is a controller feature which compensates for the temperature of the SCR. When the SCR warms up, it has a tendency to allow more current, a thermal sensor cuts back the condition time to retain the smooth starting characteristics. This test was run on a hot day 29°C (84°F) under stringent conditions (Electrolyte temperature reached 44°C (112°F)). The thermal sensor prevented operation of the bypass relay on several runs. If the thermal cut back had not operated, there would have been a noticeable jerk due to "torque jump."

Data Reduction

Newton's $F = ma$ was used to determine the coast-down forces. Acceleration, a , was graphically determined by $\Delta V/\Delta t$ methods. The vehicle weight was taken as 1747 kg (3850 lb)* and the conversion factors were determined from:

* The original design weight of the vehicle was 1747 kg (3850 lb).

$$P = maV$$

$$m = W/g$$

W in pounds force

g in ft/s²

a in mi/h.s

V in mi/h

P in horsepower

$$P = \frac{W}{32.17} \times a \times \frac{5280}{3600} \times V \times \frac{5280}{3600} \times \frac{1}{550} \left[\frac{\text{lb} \cdot \text{s}^2}{\text{ft}} \cdot \frac{\text{ft}}{\text{s}^2} \cdot \frac{\text{ft}}{\text{s}} \cdot \frac{\text{hp}}{\text{ft lb}} \right]$$

$$P = W \times a \times V \times 1.216 \times 10^{-1}$$

The motor windage and friction were subtracted from the observed coast-down power to arrive at the vehicle external forces. The power was plotted as a function of velocity on log - log paper. Curve fitting resulted in the following empirical equation for vehicle power on zero grade:

$$P = 5.95 \times 10^{-2} V + 6.06 \times 10^{-1} V^2 + 1.05 \times 10^{-5} V^3$$

P in hp

V in km/h

Corrections

Motor windage losses were calculated from:

$$P_{\text{windage}} = 4.02 \times 10^{-3} \left(\frac{\text{r/min}}{1000} \right)^3$$

P in hp

r/min from mi/h x 80.5 motor/vehicle speed ratio.

Motor friction losses were calculated from:

$$P_{\text{friction}} = 1.327 \times 10^{-1} \left(\frac{\text{r/min}}{1000} \right)$$

and then corrected by 98 percent for drive train efficiency. Corrections to the power train loads for motor windage and friction were provided by the manufacturer.

Vehicle Road Energy

The energy consumption per unit distance as a function of speed was determined by converting the road load power from hp to kW and dividing by the velocity. This is the ERDA-EHV-TEP formula:

$$E = 9.07 \times 10^{-5} W \left(\frac{\Delta V}{\Delta t} \right) \frac{\text{kWh}}{\text{mi}}$$

Where $\frac{\Delta V}{\Delta t} = a$ in mi/h's.

DISTRIBUTION FOR MERADCOM REPORT 2308

| No. Copies | Address | No. Copies | Addressee |
|------------|--|------------|--|
| | Department of Defense | 1 | Director US Army Materiel Systems Analysis Agency ATTN: DRXSY-MP Aberdeen Proving Ground, MD 21005 |
| 1 | Director, Technical Information Defense Advanced Research Projects Agency 1400 Wilson Blvd Arlington, VA 22209 | 1 | Commander US Army Troop Support and Aviation Materiel Readiness Command ATTN: DRSTS-MES (1) 4300 Goodfellow Blvd St. Louis, MO 63120 |
| 1 | Director Defense Nuclear Agency ATTN: TITL Washington, DC 20305 | 1 | Director Petrol & Field Svc Dept US Army Quartermaster School Fort Lee, VA 23801 |
| 1 | Defense Technical Information Center Cameron Station Alexandria, VA 22314 | 1 | Commander US Army Electronics Research and Development Command Technical Library Division ATTN: DELSD-L Fort Monmouth, NJ 07703 |
| | Department of the Army | 1 | Commander US Army Aberdeen Proving Ground ATTN: STEAP-MT-U (GE Branch) Aberdeen Proving Ground, MD 21005 |
| 1 | Commander, HQ TRADOC ATTN: ATEN-ME Fort Monroe, VA 23651 | 1 | HQ, 193D Infantry Brigade (Pan) ATTN: AFZU-FE APO Miami 34004 |
| 1 | Technical Library Chemical Systems Laboratory Aberdeen Proving Ground, MD 21010 | 1 | Special Forces Detachment, Europe ATTN: PBO APO New York 09050 |
| 1 | Director US Army Materiel Systems Analysis Agency ATTN: DRXSY-CM Aberdeen Proving Ground, MD 21005 | 1 | Commander Rock Island Arsenal ATTN: SARRI-LPL Rock Island, IL 61201 |

| No. Copies | Addressee | No. Copies | Addressee |
|------------|---|------------|--|
| 1 | HQDA ODCSLOG DALO-TSE Room 1E588 Pentagon, Washington, DC 20310 | 1 | C, Ctrmine Lab, DRDME-N C, Engy & Wtr Res Lab, DRDME-G C, Elec Pwr Lab, DRDME-E C, Camo & Topo Lab, DRDME-R C, Mar & Br Lab, DRDME-M C, Mech & Constr Eqpt Lab, DRDME-H C, Ctr Intrus Lab, DRDME-X C, Matl Tech Lab, DRDME-V Dir, Prod A&T Directorate, DRDME-T CIRCULATE |
| 1 | Commander Headquarters, 39th Engineer Battalion (Cbt) Fort Devens, MA 01433 | | |
| 1 | Commander and Director USA FESA ATTN: FESA-TS Fort Belvoir, VA 22060 | 200 | Electrochemical Div, DRDME-EC |
| | | 3 | Tech Reports Ofc, DRDME-WP |
| | | 3 | Security Ofc (for liaison officers), DRDME-S |
| 1 | Director US Army TRADOC Systems Analysis Activity ATTN: ATAA-SL (Tech Lib) White Sands Missile Range, NM 88002 | 2 | Tech Library, DRDME-WC |
| | | 1 | Programs & Anal Dir, DRDME-U |
| | | 1 | Pub Affairs Ofc, DRDME-I |
| | | 1 | Ofc of Chief Counsel, DRDME-L |
| | | | Department of the Navy |
| 1 | HQ, USAEUR & Seventh Army Deputy Chief of Staff, Engineer ATTN: AEAEN-MT-P APO New York 09403 | 2 | Commander, Naval Facilities Engineering Command Department of the Navy ATTN: Code 032-B 062 200 Stovall St Alexandria, VA 22332 |
| 1 | HQ, USAEUR & Seventh Army Deputy Chief of Staff, Operations ATTN: AEAGC-FMD APO New York 09403 | 1 | US Naval Oceanographic Office Navy Library/NSTL Station Bay St. Louis, MS 39522 |
| 2 | District Engineer ATTN: SWFED-MF FWD Corps of Engineers P.O. 17300 Fort Worth, TX 76102 | 1 | Library (Code L08A) Civil Engineering Laboratory Naval Construction Battalion Center Port Hueneme, CA 93043 |
| | MERADCOM | 1 | Naval Training Equipment Center ATTN: Technical Library Orlando, FL 32813 |
| 1 | Commander, DRDME-Z Tech Dir, DRDME-ZT Assoc Tech Dir/R&D, DRDME-ZN Assoc Tech Dir/Engrg & Acq, DRDME-ZE Spec Asst/Matl Asmt, DRDME-ZG Spec Asst/Scs & Tech, DRDME-ZK CIRCULATE | 3 | Naval Weapons Center (Code 2605) China Lake, CA 93555 |

| No. Copies | Addressee | No. Copies | Addressee |
|------------|---|------------|--|
| | Department of the Air Force | | |
| 1 | HQ USAF/RDPT ATTN: Mr. Allan Eaffy Washington, DC 20330 | 1 | Albert Cook International Lead Zinc Research Organization, Inc. 292 Madison Ave New York, NY 10017 |
| 1 | Mr. William J. Engle Chief, Utilities Branch HQ USAF/PREEU Washington, DC 20332 | 1 | Bernie Wachter OAO Corp. 2101 L Street, NW Washington, DC 20037 |
| 1 | US Air Force HQ Air Force Engineering and Services Center Technical Library FL 7050 Tyndall AFB, FL 32403 | 1 | C. Joseph Venuto 3403 Walton Road Plymouth Meeting, PA 19462 |
| 1 | Department of Transportation Library, FOB 10A, M494-6 800 Independence Ave, SW Washington, DC 20591 | 3 | J. Hampton Barnett Energy Demonstration and Technology 109 United Bank Building Chattanooga, TN 37401 |
| 1 | Mr. Carl Anderson Energy Technology Demonstration SM-ALC/XAE McClellan AFB, CA 95652 | 1 | Joel Sanburg Mail Stop 506-316 Jet Propulsion Laboratory 4800 Oak Grove Dr Pasadena, CA 91103 |
| | Others | 1 | A. D. Little ATTN: Brad Underhill 15 Acorn Park Cambridge, MA 01240 |
| 1 | Professor Raymond R. Fox School of Engineering and Applied Science George Washington University Washington, DC 20052 | 1 | Advanced Ground Systems Eng ATTN: Dr. George Gelb 3270 E. 70th Street Long Beach, CA 90805 |
| 1 | Jet Industries, Inc. 2327 East Ben White Blvd Austin, TX 78741 | 1 | Airesearch Manufacturing Co. ATTN: Bob Rowlett Program Manager 2525 W. 190th Street Torrance, CA 90509 |
| 200 | Department of Energy ATTN: Walter J. Dippold 1000 Independence Ave Mail Stop 5H044 Room 5H063 Forrestal Bldg Washington, DC 20585 | 1 | Argonne National Labs ATTN: Al Chilenskas 9700 South Cass Avenue Argonne, IL 60439 |

| No. Copies | Addressee | No. Copies | Addressee |
|-------------------|--|-------------------|--|
| 1 | Billings Energy Corporation ATTN: Mr. Hadden P. O. Box 555 Provo, UT 84601 | 1 | Energy Research and Development Corporation ATTN: R. Childs, President 9135 Fernwood Drive Olmsted Falls, OH 44138 |
| 1 | Booz, Allen & Hamilton, Inc. John F. Wing Transportation Consulting Div 4330 East West Highway Bethesda, MD 20014 | 1 | ESB, Inc. 5 Penn Center Plaza Philadelphia, PA 19103 |
| 1 | Borisoff Engineering Co. 7726 Burnet Ave Van Nuys, CA 91405 | 10 | General Electric Corporate Research and Development ATTN: Gene Rowland Program Manager P.O. Box 8 Schenectady, NY 12301 |
| 1 | Cooper Development Association ATTN: Donald K. Miner, Manager 430 N. Woodward Ave Birmingham, MI 48011 | 1 | General Research Corporation ATTN: John Brennand 5383 Hollister Avenue Santa Barbara, CA 93105 |
| 1 | Cornell University Joe Rosson, Associate Director School of Engineering Phillips Hall Ithaca, NY 14853 | 1 | General Services Administration Federal Supply Service ATTN: Mel Globberman Washington, DC 20406 |
| 1 | Department of Industry, Trade and Commerce Fred Johnson, Special Vehicle Div Transportation Industries Branch Ottawa, Canada, KIA 085 | 1 | General Services Administration Federal Supply Service ATTN: R. L. Ullrich Washington, DC 20406 |
| 1 | Department of Transportation Transportation Systems Center ATTN: Dr. Norman Rosenburg Cambridge, MA 02142 | 2 | Jet Propulsion Laboratory ATTN: T. Barber 4800 Oak Grove Drive Pasadena, CA 91103 |
| 2 | Electric Power Research Institute ATTN: Dr. Fritz R. Kalhammer Ralph Ferrard 3412 Hillview Avenue P. O. Box 10412 Palo Alto, CA 94304 | 1 | Lawrence Livermore Laboratory ATTN: Douglas Davis-MS-L-216 P.O. Box 808 Livermore, CA 94550 |
| | | 2 | Los Alamos Scientific Labs Byron McCormick P.O. Box 1663 Los Alamos, New Mexico 87545 |

| No. Copies | Addressee | No. Copies | Addressee |
|------------|--|------------|--|
| 1 | NASA – Lewis Research Center ATTN: J. S. Fordyce MS: 309-1 21000 Brookpark Road Cleveland, OH 44135 | 1 | United States Postal Service ATTN: Thomas W. Martin, Mgr Vehicle Services Branch Western Region San Bruno, CA 94099 |
| 2 | NASA – Lewis Research Center ATTN: H. J. Schwartz MS: 500-215 21000 Brookpark Road Cleveland, OH 44135 | 1 | University of California Jack Bolger Lawrence Berkeley Labs Berkeley, CA 94720 |
| 1 | Petro-Electric Motors, Ltd ATTN: Victor Wouk, Consultant 342 Madison Avenue, Suite 831 New York, NY 10017 | 1 | Westinghouse R&D Center ATTN: G. Frank Pittman, Jr. 1310 Beulah Road Pittsburgh, PA 15235 |
| 1 | Purdue University IIES A. A. Potter Engineering Center ATTN: Dr. R. E. Goodson W. Lafayette, IN 47907 | 1 | Marjorie L. McClanahan Chemical Process Unit Materials Technology Aeronutronic Division Ford Aerospace & Communications Corporation Ford Road Newport Beach, CA 92663 |
| 1 | Society of Automotive Engineers, Inc. William Toth, Staff Engineer 400 Commonwealth Warrendale, PA 15096 | 1 | Clinton Christianson Argonne National Laboratory 9700 South Cass Avenue Argonne, IL 60439 |
| 1 | United States Postal Service ATTN: Dick Bowman Office of Fleet Mgmt Delivery Services Dept Washington, DC 20260 | 1 | F. J. Liles 705 Buffalo Drive Arlington, TX 76013 |
| 1 | United States Postal Service ATTN: Donn Crane, Director Office of Fleet Mgmt Delivery Services Dept Washington, DC 20260 | 1 | C. Grandy Union Electric Co. P.O. Box 149 St. Louis, MO 63166 |
| 1 | United States Postal Service Research & Development Lab ATTN: Lewis J. Gerlach, Prog Mgr 11711 Park Lawn Drive Rockville, MD 20852 | 1 | Department of Transportation Library, FOB 10A, TAD – 494.6 800 Independence Ave., SW Washington, DC 20591 |