

AD-A094 018

NORTHWESTERN UNIV EVANSTON IL DEPT OF ELECTRICAL ENG--ETC F/G 4/1
LOWTRAN V SUBROUTINE FOR THE CALCULATION OF INTENSITY DEVIATION--ETC(U)
SEP 80 C F OUYANG, N A PLOUS, S WANG F19628-79-C-0068

UNCLASSIFIED

AFGL-TR-80-0297

NL

1 OF 1
64
09/10/80

00
1 2

END
DATE
FILMED
2-81
DTIC

AFGL-TR-80-0297

12

JW

LONTRAN V SUBROUTINE FOR THE CALCULATION OF
INTENSITY DEVIATION FOR POINT AND
FINITE APERTURE RECEIVERS

LEVEL II

C. F. Ouyang
M. A. Plonus
S-J Wang

Northwestern University
Department of Electrical Engineering
and Computer Science
Evanston, Illinois 60201

Final Report
(period covered 2 Jan 1979 - 30 June 1980)

September 1980

DTIC
ELECTE
S JAN 22 1981 D
E

Approved for public release; distribution unlimited.

AIR FORCE GEOPHYSICS LABORATORY
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
HANSCOM AFB, MASSACHUSETTS 01731

AD A094018

DOC FILE COPY

81 1 19 171

Qualified requestors may obtain additional copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

1. REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
18. REPORT NUMBER AFGL-TR-80-0297	2. GOVT ACCESSION NO. ND A094018	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) LOWTRAN V SUBROUTINE FOR THE CALCULATION OF INTENSITY DEVIATION FOR POINT AND FINITE APERTURE RECEIVERS.		5. TYPE OF REPORT & PERIOD COVERED Final 2 Jan 1979 - 30 June 1980	
6. AUTHOR(s) C. F. Ouyang M. A. Plonus S-J Wang		8. CONTRACT OR GRANT NUMBER(s) F19628-79-C-0068	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Northwestern University Dept. of Electrical Engr., and Computer Sciences Evanston, Illinois 60201		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62101F 767014AD 7714	
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Geophysics Laboratory Hanscom AFB, Massachusetts 01731 Monitor/Robert W. Fenn/OPA		12. REPORT DATE September 1980	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES 24	
		15. SECURITY CLASS. (of this report) unclassified	
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Atmospheric turbulence Transmittance variance Atmospheric optics Infrared Visible			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes a coded subroutine for predicting atmospheric transmittance deviation due to the turbulence effect. This subroutine is designed to be used with Lowtran V. The calculation of transmittance deviation is for point receivers as well as for finite aperture receivers which exhibit the aperture averaging effect.			

DD FORM 1 JAN 73 1473

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

4-2-1

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)



SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

CONTENTS

I. Introduction (1)

II. Plane wave intensity deviation for point receivers (1)

III. Intensity deviation for finite aperture receivers (4)

IV. Subroutine of intensity deviation for Lowtran V (12)

V. Limitations and comments (12)

Appendix A Flow chart of subroutine VRANI (18)

Appendix B VRANI symbols and definitions (19)

Appendix C Listing of subroutine VRANI program (21)

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Avail and/or	
Dist	Special
A	

The subroutine for the calculation of intensity deviation in Lowtran V

I. Introduction

In this report, we present theoretical formulas and a coded subroutine for the calculation of intensity deviation which shows the high bound and low bound of the atmospheric transmittance due to the turbulence effect. In the subroutine, we calculate the transmittance deviation for point receivers as well as for finite aperture receivers which exhibit the aperture averaging effect.

Depending on the type of propagation paths, the calculation in the subroutine has been divided into three parts-horizoptal, upward and downward paths, similarly to the transmittance calculation in Lowtran V program.¹ The different examples will be shown and compared in the following section.

II. Plane wave intensity deviation for point receivers

Consider a plane wave U propagating through the turbulent medium represented by

$$U = e^{\chi + iS} \quad (2.1)$$

where χ is a real value that represents the log-amplitude and S is the imaginary part that represents the phase. Assuming the Gaussian probability distribution for χ , the average intensity and variance of intensity can then be stated as

$$\langle I \rangle \equiv \langle U \cdot U^* \rangle = \langle e^{2\chi} \rangle = e^{2(\sigma_{\chi}^2 + \langle \chi \rangle)} \quad (2.2)$$

$$\langle I^2 \rangle \equiv \langle U \cdot U^* \cdot U \cdot U^* \rangle = e^{4\langle \chi \rangle + 8\sigma_{\chi}^2} \quad (2.3)$$

where $\langle \rangle$ denotes an ensemble average and $\sigma_{\chi}^2 \equiv \langle (\chi - \langle \chi \rangle)^2 \rangle$. Using Eq. (2.2) and (2.3), the normalized variance of the intensity fluctuations is given by

$$\sigma_I^2 \equiv \frac{\langle I^2 \rangle - \langle I \rangle^2}{\langle I \rangle^2} = e^{4\sigma_{\chi}^2} - 1 \quad (2.4)$$

The variance of log-amplitude, σ_{χ} , has been found by Rytov's Method.² However, it is only valid for weak turbulence when applied in Eq. (2.4). Experimental data² indicates that σ_I is saturated toward the value of unity. In recent years theoretical work to prove that the variance of intensity saturates to a constant of unity was performed.³ Avoiding complex mathematics and hoping to get a model which is sufficiently accurate under weak and strong turbulence conditions, we relate the variance of intensity and log-amplitude by⁴

$$\sigma_I \approx 1 - e^{-2\sigma_{\chi}} \quad (2.5)$$

For small values of σ_{χ} , $\sigma_I = 2\sigma_{\chi}$ which agrees with equation (2.4). For large σ_{χ} , $\sigma_I \approx 1$, which agrees with the saturation condition. After we determine σ_I , the upper bound and lower bound of transmittance can be calculated by

$$T_{\chi} = T(1 \pm \sigma_I) \quad (2.6)$$

using Ref. (2), the variance of log-amplitude as found by Rytov's Method is given by

$$\sigma_{\chi}^2 = .563k^{7/6} \int_0^L d\eta C_n^2(\eta) (L - \eta)^{5/6} \quad (2.7)$$

where k is the wavenumber, L is the path length and C_n^2 is the structure constant of refractive index. When C_n^2 is constant along the path, Eq. (2.7) can be rewritten as

$$\sigma_{\chi}^2 = .31 C_n^2(h) k^{7/6} L^{11/6} \quad (2.8)$$

The structure constant C_n^2 has been measured and modeled by Hufnagel, et. al.⁵

we have modified it to fit in Lowtran as

$$C_n^2(h) = \begin{cases} 4.2 \times 10^{-14} h^{-2/3} \exp(-h/320) & (h > 10m) \\ 8.77 \times 10^{-15} & (h < 10m) \\ 0 & (h > 100km) \end{cases} \quad (2.9)$$

where h is altitude and is in units of meters.

For horizontal path, h is constant, hence we use Eq. (2.8). For downward (and upward) path, we must use Eq. (2.7) in which the integral shows an integration from transmitter to receiver. From the weight function $(L-\eta)^{5/6}$ in Eq. (2.7) we know the turbulence around transmitter has more effect than the turbulence near the receiver. Hence we predict that a downward path has larger variance of intensity than an upward path for the same length of path.

For the program, we rewrite Eq. (2.7) in summation form as

$$\sigma_\chi^2 = .56k^{7/6} \sum_i \sum_j C_n^2(h_{ij}) (L-L_{ij})^{5/6} \frac{\Delta L_i}{h_i - h_{i-1}} \Delta h_{ij} \quad (2.10)$$

$$\begin{array}{ll} h_{ij} < 25km & \Delta h_{ij} = 20m \\ 25km < h_{ij} < 50km & \Delta h_{ij} = 100m \\ 50km < h_{ij} < 100km & \Delta h_{ij} = 400m \end{array}$$

where h_{ij} is the altitude corresponding to the calculated point of the path, "i" is the layer index, "j" is the sub index of each layer, L is the total path length, L_{ij} is the path distance from transmitter to the point calculated and ΔL_i is the path length for each layer passed. The choice of Δh intervals was made to allow better height resolution in future specifications of $C_n^2(h)$.

In this calculation, we assume that the path in each layer is straight. Refraction occurs only at the boundaries. The refraction calculation is executed by the original Lowtran program.

Figs. (2.1), (2.2) and (2.3) show the transmittance predicted by Lowtran V with the deviation calculated by the added subroutine for horizontal, downward and upward path, respectively. These calculations are for point receivers and a 5km path length. We find that the deviation for downward path is larger than that for upward. This is due to the stronger turbulence at the lower altitude and the effect that turbulence near the transmitter is dominant.

III. Intensity deviation for finite aperture receivers

In Sec. II, the intensity fluctuations are assumed to be measured by a point receiver. However, in the real world the receiver has a finite aperture. If the diameter of the objective is much larger than the amplitude correlation distance ρ , the objective will contain wave front sections with fluctuations of opposite sign, so that the overall light flux through a larger objective will fluctuate relatively weakly compared to the flux through a small (compared to ρ) objective.

Consider the intensity in the receiver plane to be $I(L, \underline{p})$. The total flux P through the objective is then $P = \iint_{\Sigma} I(L, \underline{p}) d\underline{p}$, where \underline{p} is the transverse coordinate and Σ is the aperture area of the objective. The fluctuations in P , defined as $P' = P - \langle P \rangle$, are expressed in the form $P' = \iint_{\Sigma} I'(L, \underline{p}) d\underline{p}$, where $I' = I - \langle I \rangle$. For the mean square fluctuations of power we have

$$\begin{aligned} \langle P'^2 \rangle &\equiv \iint_{\Sigma} \iint_{\Sigma} \langle I'(\underline{p}_1) I'(\underline{p}_2) \rangle d\underline{p}_1 d\underline{p}_2 \\ &= \int_{-\infty}^{\infty} \iint_{-\infty}^{\infty} B_I(\underline{p}_1 - \underline{p}_2) F(\underline{p}_1) F(\underline{p}_2) d\underline{p}_1 d\underline{p}_2 \end{aligned} \quad (3.1)$$

where the intensity correlation function $B_I(\underline{p}_1 - \underline{p}_2) \equiv \langle I'(\underline{p}_1) I'(\underline{p}_2) \rangle$ and $F(\underline{p})$ is a function which is zero outside the aperture and 1 on its surface.

LOWTRAN V PREDICTIONS WITH VARIANCES

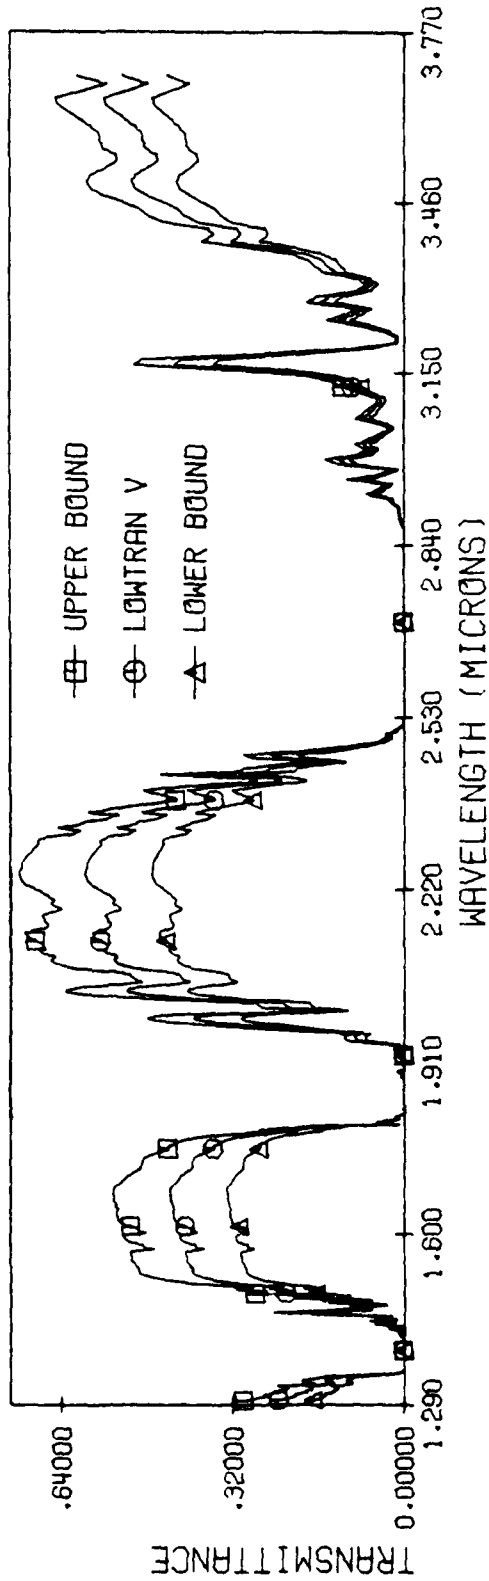


Fig. 2-1 Atmospheric transmittance predicted by LOWTRAN V with upper and lower bound using 1962 U.S. standard atmospheric model and Rural aerosol model for a 5 km horizontal path at altitude 400 m, and visual range 5 km for a point receiver ($D = 0$).

LOWTRAN V PREDICTIONS WITH VARIANCES

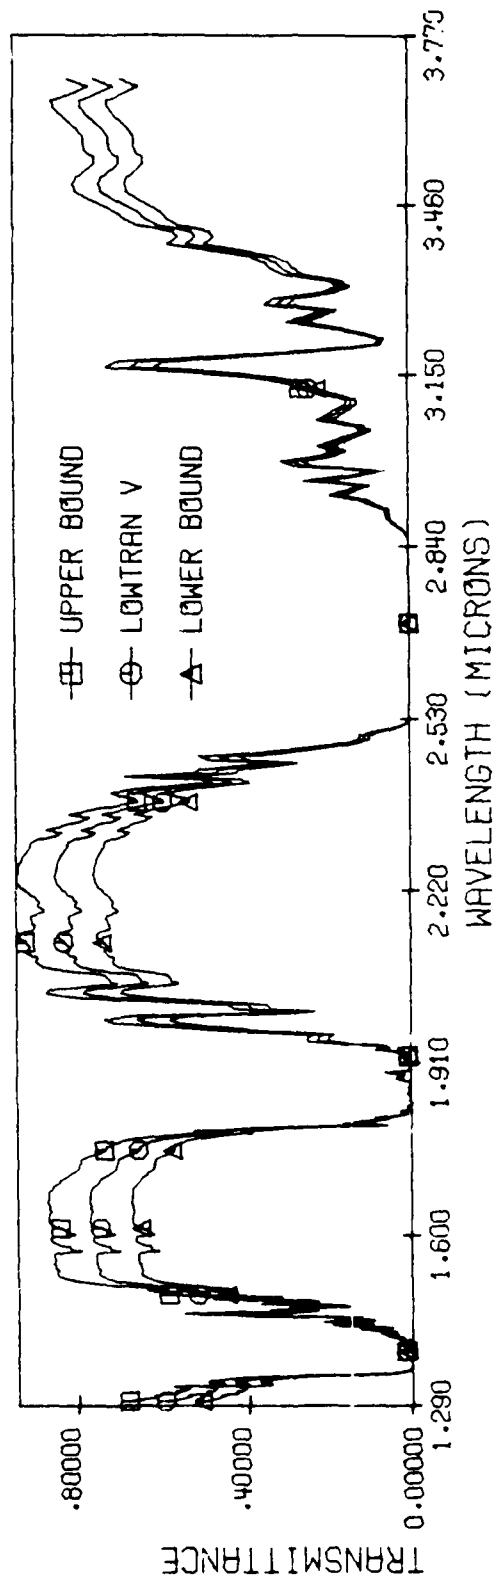


Fig. 2-2 Atmospheric transmittance predicted by LOWTRAN V with upper and lower bound using 1962 U.S. standard atmospheric model and Rural aerosol model for a downward path at altitude from 200 m to 4 km with path length of 5 km, and visual range 5 km for a point receiver.

LOWTRAN V PREDICTIONS WITH VARIANCES

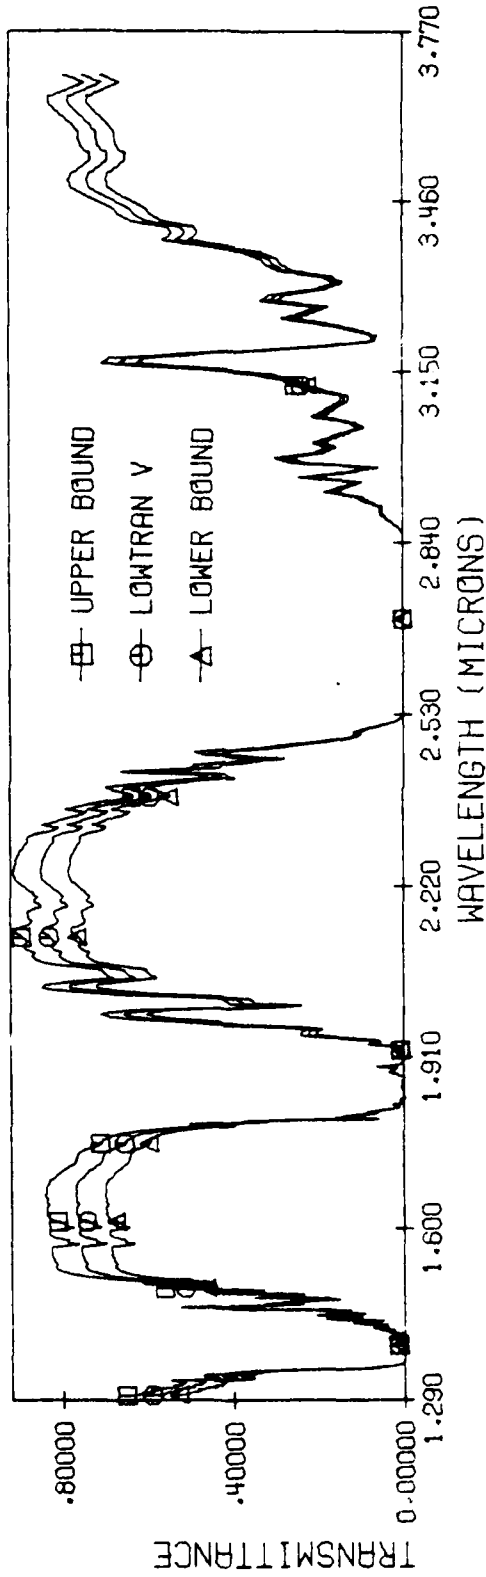


Fig. 2-3 Atmospheric transmittance predicted by LOWTRAN V

with upper and lower bound using 1962 U.S. standard model and Rural aerosol model for an upward path at altitude from 4 km to 200 m with path length of 5 km, and visual range 5 km for a point receiver.

Changing variables and assuming the receiver aperture to be a circle with radius R, Eq. (3.1) can then be written as:

$$\langle P'^2 \rangle = 2\pi \int_0^{2R} \rho d\rho B_I(\rho) K(\rho) \quad (3.2)$$

where

$$K(\rho) \equiv \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} F(\underline{p}_1) F(\underline{p}_1 - \underline{\rho}) d^2 p_1$$

$$= \begin{cases} 2R^2 \left[\cos^{-1} \left(\frac{\rho}{2R} \right) - \frac{\rho}{2R} \sqrt{1 - \frac{\rho^2}{4R^2}} \right], & \rho < 2R \\ 0, & \rho > 2R \end{cases} \quad (3.3)$$

The normalized fluctuation of power is defined as

$$Q(R) \equiv \frac{\langle P'^2 \rangle}{\langle P \rangle^2} = \frac{4}{\pi R^2} \int_0^{2R} \frac{B_I(\rho)}{\langle I \rangle^2} \left[\cos^{-1} \left(\frac{\rho}{2R} \right) - \frac{\rho}{2R} \sqrt{1 - \frac{\rho^2}{4R^2}} \right] \rho d\rho \quad (3.4)$$

to show the averaging action, we define another parameter $G(R) \equiv \frac{Q(R)}{Q(0)}$ which is a ratio that compares the fluctuations of power of a finite aperture and a point aperture:

$$G(R) = \frac{4}{\pi R^2} \int_0^{2R} b_I(\rho) \left[\cos^{-1} \left(\frac{\rho}{2R} \right) - \frac{\rho}{2R} \sqrt{1 - \frac{\rho^2}{4R^2}} \right] \rho d\rho \quad (3.5)$$

where $b_I(\rho)$ is the normalized correlation coefficient of the intensity fluctuations

$$b_I(\rho) \equiv \frac{\frac{B_I(\rho)}{\langle I \rangle^2}}{\frac{B_I(0)}{\langle I \rangle^2}} = \frac{e^{4B_I(\rho)} - 1}{4\sigma^2} \frac{1}{e^{4\sigma^2} - 1} \quad (3.6)$$

and

$$B_\chi(\rho) \equiv \langle \chi(\underline{p}_1) \chi^*(\underline{p}_2) \rangle \quad (3.7)$$

Because the structure constant C_n^2 depends on the altitude h , the calculations for horizontal and downward or upward paths are different. We separate the two cases as follows:

(i) Horizontal path

By using Rytov's Method and the Kolmogorov spectrum (Refs. 2,6), $B_X(\rho)$ can be found with the condition that $\ell_0^2 \ll \lambda L$ as

$$B_X(\rho) = b_X(\rho) \sigma_X^2 \quad (3.8)$$

and

$$b_X(\rho) = \begin{cases} 1 - 12.3 \frac{\rho^2}{(\lambda L)^{5/6} \ell_0^{1/3}}, & \rho \ll \ell_0 \\ 1 - 2.36 \left(\frac{\rho^2 k}{L}\right)^{5/6} + 1.71 \frac{k \rho^2}{L} - .024 \left(\frac{k \rho^2}{L}\right)^2, & \ell_0 \ll \rho \ll \sqrt{\lambda L} \\ -.0242 \left(\frac{k \rho^2}{4L}\right)^{-7/6}, & \sqrt{\lambda L} \ll \rho \end{cases} \quad (3.9)$$

where ℓ_0 is the small scale of turbulence and is assumed to be 3mm in the Low-tran code, and σ_X is the same as in Eq. (2.8). After substituting Eq. (3.8) (2.8) and (3.6) into (3.5), we can find the receiver aperture averaging effect for horizontal paths.

(ii) Slant path

Using Rytov Method, Kolmogorov spectrum and locally homogeneous medium, the correlation function of log-amplitude can be found from Ref. (2) under the condition $L\lambda \gg \ell_0^2$:

$$B_X(L, \rho) = .033 \pi^2 \left(-\Gamma\left(-\frac{5}{6}\right)\right) k^2 \cdot \int_0^L C_n^2(\eta) d\eta \cdot FG(\rho, \eta) \quad (3.10)$$

where

$$FG(\rho, \eta) = \left[\operatorname{Re} \left(\frac{1}{\kappa_m^2} + \frac{i(L-\eta)^{5/6}}{k} \right) {}_1F_1 \left(-\frac{5}{6}, 1, -\frac{\rho^2}{4 \left(\frac{1}{\kappa_m^2} + \frac{i(L-\eta)}{k} \right)} \right) \right]$$

$$- \left(\frac{1}{2} \right)^{5/6} {}_1F_1 \left(-\frac{5}{6}, 1, -\frac{\kappa_m^2 \rho^2}{4} \right) \quad (3.11)$$

$$\kappa_m \equiv \frac{5.92}{L_0} \quad (3.12)$$

${}_1F_1(a, b, x)$ is the degenerate hypergeometric function[#]. For calculating ${}_1F_1$ on the computer, we approximate the function ${}_1F_1$ as

$${}_1F_1 \left(-\frac{5}{6}, 1, X \right) = \begin{cases} 1 - 0.8333X - 0.0347X^2 - 0.0045X^3 & |X| < 6.5 \\ 1.0627(-X)^{5/6} & |X| \geq 6.5 \text{ and } (\text{Re } X < 0) \end{cases} \quad (3.13)$$

This approximation has been checked and the total error is under 10%. Furthermore, we assume $\frac{L - \eta}{k} \gg \frac{1}{\kappa_m^2}$, which means that we neglect very small parts of turbulence near the receiver. We then substitute Eq. (3.13) into (3.11), and get the different forms for the different conditions:

$$FG(\eta, \rho) = \begin{cases} 0 & \left(\frac{\rho^2}{4D} > 6.5, \frac{\rho^2}{4A} > 6.5 \right) \\ D^{5/6} \left(.259 + .805 \frac{\rho^2}{4D} + .009 \left(\frac{\rho^2}{4D} \right)^2 - .0043 \left(\frac{\rho^2}{4D} \right)^3 \right) & \\ - 1.065 \left(\frac{\rho^2}{4} \right)^{5/6} & \left(\frac{\rho^2}{4D} \leq 6.5, \frac{\rho^2}{4A} > 6.5 \right) \\ D^{5/6} \left(.259 + .805 \frac{\rho^2}{4D} + .009 \left(\frac{\rho^2}{4D} \right)^2 - .0043 \left(\frac{\rho^2}{4D} \right)^3 \right) & (3.14) \\ - (A)^{5/6} \left(1 + .8333 \frac{\rho^2}{4A} - .0347 \left(\frac{\rho^2}{4A} \right)^2 + .0045 \left(\frac{\rho^2}{4A} \right)^3 \right) & \left(\frac{\rho^2}{4D} \leq 6.5, \frac{\rho^2}{4A} \leq 6.5 \right) \end{cases}$$

[#]Note that an equation for a similar situation given by Ishimaru (A. Ishimaru, "Wave Propagation and Scattering in Random Media", Academic Press 1978, Vol. 2, Eq. 17-112) is in error.

where

$$D \equiv \frac{L - \eta}{k}, \quad A \equiv \frac{1}{k^2 m} \quad (3.15)$$

Putting Eq. (3.13) into (3.10) and changing the integration into summation we get

$$B_{\chi}(\rho) = 2.17 k^2 \sum_i \sum_j C_n^2(h_{ij}) FG(L_{ij}) \frac{\Delta L_i}{h_i - h_{i-1}} \Delta h_{ij} \quad (3.16)$$

where k is the wavenumber, L is the path length, "i" is the layer index, "j" is the subindex in each layer, $C_n^2(h_{ij})$ is the structure constant at the height h_{ij} , h_{ij} is the altitude of the point calculated, and ΔL_i is the path length in each layer. Similarly, putting Eq. (2.10), (3.6), (3.16) into (3.5) and changing it into summation we get

$$G(R) = \frac{16}{\pi} \sum_{i=1}^{100} b_I(2Ry_i) [\cos^{-1}(y_i) - y_i \sqrt{1 - y_i^2}] y_i \cdot 0.01 \quad (3.17)$$

where "R" is the radius of the receiver aperture, i is the summation index, and $y_i = 0.01i$.

The intensity deviation $\sigma_p(R)$ for a finite aperture receiver can now be obtained by multiplying $G(R)$ and σ_I (Eq. 2.5)

$$\sigma_p(R) = \sigma_I \cdot \sqrt{G(R)} \quad (3.18)$$

For a condition of moderate turbulence $C_n^2 = 2 \cdot 10^{-16} \text{ m}^{-2/3}$ and horizontal propagation with path length, $L = 5 \text{ km}$, the aperture averaging coefficient $G(R)$ is shown as solid line in Fig. (3.1). It is similar to the dashed line 2 in Fig. (3.1) predicted by Tatarskii². The dashed line 1 in Fig. (3.1) shows the aperture averaging coefficient $G(R)$ for downward path with altitude from 200m to 4km. Comparing horizontal and downward cases, we see that aperture averaging has more effect for the horizontal case. This is because the total turbulence in the case of horizontal path is stronger than the downward case and the coherence length of field of latter is longer than the former.

Figs. (3.2), (3.3) and (3.4) show the atmospheric transmittance predicted by the modified Lowtran V with diameter of the aperture being 30cm, for horizontal, downward and upward path, respectively.

IV. Subroutine of intensity deviation for Lowtran V

This subroutine is for the calculation of intensity deviation, due to turbulence, which can be used to define the upper bound and the lower bound of plane wave transmittance for the point receiver case and the finite aperture receiver case. The subroutine for each calculation of transmittance and for each frequency is called by subroutine TRANS, one of the subroutines of the main program. According to horizontal path, downward path, upward path, we divide the subroutine into three parts. The attached flow chart shows the main points of the subroutine (See Appendix A). We transfer the data of path altitudes H1 and H2, path length L, wavenumber k, the path length in each layer DS1, DS2, the height in each layer XW1, XW2, and the diameter of the receiver[#] and other necessary data to the subroutine VRANI from the main program or from the subroutines of the main program. The symbols and definitions of variables used in the subroutine are listed in Appendix B. The program listing is in Appendix C.

V. Limitations and comments

The subroutine for intensity deviation is theoretically formulated by Rytov's Method. Even after our modification, Eq. (2.5) is only valid for weak and extremely strong turbulence. For moderate turbulence the theory under estimates the fluctuations of intensity as compared with experimental data. Second, in this program we only consider the plane wave case, hence, it will

[#]The diameter of the receiver must be read in from the sixth variable of the second control card and the format is F10.3 and in units of meters.

overestimate the fluctuation in weak turbulence for a real source such as a beam-wave or spherical wave.

For the turbulence itself, we use the model given in Ref. 5, which seems to be too simple to give satisfactory result. Hopefully, we can find a more proper form of turbulence profile in the future and update it in the code. In fact, turbulence in the atmosphere should be varying with temperature, wind speed and constituents of the atmosphere. It is suggested that the turbulence model, like the aerosol models or atmospheric models in Lowtran, should be constructed by different models based on different areas and seasons.

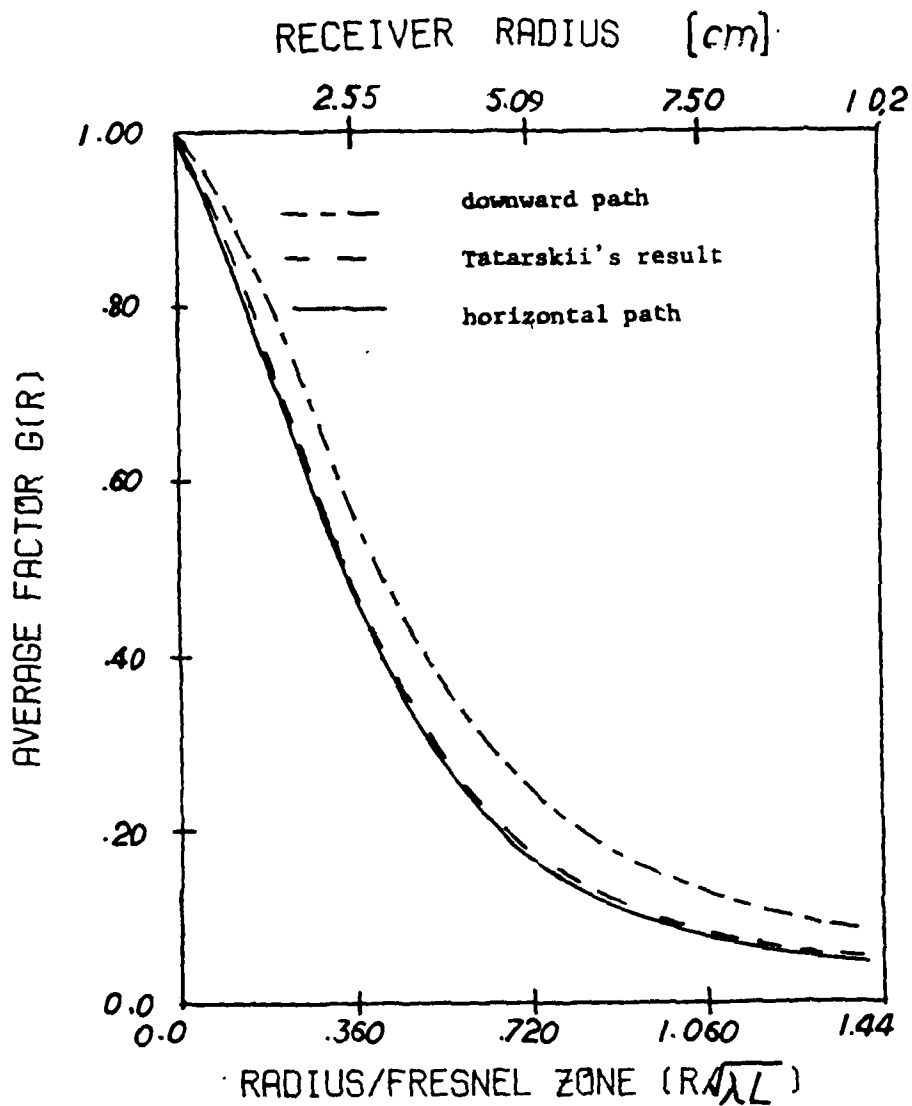


Fig. 3-1 Comparison of aperture averaging factors $G(R)$ for different situations. Solid line is predicted by the new subroutine for a horizontal path at altitude $h = 400\text{m}$. Dashed line 1 (— — —) is predicted by the new subroutine for a downward path at altitude from 200m to 4km. Dashed line 2 (— —) is predicted by Tatarskii. The wavelength is $\lambda = 1\mu\text{m}$ and path length is $L = 5\text{km}$.

LOWTRAN V PREDICTIONS WITH VARIANCES

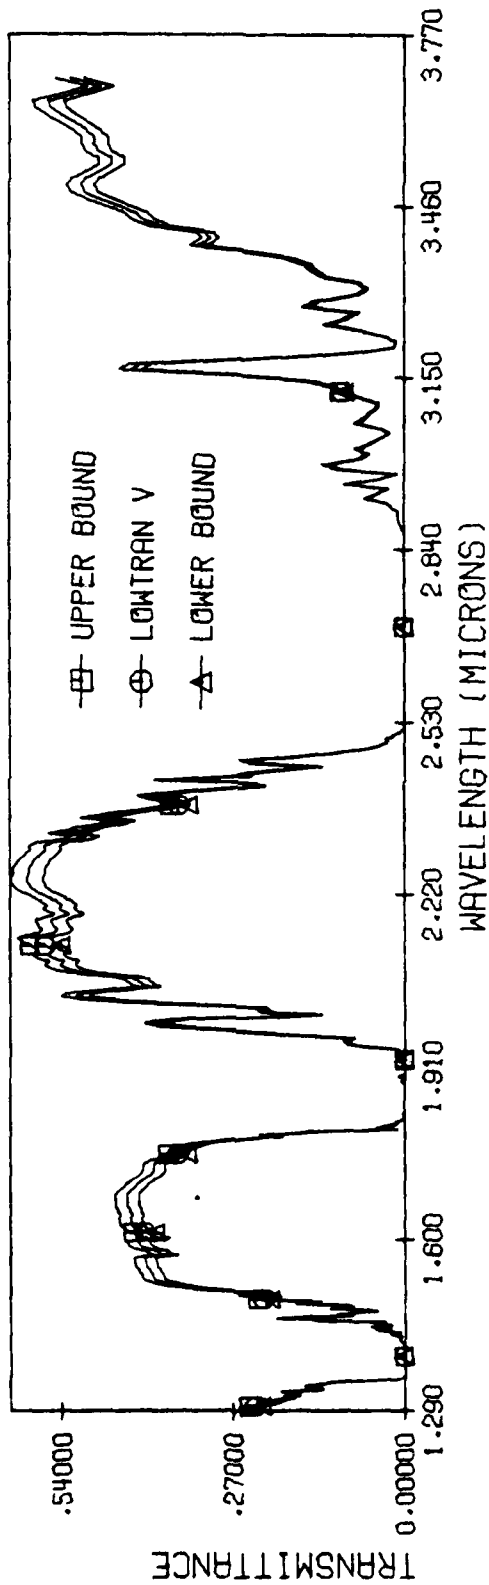


Fig. 3-2 Atmospheric transmittance predicted by the modified LOWTRAN V with upper bound and lower bound using 1962 U.S. standard atmospheric model and Rural aerosol model for a 5 km horizontal path at altitude 400 m, visual range 5 km and a finite receiver of diameter 30 cm.

LOWTRAN V PREDICTIONS WITH VARIANCES

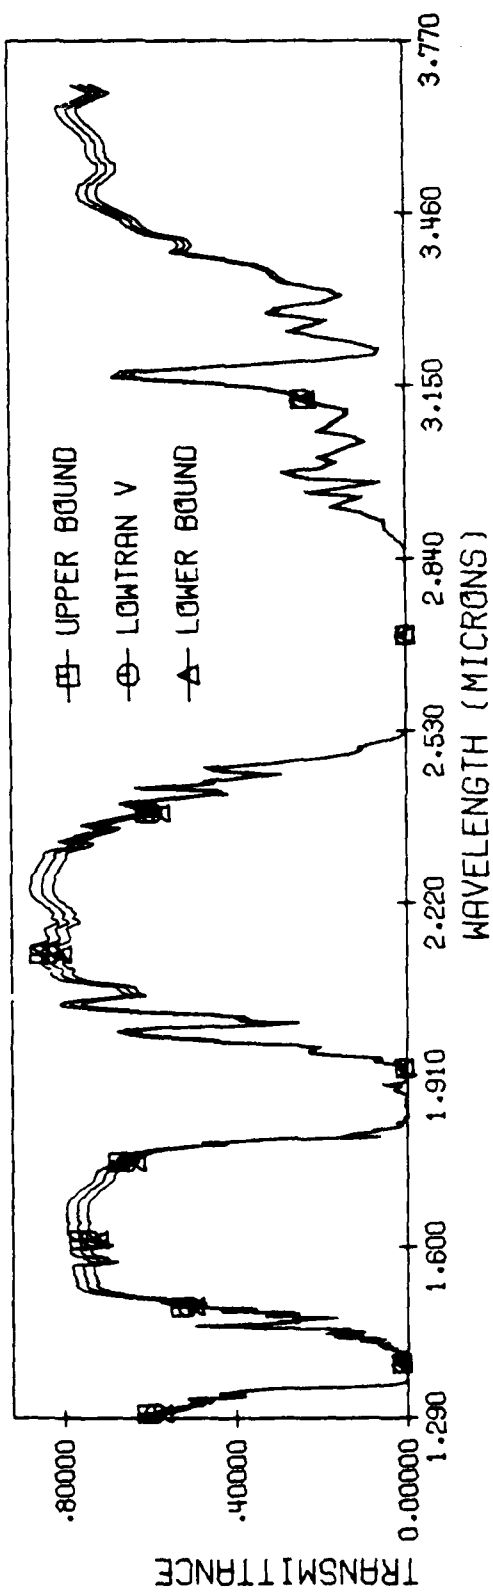


Fig. 3-3 Atmospheric transmittance predicted by the modified LOWTRAN V with upper bound and lower bound using 1962 U.S. standard atmospheric model and Rural aerosol model for a downward path at altitude from 200 m to 4 km with path of 5 km, visual range 5 km, and a finite aperture receiver of diameter 30 cm.

LOWTRAN V PREDICTIONS WITH VARIANCES


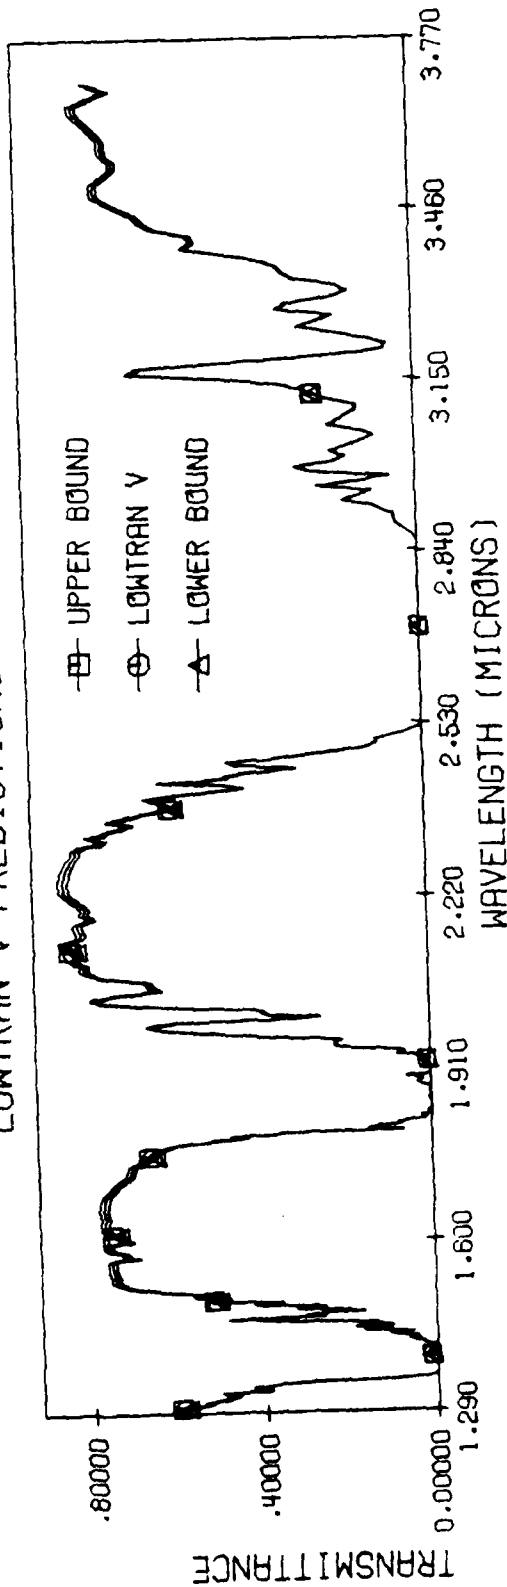


Fig. 3-4 Atmospheric transmittance predicted by the modified LOWTRAN V with upper bound and lower bound using 1962 U.S. standard model and Rural aerosol model for a 5 km upward path at altitude from 4 km to 200 m with visual range 5 km, and a 30 cm diameter aperture receiver.

APPENDIX A

Flow Chart of Subroutine VRANI

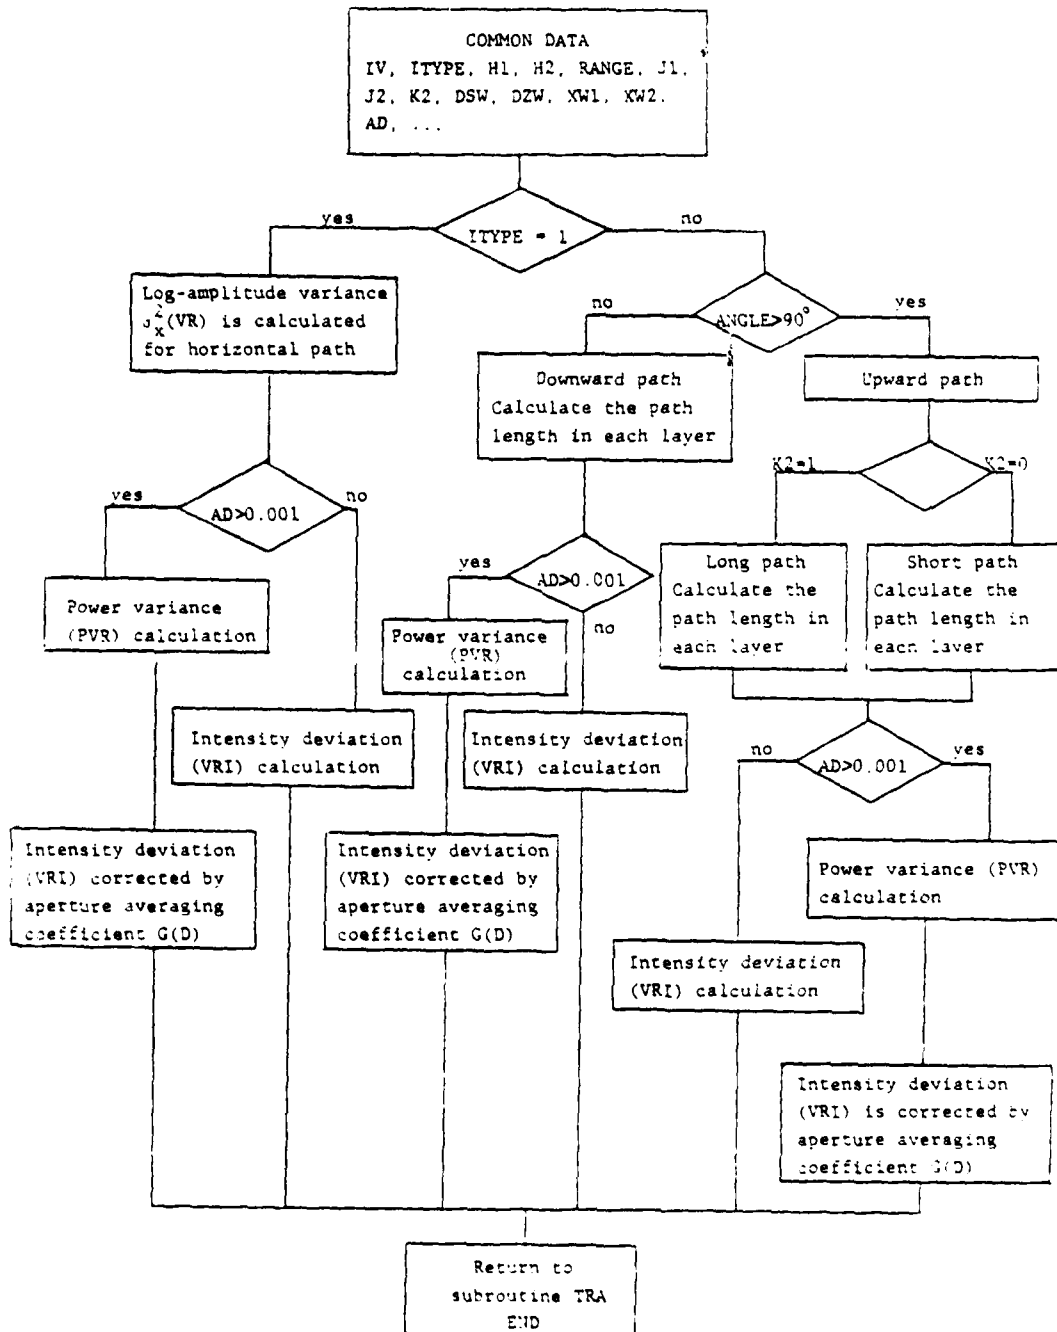

APPENDIX B

VRANI Symbols and Definitions

AD	Diameter of receiver aperture in meter (m).
ANGLE	Initial zenith angle in degree
BI	Covariance of intensity
BL	Normalized covariance of log-amplitude
BX	Covariance of log-amplitude
CN2	C_n^2 - structure constant of turbulence
DD	the ratio of the distance from point calculated to receiver over total path length.
DH	Height interval of slant path integration
DS	Distance from point calculated to receiver
DT	Same as DS, especially used in the downward long path calculation
DZW	Difference of height between two near layers
FR	Fresnel zone in meter (m)
GD	Aperture averaging coefficient
HMIN	The minimum height of a downward path
HW	Height corresponding to the point calculated
H1	Height of transmitter (and receiver for horizontal path)
H2	Height of receiver
IV	wavenumber in cm^{-1}
JMIN	the layer index of the minimum height for a downward path

RANGE Path length in kilometer (km)

VR Variance of log-amplitude

VRI Intensity deviation

PVR Power variance

DSW Path length in a layer

WH2 Height of receiver in meter (m)

WL Wavelength in meter (m)

WK $2\pi/\lambda$, wavenumber in m^{-1}

WRANGE Path length in meter (m)

WV Intensity variance without approximation

XW1 The lowest height of a given path in a given layer

XW2 The highest height of a given path in a given layer

APPENDIX C

Listing of Subroutine VRANI Program

```

SUBROUTINE VRANI(IV)
C
C THIS SUBROUTINE IS TO CALCULATE THE VARIANCE OF INTENSITY
C DUE TO TURBULENCE AND THE CALCULATED STANDARD DEVIATION CAN BE
C USED TO DEFINE HIGH BOUND AND LOW BOUND OF TRANSMITTANCE
C
COMMON /CARD1/ MODEL, IHAZE, ITYPE, LEN, JP, IM, M1, M2, M3, ML, IEMISS, RD
1 , TBOUND, ISEASN, IVULCN, VIS
COMMON /CARD2/ M1, M2, ANGLE, RANGE, BETA, MMIN, RE, AD
COMMON /CARD3/ V1, V2, DV, AVH, CO, CW, W(15), E(15), CA, PI
COMMON /CNTRL/ LENST, KMAX, M, IJ, J1, J2, JM IN, JEXTRA, IL, IKMAX, NLL, NP1
1, IFIND, NL, IKLO
COMMON /WANG/ K2, USW(34), DZ(34), XW1(34), XW2(34)
COMMON /VKAN/ VRI
DIMENSION WS(34)
MM=M1*1000.0
WRANGE=RANGE*1000.0
MM2=M2*1000.0
VR=0.0
CN2=0.0
PVR=0.0
WL=0.01/IV
FR=(WL*WRANGE)**0.5
WK=IV*100.*2.*PI
VK=WK**(.7/.6.)
W0=9.E-05*910**2.
IF(ITYPE.NE.1) GO TO 20

C
C VARIANCE CALCULATION FOR HORIZONTAL PATH
C
CN2=4.2E-14*MM**(-2./3.)*EXP(-MM/320.0)
IF(M1.GT.100.0) CN2=M.7
IF(MW.LE.10.0) CN2=0.77E-15
VH=0.31*CN2*WRANGE**(.11/.6.)
VR=VR+VK
VHI=1.-EXP(-2.*VR**0.5)
IF(AD.LT.W.001) GO TO 91
DU 18 I=1,100
Y=0.01*I
DY=AD*Y
IF(DY.GE.W.003) GO TO 11
BL=1.-12.3*DY**2.4/(FR**(.5./3.)*0.003**(.1./3.))
GO TO 17
11 XI=WK*DY**2.3/WRANGE
IF(DY.GE.FR) GO TO 12
BL=1.-2.36*XI**(.5/.6.)*1.71*XI-0.024*XI**2.0
GO TO 17
12 BL=0.0242*(YI/4.)***(.7/.6.)
17 CONTINUE
BX=BL*VR
BI=EXP(4.0*BX)-1.
PVR=PVR+BI*(ACOS(Y)-Y*(1.-Y**2.))**0.5)*Y*0.01
18 CONTINUE
PVR=PVR*16./PI
WV=EXP(4.0*PVR)-1.
GO=PVR/WV
VHI=VRI*GO**0.5
GO TO 91
20 IF(ANGLE.GT.90.0) GO TO 37

C
C VARIANCE CALCULATION FOR DOWNWARD PATH
C

```

```

AVR 001
AVR 002
AVR 003
AVR 004
AVR 005
AVR 006
AVR 007
AVR 008
AVR 009
AVR 010
AVR 011
AVR 012
AVR 013
AVR 014
AVR 015
AVR 016
AVR 017
AVR 018
AVR 019
AVR 020
AVR 021
AVR 022
AVR 023
AVR 024
AVR 025
AVR 026
AVR 027
AVR 028
AVR 029
AVR 030
AVR 031
AVR 032
AVR 033
AVR 034
AVR 035
AVR 036
AVR 037
AVR 038
AVR 039
AVR 040
AVR 041
AVR 042
AVR 043
AVR 044
AVR 045
AVR 046
AVR 047
AVR 048
AVR 049
AVR 050
AVR 051
AVR 052
AVR 053
AVR 054
AVR 055
AVR 056
AVR 057
AVR 058
AVR 059
AVR 060
AVR 061
AVR 062

```

```

00 35 K=1,10.1
DS=0.0
DX=0.0
Y=0.0,10.1
DY=40*Y
RF=0Y**2./4.
V=0.0
G=RF/40
00 34 I=J1,J2
WS(I)=DSW(I)/UZ*(I)
IF(XW1(I).LE.25.0) GO TO 21
IF(XW1(I).LE.50.0) GO TO 22
DM=000.0
GO TO 23
21 DM=20.0
GO TO 23
22 DM=100.0
23 IK=(XW2(I)-XW1(I))*1000.0/DM
IK=IK
H=XW1(I)*1000.0
00 33 J=1,IK
H=H*DM
IF(HH.GE.49000.0.AND.I TYPE.EQ.3) XW2(I)=100000.0
IF(HH.GE.49000.0) GO TO 34
CN2=4.2E-14*H**(-2./3.)*EXP(-HH/320.0)
V=VPR*0.5+CN2*(H*HANGE=US)**(5./6.)+DM*WS(I)
UZ=(H*HANGE=US)/H
R=RF/UZ
IF(UZ.LT.40) GO TO 27
IF(R.GE.0.5.AND.0.GE.0.5) GO TO 27
IF(K.LT.0.5.AND.0.LT.0.5) GO TO 28
G=DU**((5./6.)*(0.259+0.805*R+0.009*R**2.-0.0043*R**3.))-1.463*R**3.
=5./6.)
IF(G.LE.0.4) G=0.
GO TO 31
27 G=0.0
GO TO 31
24 G=DU**((5./6.)*(0.259+0.805*R+0.009*R**2.-0.0043*R**3.))-40**((5./6.)*
*(1.0+0.333*0.2347*G**2.+0.0445*G**3.))
IF(G.LE.0.4) G=0.0
31 HX=BX+G*CN2*DM*WS(I)
DS=US+DM*WS(I)
33 CONTINUE
DU=H*HANGE=DS
IF(DG.LE.0.) US=DS+DM*WS(I)
V=VPR*0.5+CN2*(H*HANGE=US)**(5./6.)*(XW2(I)*1000.-HH)*WS(I)
BX=DX+CN2*G*(XW2(I)*1000.-HH)*WS(I)
DS=US*(XW2(I)*1000.0-HH)*WS(I)
34 CONTINUE
IF(AD.LT.0.001) GO TO 36
BX=BX*2.117*HK**2.
BI=EXP(4.*PI)-1.
PV=PVPR+BI*(ACUS(Y)-Y*(1.-Y**2.))**0.5)*Y*0.01
35 CONTINUE
PV=PV*16./PI
36 V=V*V
VNI=1.-EXP(-2.*V**0.5)
IF(AD.LT.0.001) GO TO 91
V=EXP(4.*VNI)-1.
GV=PV/V
VNI=VNI+GV**0.5
GO TO 91

```

```

AVR 063
AVR 064
AVR 065
AVR 066
AVR 067
AVR 068
AVR 069
AVR 070
AVR 071
AVR 072
AVR 073
AVR 074
AVR 075
AVR 076
AVR 077
AVR 078
AVR 079
AVR 080
AVR 081
AVR 082
AVR 083
AVR 084
AVR 085
AVR 086
AVR 087
AVR 088
AVR 089
AVR 090
AVR 091
AVR 092
AVR 093
AVR 094
AVR 095
AVR 096
AVR 097
AVR 098
AVR 099
AVR 100
AVR 101
AVR 102
AVR 103
AVR 104
AVR 105
AVR 106
AVR 107
AVR 108
AVR 109
AVR 110
AVR 111
AVR 112
AVR 113
AVR 114
AVR 115
AVR 116
AVR 117
AVR 118
AVR 119
AVR 120
AVR 121
AVR 122
AVR 123
AVR 124

```

```

37 CONTINUE
      VARIANCE CALCULATION FOR UNRAID PATH
      DU 62 MW=1.100
      DS=0.0
      DT=0.0
      DX=0.0
      Y=0.01*MM
      DY=AU*Y
      QF=UY**2./4.
      V=0.0
      Q=RF/WO
      L1=J1
      JU 60 L=1,NL
      L1=L1-1
      WS(L1)=DS*(L1)/DZ*(L1)
      IF(XW1(L1).LE.25.0) GO TO 38
      IF(XW1(L1).LE.50.0) GO TO 39
      OM=400.0
      GU TO 40
38 OM=20.00
      GU TO 40
39 OM=100.00
40 WK=(XW1(L1)-XW2(L1))*1000.0/OM
      IA=IX
      MW=XW1(L1)*1000.0
      OU 57 J=1, I=
      MW=MM-OM
      CN2=4.2E-14*MM**(-2./3.)*EXP(-MW/320.0)
      V=V+0.5*CN2*(W/RANGE-0.5)**(5./6.)*OM**3(L1)
      DU=(W/RANGE-0.5)/WK
      R=RF/OU
      IF(OU.LT.WO) GO TO 51
      IF(K.GE.0.5.AND.O.GE.0.5) GO TO 51
      IF(K.LT.0.5.AND.O.LT.0.5) GO TO 52
      G1=OU**((5./6.)*(0.259+0.805*R+0.209*R**2.-0.0043*R**3.))-1.063*RF**
      *(5./6.)
      IF(O1.LE.0.) O1=0.
      GU TO 53
51 G1=0.0
      GU TO 53
52 G1=OU**((5./6.)*(0.259+0.805*R+0.209*R**2.-0.0043*R**3.))-0.0**((5./6.
      *)*(1.+0.2333*0.0.0347*0**2.+0.0045*0**3.))
      IF(O1.LE.0.0) G1=0.0
53 DX=DX+G1*CN2*OM**3(L1)
      OS=OS+OM**3(L1)
      IF(K2.EQ.0) GO TO 57
      IF(K2.EQ.1.AND.O2.LE.MW) GO TO 57
      V=V+0.5*CN2*OU**((5./6.)*OM**3(L1)
      DU=DU/W/RANGE
      R=RF/OU
      IF(OU.LT.WO) GO TO 54
      IF(K.GE.0.5.AND.O.GE.0.5) GO TO 54
      IF(K.LT.0.5.AND.O.LT.0.5) GO TO 55
      G2=OU**((5./6.)*(0.259+0.805*R+0.209*R**2.-0.0043*R**3.))-1.063*RF**
      *(5./6.)
      IF(O2.LE.0.) O2=0.
      GU TO 50
54 G2=0.0
      GU TO 50
55 G2=OU**((5./6.)*(0.259+0.805*R+0.209*R**2.-0.0043*R**3.))-0.0**((5./6.

```

```

AVR 3125
AVR 3126
AVR 3127
AVR 3128
AVR 3129
AVR 3130
AVR 3131
AVR 3132
AVR 3133
AVR 3134
AVR 3135
AVR 3136
AVR 3137
AVR 3138
AVR 3139
AVR 3140
AVR 3141
AVR 3142
AVR 3143
AVR 3144
AVR 3145
AVR 3146
AVR 3147
AVR 3148
AVR 3149
AVR 3150
AVR 3151
AVR 3152
AVR 3153
AVR 3154
AVR 3155
AVR 3156
AVR 3157
AVR 3158
AVR 3159
AVR 3160
AVR 3161
AVR 3162
AVR 3163
AVR 3164
AVR 3165
AVR 3166
AVR 3167
AVR 3168
AVR 3169
AVR 3170
AVR 3171
AVR 3172
AVR 3173
AVR 3174
AVR 3175
AVR 3176
AVR 3177
AVR 3178
AVR 3179
AVR 3180
AVR 3181
AVR 3182
AVR 3183
AVR 3184
AVR 3185
AVR 3186

```

)=(1,+M,0333=U=U,0347=J=2,+U,0445=U=3.)	AVR 0187
	IF(G2,LE,U,J) GOTO 56	AVR 0188
56	BX=BX+G2*CN2*UM*WS(L1)	AVR 0189
	DT=DT+UM*WS(L1)	AVR 0190
57	CONTINUE	AVR 0191
	UQ=WRANGE=DS	AVR 0192
	IF(UQ,LE,U,J) US=DS-UM*WS(L1)	AVR 0193
	VN=VR+U,5*CN2*(WRANGE-US)**(5,/A,)*(MW-XW2(L1)*1000,)*WS(L1)	AVR 0194
	BX=BX+G1*CN2*(MW-XW2(L1)*1000,)*WS(L1)	AVR 0195
	US=US*(MW-XW2(L1)*1000,)	AVR 0196
	IF(K2,EQ,U) GO TO 58	AVR 0197
	IF(K2,EQ,1,AND,MW2,LE,MW) GO TO 58	AVR 0198
	VN=VR+U,5*CN2*UT***(5,/b,)*(MW-XW2(L1)*1000,)*WS(L1)	AVR 0199
	BX=BX+G2*CN2*(MW-XW2(L1)*1000,)*WS(L1)	AVR 0200
	DT=DT*(MW-XW2(L1)*1000,)*WS(L1)	AVR 0201
58	CONTINUE	AVR 0202
	IF(K2,EQ,U,AND,U1,LE,J2) GO TO 61	AVR 0203
	IF(L1,LE,JMIN,AND,K2,EQ,1) GO TO 61	AVR 0204
60	CONTINUE	AVR 0205
61	CONTINUE	AVR 0206
	IF(AO,LT,0,JJ1) GO TO 90	AVR 0207
	RX=BX*2,117*WK**2,	AVR 0208
	DI=EXP(4,=RX)-1,	AVR 0209
	PVH=PVH+PI*(ACOS(Y)-Y*(1,-Y**2,)***0,5)*Y*U,01	AVR 0210
62	CONTINUE	AVR 0211
	PVH=PVH*16,/PI	AVR 0212
90	VR=VR+VK	AVR 0213
	VN=1,-EXP(-2,=VR**0,5)	AVR 0214
	IF(AO,LT,0,JJ1) GO TO 91	AVR 0215
	VV=EXP(4,=VK)-1,	AVR 0216
	GU=PVH/VV	AVR 0217
	VN[VN]=GU**0,5	AVR 0218
91	CONTINUE	AVR 0219
	RETURN	AVR 0220
	END	AVR 0221

References

1. F. X. Kneizys et. al., Atmospheric Transmittance/Radiance: Computer Code Lowtran 5, AFGL-TR-80-0067, Environmental Research Papers, No. 697.
2. V. I. Tatarskii, "The Effects of the Turbulent Atmosphere on Wave Propagation", NTIS, Springfield, 1971.
3. S. C. H. Wang, M. A. Plonus and C. F. Ouyang, "Irradiance scintillations of a partially coherent source in extremely strong turbulence", Applied Optics, Vol. 18, p. 113-1135, 1979.
4. M. A. Plonus, Proposal for Air Force Contract F19628-79-(-0068).
5. R. E. Hufnagel and N. R. Stanley, "Modulation transfer function associated with image transmission through turbulent Media", J. Opt. Soc. Am., Vol. 54, p. 52-61, 1964.
6. R. S. Lawrence and J. W. Strohbehn, "A survey of clear-air propagation effects relevant to optical communications", Proc. IEEE, Vol. 58, p. 1523-1545, 1970.
7. M. E. Gracheva, A. S. Gurvich, S. S. Kashkarov and V. V. Pokasov, "Similarity relations and their experimental verification for strong intensity fluctuations of laser radiation", in chap. 4 of Topics in Applied Physics Vol. 25, Editor by J. W. Strohbehn, Springer-Verlag, New York, 1978
8. J. R. Kerr, "Experiments on turbulence characteristics and multiwave-length scintillation phenomena", J. Opt. Soc. Am., Vol. 62, p. 1040-1049, 1972.