


AD-A113 417 FUGRO NATIONAL INC. LONG BEACH CA  
MX SITING INVESTIGATION. GEOTECHNICAL EVALUATION. VOLUME II. AR-ETC(U)  
NOV 79 F04704-78-C-0027  
UNCLASSIFIED FN-TR-2B-VOL-2 NL

142  
400-1000


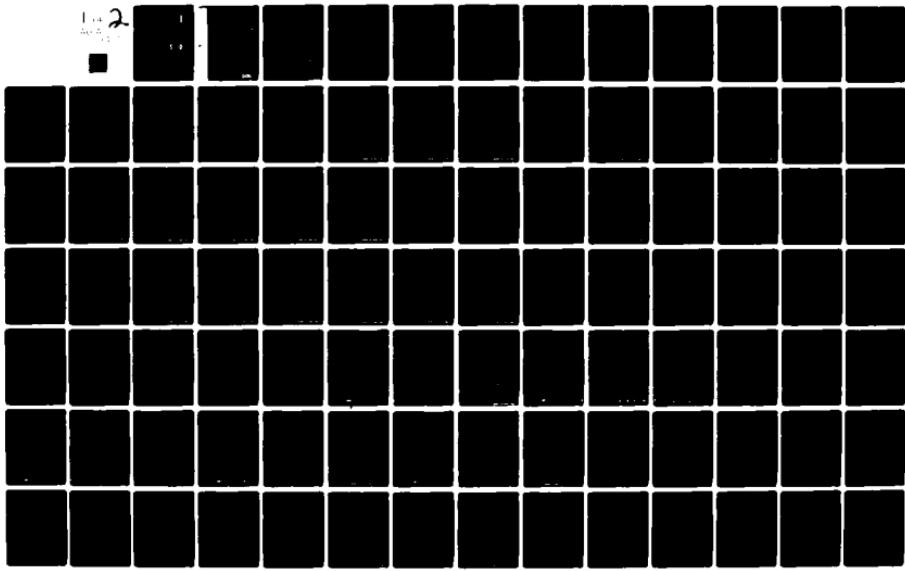


A  
34

PHOTOGRAPH THIS SHEET

AD-A113 417

DTIC ACCESSION NUMBER



FN-TR-28-Vol.II

Final  
15 Nov. 79

DOCUMENT IDENTIFICATION

Contract F04704-78-C-0027

This document has been approved  
for public release and sale; its  
distribution is unlimited.

DISTRIBUTION STATEMENT

ACCESSION FOR

NTIS GRAF

DTIC TAB

UNANNOUNCED

JUSTIFICATION

BY


DISTRIBUTION /  
AVAILABILITY CODES

DIST

AVAIL AND/OR SPECIAL

A

DISTRIBUTION STAMP

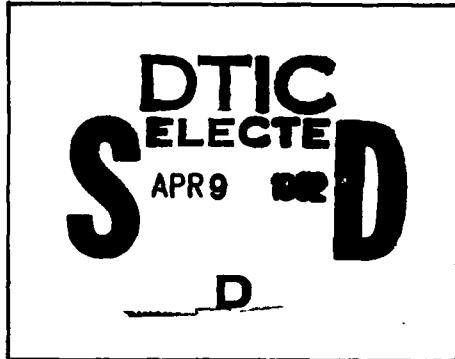

DATE ACCESSIONED

82 03 19 118

DATE RECEIVED IN DTIC

PHOTOGRAPH THIS SHEET AND RETURN TO DTIC-DDA-2

**MX SITING INVESTIGATION  
GEOTECHNICAL EVALUATION**

**AD A113417**

**VOLUME II  
ARIZONA  
VERIFICATION STUDIES, FY 79  
GEOTECHNICAL DATA  
BUTLER CDP, ARIZONA**

**PREPARED FOR  
SPACE AND MISSILE SYSTEMS ORGANIZATION (SAMSO)  
NORTON AIR FORCE BASE, CALIFORNIA**

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <b>FN TR 28-II</b>	2. GOVT ACCESSION NO. <b>AD-A213417</b>	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) <b>Volume II, Arizona, Verification Studies, FY 79, Geotechnical Data, Butler CDP, Arizona</b>	5. TYPE OF REPORT & PERIOD COVERED <b>Final</b>	
7. AUTHOR(s) <b>Fugro National, Inc.</b>	6. PERFORMING ORG. REPORT NUMBER <b>FN-TR-28-II</b>	
8. CONTRACT OR GRANT NUMBER(s) <b>FO4704-78-C-0027</b>		
9. PERFORMING ORGANIZATION NAME AND ADDRESS <b>ERTEC Western Inc (formerly Fugro National) P.O. BOX 7765 1000 Broadway Denver CO 80207</b>	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS <b>64312 F</b>	
11. CONTROLLING OFFICE NAME AND ADDRESS <b>U.S. Department of the Air Force Air Force Civil Engineer Systems Organization Kirtland Air Force Base (SAM 750)</b>	12. REPORT DATE <b>15 NOV 79</b>	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	13. NUMBER OF PAGES <b>13</b>	
	15. SECURITY CLASS. (of this report) <b>UNCLASSIFIED</b>	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) <b>Distribution Unlimited</b>		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) <b>Distribution Unlimited</b>		
18. SUPPLEMENTARY NOTES <b>Permit full visible reproduction</b>		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) <b>Geologic Station data, Ground Boring logs, Soil, Groun, soil, geology, electrical resistivity, trench log, sieve analysis, cone penetrometer, seismic resistivity</b>		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) <b>Geologic stations were established at selected locations throughout the CDP of which detailed descriptions of surficial basins deposits or rock were recorded.</b>		

**FN-TR-28-II**

**MX SITING INVESTIGATION  
GEOTECHNICAL EVALUATION  
VOLUME II, ARIZONA  
VERIFICATION STUDIES, FY 79  
GEOTECHNICAL DATA  
BUTLER CDP, ARIZONA**

**Prepared for:**

**U.S. Department of the Air Force  
Space and Missile Systems Organization (SAMSO)  
Norton Air Force Base, California 92409**

**Prepared by:**

**Fugro National, Inc.  
3777 Long Beach Boulevard  
Long Beach, California 90807**

**15 November 1979**

VOLUME II  
GEOTECHNICAL DATA, BUTLER CDP

TABLE OF CONTENTS

- 1.0 GEOLOGIC STATION DATA
- 2.0 GROUND-WATER DATA
- 3.0 SEISMIC REFRACTION DATA
- 4.0 ELECTRICAL RESISTIVITY DATA
- 5.0 GRAVITY DATA
- 6.0 BORING LOGS
- 7.0 TRENCH AND TEST PIT LOGS
- 8.0 SURFICIAL SAMPLE LOGS
- 9.0 LABORATORY TEST RESULTS

DRAWINGS IN POCKET

- 1 ACTIVITY LOCATION MAP
- 2 CONE PENETROMETER TEST RESULTS

**SECTION 1.0**  
**GEOLOGIC STATION DATA**

EXPLANATIONS OF GEOLOGIC STATION DATA

Geologic stations were established at selected locations throughout the CDP at which detailed descriptions of surficial basin-fill deposits or rock were recorded. Locations of all geologic stations are shown in Drawing 1, Activity Location Map. All data taken on surficial basin-fill units at these stations are listed in Table 1-1 and an explanation of the column headings in the table is given below. At stations where rock descriptions were made, only geologic unit designations are listed. A general explanation of all geologic unit symbols used in Verification Studies is included at the end of this section.

Column Heading  
Table 1-1Explanation

Station Number	Geologic stations are numbered sequentially. Where more than one geologic field team worked in a CDP, stations made by each team are differentiated with a letter (A, B, or C) following the station number.
Geologic Unit	Generic geologic unit only, i.e. the grain-size designation (f, s, g, c) is omitted from surficial basin-fill units. The letter B in the unit designation indicates a buried deposit not exposed at the surface.
MPS MM	Average maximum particle size in millimeters.
Grain Size (%B, %C, %G, %S, %F)	Estimated particle size distribution using the Unified Soil Classification System. Percentages of boulders (%B) and cobbles (%C) are based on the entire deposit, whereas percentages of gravel (%G), sand (%S) and fines (%F) are taken only on the fraction composed of particles less than 3 inches (76 mm) in diameter.
USCS	Soil class according to the Unified Soil Classification System.

Munsell Color	Soil color based on Munsell Soil Color Chart.
Source Rock Types(s)	Rock types of coarse clasts listed in order of abundance.
* Physical Properties	Data listed in columns 6 through 15 address specific soil properties. These are listed below in parentheses following the column heading number and are also listed at the bottom of Table 1-1. Data are coded with each numerical entry referring to a specific soil condition as listed below.
6 (Grain Shape)	1) Angular, 2) Subangular, 3) Subrounded, 4) Rounded, 5) Well rounded
7 (Moisture Content)	1) Dry, 2) Moist, 3) Wet
8 (Plasticity of Fines)	1) None, 2) Low, 3) Medium, 4) High
9 (Consistency)	Coarse grained: 1) Very Loose, 2) Loose, 3) Medium Dense, 4) Dense, 5) Very Dense, Fine grained: 1) Soft, 2) Firm, 3) Stiff, 4) Hard
10 (Structure)	1) Stratified Tabular, 2) Stratified Other (lensed, cross bedded, discontinuous beds), 3) Nonstratified
11 (Cementation Induration)	1) None, 2) Weak, 3) Moderate, 4) Strong
12 (Depth to Cemented Layers)	Depth to layer (in centimeters) exhibiting cementation induration described in Column 11 (above)
13 (Weathering of clasts)	1) Fresh, 2) Slight, 3) Moderate, 4) Very
14 (Soil Profile Development)	1) None (A-C profile), 2) Poor (incipient B-horizon), 3) Well (prominent B-horizon)
15 (Caliche Development)	1) Stage I, 2) Stage II, 3) Stage III, 4) Stage IV, 5) None

**Drainage**

<b>DP (M)</b>	<b>Average depth of drainages (in meters)</b>
<b>WD (M)</b>	<b>Average width of drainages (in meters)</b>
<b>Slope (%)</b>	<b>Average slope of ground surface (in percent grade)</b>
<b>Sample</b>	<b>Number of samples taken</b>

GENERALIZED GEOLOGIC UNITSExplanation

## Surficial Basin-fill Units

- A1 Younger Fluvial Deposits - Major modern stream channel and flood-plain deposits.
- A2 Older Fluvial Deposits - Older incised stream channel and flood-plain deposits in elevated terraces bordering major modern drainages.
- A3 Eolian Deposits - Wind-blown deposits of sand occurring as either thin sheets (A3s) or dunes (A3d).
- A4 Playa and Lacustrine Deposits - Deposits occurring in modern, active playas (A4) or in either inactive playas or older lake beds and abandoned shorelines associated with extinct lakes (A4o).
- A5 Alluvial Fan Deposits - Alluvial deposits consisting of debris flow and water-laid alluvium near mountain fronts, grading into predominantly water-laid alluvium deposited in shifting distributary channels near the basin center. Younger (A5y), intermediate (A5i), and older (A5o) alluvial fans are differentiated by surface soil development, terrain conditions, and present depositional/erosional environment.

Grain sizes of these deposits (except A3 deposits, which are exclusively sandy) are indicated by a single letter (f, s, g, or c) following the geologic unit symbol. These letters indicate the predominant grain size and range of soil types according to the Unified Soil Classification System:

f - fine-grained (ML, CL, MH, CH)

s - sands (SP, SW, SM, SC)

g - gravels (GP, GW, GM, GC)

c - coarse grained with greater than 30 percent boulders and cobbles (generally GP, GW, GM, GC)

ROCK UNITS

- I Igneous (undifferentiated). Rocks formed by solidification of a molten or partially molten mass.
- I1 Intrusive - Plutonic rocks formed by solidification of molten material beneath the surface (e.g., granite, granodiorite, diorite, gabbro).
- I2 Extrusive (intermediate and acidic) - Volcanic rocks of intermediate and acidic composition formed by solidification of molten material at or near the surface, (e.g., rhyolite, latite, dacite, andesite).
- I3 Extrusive (basic) - Volcanic rocks of basic composition, generally formed by solidification of molten materials at or near the surface (e.g., basalt).
- I4 Extrusive (pyroclastic) - Rocks formed by accumulation of volcanic ejecta (e.g., ash, tuff, welded tuff, agglomerate).
- S Sedimentary (undifferentiated) - Rocks formed by accumulation of clastic solids, organic solids and/or chemically precipitated minerals.
  - S1 Arenaceous and/or Siliceous Rocks - Composed of sand size particles (e.g., sandstone, orthoquartzite) or of cryptocrystalline silica (e.g., opal, chert).
  - S2 Carbonate Rocks - Composed predominantly of calcium carbonate detritus or chemical precipitates (e.g., limestone, dolomite, chalk).
  - S3 Argillaceous Rocks - Composed of clay and silt-sized particles (e.g., siltstone, shale, claystone).
  - S4 Evaporite Rocks - Precipitated from solution as a result of evaporation (e.g., halite, gypsum, anhydrite, sylvite).
  - S5 Coarse Clastic Rocks - Composed of gravel sized or larger clasts (e.g., conglomerate, breccia).
- M Metamorphic (undifferentiated) - Rocks formed through recrystallization in the solid state of preexisting rocks by heat and pressure (e.g., gneiss, schist, hornfels, metaquartzite).



**SECTION 2.0**  
**GROUND WATER DATA**

EXPLANATIONS OF GROUND-WATER DATA

Existing ground-water data in Butler CDP were collected from all available sources. These data were updated where possible from measurements taken during Fugro field operations, and all data are shown in Table 2-1. Locations of water wells and boreholes in which water-level measurements were available are shown in Drawing 1. Well numbers listed in Column 1 (Table 2-1) refer to well locations in Drawing 1. Actual well numbers giving location according to the Bureau of Land Management Land Survey System are shown in Column 2.

Water levels generally refer to the static ground-water table in the unconfined basin-fill aquifer. Perched conditions or levels in artesian aquifers are noted where known.

WELL NO.	WELL LOCATION NUMBER*	ELEVATION OF GROUND SURFACE - FEET (METERS) ABOVE M.S.L.	DEPTH OF WELL - FEET (METERS)	WATER LEVEL			REFERENCES**/ REMARKS
				DEPTH BELOW GROUND SURFACE - FEET (METERS)	DATE MEASURED	ELEVATION - FEET (METERS) ABOVE M.S.L.	
W1	(B-9-11) 30dcb	2380 (725)	65 (20)	36 (11)	1975	2344 (714)	3,4
W2	(B-8-12) 6aca	2010 (613)	-	735 (224)	-	1275 (389)	5
W3	(B-8-12) 23bcd	3300 (1006)	830 (253)	740 (226)	1975	2560 (730)	4,5
W4	(B-8-13) 4ddd	1790 (546)	1000 (305)	530 (162)	1974	1260 (384)	4,5
W5	(B-8-13) 20ccc	1730 (527)	1350 (411)	-	-	-	2
W6	(B-8-14) 20dab	1522 (464)	545 (166)	244 (74)	1975	1278 (390)	4,5
W7	(B-8-14) 23daa	1620 (494)	730 (222)	340 (104)	1976	1280 (390)	4
W8	(B-8-14) 23dda	1618 (493)	1000 (305)	343 (104)	1977	1275 (389)	4,5
W9	(B-8-14) 25cba	1645 (501)	1500 (457)	368 (112)	1975	1277 (389)	4,5
W10	(B-7-9) 2ddc	1425 (434)	552 (168)	158 (48)	1978	1267 (386)	4,5
W11	(B-7-15) 9ddd	1365 (416)	145 (44)	95 (29)	1975	1270 (387)	4,5
W12	(B-7-15) 10aac	1395 (425)	680 (207)	-	-	-	2
W13	(B-7-15) 11ddd	1444 (440)	1002 (305)	170 (52)	1975	1274 (388)	4,5
W14	(B-7-15) 12dad	1490 (454)	680 (207)	216 (66)	1975	1274 (388)	4
W15	(B-7-15) 21bab	1345 (410)	202 (62)	77 (23)	1967	1268 (386)	1,4

\*Gila and Salt River Baseline and Meridian

## \*\*References

- 1) Briggs (1969)
- 2) U.S. Bureau of Reclamation (1978)
- 3) U.S. Geological Survey (1975)
- 4) U.S. Geological Survey (1978)
- 5) Wilkins and Webb (1976)

NOTE: All wells tap unconfined alluvial aquifers except where noted. Where published data are lacking or inaccurate, ground surface elevations are taken from topographic maps.

GROUND WATER DATA  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSOTABLE  
2-1

FUGRO NATIONAL, INC.

**SECTION 3.0**  
**SEISMIC REFRACTION DATA**

EXPLANATIONS OF SEISMIC REFRACTION DATA

Each figure shows seismic wave travel times plotted versus surface distance between the energy source (shot) and the detector (geophone) for a single seismic line. Distances are measured along the line from geophone number 1 which is designated as zero distance. Distances to the right (on the paper) of geophone 1 are positive. The direction arrow gives the approximate direction of the geophone array from geophone 1 to geophone 24.


Travel Time Versus Distance Graph (Upper Half of Figure)

This is a travel time versus distance graph. The abscissa represents distance; the ordinate, time. The six vertical lines represent the locations of shots (designated as F, G, H, I, J, and K). The symbol, X, denotes travel times at geophones that were located to the right of a shot. The symbol, O, denotes travel times that were located to the left of shots.


Velocity Cross Section (Lower Half of Figure)

This is an interpreted velocity cross section beneath the seismic line. The top line represents the ground-surface profile. The short vertical lines crossing the top line mark the geophone positions. The depth scale is plotted relative to a point on the line which was arbitrarily chosen as "zero elevation" at the time the line was surveyed. The additional lines across the cross section represent the interpreted boundaries between layers of material with different compressional wave velocities. These boundaries are commonly called "refractors". The velocity interpreted to be representative of each layer is shown.


FN-TR-28-11

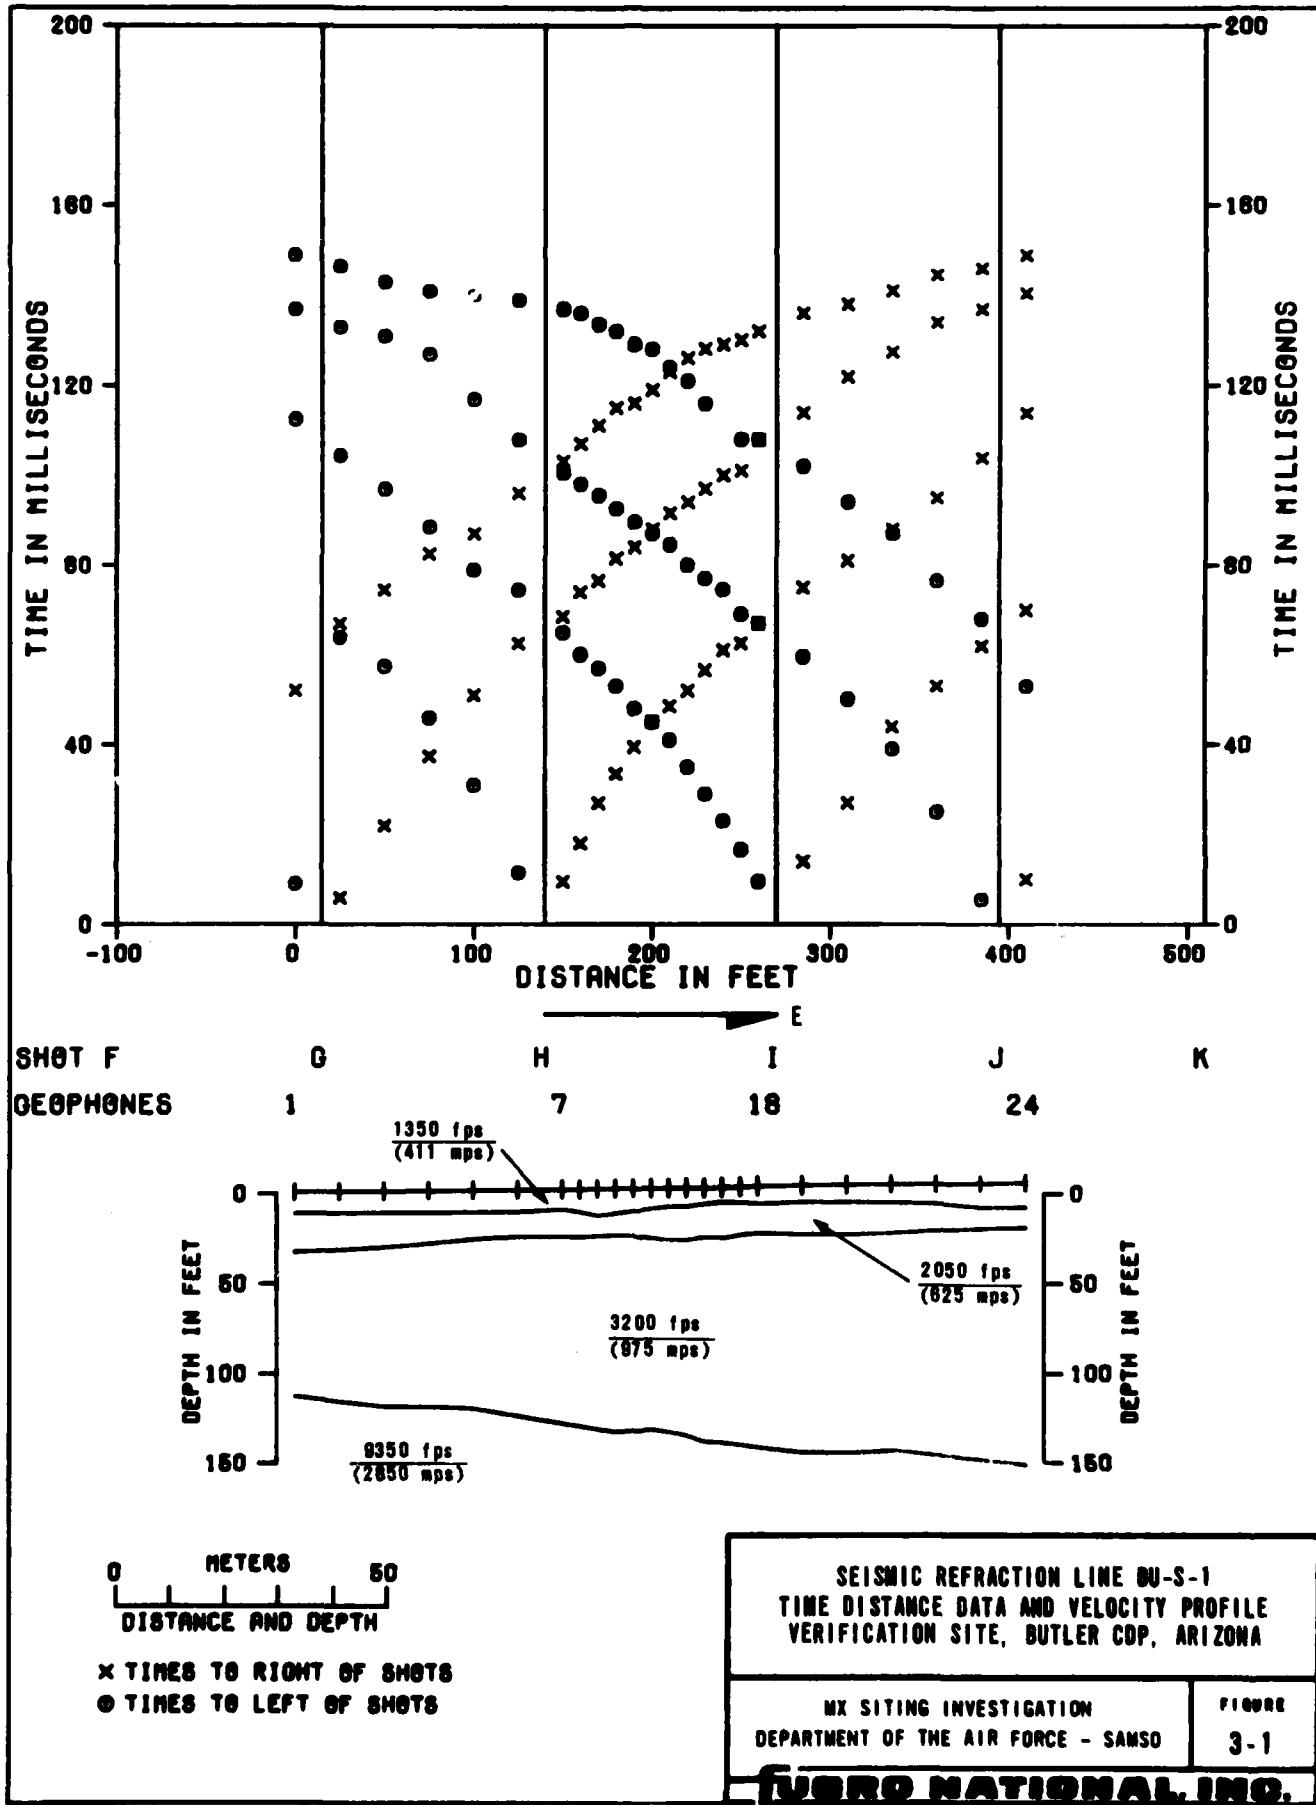

FN-TR-28-11

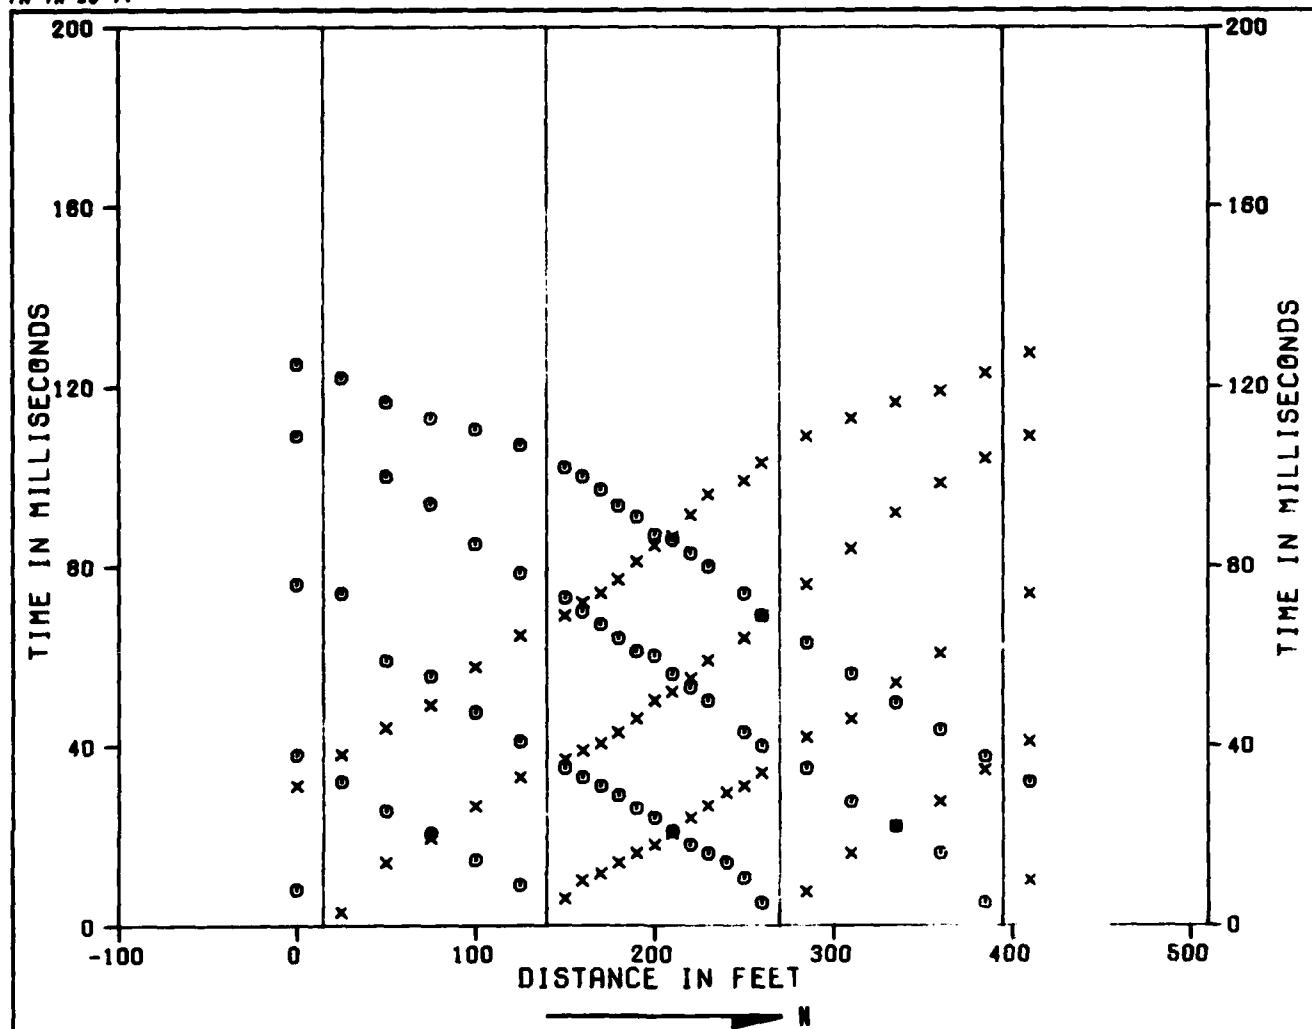

SHOT F                    G                    H                    I                    J                    K  
GEOFONNES      1                    7                    18                    24

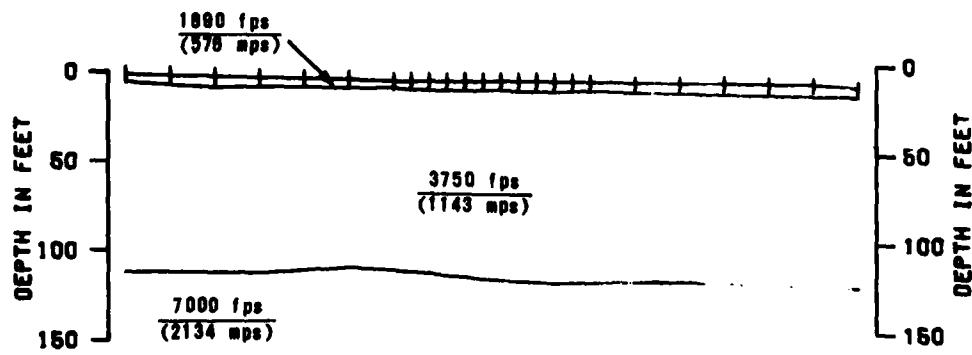

0                    METERS                    50  
DISTANCE AND DEPTH

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS

SEISMIC REFRACTION LINE BU-S-3  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO


FIGURE  
3-3

FUSCO NATIONAL INC.


10 AUG 78

FN-TR-28-11

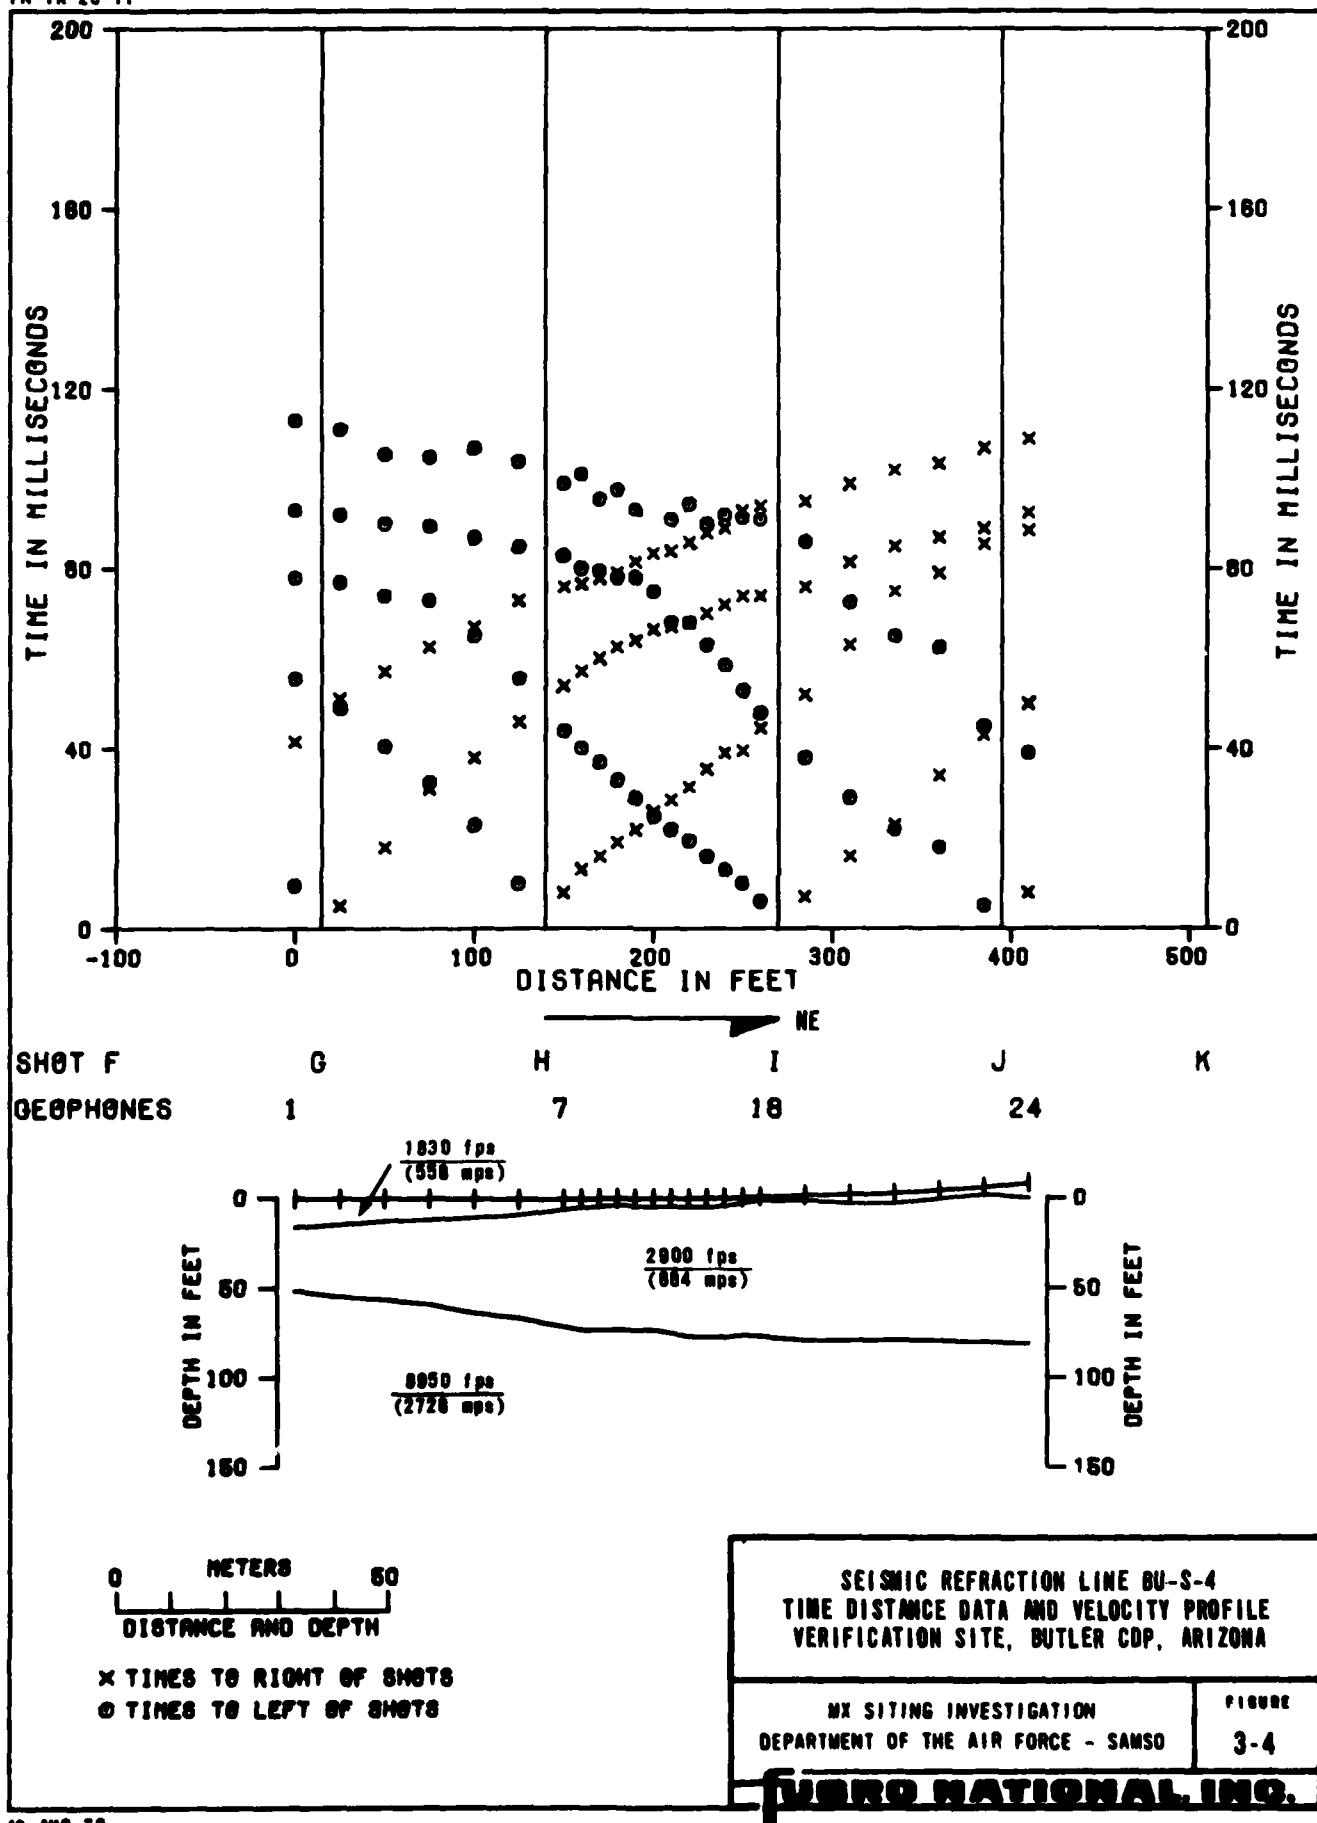

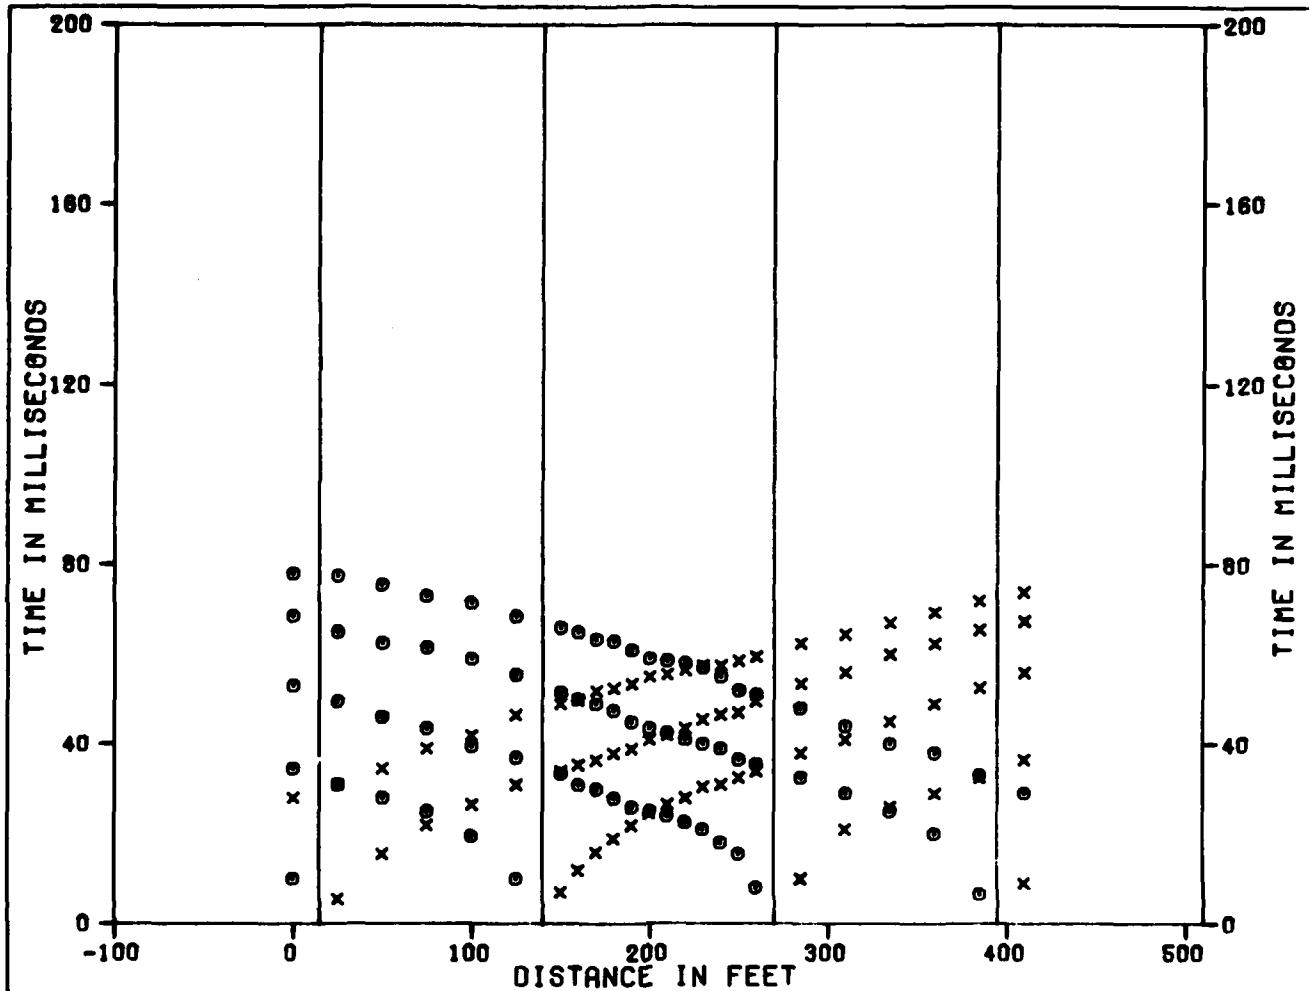

SHOT F                    G                    H                    I                    J                    K  
GEOFONES      1              7              18              24

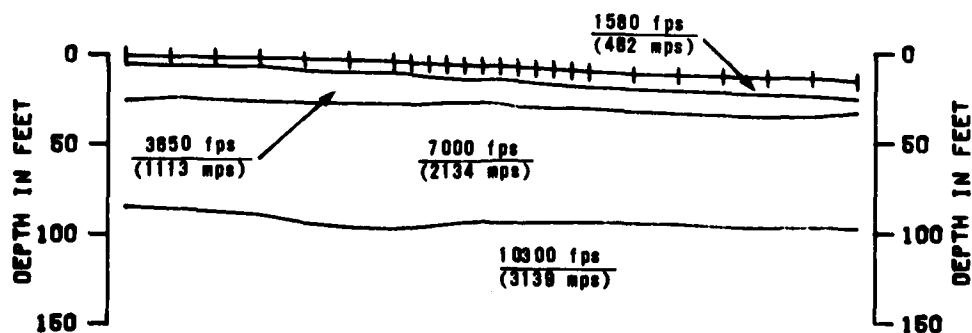

0                    METERS                    60  
DISTANCE AND DEPTH

$\times$  TIMES TO RIGHT OF SHOTS  
 $\circ$  TIMES TO LEFT OF SHOTS


SEISMIC REFRACTION LINE BU-S-5  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER COP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO


FIGURE  
3-5

FUSERO NATIONAL, INC.

FN-TR-28-11

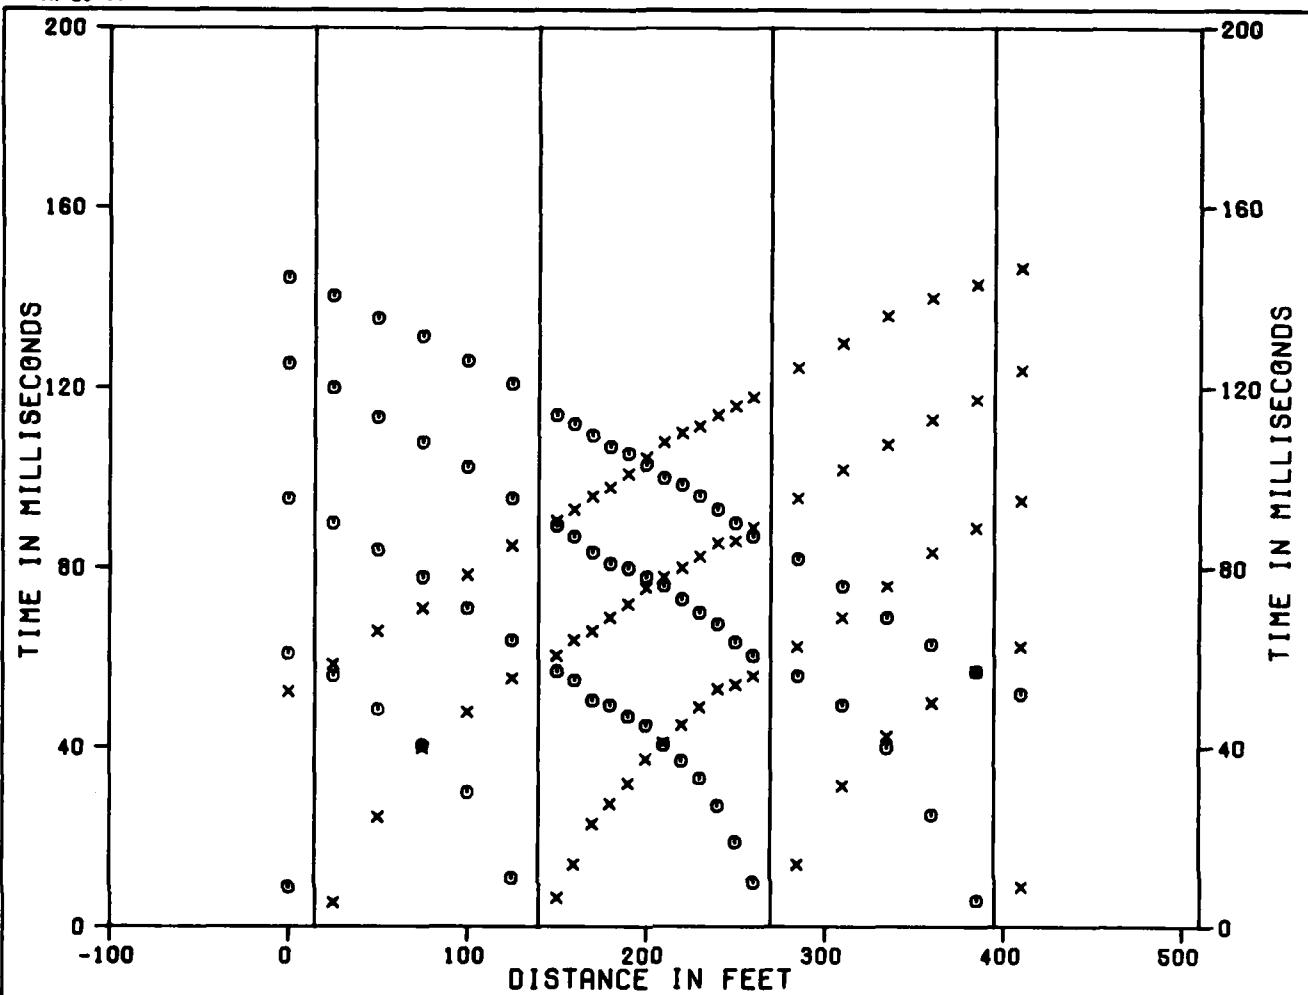

SHOT F                    G                    H                    I                    J                    K  
GEOFONES                1                    7                    18                    24

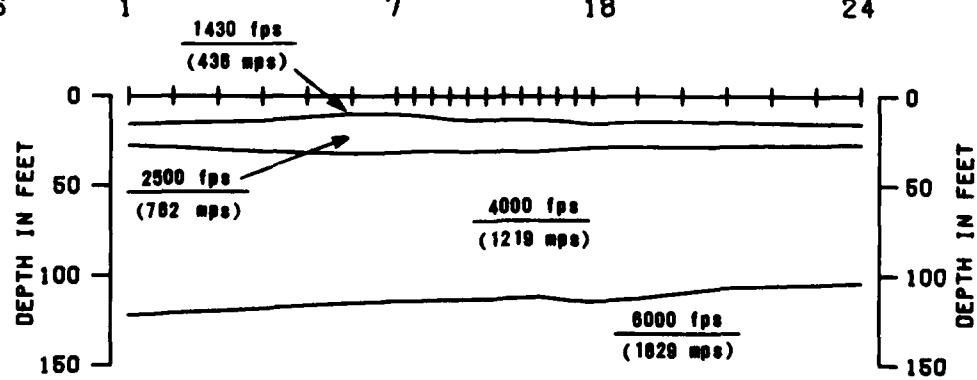

0                    METERS                    50  
DISTANCE AND DEPTH

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS


SEISMIC REFRACTION LINE BU-S-8  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-6

FUSCO NATIONAL INC.


FN-TR-28-11

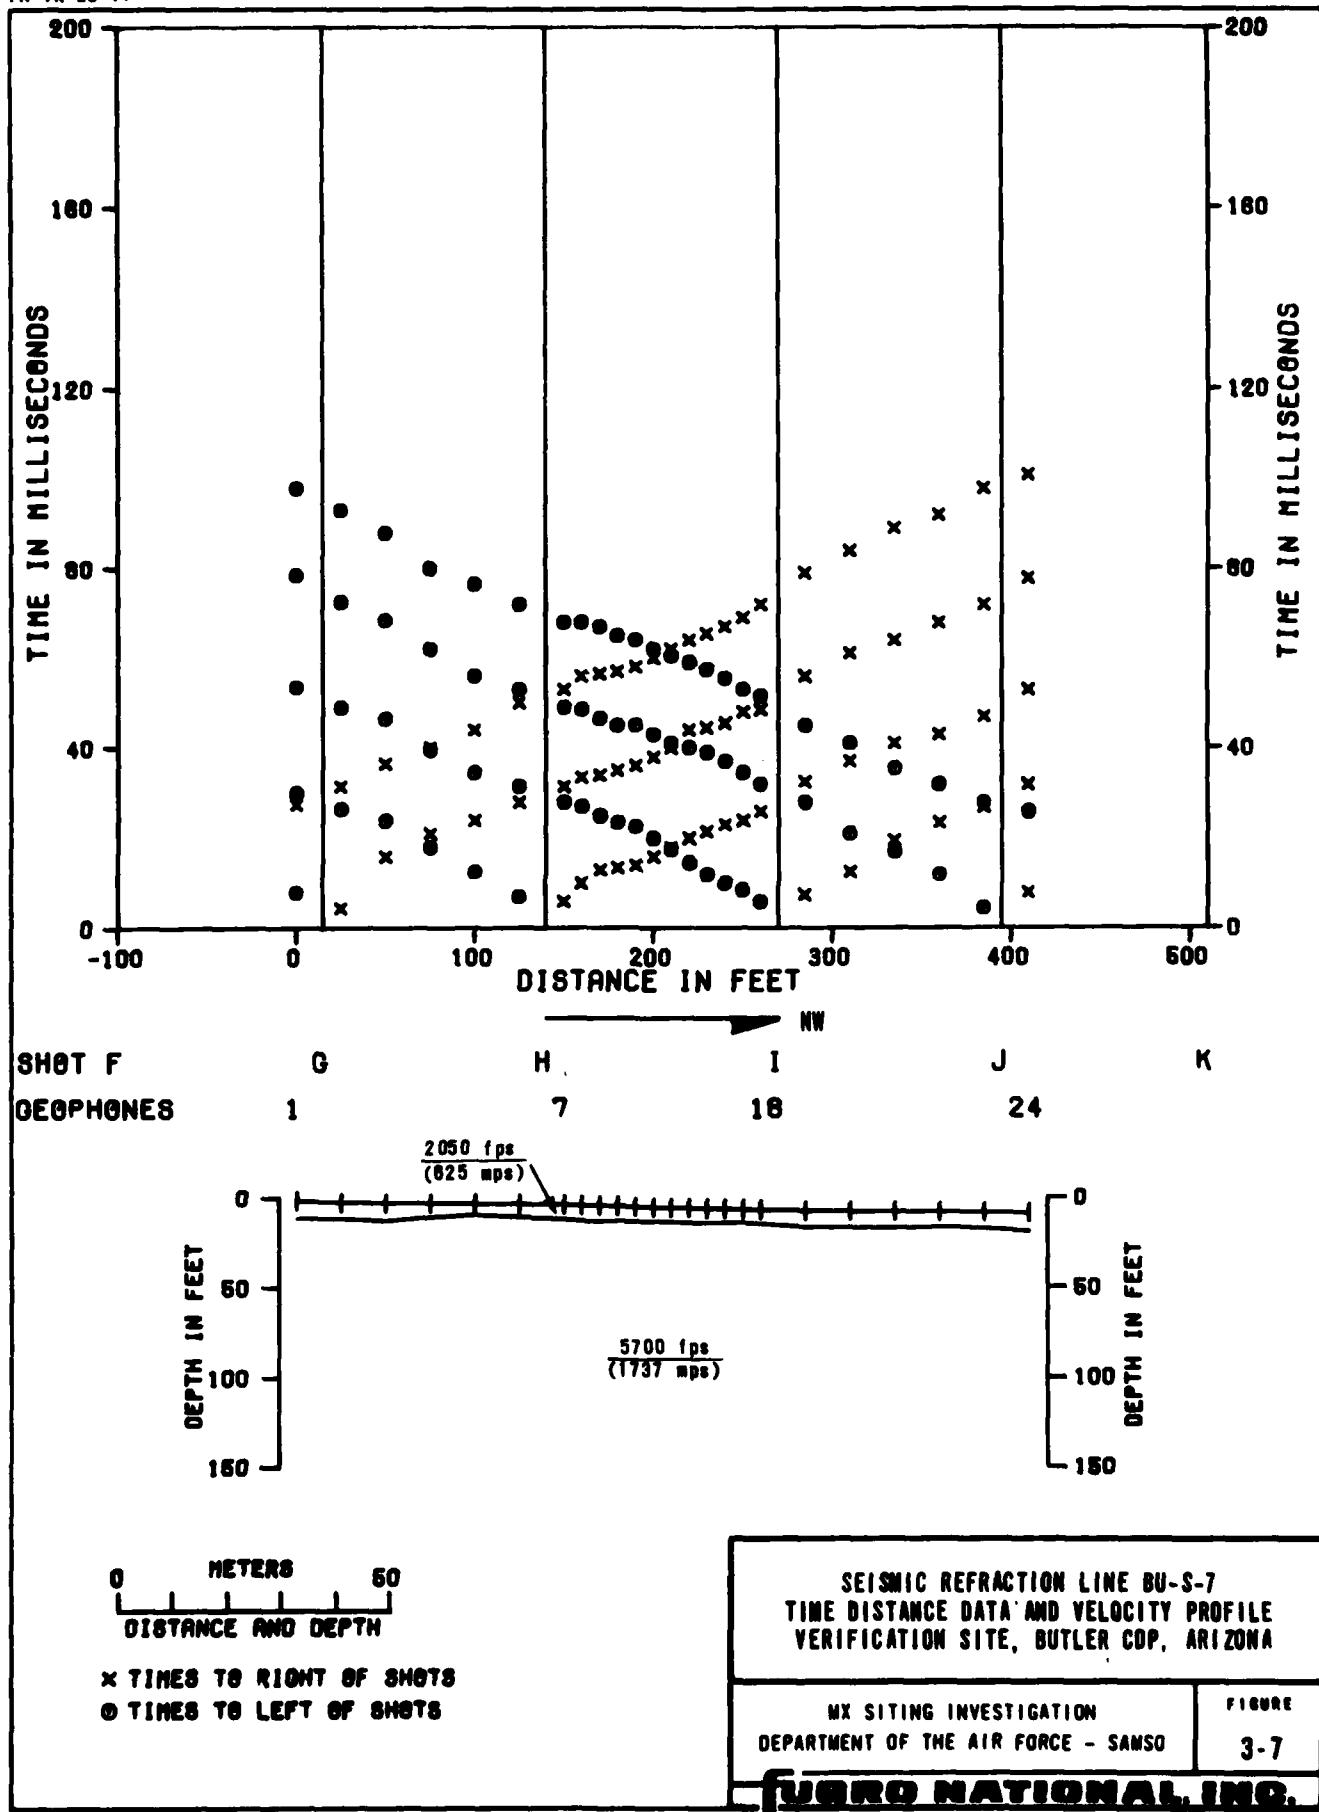

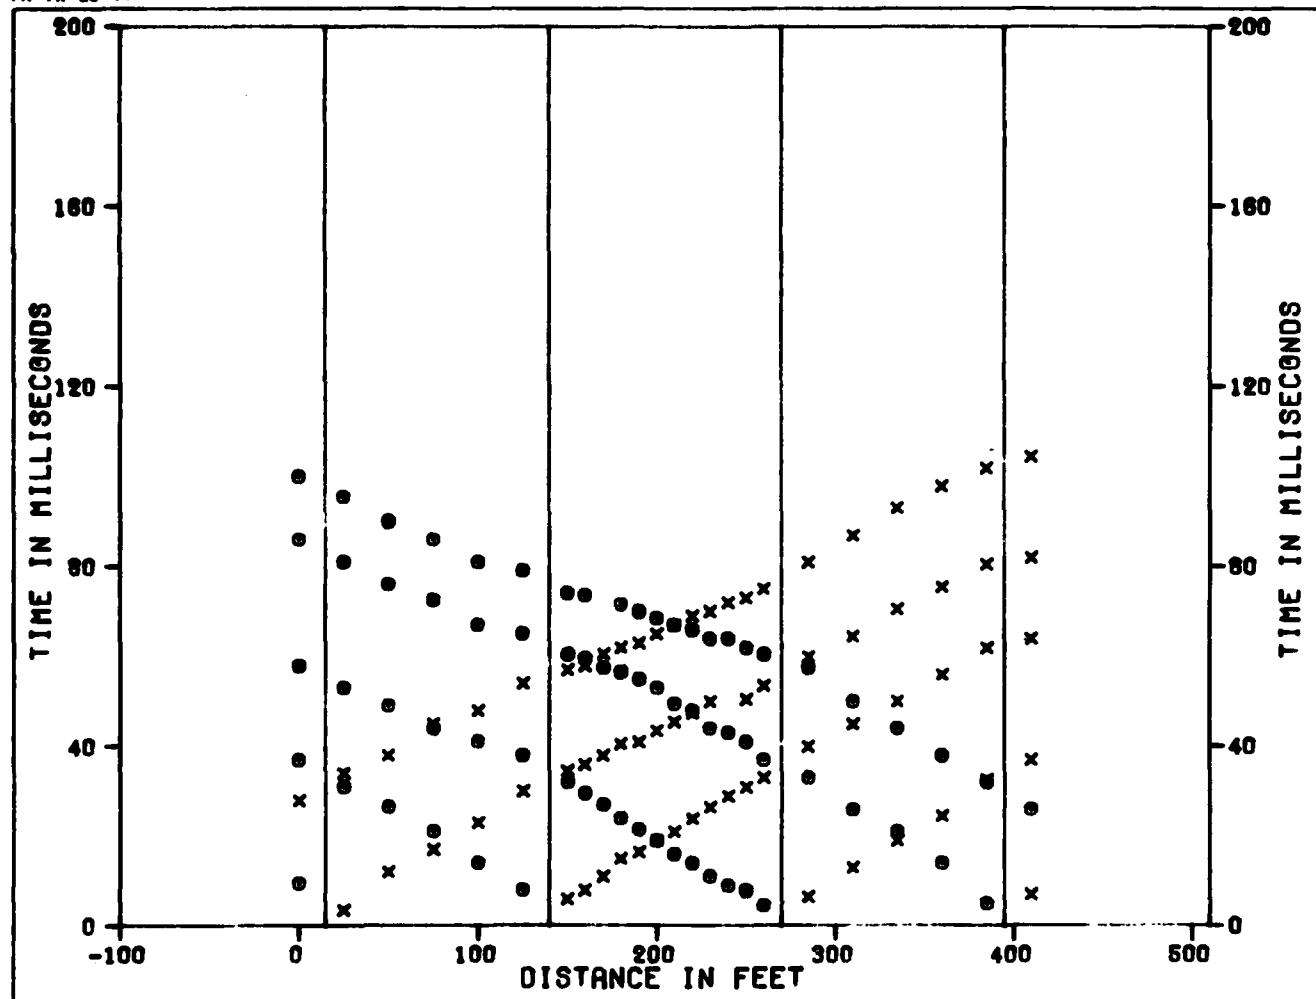

SHOT F  
GEOPHONES

G H I J K  
1 7 18 24

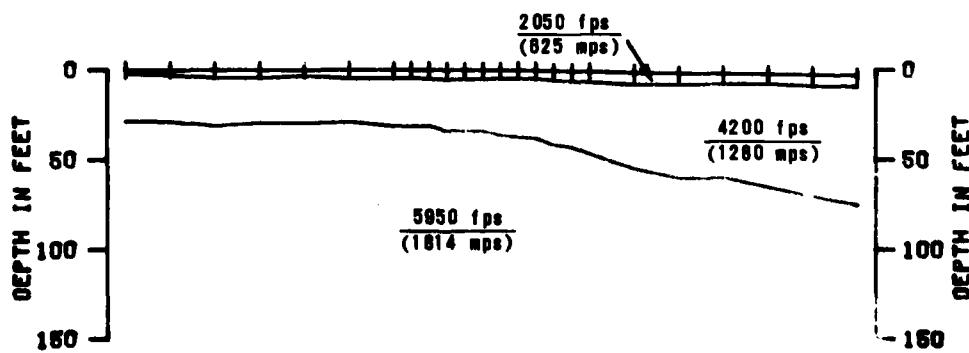

0 METERS 50  
DISTANCE AND DEPTH

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS


10 AUG 78

SEISMIC REFRACTION LINE BU-S-8  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SANJO

FIGURE  
3-8

FUGRO NATIONAL INC.

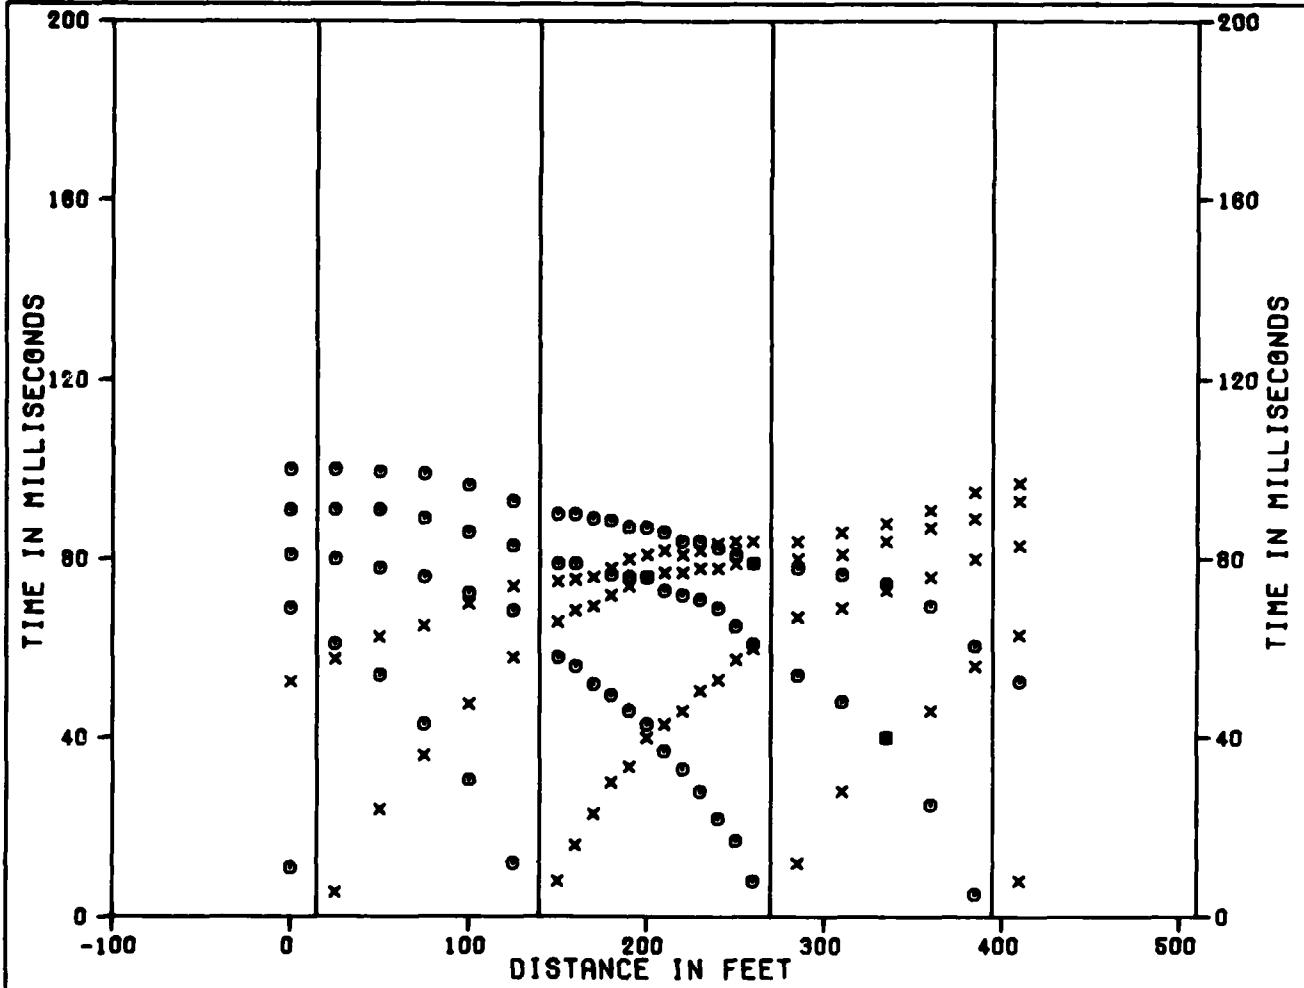

SHOT F                    G                    H                    I                    J                    K  
GEOFONES              1                    7                    18                    24

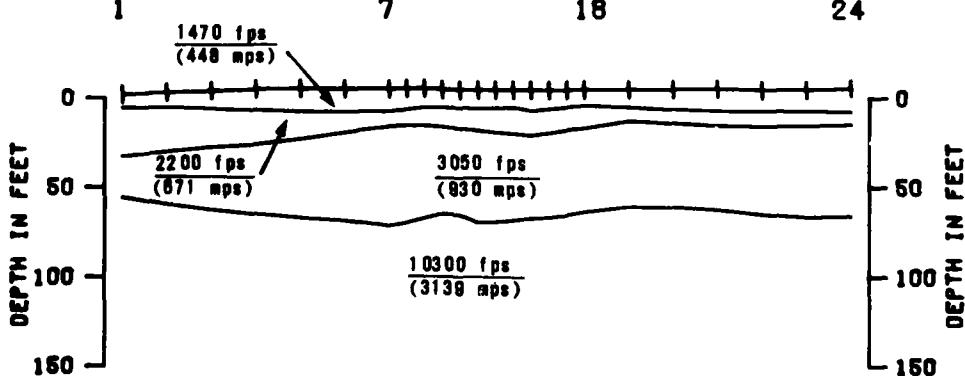

0                    METERS                    50  
DISTANCE AND DEPTH

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS


SEISMIC REFRACTION LINE BU-S-9  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-9

FUGRO NATIONAL, INC.

FN-TR-28-11

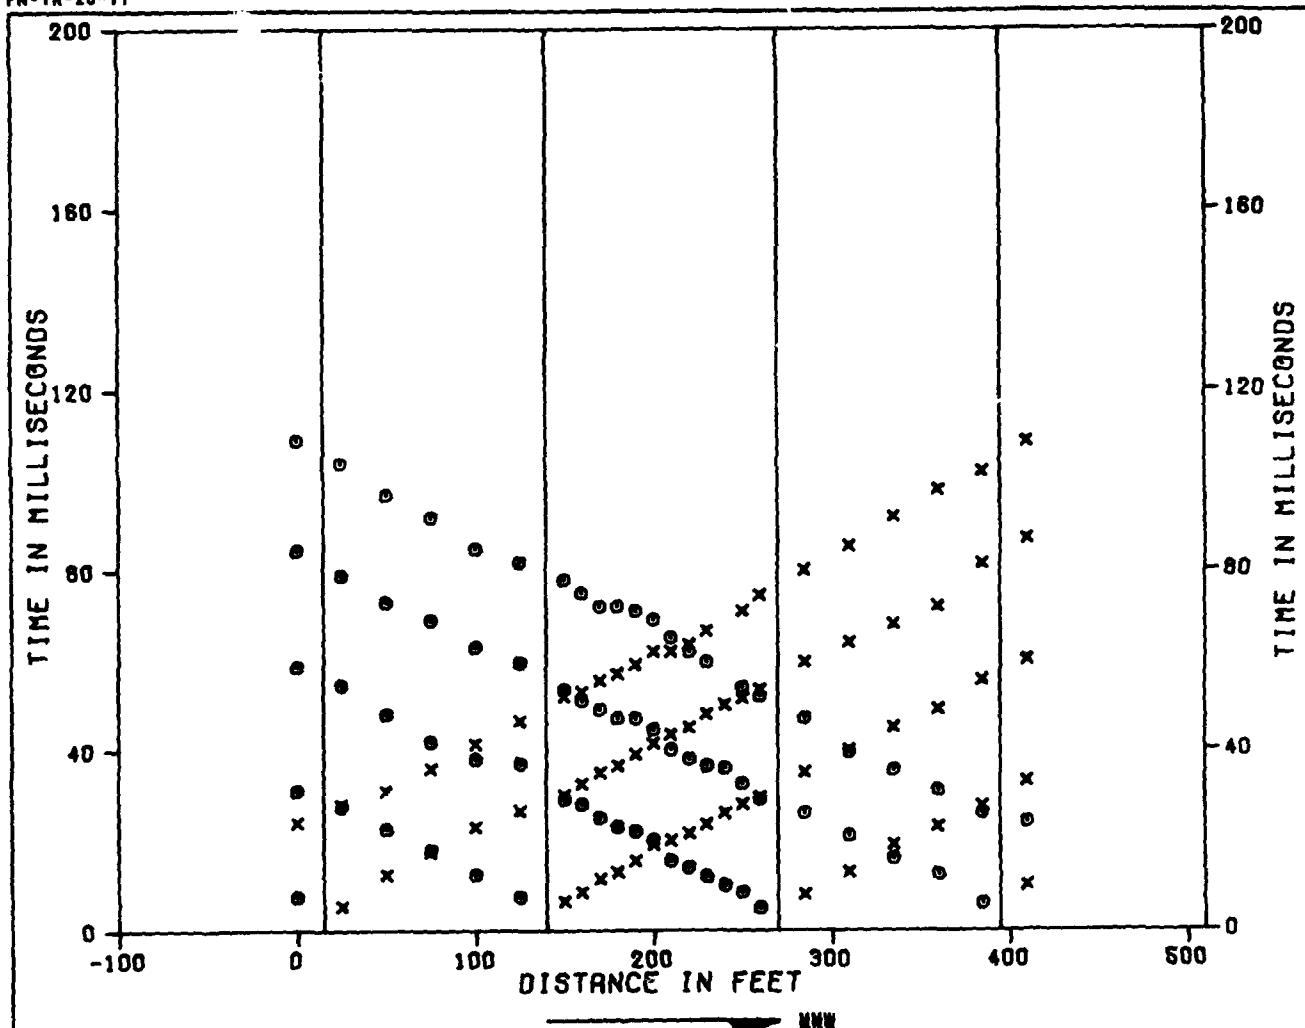

SHOT F

G

H

I

J

K



GEOPHONES

1

7

18

24

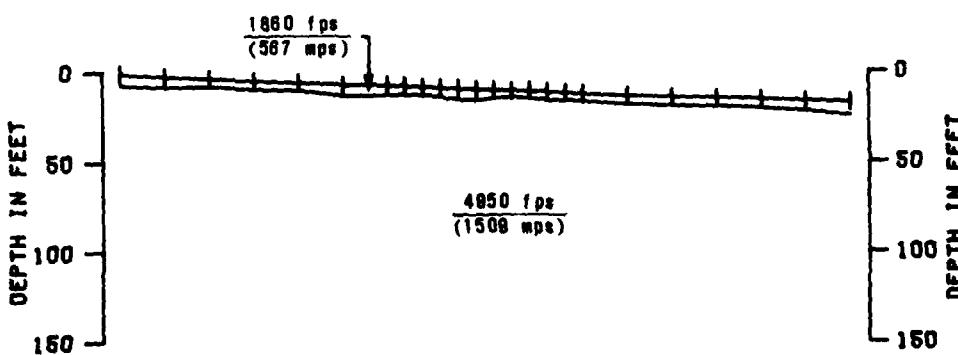

X TIMES TO RIGHT OF SHOTS  
O TIMES TO LEFT OF SHOTS

10 AUG 78


SEISMIC REFRACTION LINE BU-S-10  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO


FIGURE  
3-10

FUGRO NATIONAL INC.

FN-TR-28-11

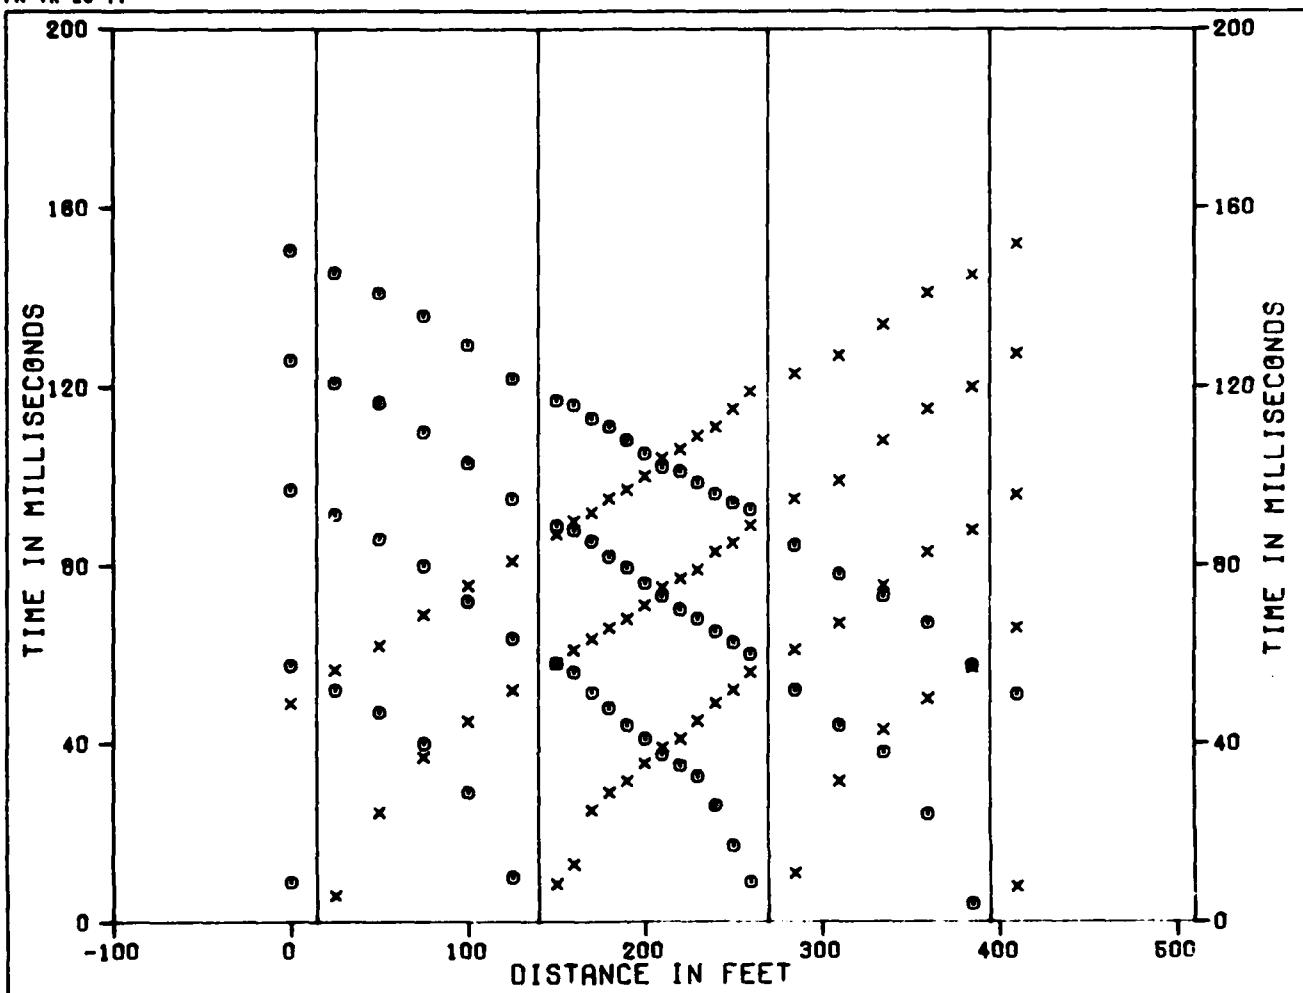

SHOT F	0	H	I	J	K
GEOFONES	1	7	18	24	

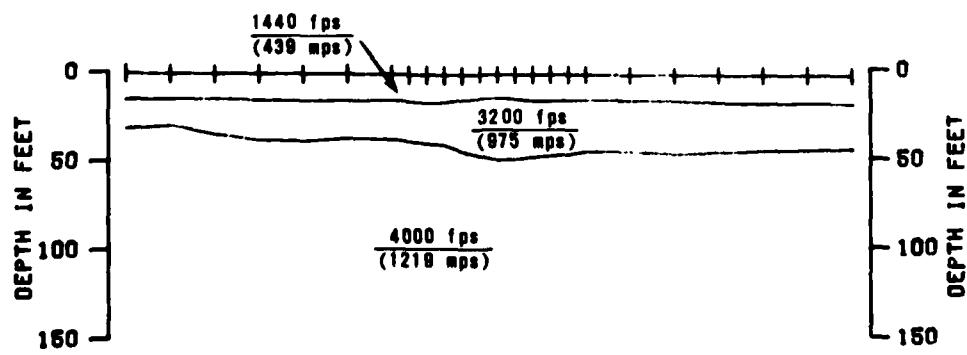

0 METERS  
DISTANCE AND DEPTH

X TIMES TO RIGHT OF SHOTS  
O TIMES TO LEFT OF SHOTS

10 AUG 78


SEISMIC REFRACTION LINE BU-S-11  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-11

FUJITSU NATIONAL INC.

FN-TR-28-11

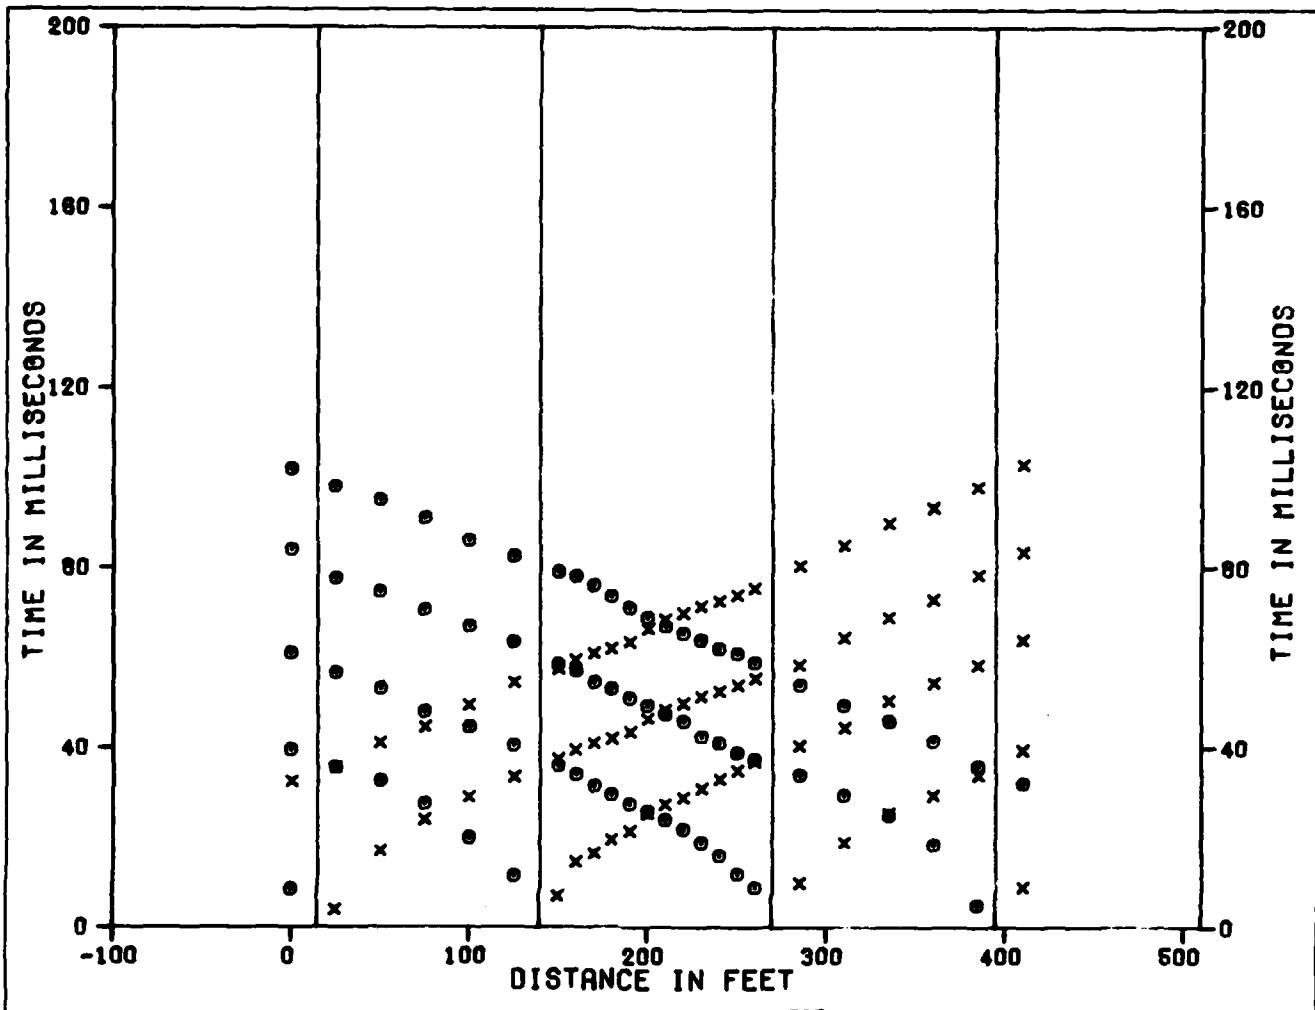

SHOT F  
GEOFONES


G

H

I

J

K

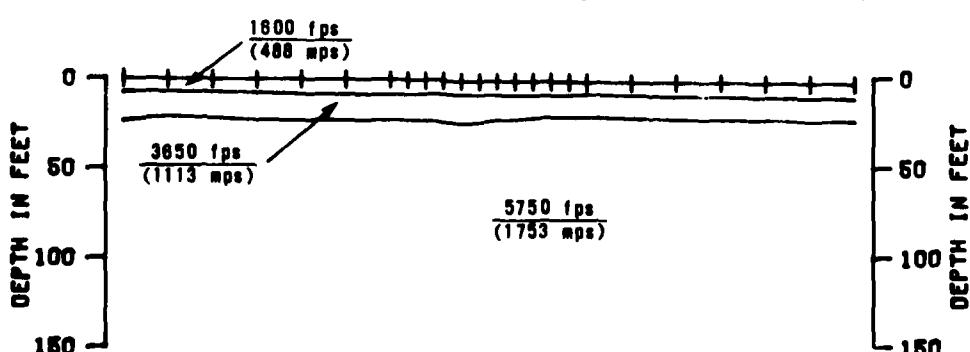

0 METERS  
50  
DISTANCE AND DEPTH

X TIMES TO RIGHT OF SHOTS  
O TIMES TO LEFT OF SHOTS

10 AUG 70


SEISMIC REFRACTION LINE BU-S-12  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO


FIGURE  
3-12

FUGRO NATIONAL INC.

FN-TR-28-11

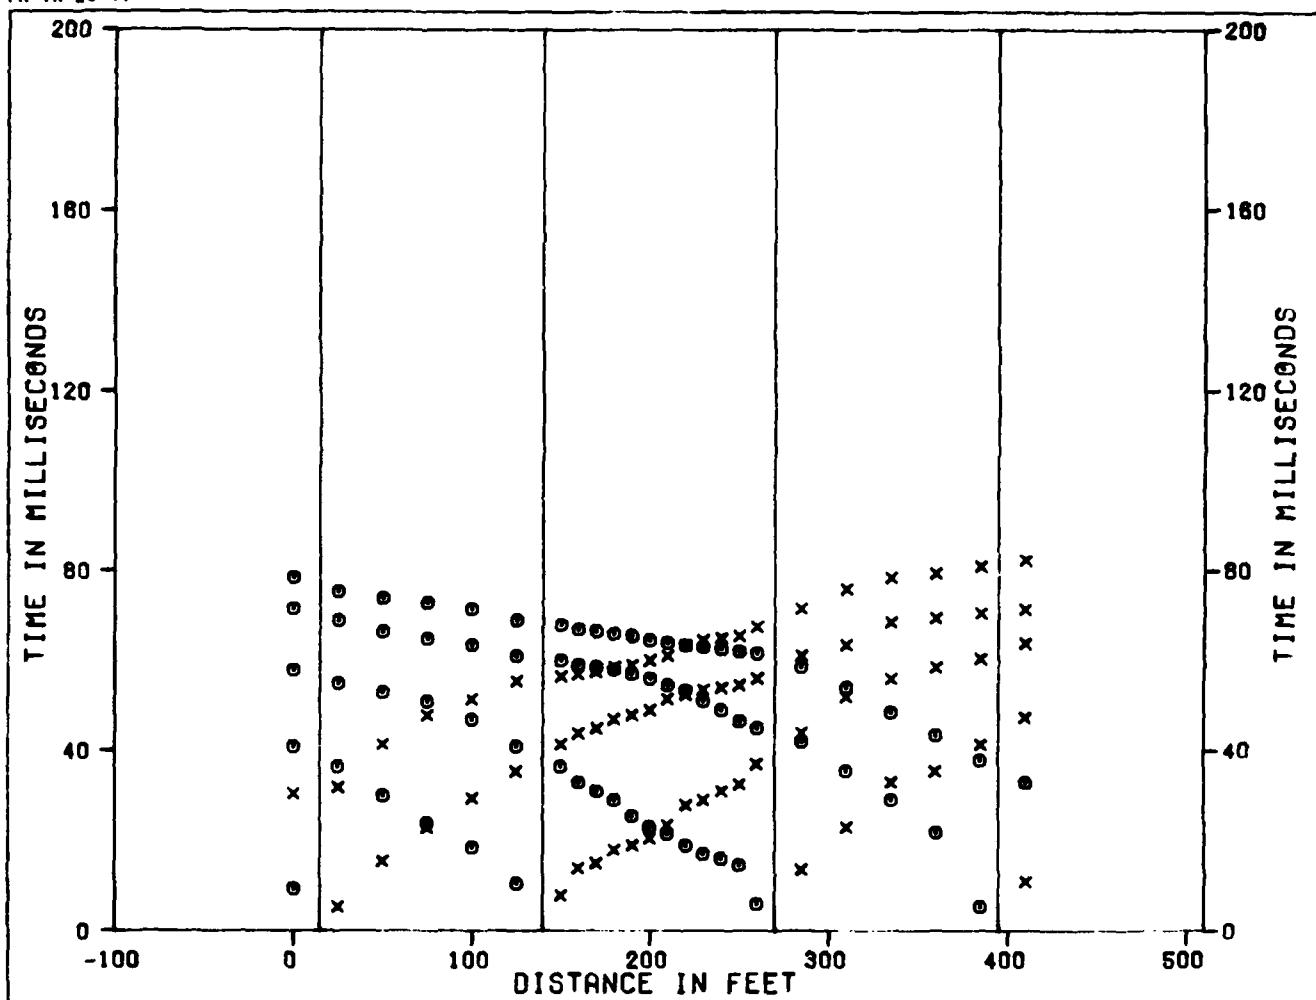

SHOT F            G            H            I            J            K  
GEOPHONES      1            7            18            24

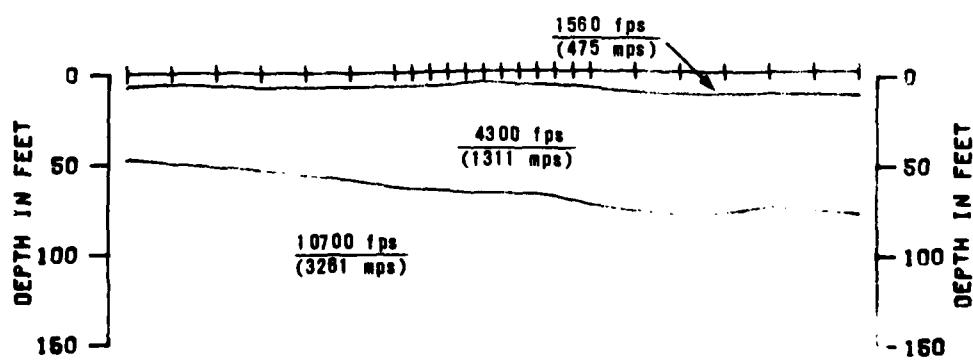

0            METERS            50  
DISTANCE AND DEPTH


x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS

SEISMIC REFRACTION LINE BU-S-13  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-13

MICRO NATIONAL, INC.

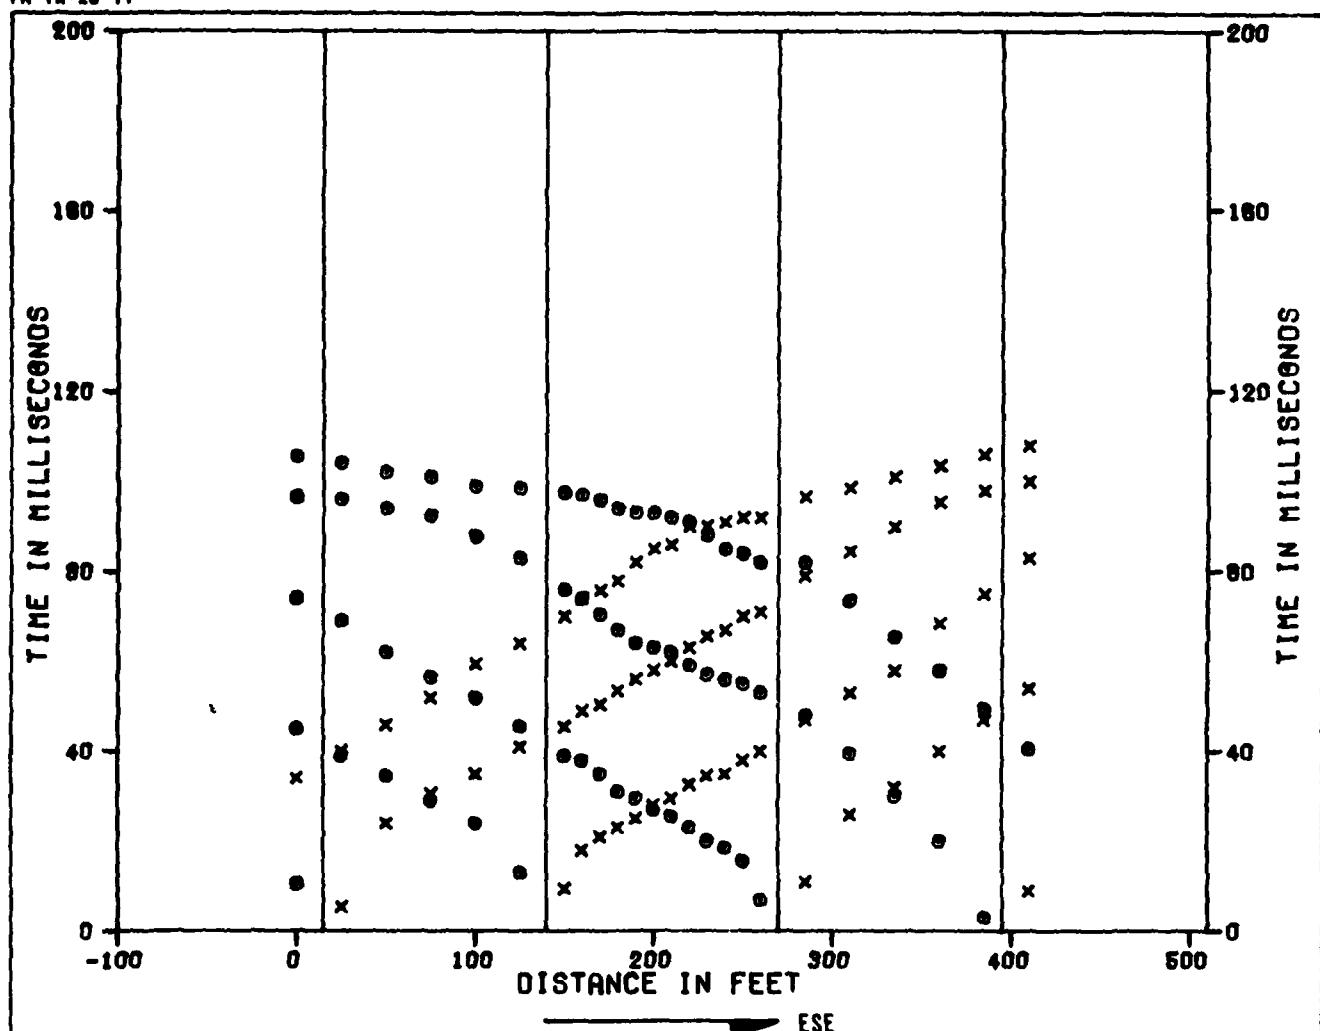

SHOT F            0            H            I            J            K  
GEOPHONES      1            7            16          24

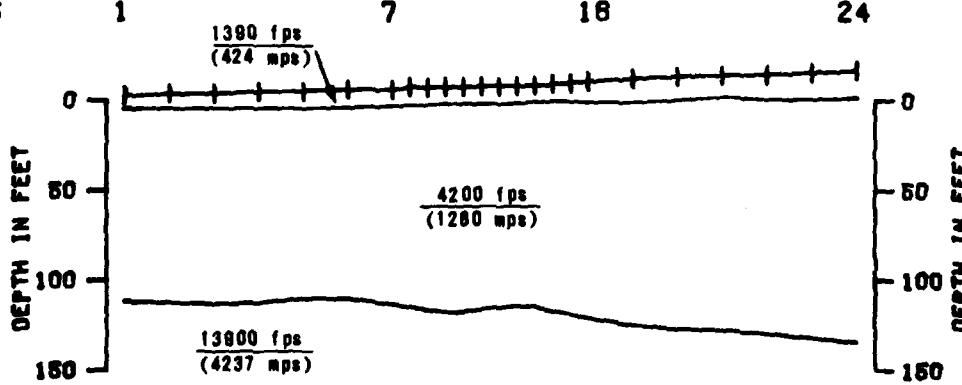

X TIMES TO RIGHT OF SHOTS  
O TIMES TO LEFT OF SHOTS

10 AUG 70


SEISMIC REFRACTION LINE BU-S-14  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-14

FUGRO NATIONAL, INC.


FN-TR-28-11

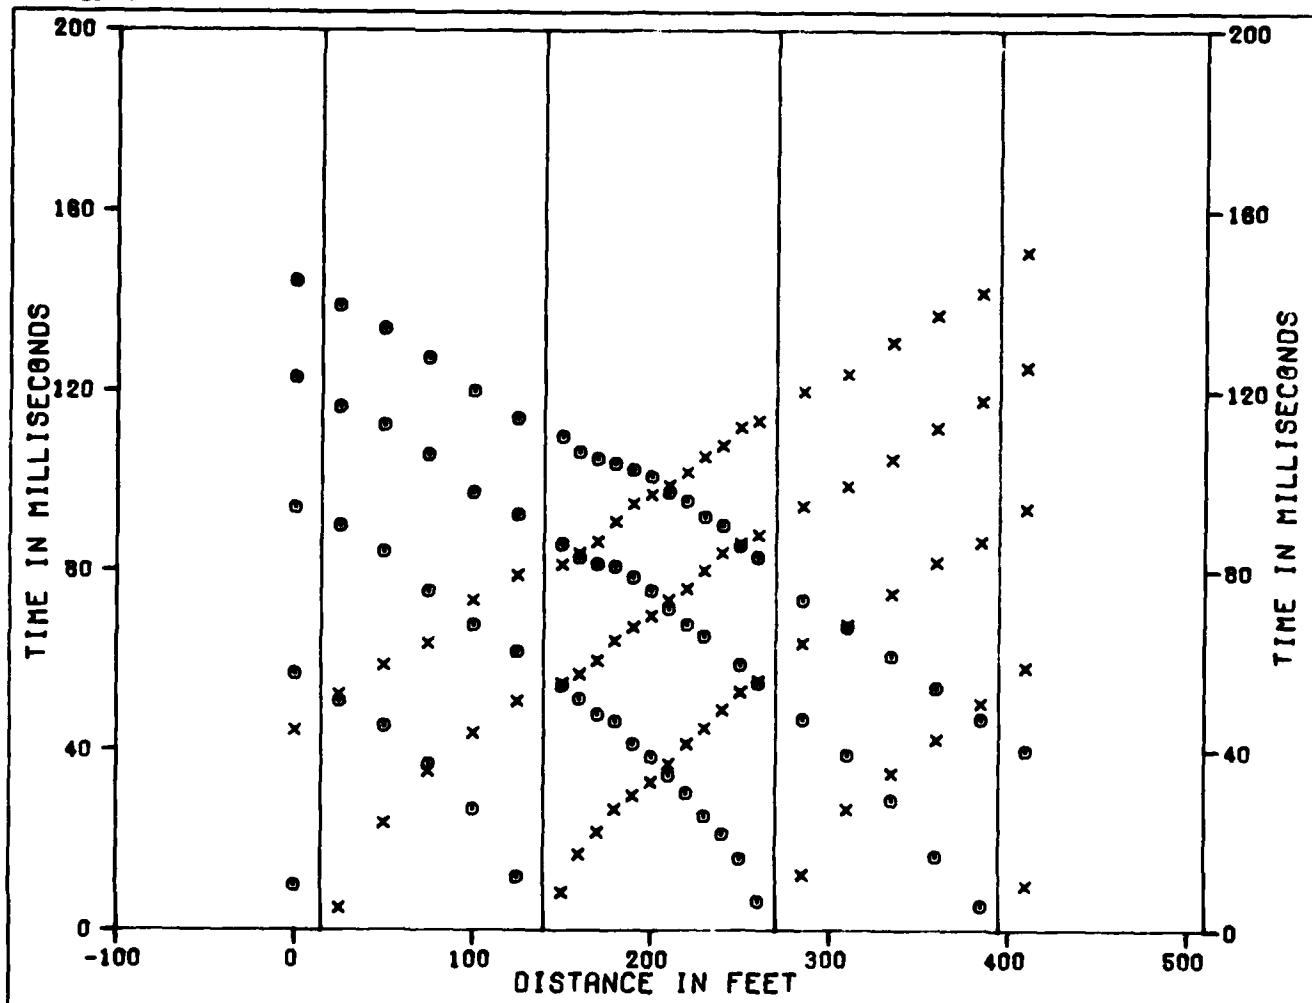

SHOT F                    G                    H                    I                    J                    K

GEOFONES

1                    7                    18                    24

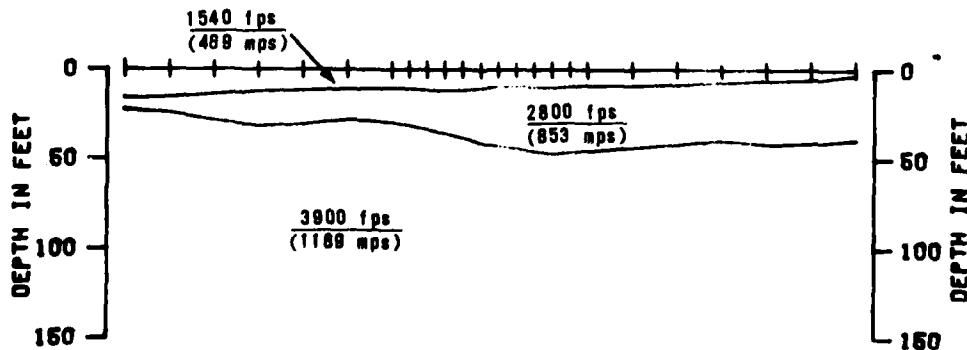

0                    METERS  
DISTANCE AND DEPTH

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS

SEISMIC REFRACTION LINE BU-S-15  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER COP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-15


FUJERO NATIONAL, INC.

10 AUG 79

FN-TR-28-II

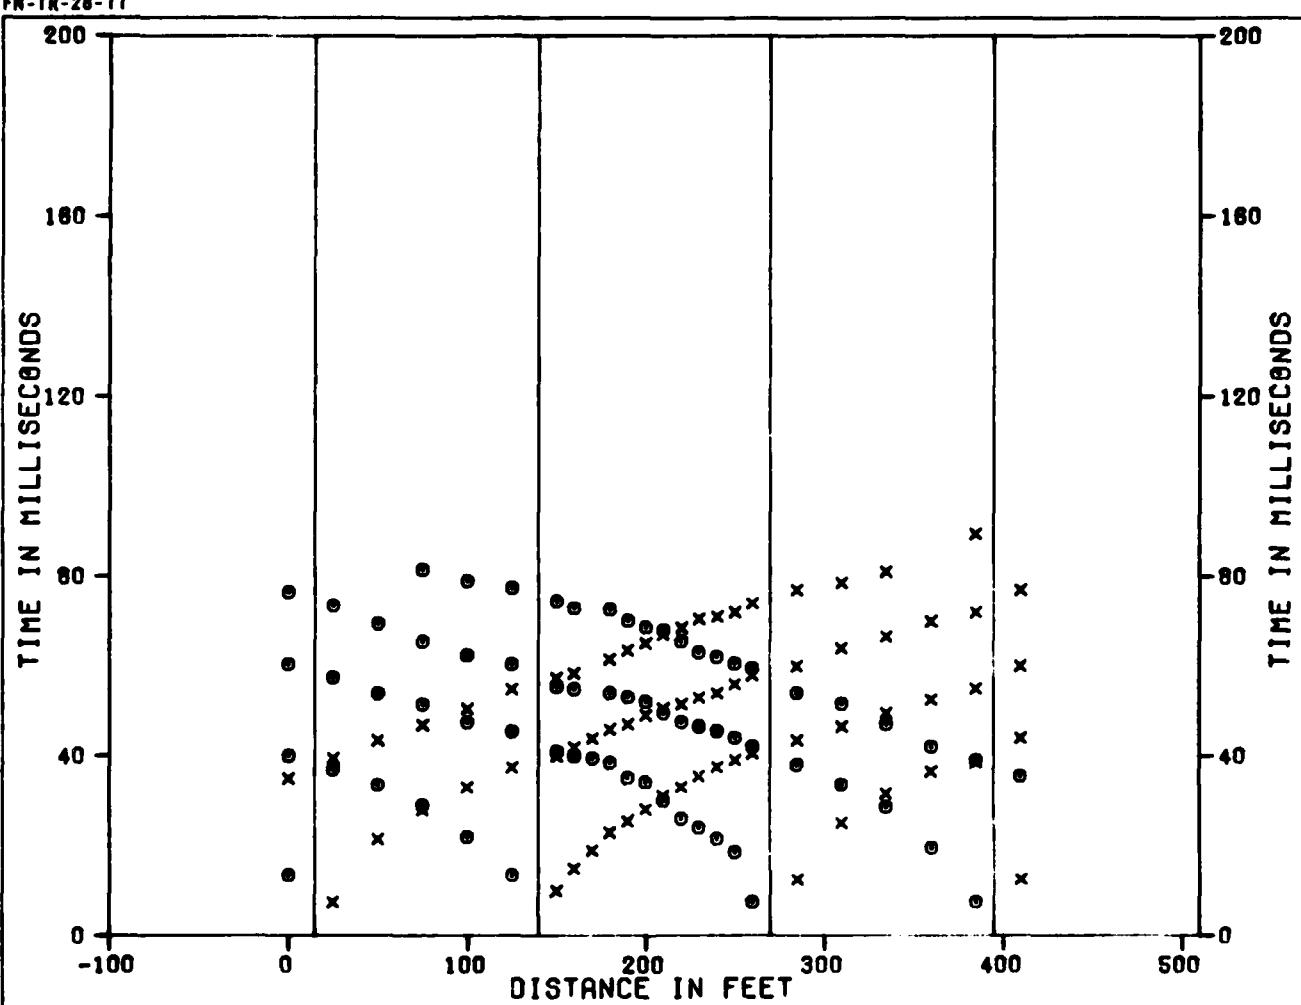

SHOT F G H I J K  
GEOFONES 1 7 18 24

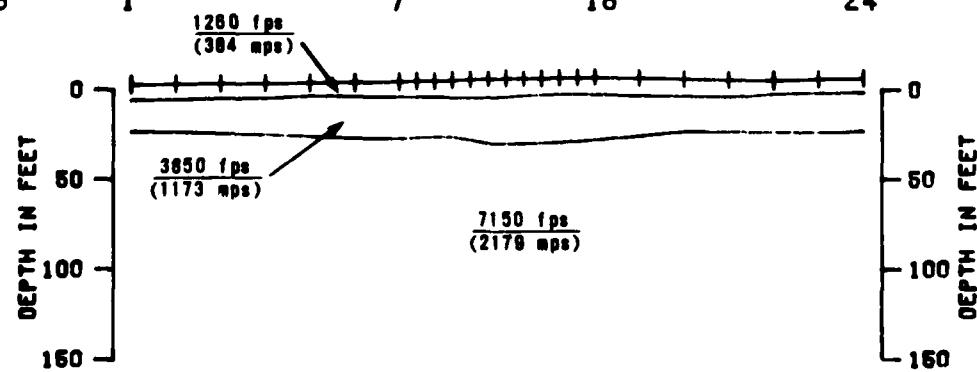

0 METERS  
DISTANCE AND DEPTH  
50

x TIMES TO RIGHT OF SHOTS  
o TIMES TO LEFT OF SHOTS

SEISMIC REFRACTION LINE BU-S-16  
TIME DISTANCE DATA AND VELOCITY PROFILE  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
3-16

FUSCO NATIONAL, INC.


**SECTION 4.0**  
**ELECTRICAL RESISTIVITY DATA**

EXPLANATIONS OF ELECTRICAL RESISTIVITY DATA


Each figure in this section presents the data obtained from a resistivity sounding and a tabulated model of resistivity layers that would produce a curve similar to the observed curve.

The upper portion of the figures is a graph in which measured apparent resistivity values in ohm-meters are plotted versus one-half the distance between the current electrodes.

The interpreted model tabulated at the bottom of the page shows a combination of true resistivity layers and thicknesses obtained by matching theoretical curves to the field curve.

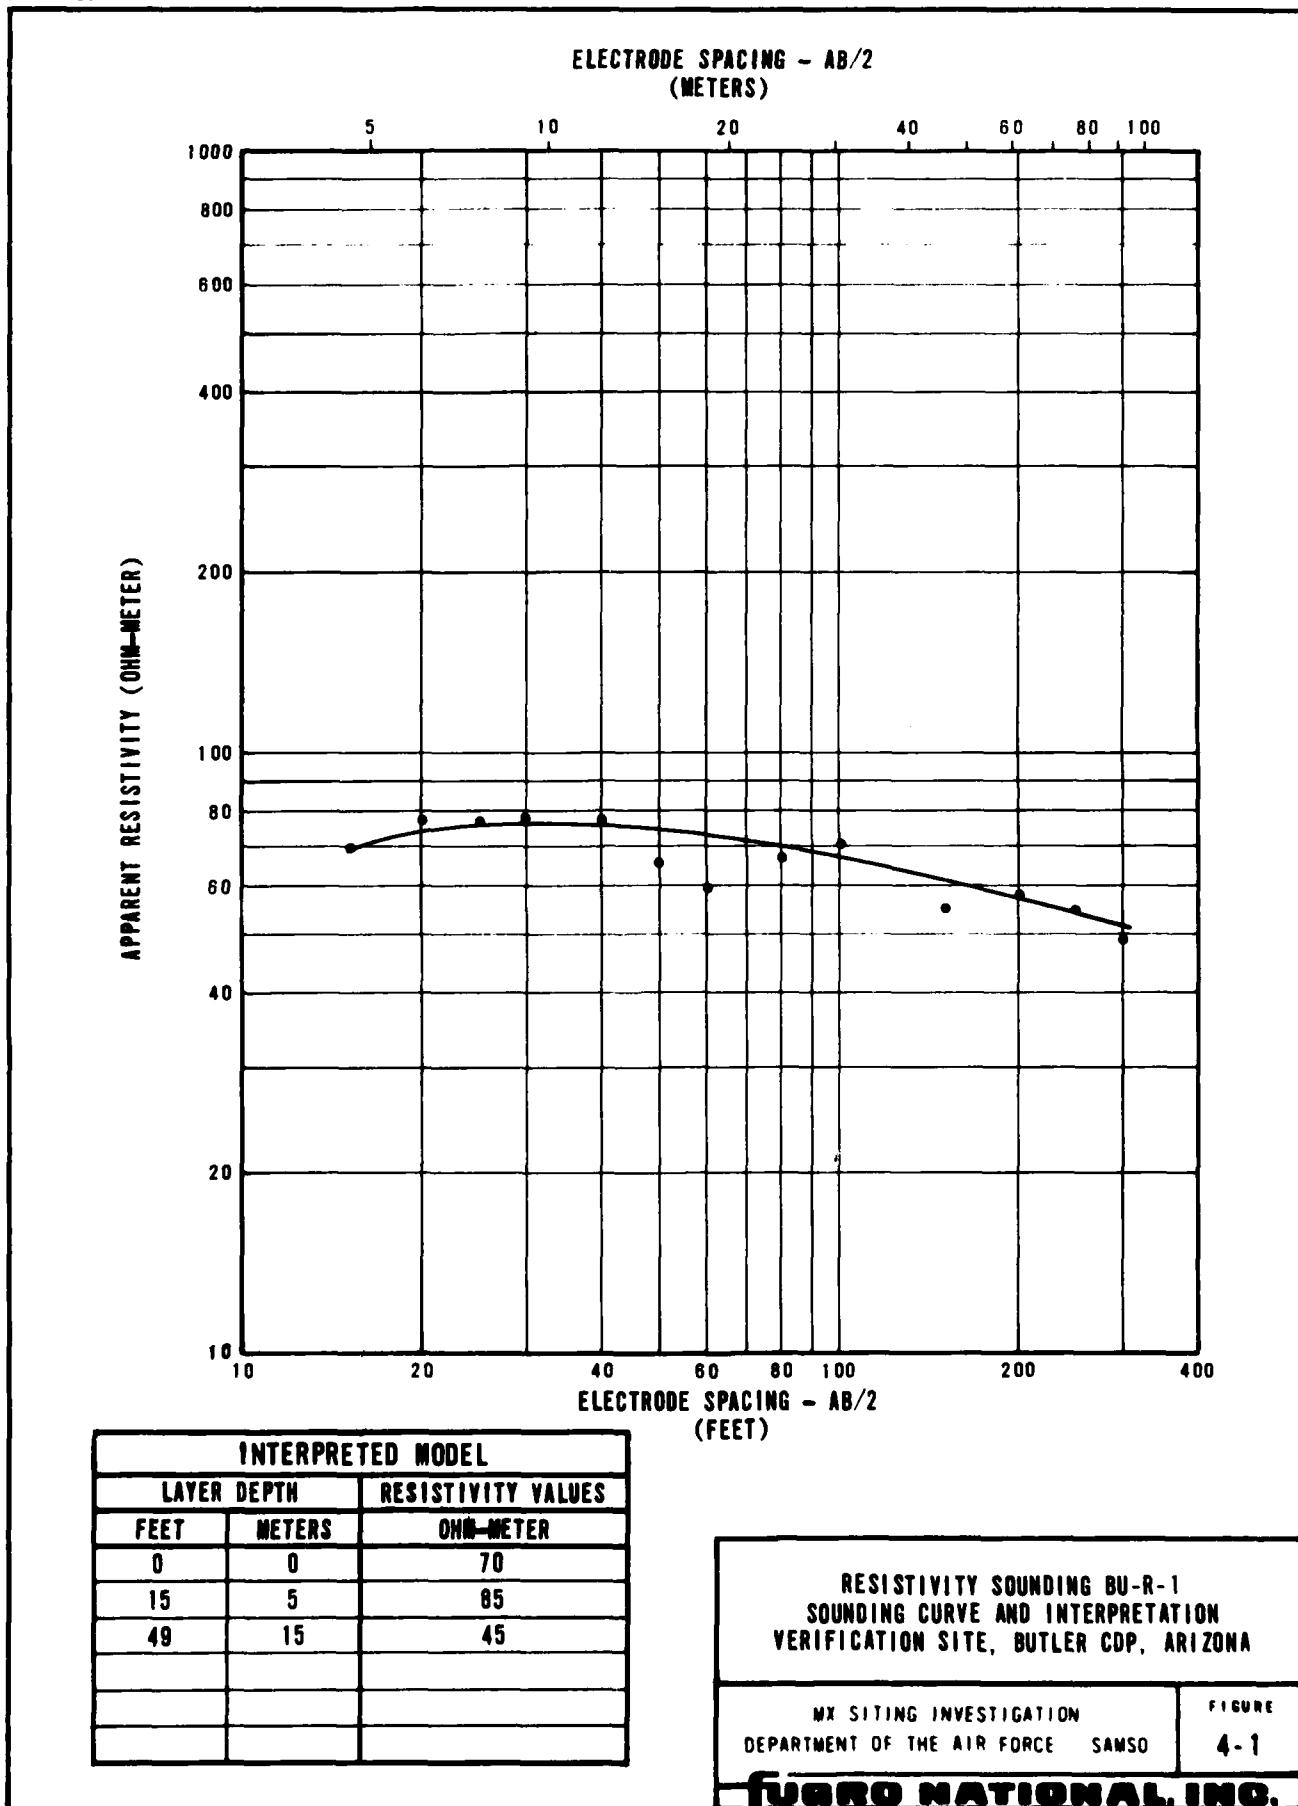

APPARENT RESISTIVITY (OHM-METER)

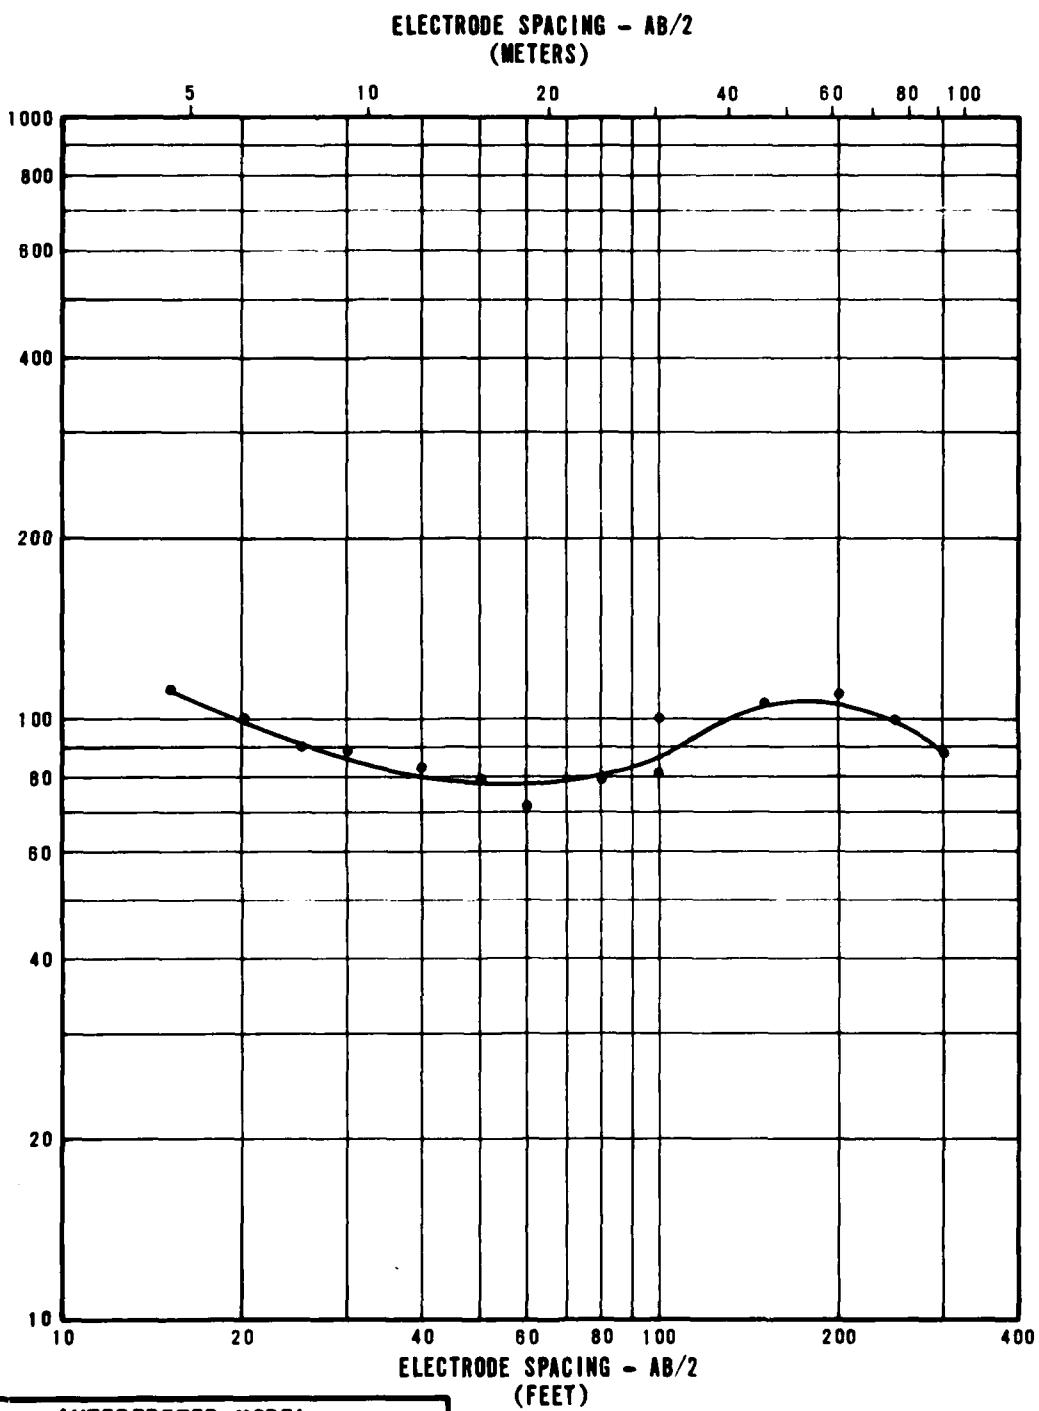


INTERPRETED MODEL		
LAYER DEPTH		RESISTIVITY VALUES
FEET	METERS	OHM-METER
0	0	140
5	2	80
70	21	300
92	28	150
182	49	35


RESISTIVITY SOUNDING BU-R-2  
SOUNDING CURVE AND INTERPRETATION  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO


FIGURE  
4-2


FUGRO NATIONAL, INC.

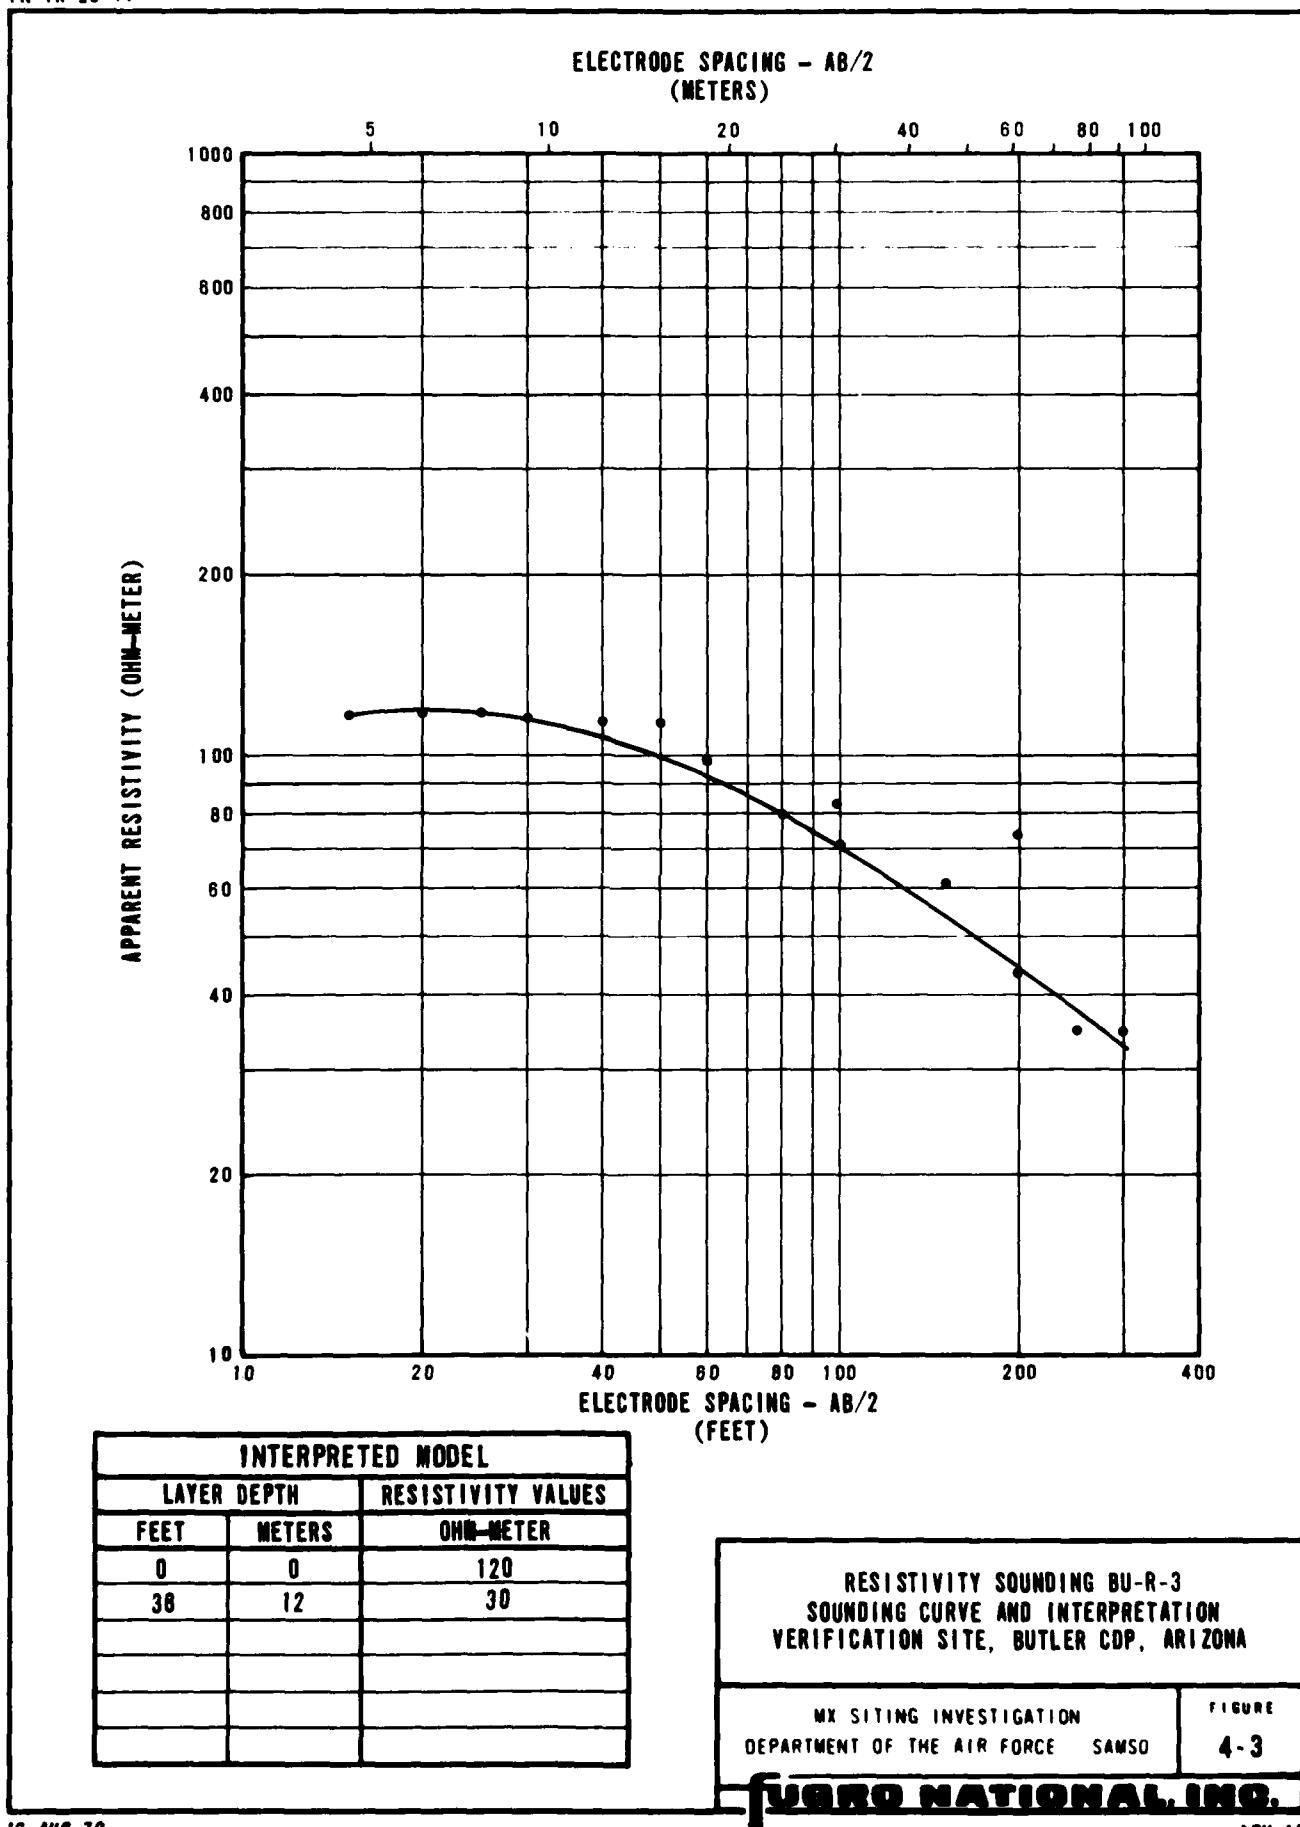

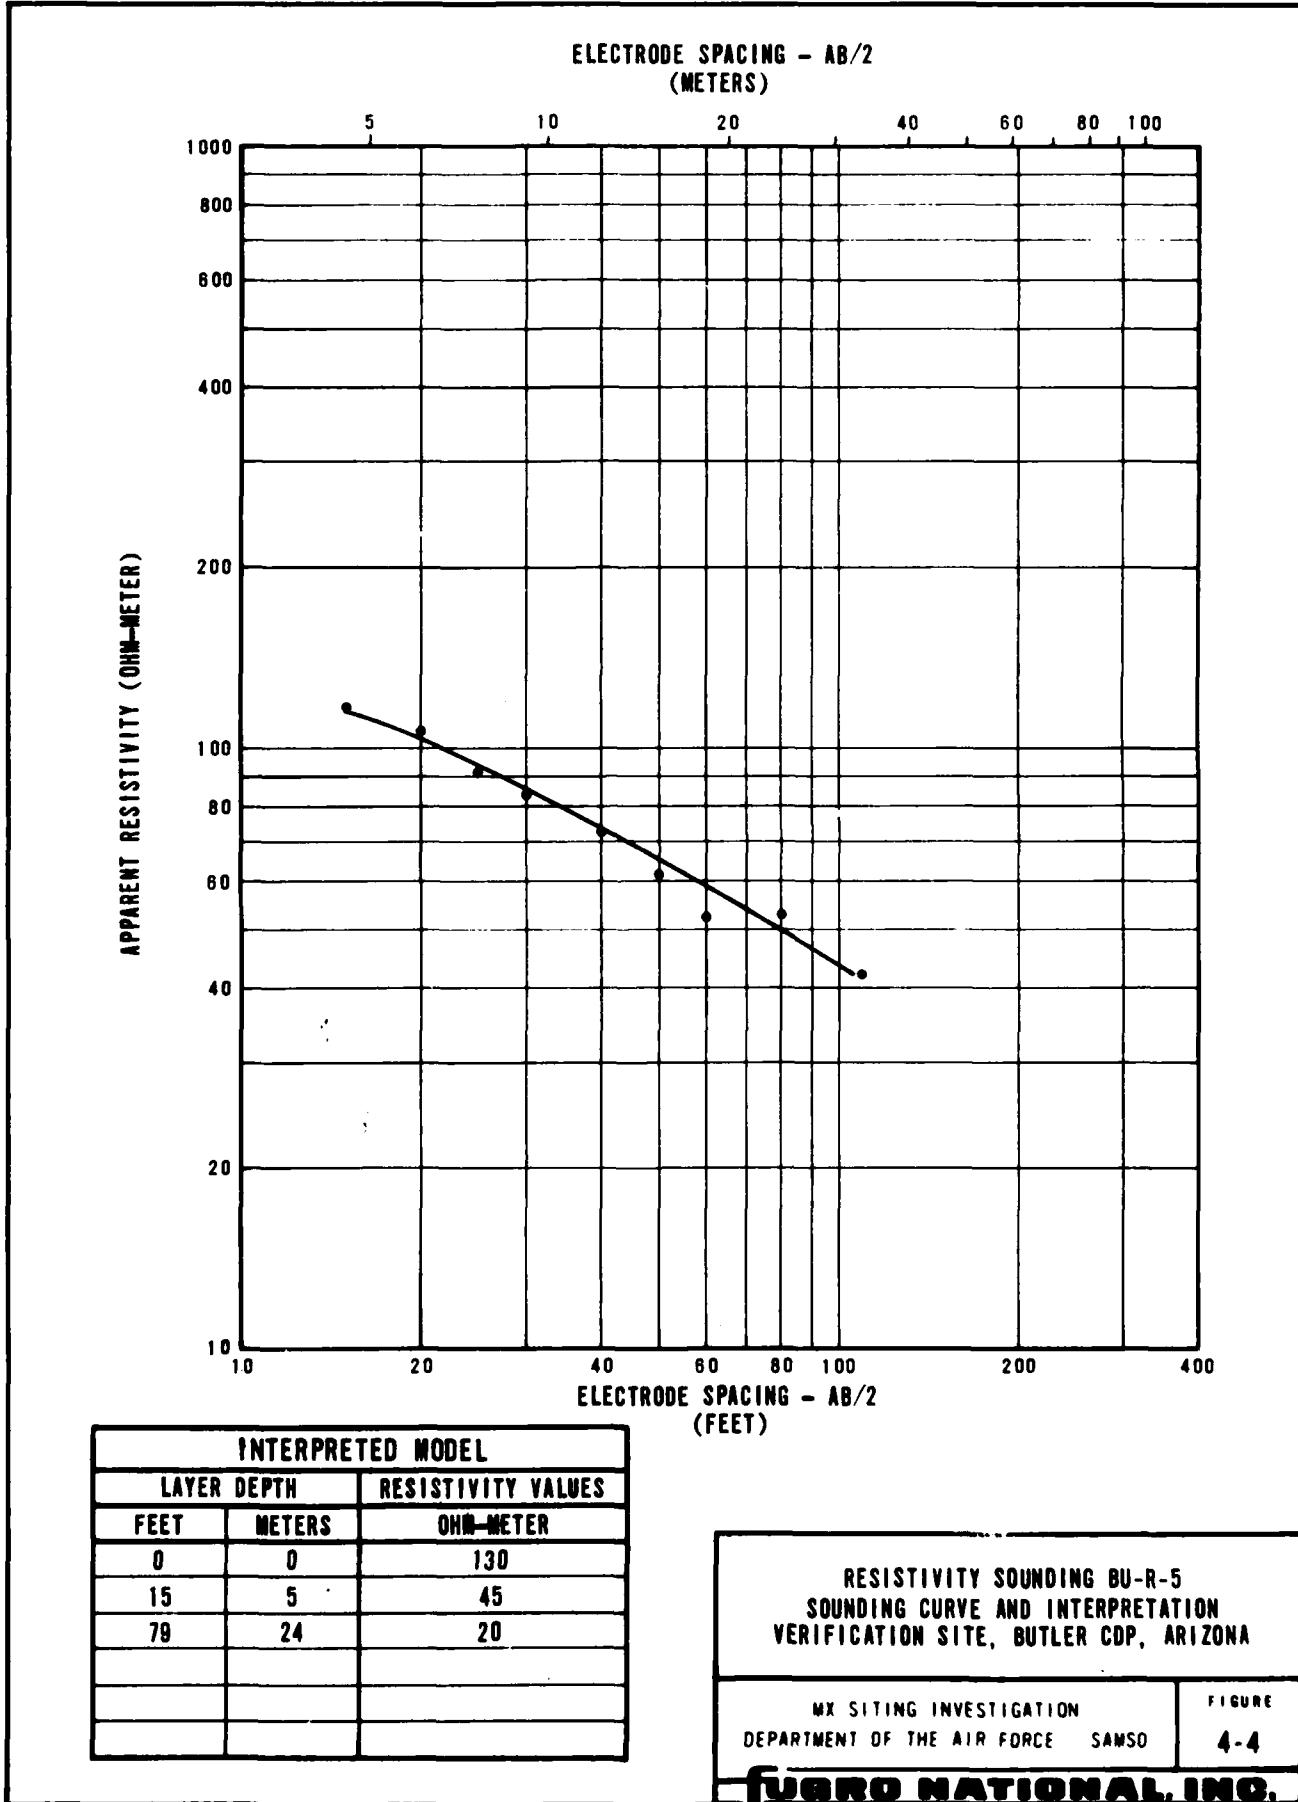

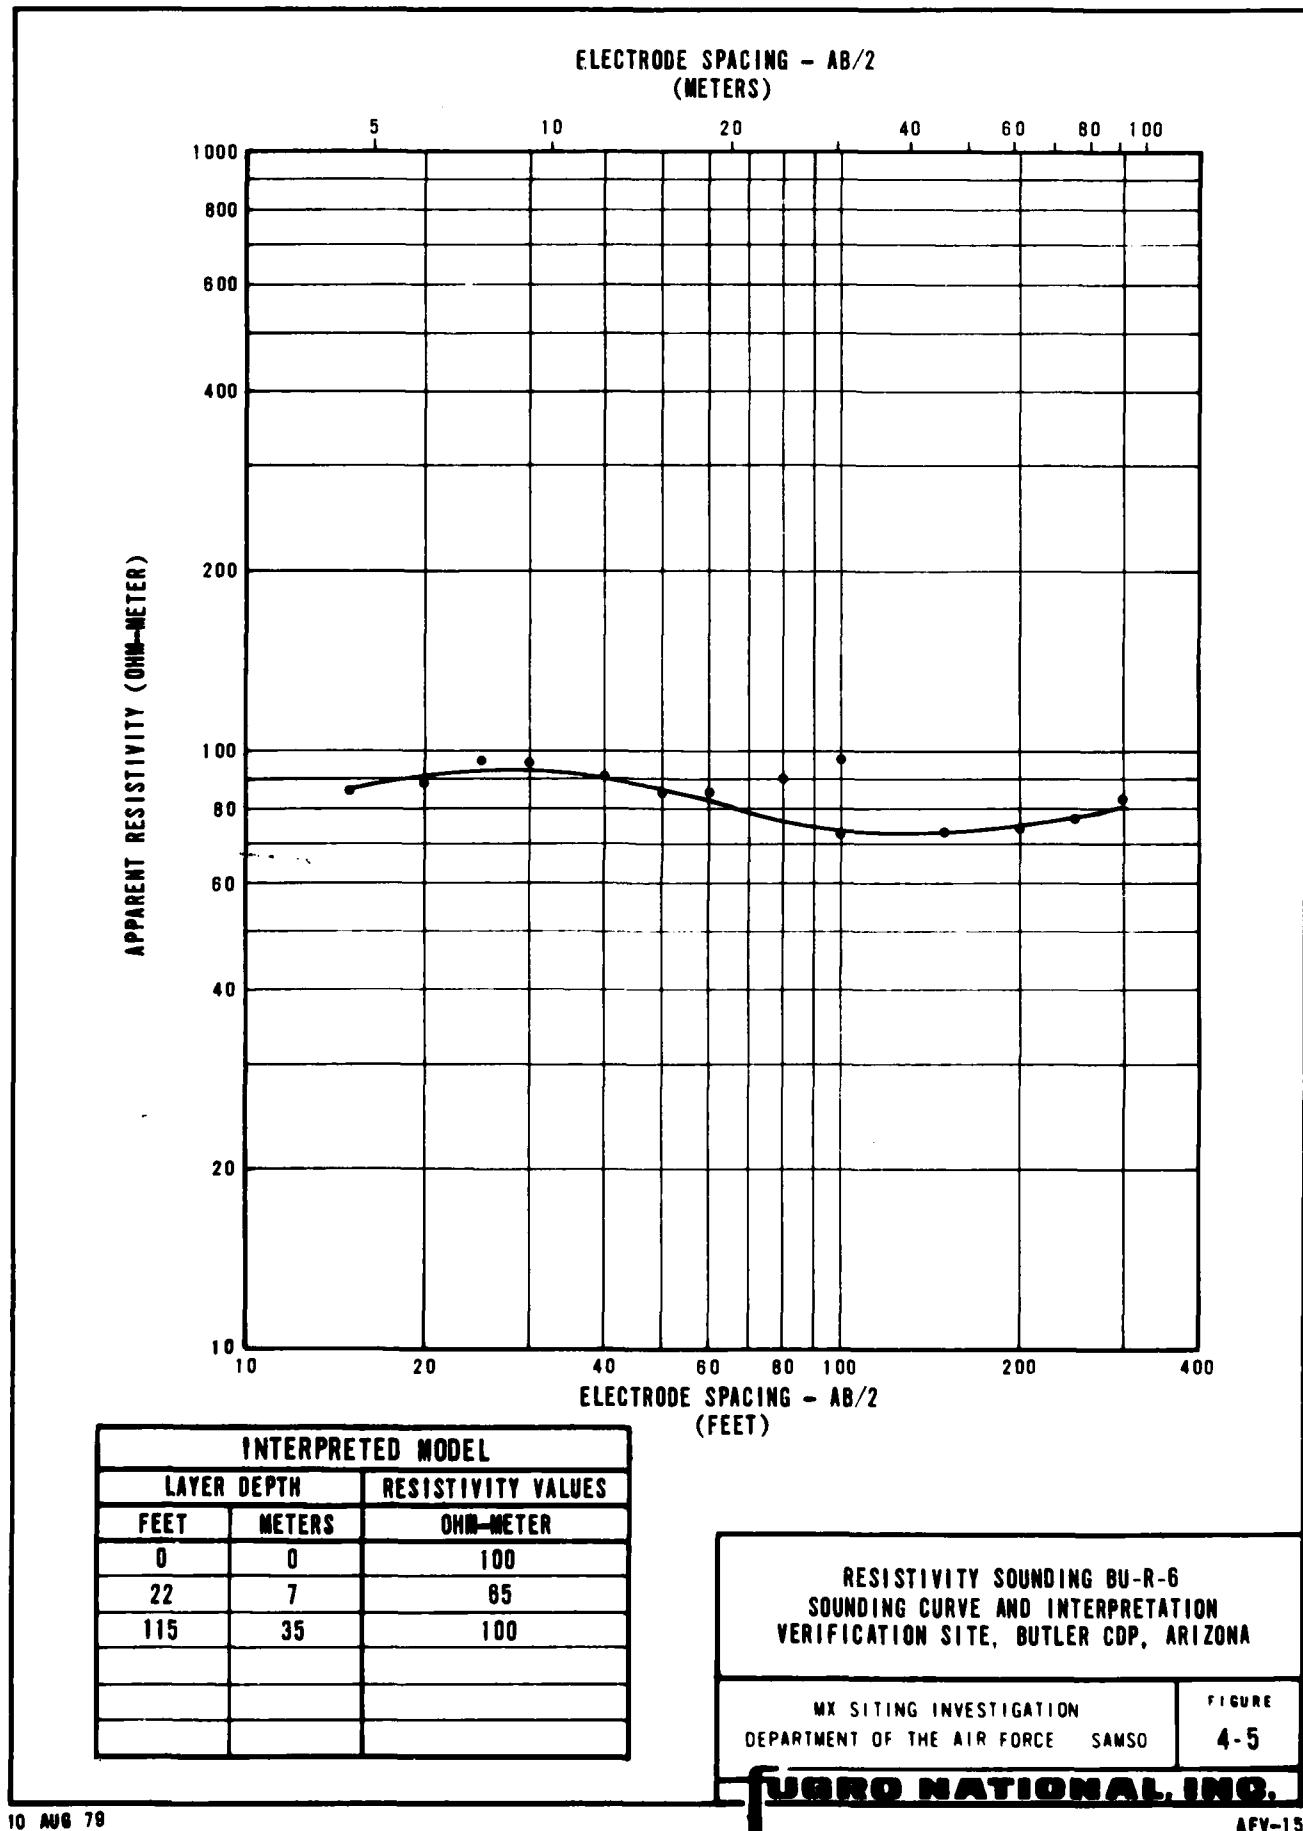

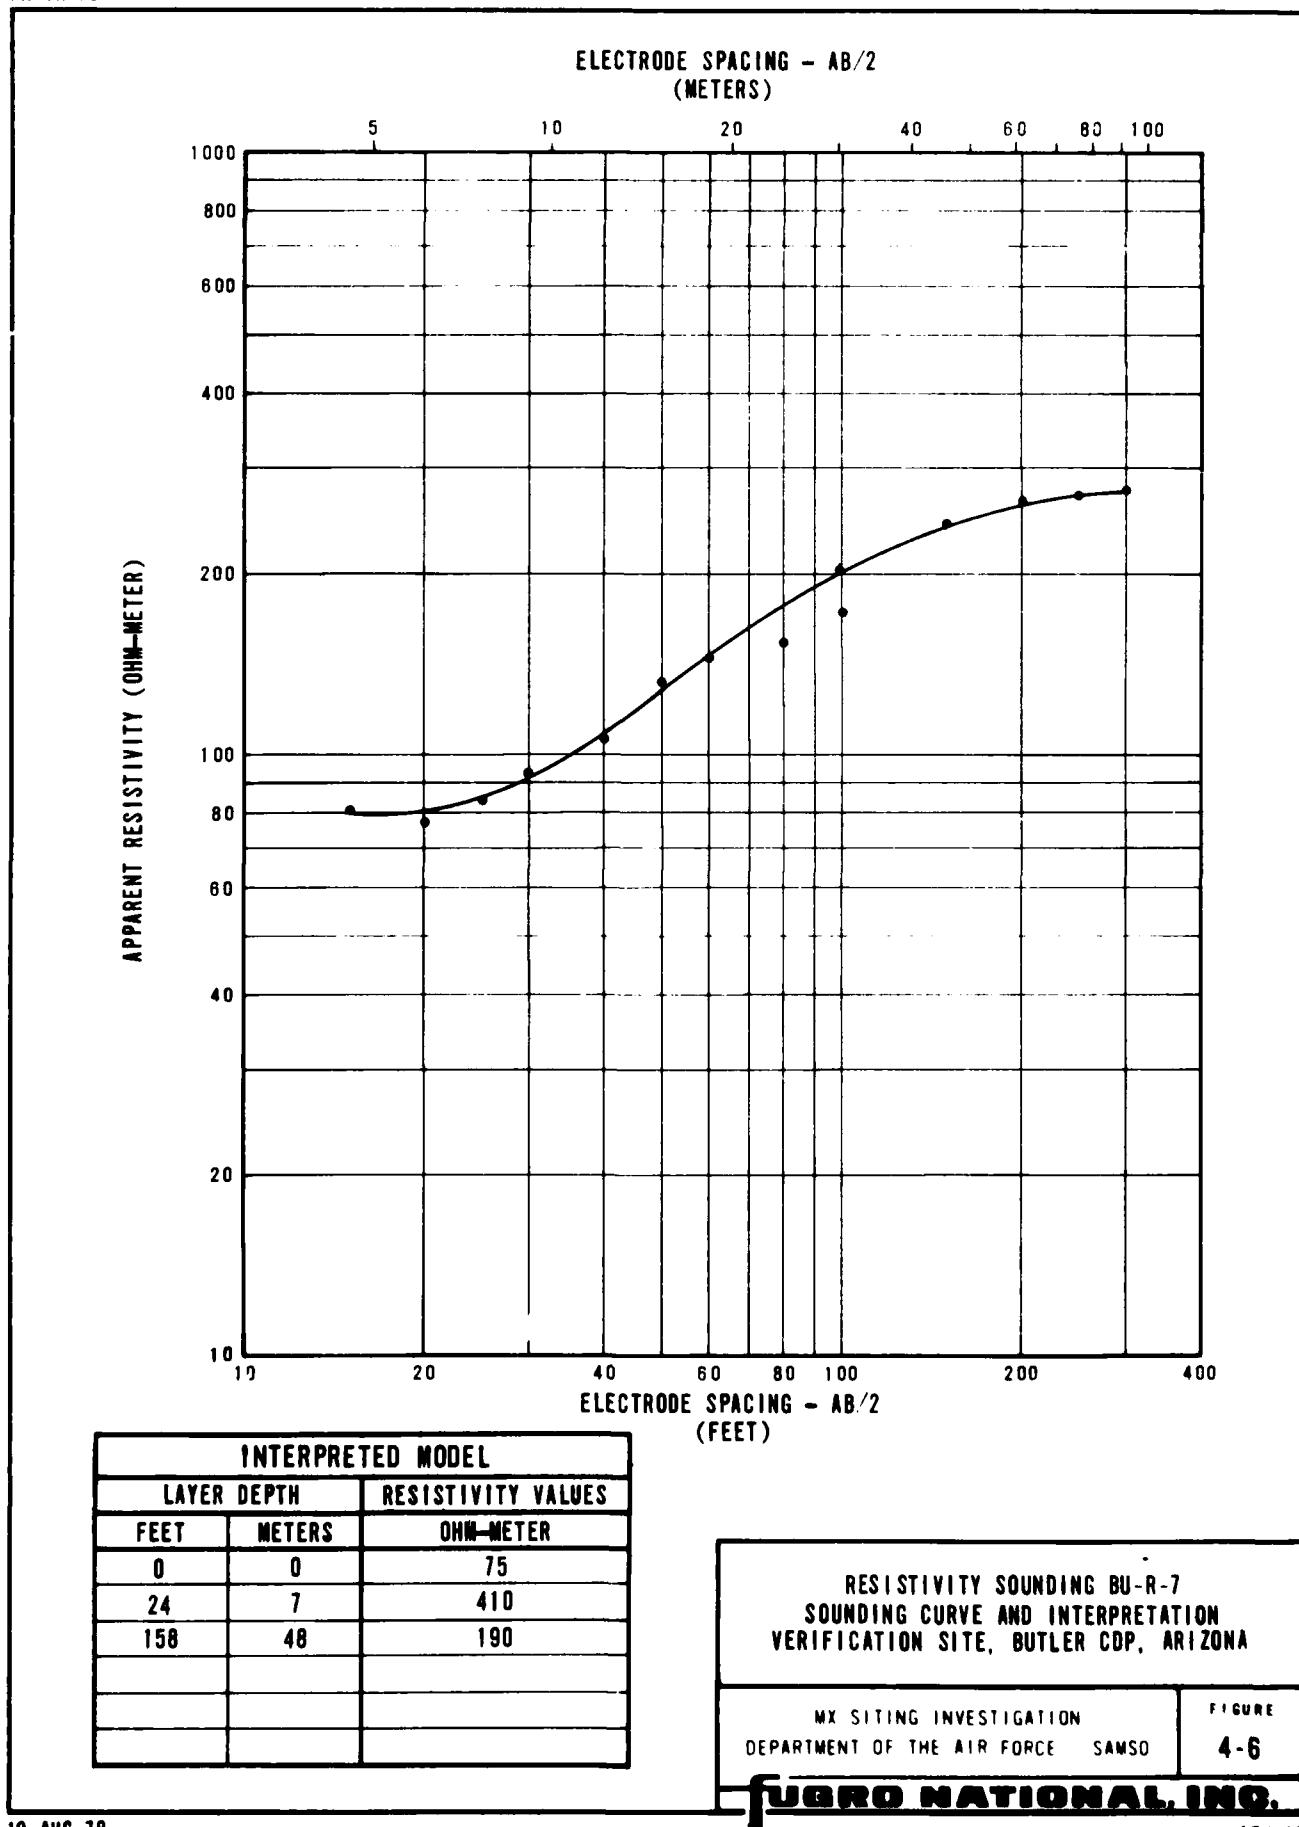

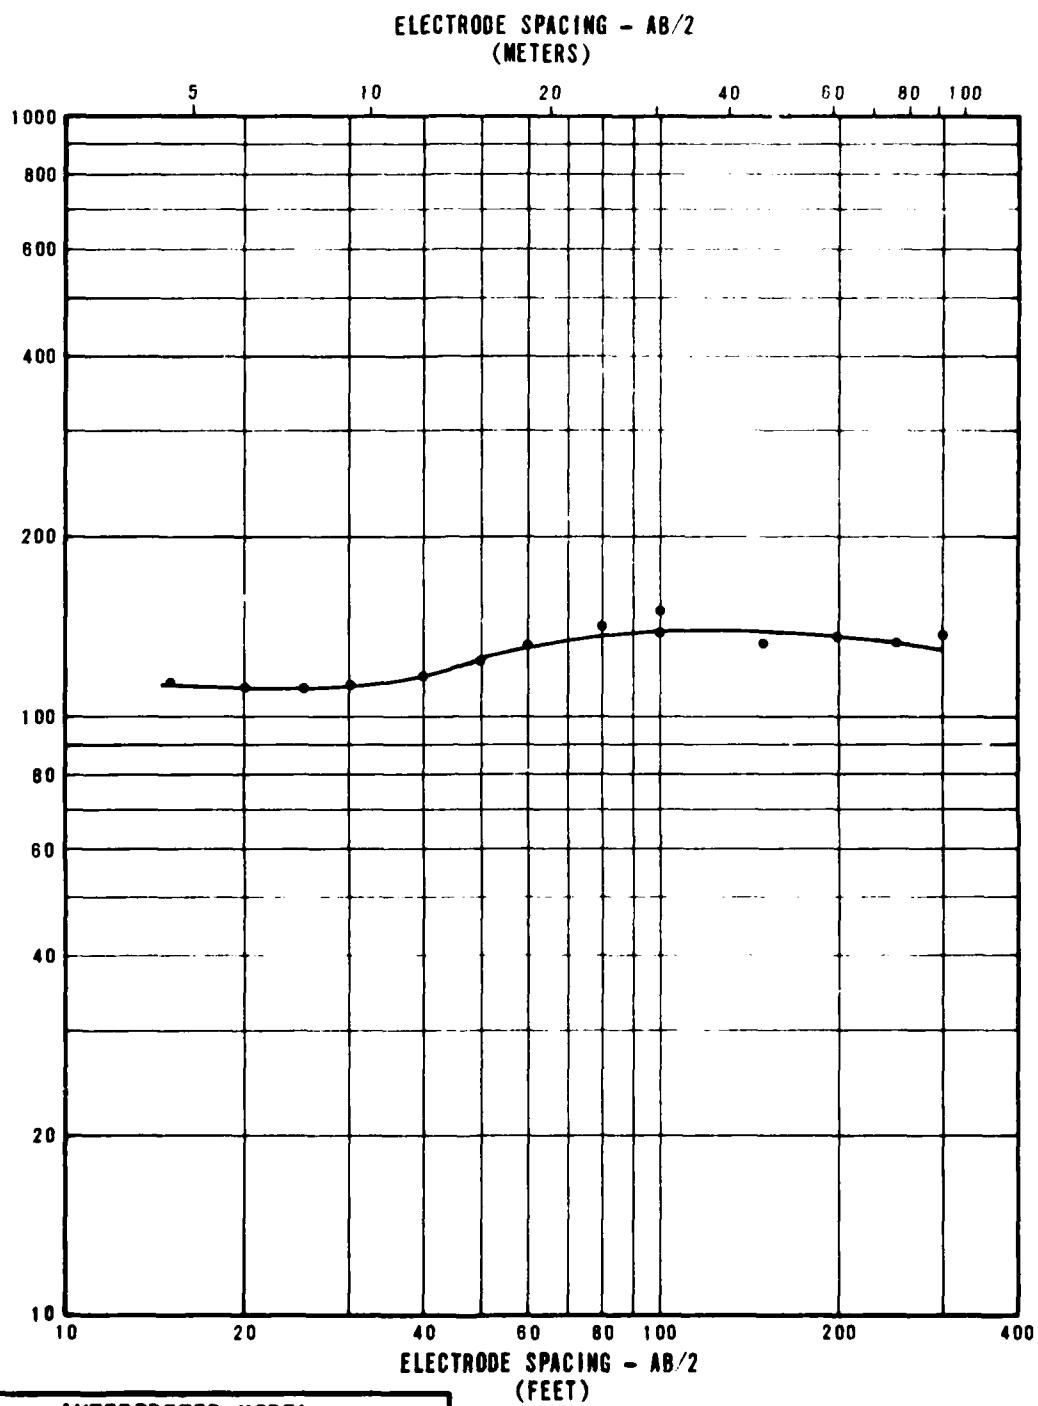**INTERPRETED MODEL**

LAYER DEPTH		RESISTIVITY VALUES
FEET	METERS	OHM-METER
0	0	110
37	11	210
79	24	110


RESISTIVITY SOUNDING BU-R-8  
SOUNDING CURVE AND INTERPRETATION  
VERIFICATION SITE, BUTLER COP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
4-7

**FUSCO NATIONAL INC.**

AFV-15

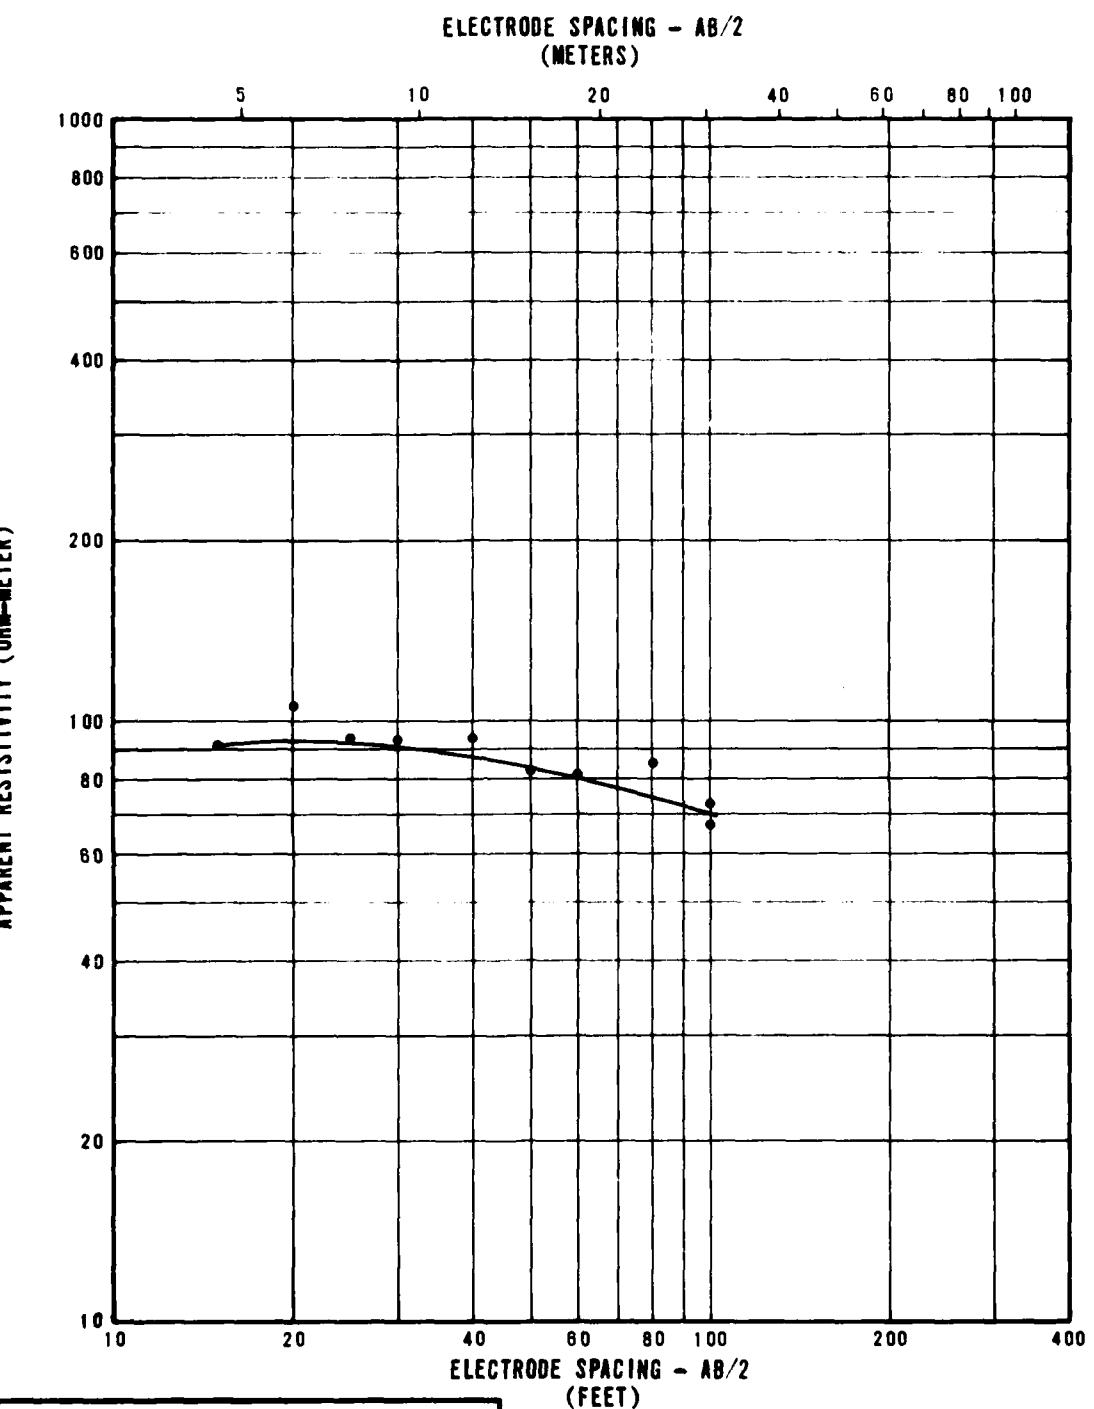

INTERPRETED MODEL		
LAYER DEPTH		RESISTIVITY VALUES
FEET	METERS	OHM-METER
0	0	90
40	12	50


RESISTIVITY SOUNDING BU-R-9  
SOUNDING CURVE AND INTERPRETATION  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
4-8

**FUGRO NATIONAL INC.**

APPARENT RESISTIVITY (OHM-METER)

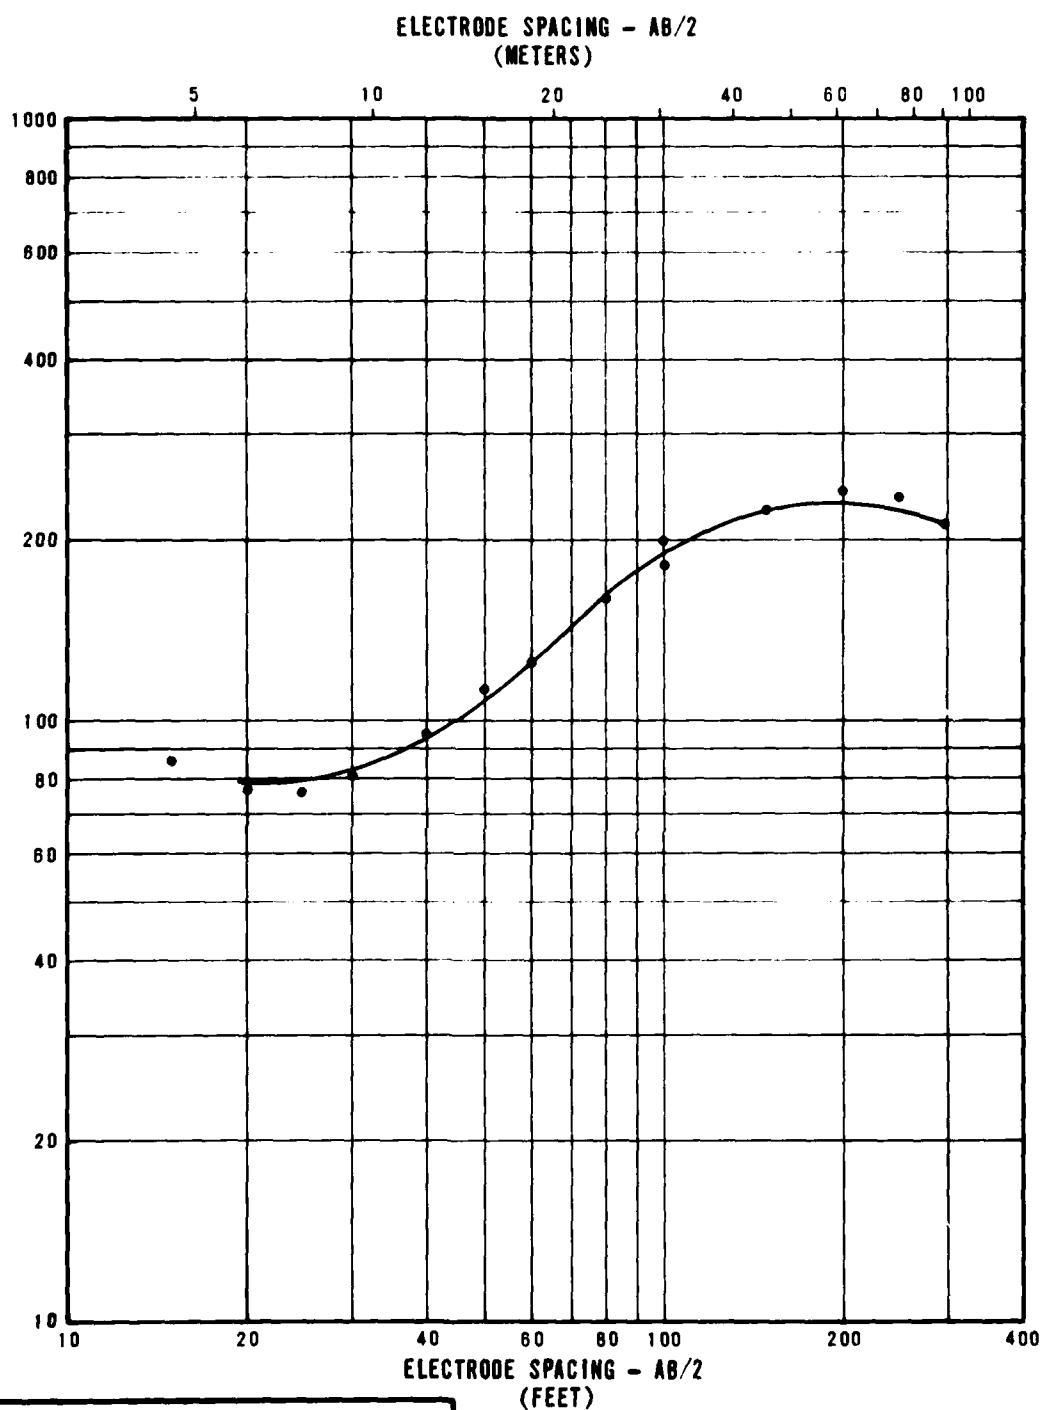
**INTERPRETED MODEL**


LAYER DEPTH		RESISTIVITY VALUES
FEET	METERS	OHM-METER
0	0	70
25	8	360
158	48	40


RESISTIVITY SOUNDING BU-R-10  
 SOUNDING CURVE AND INTERPRETATION  
 VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
 DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
 4-9

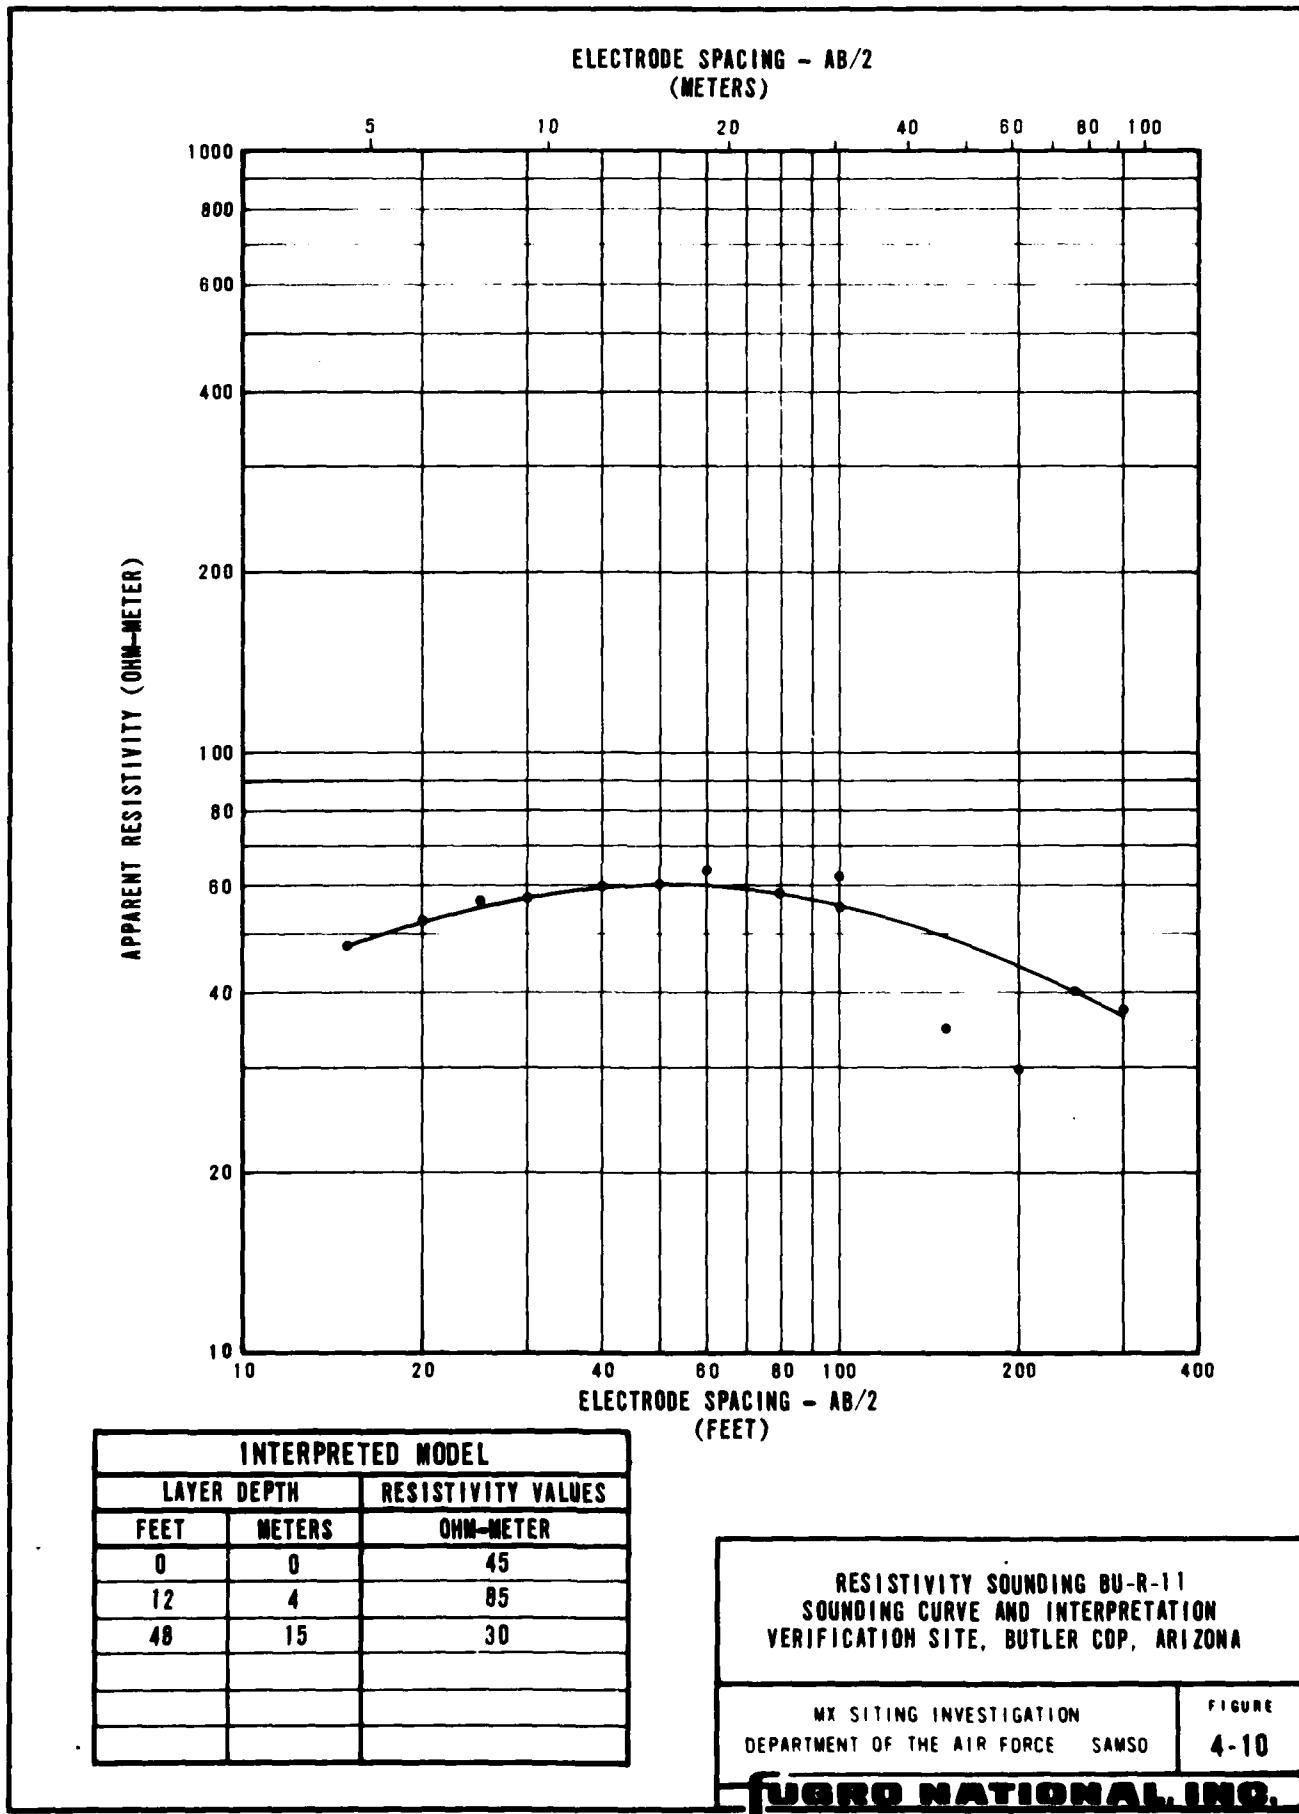

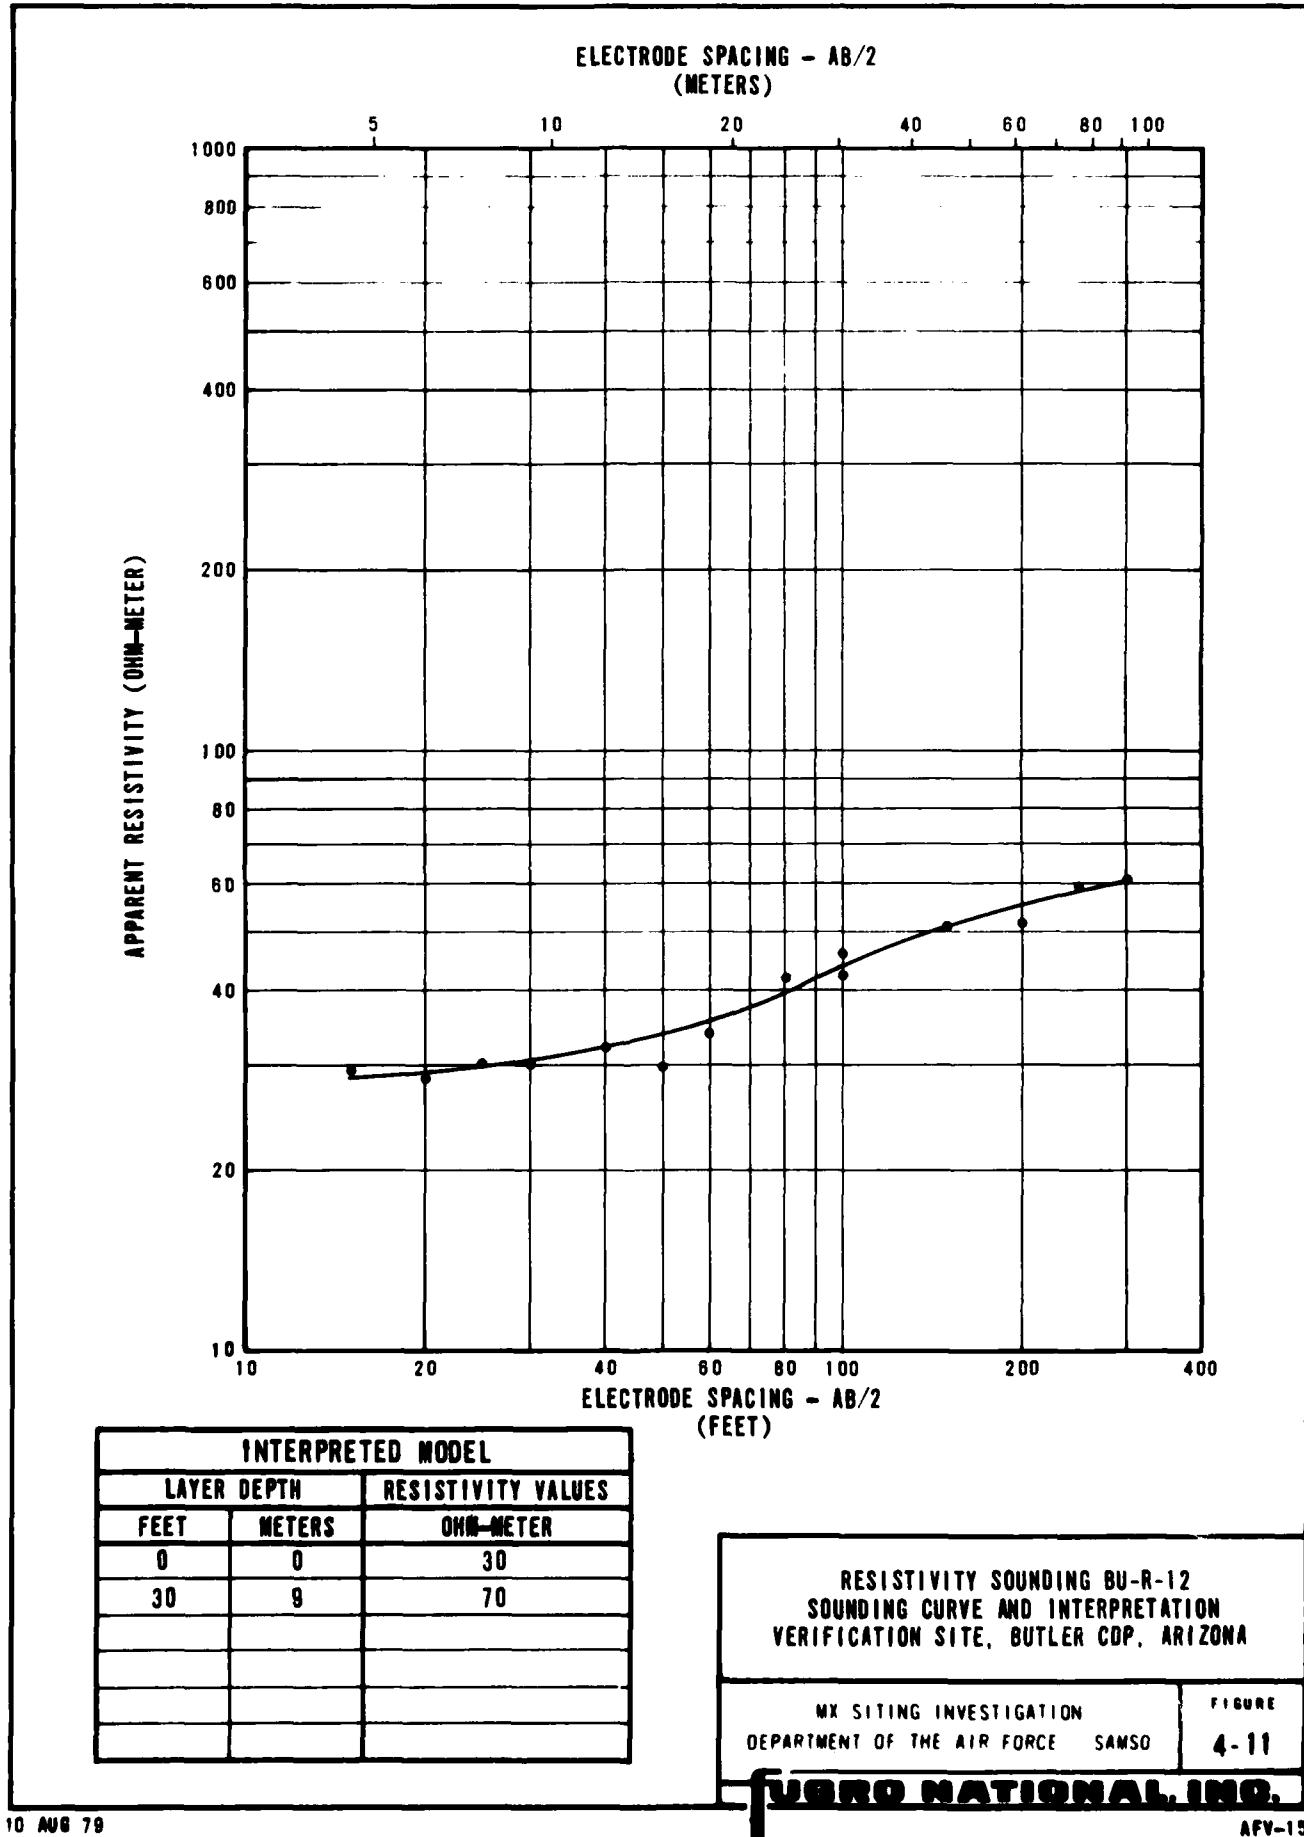


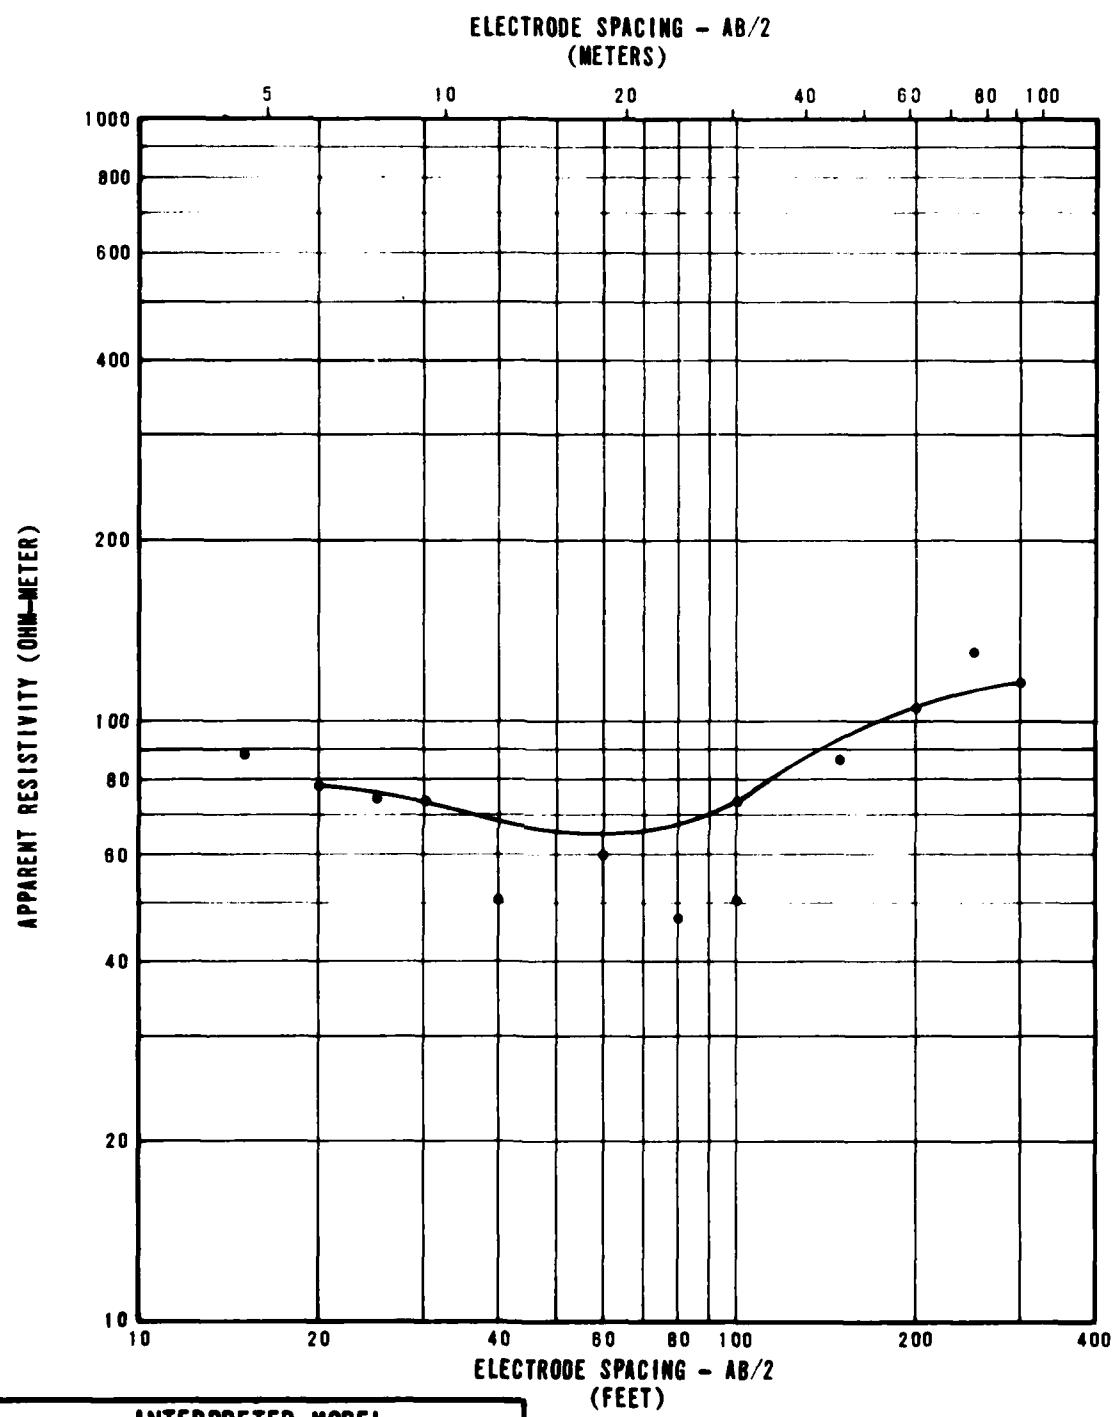


RESISTIVITY SOUNDING BU-R-13  
SOUNDING CURVE AND INTERPRETATION  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
4-12

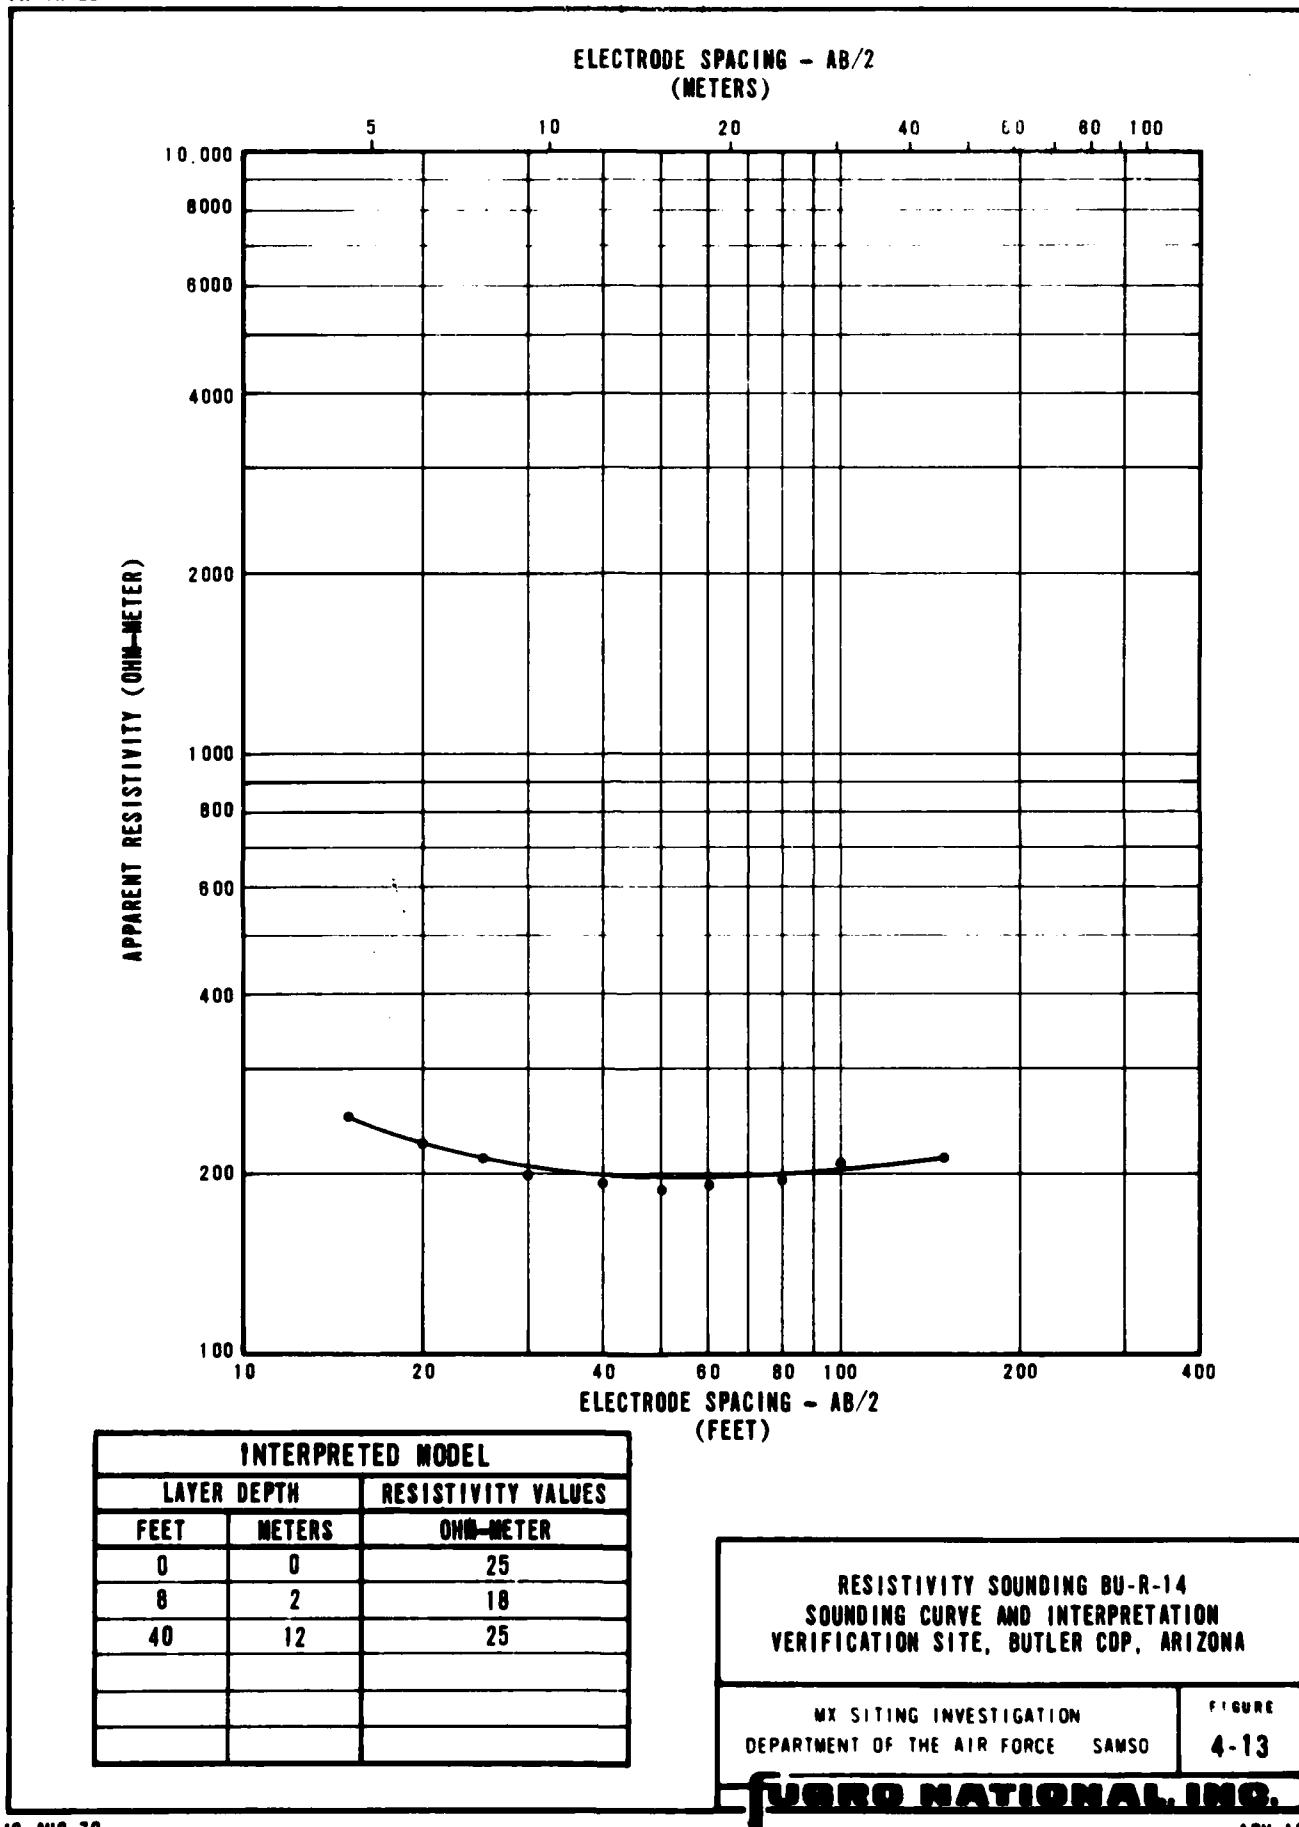

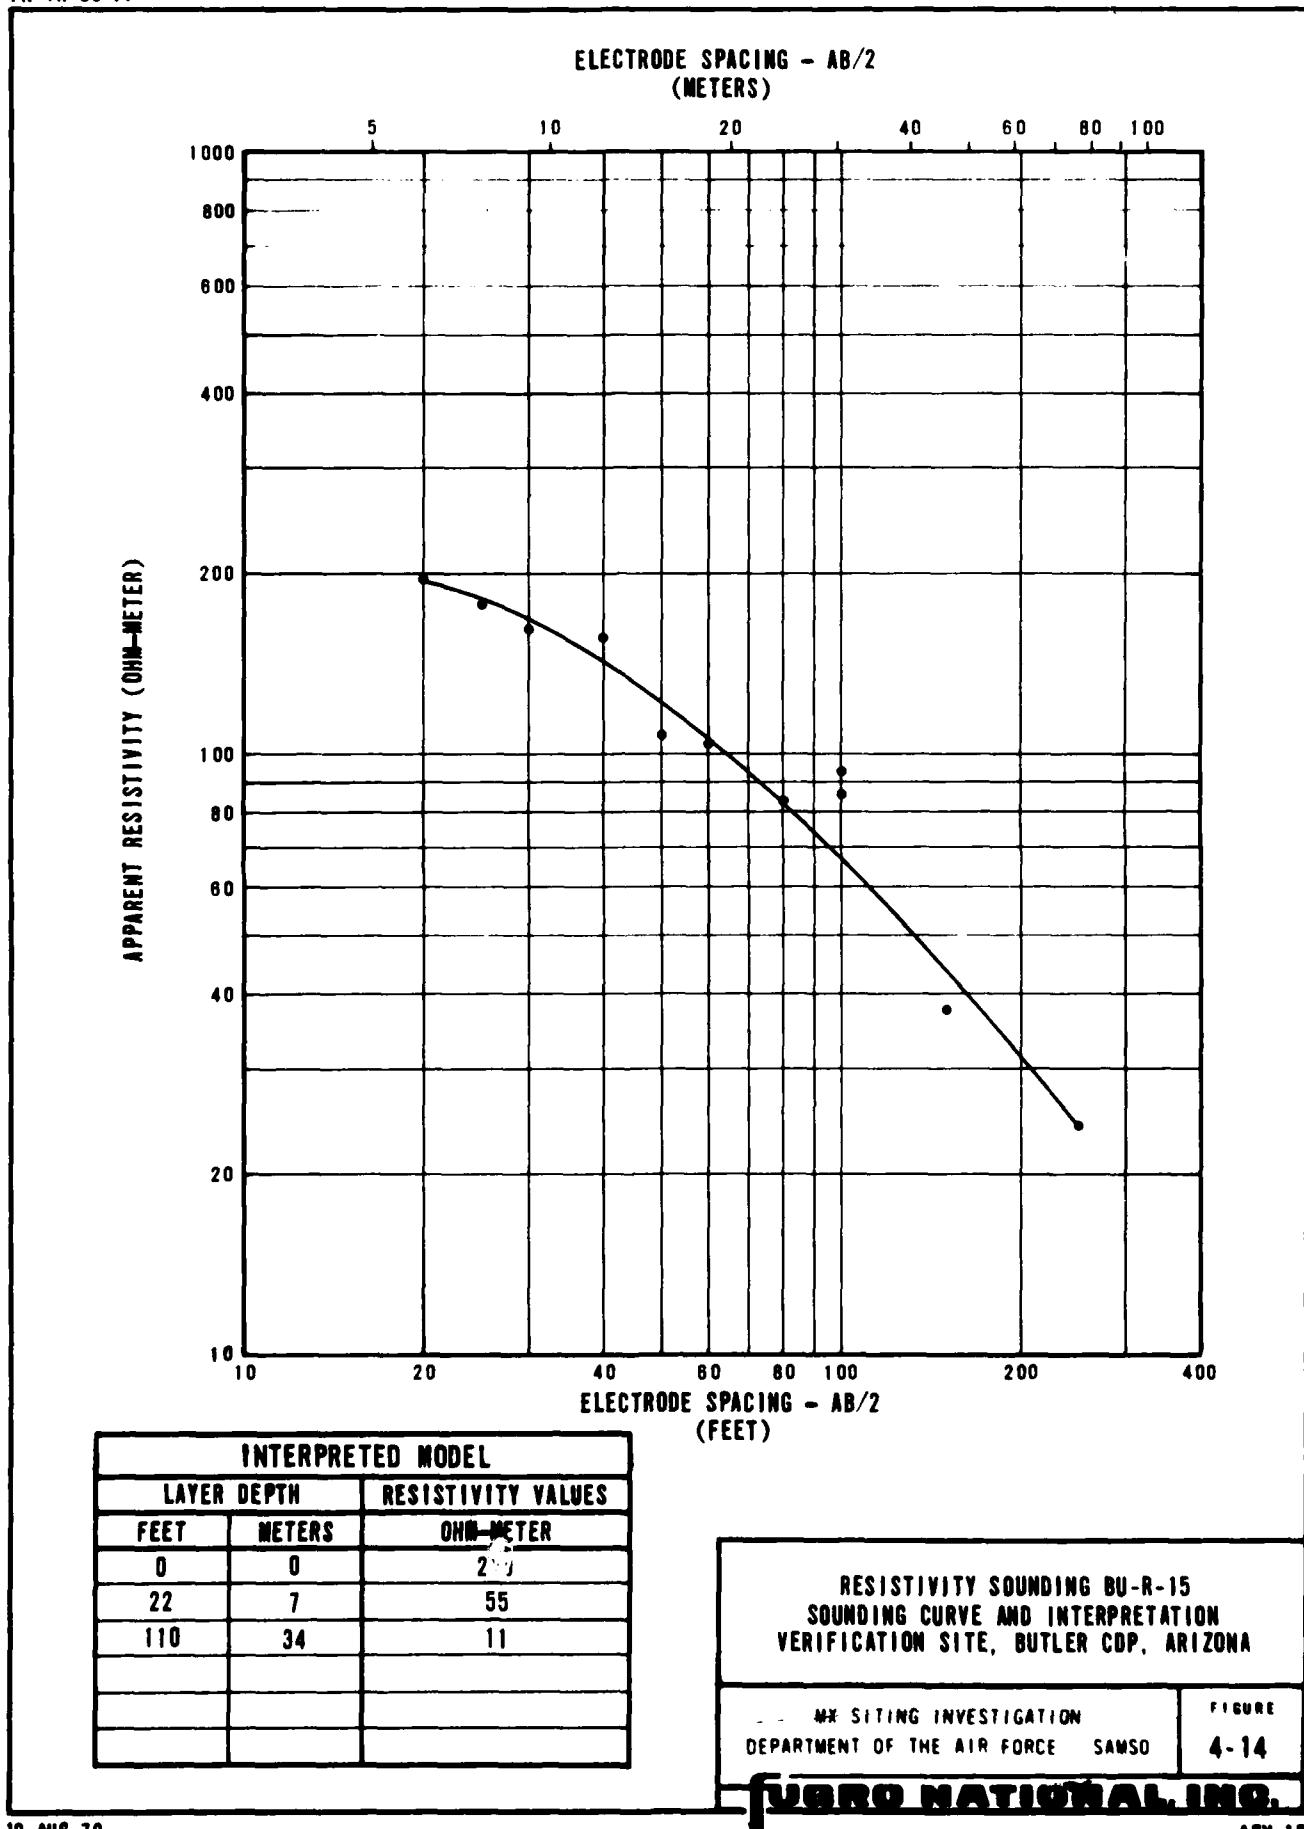

**SECTION 5.0**  
**GRAVITY DATA**

EXPLANATIONS OF GRAVITY DATA

Gravity data were not available in time (prior to June 1979) for incorporation into this report. A supplemental report containing gravity data and results will be issued at a later date.

**SECTION 6.0**  
**BORING LOGS**

EXPLANATIONS OF BORING, TRENCH, AND TEST PIT LOGS

All data from borings, trenches, and test pits are presented on standard Fugro National logs in Sections 6.0 and 7.0. The following explanations are provided as a key to the logs.

A. Designations - Borings, trenches, and test pits are identified as follows:

BU-B-1

BU - abbreviation for the site (e.g., BU-Butler)

B - abbreviation for activity (e.g., B-boring, T-trench,  
P-test pit)

1 - number of activity

B. Sample Type - Different sampling techniques were used and the symbols are explained at the bottom of the boring logs. For details of sampling techniques, see Section A5.0 of Appendix A in Volume I. Horizontal lines, to scale, indicate the depth where sampling was attempted.

C. Percent Recovery - The numbers shown represent the ratio (in percent) of the soil sample recovered in the sampler to the full penetration of the sampler.

D. N Value - Corresponds to standard penetration resistance, which is number of blows required to drive a standard split-spoon sampler for the second and third of three 6-inch (15 cm) increments with a 140-pound (63.5 kg) hammer falling 30 inches (76 cm) (ASTM D 1586-67).

E. Depth - Corresponds to depth below ground surface in meters and feet.

F. Lithology - Graphic representation of the soil and rock types.

G. USCS - Unified Soil Classification System (see Table 6-1 for complete details) symbols.

H. Soil Description - Except in cases where samples were classified based on laboratory test data, the descriptions are based on visual classification. The procedures outlined in ASTM D 2487-69, Classification of Soils for Engineering Purposes, and D 2488-69, Description of Soils (Visual-Manual Procedure) were followed. Solid lines across the column indicate known change in strata at the depth shown.

Definitions of some of the terms and criteria to describe soils and conditions encountered during the exploration follow.

**Gradation :** A coarse-grained soil is well graded if it has a wide range in grain size and substantial amounts of most intermediate particle sizes.

Poorly graded indicates that the soil consists predominantly of one size (uniformly graded) or has a wide range of sizes with some intermediate sizes obviously missing (gap-graded).

<b>Moisture :</b>	Dry	- no feel of moisture
	Slightly Moist	- much less than normal moisture
	Moist	- normal moisture for soil
	Very Moist	- much greater than normal moisture
	Wet	- for soils below the water table (if known)

Soil Identification Procedure (including particles larger than 1 in., and basing fractions on coarsest size weighted)		Information Required for Describing Soils		Laboratory Classification Criteria	
Wide range in grain size and substantial amounts of all intermediate particle sizes	GW	Well graded gravel, gravel- sand mixture, little or no sands	Olive typical name; indicate ap- proximate percentage of sand; angular, rounded, subangular and subrounded grains; condition, cohesion, friction angle, and shear resistance; local or national name; other pertinent descriptive information; and symbols in parentheses	$C_u = \frac{D_{10}}{D_{60}} (D_{10})^3$ $C_c = \frac{D_{10}}{D_{60}} \times D_{60}$	Greater than 4 Between 1 and 3
Predominantly one size or a range of sizes with some intermediate sizes intermixed (additions see CZ below)	GP	Poorly graded gravel, gravel- sand mixture, little or no fine gravel-sand-clay mixtures	Not meeting all gradation requirements for GW	Atterberg limits below "A" line, or $P_f$ less than 4	Above "A" line with $P_f$ between 4 and 7
Nonsilicate fines (for identification pro- cedures see CZ below)	GM	Silty gravel, poorly graded gravel-sand-clay mixtures	For undisturbed soils add informa- tion on stratification, degree of cohesiveness, cementation, moisture conditions, and drainage characteristics	Atterberg limits below "A" line, with $P_f$ greater than 7	Atterberg limits below "A" line with $P_f$ less than 4
Wide range in grain sizes and substantial amounts of all intermediate particle sizes	SW	Well graded sand, if very wet, little or no fines	Example: Silty sand, gravelly; about 20% hard, angular gravel particles 1-in. maximum size; rounded and subangular sand grains come to fine, about 15% non- plastic fines, with low dry strength, well compacted and moist in place; silty sand; (SM)	$C_u = \frac{D_{10}}{D_{60}} (D_{10})^3$ $C_c = \frac{D_{10}}{D_{60}} \times D_{60}$	Greater than 6 Between 1 and 3
Predominantly one size or a range of sizes with some intermediate sizes missing (additions see CZ below)	SP	Poorly graded sand, gravelly sands, little or no fines	Not meeting all gradation requirements for SW	Atterberg limits below "A" line with $P_f$ between 4 and 7	Above "A" line with $P_f$ between 4 and 7
Nonsilicate fines (for identification pro- cedures see AF below)	SM	Silty sand, poorly graded sand- all mixtures	Deviations from 500 sieve size percentage of fines (percentage of fines less than 0.075 mm) greater than 15% and less than 3% (see CZ below)	Atterberg limits below "A" line with $P_f$ greater than 7	Atterberg limits below "A" line with $P_f$ less than 4
Fraction finer than 0.075 mm (additions see CZ below)	SC	Clayey sand, poorly graded sand-clay mixtures	Deviations from 500 sieve size percentage of fines (percentage of fines less than 0.075 mm) greater than 3% and less than 15% (see CZ below)	Deviations from 500 sieve size percentage of fines (percentage of fines less than 0.075 mm) greater than 15% and less than 3% (see CZ below)	Deviations from 500 sieve size percentage of fines (percentage of fines less than 0.075 mm) greater than 3% and less than 15% (see CZ below)
Identifiable Fractions Smaller than No. 40 Sieve Size		Plasticity chart for laboratory classification of fine grained soils			
Dry Strength (consistency characteristics)	None to slight	Touchless Dishonesty (reaction to shaking)	Give typical name; indicate degree and character of plasticity; and maximum water content at which plasticity disappears	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
Medium to high	Quick to slow	None	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands with slight plasticity	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
Medium	None to very slow	AF	Inorganic clay of low to medium plasticity; gravelly clay, sandy clay, silty clays, lean claye	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
High to medium	Slow	CL	Organic silts and organic alli- cyclics of low plasticity	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
Very high	Slow to medium	OL	Inorganic silts, inelastic or diatomaceous; the sandy or loamy soils, clastic silts	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
High to medium	Very high	MF	Organic clay of high plastic- icity; fat clays	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
Very high	Very high	H	Organic clay of medium to high plasticity	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm
Heavy Organic Soils		Peat and other highly organic soils	Peat; color, spotty feel and frequently by smell, texture	60 50 40 30 20 10 0	Deviations from 500 sieve size percentage of fines less than 0.075 mm

From Wagner, 1957.

**Field Identification Procedure for Fine Grained Soils or Fractions**

Approximately ½ in. For field classification purposes, screening is not intended, simply remove by hand the coarse particles that interfere with the tests.

**Tongue Test (Consistency near plastic limit):**

After removing particles larger than No. 40 sieve size, mould a pat of soil about one-half inch cube in size, is moulded to the consistency of soft pottery. If too dry, water must be added and if sticky, the specimen should be spread out in the palm of the hand and allowed to rest on a smooth surface. Then the specimen is rolled out by hand on a smooth surface or between the palms into a thread about one-tenth inch in diameter. The thread is then folded and re-rolled repeatedly. During manipulation the moisture content is gradually reduced and the specimen will become dry and brittle.

After the final rolling, the specimen is cut into small pieces, the pieces should be hammered together and a slight bending action continued until the tongue can be inserted. The tongue is then inserted into the moistened portion of the specimen. The more plastic the cohered clay fraction is, the more easily it will penetrate the tongue. After the tongue has been inserted, the more plastic the clay fraction is, the more easily it will penetrate the tongue. Finally crumble the mass of the cohered clay fraction in the soil. Weakness of the lump below the plastic limit indicates either increasing clay of low plasticity or materials such as talc-like clays and organic clay which occur below the A-line.

Very fine organic clays have a very weak and spotty feel at the plastic limit.

Highly organic clays have a very weak and spotty feel at the plastic limit.

**UNIFIED SOIL CLASSIFICATION SYSTEM**MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSOTABLE  
6-1

FIBRO NATIONAL INC.

**Consistency:** Consistency descriptions of coarse-grained soils (GW, GP, GM, GC, SW, SP, SM, SC) are as follows.

<u>Consistency</u>	<u>N Value (ASTM D 1586-67)</u>
Very Loose	0 - 4
Loose	4 - 10
Medium Dense	10 - 30
Dense	30 - 50
Very Dense	>50

Consistency descriptions of fine-grained soils (ML, CL, MH, CH,) are as follows:

<u>Consistency</u>	<u>Shear Strength (ksf) (kn/m<sup>2</sup>)</u>	<u>Field Guide</u>
Very Soft	0.25      12	Sample with height equal to twice the diameter, sags under own weight
Soft	0.25- 0.50      12 - 24	Can be squeezed between thumb and forefinger
Firm	0.50- 1.00      24- 48	Can be molded easily with fingers
Stiff	1.00- 2.00      48- 96	Can be imprinted with slight pressure from fingers
Very Stiff	2.00- 4.00      96- 192	Can be imprinted with considerable pressure from fingers
Hard	over 4.00      over 192	Cannot be imprinted by fingers

**Grain Shape:** Angular - particles have sharp edges and relatively plane sides with unpolished surfaces.

**Subangular** - particles are similar to angular but have somewhat rounded edges.

**Subrounded** - particles exhibit nearly plane sides but have well-rounded corners and edges.

**Rounded** - particles have smoothly curved sides and no edges.

**Calcareous** : Containing calcium carbonate; presence of calcium carbonate is commonly identified on the basis of reaction with dilute hydrochloric acid.

**Caliche** : Soils cemented by porous calcium carbonate and/or other soluble minerals by upward-moving solutions.

**Degree of Cementation:** (Stages of development of caliche profile)

<u>Stage</u>	<u>Gravelly Soils</u>	<u>Nongravelly Soils</u>
I	Thin, discontinuous pebble coatings	Few filaments or faint coatings
II	Continuous pebble coatings, some interpebble fillings	Few to abundant nodules, flakes, filaments
III	Many interpebble fillings	Many nodules and internodular fillings
IV	Laminar horizon overlying plugged horizon	Increasing carbonate impregnation

**Secondary Material** : Example - Sand with trace to some silt

Trace - 5-12% (by dry weight)

Little - 13-20% (by dry weight)

Some - >20% (by dry weight)

**Plasticity :** Plasticity index is the range of water content, expressed as a percentage of the weight of the oven-dried soil, through which the soil is plastic. It is defined as the liquid limit minus the plastic limit. Descriptive ranges used on the logs include:

Nonplastic (PI, 0 - 4)  
Slightly Plastic (PI, 4 - 15)  
Medium Plastic (PI, 15 - 30)  
Highly Plastic (PI, >30)

**Cobbles and Boulders :** A cobble is a rock fragment, usually rounded by weathering or abrasion, with an average diameter ranging between 3 and 12 inches (8 and 30 cm).

A boulder is a rock fragment, usually rounded by weathering or abrasion, with an average diameter of 12 inches (30 cm) or more.

- I. Remarks - This column was provided on boring and trench logs for comments regarding drilling difficulty, number and size of cobbles or boulders encountered, trench wall stability, loss of drilling fluid in the boring, and other conditions encountered during drilling and excavations.
- J. Dry Density and Moisture Content - The boring logs include a graphical display of laboratory test results for dry density (ASTM D 2937-71) in pounds per cubic foot and kilograms cubic meter and moisture content (ASTM D 2216-71) in percent from representative samples taken during drilling. The symbols are explained at the bottom of the boring logs.

K. Sieve Analysis - The numbers represent the percentage by dry weight (ASTM D 422-63) of each of the following soil components:

GR - Gravel, rock particles that will pass a 3-inch (76 mm) sieve and are retained on No. 4 (4.75 mm) sieve.

SA - Sand, soil particles passing No. 4 sieve and retained on No. 200 (0.075 mm) sieve.

FI - Fines, silt or clay, soil particles passing No. 200 sieve.

L. Atterberg Limits (LL and PI) -

LL - Liquid Limit, the water content corresponding to the arbitrary limit between the liquid and plastic states of consistency of a soil (ASTM D 423-66).

PL - Plastic Limit, the water content corresponding to an arbitrary limit between the plastic and the semisolid state of consistency of a soil (ASTM D 424-59).

PI - Plasticity Index, numerical difference between the liquid limit (LL) and the plastic limit (PL) indicating the range of moisture content within which a soil-water mixture is plastic.

NP - Nonplastic.

M. Miscellaneous Information -

Elevations - indicated elevations on the logs are estimated from topographic maps of the study area, within an accuracy of half the contour interval.

Surficial Geologic Unit - indicates the surficial geologic unit in which the activity is located.

Date Drilled - indicates the period from beginning to completion of the activity.

Drilling Method - signifies the type of drilling procedure used such as rotary wash.


Hole Diameter - nominal size of boring drilled.


Water Level - indicates depth from ground surface to water table where encountered.

**Trench Length** - length at ground surface of final trench excavation.

**Trench Orientation** - bearing of longitudinal trench centerline.

DEPTH METERS	N VALUE	% RECOVERY	SAMPLE TYPE	USCS	LITHOLOGY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS					
								△(pcf)					
								60	90	100	110	120	130
0	0	100	100	SM	CLAYEY SAND	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, angular to subangular, calcareous; some silt.		100	100	100	100	100	100
3	10	100	100	SC	CLAYEY SAND	CLAYEY SAND, yellow brown, fine to coarse, poorly graded, dense, angular to subangular, calcareous; some highly plastic clay; trace of fine sub-angular gravel.	drill chatter	100	100	100	100	100	100
6	20	100	100	SP-SM	SILTY SAND	SILTY SAND, yellow brown, fine to coarse, poorly graded, dense to very dense, angular to subrounded, calcareous; little silt; trace fine angular to sub-rounded gravel; occasional lenses with some gravel	drill chatter	100	100	100	100	100	100
9	30	100	100	SM-SH	SAND	SAND, yellow brown, fine to coarse, poorly to well graded, dense to very dense, subangular to sub-rounded; trace silt; lenses with some fine subangular to subrounded gravel throughout.	drill chatter	100	100	100	100	100	100
12	40	100	100					100	100	100	100	100	100
15	50	100	100					100	100	100	100	100	100
18	60	100	100					100	100	100	100	100	100
20	80	100	100					100	100	100	100	100	100

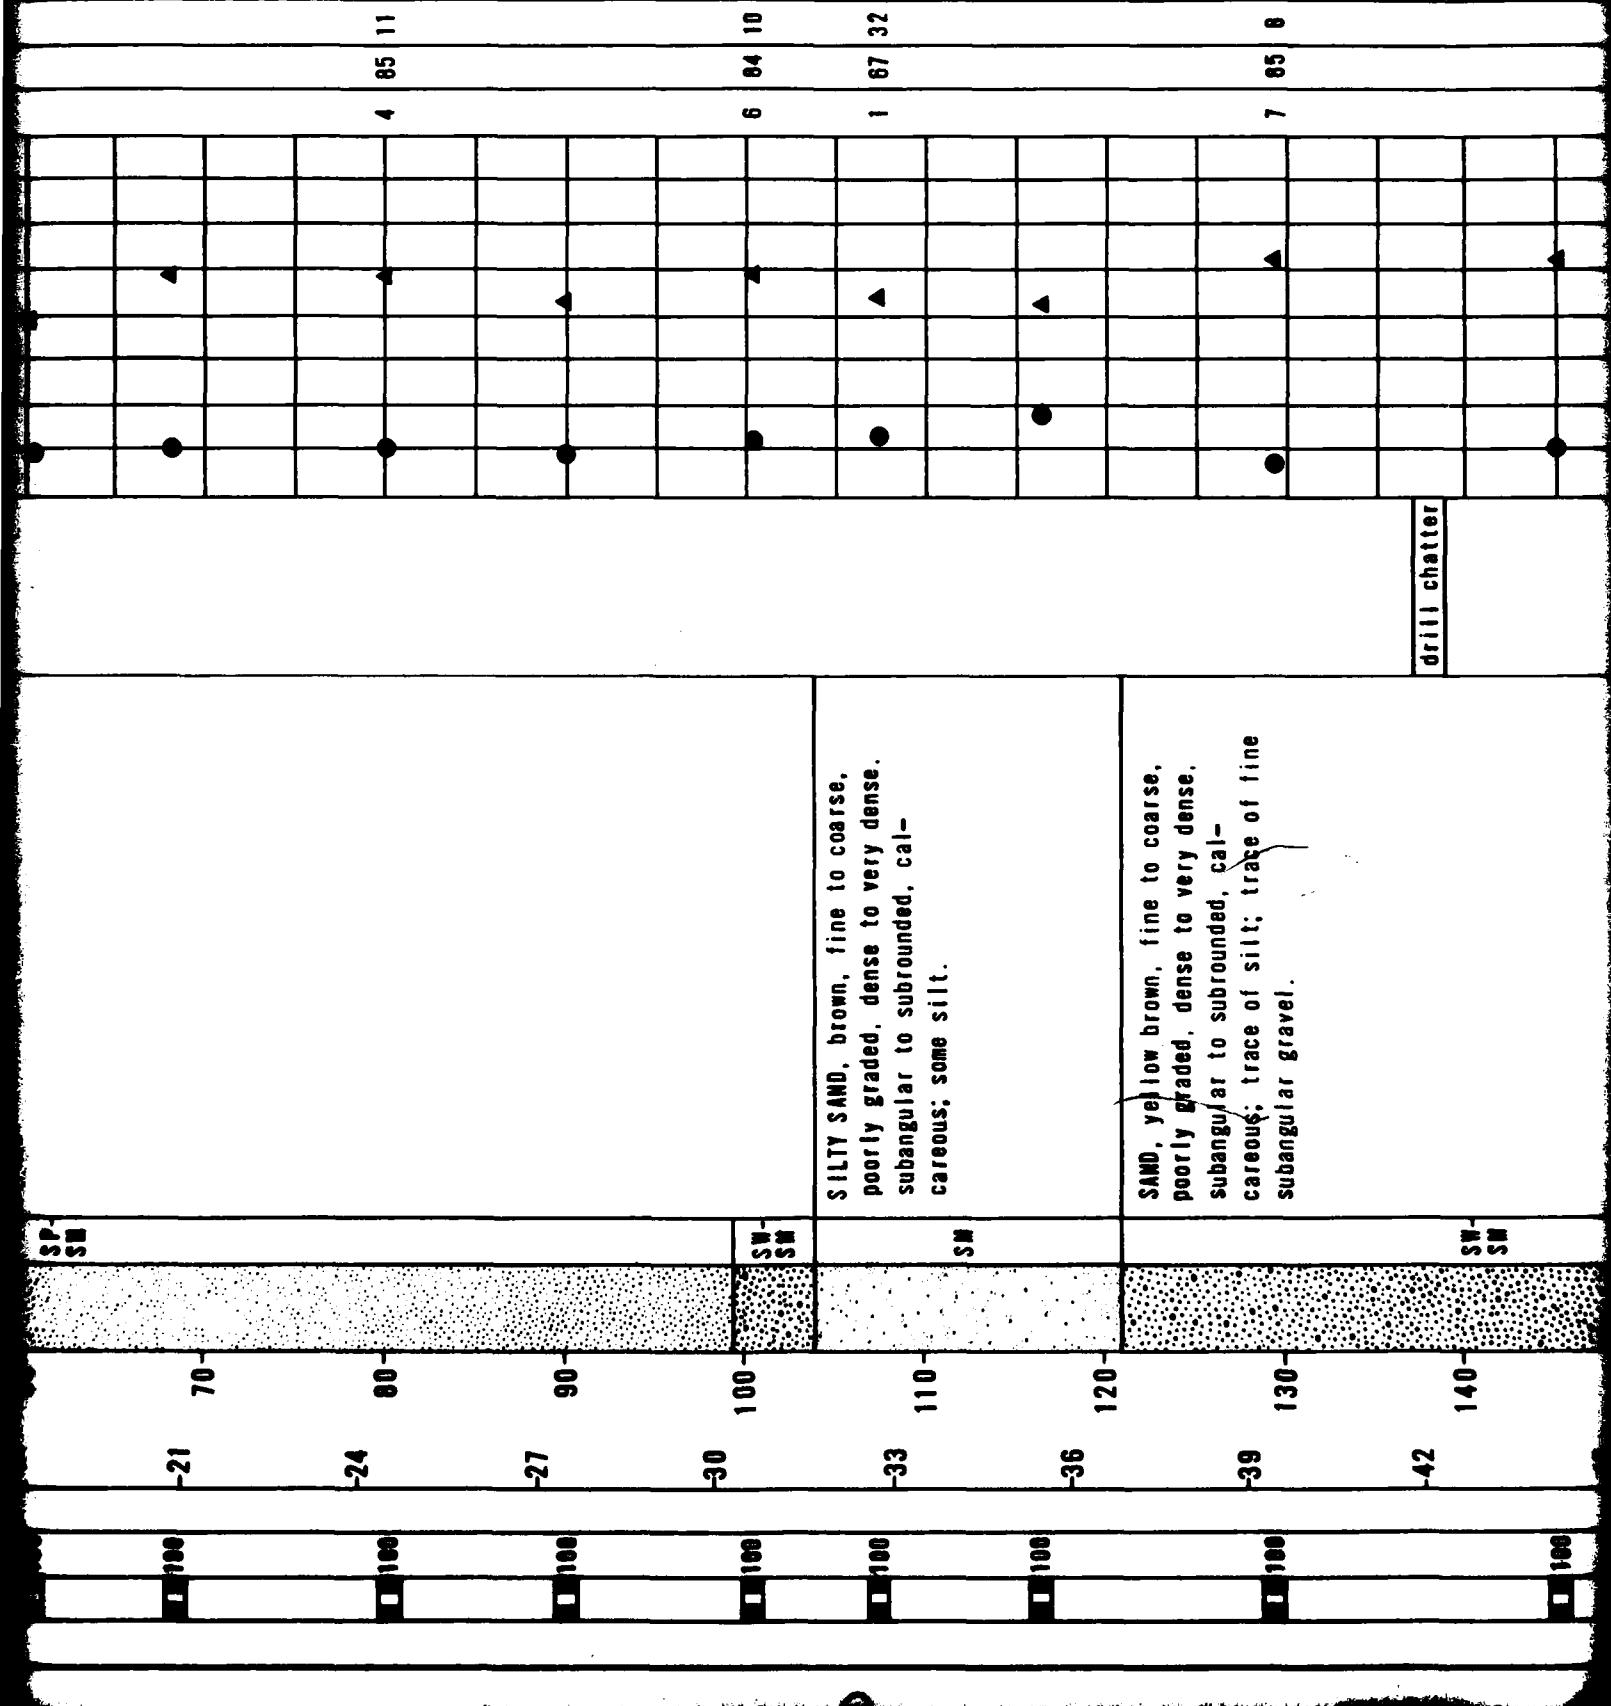

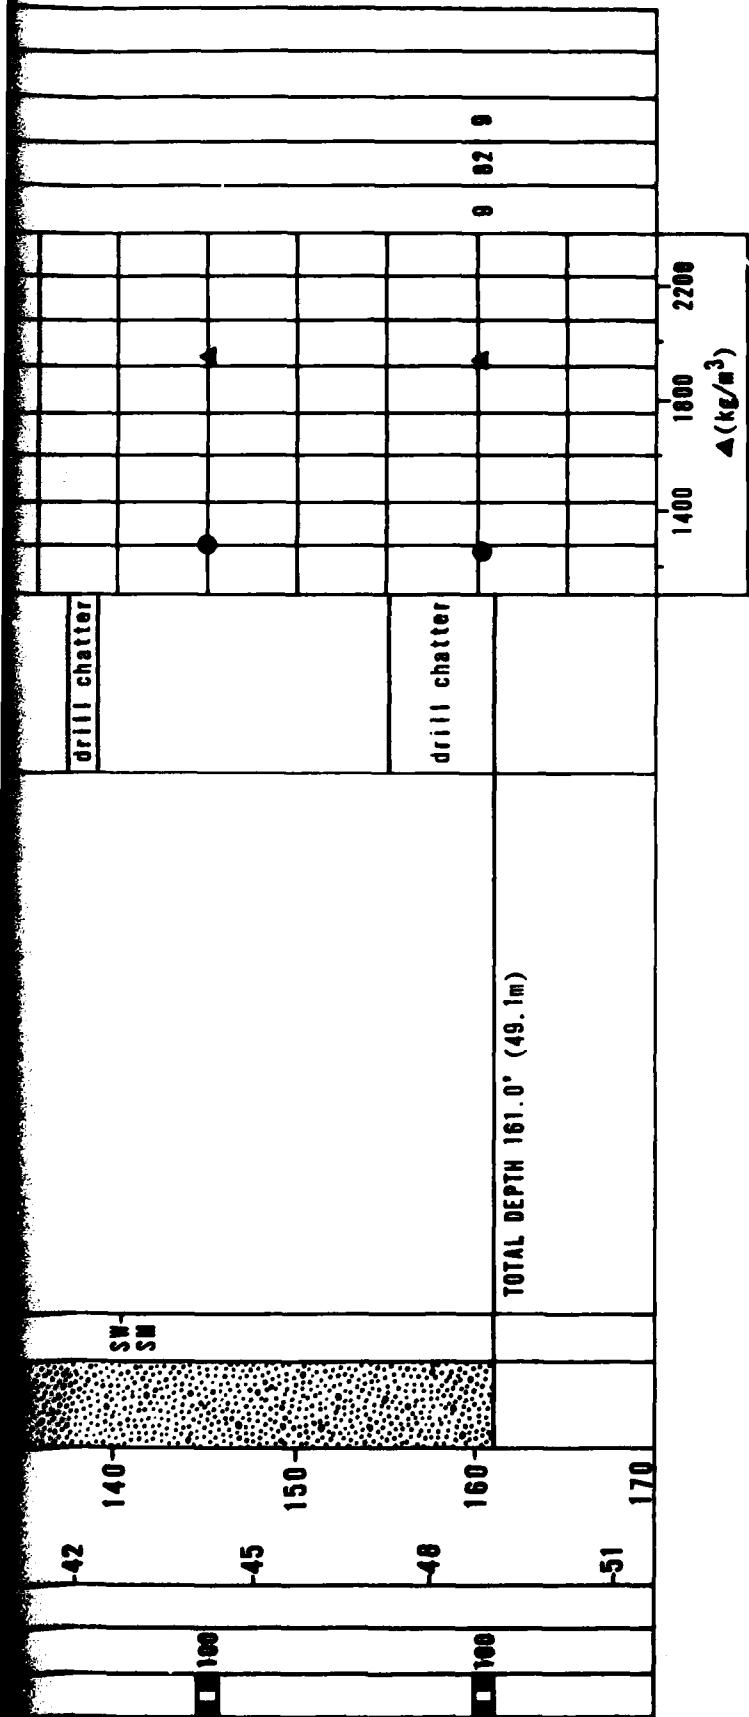

#### EXPLANATION

- FUGRO DRIVE SAMPLE
- BULK SAMPLE
- PITCHER TUBE SAMPLE
- STANDARD PENETRATION TEST SAMPLE
- CORE SAMPLE

N - STANDARD PENETRATION RESISTANCE

▲ - DRY UNIT WEIGHT (ASTM: D-2937-71)

● - MOISTURE CONTENT (ASTM: D-2216-71)

NR - NO RECOVERY

EL ELEVATION	: 1925' (587m)
SURFICIAL GEOLOGIC UNIT	: ASy
DATE DRILLED	: 7 March 1979
DRILLING METHOD	: Rotary Wash
HOLE DIAMETER	: 4 7/8" (124mm)
WATER LEVEL	: Not Encountered

#### BORING DETAILS


LOG OF BORING DU-B-1  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
8-1

FUGRO NATIONAL INC.

SAMPLE TYPE	% RECOVERY	N VALUE	DEPTH FEET	DEPTH METERS	LITHOLOGY	USCS	REMARKS	SIEVE ANALYSIS						
								80 5	90 10	100 15	110 20	120 25	130 30	140 35
■	■	■	0	0	GRAVELLY SAND	SM	yellow brown, fine to coarse, poorly to well graded, medium dense to dense, subangular to subrounded, calcareous; little fine to coarse subangular gravel; trace of silt, layer of silty sand (0.0'-3.0')	15	77	8				
■	■	■	3	10	■	SM	drill chatter							
■	■	■	6	20	■	SM	SILTY SAND, brown, fine to coarse, poorly graded, dense, subangular, some silt.	3	67	30				
■	■	■	9	30	■	ML	SANDY SILT, brown, hard, nonplastic, calcareous; little fine to coarse sand.	0	20	80				
■	■	■	12	40	■	SP- SM	drill chatter	0	13	87				
■	■	■	15	50	■	SP- SM	SILTY SAND, brown, fine to coarse, poorly graded, very dense, subangular to subrounded, calcareous; well cemented 50'-54'; some silt; lenses of sandy silt throughout.	0	58	42				
■	■	■	18	60	■	SM		2	87	31				

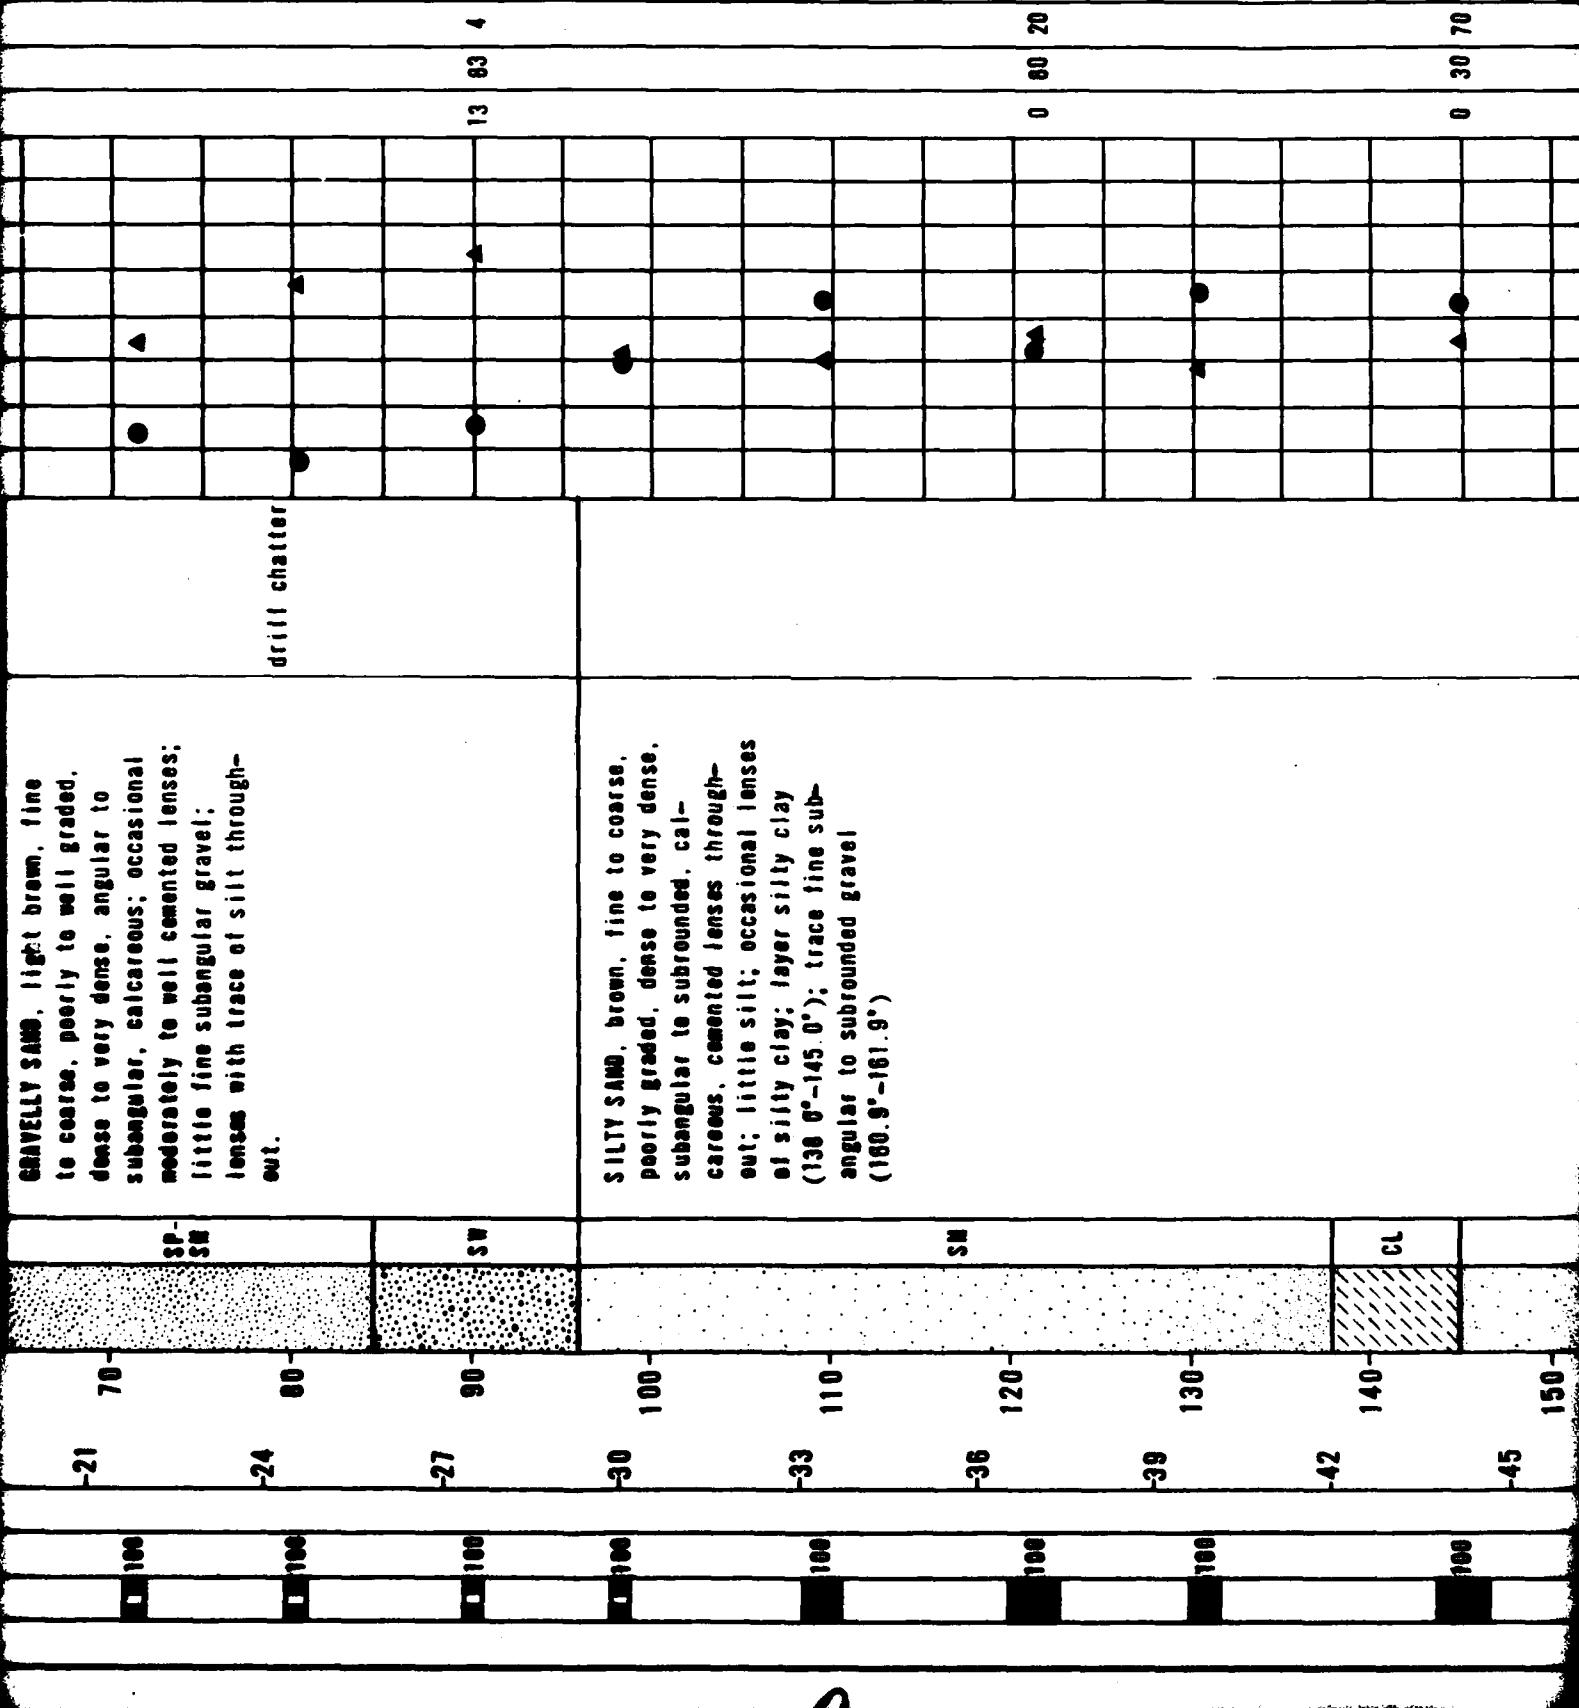

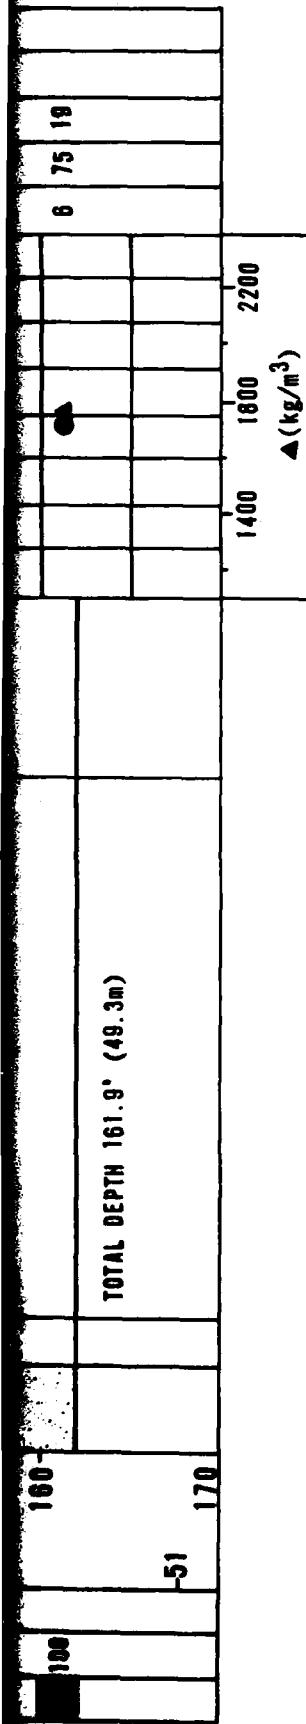

#### EXPLANATION

- FUGRO DRIVE SAMPLE
  - BULK SAMPLE
  - PITCHER TUBE SAMPLE
  - STANDARD PENETRATION TEST SAMPLE
  - CORE SAMPLE
- N - STANDARD PENETRATION RESISTANCE  
 ▲ - DRY UNIT WEIGHT (ASTM: D-2937-71)  
 ● - MOISTURE CONTENT (ASTM: D-2216-71)  
 NR - NO RECOVERY

#### BORING DETAILS

ELEVATION	: 1350' (411m)
SURFICIAL GEOLOGIC UNIT	: A51
DATE DRILLED	: 7 & 8 March 1979
DRILLING METHOD	: Rotary Wash
HOLE DIAMETER	: 4 7/8" (124mm)
WATER LEVEL	: Not Encountered

#### LOG OF BORING BU-B-2 VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO


FIGURE

8-2

FUGRO NATIONAL INC.

AFY-08

卷之三

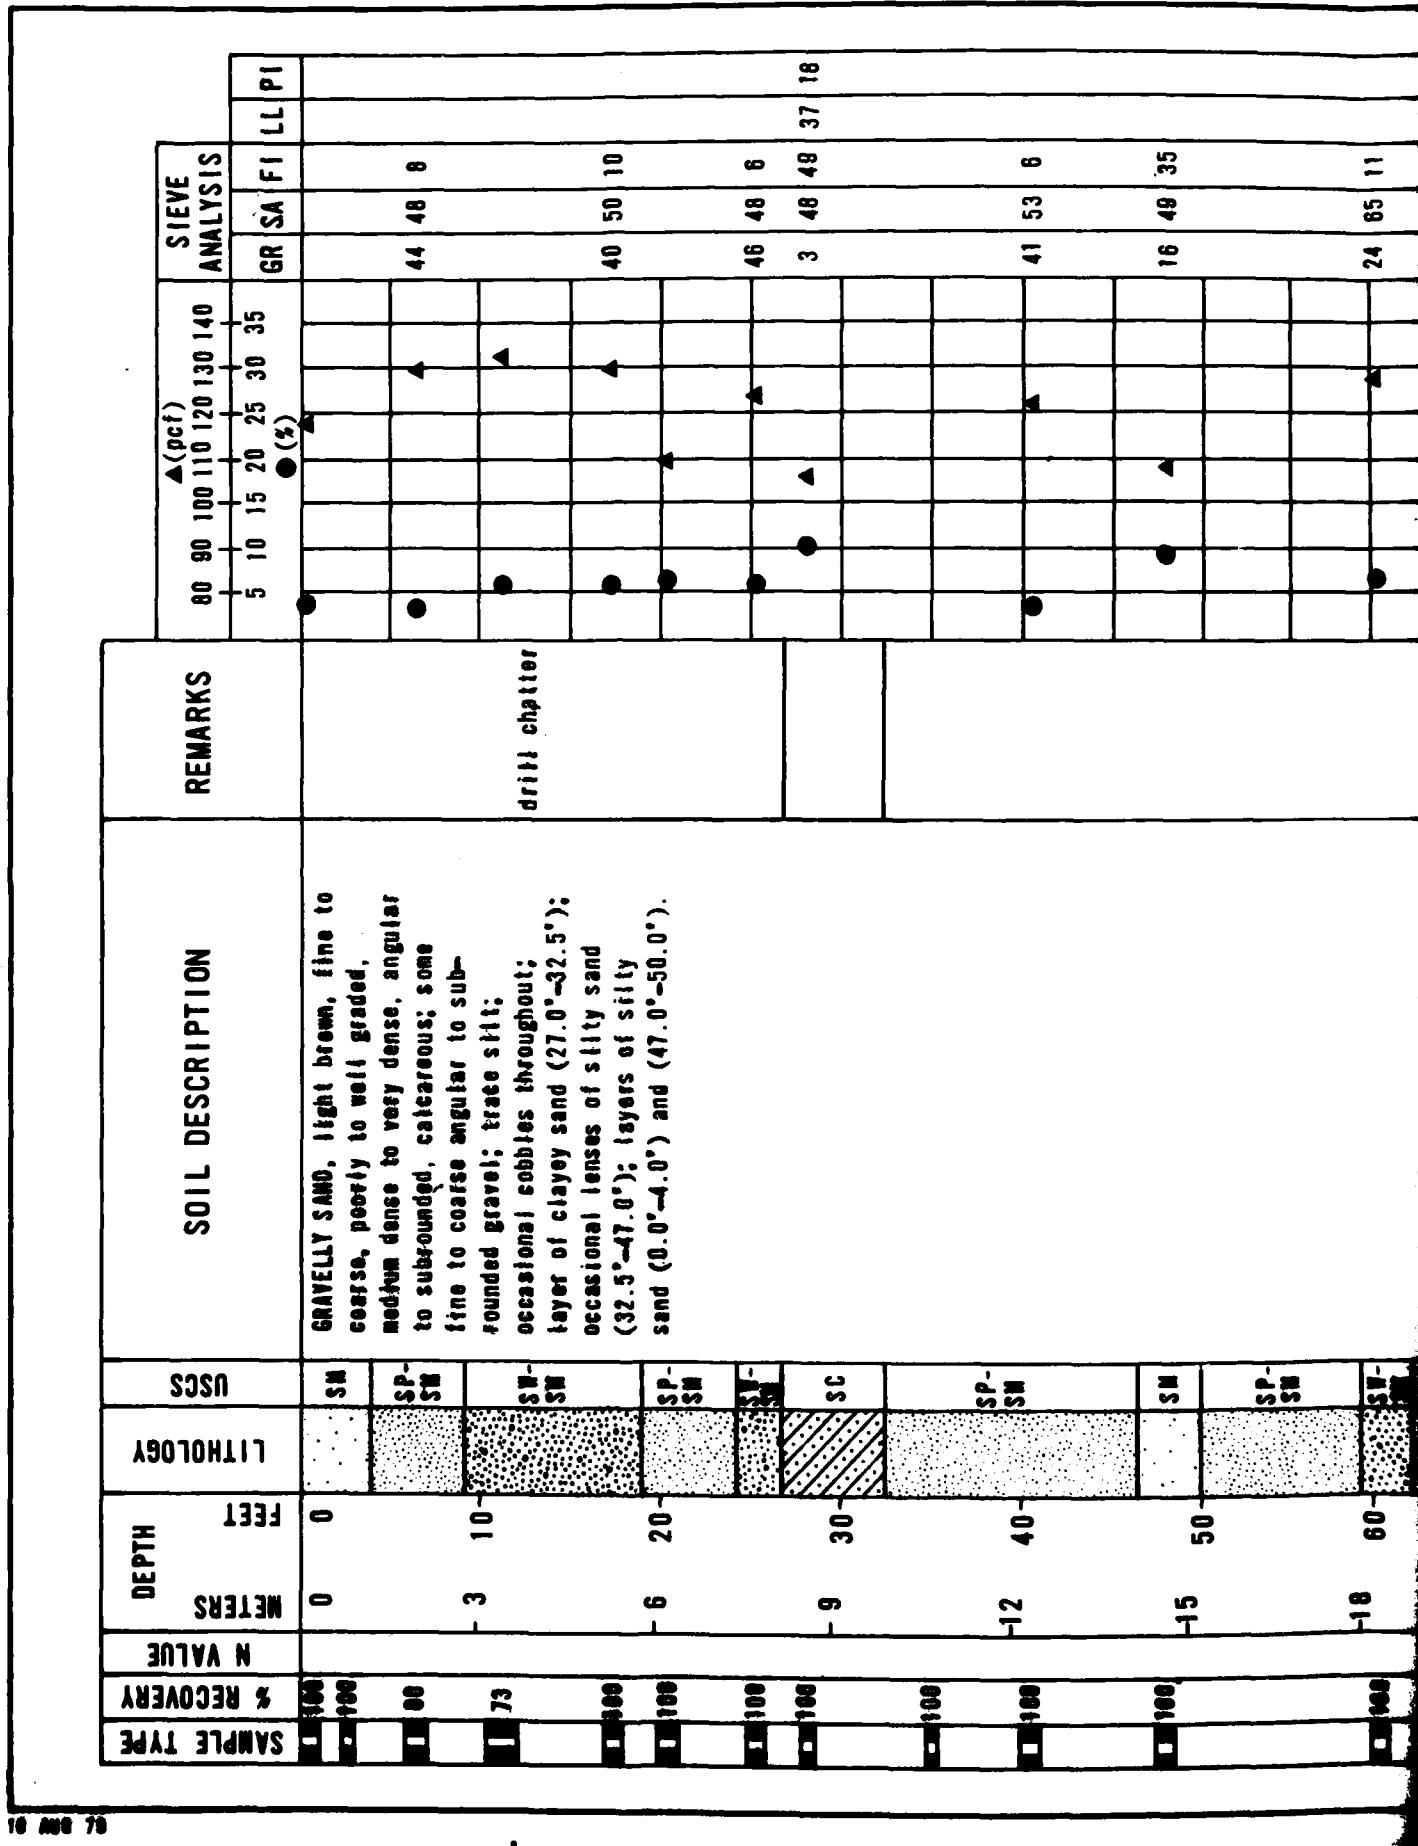



19 75 6

37 53 10

21 86 13

drill chatter

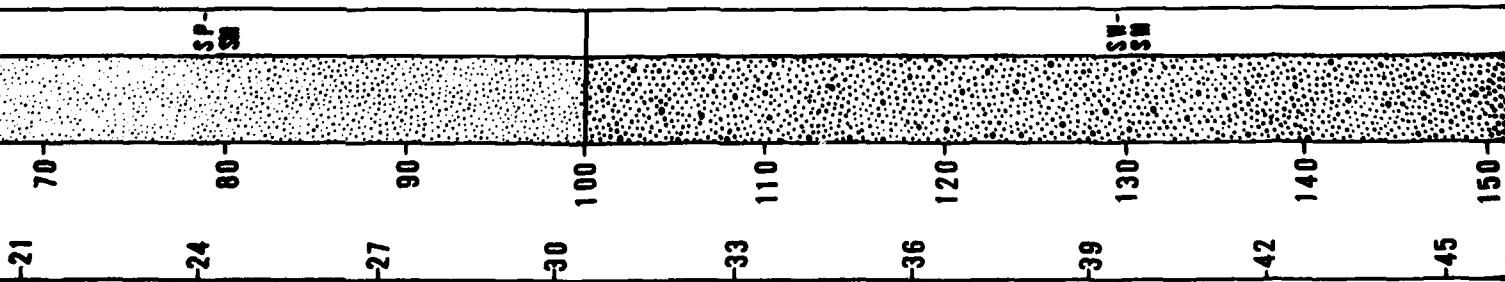

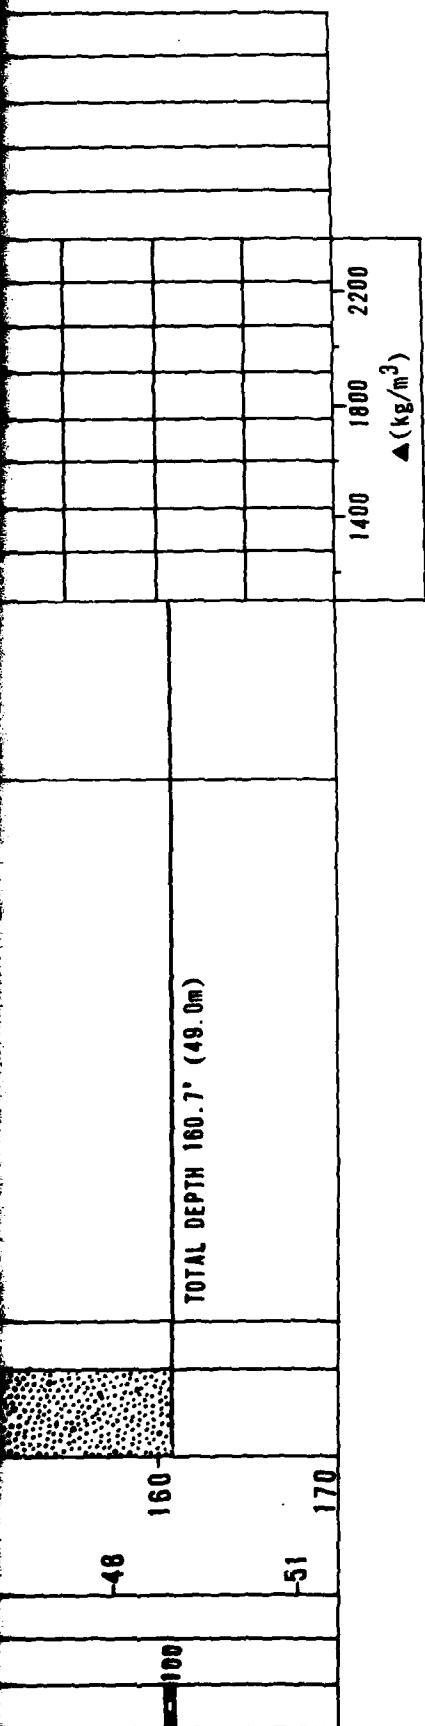

#### EXPLANATION

- FUGRO DRIVE SAMPLE
- BULK SAMPLE
- PITCHER TUBE SAMPLE
- STANDARD PENETRATION TEST SAMPLE
- CORE SAMPLE

N - STANDARD PENETRATION RESISTANCE

- ▲ - DRY UNIT WEIGHT (ASTM: D-2937-71)
- - MOISTURE CONTENT (ASTM: D-2216-71)

NR - NO RECOVERY

#### LOG OF BORING BU-B-3 VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE

6-3



**FUGRO NATIONAL, INC.**


AFV-06

checked by \_\_\_\_\_

APPROVED BY \_\_\_\_\_

SAMPLE TYPE	% RECOVERY	N VALUE	METERS	FEET	DEPTH	LITHOLOGY	USCS	REMARKS	▲(pcf)						SIEVE ANALYSIS							
									80	90	100	110	120	130	140	5	10	15	20	25	30	35
-	-	-	-	-	0	GRAVELY SAND, light brown, fine to coarse, poorly to well graded, loose to very dense, angular to subangular, calcareous; trace to some fine to coarse angular to subrounded gravel; trace to some silt.	SI								41	42	17					
-	-	-	-	-	3		SI									21	52	27				
-	-	-	-	-	6		SI									10	81	9				
-	-	-	-	-	9	CLAYEY SAND, light brown, fine to coarse, poorly graded, dense, angular to subangular, calcareous; cemented; some silty clay; little fine to coarse gravel.	SC								18	56	26	46	26			
-	-	-	-	-	12	SILTY SAND, brown, fine to coarse, poorly graded, dense to very dense, angular to subangular, calcareous; frequent weakly to moderately cemented lenses (81.5°-127.0°) and (142.0°-161.0°); little to some silt; trace to little fine to coarse angular to subangular gravel.	SI								9	64	27					
-	-	-	-	-	15																	
-	-	-	-	-	18	Irregular drill chatter																
-	-	-	-	-	20																	
-	-	-	-	-	30																	
-	-	-	-	-	40																	
-	-	-	-	-	50																	
-	-	-	-	-	60	Irregular drill chatter																

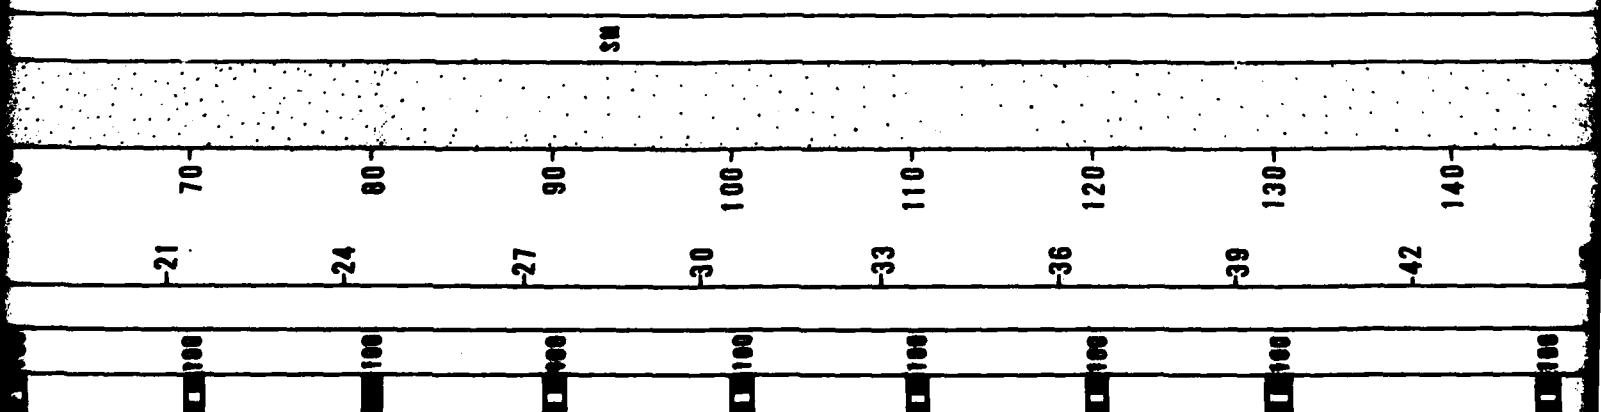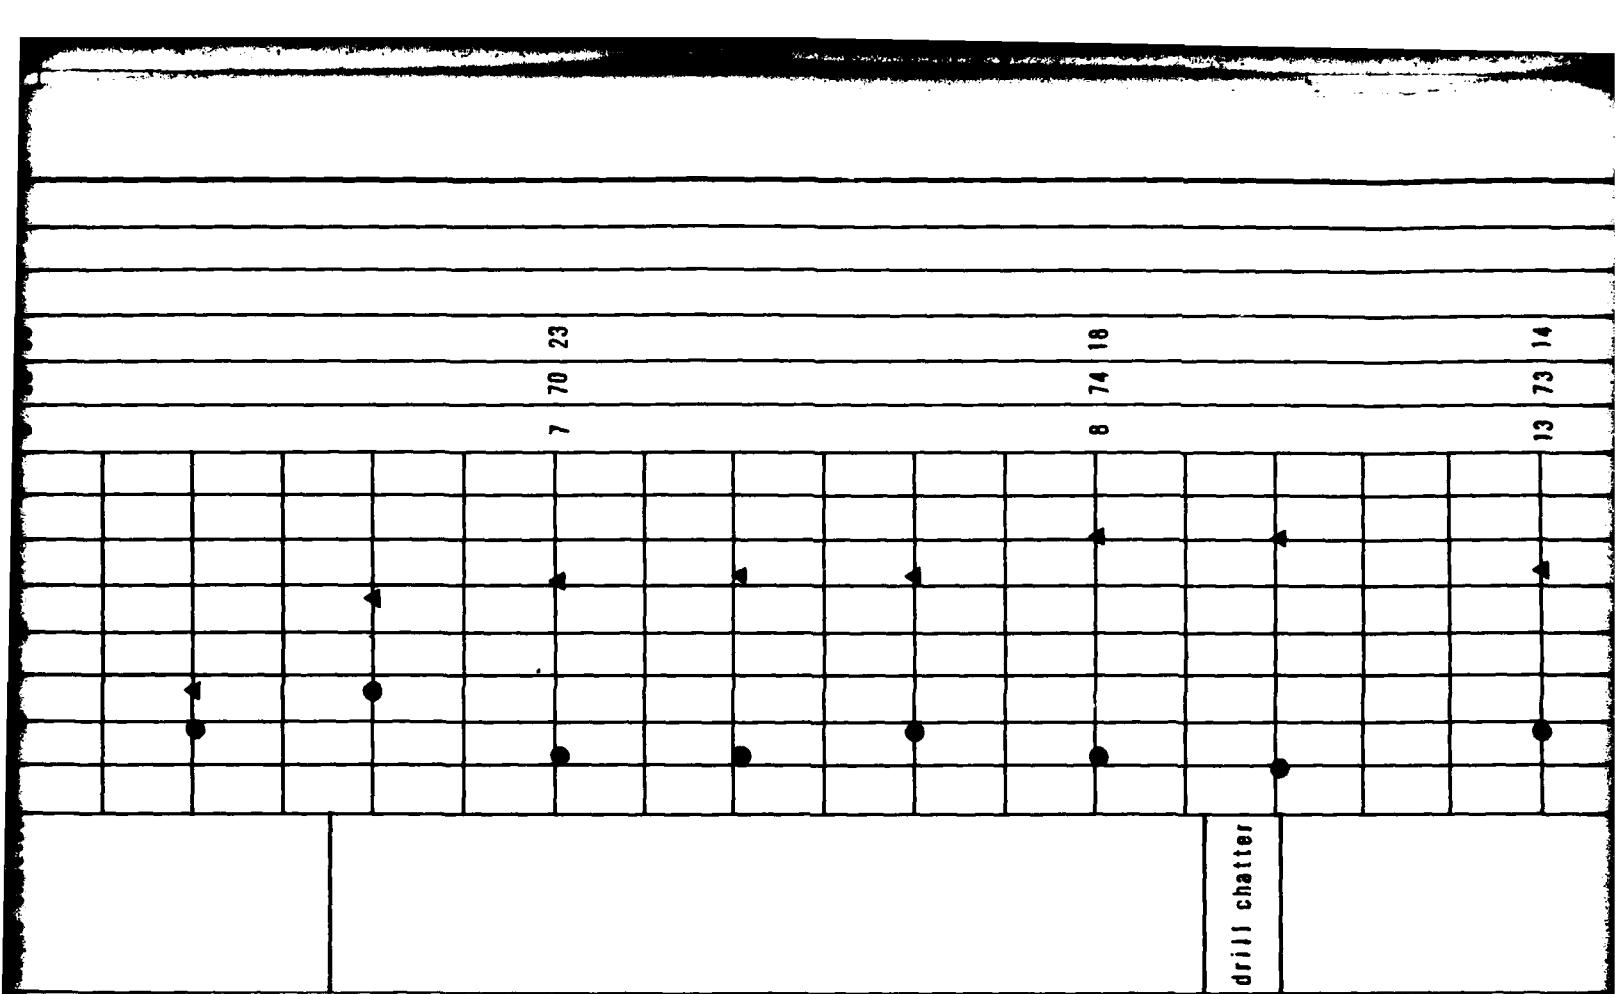

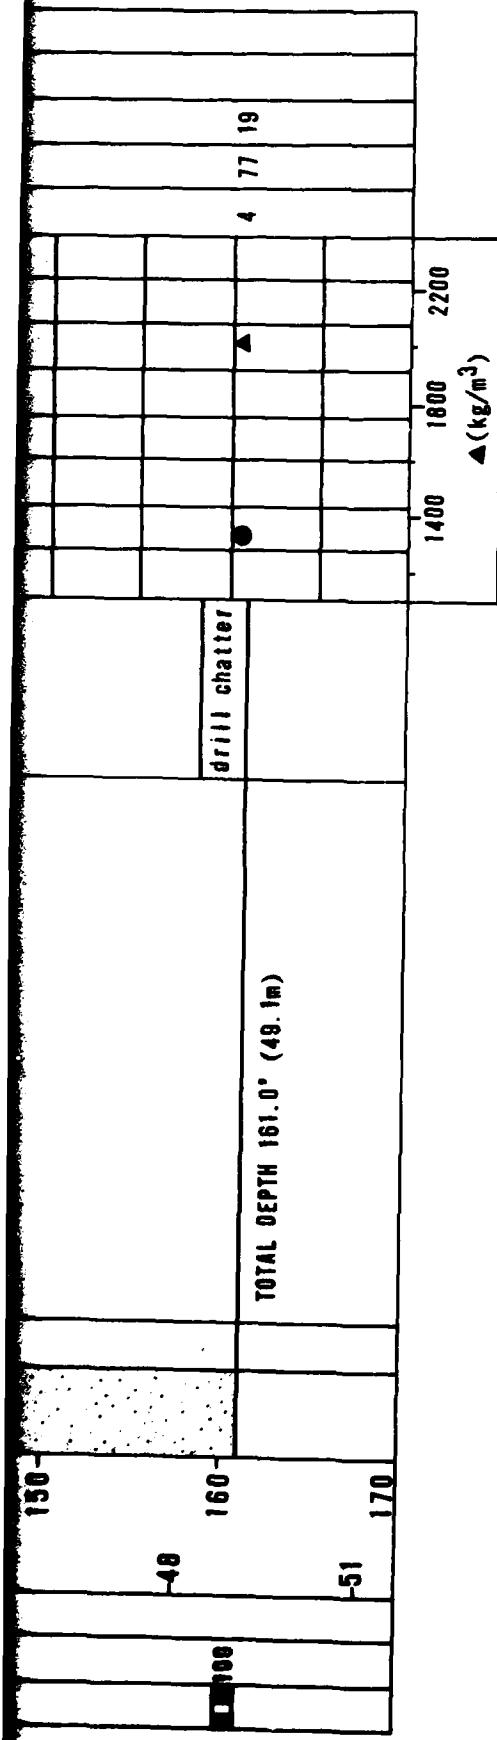

#### EXPLANATION

- FUGRO DRIVE SAMPLE
  - BULK SAMPLE
  - PITCHER TUBE SAMPLE
  - STANDARD PENETRATION TEST SAMPLE
  - CORE SAMPLE
- N - STANDARD PENETRATION RESISTANCE  
 ▲ - DRY UNIT WEIGHT (ASTM: D-2937-71)  
 ● - MOISTURE CONTENT (ASTM: D-2216-71)  
 NR - NO RECOVERY

#### LOG OF BORING BU-B-4 VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
8-4

FUGRO NATIONAL INC.

AFV-06

3

CARTERET BY \_\_\_\_\_

APPROVED BY \_\_\_\_\_

FN-TB-28-11

SAMPLE TYPE	% RECOVERY	N VALUE	DEPTH METERS	FEET	LITHOLOGY	USCS	SOIL DESCRIPTION							REMARKS							SIEVE ANALYSIS							
							80	90	100	110	120	130	140	● (%)	GR	SA	FI	LL	PI									
100	100	100	0	0	GRAVELLY SAND, yellow brown, fine to coarse, poorly graded, medium dense to dense, angular to subrounded, calcareous; some fine to coarse gravel; some silt.	SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
100	100	100	3	10	SAND, yellow brown, fine to coarse, poorly graded, medium dense to dense, subangular, calcareous; trace of silt.	SP-SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
100	100	100	6	20	SALTY SAND, light brown, fine to coarse, poorly to well graded, medium dense to very dense, angular to subangular, calcareous; some moderately to well cemented lenses; some silt; trace to little fine angular to subangular gravel; layer of gravelly sand (23.0'-27.0').	SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
100	100	100	9	30		SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
100	100	100	12	40		SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
100	100	100	15	50		SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
100	100	100	18	60		SP-SM	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

-21 70 SILTY SAND, light brown, fine to coarse, poorly graded, dense to very dense, angular to sub-angular, calcareous; weakly to moderately cemented lenses throughout; some silt; little fine angular to subangular gravel.

24 80

SP-SM  
-27 90

100  
-30 100

110  
-33

120  
-36

SP-SM  
-39 130

140  
-42


145

irregular  
drill chatter

20 55 25

35 54 11

33 53 14

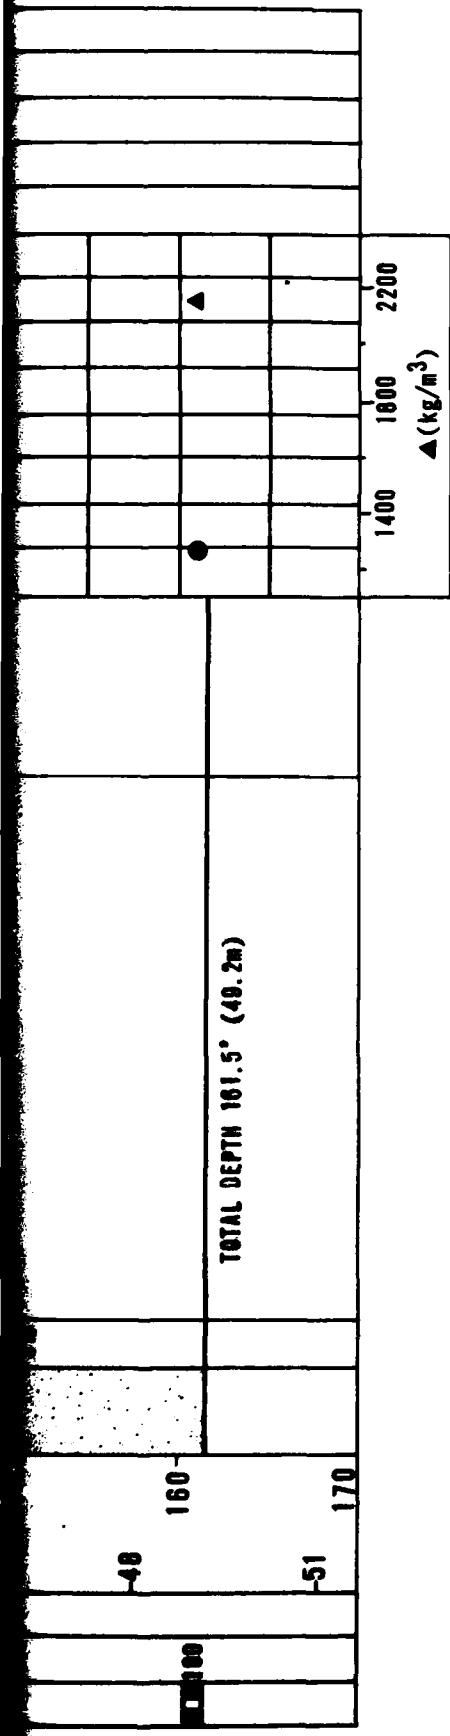

LOG OF BORING SU-5-5 VERIFICATION SITE, BUTLER CDP, ARIZONA	
MX SITING INVESTIGATION DEPARTMENT OF THE AIR FORCE - SAMSO	FIGURE 8-5
<b>FUGRO NATIONAL INC.</b>	

CUREUP BY

APPROVED BY

PN-TR-2B-1

SOIL DESCRIPTION		REMARKS						SIEVE ANALYSIS					
		80	90	100	110	120	130	140	GR	SA	FI	LL	PI
FEET	METERS	%	%	%	%	%	%	(%)					
0	0	SW	SW	GP-GM	GP-GM	GW-GM	GW-GM		33	43	24		
3	10								28	68	4		
6	20								52	42	6		
9	30									43	41	16	
12	40												
15	50												
18	60												
21	70												

44 38 18

14 49 37

30 55 15

7 64 28

15 48 37

6 70 24

Irregular  
drill chatter

SILTY SAND, brown, fine to coarse,  
poorly graded, dense to very dense,  
angular to subrounded, calcareous;  
occasional weak to moderately  
cemented lenses; little to some  
silt; trace to some gravel.

-21

70

-24

80

-27

90

-30 100

-33 110


-36 120

-39 130

-42 140

-45 150

24

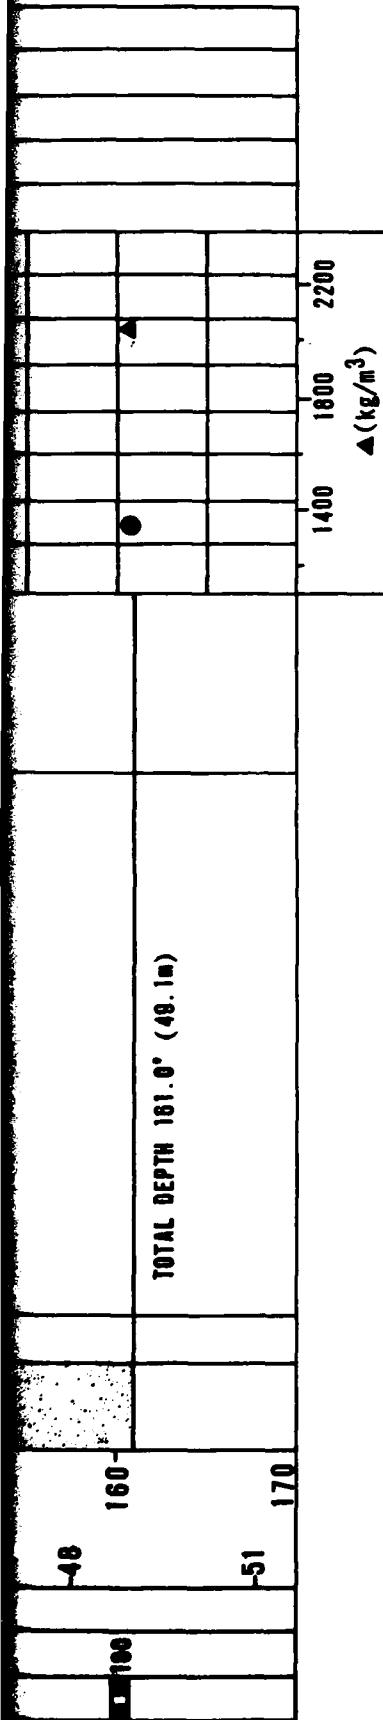

#### EXPLANATION

- FUGRO DRIVE SAMPLE
  - BULK SAMPLE
  - PITCHER TUBE SAMPLE
  - STANDARD PENETRATION TEST SAMPLE
  - CORE SAMPLE
- N - STANDARD PENETRATION RESISTANCE  
 ▲ - DRY UNIT WEIGHT (ASTM: D-2937-71)  
 ● - MOISTURE CONTENT (ASTM: D-2216-71)  
 NR - NO RECOVERY

LOG OF BORING LP-B-8	
VERIFICATION SITE, LA POSA CDP., ARIZONA	
MX SITING INVESTIGATION DEPARTMENT OF THE AIR FORCE - SAMSO	FIGURE 8-8
<b>FUGRO NATIONAL, INC.</b>	

**SECTION 7.0**  
**TRENCH AND TEST PIT LOGS**

**FN-TR-28-II**

**7-1**

**EXPLANATION OF TRENCH AND TEST PIT LOGS**

**See Section 6.0, "Boring Log", for explanations.**

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0				SILTY SAND, light brown to brown, fine to coarse, poorly graded, dry to slightly moist, angular, calcareous; little silt (0.0'-3.5'); some silt (4.0'-10.0'); layer of clayey sand (3.5'-4.0'), stage III caliche (4.0'-10.0').	vertical walls caving slightly	1	84	15		
	2		SM	medium dense			4	49	47	30	16
	4	SC									
	6										
	8										
	10		SM								
	12		SP-SM	dense	GRAVELLY SAND, light brown, fine to coarse, poorly graded, dry, sub-angular, calcareous; little to some fine subangular gravel; trace silt.	vertical walls stable					
	14				TOTAL DEPTH 14.0' (4.3m)						
	16										
	18										
	20										

TRENCH DETAILS

SURFACE ELEVATION : 1610' (491m)  
 DATE EXCAVATED : 8 MARCH 1978  
 SURFICIAL GEOLOGIC UNIT: A5y  
 TRENCH LENGTH : 18' (4.9m)  
 TRENCH ORIENTATION : NE-SW

LOG OF TRENCH BU-T-1  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
7-1

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS					
								GR	SA	FI	LL	PI	
	0	0				GRAVELLY SAND, brown, fine to coarse, poorly graded, dry, angular to sub-angular, calcareous; fine to coarse, some subangular to subrounded gravel; trace to little silt; occasional cobbles to 11" size; stage I caliche (3.0'-6.0").			37	46	17		
	2			SM									
	4												
	6												
	8												
	10			SP-SM									
	12												
	14					TOTAL DEPTH 14.0' (4.3m)							
	16												
	18												
	20												

**TRENCH DETAILS**

SURFACE ELEVATION : 1830' (588m)  
 DATE EXCAVATED : 8 MARCH 1979  
 SURFICIAL GEOLOGIC UNIT: A5y  
 TRENCH LENGTH : 18' (4.8m)  
 TRENCH ORIENTATION : E-W

LOG OF TRENCH BU-T-2  
 VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
 DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
 7-2

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SAND, light brown, fine to coarse, poorly graded, slightly moist, sub-angular, calcareous; trace silt						
	2											
	-1			SP-SM	medium dense							
	4											
	8											
	-2											
	8											
	-3			SW-SM	dense	GRAVELLY SAND, red brown, fine to coarse, well graded, dry, sub-angular, calcareous; some fine to coarse subangular gravel; trace silt; stage 1 caliche (9.0'-14.0').						
	10											
	12											
	-4											
	14											
						TOTAL DEPTH 14.0' (4.3m)						
	-5											
	16											
	18											
	-6											
	20											

TRENCH DETAILS

SURFACE ELEVATION : 1425' (434m)  
 DATE EXCAVATED : 12 MARCH 1979  
 SURFICIAL GEOLOGIC UNIT : A5y/A1  
 TRENCH LENGTH : 18' (4.8m)  
 TRENCH ORIENTATION : N-S

LOG OF TRENCH BU-T-3  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
7-3

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SILTY SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; some silt; little fine to coarse subangular gravel.		15	51	34		
	2		SM		SAND, light brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; trace fine subangular gravel; trace silt						
	4			medium dense							
	6	SP-SM									
	8		ML	very stiff	SANDY SILT, brown, dry, nonplastic; some fine to coarse angular sand.		0	35	65		
	10				SILTY SAND, brown, fine to coarse, poorly graded, dry, subangular; some silt.						
	12		SM	dense							
	14				TOTAL DEPTH 14.0' (4.3m)						
	16										
	18										
	20										

TRENCH DETAILS

SURFACE ELEVATION : 1350' (411m)  
 DATE EXCAVATED : 12 MARCH 1979  
 SURFICIAL GEOLOGIC UNIT: ASI  
 TRENCH LENGTH : 18' (4.9m)  
 TRENCH ORIENTATION : E-W

LOG OF TRENCH BU-T-4  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SIZING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
7-4

FUGRO NATIONAL, INC.

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SILTY SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; little to some silt; trace fine subangular gravel;		4	69	27		
		2		SM	medium dense			9	78	13		
	-1											
	4											
	-2			SP-SM	medium dense	SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; trace fine subangular gravel; trace silt; stage II caliche (8.5'-10.0').	vertical walls stable					
	6											
	8											
	-3											
	10					TOTAL DEPTH 10.0' (3.0m)						
	12											
	-4											
	14											
	-5											
	16											
	-6											
	18											
	-8											
	20											

TRENCH DETAILS

SURFACE ELEVATION : 1925' (587m)  
 DATE EXCAVATED : 13 MARCH 1978  
 SURFICIAL GEOLOGIC UNIT: A5y  
 TRENCH LENGTH : 18' (4.8m)  
 TRENCH ORIENTATION : NW-SE

**LOG OF TRENCH BU-T-5  
VERIFICATION SITE, BUTLER CDP, ARIZONA**

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
7-5

**FUGRO NATIONAL INC.**

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some silt; trace fine angular to subangular gravel; stage II caliche (4.0'-5.0')	vertical walls stable					
		1										
		2			medium dense							
		3		SM								
		4			dense							
		5										
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1350' (411m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-1

	0	0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; little silt; little fine to coarse angular gravel	vertical walls stable					
		1										
		2										
		3		SM	medium dense							
		4										
		5										
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1600' (512m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-2

LOGS OF TEST PITS BU-P-1 AND BU-P-2 VERIFICATION SITE, BUTLER CDP, ARIZONA	
MX SITING INVESTIGATION DEPARTMENT OF THE AIR FORCE - SAMSO	
FIGURE 7-6	

FUGRO NATIONAL INC.

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; little silt, trace fine angular gravel.	vertical walls stable					
	1		SM	medium dense							
	2				SAND, light brown, fine to coarse, well graded, dry, angular, calcareous; trace silt; trace fine angular gravel.						
	3		SW-SM	dense		vertical walls caving slightly					
	4										
	5				TOTAL DEPTH 5.0' (1.5m)						

SURFACE ELEVATION: 1800' (549m)

SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-3

	0 0				SANDY CLAY, brown, slightly moist, slightly plastic, calcareous; some fine to medium subangular sand.	vertical walls stable					
	1		CL	firm							
	2				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some silt; trace fine subangular gravel.						
	3		SM	medium dense							
	4		SP-SM	dense	SAND, light brown, fine, poorly graded, dry, angular, calcareous; trace silt.						
	5				TOTAL DEPTH 5.0' (1.5m)						

SURFACE ELEVATION: 1455' (443m)

SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-4

LOGS OF TEST PITS BU-P-3 AND BU-P-4  
VERIFICATION SITE, BUTLER COP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
7-7

FEDERAL NATIONAL INC.

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some silt; stage III caliche (2.8'-4 5').						
	1			medium dense							
	2										
	3		SM								
	4			dense							
	5										
TOTAL DEPTH 5.0' (1.5m)											

SURFACE ELEVATION: 1510' (460m)  
 SURFICIAL GEOLOGIC UNIT: A5y/A3d

## LOG OF TEST PIT BU-P-5

	0 0	SC			GRAVELLY SAND, light brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some fine to coarse subangular gravel; some silty clay; stage I caliche (1.0'-2 5').						
	1			medium dense							
	2										
	3		SM		SILTY SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; some silt; trace fine subangular gravel; disseminated caliche (2.5'-5.0').						
	4										
	5										
TOTAL DEPTH 5.0' (1.5m)											

SURFACE ELEVATION: 1560' (475m)  
 SURFICIAL GEOLOGIC UNIT: A5i


## LOG OF TEST PIT BU-P-6

LOGS OF TEST PITS BU-P-5 AND BU-P-6  
 VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
 DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
 7-8

FUGRO NATIONAL, INC.

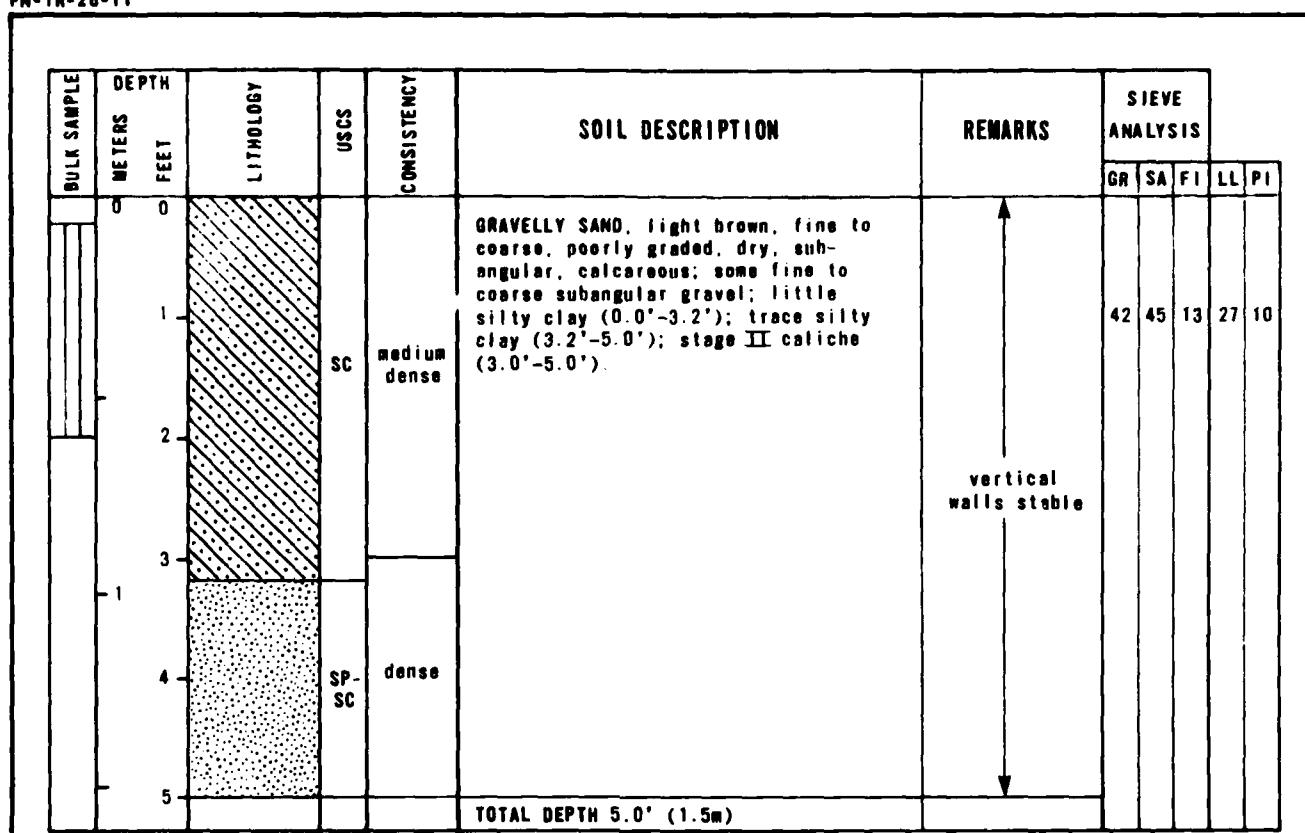

## LOG OF TEST PIT BU-P-7

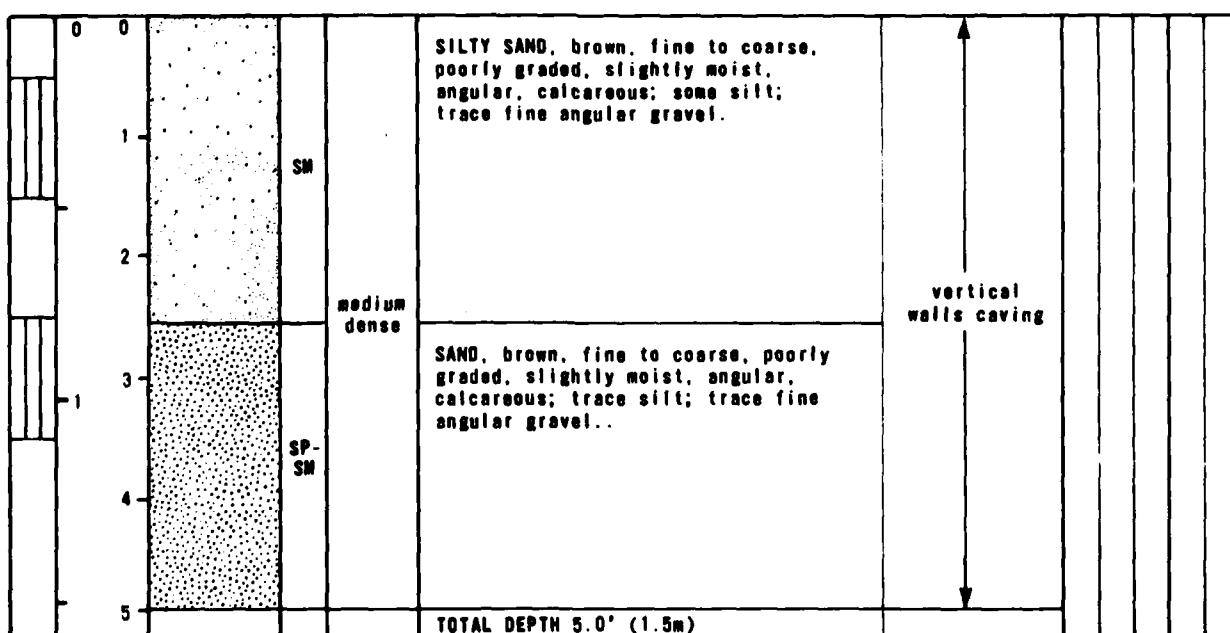

## LOG OF TEST PIT BU-P-8

LOGS OF TEST PITS BU-P-7 AND BU-P-8  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
7-9

FUGRO NATIONAL, INC.

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	P1
	0	0				SANDY SILT, brown, slightly moist, slightly plastic, calcareous; some fine to medium angular sand.						
	1											
	2											
	3											
	4											
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1710' (521m)  
SURFICIAL GEOLOGIC UNIT: ASy

## LOG OF TEST PIT BU-P-9

	0	0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some silt; little fine to coarse subangular gravel.			17	58	25	NP
	1											
	2											
	3											
	4					SANDY GRAVEL, brown, fine to coarse, poorly graded, slightly moist, sub-angular, calcareous; some fine to coarse subangular sand; little silt.						
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1820' (555m)  
SURFICIAL GEOLOGIC UNIT: ASy

## LOG OF TEST PIT BU-P-10

LOGS OF TEST PITS BU-P-9 AND BU-P-10  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
7-10

FEDERAL NATIONAL, INC.

FN-TR-28-11

BULK SAMPLE	DEPTH METERS	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SAND, brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; trace silt; trace fine subangular gravel.						
	1		SP-SM	medium dense							
	2				SANDY CLAY, red brown, slightly moist, medium plastic, calcareous; some fine to coarse angular sand; trace of subangular gravel; stage III caliche (2.0'-3.25'), stage III caliche (3.25'-3.5').		vertical walls stable				
	3		CL	stiff							
	4				TOTAL DEPTH 3.5' (1.1m)		cementation at 3.5' exceeded capacity of Case 580C backhoe				
	5										

SURFACE ELEVATION: 2030' (618m)  
SURFICIAL GEOLOGIC UNIT: A5i

## LOG OF TEST PIT BU-P-11

	0 0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; little silt; trace fine angular gravel.						
	1										
	2		SM								
	3			medium dense							
	4				CLAYEY SAND, brown, fine to coarse, poorly graded, slightly moist, angular, calcareous; some silty clay; trace fine angular gravel.		vertical walls stable				
	5		SC								
					TOTAL DEPTH 5.0' (1.5m)						

SURFACE ELEVATION: 1930' (588m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-12

LOGS OF TEST PITS BU-P-11 AND BU-P-12  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSOFIGURE  
7-11

FEDERAL NATIONAL INC.

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SANDY SILT, brown, slightly moist, nonplastic, calcareous; some fine to medium subangular sand.						
	1			ML	firm							
	2											
	3											
	4											
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1840' (561m)  
 SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-13

	0	0				SILTY SAND, brown, fine to medium, poorly graded, slightly moist, angular, calcareous; some silt; stage 1 caliche (2.5'-4.5')						
	1											
	2			SM	medium dense							
	3											
	4											
	5			CL-SC	stiff	SANDY CLAY-CLAYEY SAND, brown, slightly moist, slightly plastic, calcareous; fine to coarse sub-angular sand.						
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1780' (546m)  
 SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-14

LOGS OF TEST PITS BU-P-13 AND BU-P-14  
 VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
 DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
 7-12

FUGRO NATIONAL, INC.

AFV-03

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SILTY SAND, brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some silt.						
	1											
	2			SM	medium dense							
	3											
	4											
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1770' (538m)  
 SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-15

0	0		GC			SANDY GRAVEL, red brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; little fine to coarse subangular sand; little silty clay (0.0'-1.5'); little silt (1.5'-5.0'); occasional cobbles to 10" size throughout.		47	33	20		
1												
2			GM		dense							
3												
4												
5												
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1840' (561m)  
 SURFICIAL GEOLOGIC UNIT: A5i

## LOG OF TEST PIT BU-P-16

LOGS OF TEST PITS BU-P-15 AND BU-P-16  
 VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
 DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
 7-13

FLUORO NATIONAL, INC.

AFV-03

FN-TR-28-II

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SILTY SAND, light brown, fine to medium, poorly graded, slightly moist, subangular, calcareous; some silt.						
	1		SM	medium dense							
	2										
	3				SANDY CLAY, light brown, slightly moist, slightly plastic, calcareous; some fine to coarse subangular sand; trace fine subrounded gravel.						
	4										
	5		SP-SM	medium dense	GRAVELLY SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; some fine subangular gravel; trace silt.						
TOTAL DEPTH 5.0' (1.5m)											

SURFACE ELEVATION: 1895' (578m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-17

	0 0				GRAVELLY SAND, light brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some fine subangular gravel; little silt.						
	1										
	2										
	3				SANDY GRAVEL, light brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some fine to coarse subangular sand; trace silt.						
	4		GP-GM	medium dense							
	5										
TOTAL DEPTH 5.0' (1.5m)											

SURFACE ELEVATION: 2045' (623m)  
SURFICIAL GEOLOGIC UNIT: A5i

## LOG OF TEST PIT BU-P-18

LOGS OF TEST PITS BU-P-17 AND BU-P-18 VERIFICATION SITE, BUTLER CDP, ARIZONA	
MX SITING INVESTIGATION DEPARTMENT OF THE AIR FORCE - SAMSO	FIGURE 7-14

FUGRO NATIONAL, INC.

AFV-03

FN-TR-28-11

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SANDY CLAY, light brown, slightly moist, slightly plastic, calcareous; some fine to coarse subangular sand; little subangular gravel; occasional cobbles to 6" size.						
	1		CL	firm							
	2										
	3		SP-SM	dense	GRAVELLY SAND, light brown, fine to coarse, poorly graded, dry, subangular, calcareous; some fine to coarse subangular gravel; trace silt; occasional cobbles.						
	4				TOTAL DEPTH 4.0' (1.2m)						
	5					refusal of Case 580C backhoe at 4.0' on boulders					

SURFACE ELEVATION: 2170' (681m)

SURFICIAL GEOLOGIC UNIT: A5i

## LOG OF TEST PIT BU-P-19

	0 0				SANDY GRAVEL, brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some fine to coarse subangular sand; trace silt; occasional cobbles to 5" size throughout.						
	1		GP-GM	medium dense							
	2										
	3										
	4										
	5				TOTAL DEPTH 5.0' (1.5m)						

SURFACE ELEVATION: 2280' (695m)

SURFICIAL GEOLOGIC UNIT: A5i

## LOG OF TEST PIT BU-P-20

LOGS OF TEST PITS BU-P-19 AND BU-P-20  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
7-15

FUGRO NATIONAL INC.

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0		SM		GRAVELLY SAND, brown, fine to coarse, poorly graded, slightly moist, sub-angular, calcareous; some fine to coarse subangular gravel; little silt.						
	1					SANDY GRAVEL, light brown, fine, poorly graded, slightly moist, sub-angular, calcareous; some fine to coarse subangular sand; trace silt.	vertical walls stable					
	2				medium dense							
	3			GP-GM								
	4											
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 2020' (618m)  
SURFICIAL GEOLOGIC UNIT: A50

## LOG OF TEST PIT BU-P-21

0	0					SANDY GRAVEL, light brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some fine to coarse subangular sand, trace silt.						
1												
2				GP-GM	medium dense							
3												
4						SANDY GRAVEL, red brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some fine to coarse subangular sand; little silty clay.						
5				GC								
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1810' (552m)  
SURFICIAL GEOLOGIC UNIT: A5y/A1

## LOG OF TEST PIT BU-P-22

LOGS OF TEST PITS BU-P-21 AND BU-P-22 VERIFICATION SITE, BUTLER CDP, ARIZONA				
MX SITING INVESTIGATION DEPARTMENT OF THE AIR FORCE SAMSO				FIGURE 7-16
FEDERAL NATIONAL INC.				

FN-TR-28-11

BULK SAMPLE	DEPTH METERS FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
							GR	SA	FI	LL	PI
	0 0				SILTY SAND, light brown, fine to coarse, poorly graded, slightly moist, subangular, calcareous; some silt.						
	1										
	2										
	3										
	4										
	5										
TOTAL DEPTH 5.0' (1.5m)											

SURFACE ELEVATION: 1870' (570m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-23

	0 0				SAND, brown, fine to coarse, poorly graded, slightly moist, subangular, trace silt; trace fine subangular gravel.						
	1										
	2										
	3										
	4										
	5										
TOTAL DEPTH 5.0' (1.5m)											
							10	78	12		

SURFACE ELEVATION: 2030' (619m)  
SURFICIAL GEOLOGIC UNIT: A5y

## LOG OF TEST PIT BU-P-24

LOGS OF TEST PITS BU-P-23 AND BU-P-24  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOFIGURE  
7-17

FUGRO NATIONAL, INC.

AFV-03

AD-A113 417

FUGRO NATIONAL INC LONG BEACH CA  
MX SITING INVESTIGATION. GEOTECHNICAL EVALUATION. VOLUME II. AR-ETC(U)  
NOV 79

F04704-78-C-0027


ML

UNCLASSIFIED

FN-TR-28-VOL-2

2 1 2

44-11

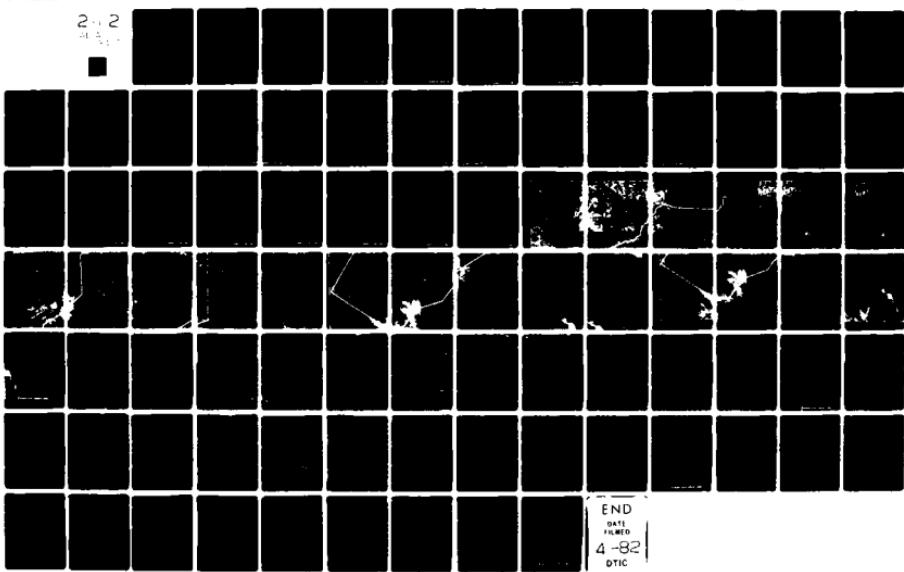


END

DATI

FILED

4-82

DTIC

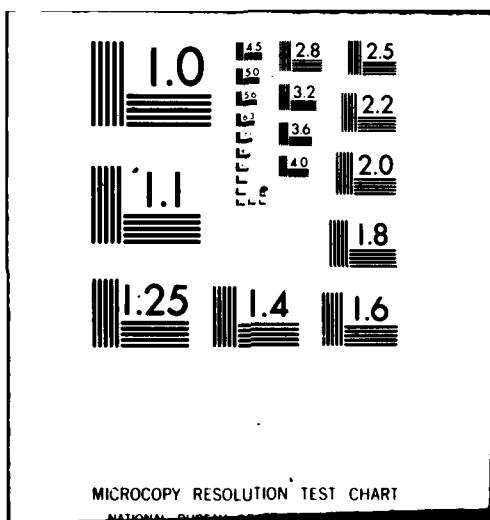

BULK SAMPLE	DEPTH METERS	DEPTH FEET	LITHOLOGY	USCS	CONSISTENCY	SOIL DESCRIPTION	REMARKS	SIEVE ANALYSIS				
								GR	SA	FI	LL	PI
	0	0				SILTY SAND, light brown, fine to coarse, poorly graded, dry, sub-angular, calcareous; some silt.						
	1											
	2											
	3											
	4											
	5											
TOTAL DEPTH 5.0' (1.5m)												

SURFACE ELEVATION: 1240' (378m)

SURFICIAL GEOLOGIC UNIT: A5o

## LOG OF TEST PIT BU-P-25

0	0											
1												
2												
3												
4												
5												

SURFACE ELEVATION:

SURFICIAL GEOLOGIC UNIT:

## LOG OF TEST PIT

LOG OF TEST PIT BU-P-25  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSGFIGURE  
7-18

FEDERAL NATIONAL, INC.

**SECTION 8.0**  
**SURFICIAL SAMPLE LOGS**

EXPLANATIONS OF SURFICIAL SAMPLE LOGS

Finalized logs of the surficial samples are presented in this section. The explanations provided here are to serve as general guidelines to reading the logs.

A. Designations - Surficial samples are identified as follows:

BU-CS-1

BU - abbreviation for the site (e.g., BU - Butler)

CS - abbreviation for surficial sample

1 - number of activity

B. Ground Surface Elevation - Indicated elevations on the logs are estimated from topographic maps of the study area within an accuracy of half the contour interval.

C. Surficial Geologic Unit - Indicates the surficial geologic unit in which the activity is located.

D. Depth - Indicates depth interval for which soil description is given.

E. USCS - Unified Soil Classification Symbol; see Table 6-1 of Section 6.0, "Boring Logs", for details of USCS.

F. Soil Description - Soil is described based on visual descriptions and/or laboratory test results. See Section 6.0, "Boring Logs", for procedures of soil description.

G. Sieve Analysis, LL and PI - These are from results of laboratory tests. See Section 6.0, "Boring Logs", for explanation.

ACTIVITY NUMBER	GROUND SURFACE ELEVATION, FEET (METERS)	SURFICIAL GEOLOGIC UNIT	DEPTH, FEET (METERS)	USCS	SOIL DESCRIPTION	SIEVE ANALYSIS				
						GR	SA	FI	LL	PI
BU-CS-2	1985 (605)	A5i	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; some silt					
BU-CS-4	2040 (622)	A5i	0.0-2.0 (0.0-0.61)	SP-SM	GRAVELLY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular; some fine to coarse angular gravel; trace silt.					
BU-CS-6	1770 (539)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to medium, poorly graded, medium dense, slightly moist, angular, calcareous; some silt.	1	68	31		
BU-CS-8	1650 (503)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; some silt.					
BU-CS-10	1550 (472)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to medium, poorly graded, medium dense, slightly moist, angular, calcareous; some silt.	0	65	35		
BU-CS-12	1530 (466)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to medium, poorly graded, dense, slightly moist, angular, calcareous; little silt					
BU-CS-14	1600 (488)	A5y	0.0-2.0 (0.0-0.61)	CL	SANDY CLAY, light brown, firm, dry, medium plastic, calcareous; some fine to coarse angular sand; trace fine angular to subangular gravel; stage I caliche (0.25"-2.0').					
BU-CS-16	1985 (605)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; little silt; trace fine subrounded gravel.					
BU-CS-18	2115 (645)	A5i	0.0-2.0 (0.0-0.61)	SM	GRAVELLY SAND, light brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some fine to coarse subangular gravel; little silt; stage II caliche (1.0"-2.0')					

**LOGS OF SURFICIAL SOIL SAMPLES  
VERIFICATION SITE, BUTLER COP, ARIZONA**

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
8-1  
1 OF 4

**FUGRO NATIONAL, INC.**

ACTIVITY NUMBER	GROUND SURFACE ELEVATION, FEET (METERS)	SURFICIAL GEOLOGIC UNIT	DEPTH, FEET (METERS)	USCS	SOIL DESCRIPTION	SIEVE ANALYSIS				
						GR	SA	FI	LL	PI
BU-CS-20	2210 (674)	A5i	0.0-1.5 (0.0-0.46)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular; some silt; trace fine subangular gravel	9	65	26		
			1.5-2.0 (0.46-0.61)	SP-SM	GRAVELLY SAND, light brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some fine subangular gravel; trace silt					
BU-CS-21	2280 (689)	A5i	0.0-2.0 (0.0-0.61)	SM	GRAVELLY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some fine subangular gravel; little silt.					
BU-CS-24	1950 (594)	A5y/A1	0.0-2.0 (0.0-0.61)	SW-SM	GRAVELLY SAND, light brown, fine to coarse, well graded, medium dense, slightly moist, angular, calcareous; some fine to coarse angular gravel; trace silt.	43	52	5		
BU-CS-25	1910 (582)	A5y	0.0-2.0 (0.0-0.61)	GP-GM	SANDY GRAVEL, light brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some fine to coarse subangular sand; trace silt.					
BU-CS-27	1500 (457)	A5o	0.0-2.0 (0.0-0.61)	GM	SANDY GRAVEL, light brown, fine, poorly graded, medium dense, dry, subangular, calcareous; some fine to coarse subangular sand; little silt					
BU-CS-28	1425 (434)	A5i	0.0-2.0 (0.0-0.61)	SC	CLAYEY SAND, light brown, fine to coarse, poorly graded, medium dense, dry, subangular, calcareous; some slightly plastic silty clay.	3	54	43	34	11
BU-CS-30	1360 (415)	A5i	0.0-2.0 (0.0-0.61)	SM	GRAVELLY SAND, light brown, fine to coarse, poorly graded, medium dense, dry, subangular, calcareous; some fine to coarse subangular gravel; little silt; stage I caliche throughout.	38	44	18		
BU-CS-37	1810 (552)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to medium, poorly graded, medium dense, slightly moist, subangular, calcareous; some silt.	1	68	31		

LOGS OF SURFICIAL SOIL SAMPLES  
VERIFICATION SITE, BUTLER CDP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSOFIGURE  
8-1  
2 OF 4

FEDERAL NATIONAL INC.

ACTIVITY NUMBER	GROUND SURFACE ELEVATION, FEET (METERS)	SURFICIAL GEOLOGIC UNIT	DEPTH, FEET (METERS)	USCS	SOIL DESCRIPTION	SIEVE ANALYSIS				
						GR	SA	FI	LL	PI
BU-CS-40	1870 (600)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular; some silt.					
BU-CS-43	1845 (593)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some silt.	4	66	30		NP
BU-CS-45	1830 (558)	A5y	0.0-2.0 (0.0-0.61)	ML	SANDY SILT, light brown, firm, slightly moist, slightly plastic, calcareous; some fine to coarse angular sand.					
BU-CS-48	1765 (538)	A5y	0.0-2.0 (0.0-0.61)	ML	SANDY SILT, light brown, firm, slightly moist, nonplastic, calcareous; some fine to coarse subangular sand.					
BU-CS-49	1770 (539)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some silt.					
BU-CS-51	1810 (552)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some silt					
BU-CS-52	1820 (555)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, subangular, calcareous; some silt.					
BU-CS-54	1880 (573)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND; brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; some silt					
BU-CS-56	1510 (460)	A5y	0.0-2.0 (0.0-0.61)	CL	SANDY CLAY, brown, firm, slightly moist, slightly plastic, calcareous; some fine to medium angular sand	0	49	51	25	12
BU-CS-57	1470 (448)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; some silt.					

**LOGS OF SURFICIAL SOIL SAMPLES  
VERIFICATION SITE, BUTLER CDP, ARIZONA**

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
8-1  
3 OF 4

**FUERD NATIONAL, INC.**

ACTIVITY NUMBER	GROUND SURFACE ELEVATION, FEET (METERS)	SURFICIAL GEOLOGIC UNIT	DEPTH, FEET (METERS)	USCS	SOIL DESCRIPTION	SIEVE ANALYSIS				
						GR	SA	FI	LL	PI
BU-CS-58	1470 (448)	A5y	0.0-2.0 (0.0-0.61)	SC	CLAYEY SAND, brown, fine to medium, poorly graded, medium dense, slightly moist, angular, calcareous; some silty clay.	4	62	34		
BU-CS-61	1740 (530)	A5i	0.0-2.0 (0.0-0.61)	SM	GRAVELLY SAND, light brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; some fine to coarse angular gravel; little silt; occasional cobbles to 5" size; stage I caliche (1.0'-2.0').	34	50	16		
BU-CS-63	1940 (591)	A5i	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, light brown, fine to coarse, poorly graded, medium dense, dry, angular, calcareous; some silt; stage I caliche (0.25'-2.0').					
BU-CS-64	1360 (415)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular, calcareous; little silt.	2	82	16		
BU-CS-68	1350 (411)	A5y	0.0-2.0 (0.0-0.61)	SM	SILTY SAND, brown, fine to coarse, poorly graded, medium dense, slightly moist, angular to sub-angular, calcareous; little silt; trace fine angular gravel.	5	77	18		

LOGS OF SURFICIAL SOIL SAMPLES  
VERIFICATION SITE, BUTLER COP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

FIGURE  
8-1  
4 OF 4

FUGRO NATIONAL INC.

**SECTION 9.0**  
**LABORATORY TEST RESULTS**

EXPLANATIONS OF LABORATORY TEST RESULTS

Laboratory test results are presented in this section. Table 9-1 contains a summary of laboratory test results. This table contains results of sieve analysis; plasticity data; in-situ dry unit weight, moisture content, degree of saturation, and void ratio for drive and Pitcher samples; results of compaction tests; and specific gravity of solids. Other tests such as triaxial compression, unconfined compression, direct shear, consolidation, chemical, and California Bearing Ratio (CBR) are indicated on the table. Tables 9-2 through 9-6 and Figures 9-1 through 9-2 present results of triaxial compression, unconfined compression, direct shear, chemical, and CBR tests.

All tests were performed in general accordance with the American Society for Testing and Materials (ASTM) procedures. The following table presents the ASTM designations for the tests performed during the investigation.

<u>Type of Test</u>	<u>ASTM Designations</u>
Particle Size Analysis	D 422-63
Liquid Limit	D 423-66
Plastic Limit	D 424-59
Unit Weight	D 2937-71
Moisture Content	D 2216-71
Compaction	D 1557-70
Specific Gravity of Solids	D 854-58
Triaxial	D 2850-70
Unconfined Compression	D 2166-66
Direct Shear	D 3080-72
Consolidation	D 2435-70
Test for Alkalinity (pH)	D 1067-70
Water Soluble Sodium	D 1428-64
Water Soluble Chloride	D 512-67
Water Soluble Sulphate	D 516-68
Water Soluble Calcium	D 511-72
Calcium Carbonate	D 1126-67
California Bearing Ratio (CBR)	D 1883-73

Explanation for the tables and figures presented in this section are as follows.

- A. Activity Number - Boring, trench, test pit, or surficial sample designation.
- B. Sample Number - Prefix indicates the type of sample; explanation is at the bottom of the table.
- C. Sample Interval - This is the depth range measured from ground surface over which the sample was obtained.
- D. Percent Finer by Weight - Presents the results of laboratory particle size analysis (ASTM D 422-63) performed on representative soil samples at the depth indicated. The numbers represent the percent (by dry weight) of the total sample weight passing through each sieve size indicated.
- E. Atterberg Limits (ASTM D 423-66 and D 424-59)
  - LL - Liquid Limit, the water content (as percent of soil dry weight) corresponding to the arbitrary limit between the liquid and plastic states of consistency of a soil (ASTM D 423-66).
  - PL - Plastic Limit, the water content corresponding to an arbitrary limit between the plastic and the semisolid state of consistency of a soil (ASTM D 424-59).
  - PI - Plasticity Index, numerical difference between the liquid limit (LL) and the plastic limit (PL) indicating the range of moisture content within which a soil-water mixture is plastic.
  - NP - Nonplastic.
- F. USCS - Unified Soil Classification Symbols are given here; see Table 6.1 in Section 6.0, "Boring Logs", for complete details of USCS system.

G. In Situ - Presents results of tests on drive and Pitcher samples.

Dry Unit Weight - indicates dry unit weight of soil determined as per ASTM D 2937-71

Moisture Content - weight of water reported in percent of dry weight of soil sample (ASTM D 2216-71)

Saturation - the degree of saturation in a soil sample is defined as the ratio (in percent) of the volume of water to the volume of all voids in the soil

Void Ratio - the numerical ratio of the volume of voids to the volume of solids in a soil specimen

H. Compacted - Indicates results of laboratory maximum dry density and optimum moisture content test as per ASTM D 1557-70.

I. Specific Gravity of Solids (ASTM D 854-58) - Indicates the ratio of (1) the weight in air of a given volume of soil solids at a stated temperature, to (2) the weight in air of an equal volume of distilled water at a stated temperature.

J. Triaxial - The triaxial compression tests were performed in accordance with the procedures of ASTM D 2850-70. The following explanations and definitions apply.

Triaxial Compression Test - a cylindrical specimen of soil is surrounded by a fluid in a pressure chamber and subjected to an isotropic pressure. An additional compressive load is then applied, directed along the axis of the specimen called the axial load.

Consolidated-Drained (CD) Test - a triaxial compression test in which the soil was first consolidated under an all-around confining stress (test chamber pressure), and was then compressed (and hence sheared) by increasing the vertical stress. Drained indicates that excess pore water pressure generated by strains are permitted to dissipate by the free movement of pore water during consolidation and compression.

Consolidated-Undrained (CU) Test - a triaxial compression test in which essentially complete consolidation under the confining (chamber) pressure is followed by a shear test at constant water content.

Confining Pressure ( $\sigma_3$ ) - the isotropic chamber pressure applied to the soil specimen during consolidation and compression.

Maximum Deviator Stress ( $\sigma_1 - \sigma_3$ ) - the difference between the major and minor principal stresses in the specimen at failure. The major principal stress on the specimen is equal to the unit axial load plus the chamber pressure and the minor principal stress on the specimen is equal to the chamber pressure.

Strain Rate - axial strain,  $\epsilon$ , at a given stress level is defined as the ratio of the change in length ( $\Delta L$ ) of the specimen to the original length of the specimen ( $L_0$ ). The rate of strain was controlled during the test so that this ratio increased at equal increments for each minute of testing.

Back Pressure - pressure in excess of atmospheric applied to the pore water of a soil sample. Back pressure is usually applied to (1) increase saturation of the sample, or (2) simulate the actual in-situ pressure regime.

- K. Unconfined Compression - Test procedures were as described in ASTM D 2166-66. Unconfined compressive strength is defined as the load per unit area at which an unconfined prismatic or cylindrical specimen of soil will fail in a simple compression test. In these methods, unconfined compressive strength is taken as the maximum load attained per unit area or the load per unit area at 20 percent axial strain, whichever occurred first during the performance of a test.
- L. Direct Shear - The procedures of ASTM D 3080-72 were followed for direct shear testing. In this test, soil under an applied normal load is stressed to failure by moving one section of the soil container (shear box) relative to the

other section. Normal stress is the value of load per unit area acting perpendicular to the plane of shearing. Maximum shear strength is defined as the maximum resistance (ksf) of a soil to shearing (tangential) stresses.

- M. Consolidation (ASTM D 2435-70) - A consolidation test is a test in which a cylindrical soil specimen is laterally confined in a ring and compressed between porous plates. The term "consolidation", as used here, indicates the gradual reduction in volume of the soil mass resulting from an increase in compressive stress (axial load per unit area).
- N. Chemical - The chemical tests performed on soil samples included: pH; water soluble sodium, chloride, sulphate, calcium; and calcium carbonate content. pH is an index of the acidity or alkalinity of a soil in terms of the logarithm of the reciprocal of the hydrogen ion concentration. ASTM test procedure designations for these chemical tests are included in the table at the beginning of the "Explanation of Laboratory Test Results".
- O. CBR - California Bearing Ratio (CBR) is the ratio (in percent) of the resistance to penetration developed by a sub-grade soil to that developed by a standard crushed-rock base material. The procedures for conducting a CBR test were as outlined in ASTM D 1883-73. The materials tested for CBR were also analyzed for particle size distribution (ASTM D 422-63) and compaction characteristics (ASTM D 1557-70). The term "percentage of maximum density" indicates the ratio (as a percentage) of the compacted sample

dry unit weight to maximum dry density obtained in the laboratory from ASTM D 1557-70, "Moisture-Density Relations of Soils Using 10-pound (4.5 kg) Hammer and 18-inch (457 mm) Drop."

ACTIVITY NUMBER	SAMPLE NUMBER (a)	SAMPLE INTERVAL	PERCENT FINER BY WEIGHT									
			STANDARD SIEVE OPENING						U S STANDARD			
			BLDRS	COBBLES	6"	3"	1½"	3/4"	3/8"	4	10	40
FEET	METERS											
BU-B-1	P-1	1.0-3.7	0.30-1.13									
	P-2	4.0-6.5	1.22-1.98							100	99	89
	D-3	7.0-8.0	2.13-2.44									21
	D-4	10.2-10.9	3.11-3.32							100	97	81
	D-5	15.0-15.7	4.57-4.79									43
	D-6	20.2-20.9	6.16-6.37							100	97	69
	D-7	25.0-26.0	7.62-7.92									35
	D-8	30.2-30.7	9.20-9.36							100	97	76
	D-9	40.0-41.0	12.19-12.50									34
	D-10	50.0-51.0	15.24-15.54							100	98	78
	D-11	60.0-61.0	18.29-18.59									17
	D-12	68.0-69.0	20.73-21.03									
	D-13	80.4-80.9	24.51-24.66							100	96	73
	D-14	90.0-91.0	27.43-27.74									25
	D-15	100.2-100.9	30.54-30.75							100	94	66
	D-16	107.2-107.9	32.67-32.89							100	99	98
	D-17	116.0-117.0	35.36-35.66									77
	D-18	129.4-129.9	39.44-38.68							100	93	73
	D-19	145.0-146.0	44.20-44.50									26
	D-20	160.4-160.9	48.89-49.04							100	94	77
												26
BU-B-2	P-1	0.0-2.7	0.00-0.82									
	P-2	3.5-4.3	1.07-1.31							100	96	90
	D-3	6.0-7.0	1.83-2.13									
	D-4	10.2-10.9	3.11-3.32									
	D-5	15.2-15.9	4.63-4.85							100	99	97
	D-6	20.0-21.0	6.10-6.40									91
	D-7	25.0-25.6	7.62-7.80									60
	P-8	30.0-31.1	9.14-9.48									
	D-9	37.1-37.7	11.31-11.49							100	92	73
	D-10	41.2-41.9	12.56-12.77									53
	P-12	58.0-59.3	17.68-18.07									22
	D-13	71.0-72.0	21.64-21.95									
	D-14	80.0-81.0	24.38-24.69									
	D-15	90.2-90.9	27.49-27.71							100	95	87
	D-16	98.0-98.8	29.87-30.11									56
	P-17	108.5-110.5	33.07-33.68									15
	P-18	120.7-121.4	36.79-37.00									
	P-19	130.0-131.7	39.62-40.14									
	P-20	144.0-144.9	43.89-44.17									
	P-21	160.0-161.9	48.77-49.35									
BU-B-3	D-1	0.0-1.0	0.00-0.30									

## NOTES:

(a) Sample types

SS - Standard split spoon

P - Pitcher

D - Fugro Drive

B,b - Bulk

(b) NP - Not Plastic

(c) USCS - Unified Soil Classification System

(d) \* Indicates that test has been performed

and results are included in this report

SIEVE NO.				PARTICLE SIZE (mm)		ATTERBERG LIMITS (b)			USCS (c)	IN-SITU				COMPACTED			TRIAXIAL (d)	UNCONFINED COMPRESSION	DIRECT
	SILT	OR	CLAY	LL	PL	PI	DRY UNIT WEIGHT	(pcf)	(kg/m³)	MOISTURE CONTENT (%)	SATURATION (%)	VOID RATIO	MAXIMUM DRY DENSITY	(pcf)	(kg/m³)	OPTIMUM MOISTURE (%)	SPECIFIC GRAVITY OF SOLIDS		
100	200	.005	.001				SM	107.4	1720	5.4	25.6	0.57							
3	1						SP	107.9	1728	1.2	6.0	0.53					2.64		
							SP	112.1	1796	1.0	5.4	0.50							
33	29			74	28	46	SC	111.2	1781	9.4	49.3	0.52							
							SM	108.4	1736	14.3	69.7	0.55							
20	17						SM	119.1	1908	7.2	46.9	0.41							
							SP-SM	111.4	1784	6.9	36.4	0.51							
17	12						SW-SM	113.1	1812	5.6	30.9	0.49							
							SP-SM	116.2	1861	7.6	45.6	0.45							
7	5						SP-SM												
							SP-SM	109.4	1752	4.5	22.5	0.54							
							SP-SM	118.4	1897	5.2	33.2	0.42							
13	11						SP-SM	118.1	1892	5.2	32.3	0.43							
							SP-SM	113.9	1825	4.2	23.7	0.48							
12	10						SW-SM	119.2	1909	5.6	36.6	0.41							
42	32						SM	114.8	1839	6.7	38.7	0.47							
							SM	113.0	1810	8.7	47.8	0.49							
11	8						SW-SM	121.7	1949	3.2	22.5	0.38							
							SW-SM	122.4	1961	5.1	36.6	0.38							
12	9						SW-SM	120.7	1933	4.4	30.0	0.40							
							SP-SM	80.6	1291	16.8	41.6	1.09							
10	8						SW-SM			1.8									
							SP-SM	115.6	1852	2.5	14.8	0.46					2.65		
37	30						SM	109.8	1759	4.5	23.6	0.51							
							SM	113.5	1818	5.0	27.9	0.48							
92	80						ML	98.4	1576	10.6	40.2	0.71							
94	87						ML	100.0	1602	10.7	42.2	0.68							
8	5						ML	93.0	1490	16.5	54.9	0.81							
54	42						SP-SM	121.1	1940	4.9	33.8	0.39							
37	31						SM	121.5	1946	3.9	27.2	0.39							
							SM	105.9	1696	9.5	43.4	0.59							
							SP	104.0	1666	6.3	27.4	0.62							
							SP	116.4	1865	3.3	19.9	0.45							
7	4						SW	122.9	1969	7.5	54.6	0.37							
							SM	101.2	1621	14.7	59.7	0.66							
							SM	99.7	1597	21.8	85.3	0.69							
65	20						SM	105.9	1696	16.4	74.9	0.59							
							SM	97.6	1563	22.6	84.0	0.73							
24	70			36	23	13	CT.	104.3	1671	21.5	94.9	0.61				2.69			

TRIAXIAL (d)				
UNCONFINED COMPRESSION	*	*	*	*
DIRECT SHEAR	*	*	*	*
CONSOLIDATION				
CHEMICAL				
CBR				

SUMMARY OF LABORATORY TEST RESULTS  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-1  
1 OF 4

NUERO NATIONAL, INC.

AFV-01

<b>47.5-48.5</b>	<b>14.48-14.78</b>	
<b>60.0-60.5</b>	<b>18.29-18.50</b>	
<b>88.2-88.9</b>	<b>26.88-27.10</b>	
<b>99.0-99.5</b>	<b>30.18-30.33</b>	
<b>110.0-110.5</b>	<b>33.53-33.68</b>	
<b>120.0-120.5</b>	<b>36.58-36.73</b>	
<b>130.0-130.4</b>	<b>39.62-39.75</b>	
<b>144.0-144.3</b>	<b>43.89-43.98</b>	
<b>0.0-2.8</b>	<b>0.00-0.85</b>	
<b>3.7-4.4</b>	<b>1.13-1.34</b>	
<b>6.0-7.0</b>	<b>1.83-2.13</b>	
<b>10.2-10.9</b>	<b>3.11-3.32</b>	
<b>15.2-15.9</b>	<b>4.63-4.85</b>	
<b>19.0-20.0</b>	<b>5.79-6.10</b>	
<b>25.0-25.6</b>	<b>7.62-7.80</b>	
<b>30.0-30.7</b>	<b>9.14-9.36</b>	
<b>40.0-41.0</b>	<b>12.19-12.50</b>	
<b>50.0-50.7</b>	<b>15.24-15.45</b>	
<b>60.1-60.8</b>	<b>18.32-18.53</b>	
<b>70.0-70.8</b>	<b>21.34-21.58</b>	
<b>80.0-80.6</b>	<b>24.38-24.57</b>	
<b>90.2-90.9</b>	<b>27.49-27.71</b>	
<b>100.0-101.0</b>	<b>30.48-30.78</b>	

			SP-SM	109.8	1759	6.2	31.3
			SW-SM	124.6	1996	5.8	44.5
37	19	18	SC	106.7	1709	10.4	48.5
			SP-SM	121.3	1943	3.6	25.0
			SM	107.5	1722	8.6	40.9
			SW-SM	127.2	2038	6.7	55.7
			SP-SM	125.3	2007	6.0	47.0
			SP-SM	123.8	1983	7.3	54.6
			SW-SM	132.7	2126	5.8	58.1
			SW-SM	137.0	2195	4.9	57.6
			SW-SM	136.4	2185	5.3	60.8
			SM				
			SM	104.2	1669	5.5	24.1
			SM	106.7	1709	3.9	18.2
			SM	114.2	1829	5.4	30.7
			SM	109.3	1751	5.2	27.3
			SW-SM	121.2	1941	5.8	41.3
			SM	122.4	1961	5.2	37.3
46	20	26	SC	116.4	1865	7.6	45.9
			SM	117.4	1881	8.8	54.6
			SM	111.2	1781	7.0	36.7
			SM	112.0	1794	7.7	41.2
			SM	110.1	1764	9.8	49.9
			SM	96.8	1550	8.3	30.3
			SM	117.4	1881	13.3	82.5
			SM	120.3	1927	6.6	44.5
			SM	122.2	1957	5.8	41.3
			SM	122.1	1956	8.3	59.0

WATER (S)	SPECIFIC GRAVITY OF SOLIDS	TRIAXIAL (d)	UNCONFINED COMPRESSION	DIRECT SHEAR	CONSOLIDATION	CHEMICAL	CBR
				*			
					*		
						*	
				*			
					*		
						*	
							*
2.63				*			
2.67			*				
				*			
					*		
						*	
							*
2.66							

SUMMARY OF LABORATORY TEST RESULTS  
VERIFICATION SITE, BUTLER COP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-1  
2 OF 4

FUGRO NATIONAL INC.

AFV-01

<del>BU</del>	<del>BU</del>	FEET	METERS	24"	12"	6"	3"
BU-B-5	D-7	25.2-25.9	7.68-7.89				
	D-8	29.1-29.6	8.87-9.02				
	D-9	35.0-35.6	10.67-10.85				
	P-10	40.0-41.6	12.19-12.68				
	D-11	50.0-50.7	15.24-15.45				
	D-12	60.0-60.4	18.29-18.41				
	D-13	70.0-70.4	21.34-21.46				
	D-14	81.0-81.6	24.69-24.87				
	D-15	90.0-90.6	27.43-27.62				
	D-16	100.0-100.4	30.48-30.60				
	D-17	110.0-110.4	33.53-33.65				
	D-18	120.0-120.4	36.58-36.70				
	D-19	130.2-130.9	39.68-39.90				
	D-20	145.0-145.4	44.20-44.32				
	D-21	160.5-161.4	48.92-49.19				
BU-T-1	B-1	0.5-2.0	0.15-0.61				
	b-2	3.5-4.0	1.07-1.22				
BU-T-2	B-1	0.5-2.0	0.15-0.61				
BU-T-3	B-1	0.5-2.0	0.15-0.61				
	b-2	7.0-8.0	2.13-2.44				
BU-T-4	B-1	0.5-2.0	0.15-0.61				
	b-3	8.0-9.0	2.44-2.74				
BU-T-5	B-1	0.5-2.0	0.15-0.61				
	b-2	3.0-4.0	0.91-1.22				
BU-P-3	B-2	2.0-3.0	0.61-0.91				

ATTERBERG LIMITS (b)			USCS (c)	DRY UNIT WEIGHT		MOISTURE CONTENT (%)	SATURATION (%)	VOID RATIO	MAXIMUM DRY DENSITY		OPTIMUM MOISTURE (%)	SPECIFIC GRAVITY OF SOLIDS	TRIAXIAL TEST RESULTS
LL	PL	PI		(pcf)	(kg/m³)				(pcf)	(kg/m³)			
			SW-SM	122.7	1965	4.0	28.9	0.37					
			SM	106.4	1704	9.9	45.8	0.58					
			SM	102.4	1640	11.3	47.3	0.65					
			SM	109.5	1754	10.4	52.1	0.54					
			SM	126.8	2031	5.5	45.2	0.33					
			SP-SM	127.3	2039	7.6	63.4	0.32					
			SM	130.3	2087	6.5	59.9	0.29					
			SM	128.3	2055	4.6	39.7	0.31					
			SM	118.0	1890	9.0	56.8	0.43					
			SM	123.6	1980	7.4	55.0	0.36					
			SM	131.3	2103	6.1	58.2	0.28					
			SP-SM	134.7	2158	6.3	67.8	0.25					
			SP-SM	131.6	2108	4.3	41.4	0.28					
			SM	134.9	2161	5.2	56.4	0.25					
			SM	134.6	2156	4.5	48.3	0.25					
			SM										
30	14	16	SC										
			SM						136.7	2190	6.8		
			SP-SM										
			NP	SW-SM									
			SM										
			ML										
			SM										
			SM										
			SW-SM										
26	15	11	CL										
			SC										
27	17	10	SC										
			NP	SM									
21	18	3	ML						125.5	2010	9.1		

IMPACTED		OPTIMUM MOISTURE (%)	SPECIFIC GRAVITY OF SOLIDS	TRIAXIAL (d)	UNCONFINED COMPRESSION	DIRECT SHEAR	CONSOLIDATION	CHEMICAL	CBR
DENSITY	(kg/m <sup>3</sup> )								
2190	6.8			*					
1970	10.9				*	*			
2010	9.1				*	*			

SUMMARY OF LABORATORY TEST RESULTS  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-1  
3 OF 4

FISHER NATIONAL, INC.

AFV-01

ACTIVITY NUMBER	SAMPLE NUMBER (a)	SAMPLE INTERVAL	PERCENT FINER BY WEIGHT										
			STANDARD SIEVE OPENING							U.S. STANDARD			
			BLDRS.	COBBLES			GRAVEL				4	10	40
		FEET	METERS	24"	12"	6"	3"	1½"	3/4"	3/8"	4	10	40
BU-P-16	B-1	0.25-1.5	0.08-0.46				100	93	82	65	53	42	29
BU-P-17	b-1	0.5-2.0	0.15-0.61							100	98	93	65
BU-P-18	B-1	0.5-2.0	0.15-0.61				100	90	83	76	63	36	
BU-P-20	B-1	0.5-2.0	0.15-0.61				100	91	71	62	55	46	32
BU-P-22	B-2	4.0-5.0	1.22-1.52				100	74	57	39	28	18	
BU-P-24	b-1	0.5-2.0	0.15-0.61						100	97	90	69	27
BU-CS-6	b-1	0.5-2.0	0.15-0.61						100	99	96	72	
BU-CS-10	B-1	0.5-2.0	0.15-0.61						100	99	84		
BU-CS-20	b-1	0.5-1.5	0.15-0.46						100	95	91	84	62
BU-CS-24	B-1	0.5-2.0	0.15-0.61				100	96	81	57	32	12	
BU-CS-28	b-1	0.5-2.0	0.15-0.61						100	99	97	89	67
BU-CS-30	b-1	0.5-2.0	0.15-0.61				100	81	70	62	50	26	
BU-CS-37	b-1	0.5-2.0	0.15-0.61						100	99	92	59	
BU-CS-43	b-1	0.5-2.0	0.15-0.61						100	99	96	86	54
BU-CS-56	B-1	0.25-2.0	0.08-0.61							100			
BU-CS-59	B-1	0.5-2.0	0.15-0.61						100	98	96	92	76
BU-CS-61	B-1	0.25-2.0	0.08-0.61						100	83	74	66	55
BU-CS-64	B-1	0.25-2.0	0.08-0.61							100	98	92	54
BU-CS-66	B-1	0.5-2.0	0.15-0.61							100	99	95	79
.													

## NOTES:

(a) Sample types

SS - Standard split spoon

P - Pitcher

D - Fugro Drive

B,b - Bulk

(b) NP - Not Plastic

(c) USCS - Unified Soil Classification System

(d) \* Indicates that test has been performed and results are included in this report

SIEVE NO.		PARTICLE SIZE (mm)		ATTERBERG LIMITS (b)			USCS (c)	IN-SITU				COMPACTED			SPECIFIC GRAVITY OF SOLIDS	TRIAXIAL (d)	UNCONFINED COMPRESSION DIRECT
		SILT OR CLAY						DRY UNIT WEIGHT	MOISTURE CONTENT (%)	SATURATION (%)	VOID RATIO	MAXIMUM DRY DENSITY	OPTIMUM MOISTURE (%)				
#	100	200	.005	.001	LL	PL	PI										
9	24	20						GC									
5	35	25						SM									
6	23	18						SM									
12	16	11						GP-GM									
13	14	13			42	15	27	GC				134.0	2146	7.2			
17	14	12						SP-SM									
22	45	31						SM									
16	53	35						SM				124.5	1994	9.5			
19	40	26						SM									
22	7	5						SW-SM									
17	51	43			34	23	11	SC									
20	21	18						SM									
38	31							SM									
38	30							NP	SM								
61	51	23	11	25	13	12		CL								2.63	
44	34							SC									
23	16							SM									
24	16							SM				125.9	2017	7.4			
25	18							SM									

SUMMARY OF  
VERIFICATION

MY SITING  
DEPARTMENT OF THE

FUGRO

VOID RATIO	COMPACTED								
	MAXIMUM DRY DENSITY		OPTIMUM MOISTURE (%)	SPECIFIC GRAVITY OF SOLIDS	TRIAXIAL (d)	UNCONFINED COMPRESSION	DIRECT SHEAR	CONSOLIDATION	CHEMICAL
	(pcf)	(kg/m <sup>3</sup> )							
134.0	2146	7.2						*	
124.5	1994	9.5						*	
			2.63						
125.9	2017	7.4				*		*	

**SUMMARY OF LABORATORY TEST RESULTS  
VERIFICATION SITE, BUTLER CDP, ARIZONA**

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-1  
4 OF 4


**FUGRO NATIONAL, INC.**

AFV-01

BORING NO	SAMPLE NO.	SAMPLE INTERVAL		SOIL TYPE	NORMAL STRESS		MAXIMUM SHEAR STRENGTH	
		FEET	METERS		kst	kN/m <sup>2</sup>	kst	kN/m <sup>2</sup>
BU-B-1	D-3	7.0-8.0	2.13-2.44	SP	1.0	48	1.4	68
					2.0	96	1.9	90
					3.0	144	3.1	150
BU-B-1	D-7	25.0-26.0	7.62-7.92	SP-SM	2.5	120	2.5	122
					5.0	239	4.6	221
					7.5	359	8.2	391
BU-B-1	D-11	60.0-61.0	18.29-18.59	SP-SM	6.0	287	5.8	277
					8.0	383	7.4	354
					12.0	575	9.5	457
BU-B-2	D-4	10.2-10.9	3.11-3.32	SM	1.0	48	1.7	80
					2.0	96	2.7	129
					3.0	144	3.1	149
BU-B-2	P-8	30.0-31.1	9.14-9.48	ML	3.0	144	2.6	126
					6.0	287	4.8	232
					9.0	431	7.8	375
BU-B-3	D-10	40.1-40.8	12.22-12.44	SP-SM	4.0	192	4.2	200
					8.0	383	7.3	350
					12.0	575	10.8	516
BU-B-4	D-4	10.2-10.9	3.11-3.32	SM	1.0	48	2.2	103
					2.0	96	2.9	138
					4.5	215	4.2	199
BU-B-5	D-9	35.0-35.6	10.67-10.85	SM	3.0	144	6.5	312
					6.0	287	9.1	434
					9.0	431	11.3	542

SUMMARY OF DIRECT SHEAR TEST RESULTS  
VERIFICATION SITE, BUTLER COP, ARIZONAMX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSOTABLE  
9-2



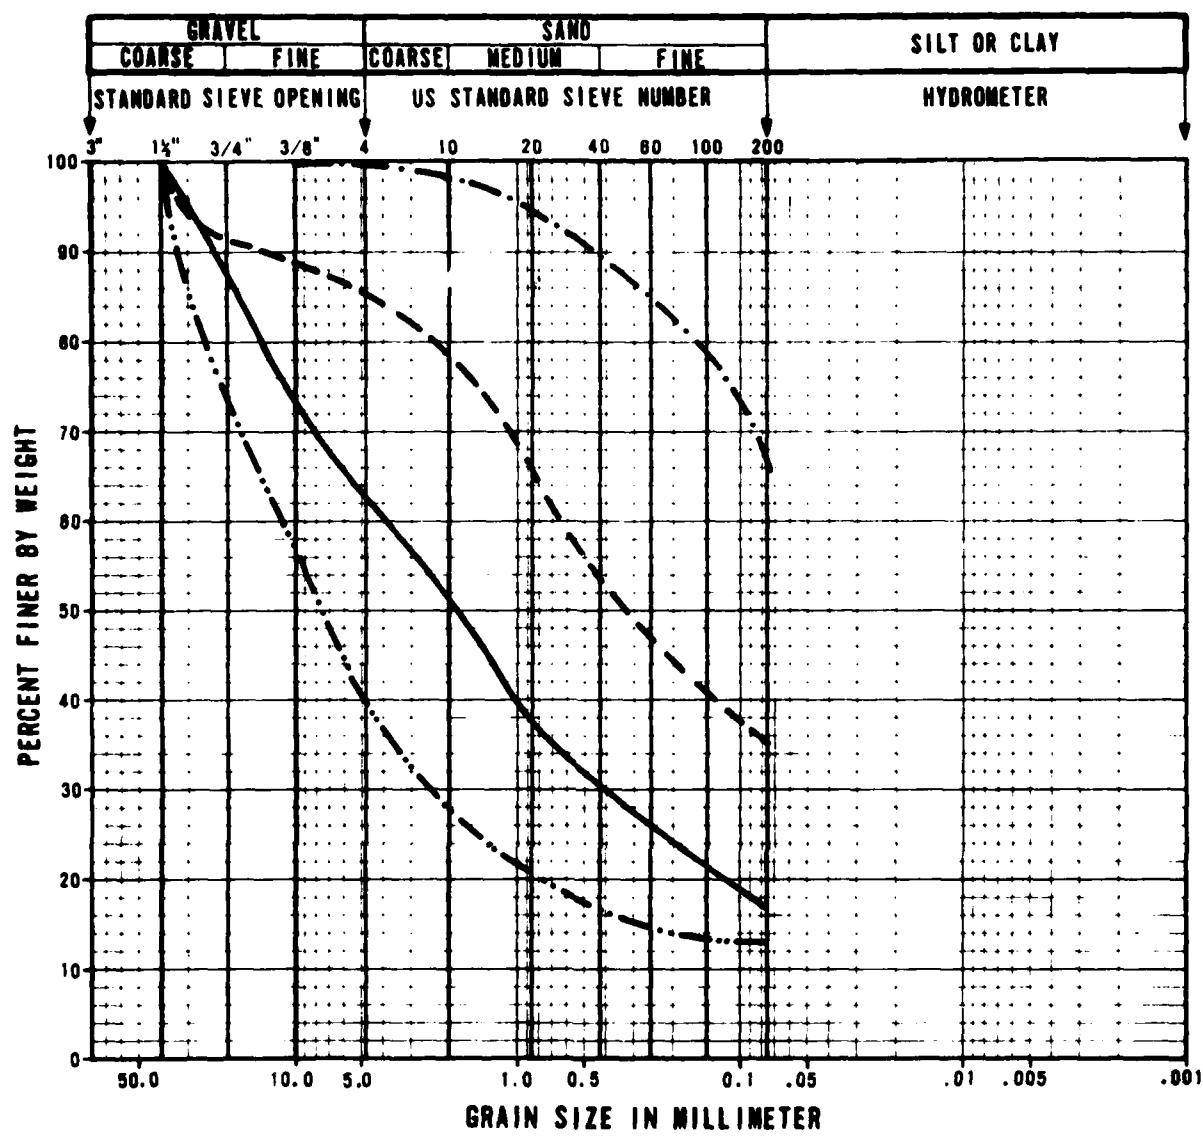


SYMBOL	COMPOSITE SAMPLE NUMBER	ACTIVITY NUMBER	SAMPLE INTERVAL		SOIL TYPE
			FEET	METERS	
—	A	BU-T-2	0.5-2.0	0.15-0.61	SM
- - -	B	BU-T-4	0.5-2.0	0.15-0.61	SM
- - .	C	BU-P-13	0.25-2.0	0.08-0.61	ML
....	D	BU-P-22	4.0-5.0	1.22-1.52	GC

GRAIN SIZE CURVES, CBR TESTS  
VERIFICATION SITE, BUTLER COP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSON

FIGURE  
9-1  
1 OF 2

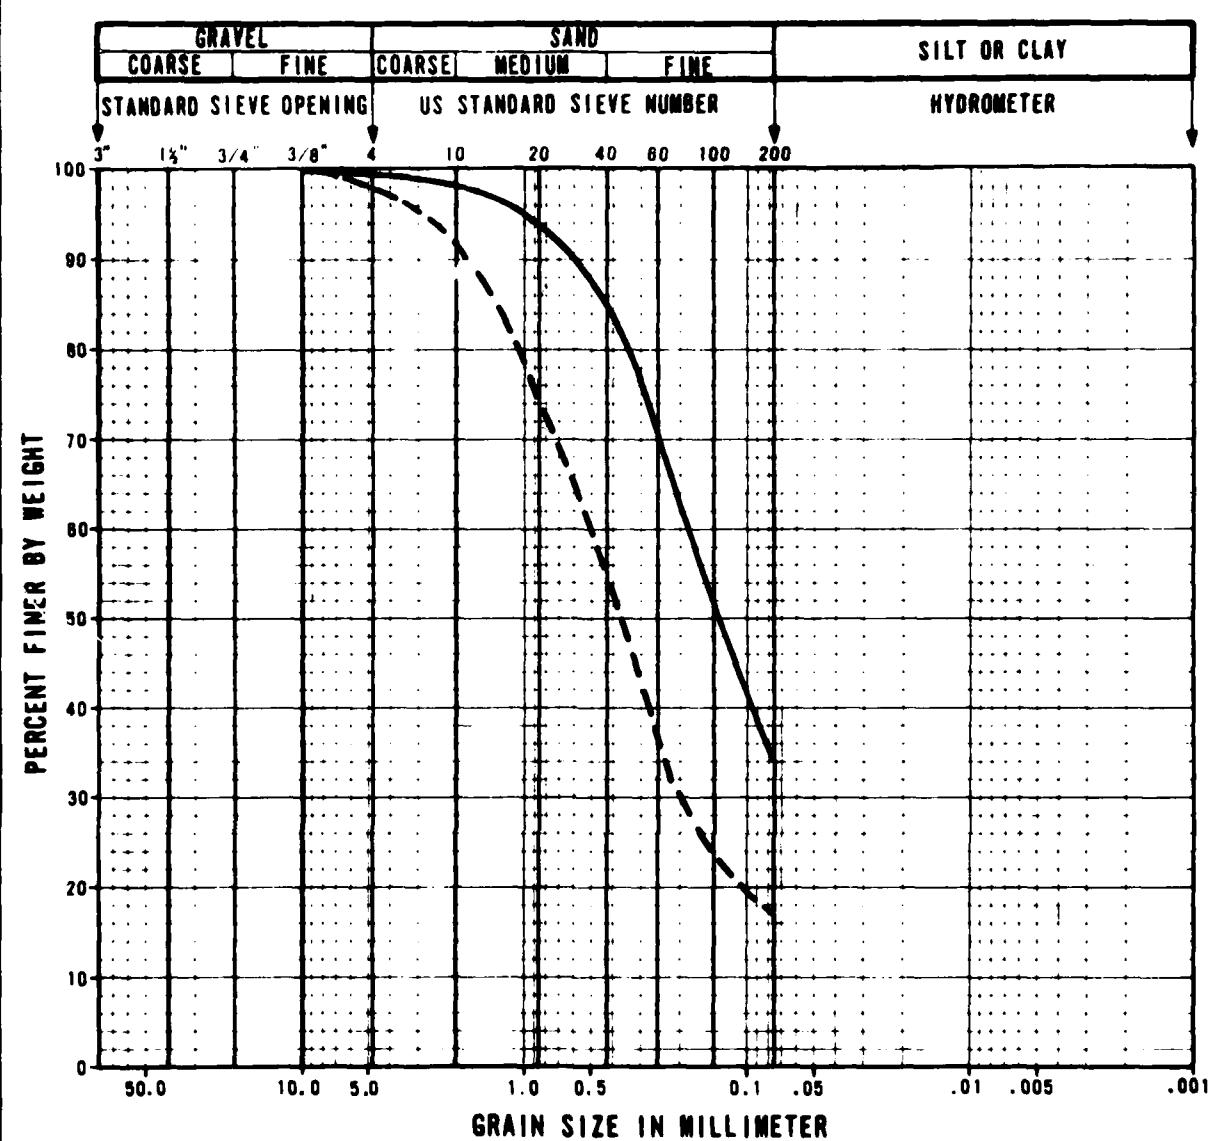

SYMBOL	COMPOSITE SAMPLE NUMBER	ACTIVITY NUMBER	SAMPLE INTERVAL		SOIL TYPE
			FEET	METERS	
—	E	BU-CS-10	0.5-2.0	0.15-0.61	SM
- - -	F	BU-CS-84	0.25-2.0	0.08-0.61	SM

GRAIN SIZE CURVES, CBR TESTS  
VERIFICATION SITE, BUTLER CDP. ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
9-1  
2 OF 2

AFY-12

COMPOSITE SAMPLE NUMBER	SOIL TYPE	PERCENT PASSING #200	ATTERBERG LIMITS		SPECIFIC GRAVITY	MAXIMUM DRY DENSITY pcf kg/m <sup>3</sup>	OPTIMUM MOISTURE CONTENT (%)	COMPACTED DRY DENSITY pcf kg/m <sup>3</sup>	COMPACTED MOISTURE CONTENT (%)	PERCENT OF MAXIMUM DRY DENSITY	CBR (%)
			LL	PI							
A	SM	17									
B	SM	34									
C	ML	66	21	3							
D	GC	13	42	27							

CALIFORNIA BEARING RATIO (CBR) TEST RESULTS  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-4  
1 OF 2


FUGRO NATIONAL, INC.  
AFV-13

COMPOSITE SAMPLE NUMBER	SOIL TYPE	PERCENT PASSING #200	ATTERBERG LIMITS		SPECIFIC GRAVITY	MAXIMUM DRY DENSITY pcf	OPTIMUM MOISTURE MOISTURE (%)	COMPACTED DRY DENSITY pcf	COMPACTED MOISTURE MOISTURE (%)	PERCENT OF MAXIMUM DRY DENSITY	CBR (%)		
			LL	PI									
E	SM	35				124.5	1994	9.5	115.6	1852	8.5	92.9	15
F	SM	16				125.9	2017	7.4	115.4	1849	7.4	91.7	14

CALIFORNIA BEARING RATIO (CBR) TEST RESULTS  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

TABLE  
9-4  
2 OF 2

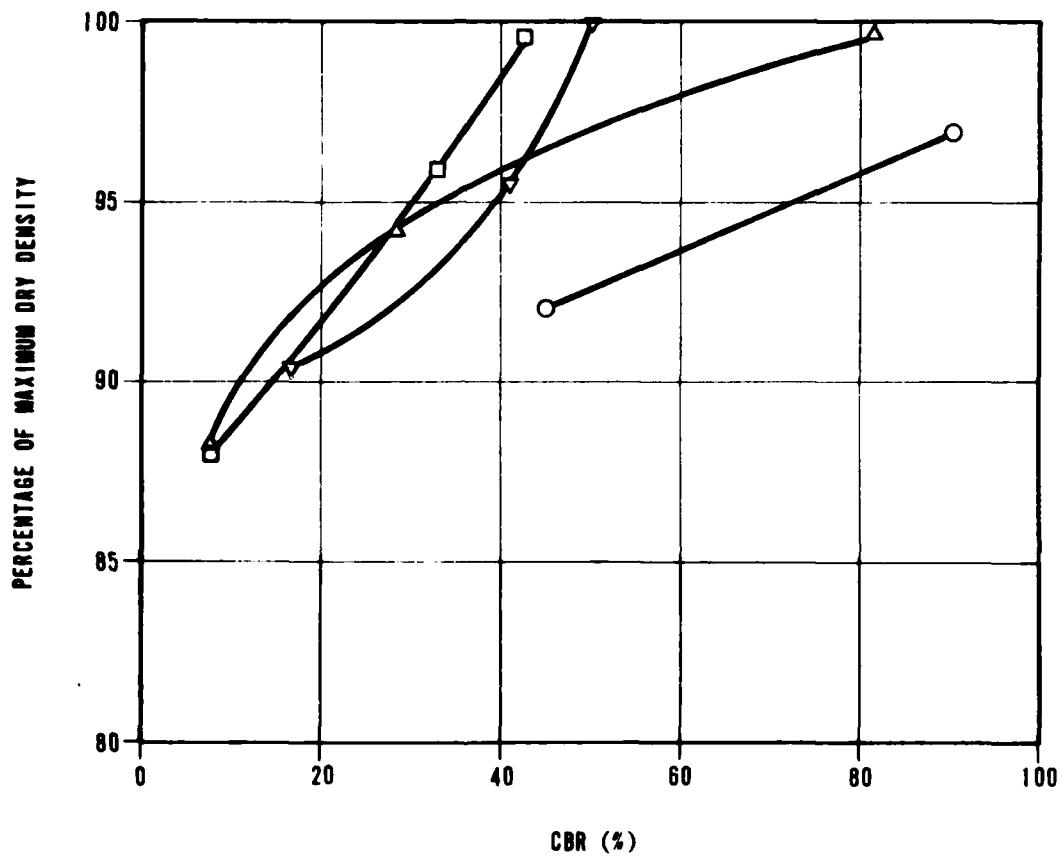


SYMBOL	COMPOSITE SAMPLE NUMBER	SOIL TYPE
○	A	SM
□	B	SM
△	C	ML
▽	D	GC

CALIFORNIA BEARING RATIO (CBR) CURVES  
VERIFICATION SITE, BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
9-2  
1 OF 2

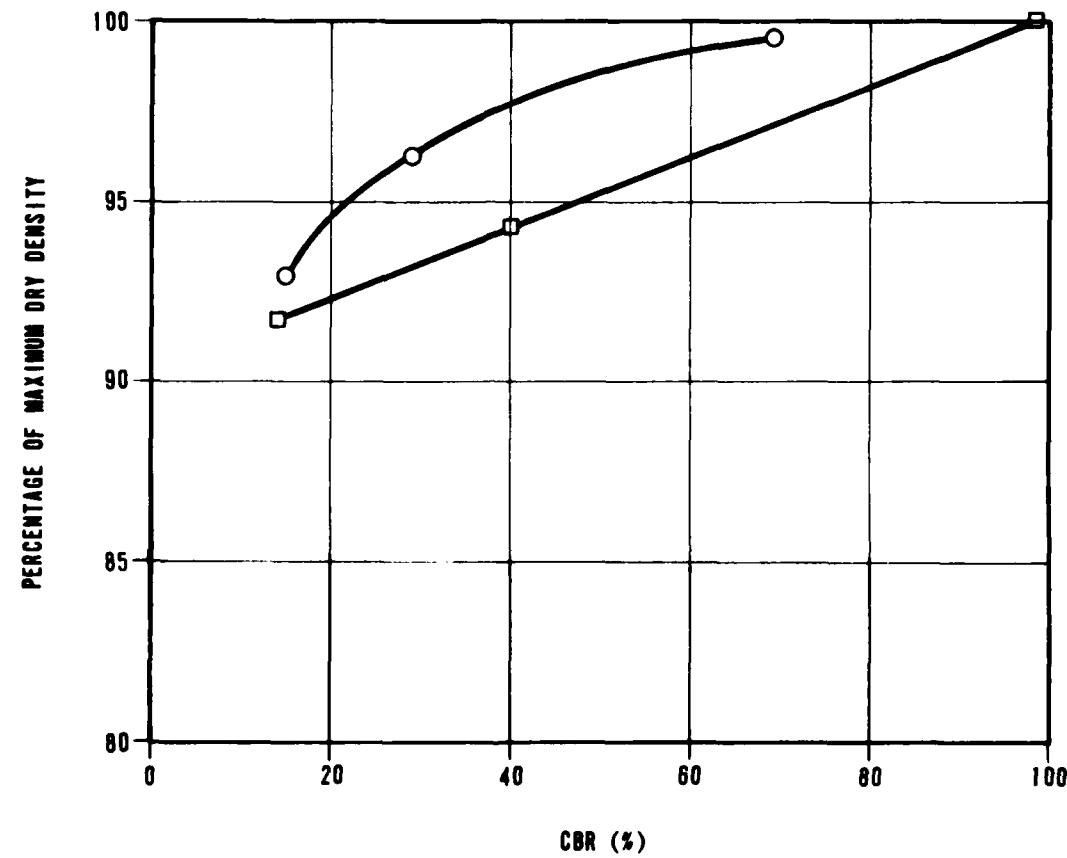

SYMBOL	COMPOSITE SAMPLE NUMBER	SOIL TYPE
○	E	SM
□	F	SM


CALIFORNIA BEARING RATIO (CBR) CURVES  
VERIFICATION SITE, BUTLER CDP, ARIZONA


MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE SAMSO

FIGURE  
9-2  
2 OF 2

FUGRO NATIONAL, INC.


AFV-14

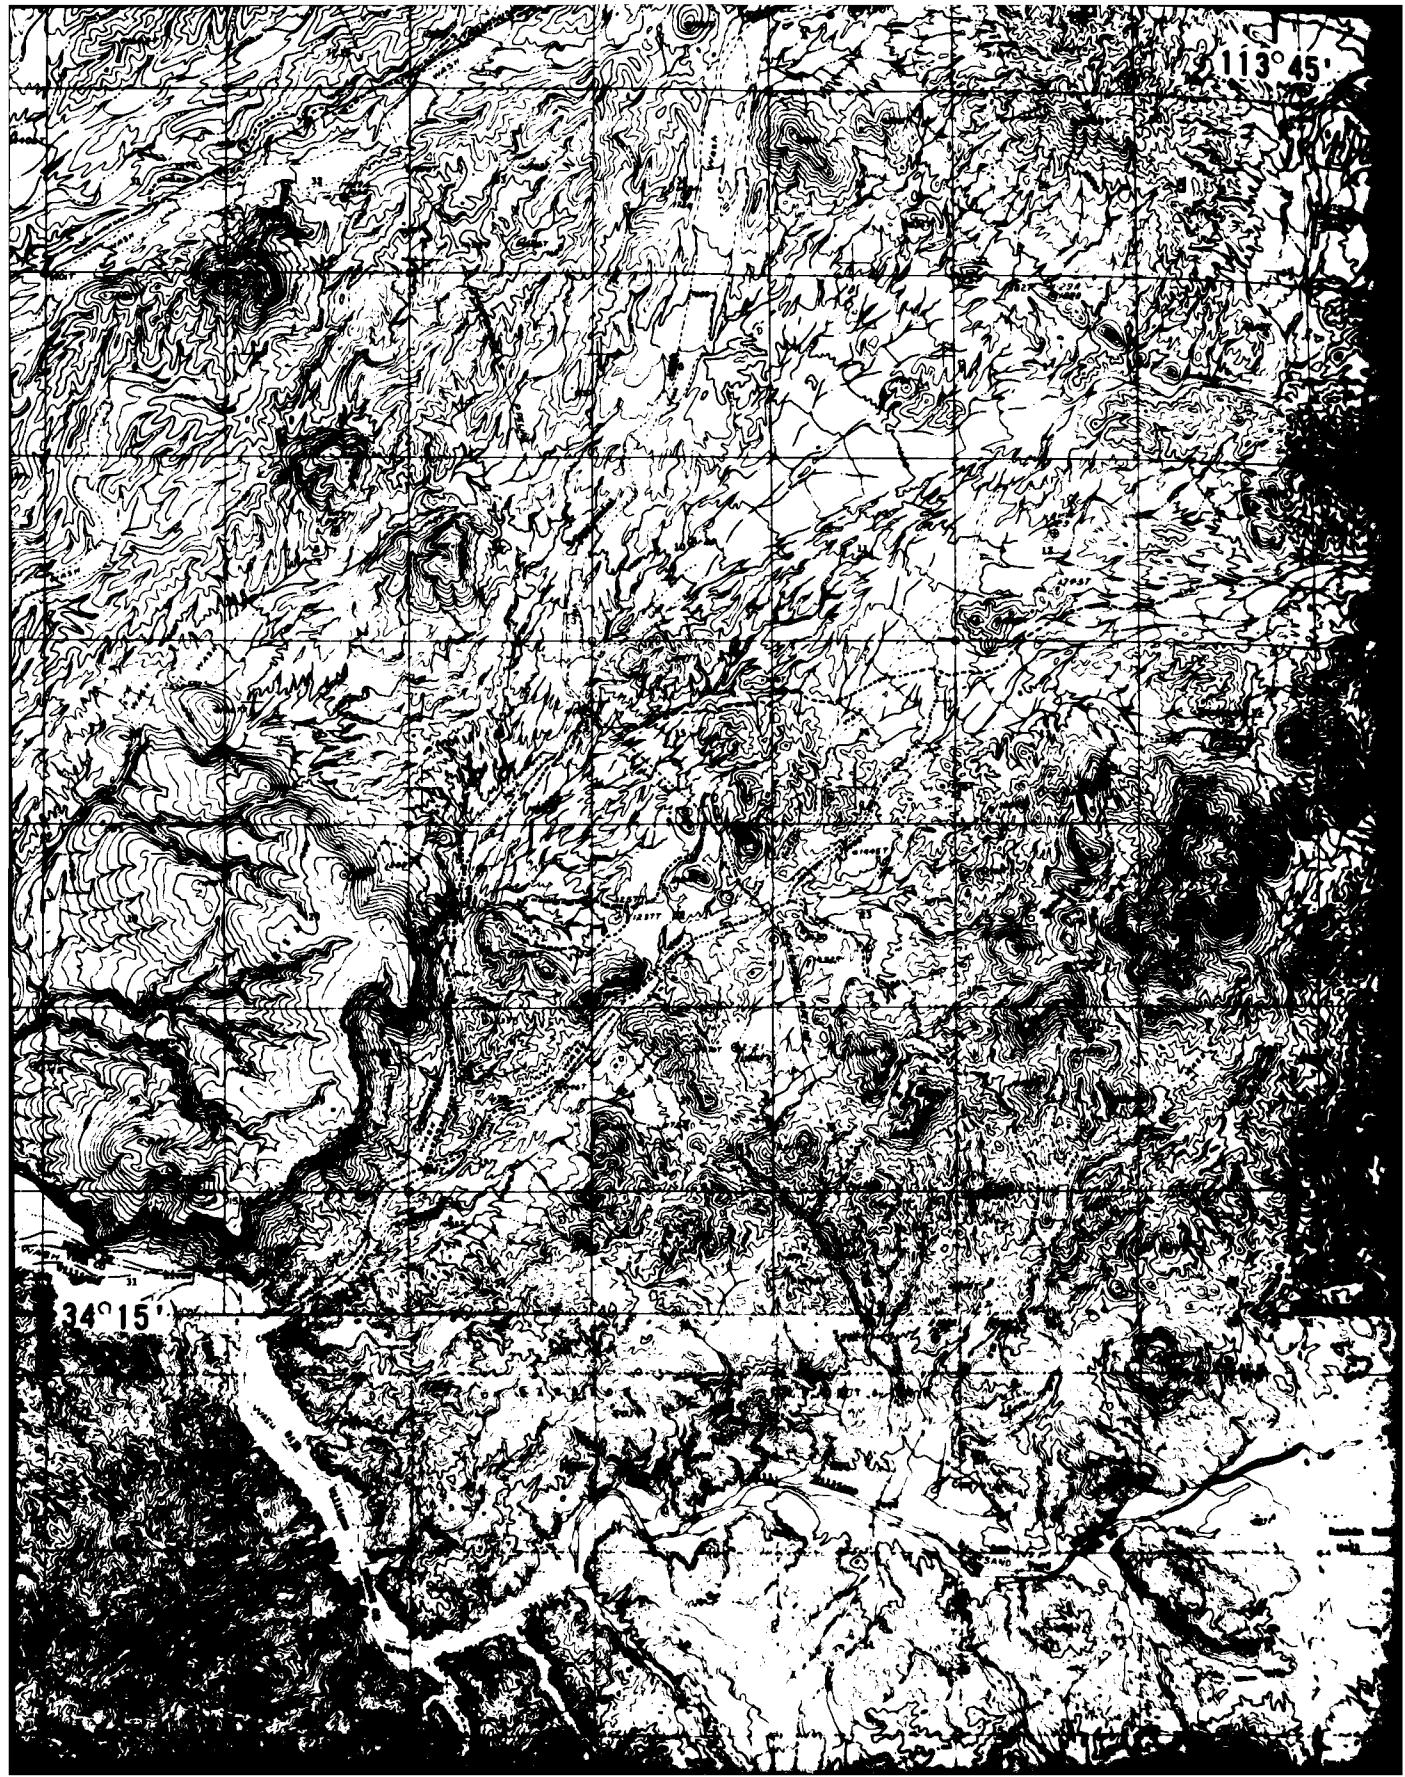


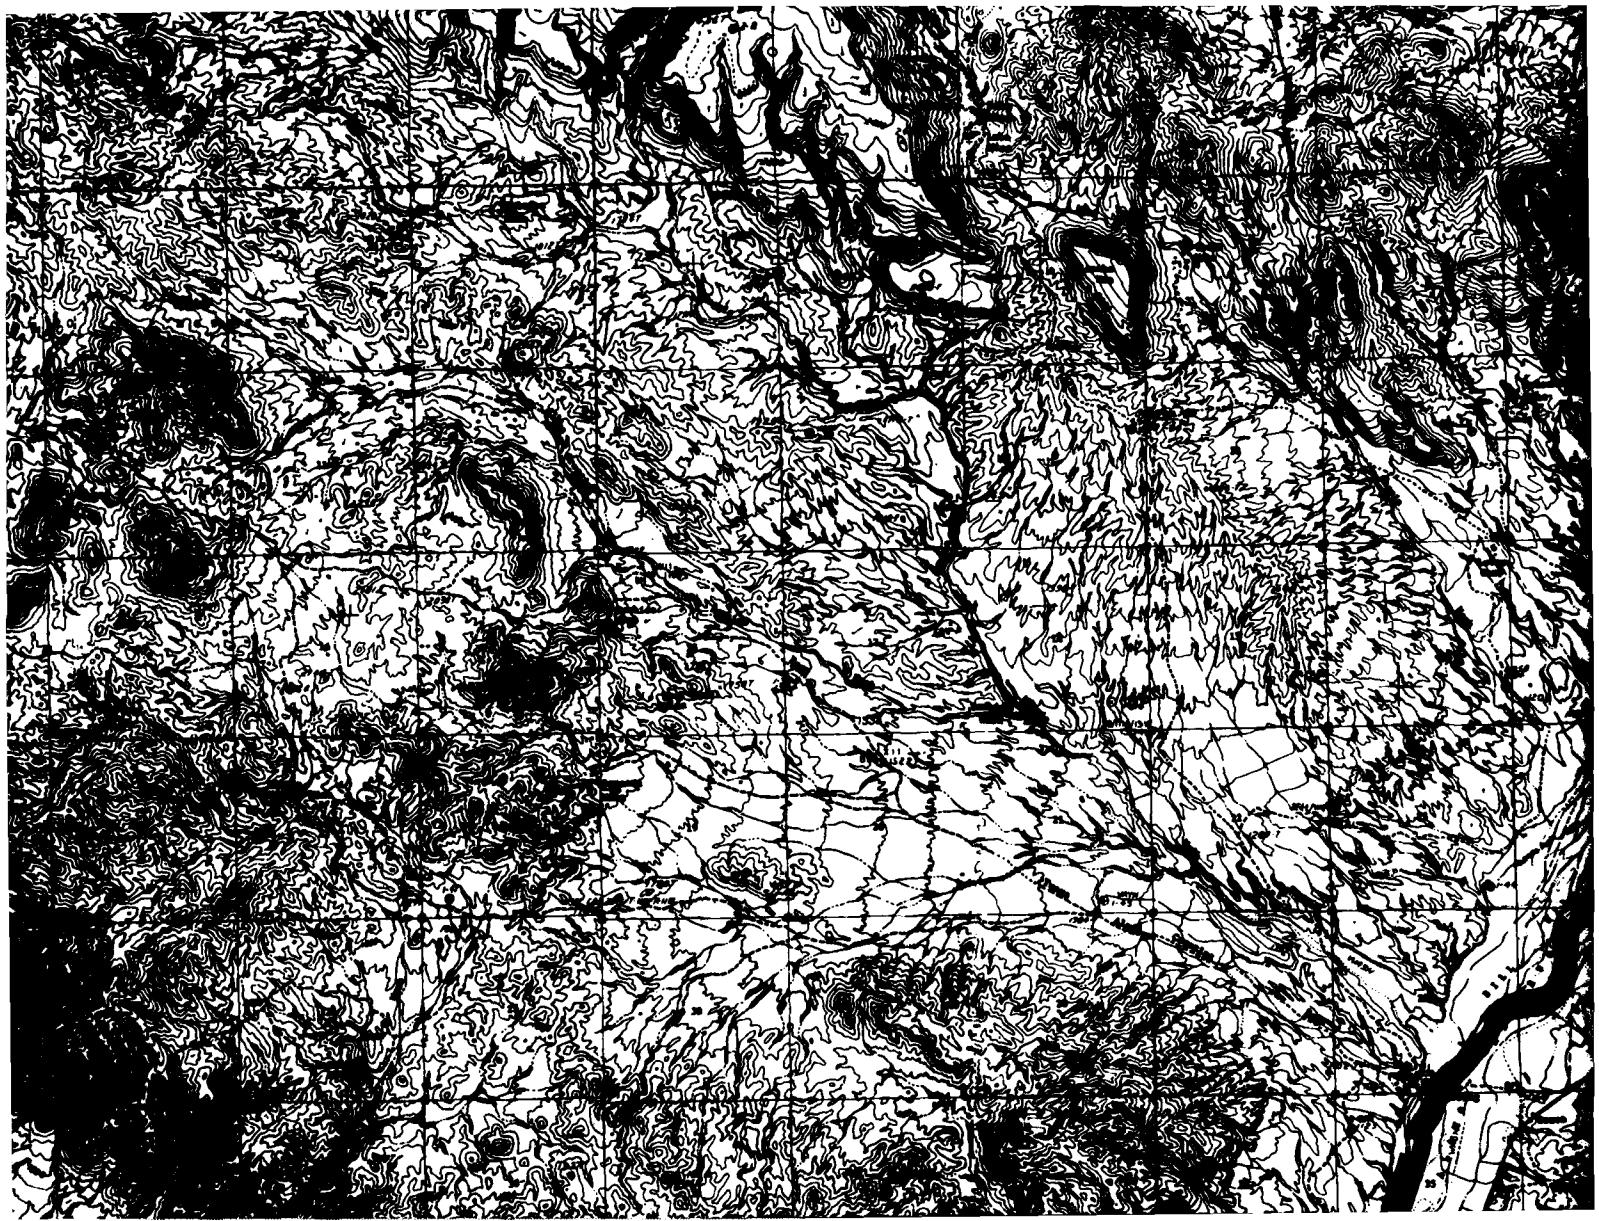





113°15'

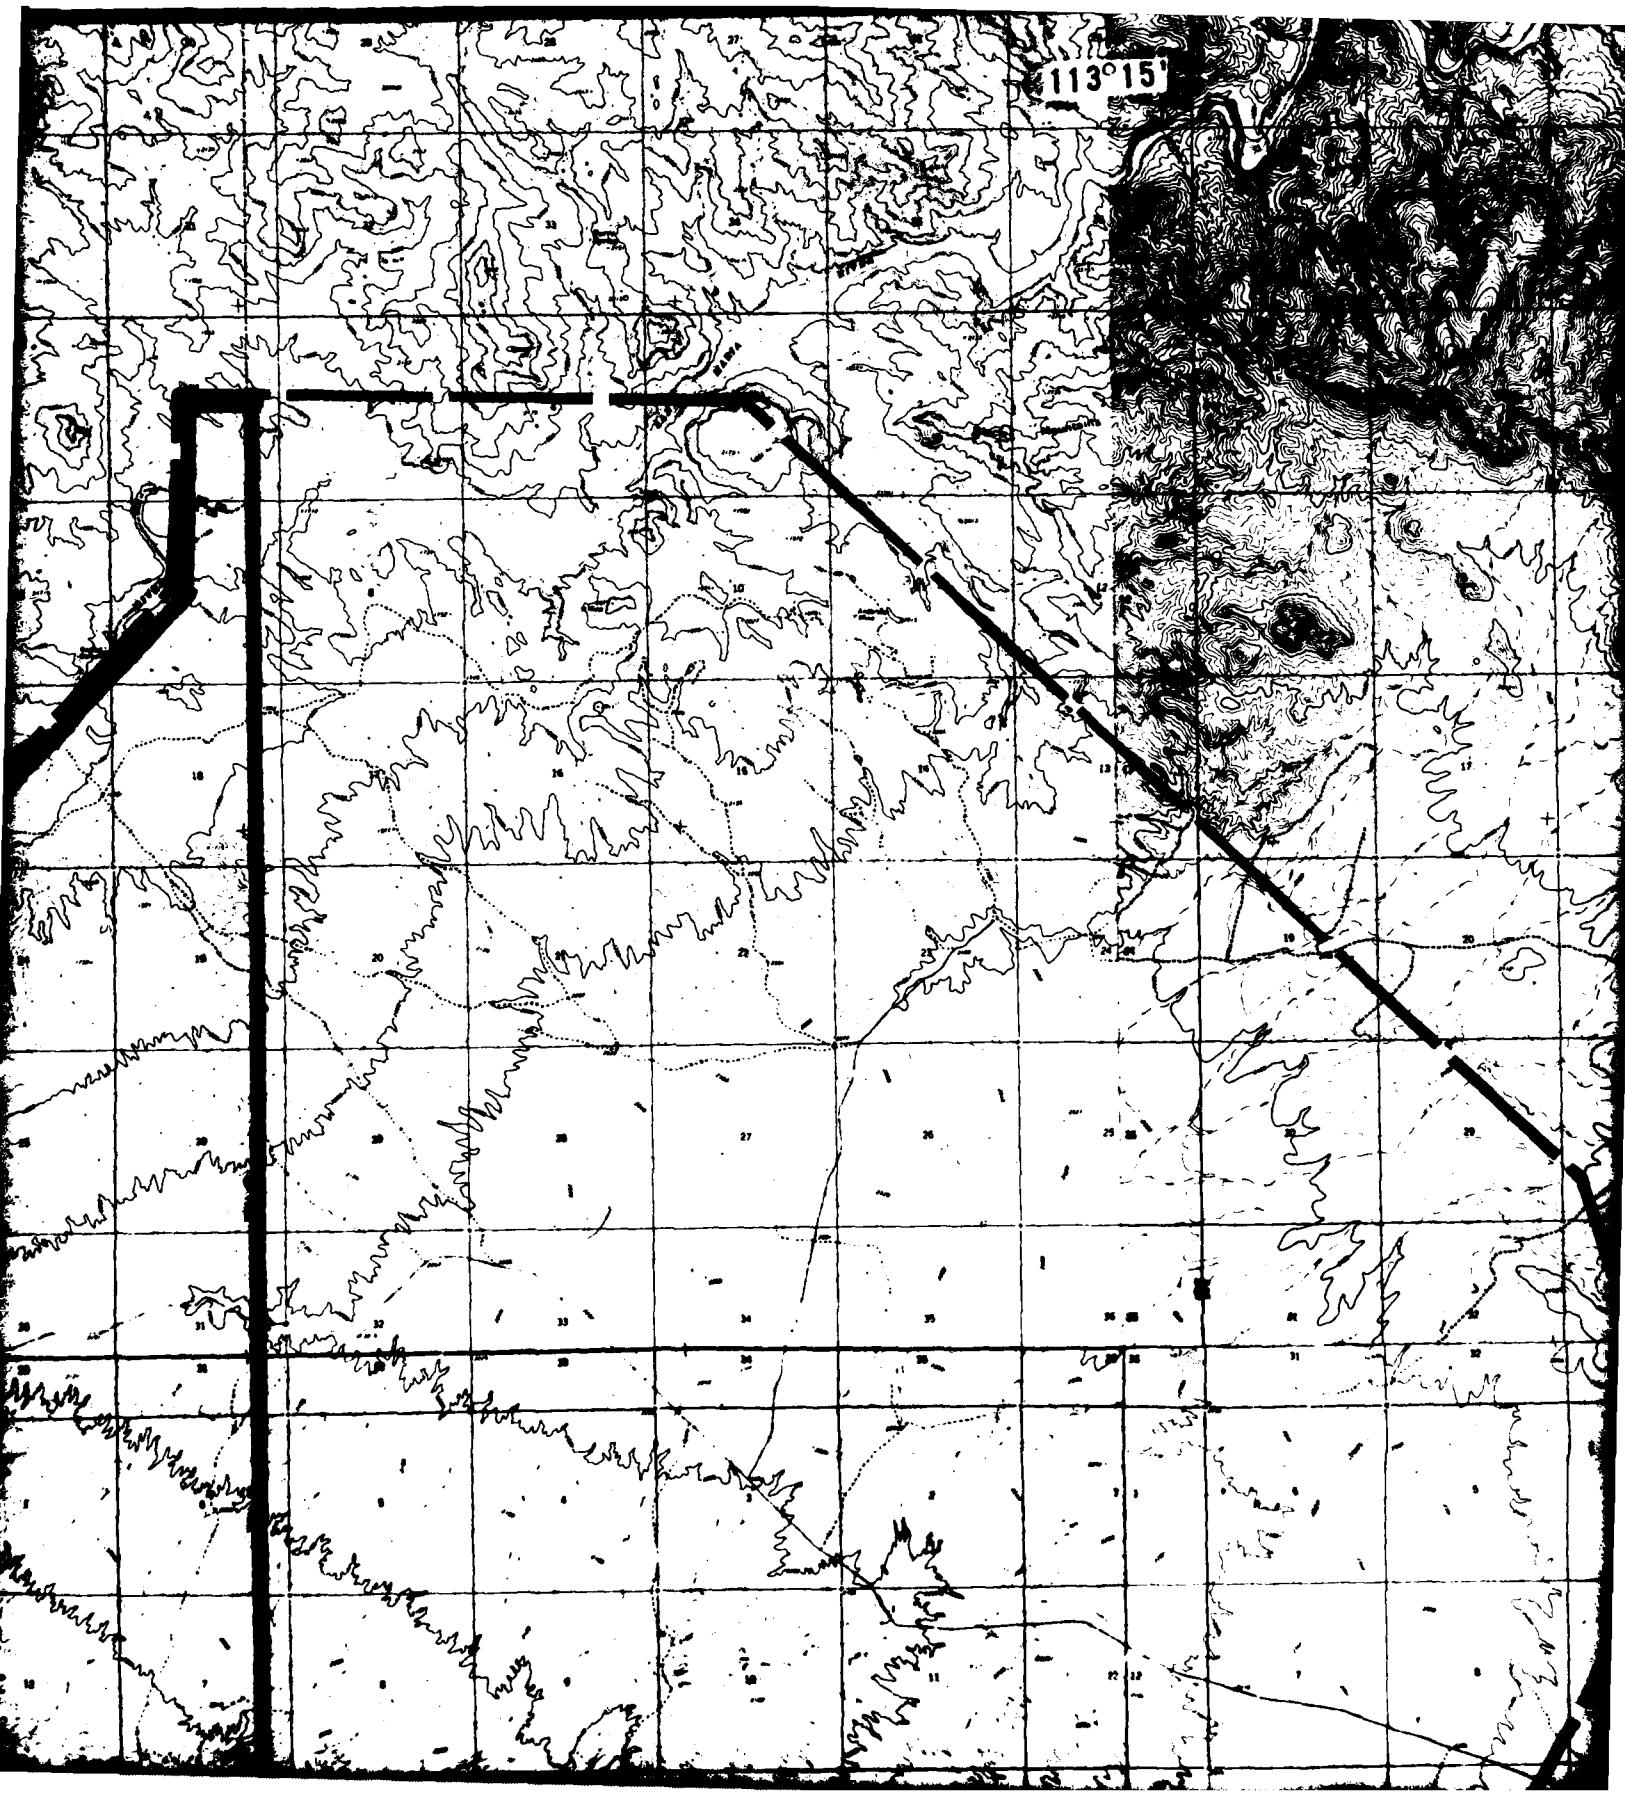


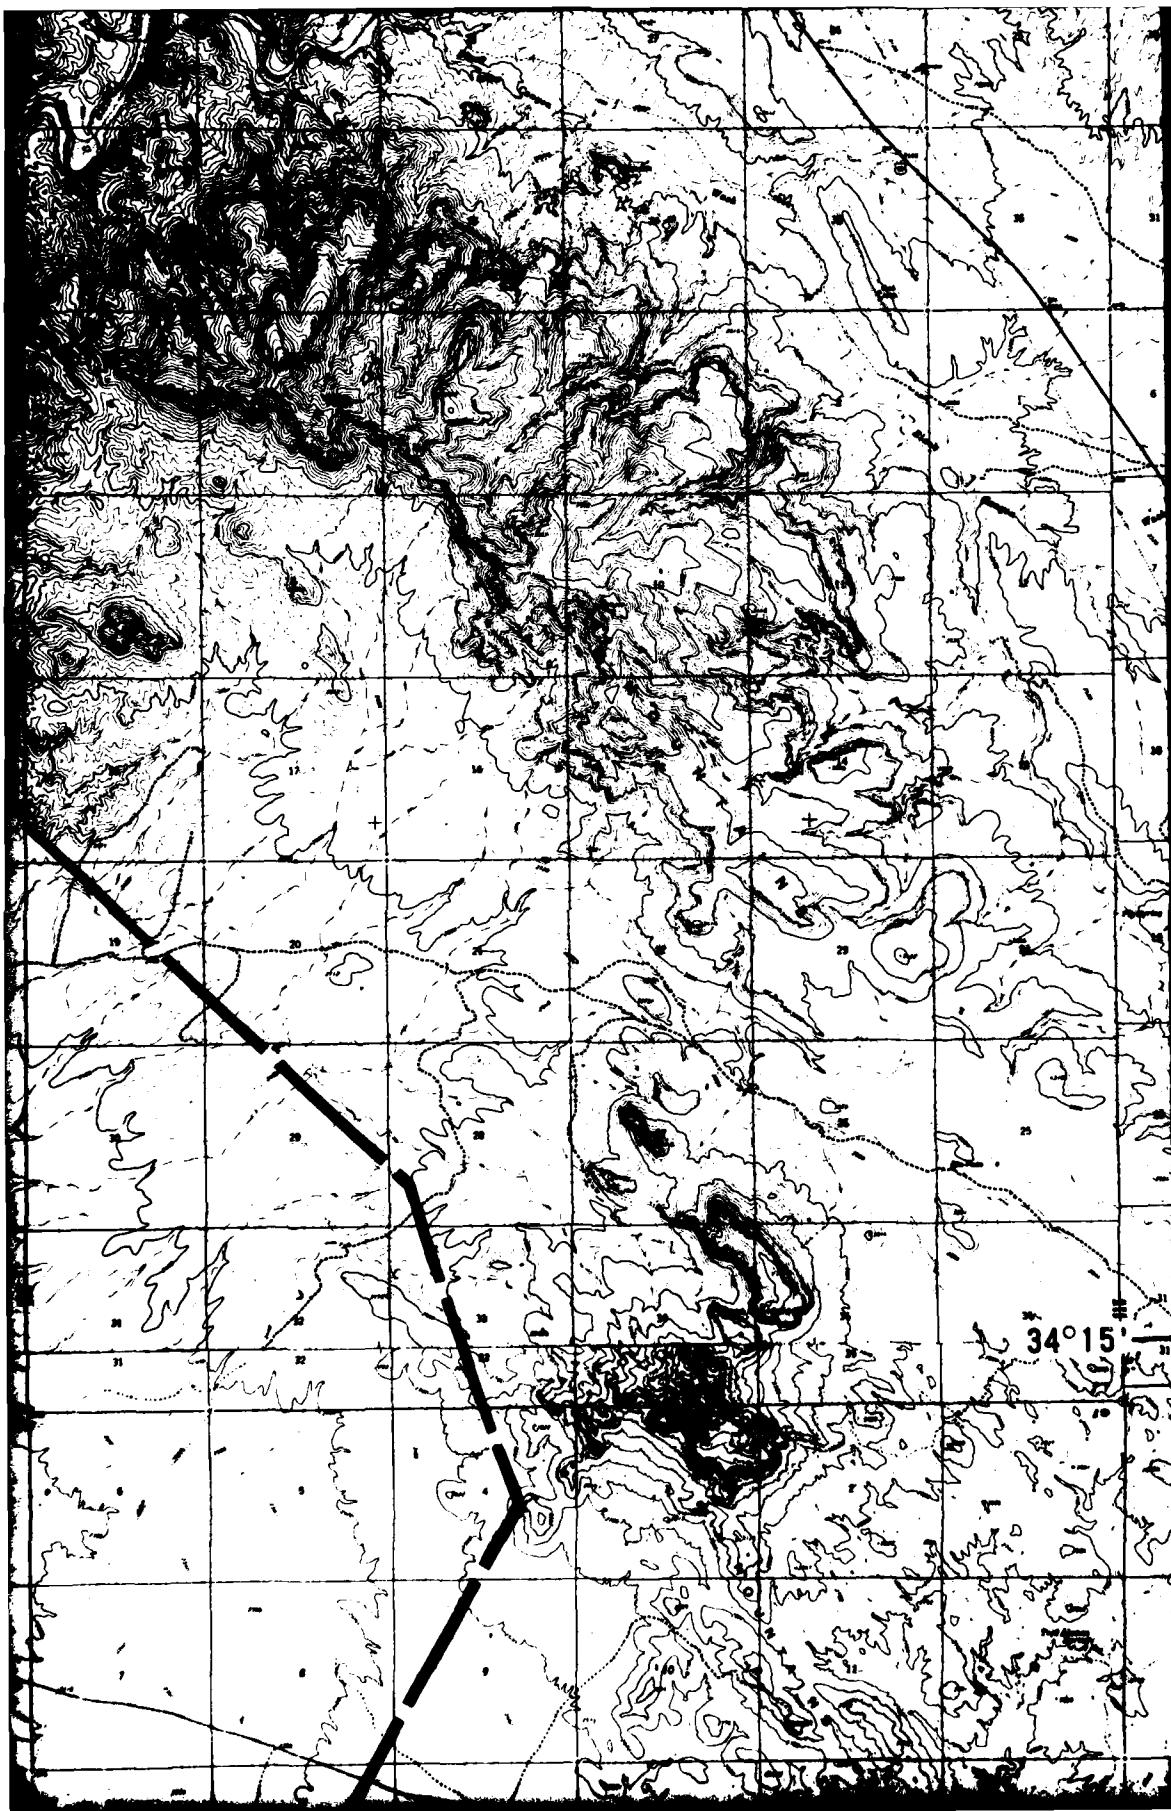


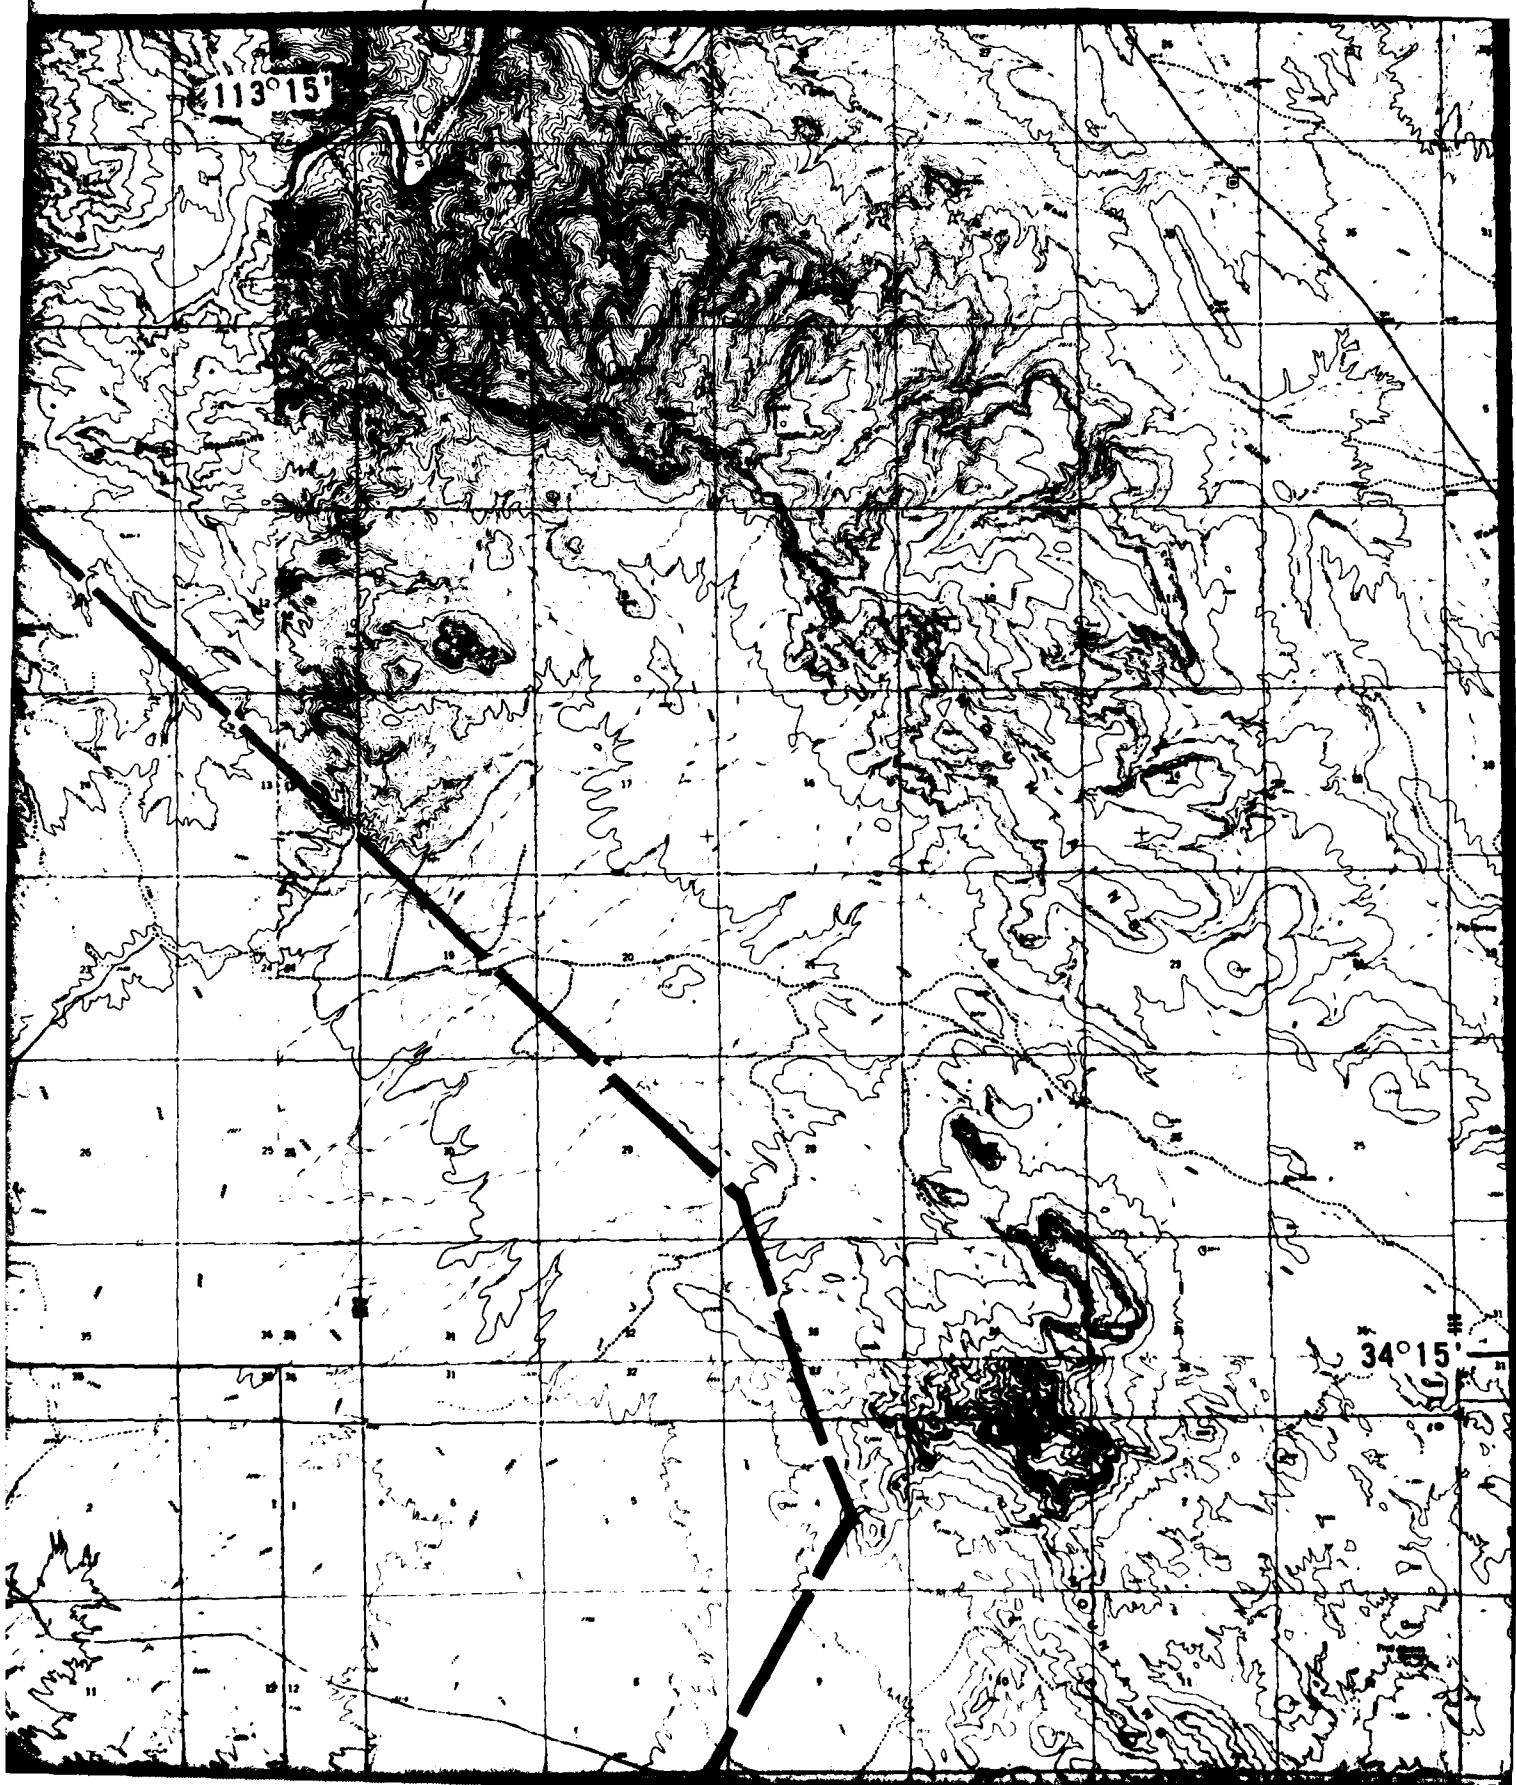


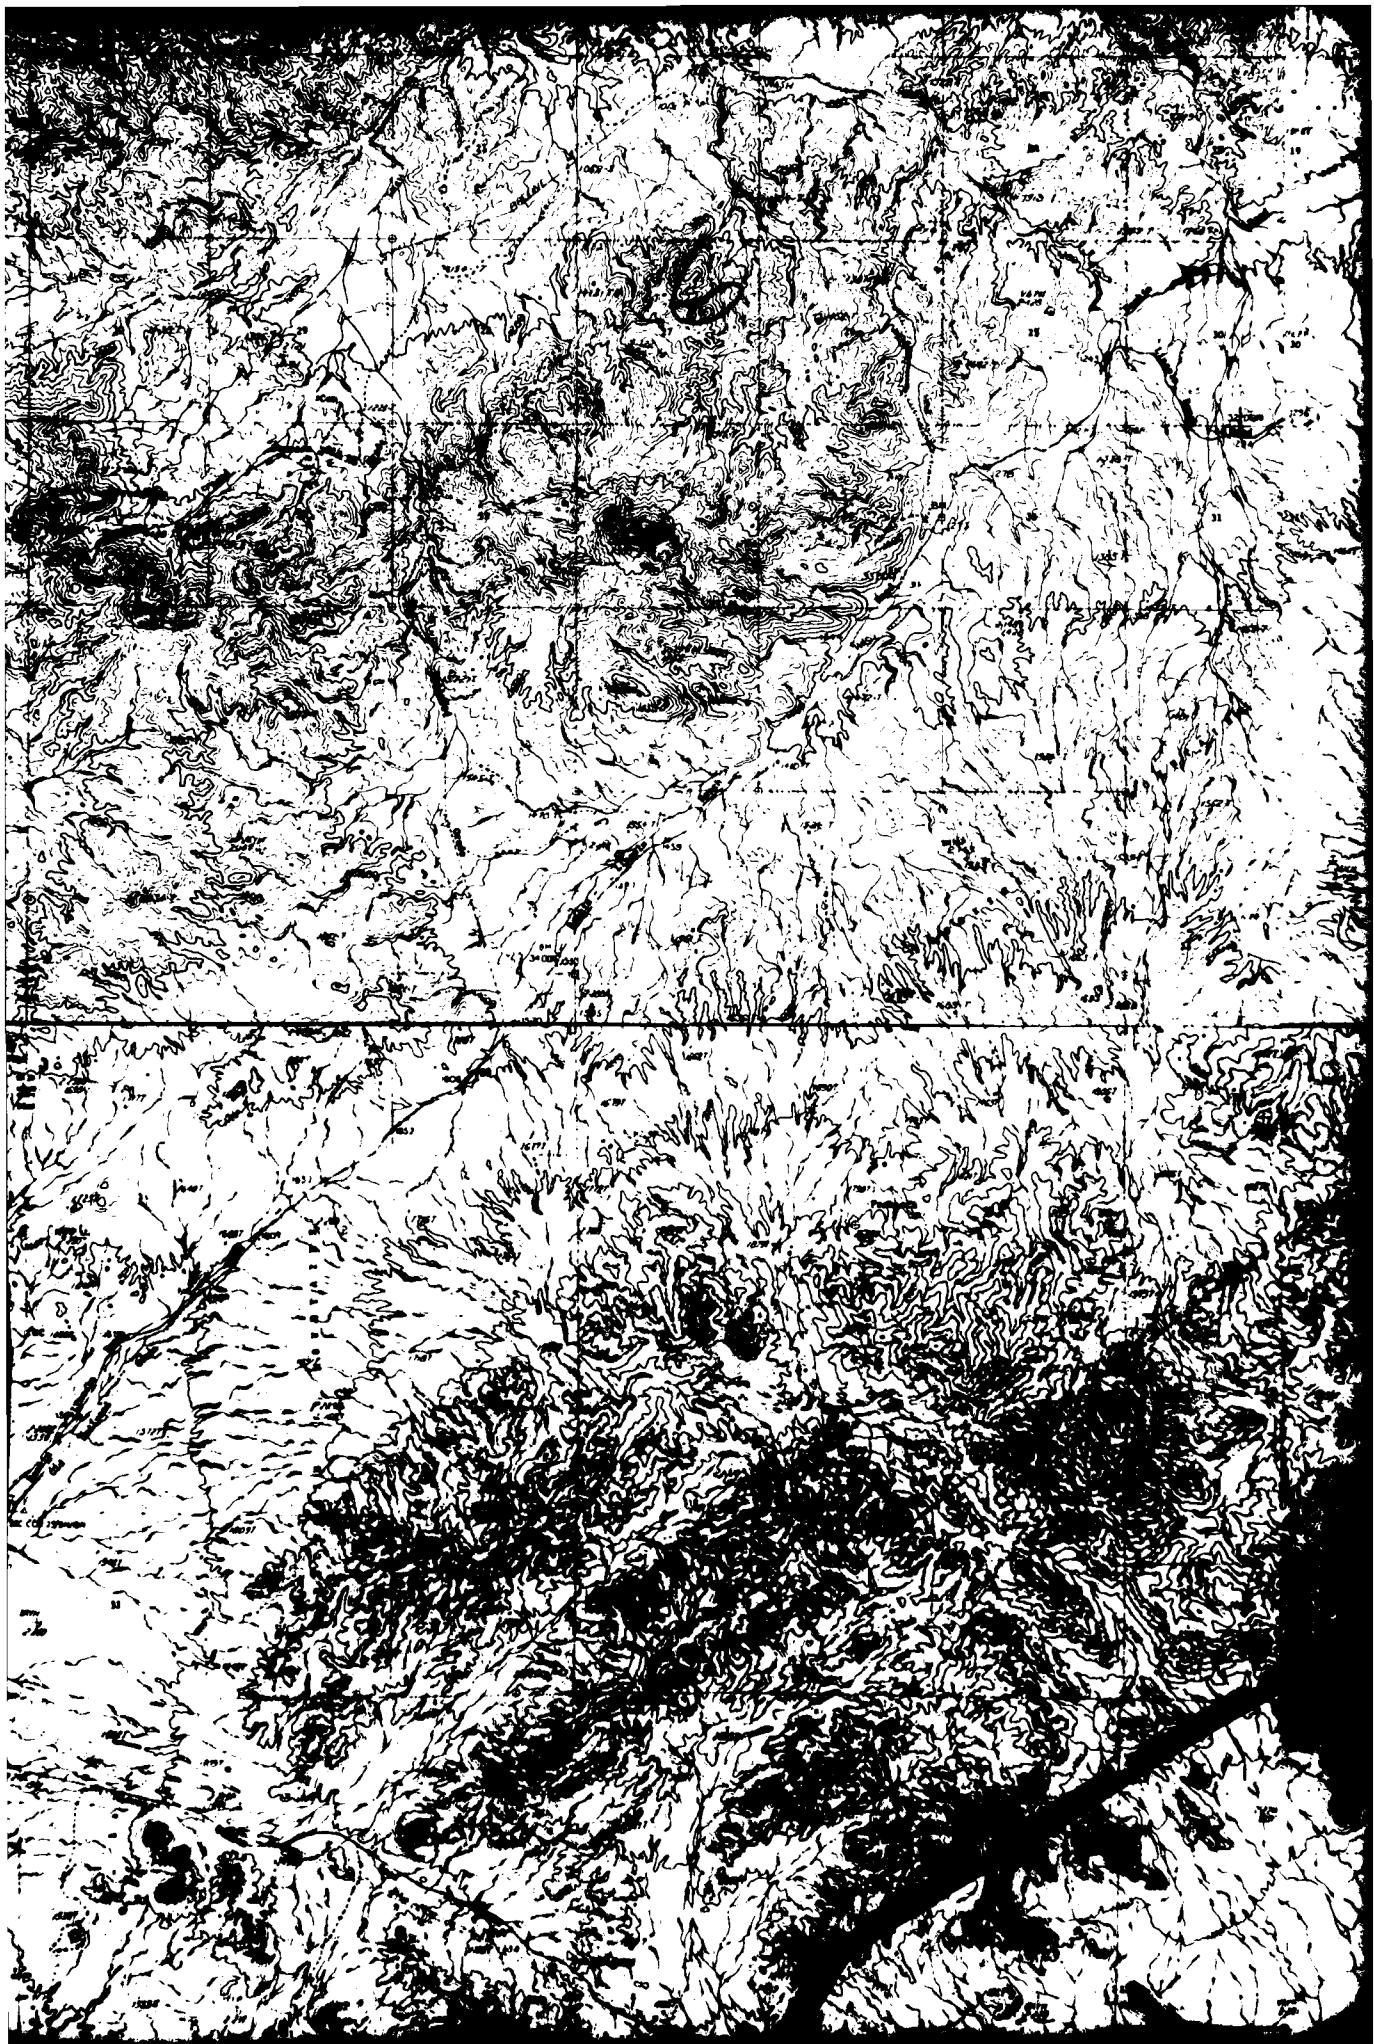




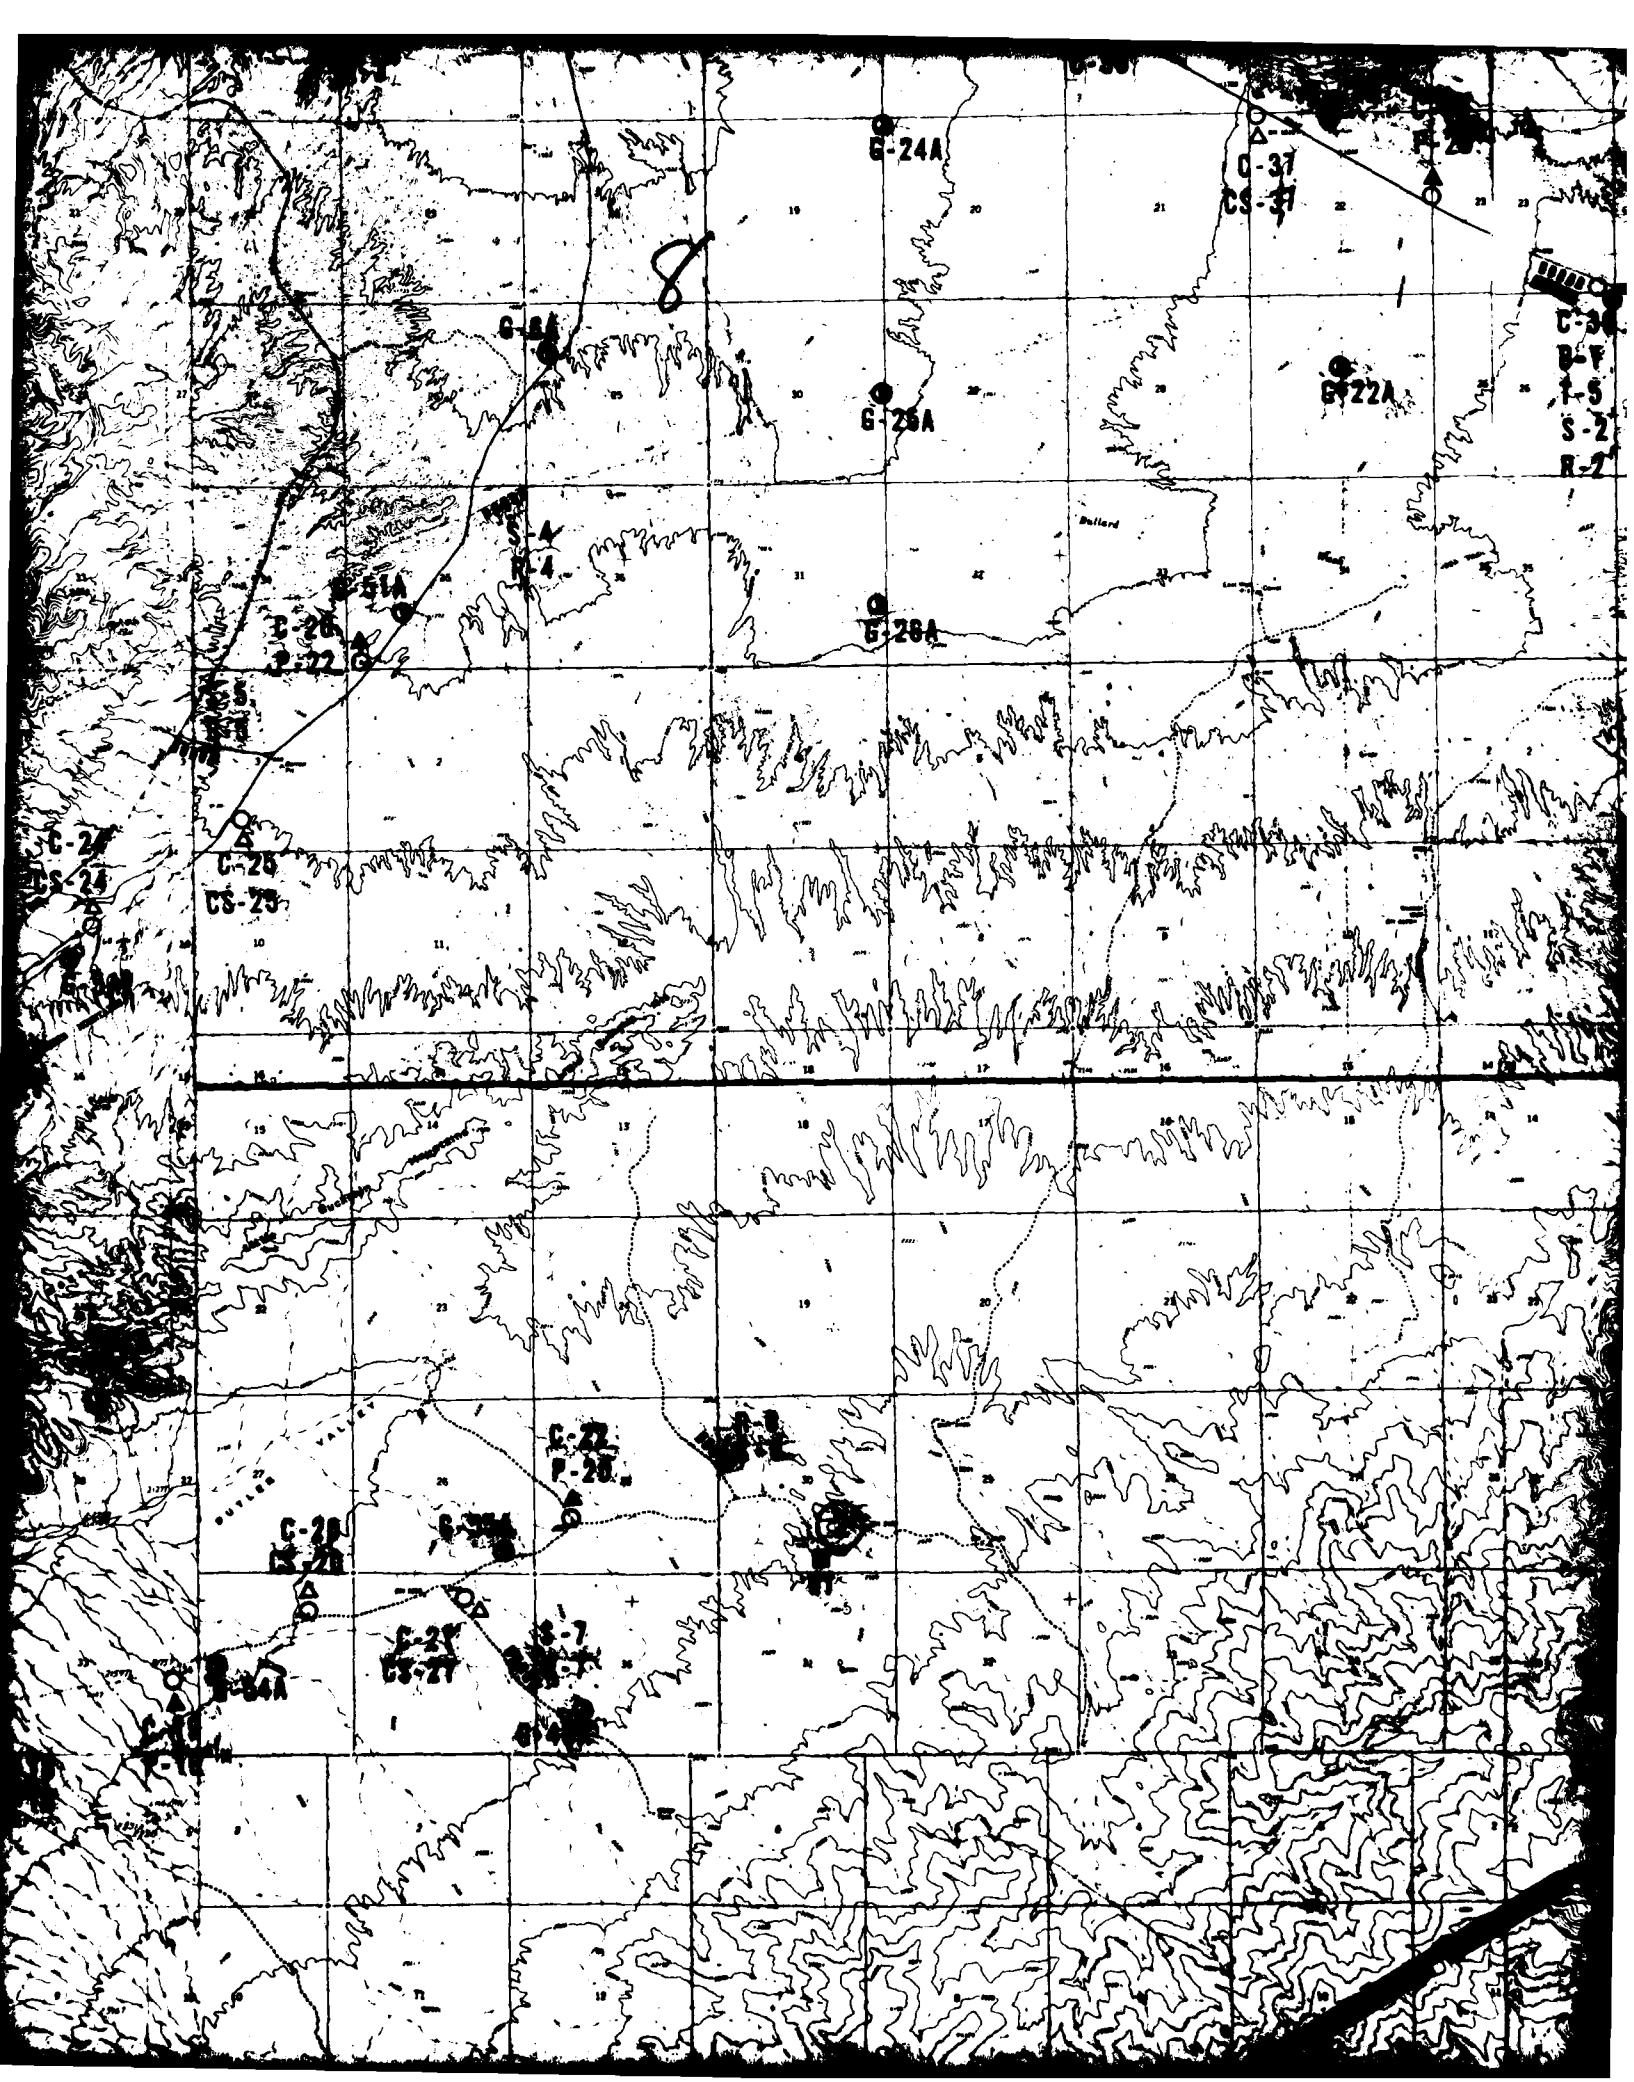


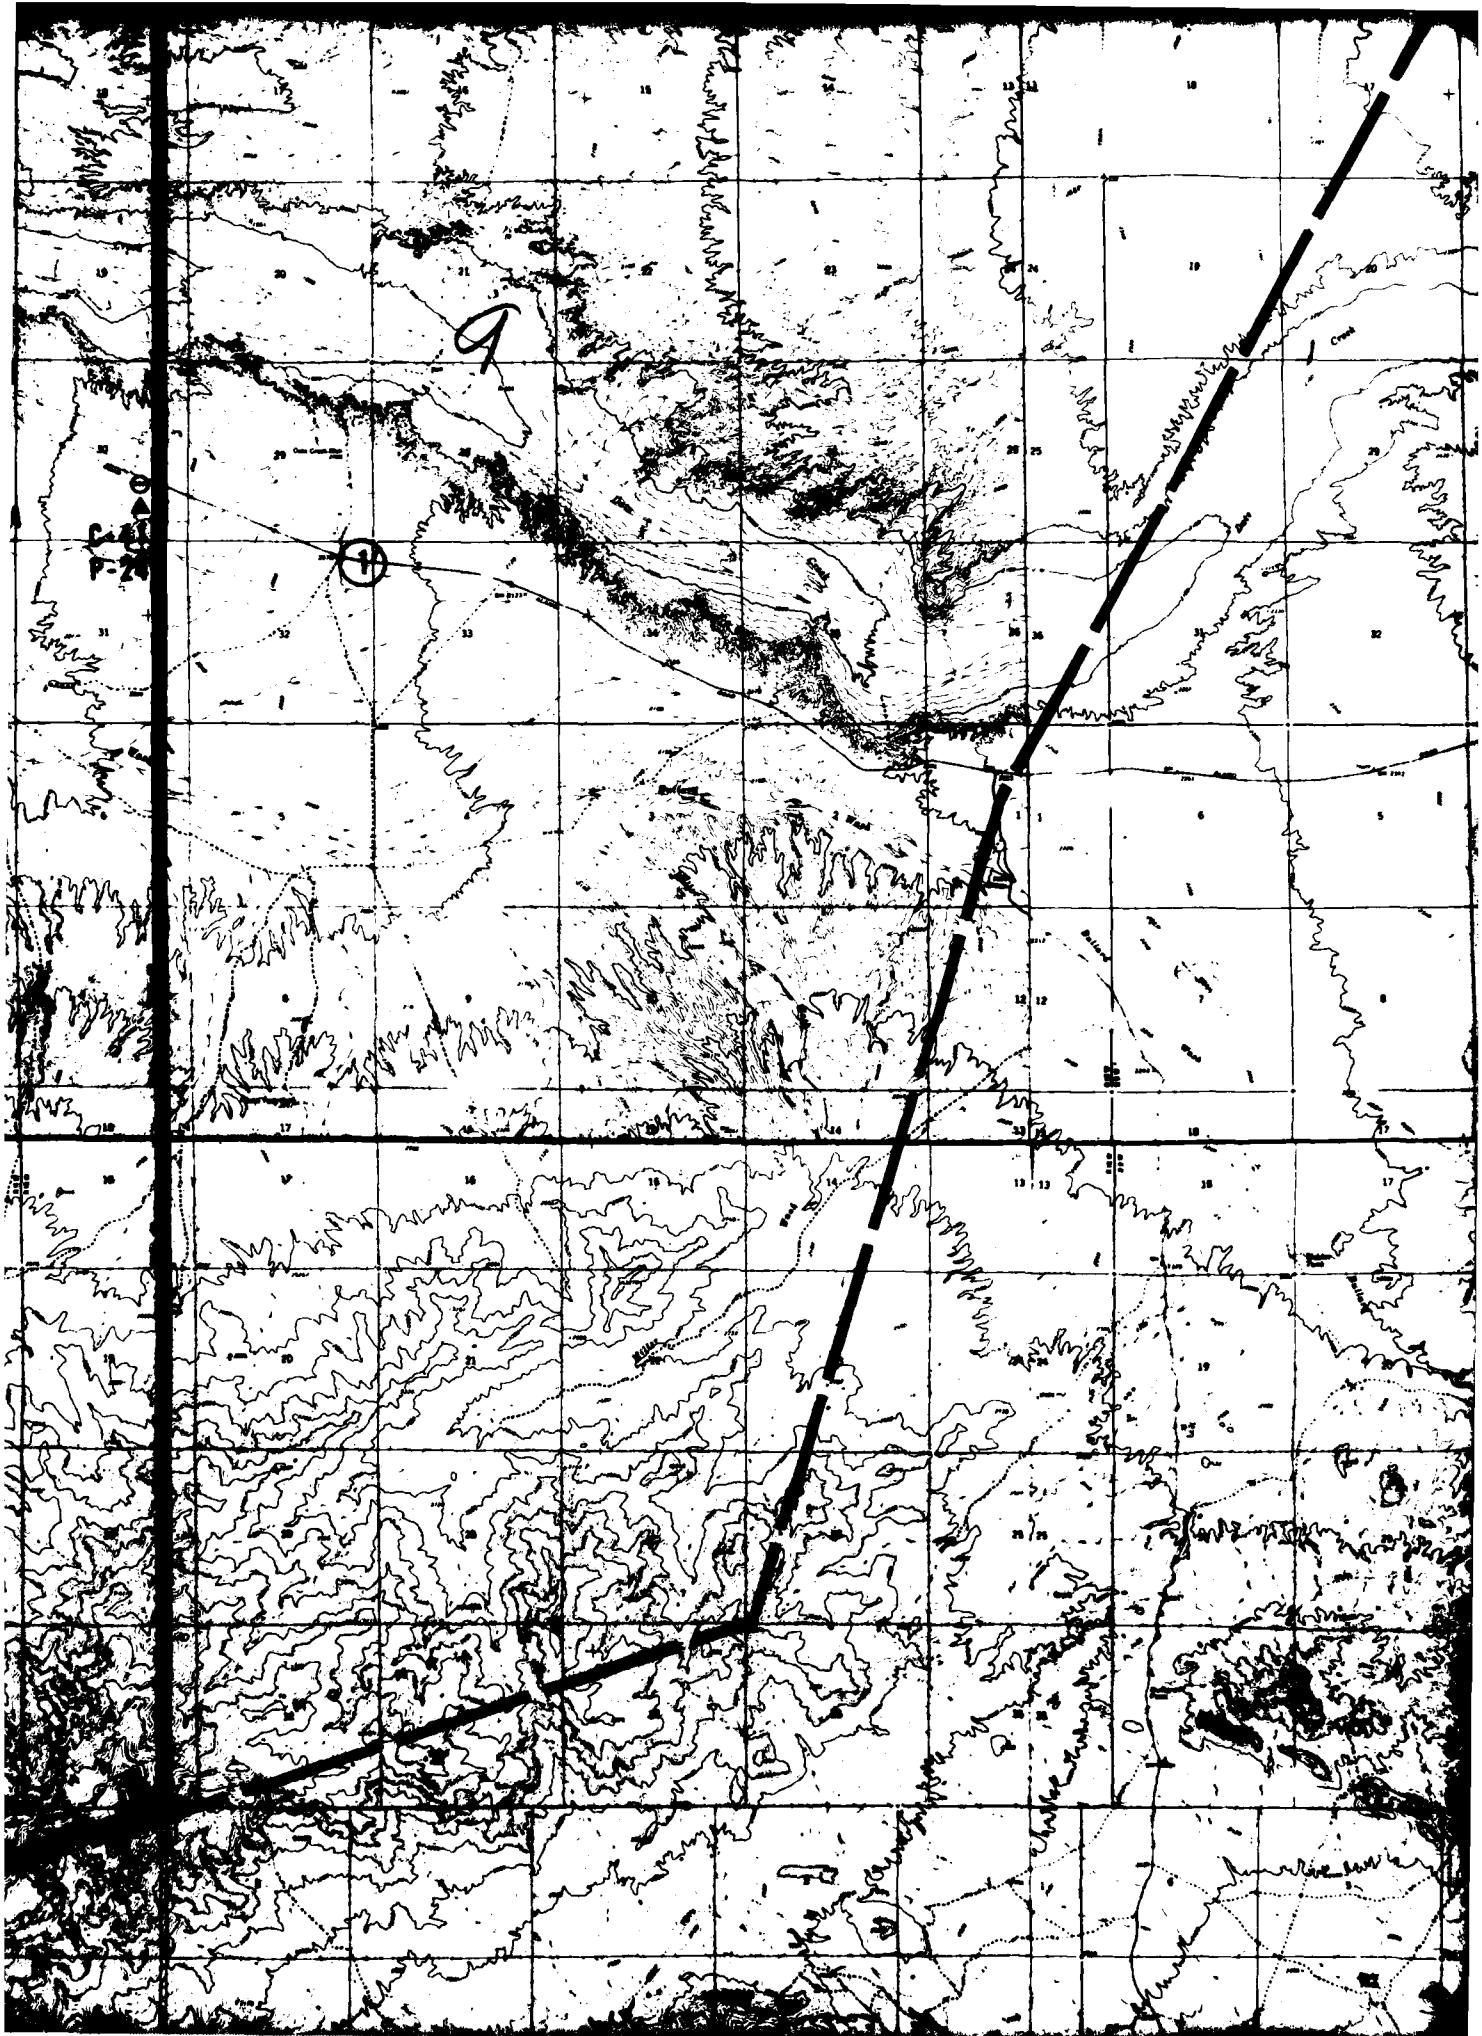


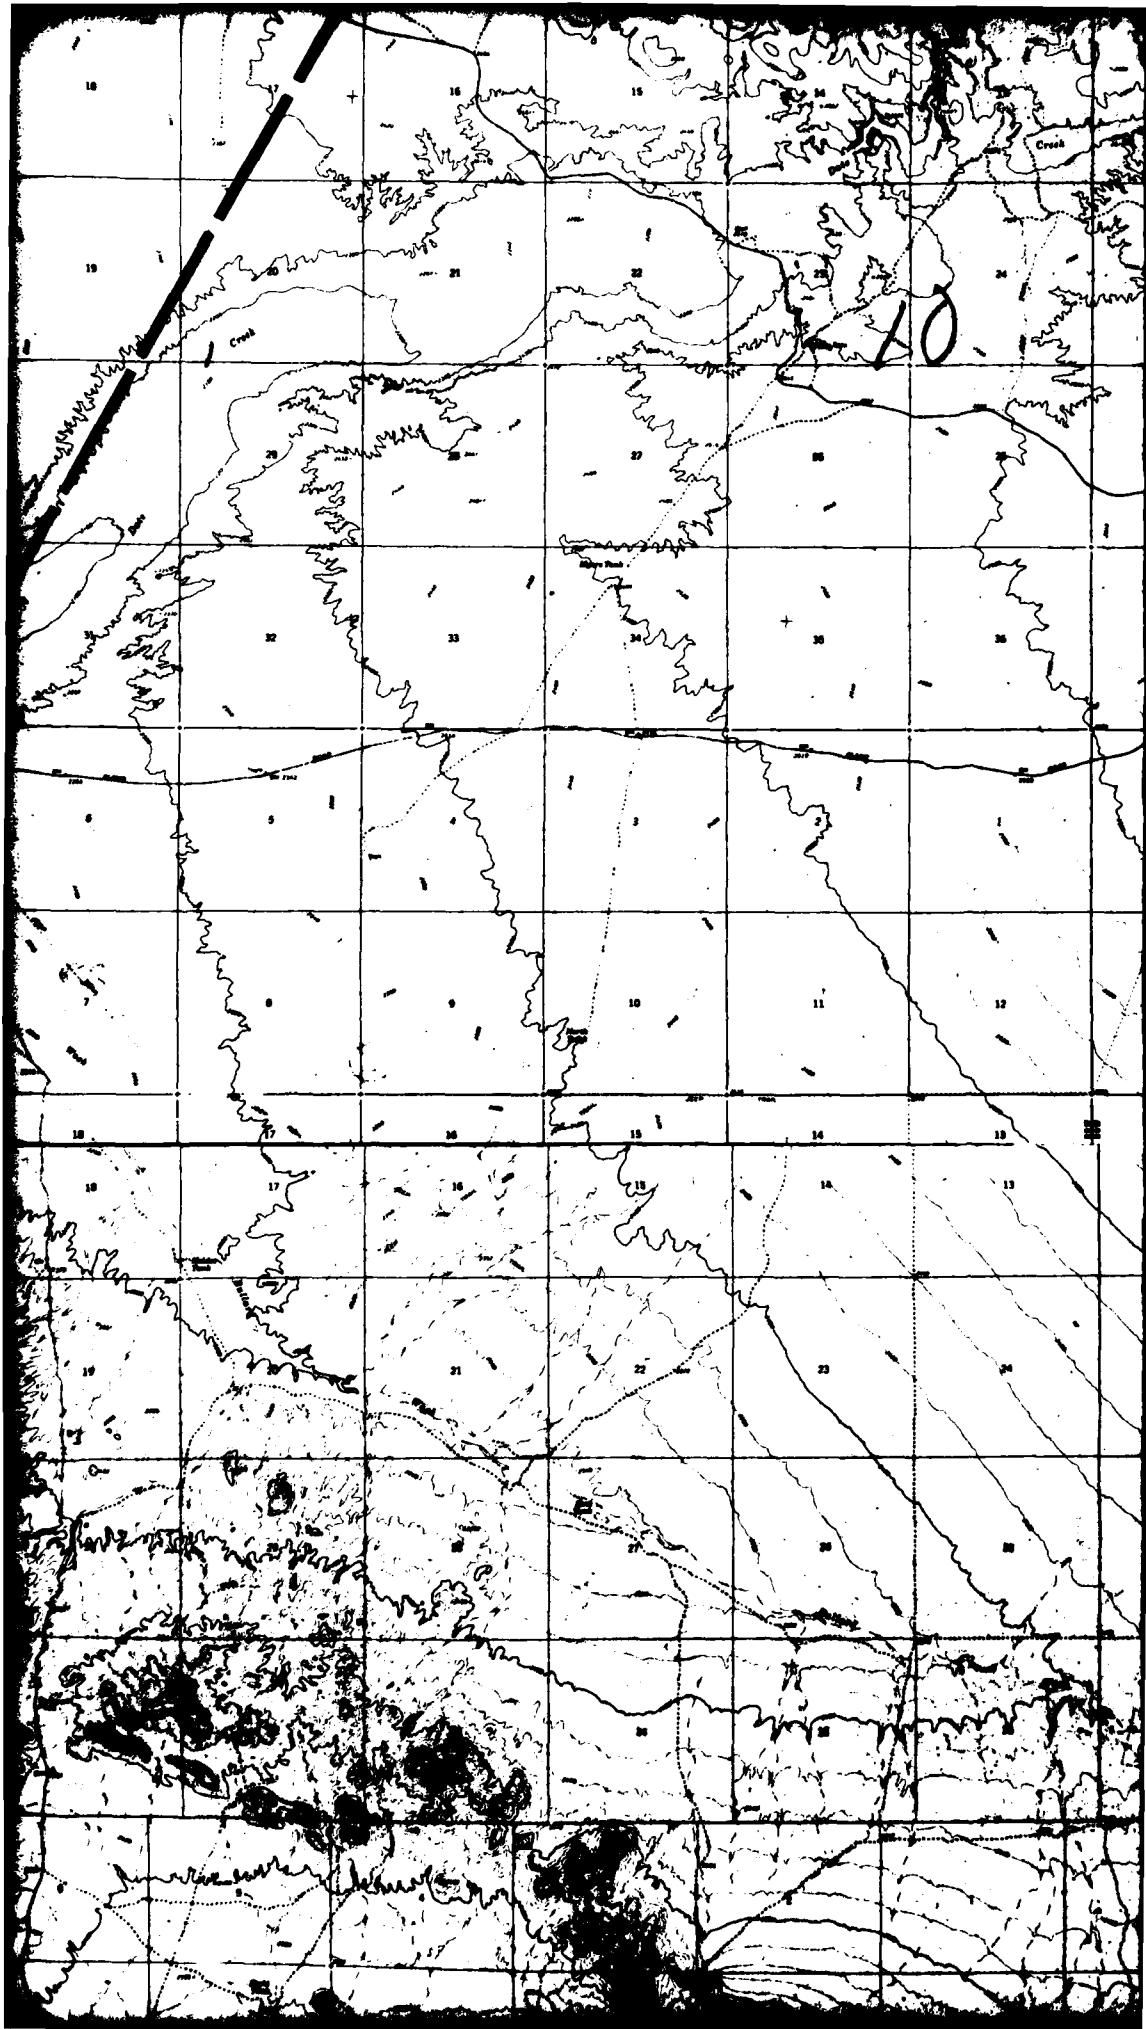


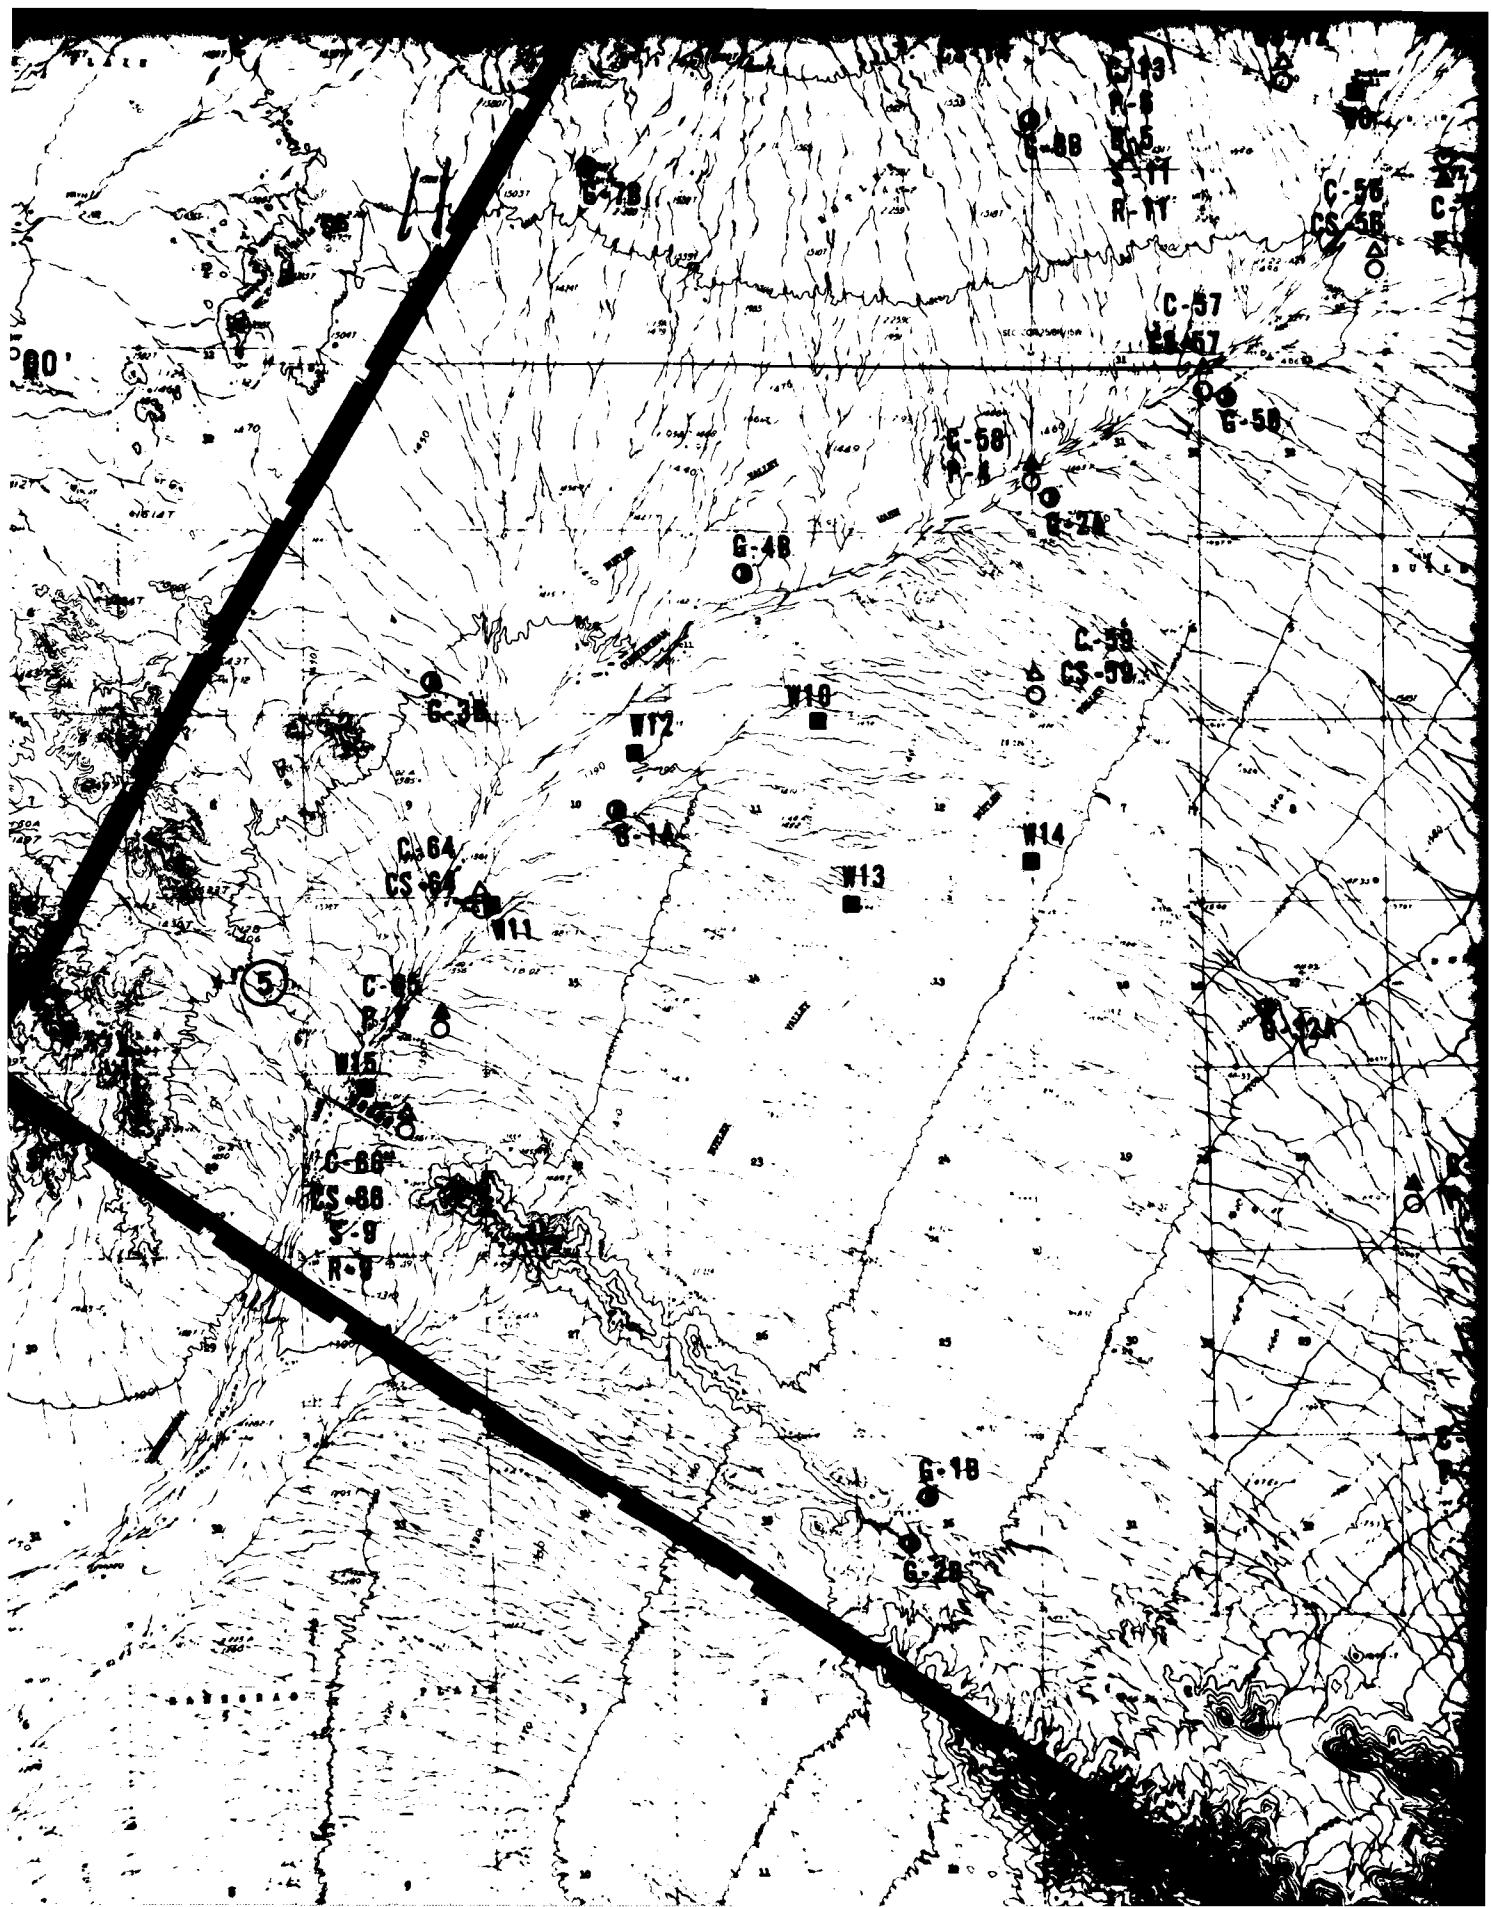

G-41A

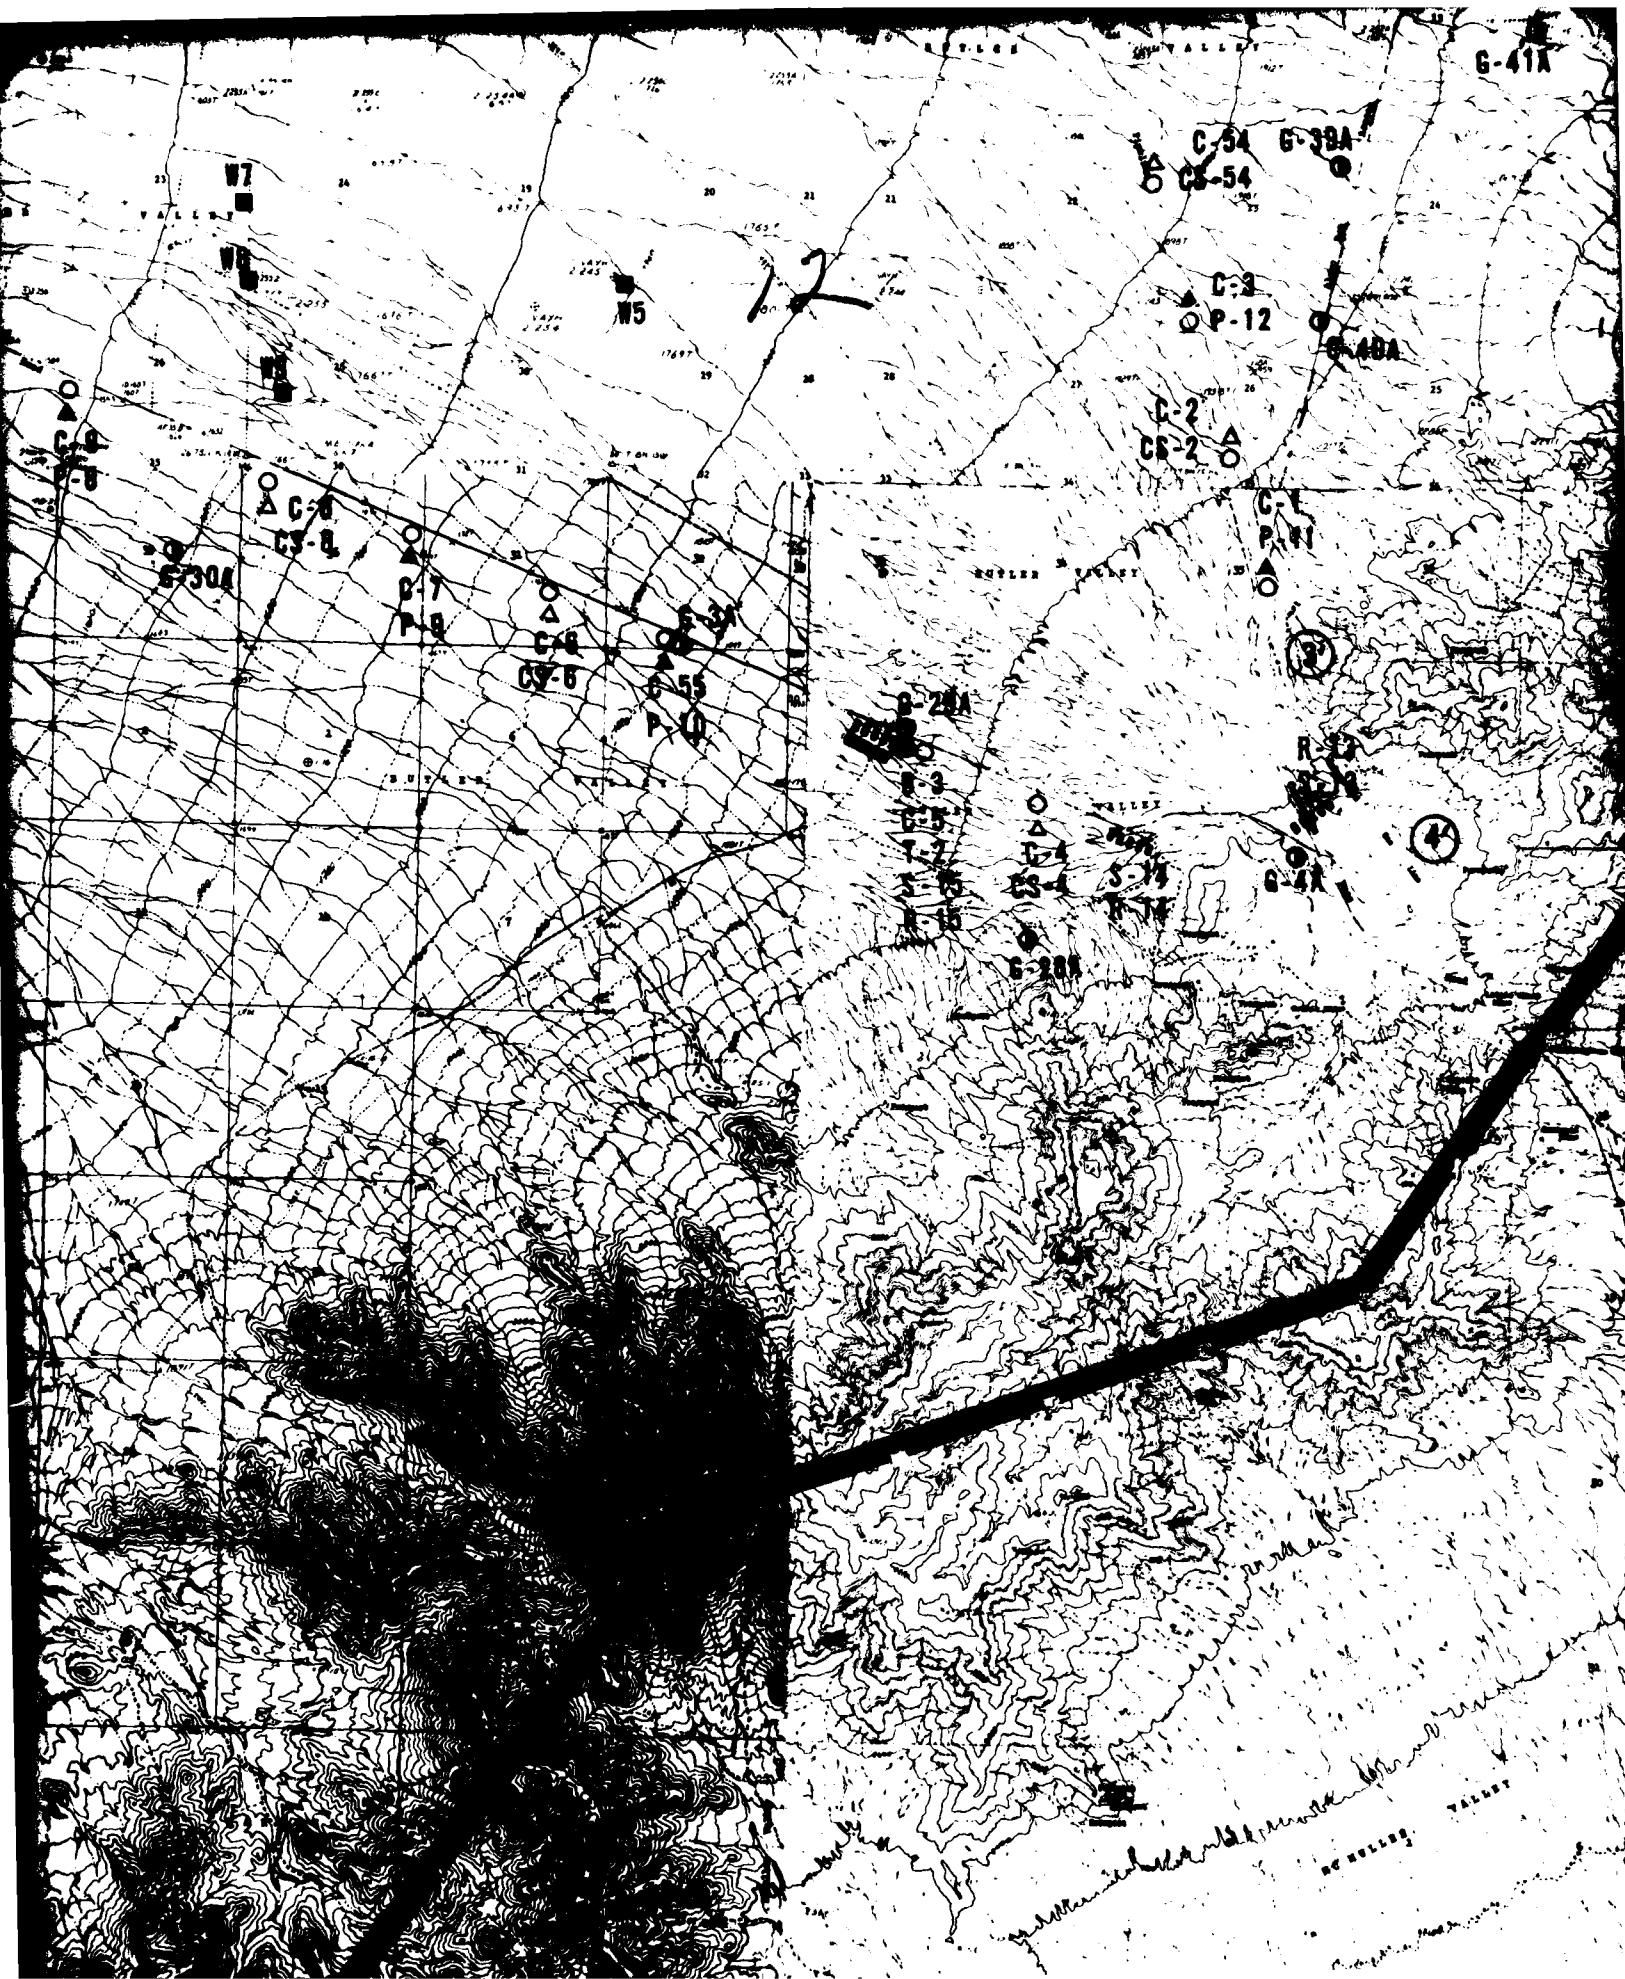

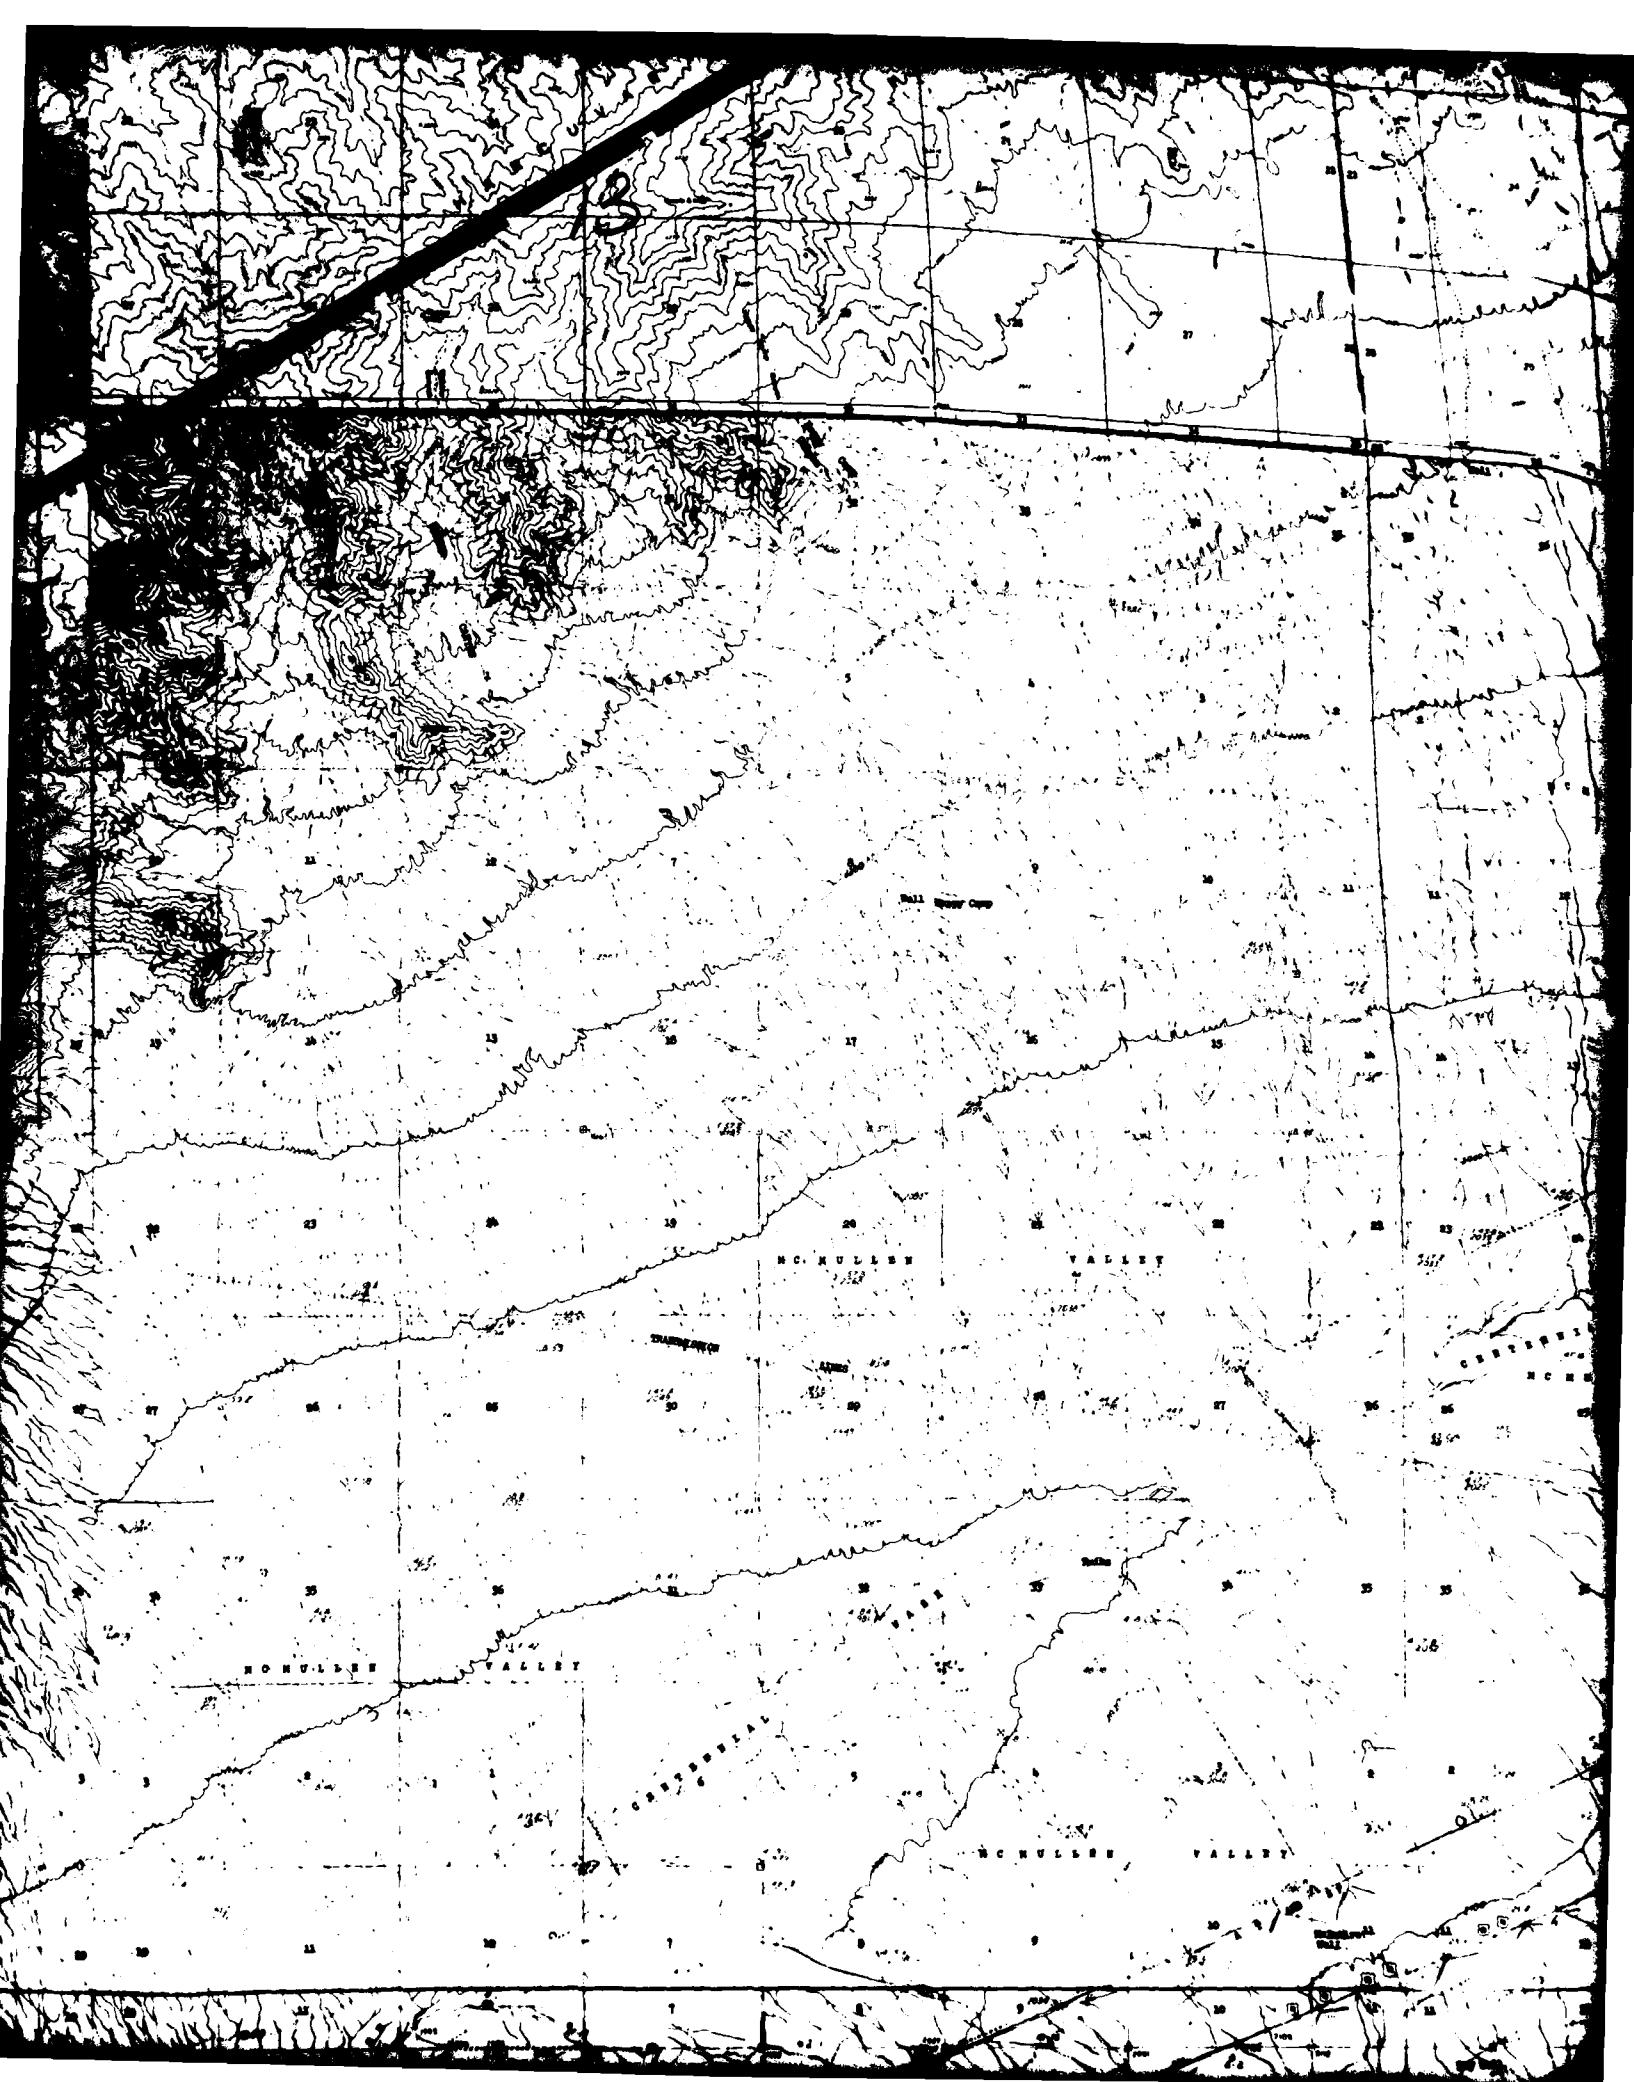

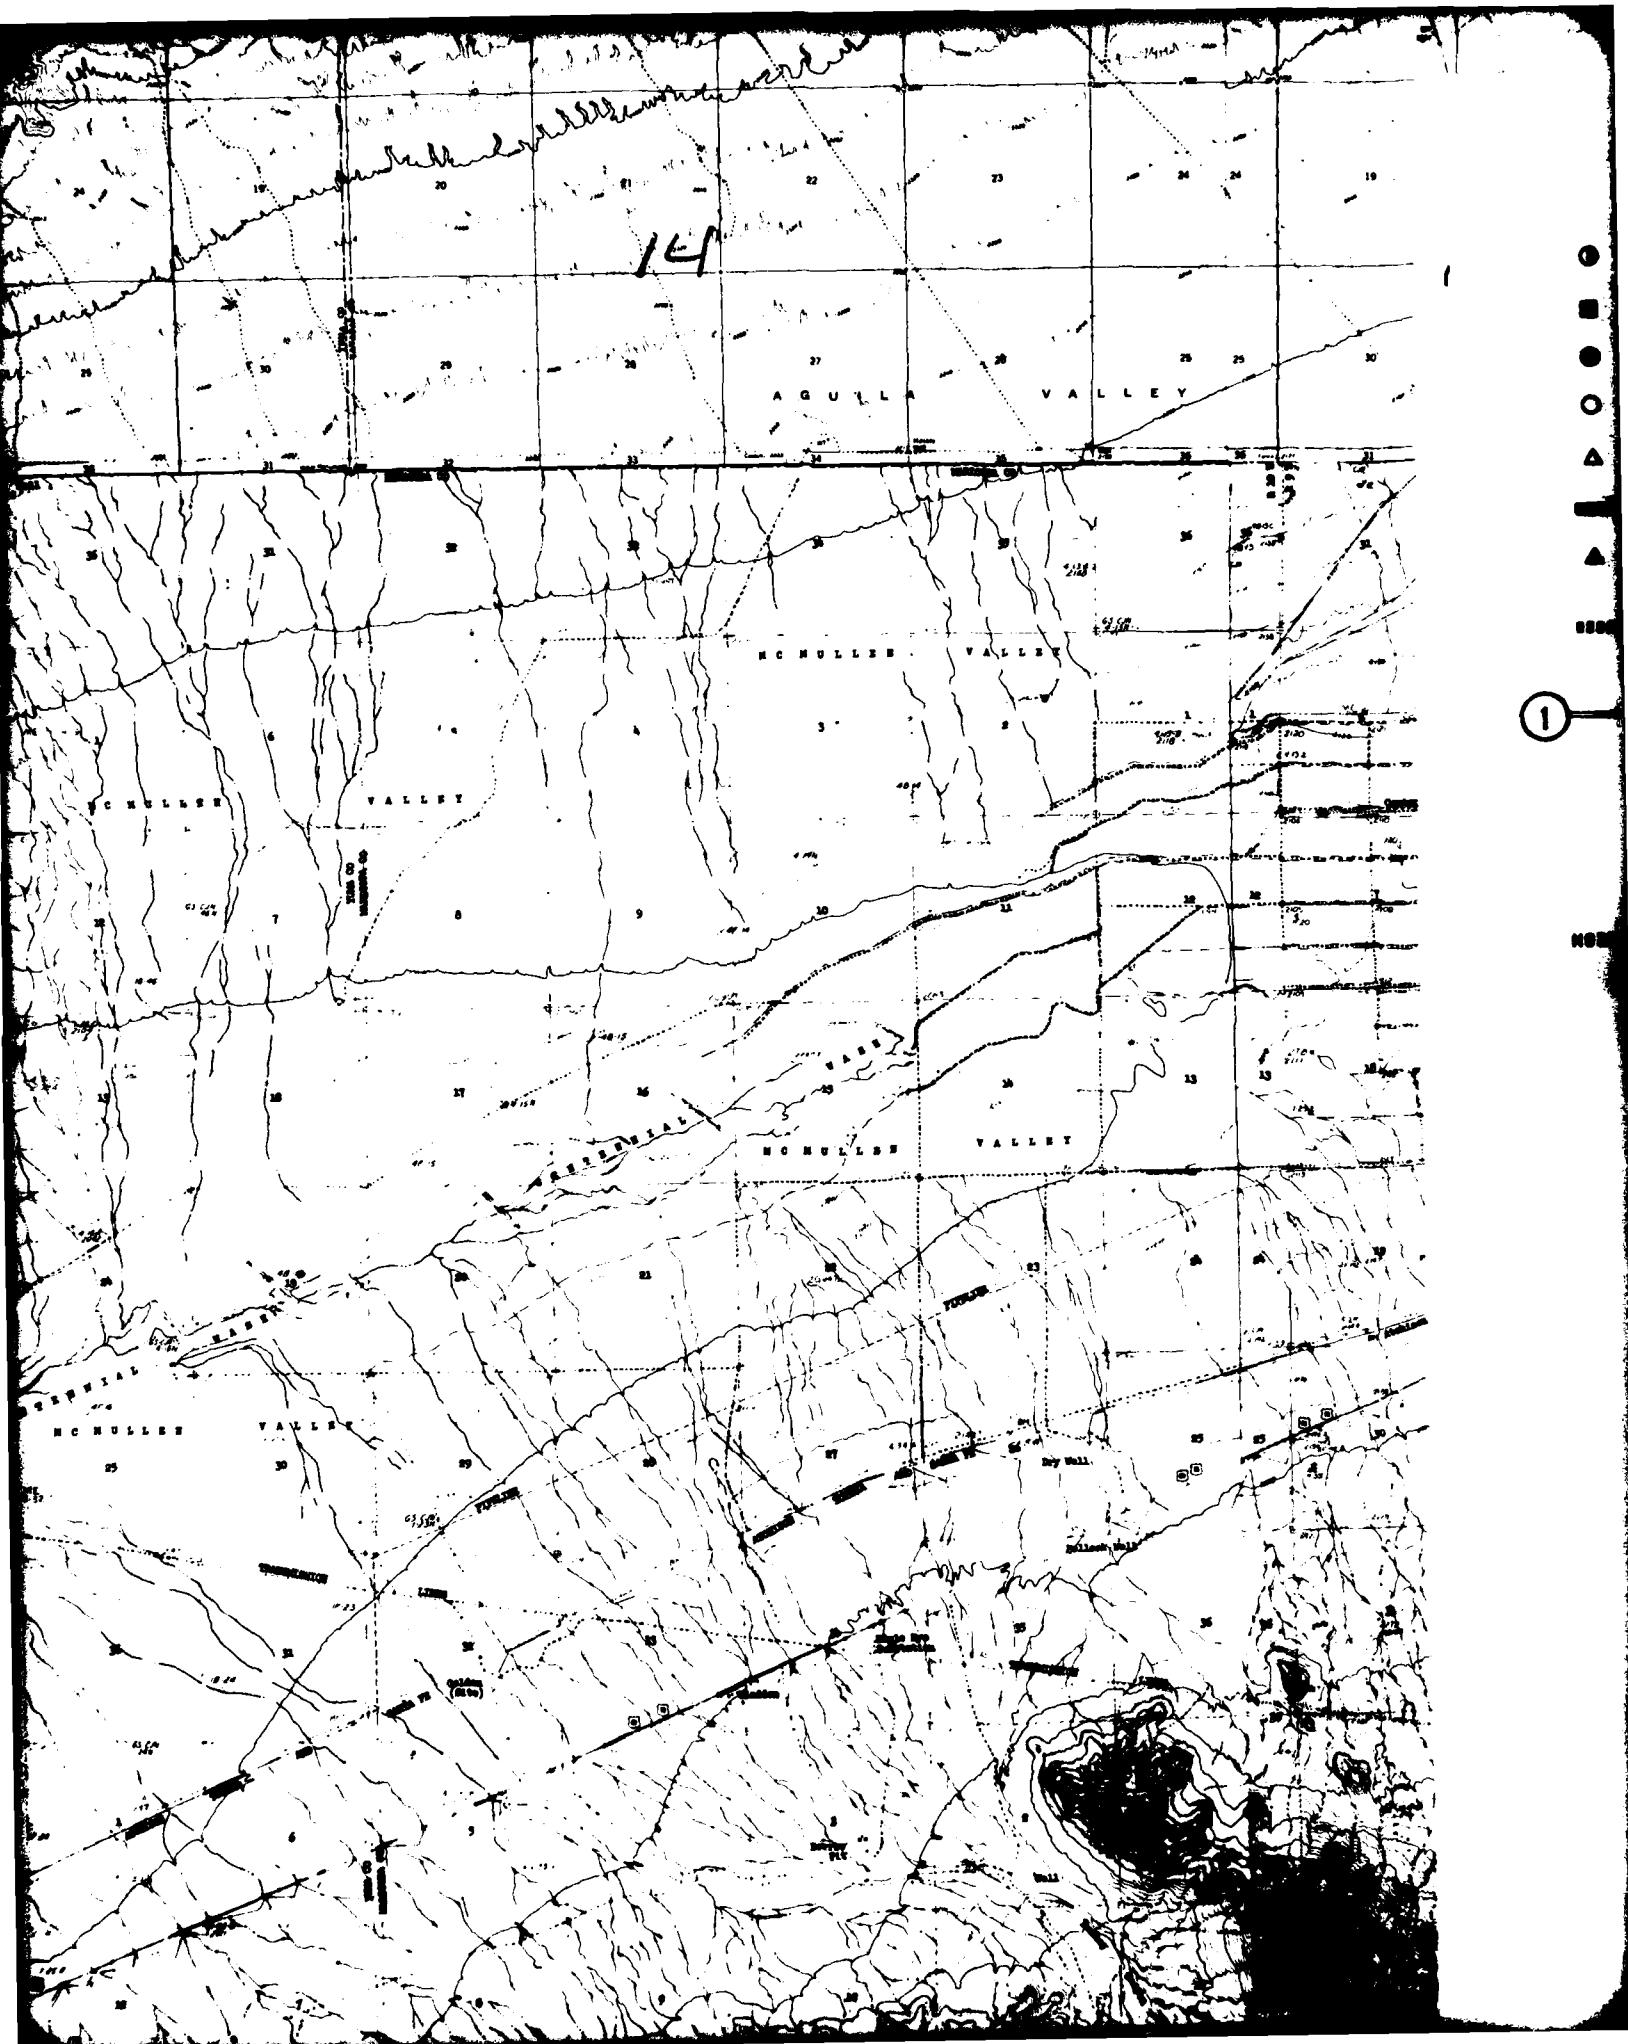

## EXPLANATION

- O G-1A GEOLOGIC STATION
- W GROUND-WATER LEVEL MEASUREMENT
- B-1 BORING
- O C-1 CONE PENETROMETER TEST (CPT)
- △ CS-1 SURFACE SAMPLE AT CPT LOCATION
- T-1 TRENCH
- ▲ P-1 TEST PIT
- S-1 SEISMIC REFRACTION LINE
- ..... R-1 ELECTRICAL RESISTIVITY LINE
- ① — ①' ACTIVITY LINE

34°00'

15

NOTE: Where multiple activities were performed at the same location, the correct location is designated by either (1) the boring symbol or (2) the CPT symbol, if no boring was defined.


## LOCATION MAP




SCALE 1:82,500





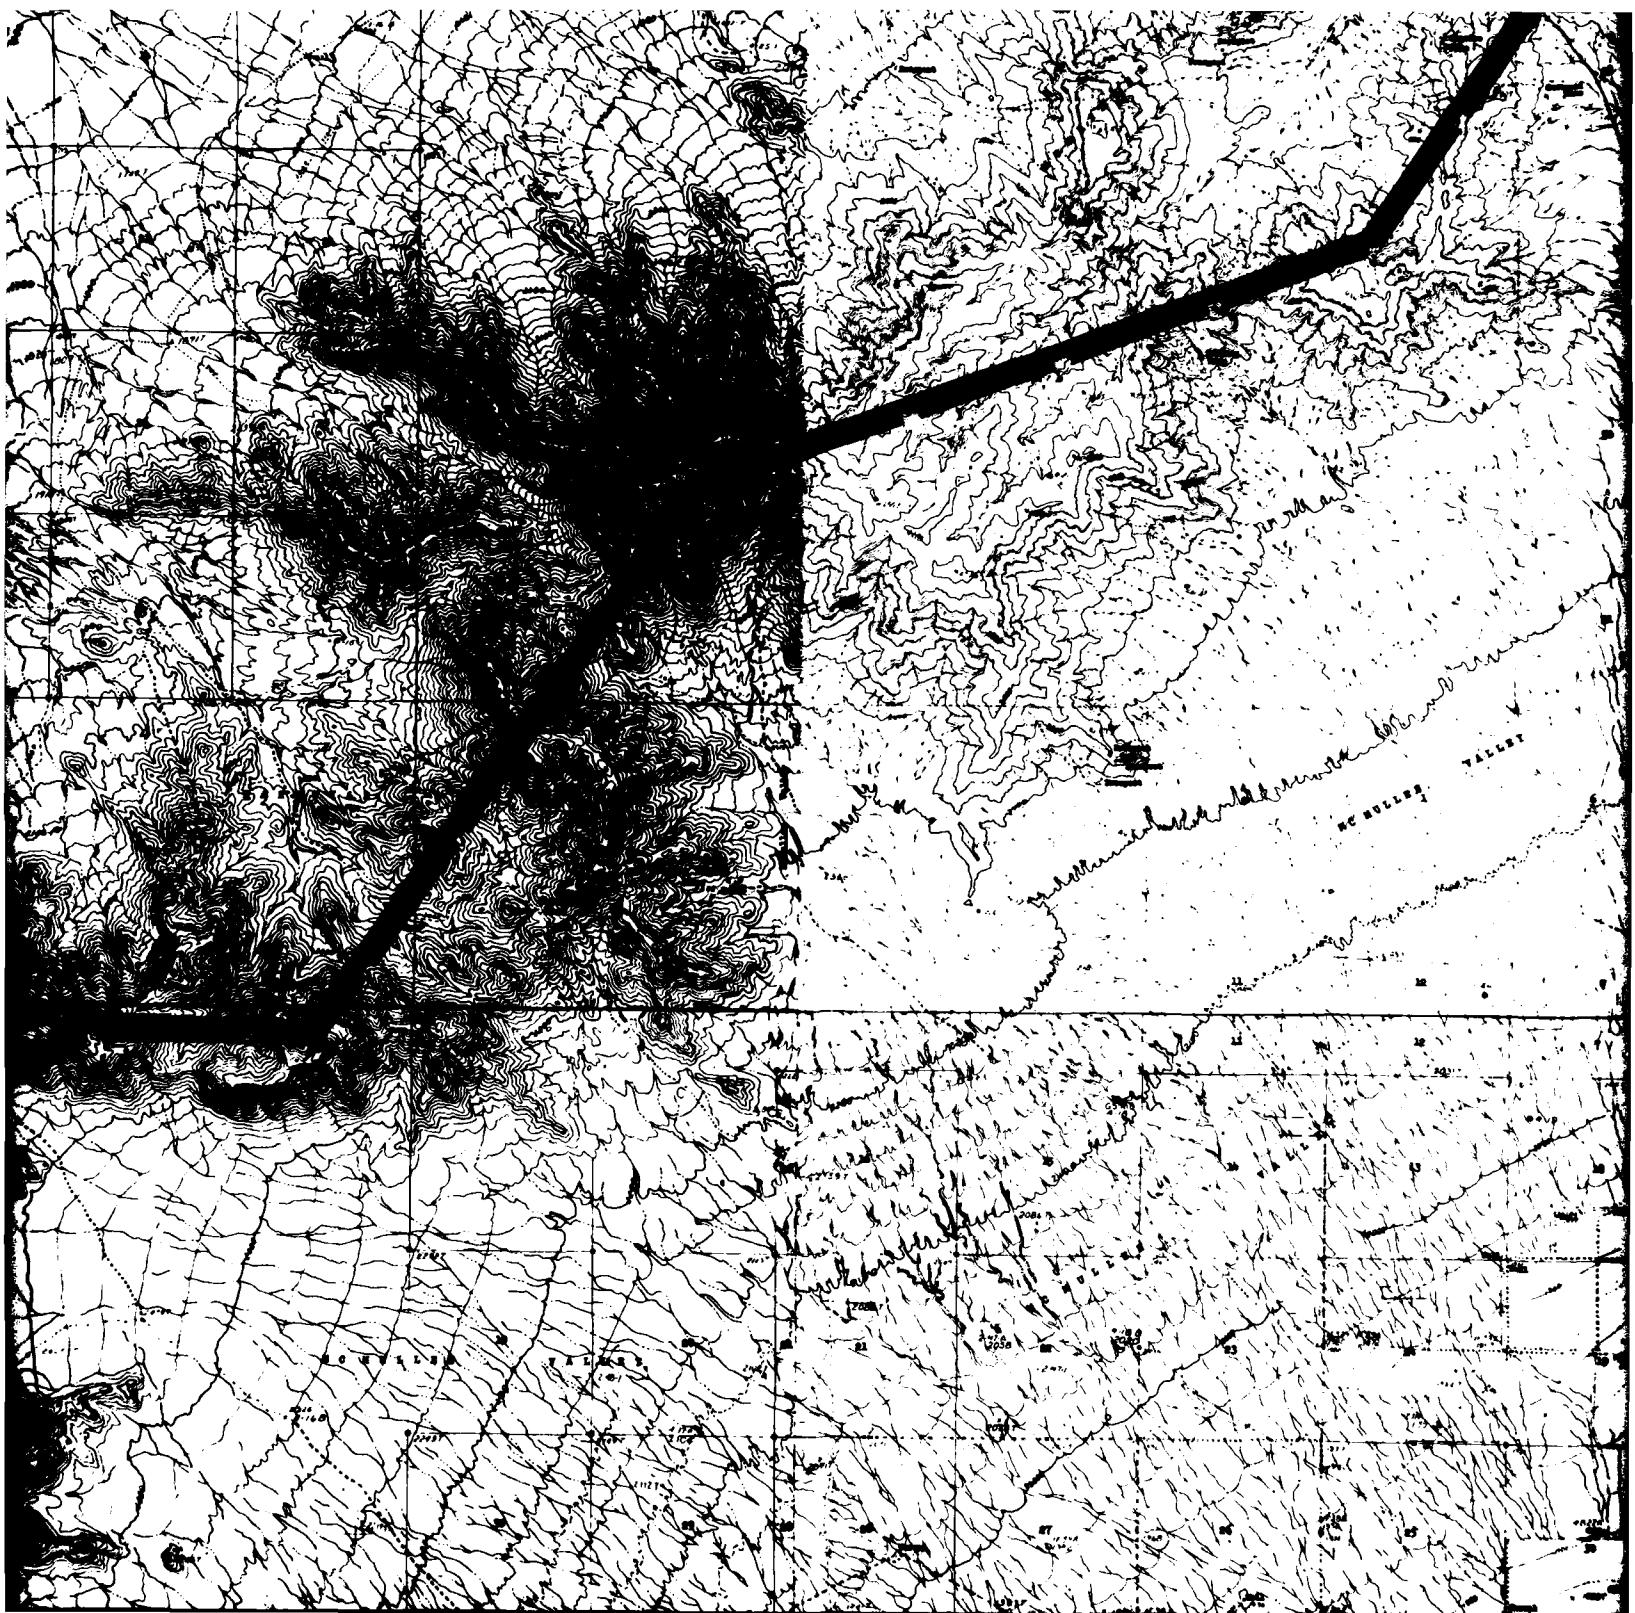

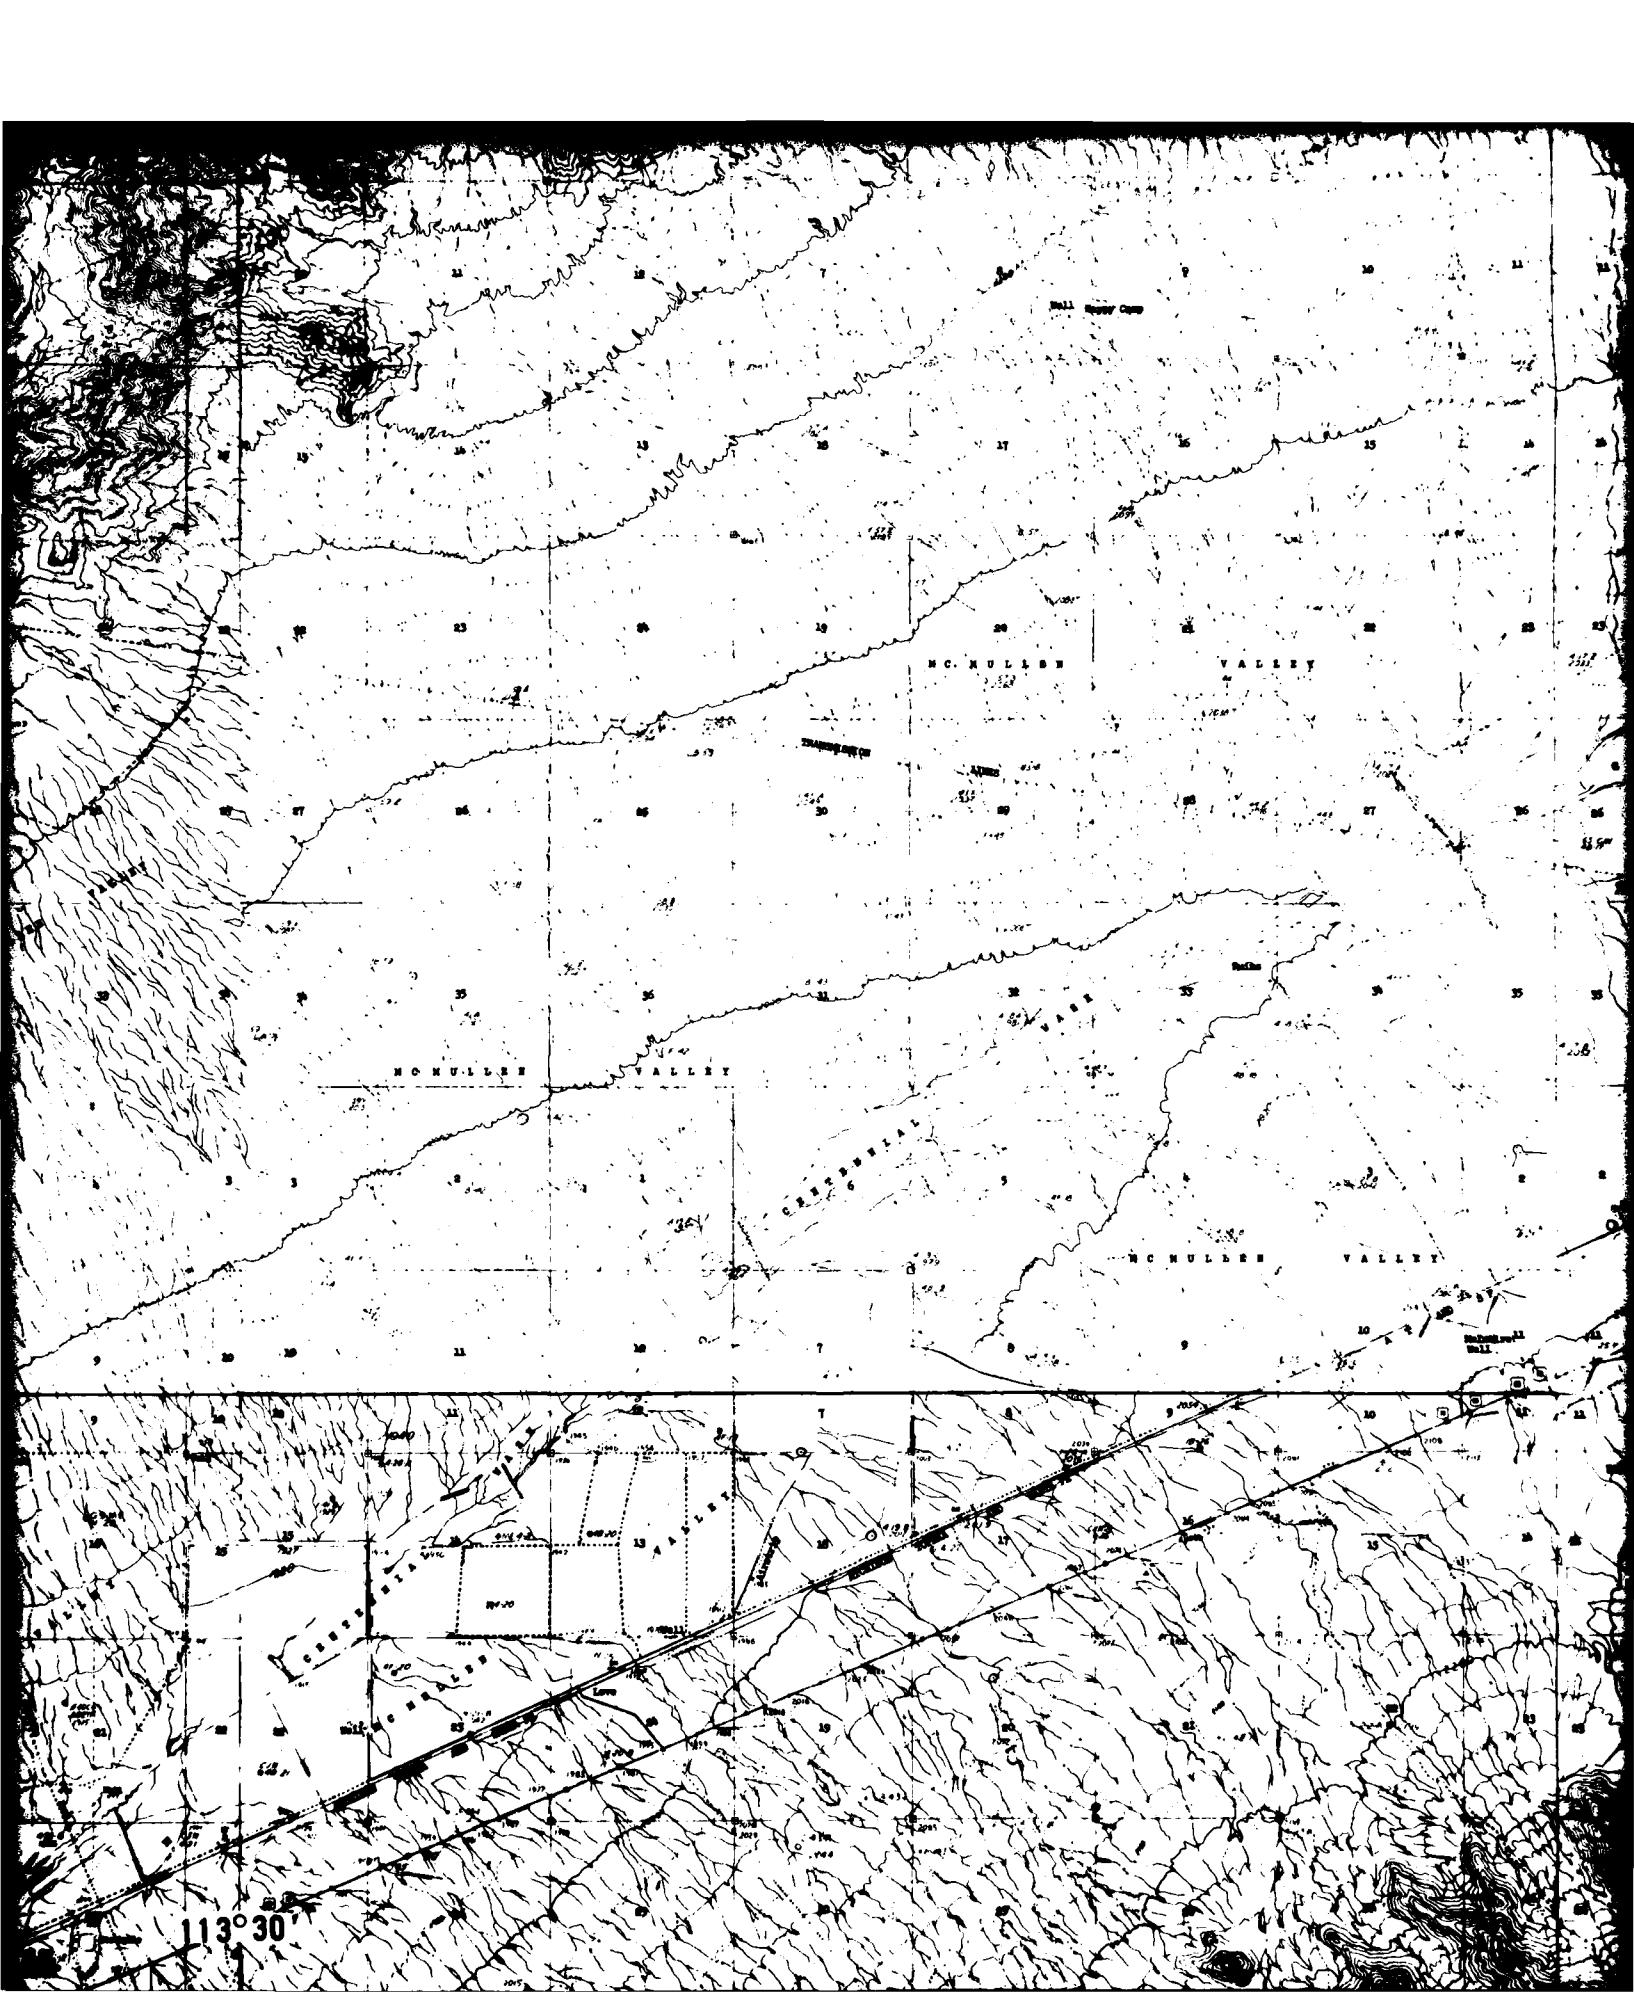

NOTE:

10  
0

DEPARTM

fud

113°15'

MORNING VALLEY

VALLEY

Dry Valley

WALL

BUTTERFIELD

WALL

**NOTE:** Where multiple activities were performed at the same location, the correct location is designated by either (1) the boring symbol or (2) the GPT symbol, if no boring was detected.

LOCATION MAP



SCALE 1:62,500



**ACTIVITY LOCATION MAP  
BUTLER CDP. ARIZONA**

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

DRAWING

1

**FUGRO NATIONAL, INC.**


FN-TR-28-11

CONE RESISTANCE

DEPTH

(METERS)  
(FEET)

0 100 200 300 400 500 600 700 800 900 (kg/cm<sup>2</sup>)  
0 100 200 300 400 500 600 700 800 900 (tsf)

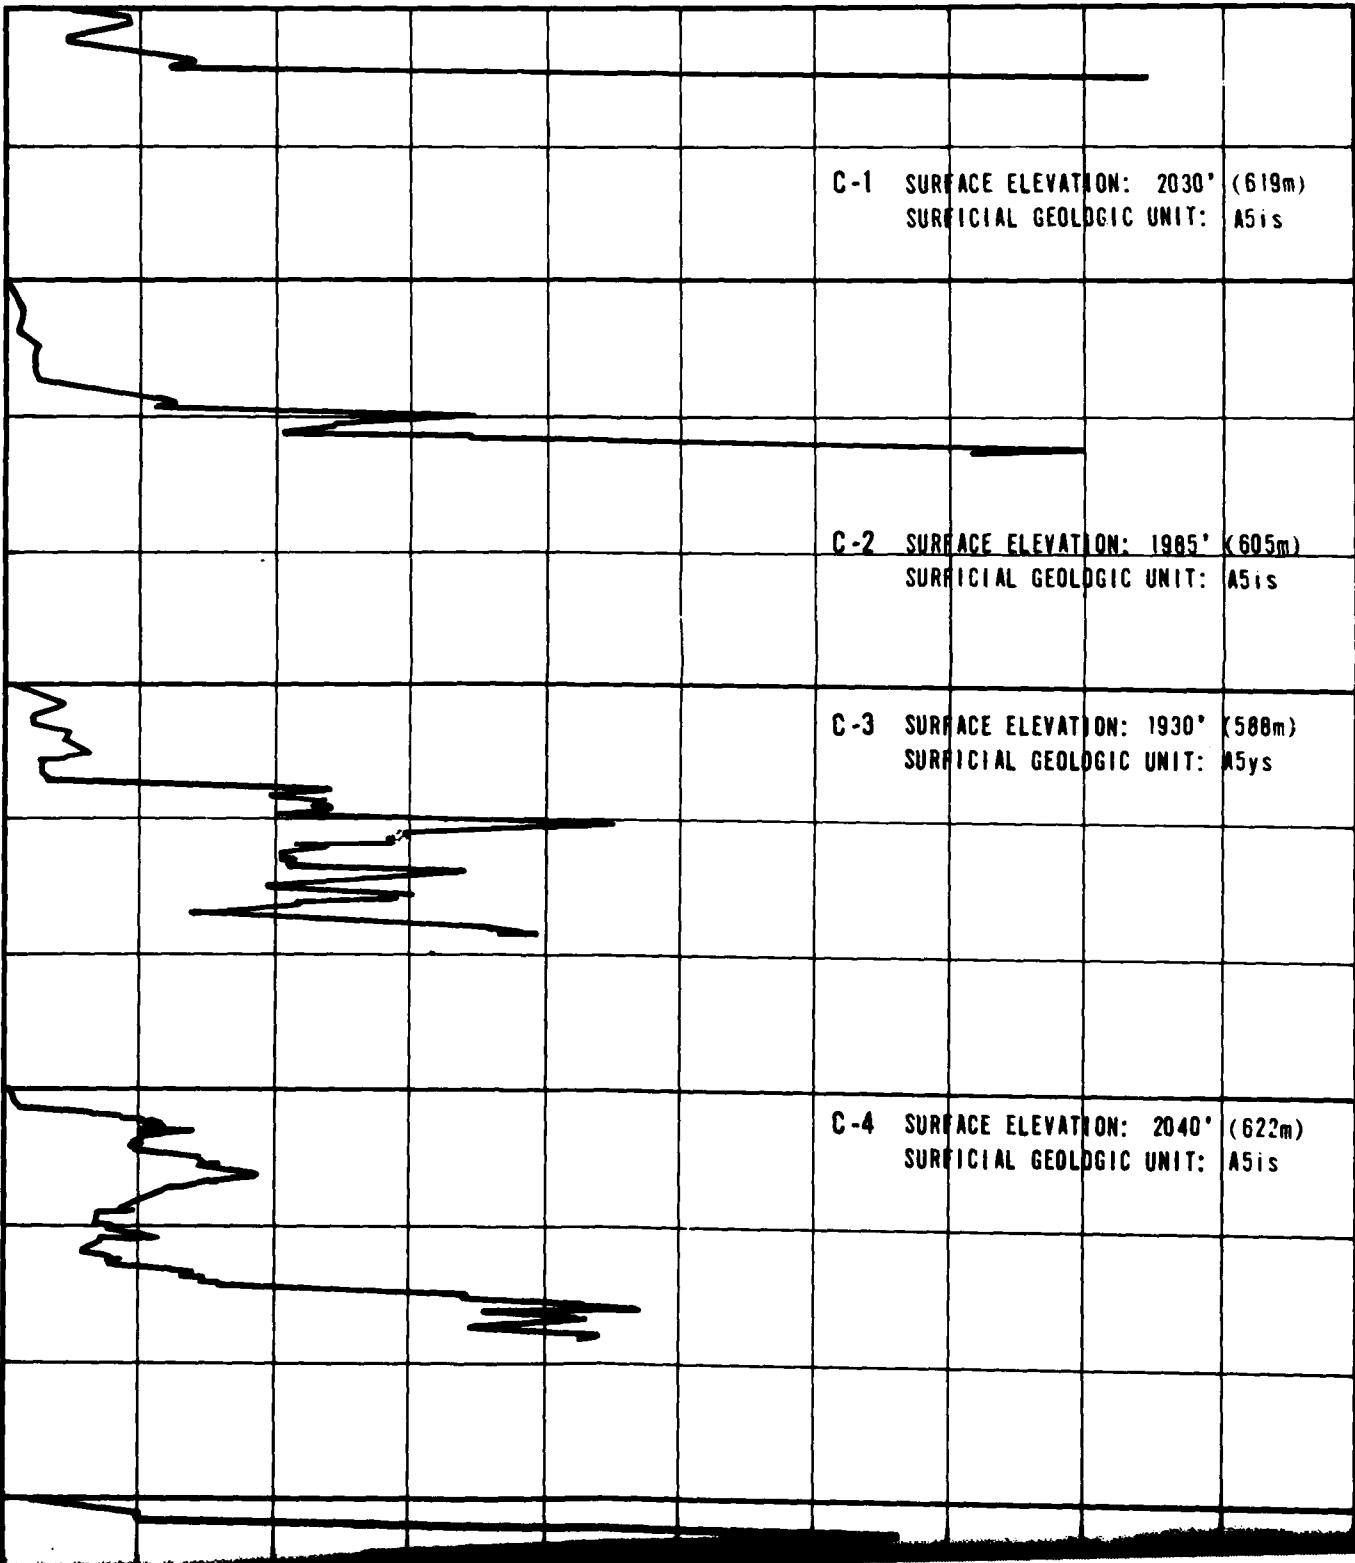


2

CONE RESISTANCE

700 800 900 (kg/cm<sup>2</sup>)  
00 800 900 (tsf)


ACE ELEVATION: 2030' (619m)		
ICIAL GEOLOGIC UNIT: A5is		
ACE ELEVATION: 1985' (605m)		
ICIAL GEOLOGIC UNIT: A5is		
ACE ELEVATION: 1930' (588m)		
ICIAL GEOLOGIC UNIT: A5ys		
ACE ELEVATION: 2040' (622m)		
ICIAL GEOLOGIC UNIT: A5is		

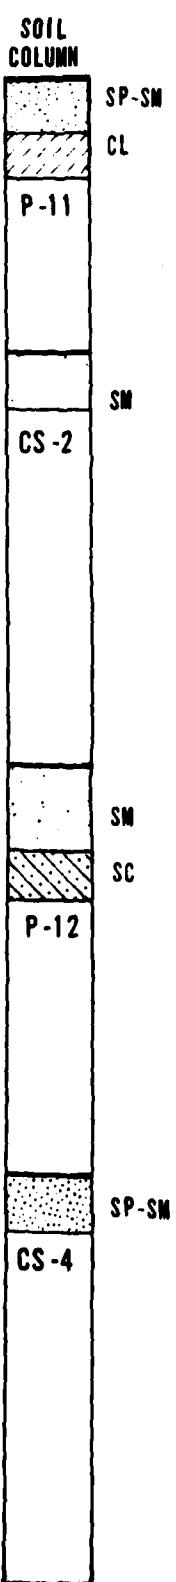

DEPTH

(METERS)  
0  
1  
2  
3  
4  
5  
10  
15  
20  
30  
40  
50

(FEET)  
0  
100  
200  
300  
400  
500

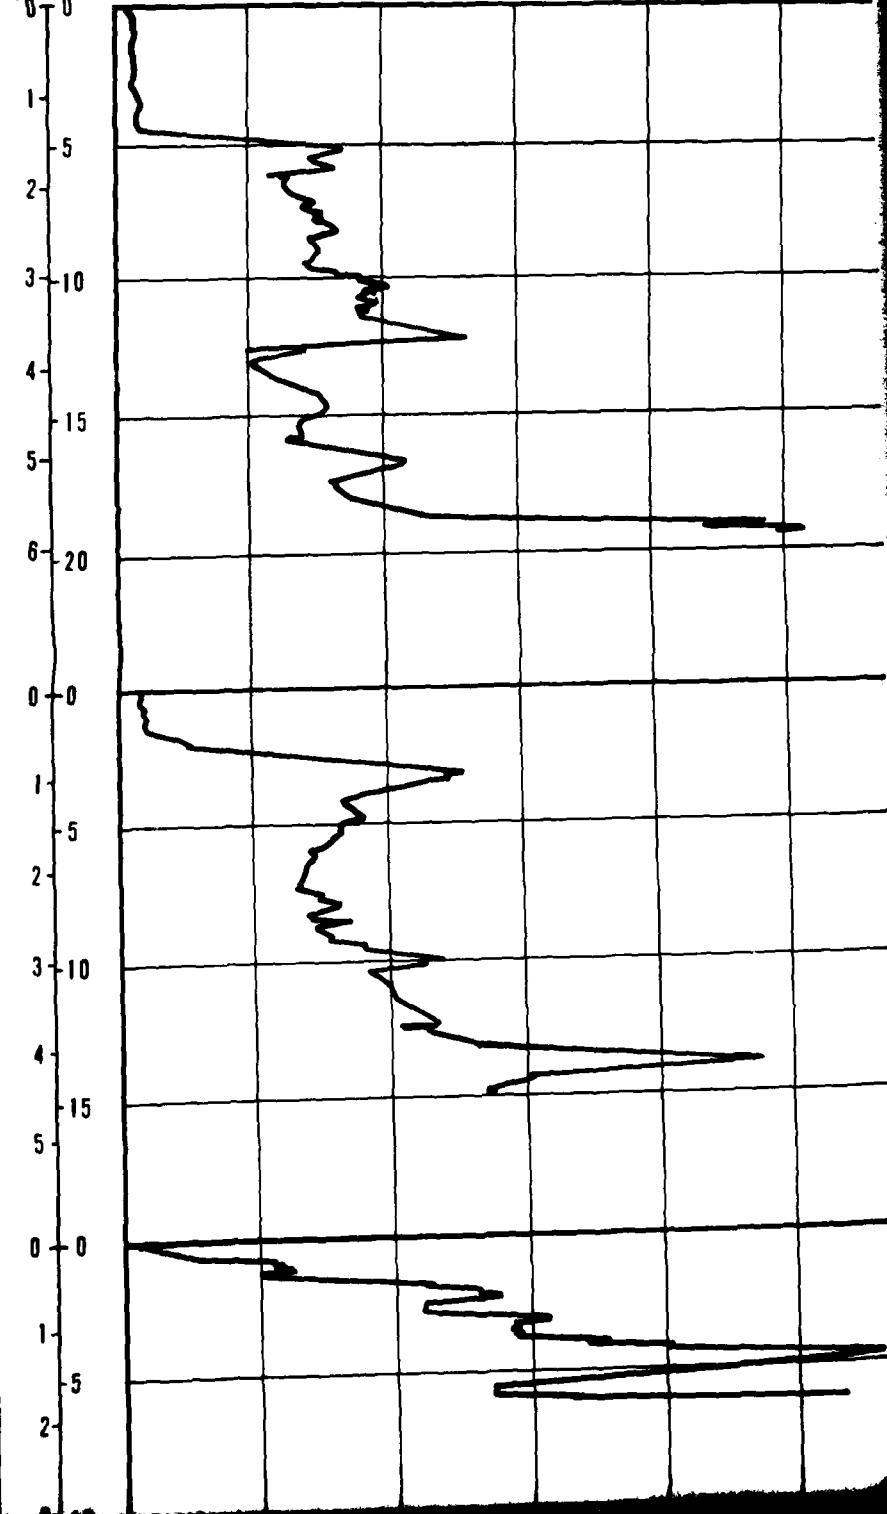

3

600      700      800      900      900 (kg/cm<sup>2</sup>)  
 600      700      800      900 (tsf)

C-12	SURFACE ELEVATION: 1530' (466m)	SURFICIAL GEOLOGIC UNIT: A5ys

C-13	SURFACE ELEVATION: 1560' (475m)	SURFICIAL GEOLOGIC UNIT: A5is

C-14	SURFACE ELEVATION: 1800' (488m)	SURFICIAL GEOLOGIC UNIT: A5ys

SOIL  
COLUMN

CS-12

SC  
SM

P-6

CL

CS-14

DEPTH

(METERS)  
0

1  
5

0  
1

5  
10

0  
1

5  
10

0  
1

5  
10

0  
1

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400


0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

0  
100  
200  
300  
400

**CONE RESISTANCE**



C-23 SURFACE ELEVATION: 2020' (616m)  
SURFICIAL GEOLOGIC UNIT: A5og

C-24 SURFACE ELEVATION: 1950' (594m)  
SURFICIAL GEOLOGIC UNIT: A5y A1s

C-25 SURFACE ELEVATION: 1910' (552m)  
SURFICIAL GEOLOGIC UNIT: A5ys

C-26 SURFACE ELEVATION: 1810' (552m)  
SURFICIAL GEOLOGIC UNIT: A5y A1s

**SOIL COLUMN**

SM  
GP-GM

P-21

SW-SM  
CS-24


CS-24

GP-GM  
CS-25


CS-25

GP-GM  
GC

P-22

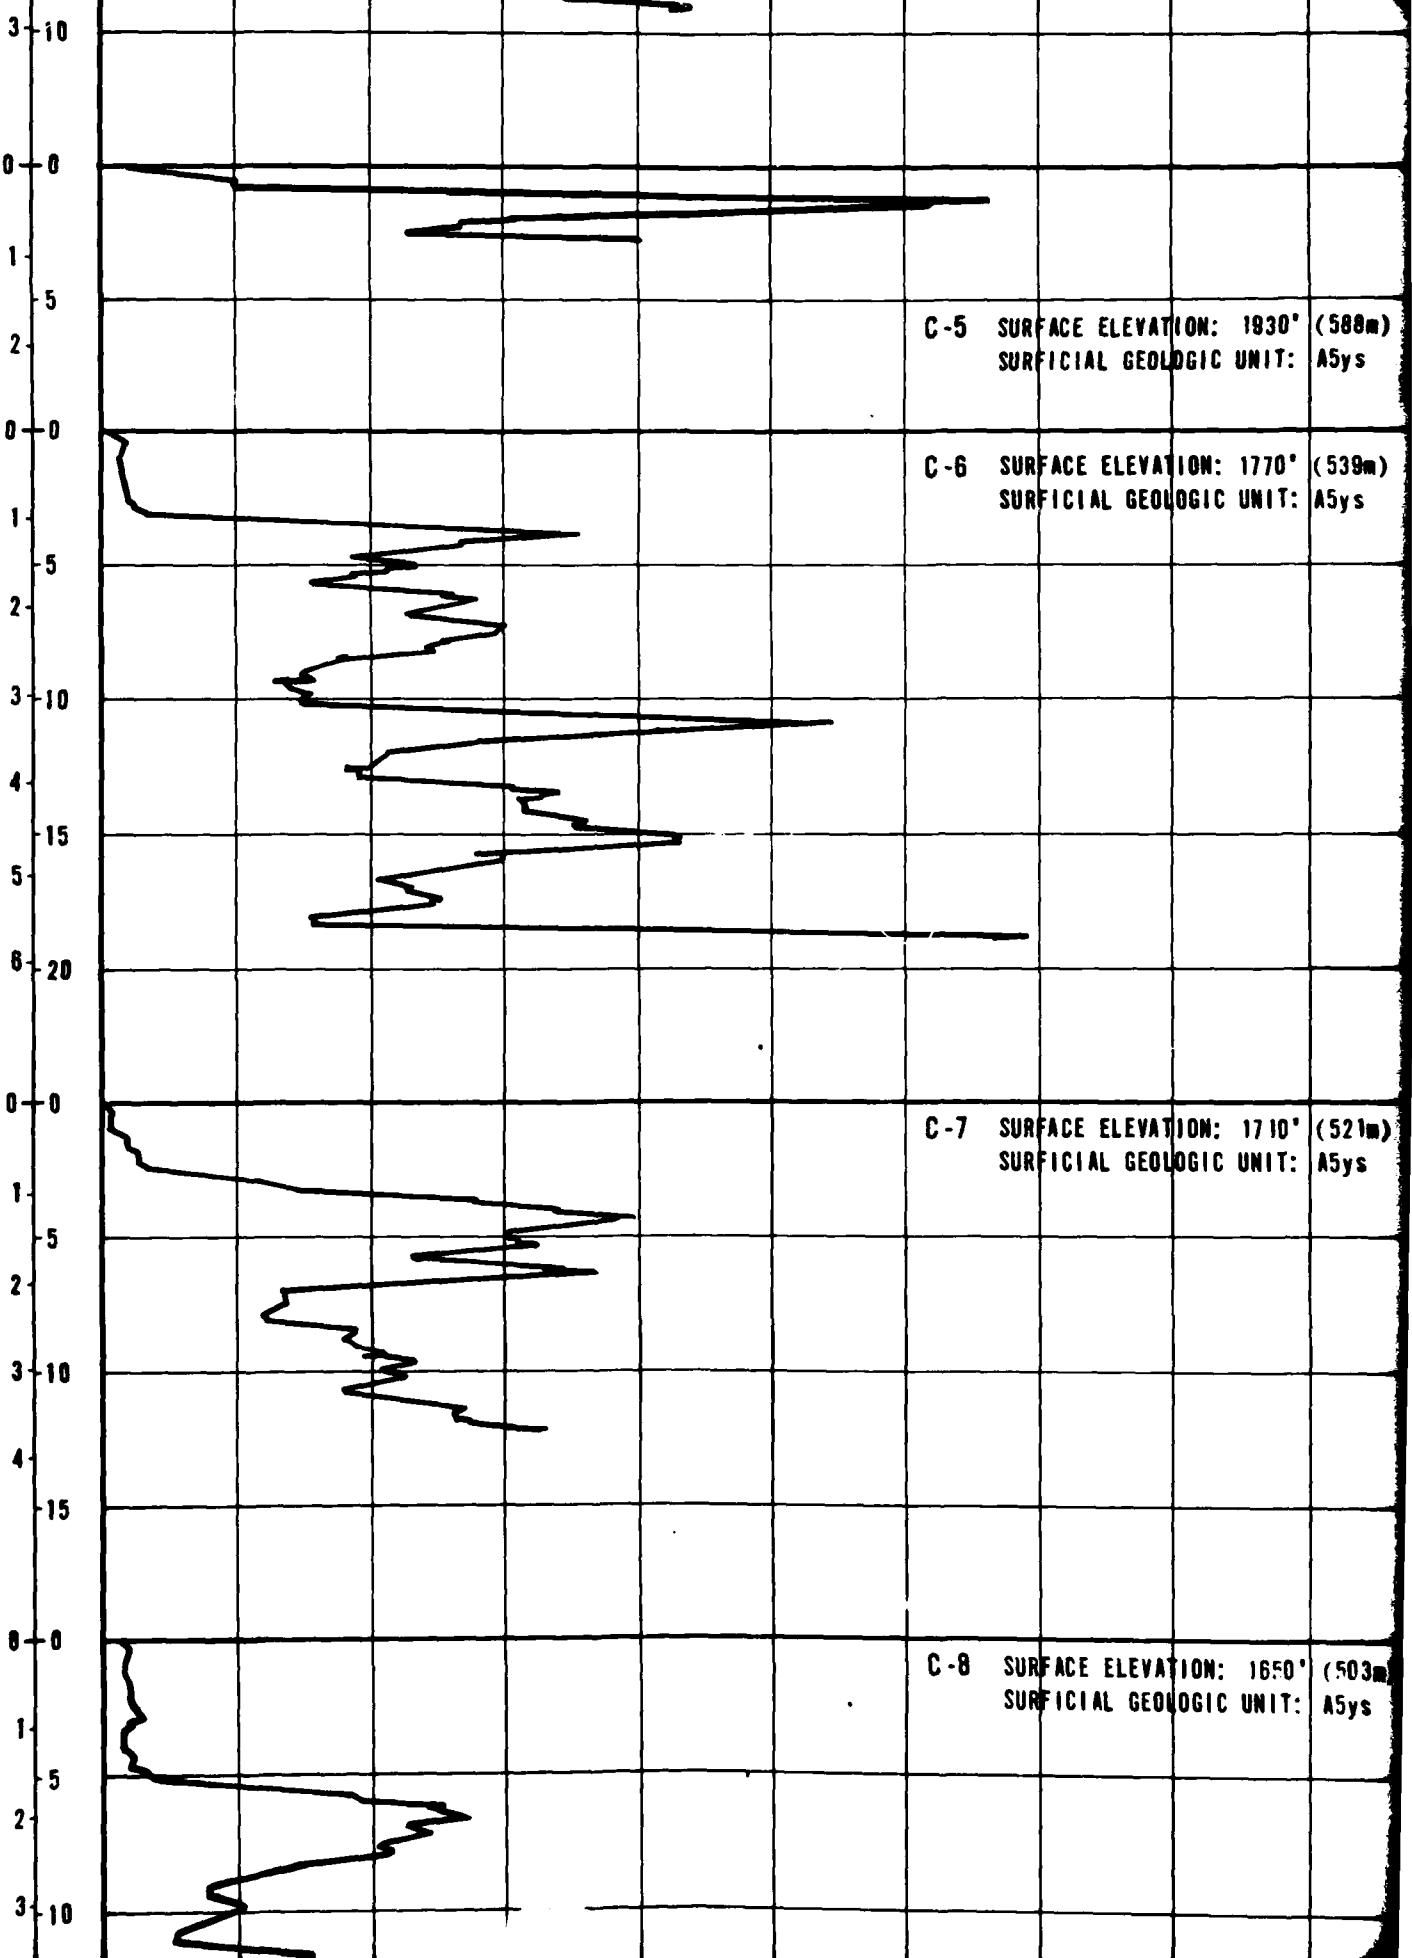

	SURFACE ELEVATION: 1930' (588m)	
	SURFICIAL GEOLOGIC UNIT: A5ys	
6	SURFACE ELEVATION: 1770' (539m)	
	SURFICIAL GEOLOGIC UNIT: A5ys	
7	SURFACE ELEVATION: 1710' (521m)	
	SURFICIAL GEOLOGIC UNIT: A5ys	
8	SURFACE ELEVATION: 1650' (503m)	
	SURFICIAL GEOLOGIC UNIT: A5ys	

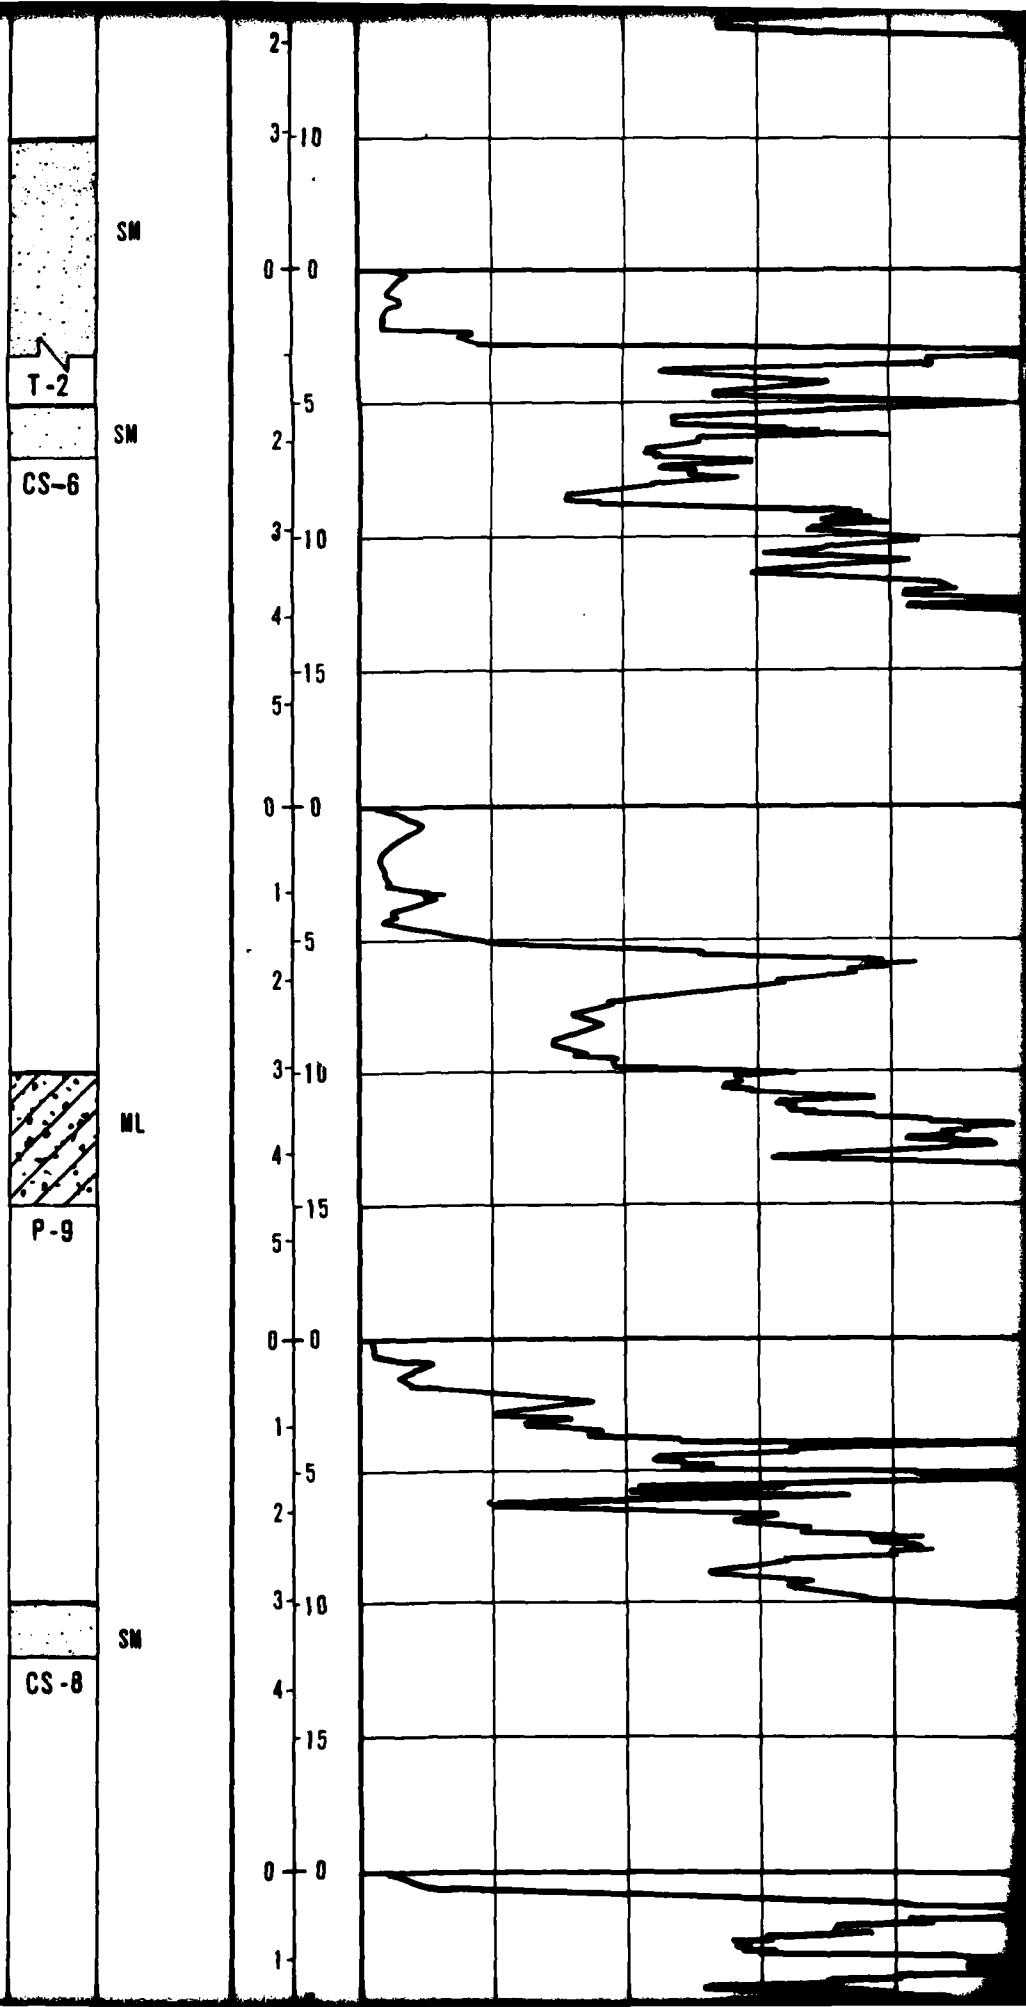


SURFACE ELEVATION: 1600' (488m)  
SURFICIAL GEOLOGIC UNIT: A5ys

SURFACE ELEVATION: 1680' (512m)  
SURFICIAL GEOLOGIC UNIT: A5ig

SURFACE ELEVATION: 1985' (605m)  
SURFICIAL GEOLOGIC UNIT: A5ys

SURFACE ELEVATION: 2045' (623m)  
SURFICIAL GEOLOGIC UNIT: A5is

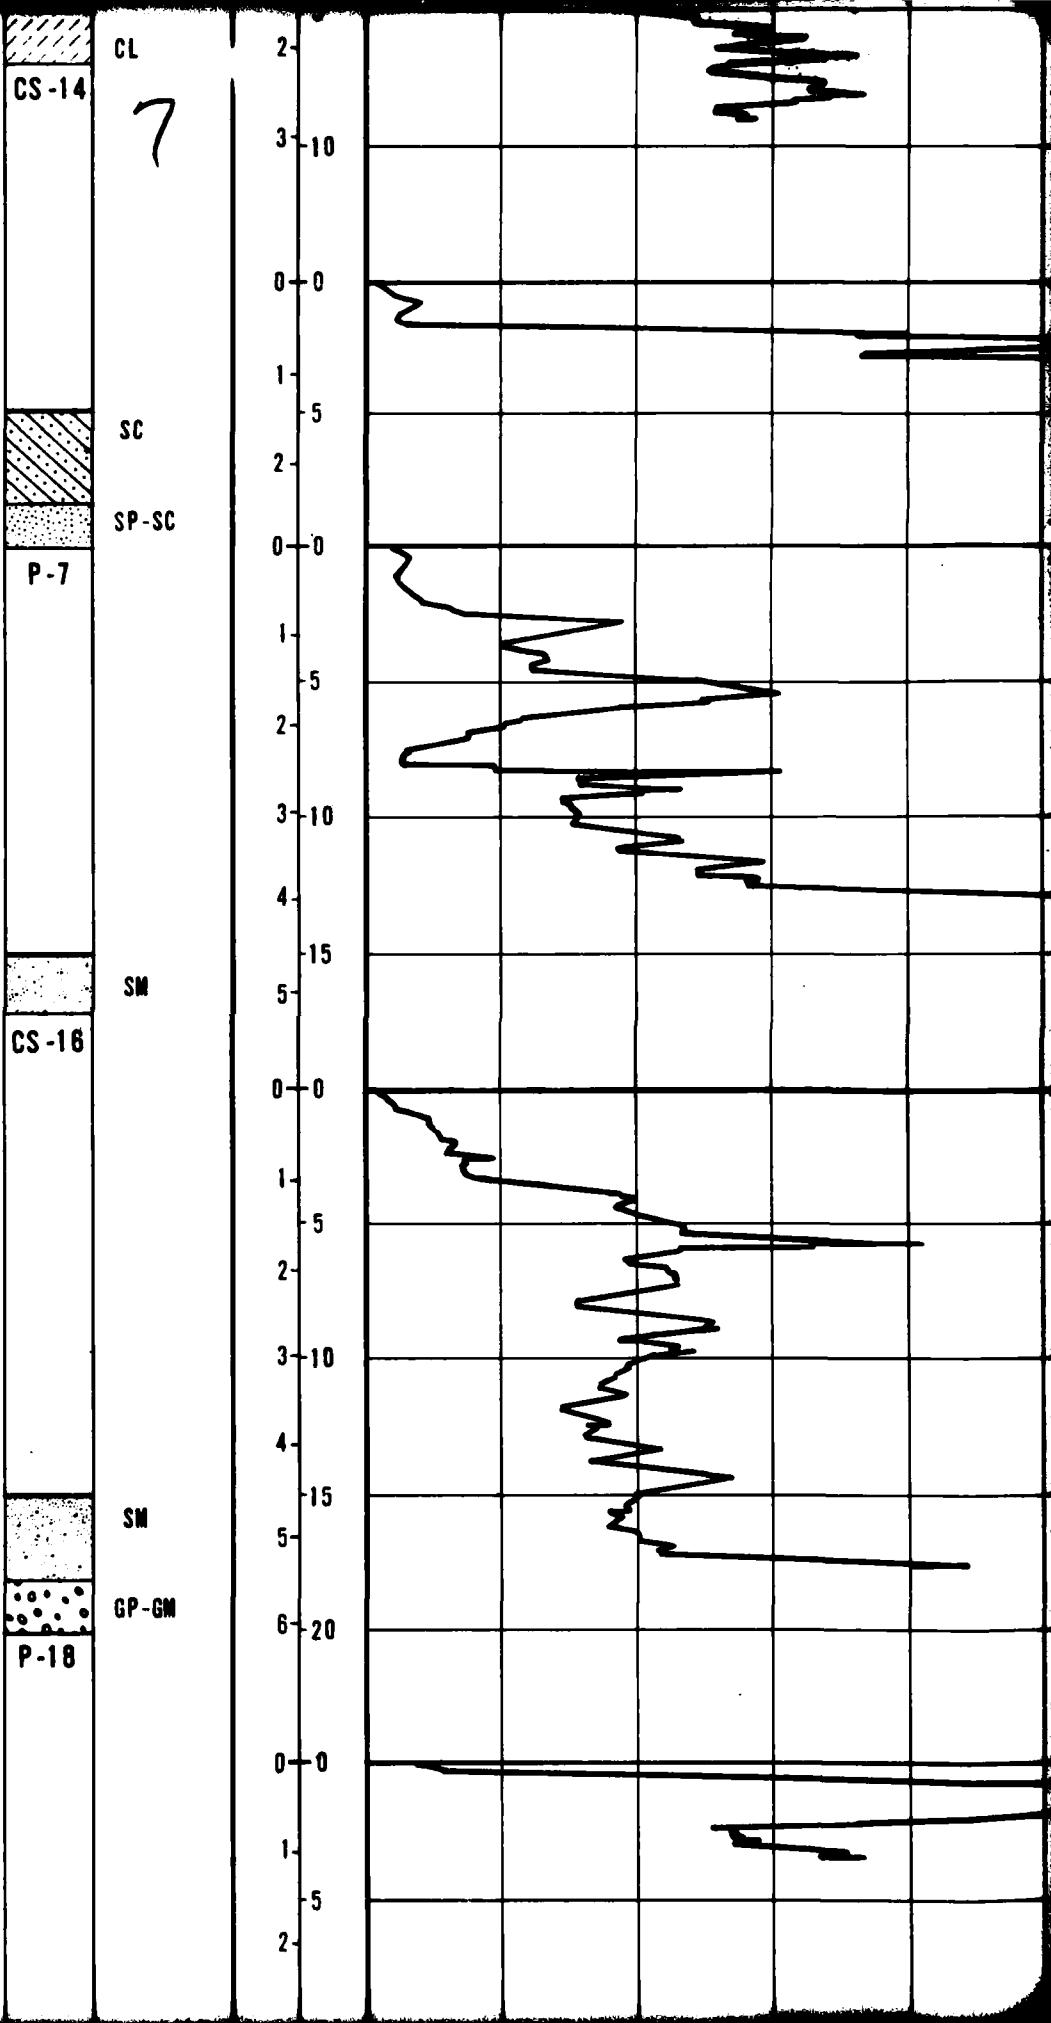

6C

P-22

8

GM

CS-27

SC

CS-28

SM

SP-SM

ML

SM

T-4

SM

CS-30


C-27 SURFACE ELEVATION: 1500' (457m)  
SURFICIAL GEOLOGIC UNIT: A5og

C-28 SURFACE ELEVATION: 1425' (434m)  
SURFICIAL GEOLOGIC UNIT: A5is

C-29 SURFACE ELEVATION: 1350' (411m)  
SURFICIAL GEOLOGIC UNIT: A5is

C-30 SURFACE ELEVATION: 1360' (415m)  
SURFICIAL GEOLOGIC UNIT: A5is

9

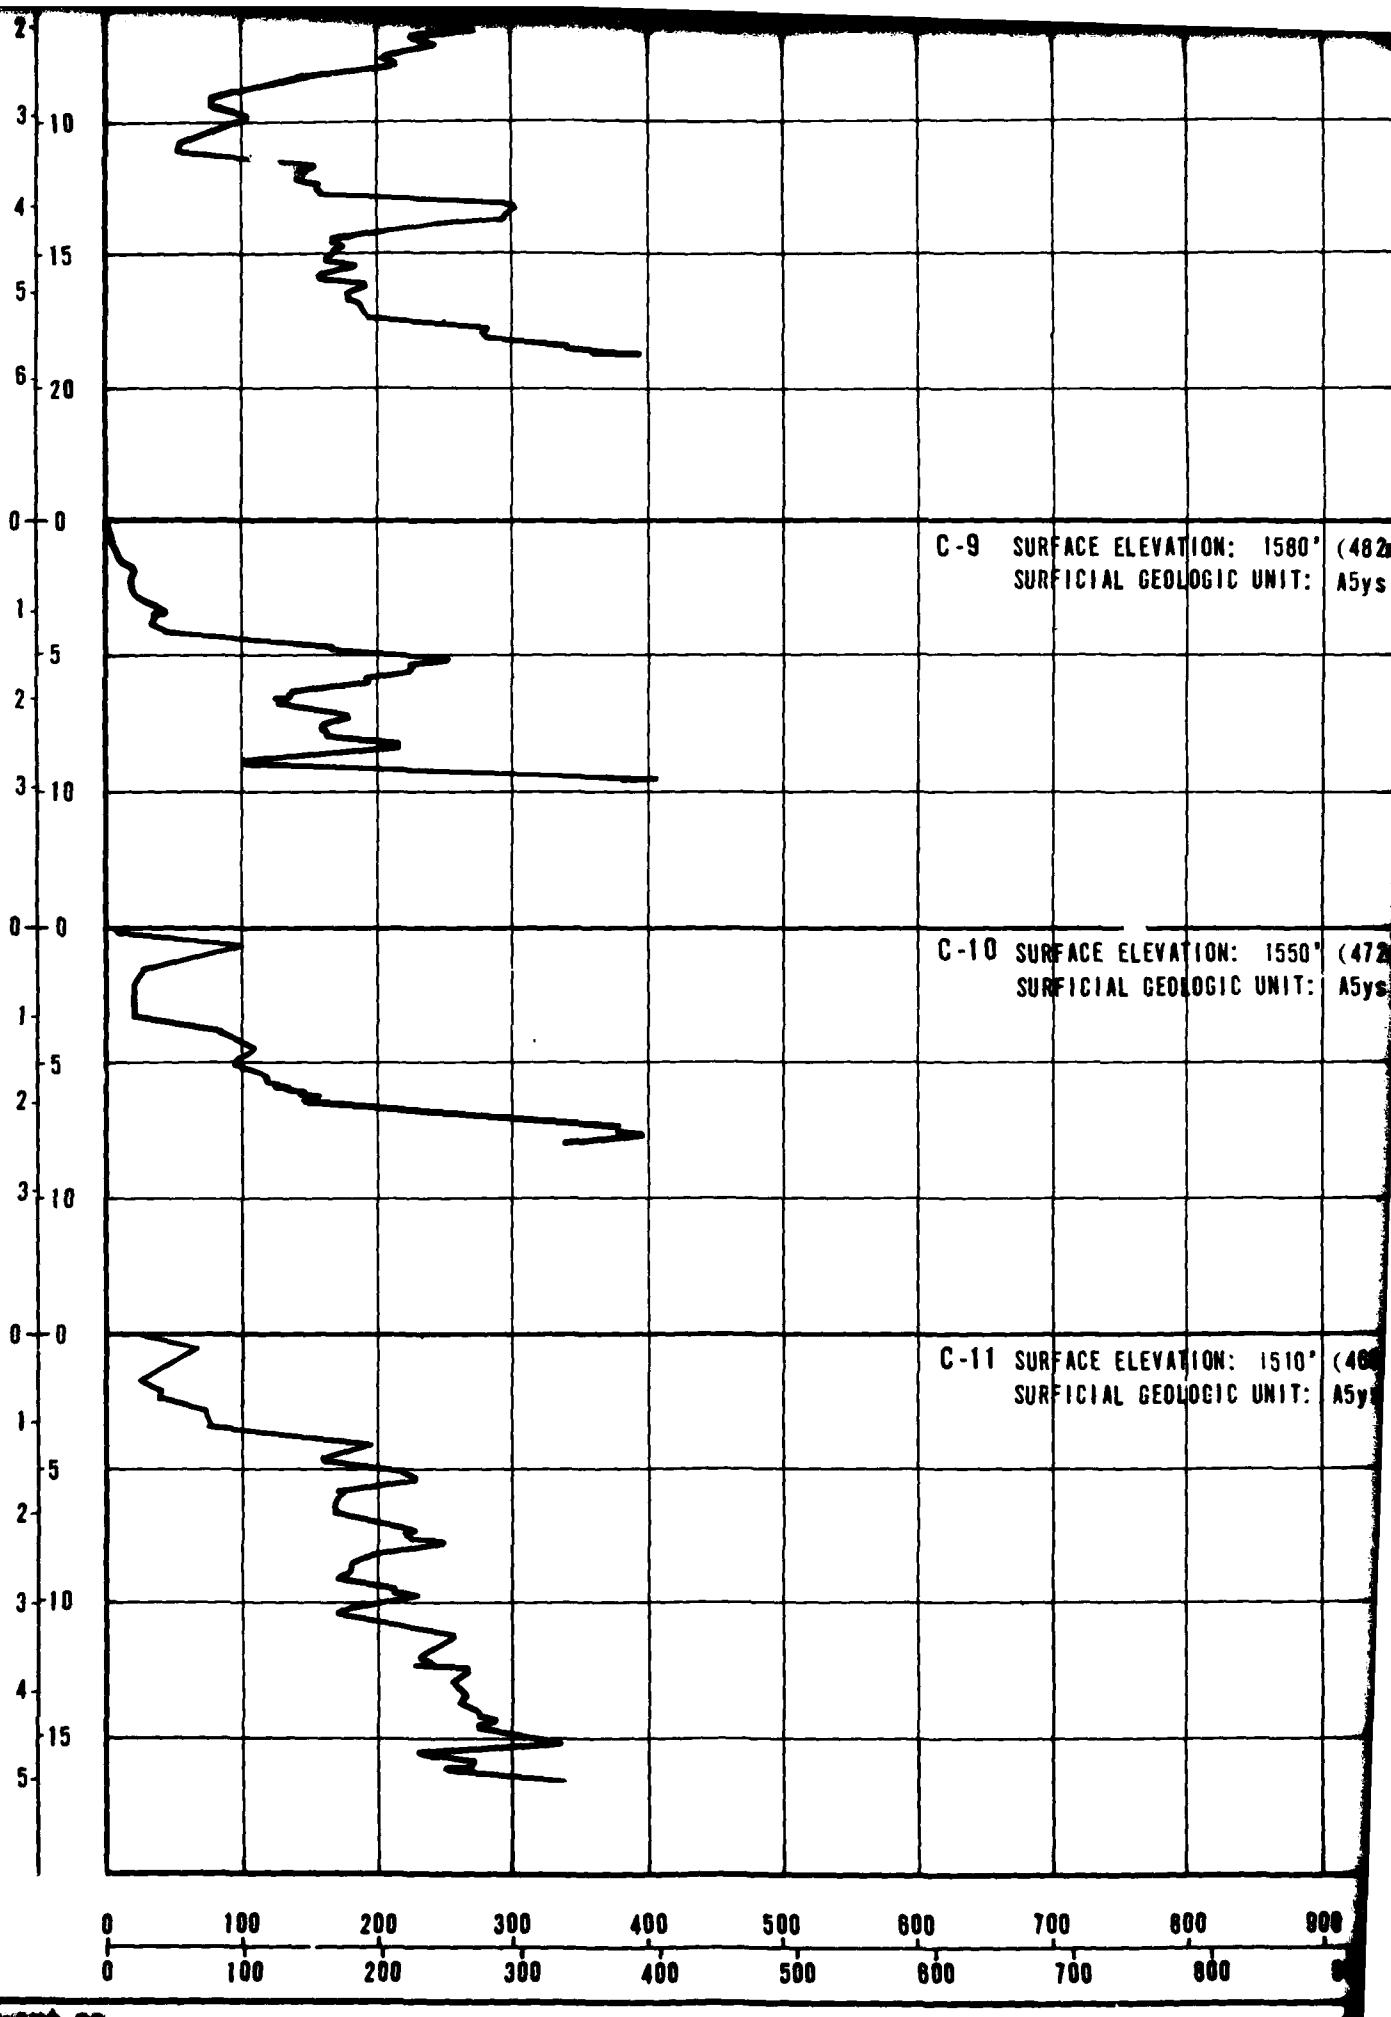

ELEVATION: 1580' (482m)  
REL GEOLOGIC UNIT: A5ys

ELEVATION: 1550' (472m)  
REL GEOLOGIC UNIT: A5ys

ELEVATION: 1510' (460m)  
REL GEOLOGIC UNIT: A5ys/A3d

SM  
SP-SM

P-8

SM

CS-10


SM

P-5

-15  
0 0  
1 5  
2  
3 -10  
0 0  
1 5  
2  
3 -10  
0 0  
1 5  
2  
3 -10  
0 0  
1 5  
2  
3 -10  
0 0  
1 5  
2  
3 -10

0 100 200 300 400 500

800 900 (tsf)

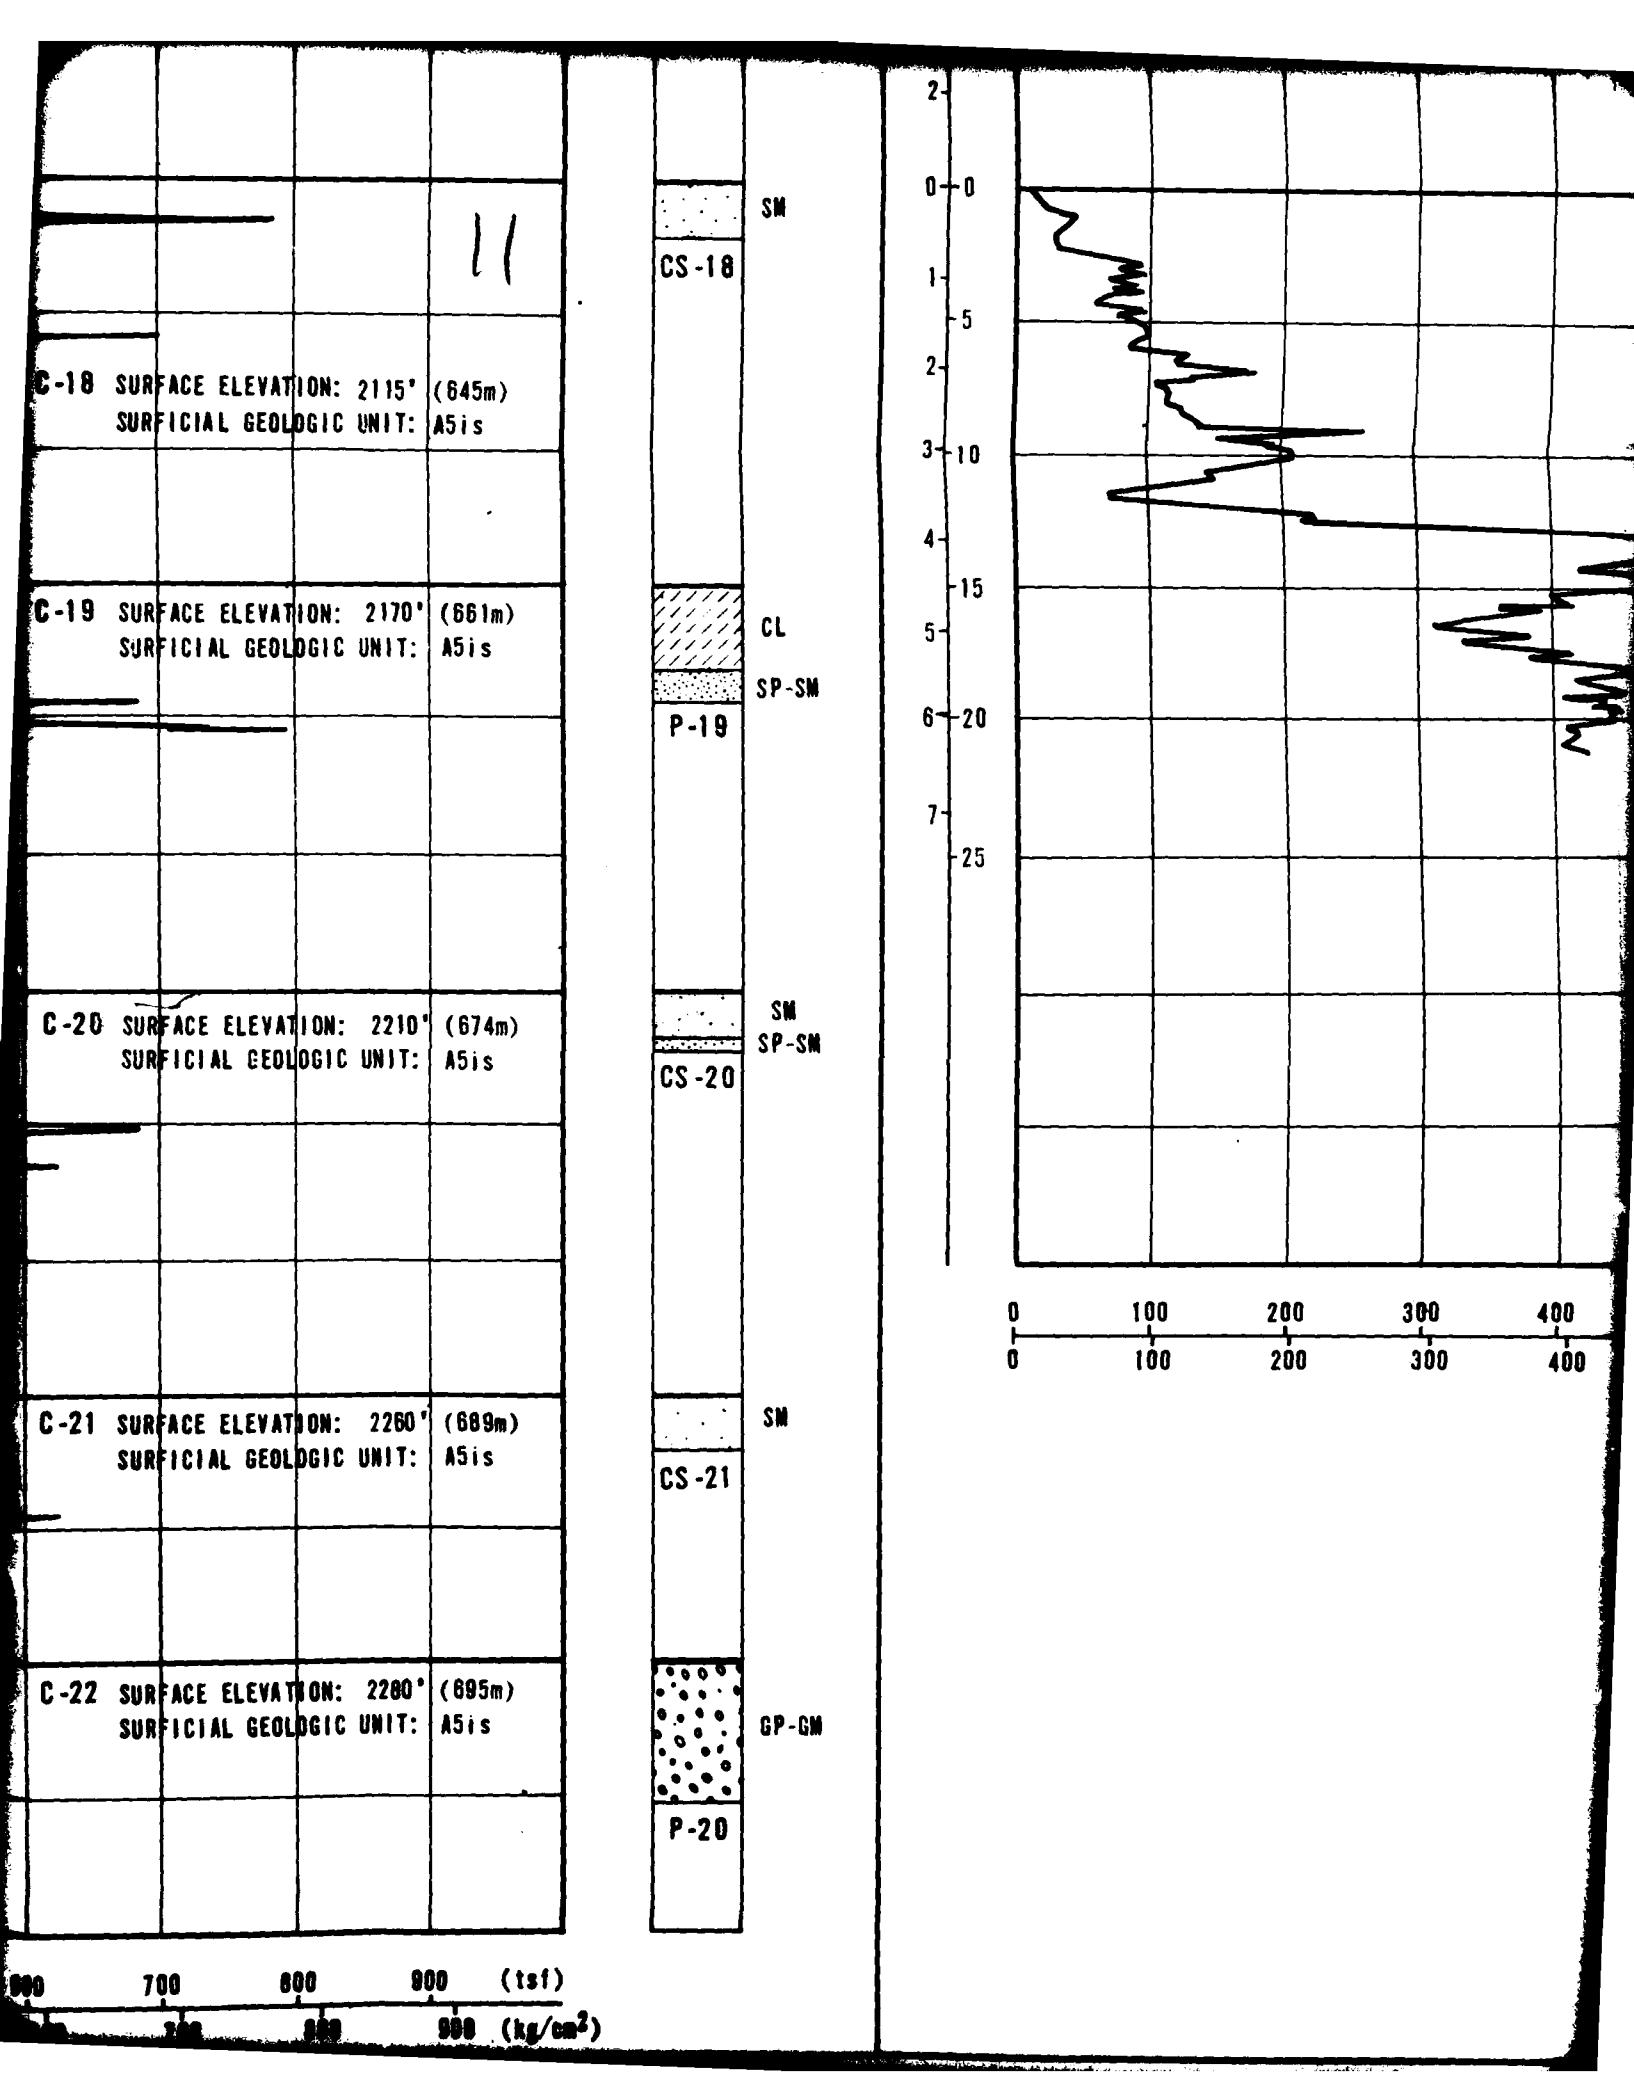



C-30 SURFACE ELEVATION: 1360' (415m)  
SURFICIAL GEOLOGIC UNIT: A5is

C-31 SURFACE ELEVATION: 1240' (378m)  
SURFICIAL GEOLOGIC UNIT A5o

SM

P-25

12

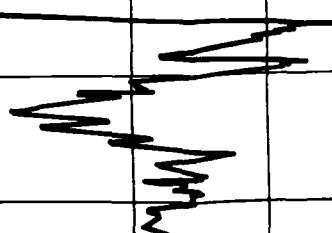

CONE PENETROMETER TEST RESULTS  
VERIFICATION SITE  
BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

DRAWING  
2  
1 OF 3

**FUGRO NATIONAL, INC.**


FN-TR-28-11

CONE RESISTANCE

DEPTH

(METERS)  
(FEET)

0 100 200 300 400 500 600 700 800 900

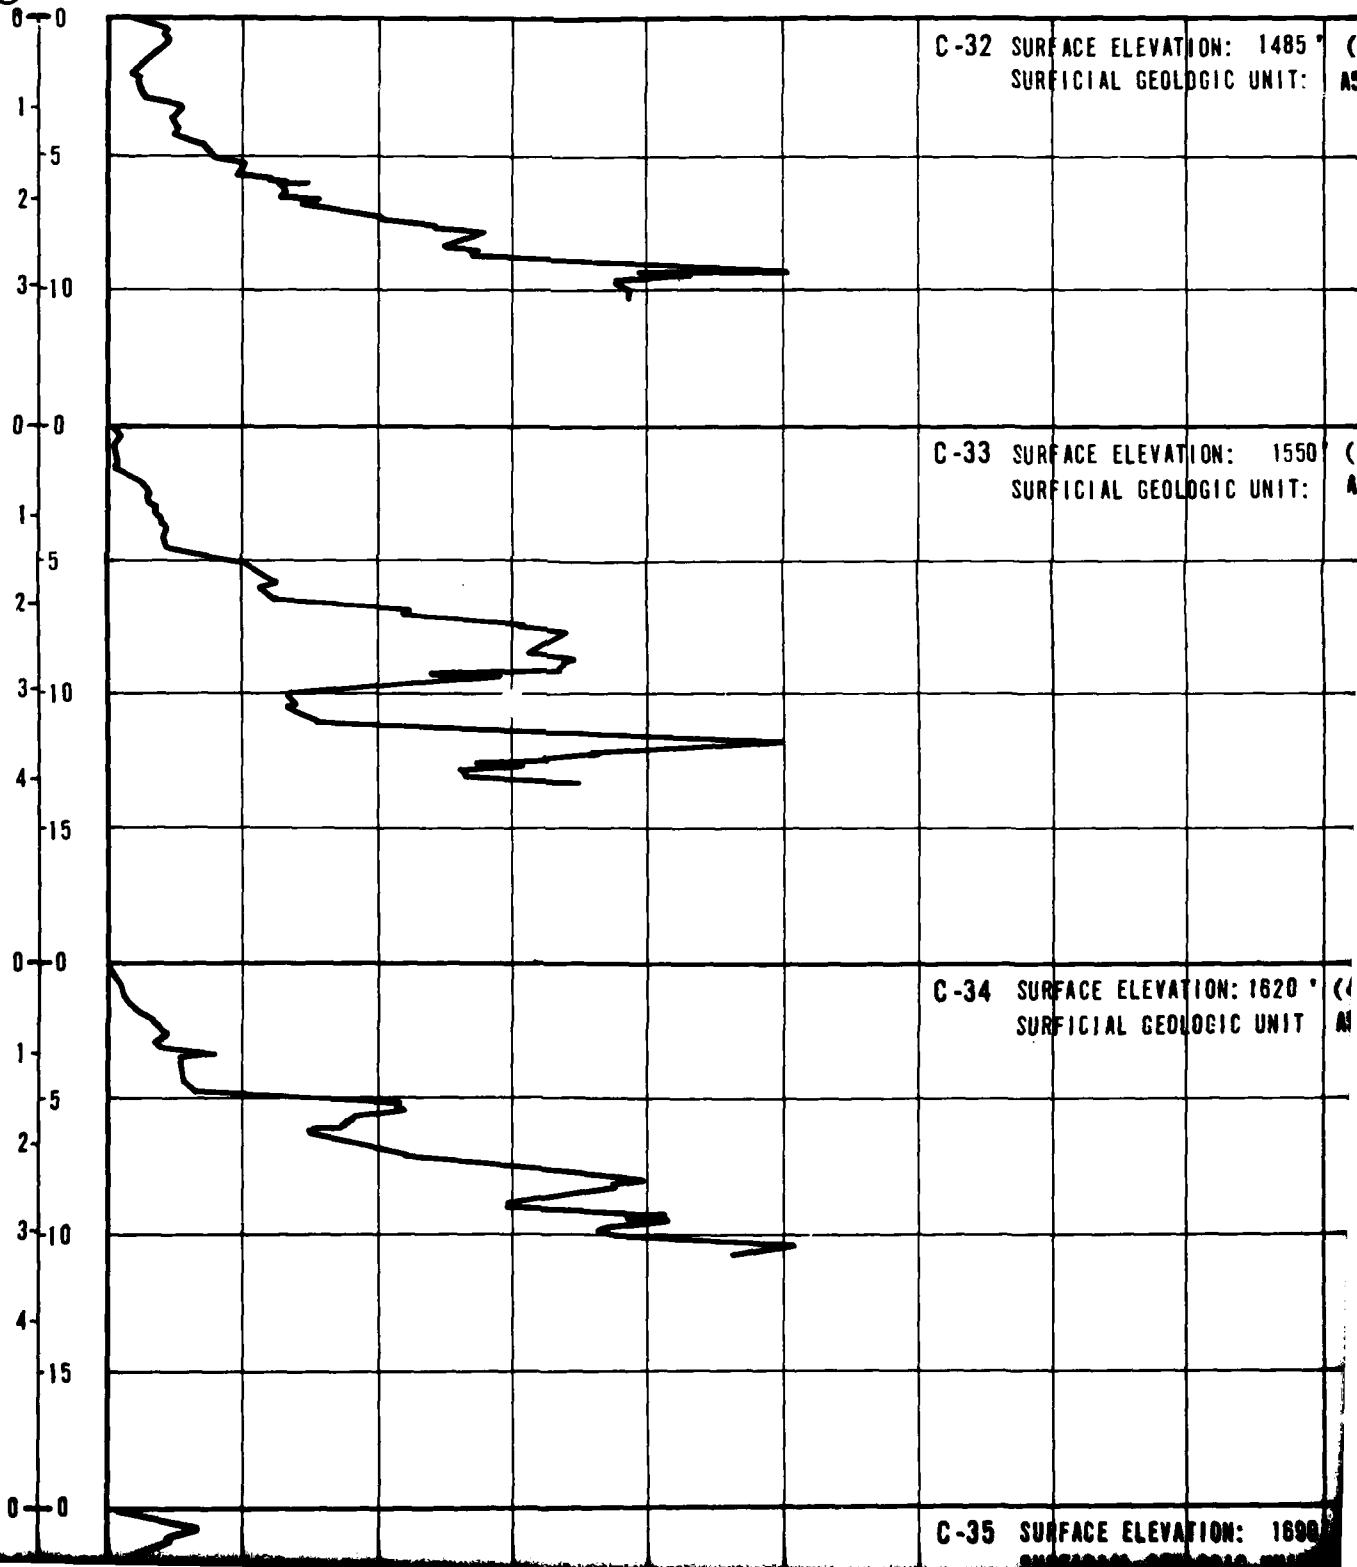

2

CONE RESISTANCE

800 900 (kg/cm<sup>2</sup>)  
800 900 (tsf)

SE ELEVATION: 1485' (453m)  
SIAL GEOLOGIC UNIT: A5ys

SE ELEVATION: 1550' (472m)  
SIAL GEOLOGIC UNIT: A5ys


ELEVATION: 1620' (494m)  
SIAL GEOLOGIC UNIT: A5ys

ELEVATION: 1690' (515m)  
SIAL GEOLOGIC UNIT: A5ys

SOIL  
COLUMN

DEPTH

(METERS)  
(FEET)

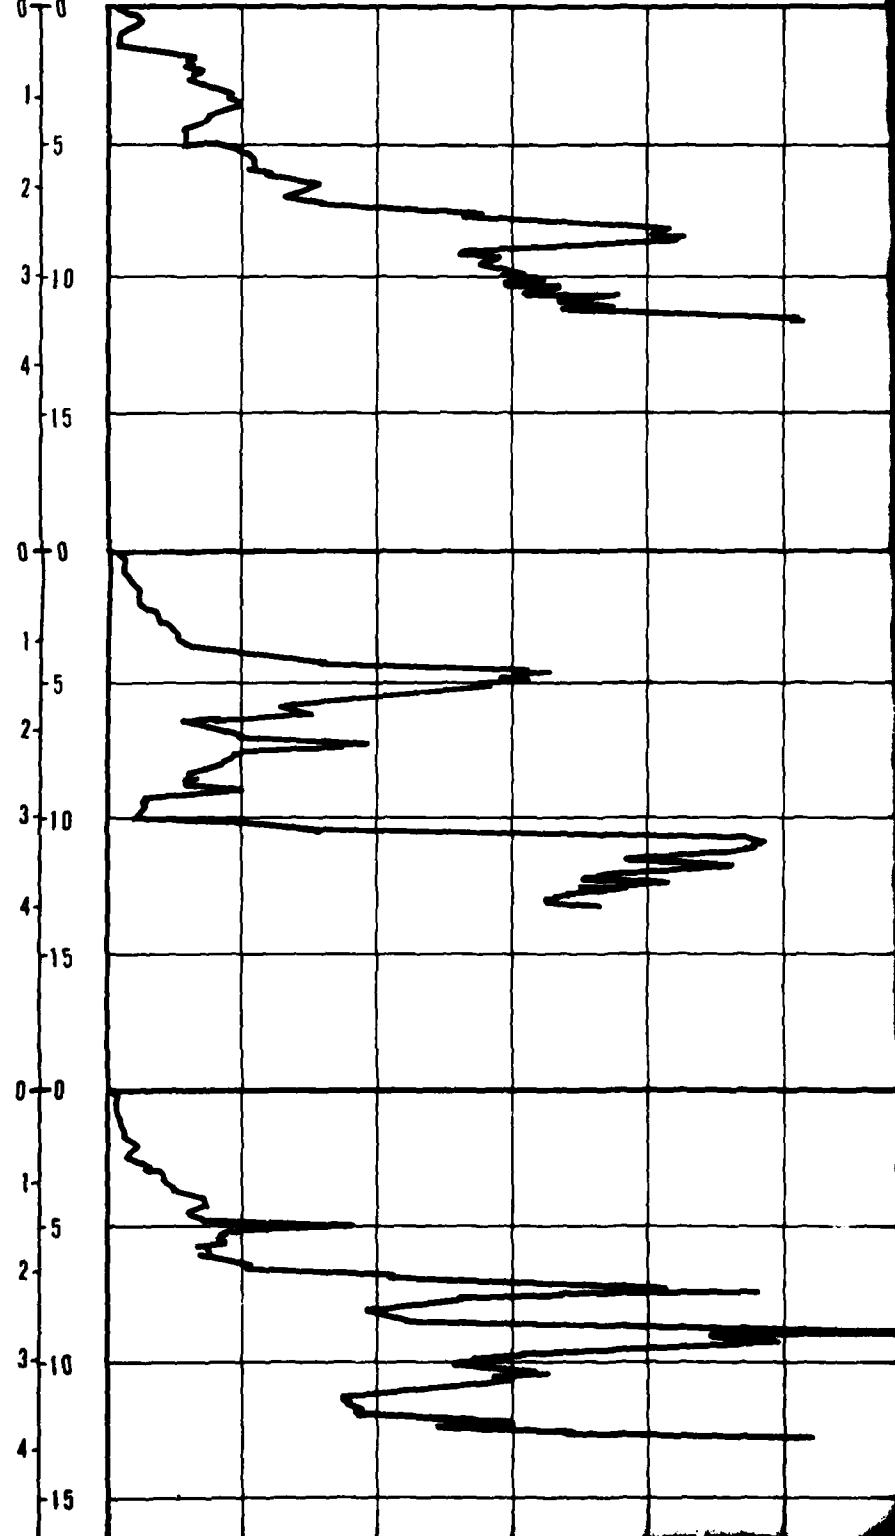

3

600      700      800      900      (kg/cm<sup>2</sup>)  
 600      700      800      900      (tsf)

C-42	SURFACE ELEVATION: 1425' (434m)	SURFICIAL GEOLOGIC UNIT: A5y/A1s

C-43	SURFACE ELEVATION: 1945' (593m)	SURFICIAL GEOLOGIC UNIT: A5ys

C-44	SURFACE ELEVATION: 1885' (578m)	SURFICIAL GEOLOGIC UNIT: A5ys

SOIL  
COLUMN

SP-SM

SW-SM

T-3

SM

CS-43

SM

CL

SP-SM

P-17

## DEPTH

(METERS)  
(FEET)

0

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

0

100

200

300

400

0

100

200

300

400

0

100

200

300

400

0

100

200

300

400

0

100

200

300

400

0

100

200

300

400

0

100

200

300

400


0

100


200

4

## CONE RESISTANCE

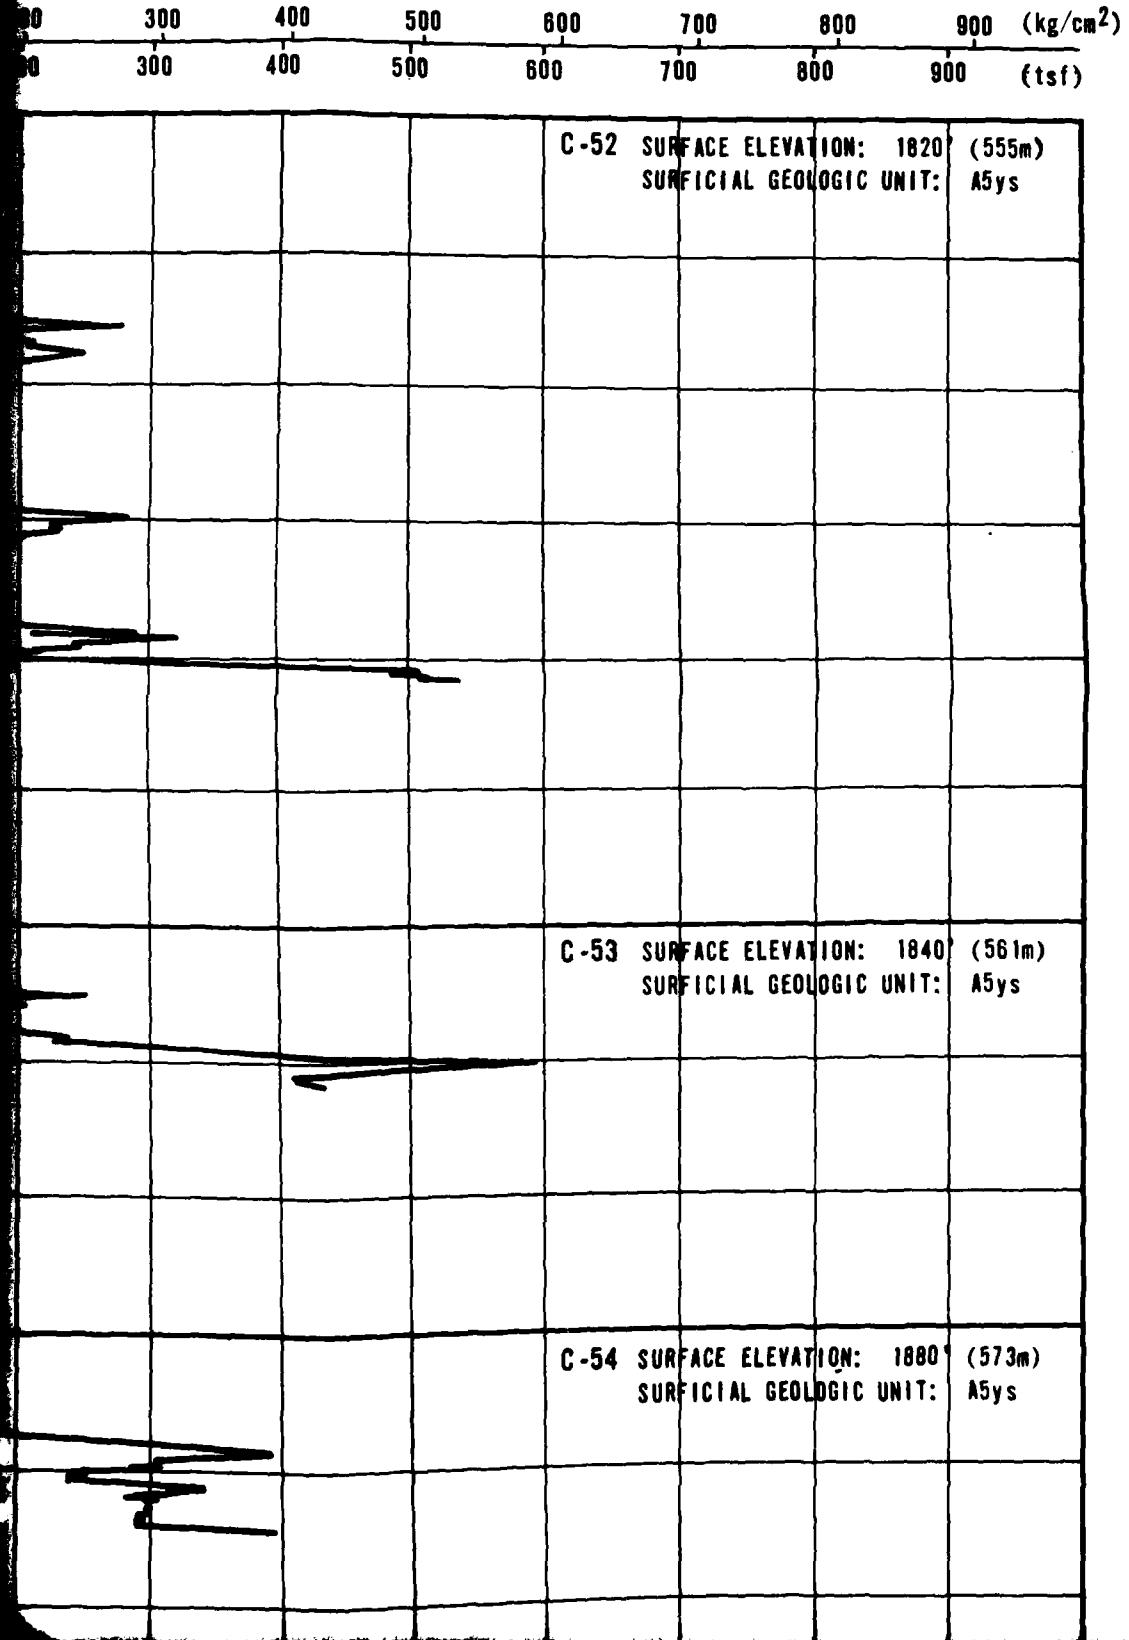

5

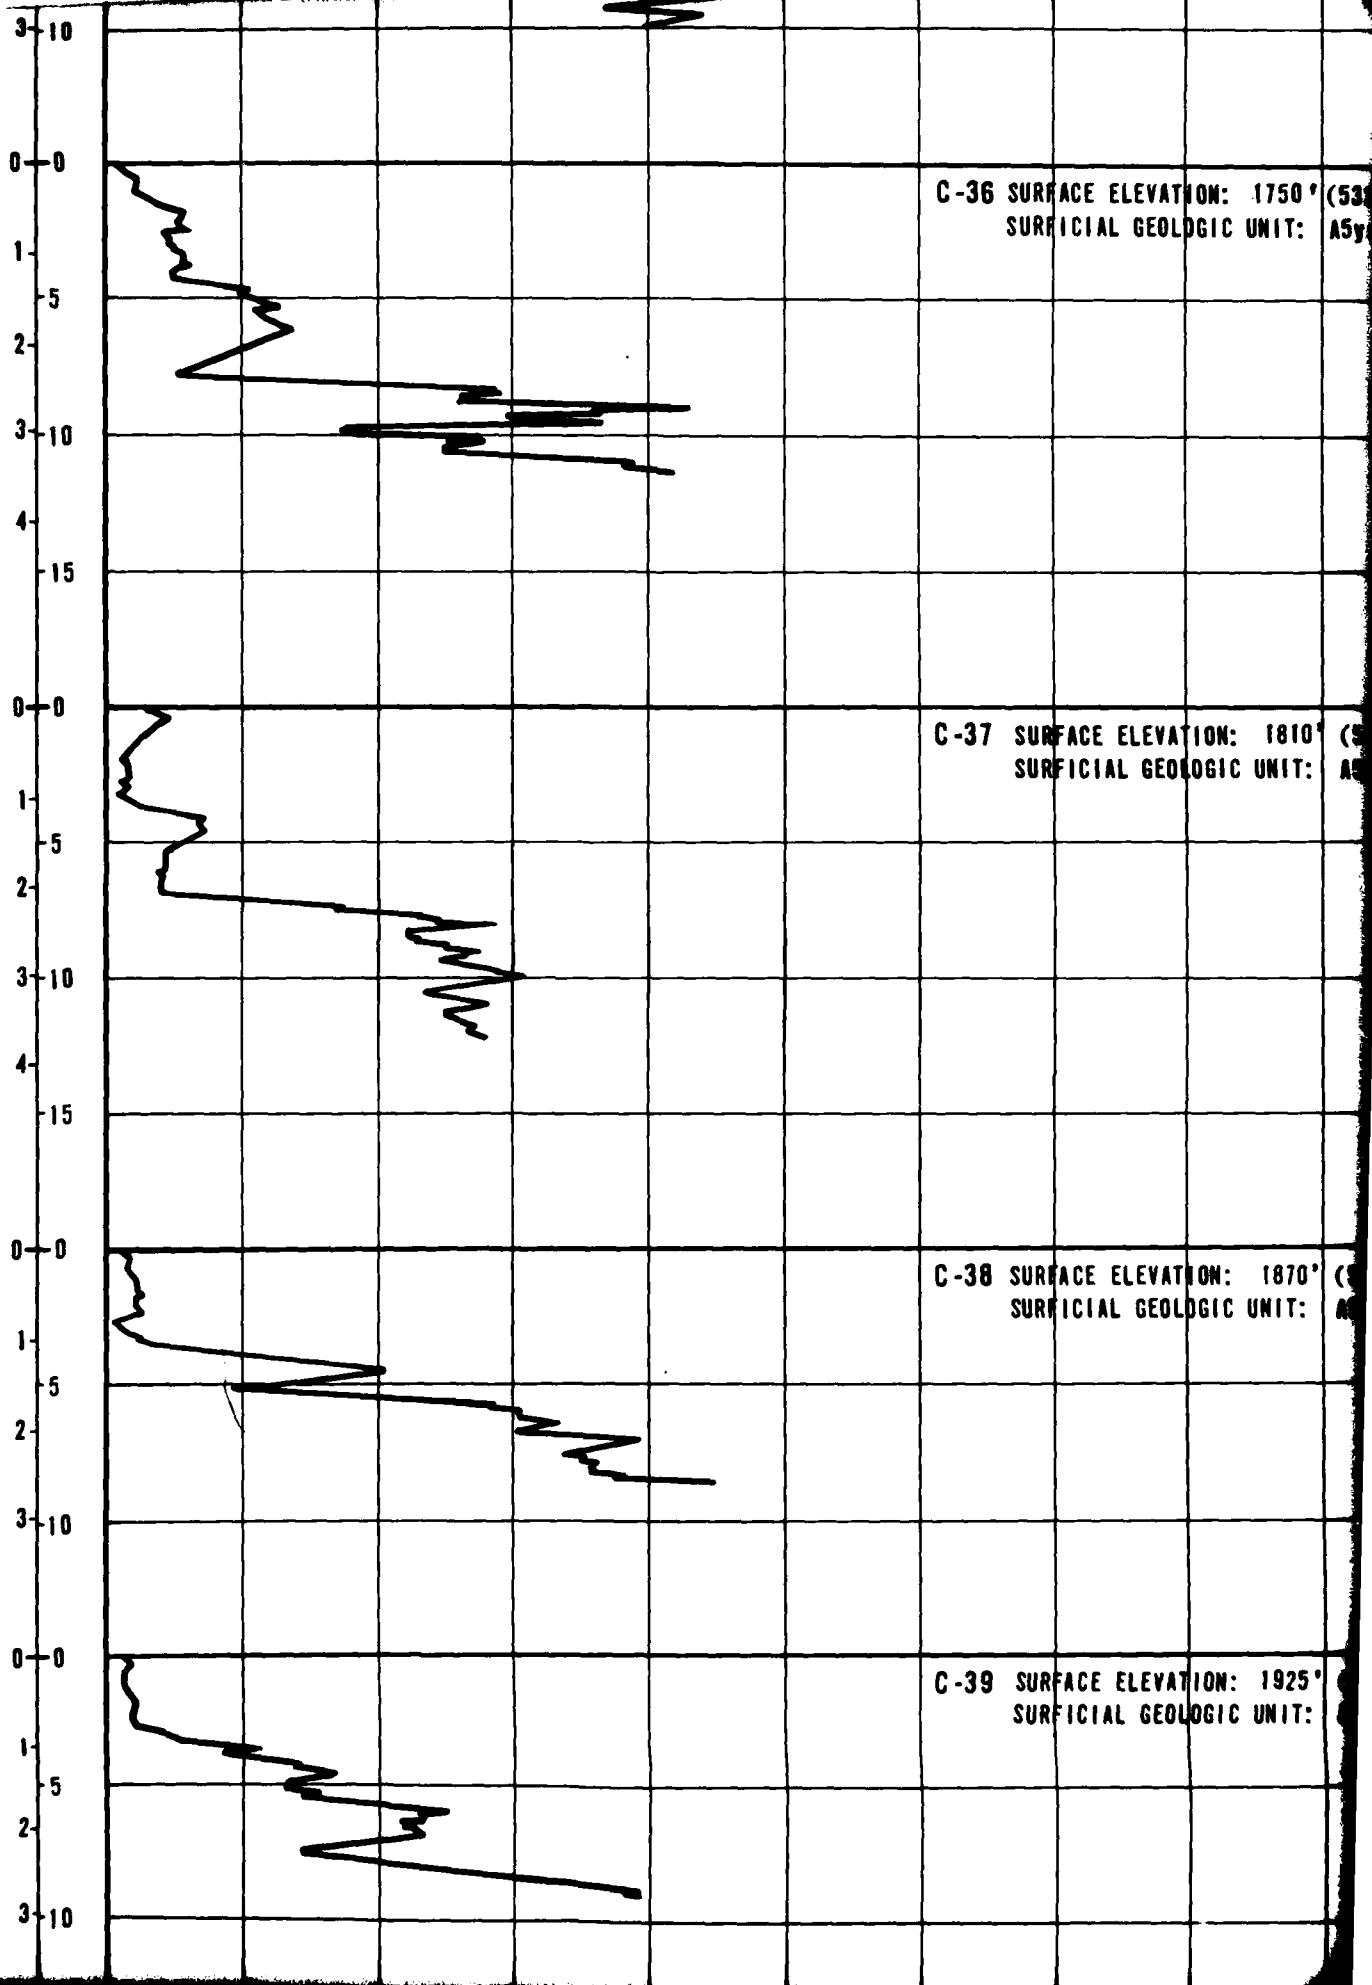

ELEVATION: 1750' (533m)  
SPECIAL GEOLOGIC UNIT: A5ys

ELEVATION: 1810' (552m)  
SPECIAL GEOLOGIC UNIT: A5ys

ELEVATION: 1870' (570m)  
SPECIAL GEOLOGIC UNIT: A5ys

ELEVATION: 1925' (587m)  
SPECIAL GEOLOGIC UNIT: A5ys

6

SM

CS-37


SM

SP-SM


P-23

SM

SP-SM

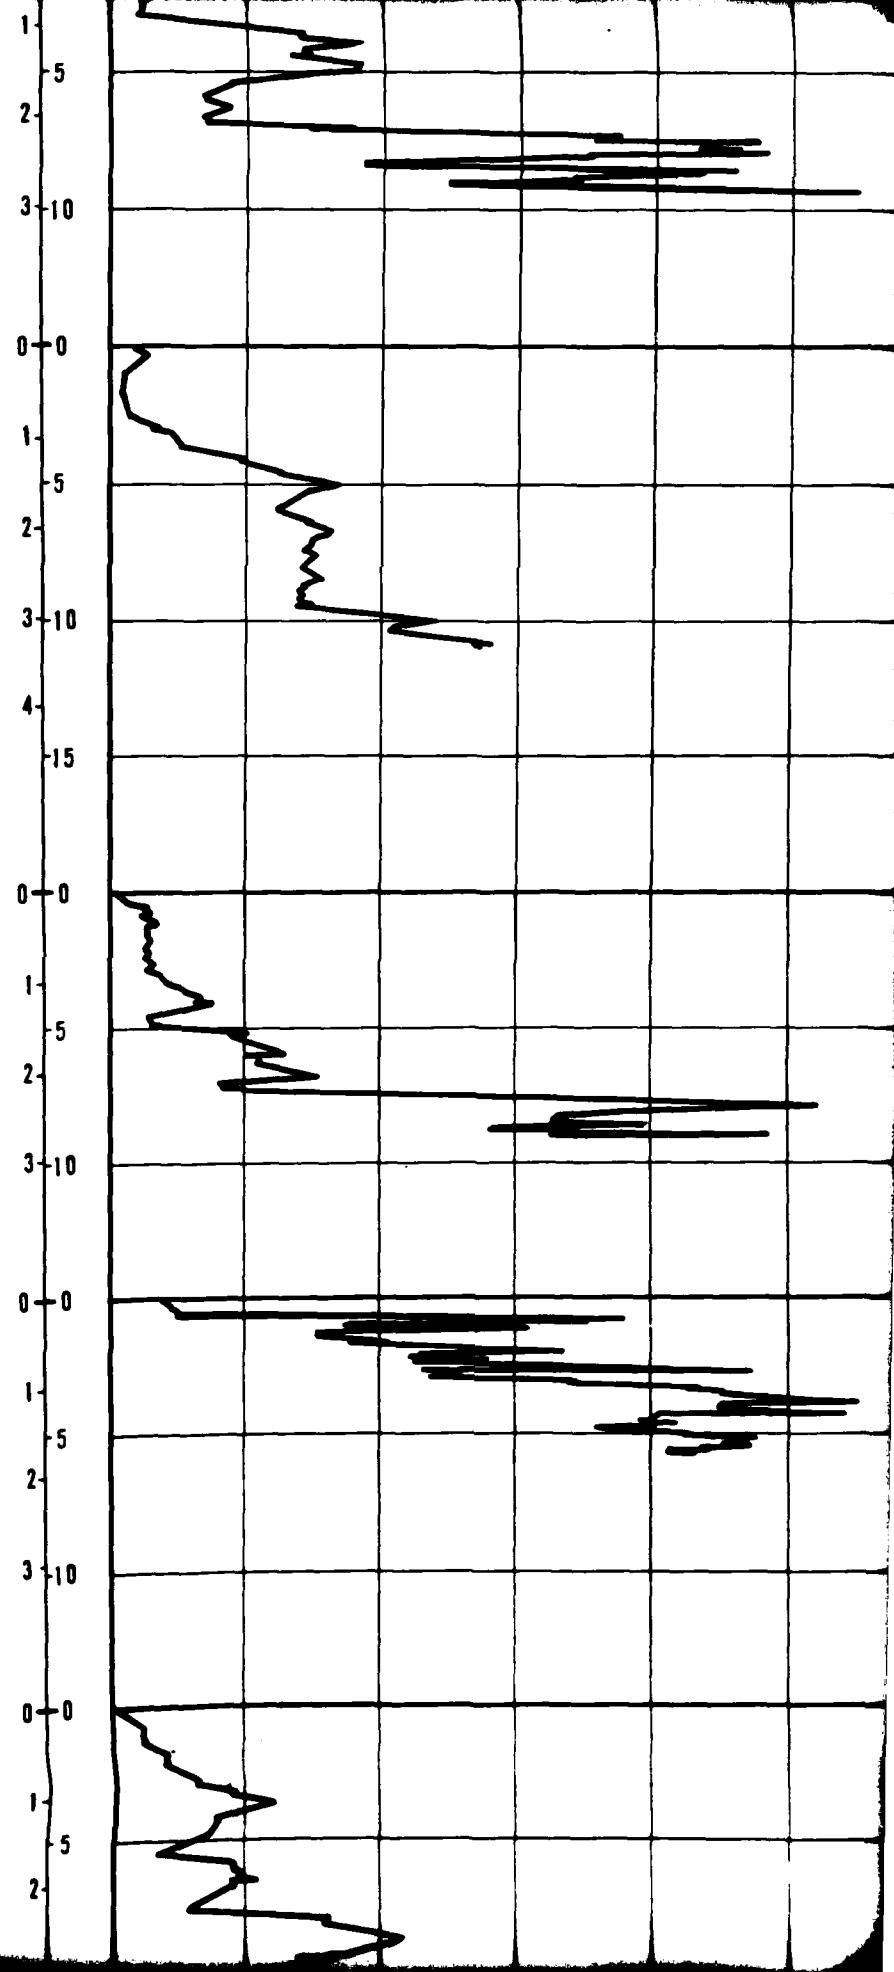

C-46	SURFACE ELEVATION: 1785' (538m)	SURFICIAL GEOLOGIC UNIT: A5ys
C-47	SURFACE ELEVATION: 1770' (539m)	SURFICIAL GEOLOGIC UNIT: A5ys
C-48	SURFACE ELEVATION: 1840' (561m)	SURFICIAL GEOLOGIC UNIT: A5ig
C-49	SURFACE ELEVATION: 1770' (539m)	SURFICIAL GEOLOGIC UNIT: A5ys

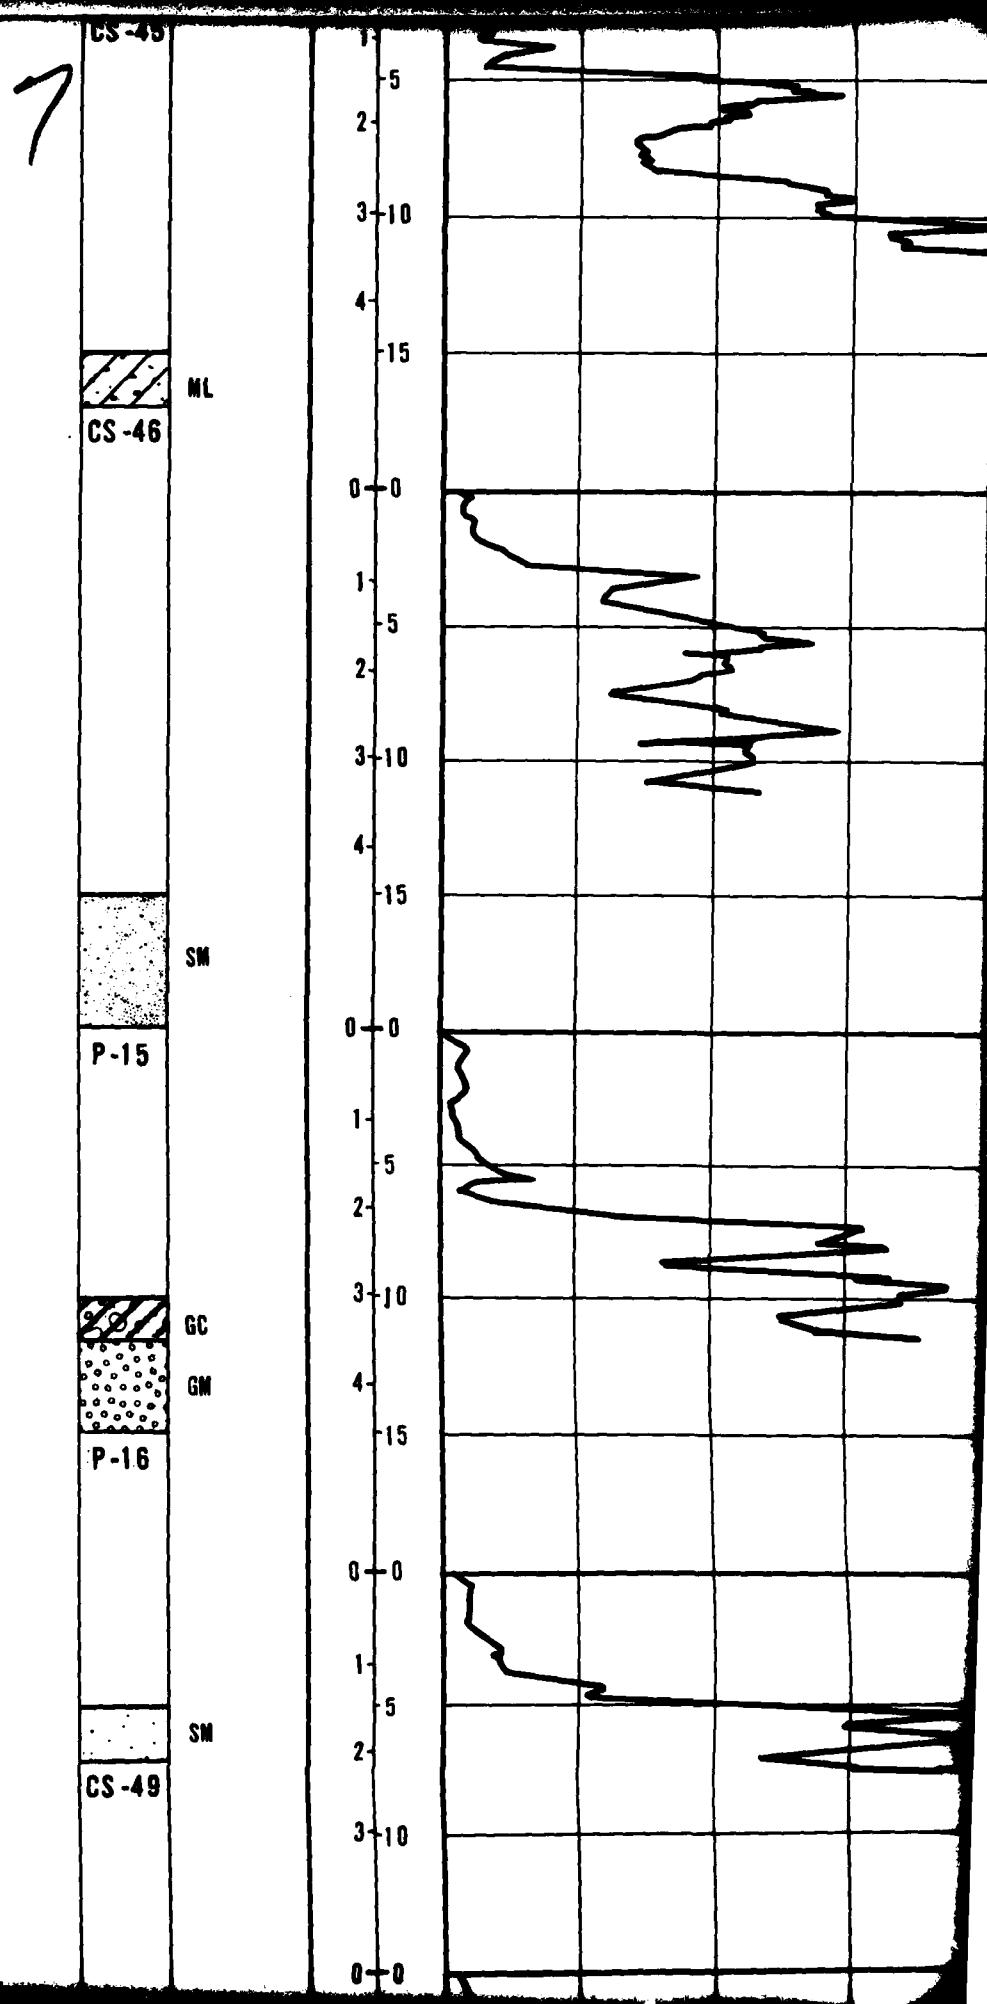

SURFICIAL GEOLOGIC UNIT: A5ys

P-10

GM

8

C-56 SURFACE ELEVATION: 1510' (460m)  
SURFICIAL GEOLOGIC UNIT: A5ys

CS-56

CL

C-57 SURFACE ELEVATION: 1470' (448m)  
SURFICIAL GEOLOGIC UNIT: A5ys

CS-57

SM

C-58 SURFACE ELEVATION: 1455' (443m)  
SURFICIAL GEOLOGIC UNIT: A5ys


P-4

CL

SM

SP-SM


9

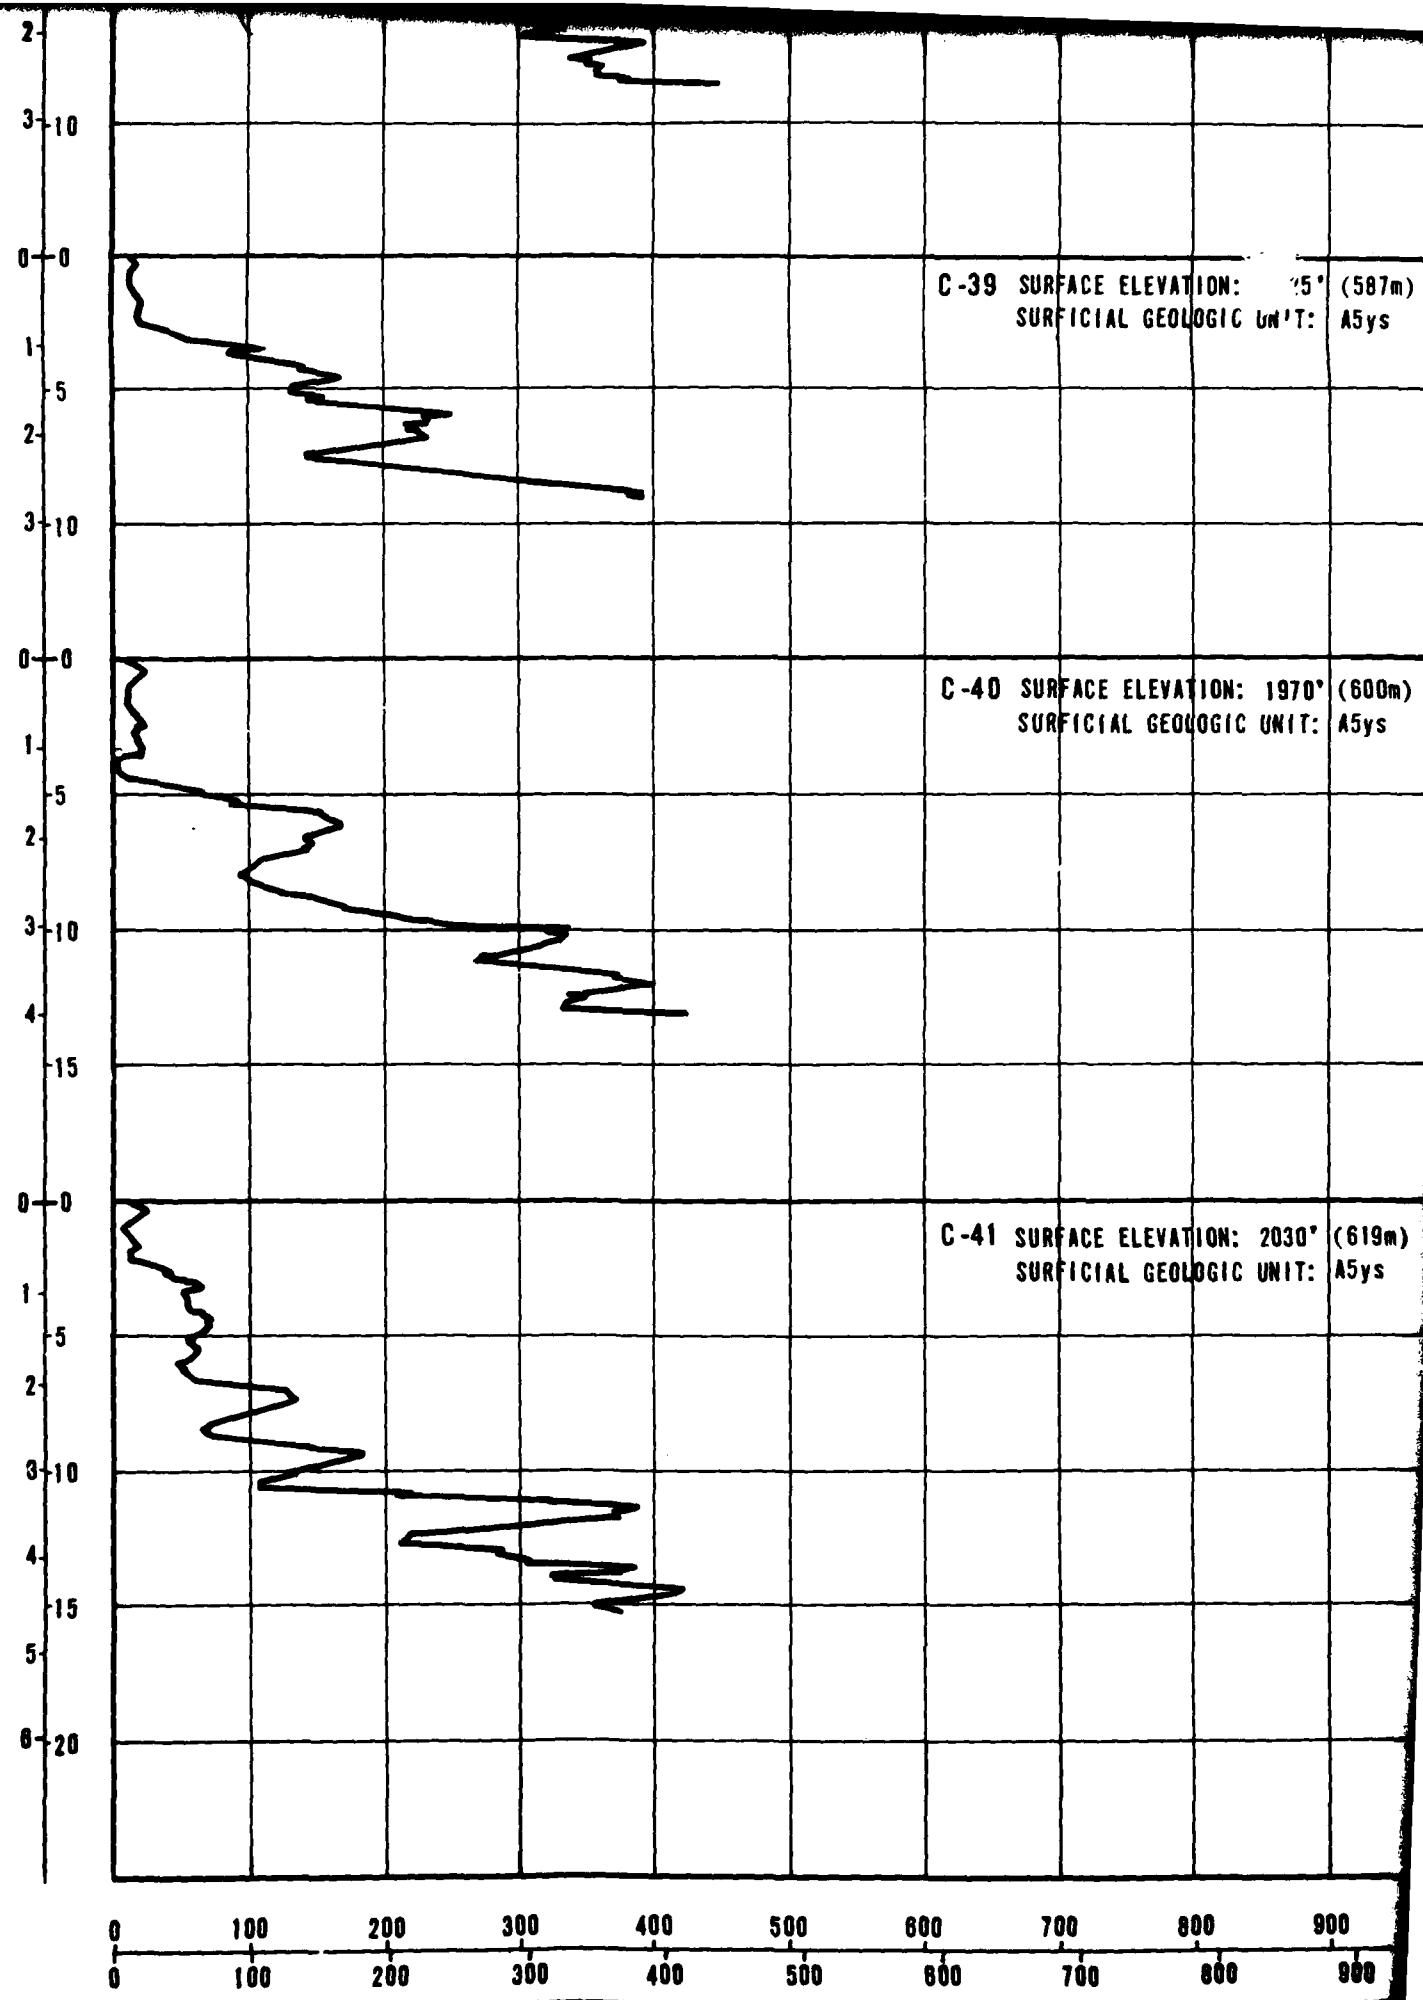APPROVED BY \_\_\_\_\_  
CHECKED BY \_\_\_\_\_

FACE ELEVATION: 1925' (587m)  
OFFICIAL GEOLOGIC UNIT: A5ys

FACE ELEVATION: 1970' (600m)  
OFFICIAL GEOLOGIC UNIT: A5ys

FACE ELEVATION: 2030' (619m)  
OFFICIAL GEOLOGIC UNIT: A5ys

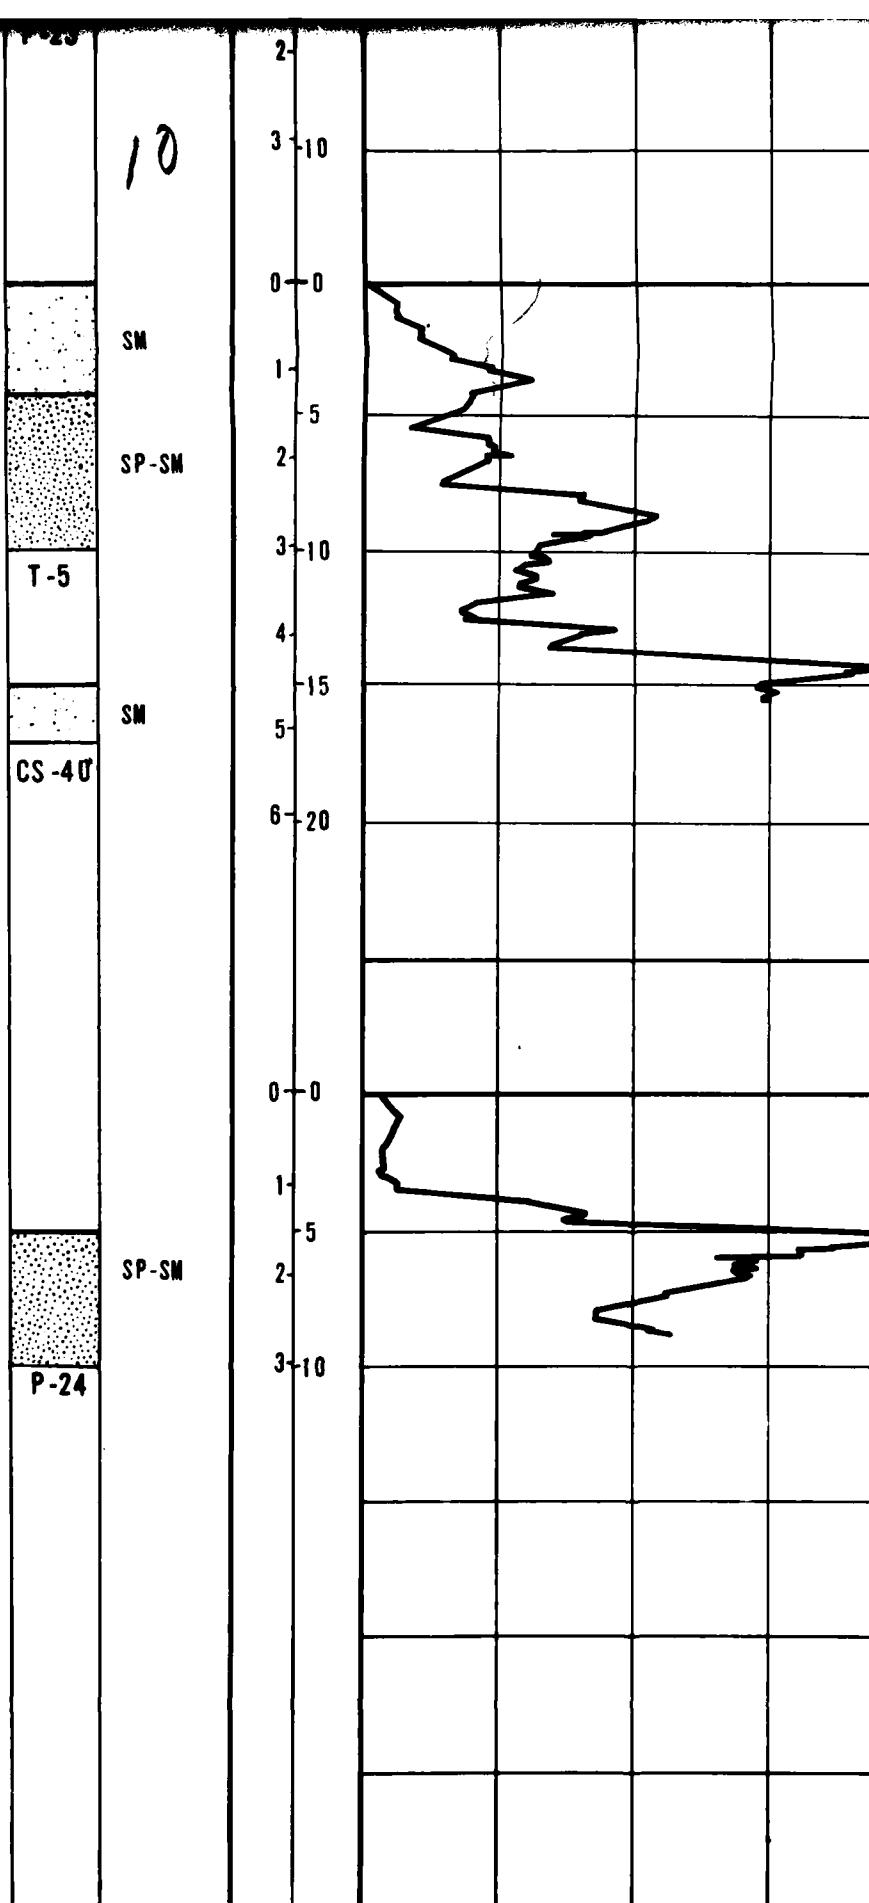

700 800 900 (tsf)  
700 800 900 (kg/cm<sup>2</sup>)

0 100 200 300 400 500

11

49 SURFACE ELEVATION: 1770' (539m)  
SURFICIAL GEOLOGIC UNIT: A5ys


DRAWING 2, SHEET 3 OF 3 FOR C-50

-51 SURFACE ELEVATION: 1810' (552m)  
SURFICIAL GEOLOGIC UNIT: A5ys

SM

CS-49

1  
5  
2  
3-10  
0-0  
1  
5  
2  
3-10  
4  
-15

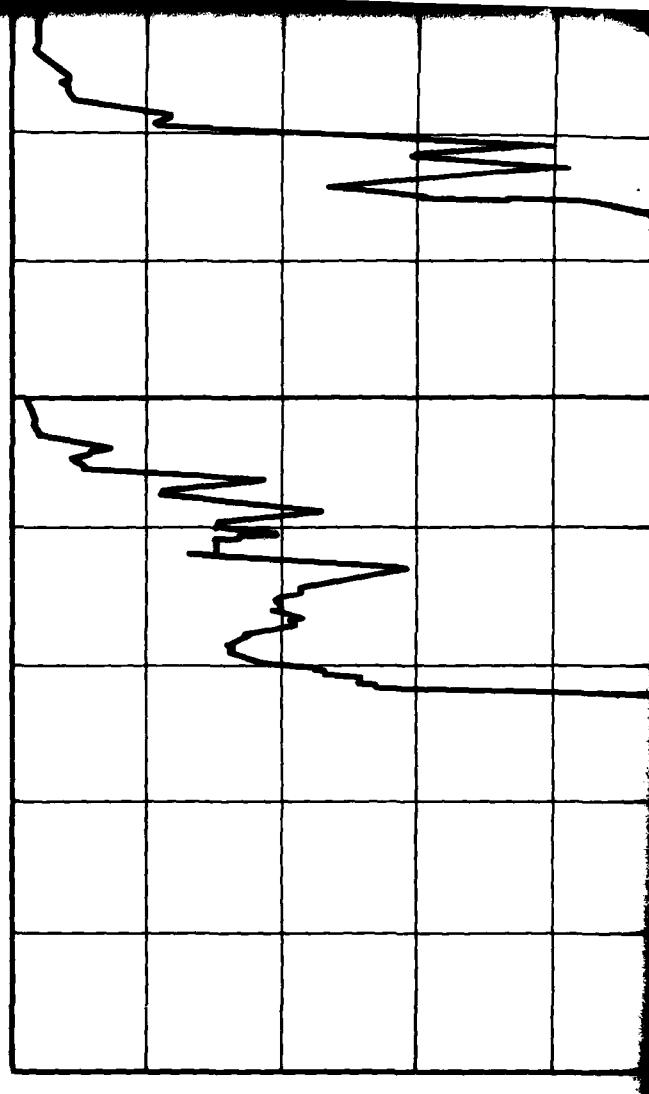

SM

CS-51

0 100 200 300 400  
0 100 200 300 400

0 700 800 900 (tsf)  
0 700 800 900 ( $\text{kg}/\text{cm}^2$ )


C-58 SURFACE ELEVATION: 1455 (443m)  
SURFICIAL GEOLOGIC UNIT: A5ys

CL  
SM  
SP-SM  
P-4

12

C-59 SURFACE ELEVATION: 1470 (448m)  
SURFICIAL GEOLOGIC UNIT: A5ys

SC  
CS-59



CONE PENETROMETER TEST RESULTS  
VERIFICATION SITE  
BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

DRAWING  
2  
2 OF 3

FUGRO NATIONAL, INC.


FN-TR-28-11

CONE RESISTANCE


DEPTH

(METERS)  
(FEET)

0 100 200 300 400 500 600 700 800 900

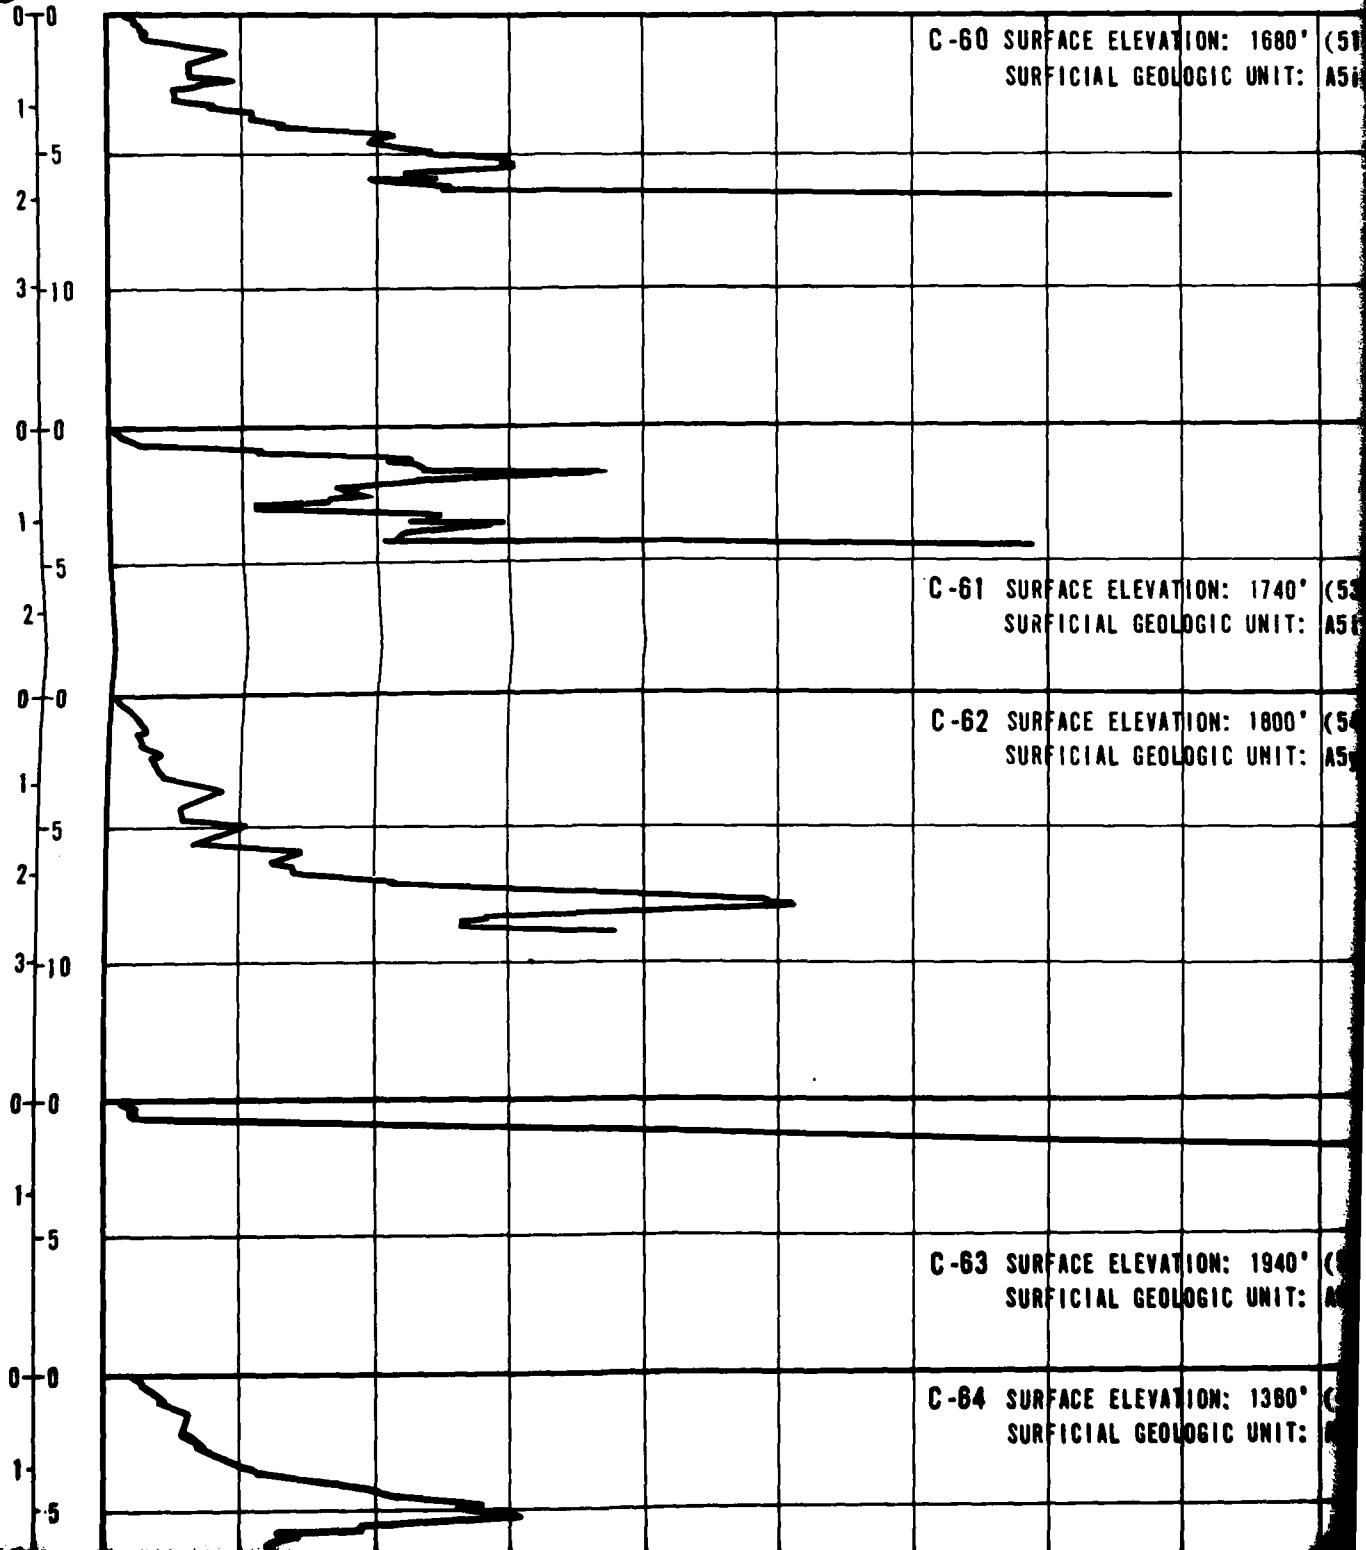

2  
CONE RESISTANCE



FACE ELEVATION: 1680' (512m)  
SPECIAL GEOLOGIC UNIT: A5is

FACE ELEVATION: 1740' (530m)  
SPECIAL GEOLOGIC UNIT: A5is

FACE ELEVATION: 1800' (549m)  
SPECIAL GEOLOGIC UNIT: A5ys

FACE ELEVATION: 1940' (591m)  
SPECIAL GEOLOGIC UNIT: A5is

FACE ELEVATION: 1380' (415m)  
SPECIAL GEOLOGIC UNIT: A5ys

SOIL  
COLUMN

SM

P-2

SM

CS-63

SM

SW-SM

P-3

SM

CS-63

SM


CS-64

DEPTH

(METERS)  
(FEET)

0      100      200      300      400      500


0      100      200      300      400      500

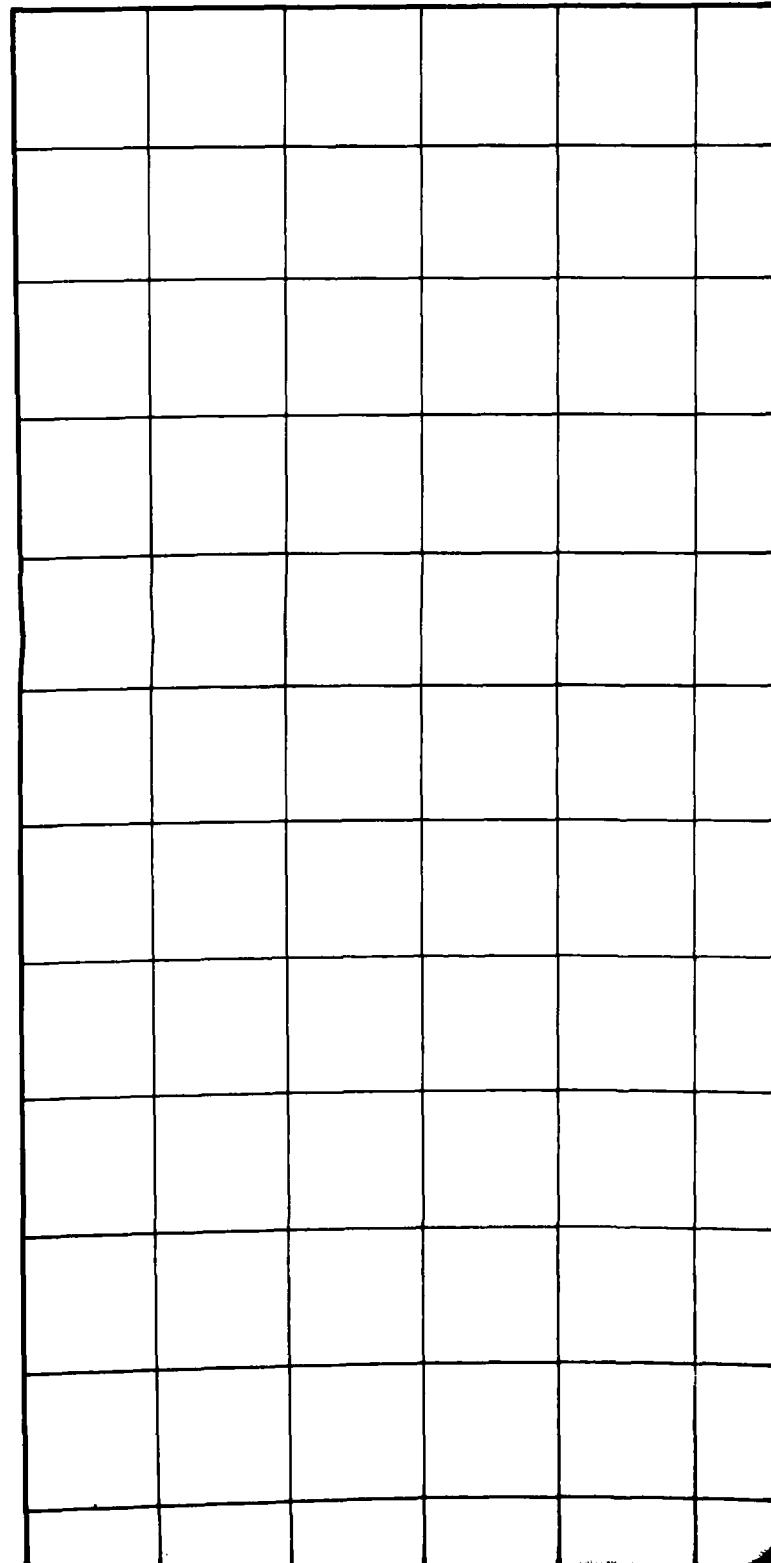

3

ANCE

600      700      800      900      (kg/cm<sup>2</sup>)  
600      700      800      900      (tsf)

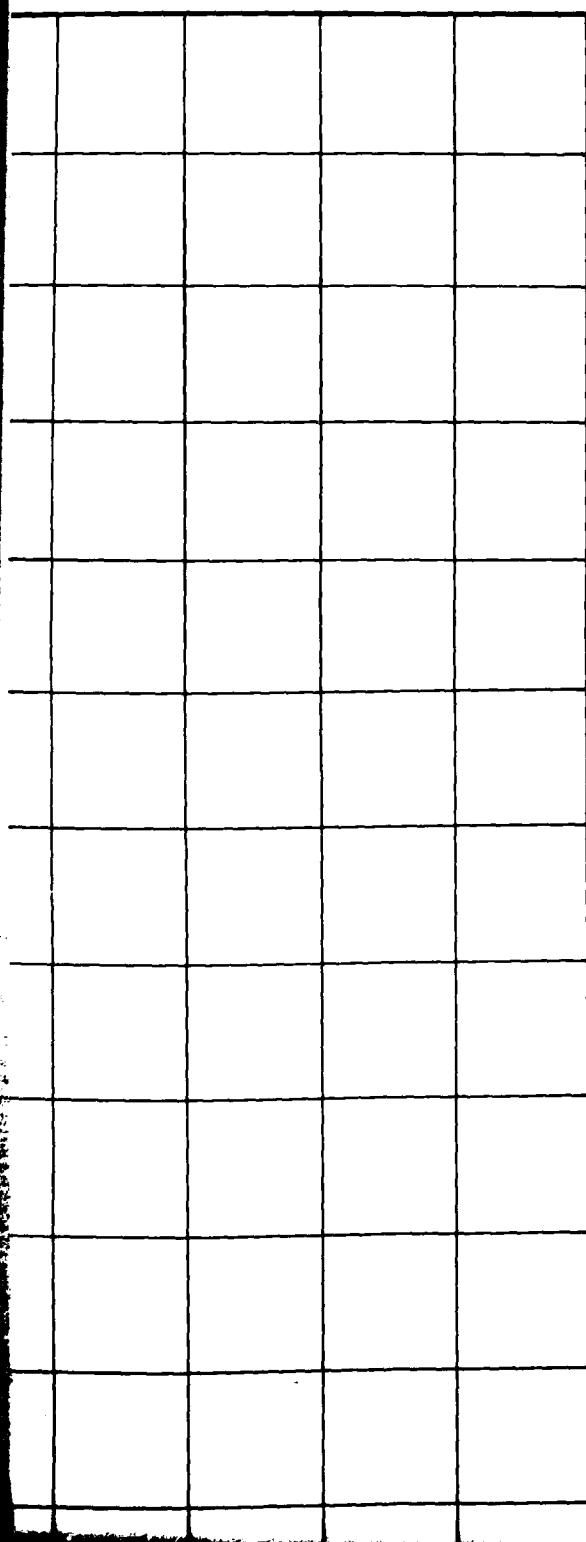


SOIL  
COLUMN

FRICtION RESISTANCE

DEPTH


(METERS) 10  
0      8  
1      6  
2      4

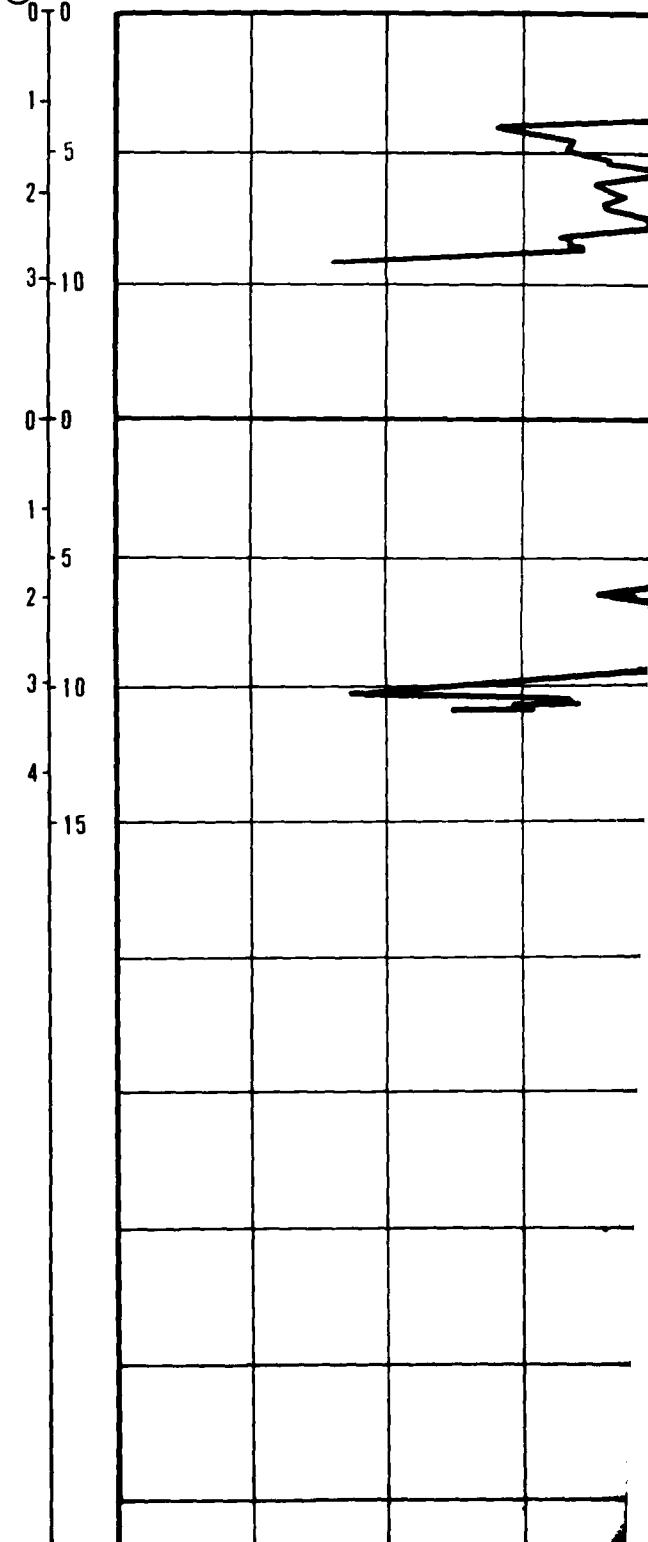

4

FRICITION RESISTANCE

CONE RESISTANCE

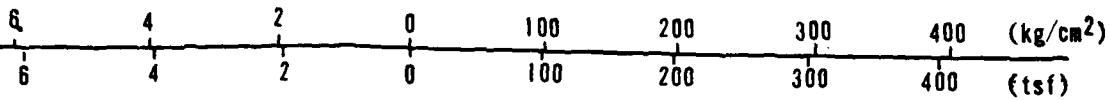

SOIL  
COLUMN

SM

CS-49

SM


CL-SC

P-14

C-49A SURFACE ELEVATION: 1770 (539m)  
SURFICIAL GEOLOGIC UNIT: A5ys

C-50 SURFACE ELEVATION: 1790 (546m)  
SURFICIAL GEOLOGIC UNIT: A5ys

5

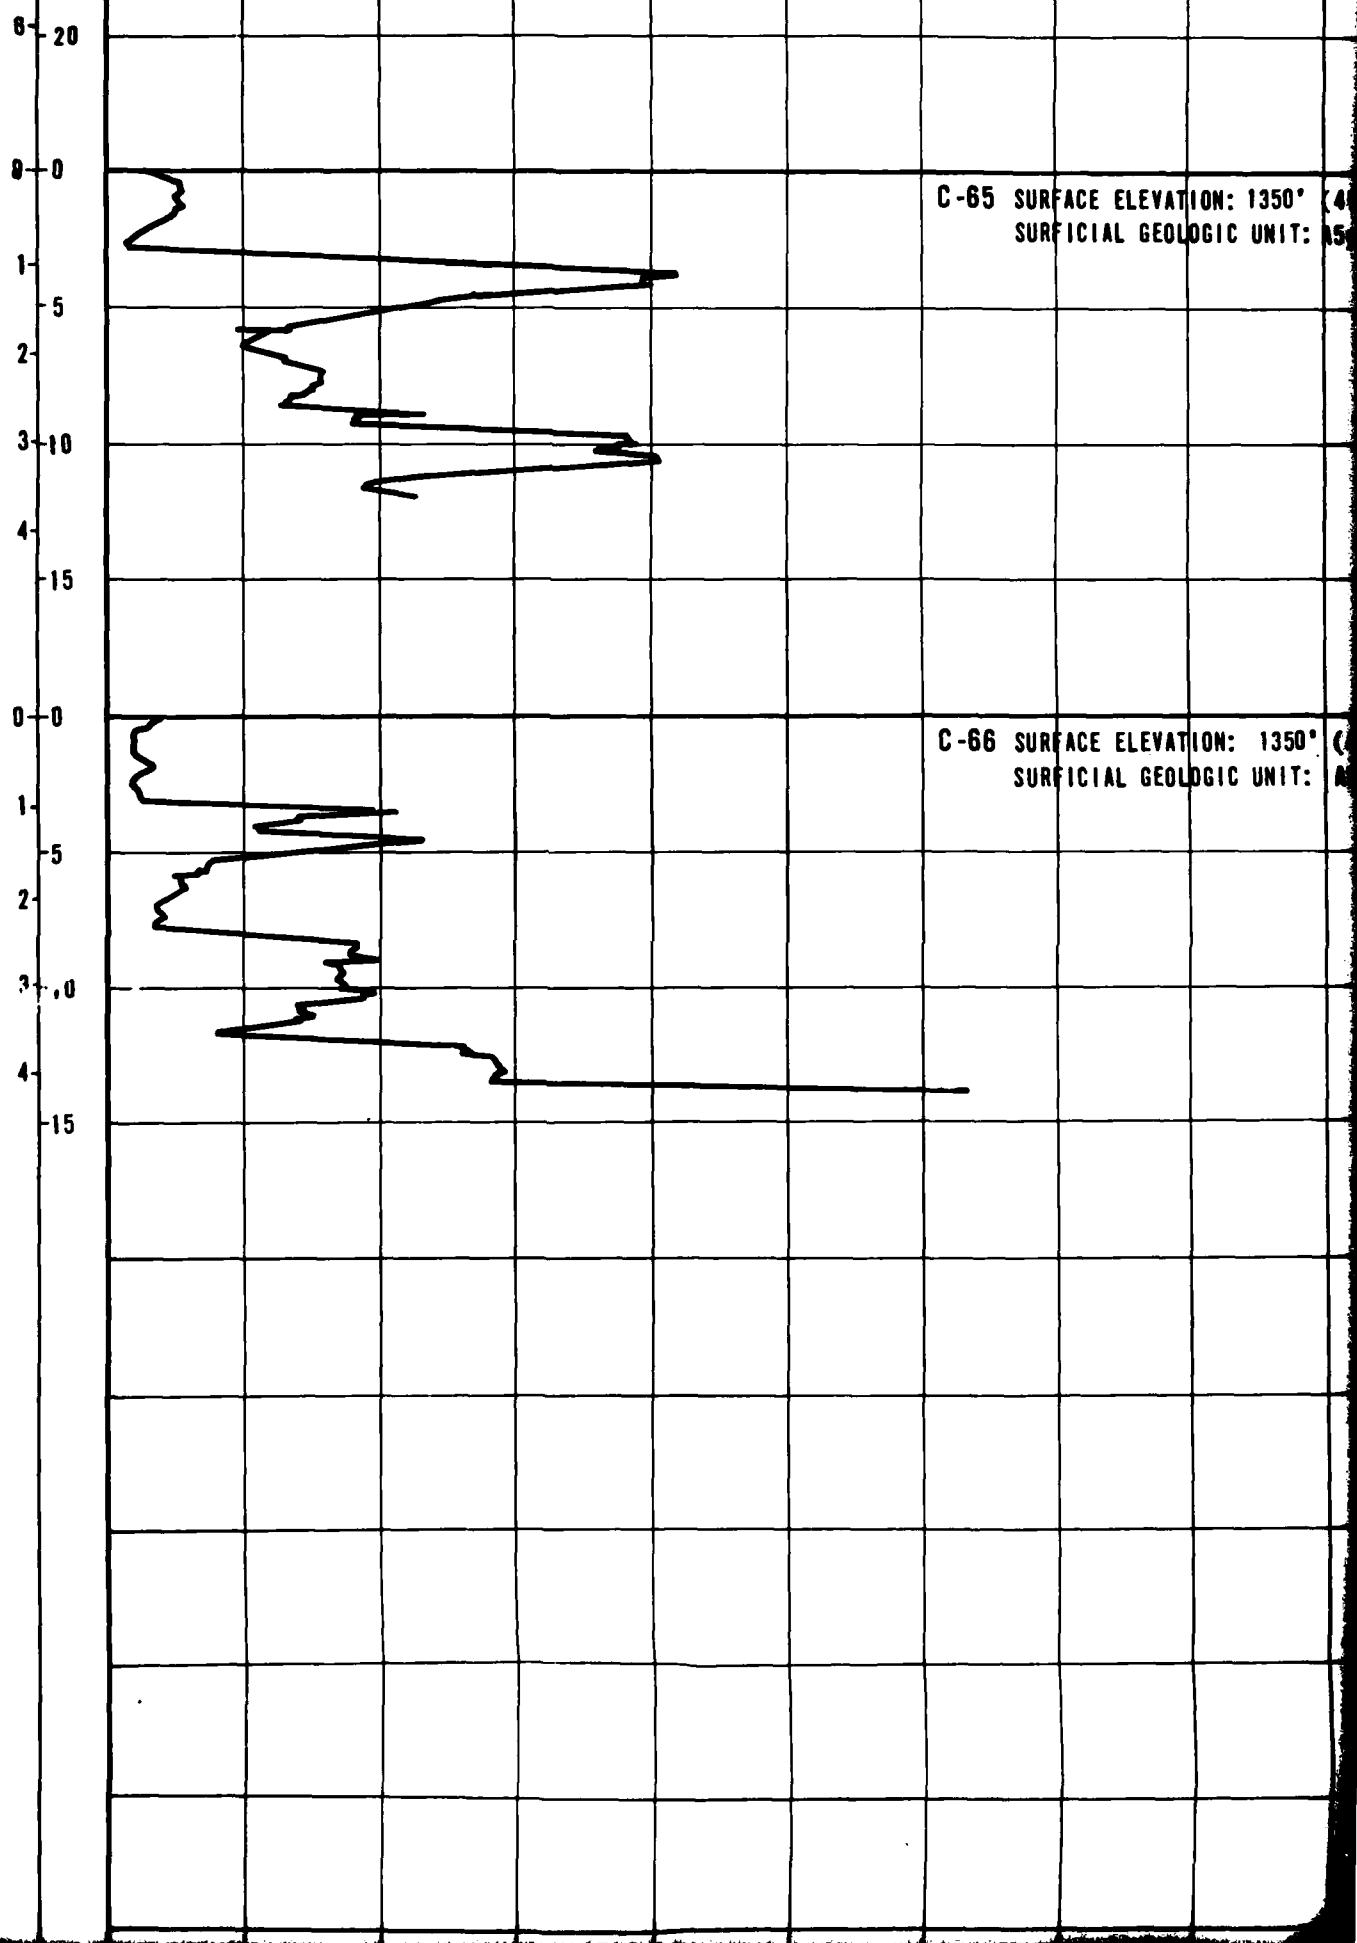

6

GE ELEVATION: 1350' (411m)  
SIAL GEOLOGIC UNIT: A5ys

SM


P-1

SM

CS-66

GE ELEVATION: 1350' (411m)  
SIAL GEOLOGIC UNIT: A5ys


7

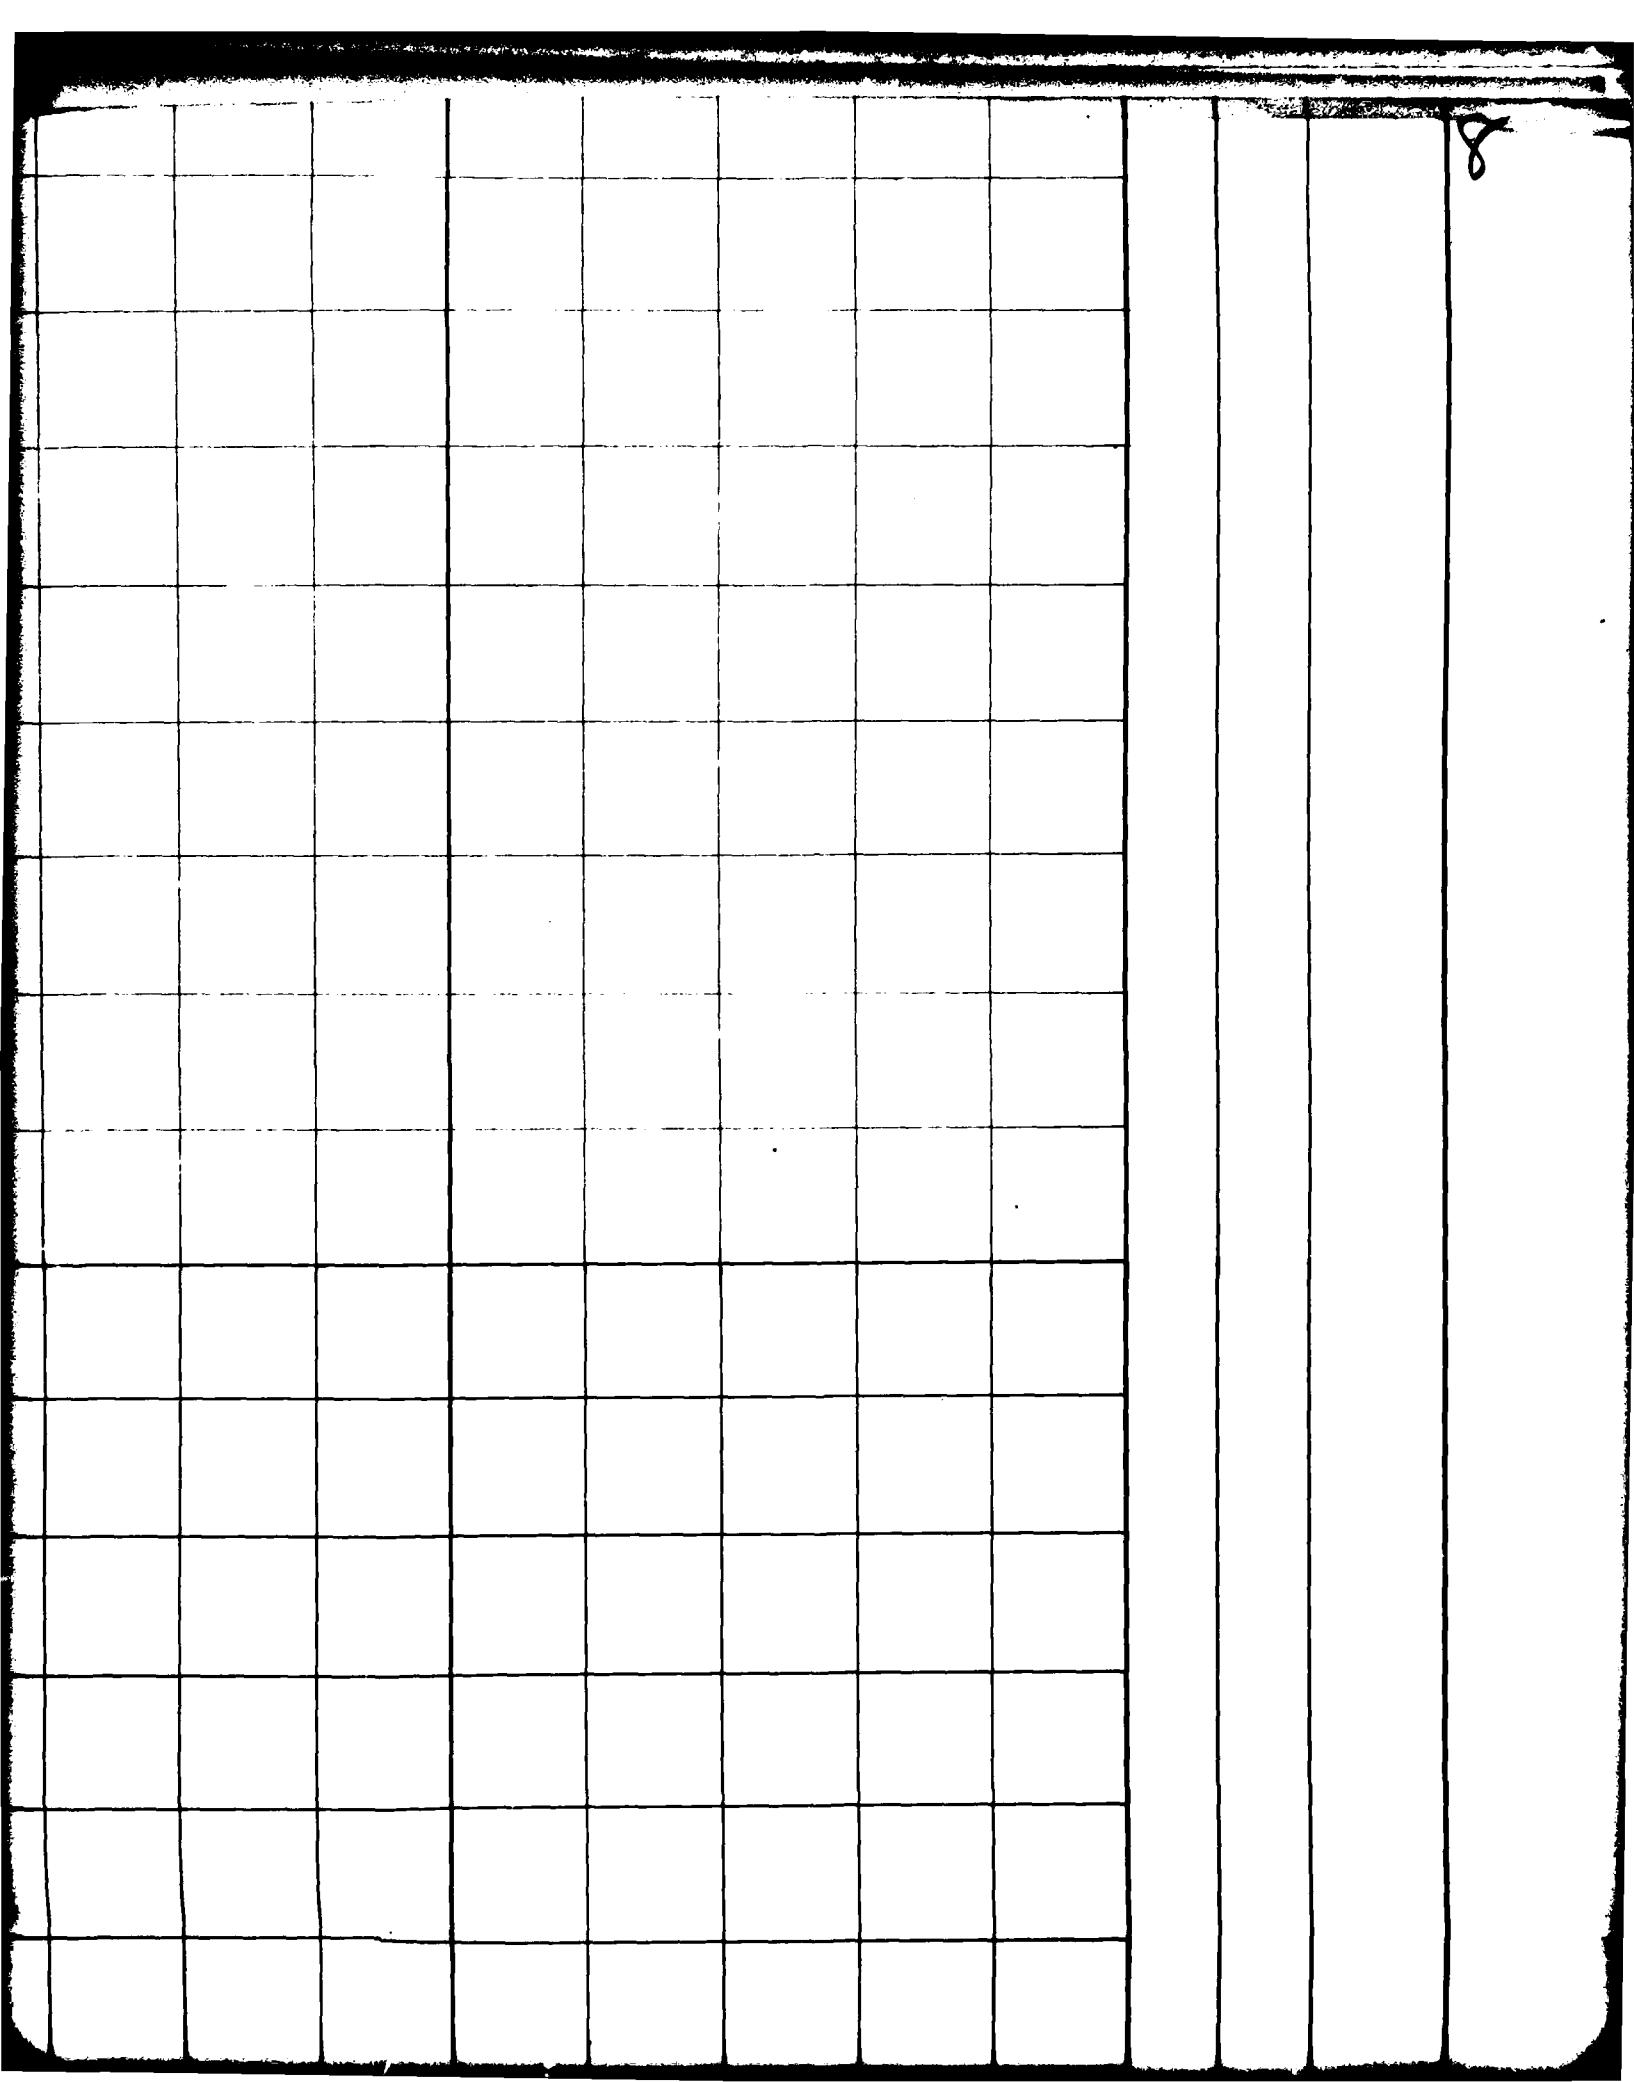

9

APPROVED BY \_\_\_\_\_

CERTIFIED BY \_\_\_\_\_

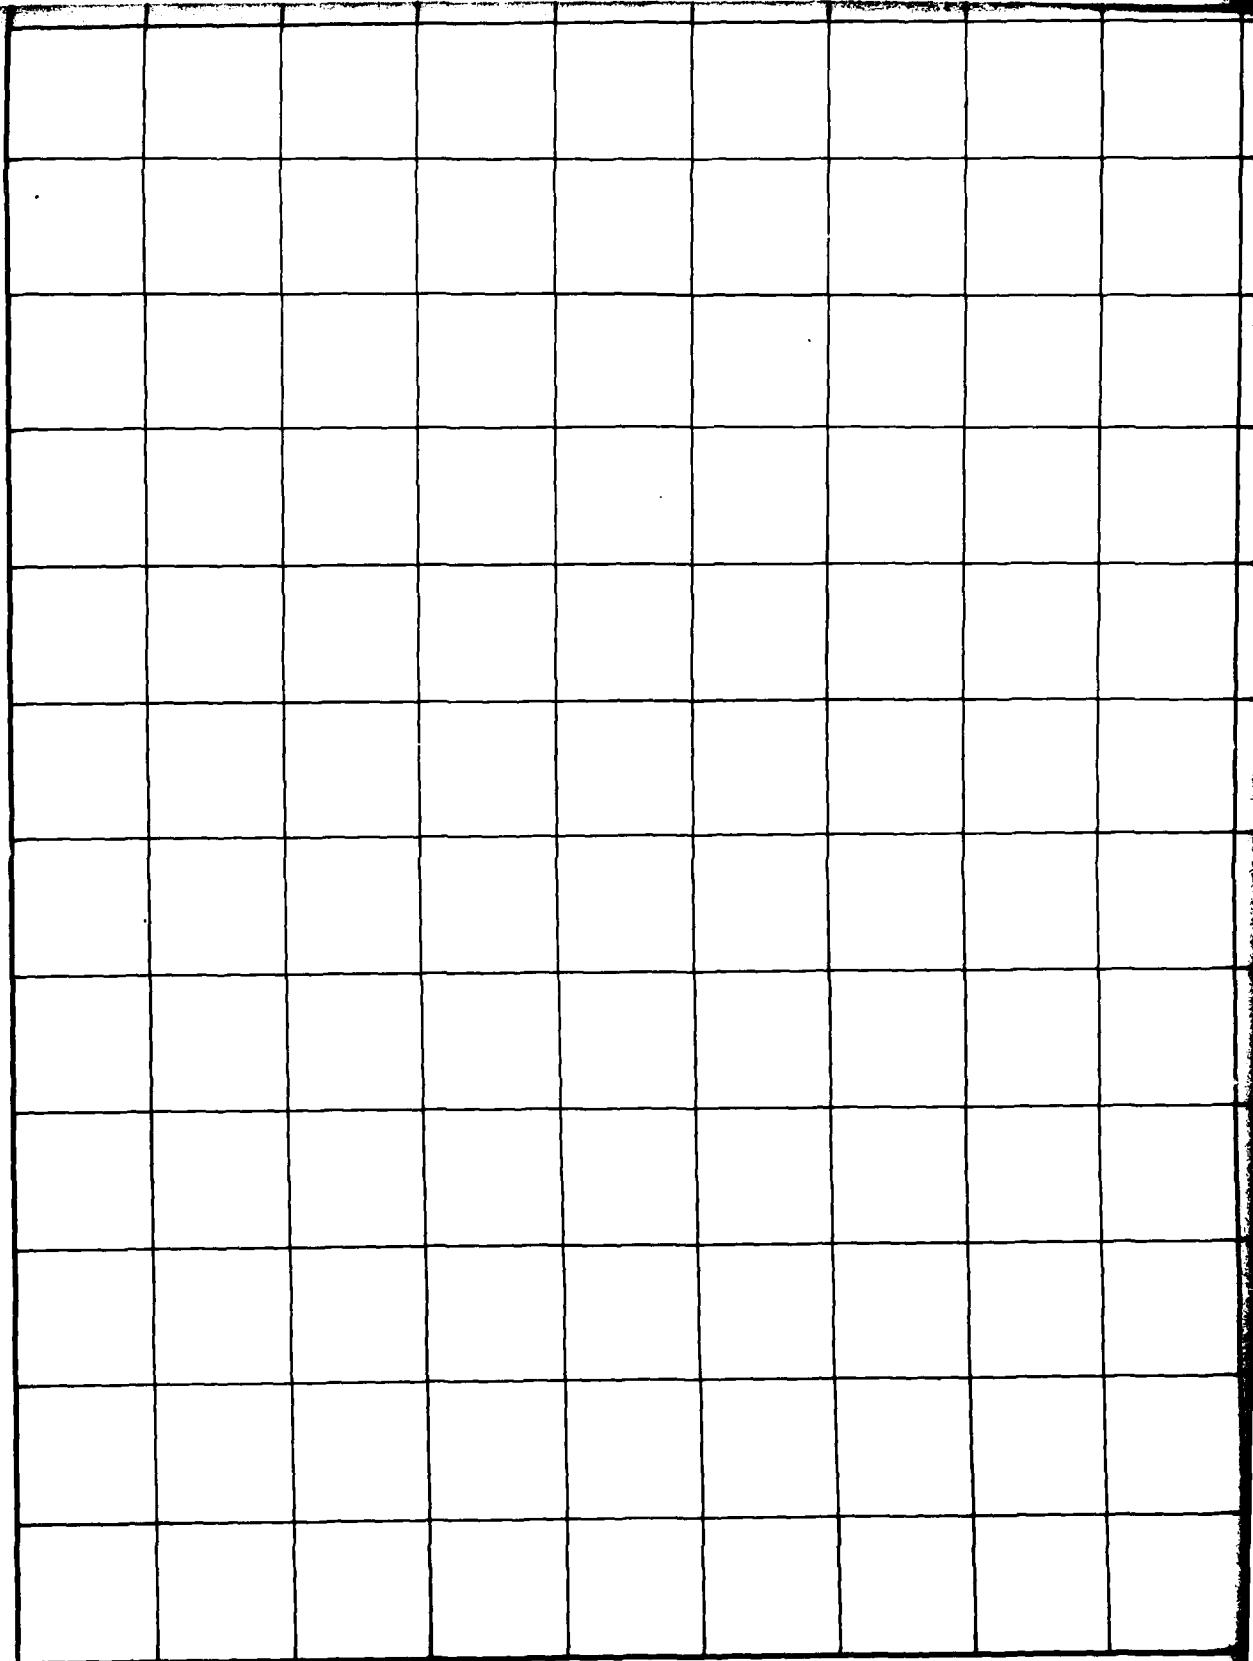

0      100      200      300      400      500      600      700      800  
0      100      200      300      400      500      600      700      800

10 AUG 79

10

800      900      (tsf)  
800      900      ( $\text{kg}/\text{cm}^2$ )


0      100      200      300      400      500  
0      100      200      300      400      500

11

600 700 800 900 (tsf)  
600 700 800 900 ( $\text{kg}/\text{cm}^2$ )

10 8 6 4  
10 8 6 4

12

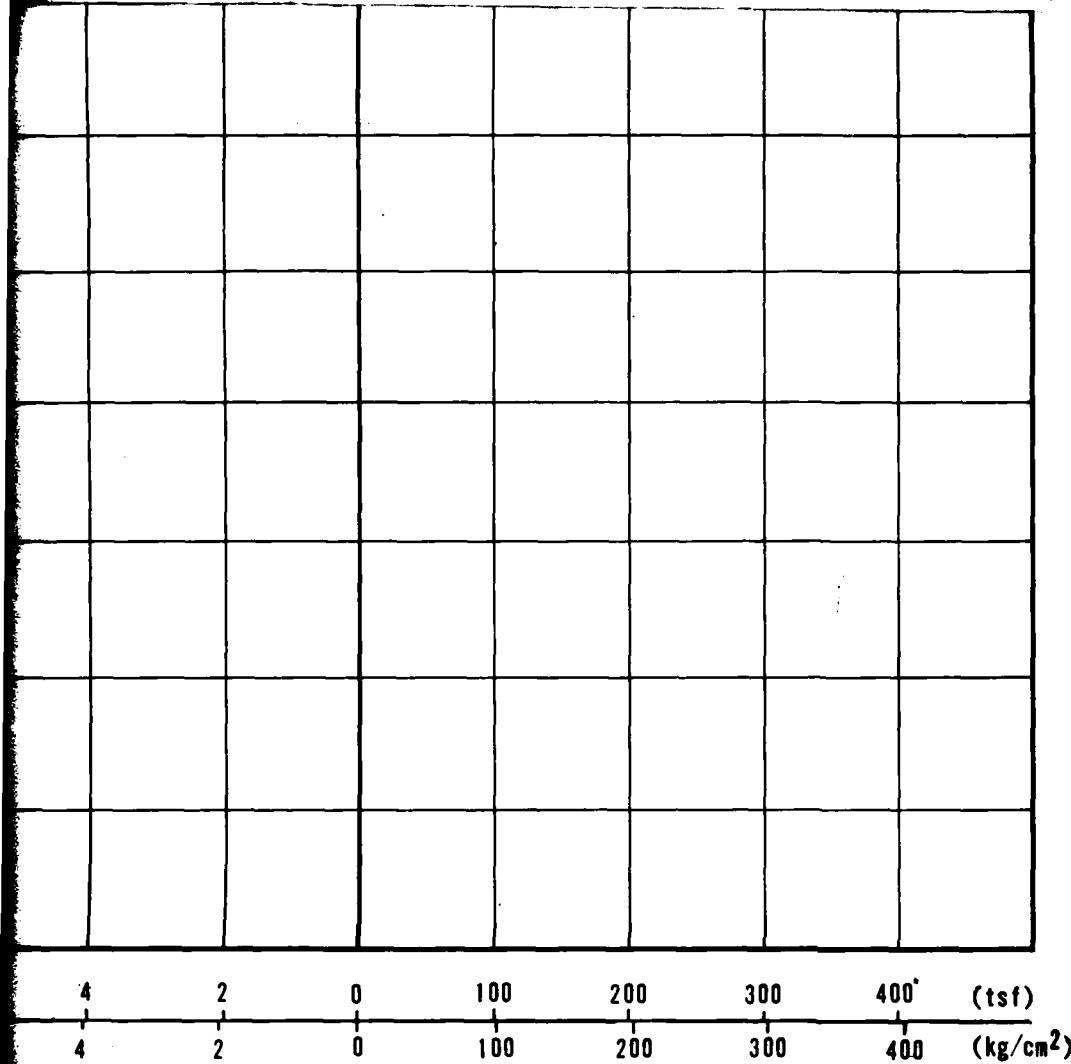

CONE PENETROMETER TEST RESULTS  
VERIFICATION SITE  
BUTLER CDP, ARIZONA

MX SITING INVESTIGATION  
DEPARTMENT OF THE AIR FORCE - SAMSO

DRAWING  
2  
3 OF 3

**FUGRO NATIONAL, INC.**