

AD-A113 648

COASTAL ENGINEERING RESEARCH CENTER FORT BELVOIR VA
IRREGULAR WAVE RUNUP ON SMOOTH SLOPES.(U)
DEC 81 J P AHRENS
CERC-CETA-81-17

F/6 8/3

UNCLASSIFIED

NL

1 of 1
DDA
DTIC

END
DATE
FILMED
5-82
DTIC

12

CETA 81-17


AD A113648

Irregular Wave Runup on Smooth Slopes

by
John P. Ahrens

COASTAL ENGINEERING TECHNICAL AID NO. 81-17

DECEMBER 1981

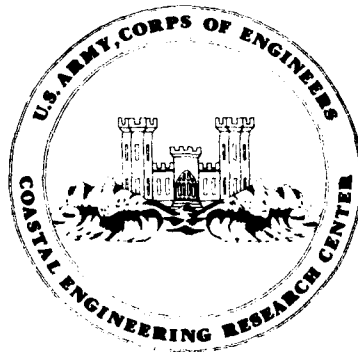

Approved for public release;
distribution unlimited.

U.S. ARMY, CORPS OF ENGINEERS
COASTAL ENGINEERING
RESEARCH CENTER

Kingman Building
Fort Belvoir, Va. 22060

DTIC
ELECTE
APR 20 1982

S

D

E

DTIC FILE COPY

Reprint or republication of any of this material shall give appropriate credit to the U.S. Army Coastal Engineering Research Center.

Limited free distribution within the United States of single copies of this publication has been made by this Center. Additional copies are available from:

*National Technical Information Service
ATTN: Operations Division
5285 Port Royal Road
Springfield, Virginia 22161*

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER CETA 81-17	2. GOVT ACCESSION NO. 40 1113 1/8	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) IRREGULAR WAVE RUNUP ON SMOOTH SLOPES		5. TYPE OF REPORT & PERIOD COVERED Coastal Engineering Technical Aid	
		6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) John P. Ahrens		8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of the Army Coastal Engineering Research Center (CERRE-CS) Kingman Building, Fort Belvoir, Virginia 22060		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS D31229	
11. CONTROLLING OFFICE NAME AND ADDRESS Department of the Army Coastal Engineering Research Center Kingman Building, Fort Belvoir, Virginia 22060		12. REPORT DATE December 1981	
		13. NUMBER OF PAGES 26	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Irregular waves Smooth plane slopes Wave rundown Wave runup			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) → The results of several laboratory studies have been used to develop a method to estimate the wave runup and rundown on plane, smooth slopes caused by irregular wave action. Curves and equations are presented which can be used to compute the 2-percent runup, significant runup, mean runup, and approximate lower limit of rundown. A procedure is suggested for adapting the smooth-slope results to wave runup on rough and porous slopes. Example problems illustrate the use of the material presented.			

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 68 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)


PREFACE

This report presents a method for estimating the magnitude and distribution of wave runup and rundown on plane, smooth slopes caused by irregular wave action. Within the method's range of applicability it supersedes Section 7.212, "Irregular Waves," of the Shore Protection Manual (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1977); CETA 77-2 "Prediction of Irregular Wave Runup" by John P. Ahrens; and CETA 78-2 "Revised Wave Runup Curves for Smooth Slopes" by Philip N. Stoa. It also supersedes the parts of CETA 79-1 "Wave Runup on Rough Slopes," by Philip N. Stoa, which estimate wave runup on rough and porous slopes by adjusting the runup for similar wave conditions on smooth slopes using a rough-slope correction factor.

This report was prepared by John P. Ahrens, Oceanographer, under the general supervision of Dr. R.M. Sorensen, Chief, Coastal Processes and Structures Branch, Research Division.

Comments on this publication are invited.

Approved for publication in accordance with Public Law 166, 79th Congress, approved 31 July 1945, as supplemented by Public Law 172, 88th Congress, approved 7 November 1963.


TED E. BISHOP
Colonel, Corps of Engineers
Commander and Director



Accession For	
NTIS	<input checked="" type="checkbox"/>
DTIC	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
By _____	
Distribution _____	
Availability Codes	
Dist	Special
A	

CONTENTS

	Page
CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI)	5
SYMBOLS AND DEFINITIONS	6
I INTRODUCTION	7
II IRREGULAR WAVE RUNUP ON PLANE, SMOOTH SLOPES	7
III IRREGULAR WAVE RUNDOWN	13
IV APPLICATION OF RESULTS TO ROUGH AND POROUS SLOPES	14
V EXAMPLE PROBLEMS	15
VI SUMMARY	18
LITERATURE CITED	19
 APPENDIX	
A RUNUP SCALE-EFFECT CORRECTION FACTOR, k , FOR SMOOTH SLOPES .	21
B RUNUP REDUCTION FACTOR, r , FOR VARIOUS TYPES OF ROUGH AND POROUS STRUCTURES	22
C RUNUP SCALE CORRECTION FACTOR, k , FOR VARIOUS TYPES OF ROUGH AND POROUS STRUCTURES	26

TABLES

1 Regression coefficients for runup parameters R_2/H_S , R_S/H_S , and \bar{R}/H_S	11
2 Values of the runup parameters for example problem 1.	16

FIGURES

1 Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 1, $d_S/H_S > 3$	8
2 Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 1.5, $d_S/H_S > 3$	9
3 Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 2, $d_S/H_S > 3$	9
4 Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 2.5, $d_S/H_S > 3$	10
5 Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 3, $d_S/H_S > 3$	10
6 Irregular wave runup parameters versus wave steepness for a plane, smooth slope 1 on 4, $d_S/H_S > 3$	11
7 R_S/H_S versus the surf parameter for $3 < d_S/H_S$	13
8 R_{d98}/H_S versus the surf parameter	14

CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI) UNITS OF MEASUREMENT

U.S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	by	To obtain
inches	25.4	millimeters
	2.54	centimeters
square inches	6.452	square centimeters
cubic inches	16.39	cubic centimeters
feet	30.48	centimeters
	0.3048	meters
square feet	0.0929	square meters
cubic feet	0.0283	cubic meters
yards	0.9144	meters
square yards	0.836	square meters
cubic yards	0.7646	cubic meters
miles	1.6093	kilometers
square miles	259.0	hectares
knots	1.852	kilometers per hour
acres	0.4047	hectares
foot-pounds	1.3558	newton meters
millibars	1.0197×10^{-3}	kilograms per square centimeter
ounces	28.35	grams
pounds	453.6	grams
	0.4536	kilograms
ton, long	1.0160	metric tons
ton, short	0.9072	metric tons
degrees (angle)	0.01745	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins ¹

¹To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use formula: $C = (5/9) (F - 32)$.

To obtain Kelvin (K) readings, use formula: $K = (5/9) (F - 32) + 273.15$.

SYMBOLS AND DEFINITIONS

d_s	water depth at the toe of the slope or structure on which runup occurs
g	acceleration of gravity, 32.2 feet per second squared
H_s	significant wave height at the toe of the structure
k	runup correction factor for scale effects
L_0	deepwater wavelength, $L_0 = gT_p^2/2\pi$
\bar{R}	mean runup
R_s	significant runup, i.e., average runup of the highest one-third of wave runups
R_2	2-percent runup, i.e., elevation above the stillwater level exceeded by 2 percent of the runups
Rd_{98}	98-percent rundown, i.e., depth below the stillwater level that is just greater than 98 percent of the rundowns
r	rough-slope runup correction factor, ratio of rough-slope runup to smooth-slope runup, all other conditions the same
T_p	period of peak energy density of the wave spectrum
T_s	significant wave period, i.e., average period of the highest one-third of waves
θ	angle formed between the slope of the structure and the horizontal
ξ	surf parameter, $\xi = [(H_s/L_0)^{1/2} \cot \theta]^{-1}$

IRREGULAR WAVE RUNUP ON SMOOTH SLOPES

by
John P. Ahrens

I. INTRODUCTION

This report provides guidance on the magnitude and distribution of wave runup and rundown elevations caused by irregular wave conditions similar to those occurring in nature. The results presented are for plane, smooth structures with relatively deep water at the toe of the structure. For these conditions this report supersedes earlier guidance in Section 7.212 of the Shore Protection Manual (SPM) (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1977) and Ahrens (1977) which indicate that irregular wave runup has a Rayleigh distribution. Within the range of test conditions this report also supersedes Stoa (1978a) and the parts of Stoa (1979) which estimate wave runup on rough and porous slopes by adjusting the runup on a smooth slope by a correction factor. The range of test conditions covered in this report is discussed in the next section.

II. IRREGULAR WAVE RUNUP ON PLANE, SMOOTH SLOPES

Three sources of data were used in establishing the methods presented in this report: van Oorschot and d'Angremond (1968), Kamphuis and Mohamed (1978), and Ahrens (1979) which discussed data recently collected at the Coastal Engineering Research Center (CERC). The conditions considered are a structure with a plane, smooth slope fronted by a horizontal bottom offshore. The water depth at the toe of the structure is relatively deep, i.e., $3 \leq d_s/H_s \leq 12$, where d_s is the water depth and H_s the significant wave height at the toe of the structure. When there is relatively deep water at the toe of the structure the offshore slope of the bottom has little influence on the wave conditions and therefore little influence on the wave runups. This lack of influence indicates that the runup results presented can be applied to situations where there is an offshore slope. Since the water depth also has little influence on wave runup for conditions when $d_s/H_0' > 8$ (Stoa, 1978a), where H_0' is the deep-water, unrefracted wave height, Stoa's finding suggests that the results of this study should be good for $d_s/H_s > 12$.

Three runup parameters were chosen to characterize the runup distribution caused by irregular wave conditions, i.e., the mean runup, \bar{R} , the significant runup, R_s , and the 2-percent runup, R_2 . The significant runup is the average runup of the highest one-third of wave runups and the 2-percent runup is the elevation exceeded by 2 percent of the wave runups.

Figure 1 shows trend-line curves for R_2/H_s , R_s/H_s , and \bar{R}/H_s for a plane, smooth slope of 1 on 1. These parameters are plotted as a function of the irregular wave steepness parameter, H_s/gT_p^2 , where T_p is the period of peak energy density of the wave spectrum and g the acceleration of gravity. The approximate relationship between T_p and the average period of the significant waves, T_s , is given by Goda (1974) as

$$T_p = 1.05 T_s \quad (1)$$

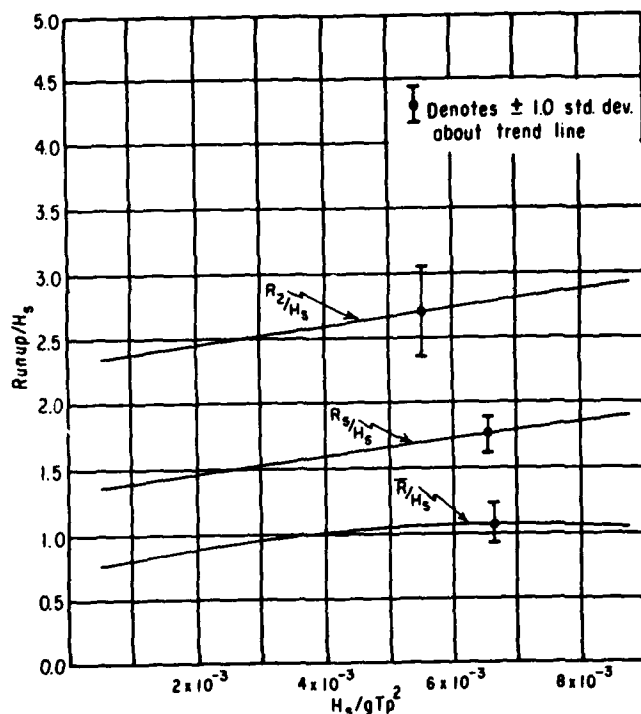


Figure 1. Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 1, $d_s/H_s > 3$.

Figures 2, 3, 4, 5, and 6, which are similar to Figure 1, show trend lines for slopes of 1 on 1.5, 1 on 2, 1 on 2.5, 1 on 3, and 1 on 4, respectively. The trend lines in Figures 1 to 5 are all of the general form

$$\frac{R_x}{H_s} = C_1 + C_2 \frac{H_s}{gT_p^2} + C_3 \left(\frac{H_s}{gT_p^2} \right)^2 \quad (2)$$

where R_x represents R_2 , R_s , or \bar{R} , and C_1 , C_2 , and C_3 are dimensionless regression coefficients. In some cases C_2 or C_3 is zero; if C_3 is zero the trend line is straight.

Since a calculator or a computer may be more convenient for calculating the runup parameters than using the figures, Table 1 provides a tabulation of the regression coefficients, along with some statistical parameters which can be used to evaluate how well the curves fit the data. The standard deviation is the standard deviation of the data about the trend-line curves and is shown in Figures 1 to 6 to give an indication of the magnitude of the scatter about the curves. The coefficient of variation is the standard deviation divided by the mean value of R_x/H_s . Using the coefficient of variation to determine the percent scatter indicates that R_s/H_s can usually be estimated within the range of ± 5 to 10 percent about the trend-line curves; R_2/H_s and \bar{R}/H_s can be estimated within the range of ± 10 to 15 percent about the curves.

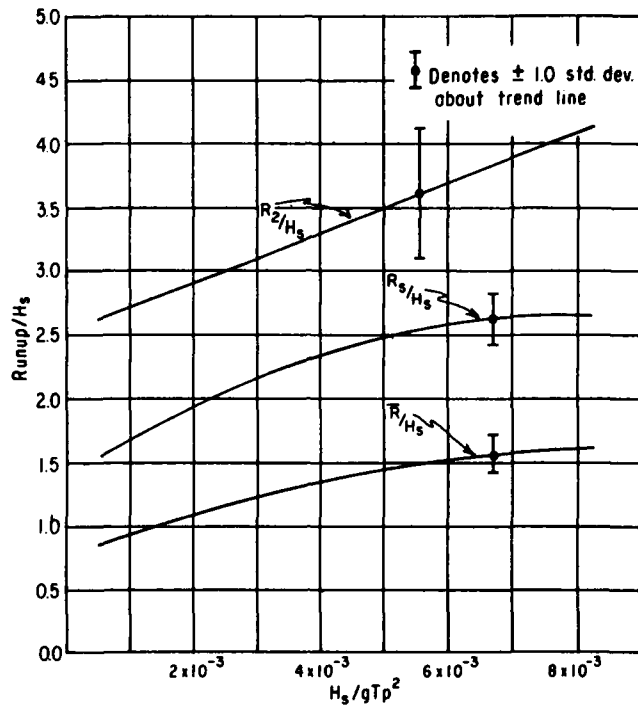


Figure 2. Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 1.5, $d_s/H_s > 3$.

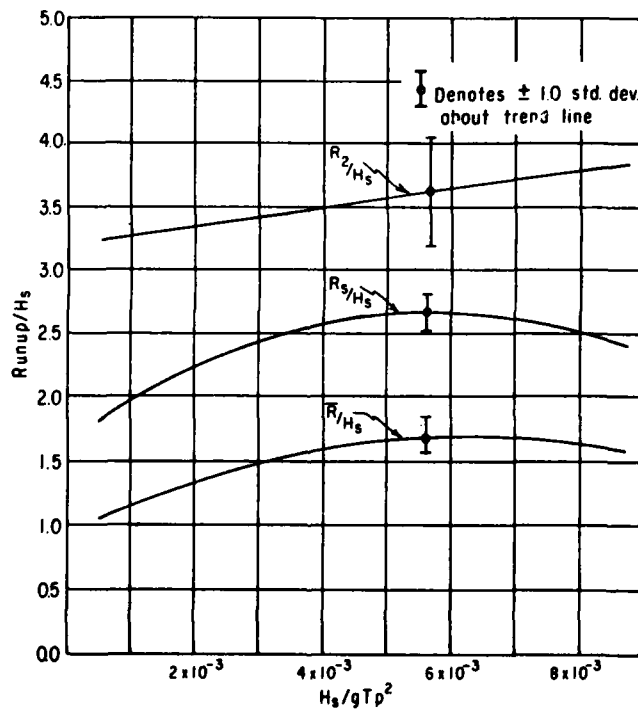


Figure 3. Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 2, $d_s/H_s > 3$.

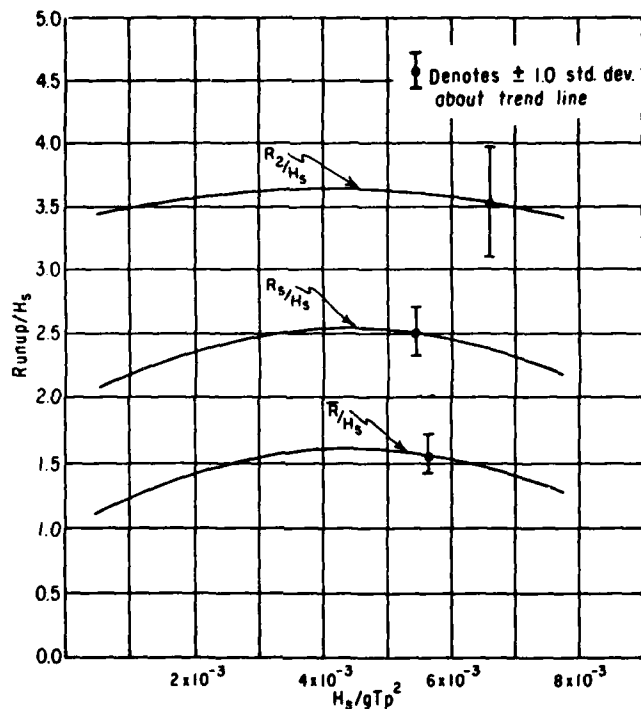


Figure 4. Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 2.5, $d_s/H_s > 3$.

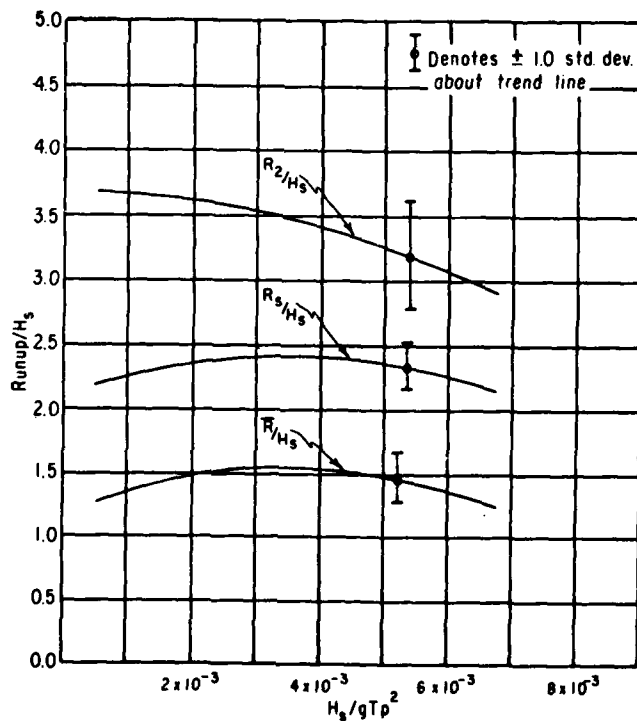


Figure 5. Irregular wave runup parameters versus wave steepness for a plane, smooth slope of 1 on 3, $d_s/H_s > 3$.

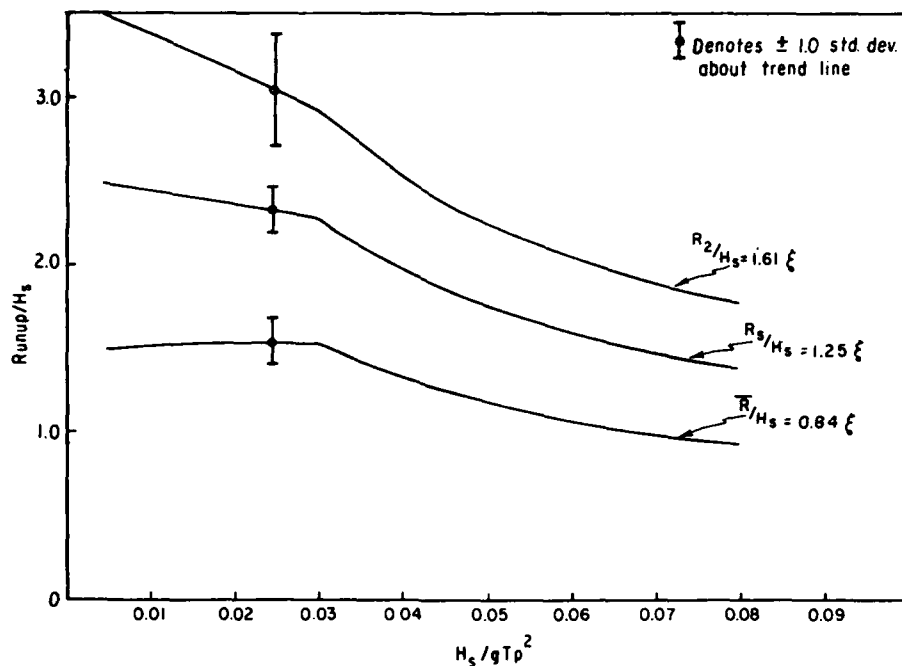


Figure 6. Irregular wave runup parameters versus wave steepness for a plane, smooth slope 1 on 4, $d_s/H_s > 3$.

Table 1. Regression coefficients for runup parameters R_2/H_s , R_s/H_s , and \bar{R}/H_s (see eq. 2).

Cot θ	Regression coefficients			Std. dev.	Coeff. of variation
	C_1	C_2	C_3		
R_2/H_s					
1.0	2.32	7.15×10^1	0	0.343	0.134
1.5	2.52	1.95×10^2	0	0.487	0.156
2.0	3.21	7.19×10^1	0	0.421	0.123
2.5	3.39	1.29×10^2	-1.61×10^4	0.420	0.118
3.0	3.70	0	-1.70×10^4	0.415	0.120
4.0	3.60	-2.22×10^2	0	0.330	0.117
R_s/H_s					
1.0	1.34	6.61×10^1	0	0.133	0.085
1.5	1.38	3.18×10^2	-1.97×10^4	0.195	0.094
2.0	1.64	3.57×10^2	-3.09×10^4	0.136	0.059
2.5	1.94	2.79×10^2	-3.21×10^4	0.184	0.078
3.0	2.11	1.87×10^2	-2.67×10^4	0.190	0.081
4.0	2.52	-7.94×10^1	0	0.122	0.053
\bar{R}/H_s					
1.0	0.71	1.10×10^2	-8.07×10^3	0.150	0.157
1.5	0.75	1.97×10^2	-1.14×10^4	0.143	0.119
2.0	0.93	2.42×10^2	-1.93×10^4	0.142	0.101
2.5	1.00	2.78×10^2	-3.13×10^4	0.141	0.099
3.0	1.19	2.09×10^2	-2.96×10^4	0.181	0.123
4.0	1.47	7.25×10^1	-1.70×10^4	0.127	0.085

Figure 6, for a slope of 1 on 4, is somewhat different than Figures 1 to 5 for steeper slopes. Plunging waves become the dominant breaker type on the 1 on 4 slope, indicating that wave runup can be predicted using a type of formula suggested by Hunt (1959) and used by van Oorschot and d'Angremond (1968). Figure 6 shows trend-line curves, using equation (2), for the less steep wave conditions, i.e.,

$$0.005 \leq \frac{H_s}{gT_p^2} \leq 0.003$$

and a Hunt-type formula is used for the steeper wave conditions, i.e., $H_s/gT_p^2 > 0.003$ where plunging waves dominate. The Hunt-type formulas for Figure 6 are given by the equations

$$\frac{R_2}{H_s} = 1.61 \xi \quad (3)$$

$$\frac{R_s}{H_s} = 1.25 \xi \quad (4)$$

$$\frac{\bar{R}}{H_s} = 0.84 \xi \quad (5)$$

where the surf parameter, ξ , is given by

$$\xi = \frac{1}{(H_s/L_0)^{1/2} \cot \theta} \text{ or } \frac{\tan \theta}{(H_s/L_0)^{1/2}}$$

L_0 is the deepwater wavelength given by

$$L_0 = \frac{gT_p^2}{2\pi}$$

and $\cot \theta$ is the cotangent of the angle θ between the structure slope and the horizontal.

Figure 7 provides a different perspective and additional insight on the trends to be expected for irregular wave runup. The R_s/H_s curves from Figures 1 to 6 have been transferred to Figure 7 and plotted versus the surf parameter, ξ , to show the influence of breaker characteristics on runup. When $\xi \leq 2.0$, most of the larger waves in the incident wave train plunge directly on the structure and R_s/H_s decreases with increasing H_s/gT_p^2 and increasing $\cot \theta$. This plunging wave region is where a Hunt-type formula (Hunt, 1959) such as equations (3), (4), and (5) is valid. When $\xi \geq 3.5$, no waves plunge on the structure indicating a standing wave condition or surging wave region. The influence of H_s/gT_p^2 and $\cot \theta$ on R_s/H_s is reversed for surging waves as

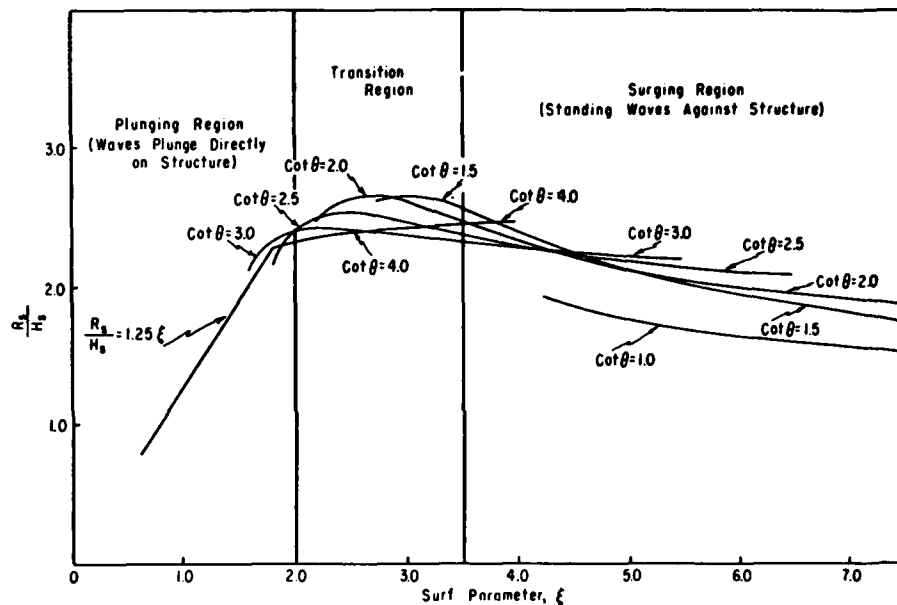


Figure 7. R_s/H_s versus the surf parameter for $d_s/H_s > 3$.

compared to plunging waves; i.e., R_s/H_s increases as H_s/gT_p^2 increases and $\cot \theta$ increases. The reversal of influence creates a transition region, $2.0 < \xi < 3.5$, where there is little net influence of H_s/gT_p^2 and $\cot \theta$ on R_s/H_s . It is in this transition region that the largest values of R_s/H_s occur, probably because the most nonlinear surging waves occur in this region. Figure 7 identifies these regions and shows the runup trends. Equations (3), (4), and (5) can be used on slopes flatter than 1 on 4 as long as plunging waves predominate, i.e., $\xi \leq 2.0$.

All the results in this report were obtained in relatively small-scale laboratory studies and must be corrected for scale effects (Stoa, 1978a). The correction for scale effects of wave runup on smooth slopes can be found in Stoa (1978b) (shown in App. A). Example problem 1 in Section V illustrates the method of applying this correction.

The results in Figures 1 to 7 are all presented in terms of the significant wave height at the toe of the structure, H_s , rather than the deepwater, unrefracted wave height, H_0' . If it is desired to convert the results of this study to deepwater conditions, H_s should be multiplied by the shoaling coefficient, given in Appendix C of the SPM (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1977), calculated using d_s and T_p to obtain an estimate of the deepwater, unrefracted significant wave height.

III. IRREGULAR WAVE RUNDOWN

Irregular wave rundown is characterized by the 98 percentile rundown, Rd_{98} , i.e., the rundown depth below the stillwater level which is greater than 98 percent of the wave rundowns. The irregular wave rundown parameter, Rd_{98} is analogous to the runup parameter, R_2 , since only 2 percent of the rundowns are lower than Rd_{98} . Figure 8 shows the trend of the relative rundown, Rd_{98}/H_s as a function of the surf parameter, ξ , and the approximate upper

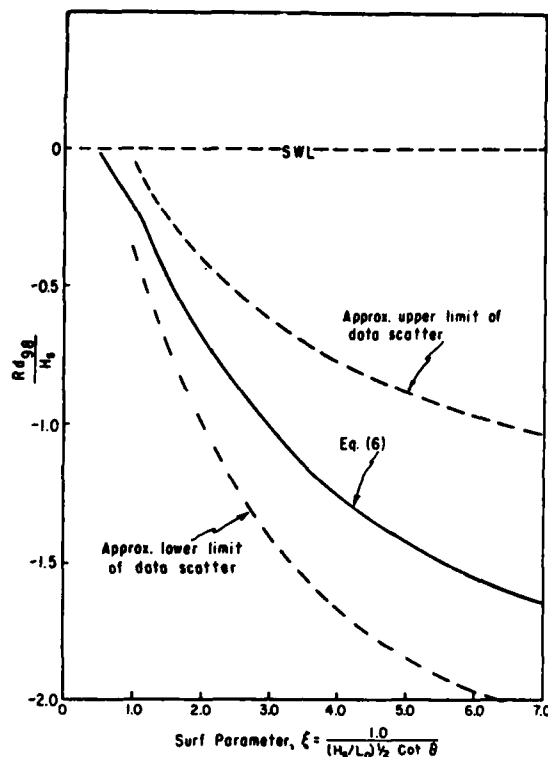


Figure 8. Rd_{98}/H_s versus the surf parameter.

and lower limits of data scatter about the trend-line curve. The trend-line curve for relative rundown is given by the equation

$$\frac{Rd_{98}}{H_s} = -2.32e^{-2.46/\xi} \quad (6)$$

The absolute value of relative rundown is small for small values of the surf parameter since the plunging waves which dominate these conditions cause considerable wave setup. As the surf parameter increases a standing wave develops against the structure and the relative rundown approaches -1.75, although values occasionally as low as -2.25 were observed. Equation (6) provides a simple way to estimate the approximate lower limit of rundown.

There is no scale-effect correction factor specifically developed for wave rundown, so it is recommended that the correction factor for wave runup be applied to rundown as illustrated in example problem 2 in Section V.

IV. APPLICATION OF RESULTS TO ROUGH AND POROUS SLOPES

The results given in this report can be applied to plane, rough- and porous-slope structures, if there is relatively deep water at the toe of the structure (as discussed previously in Sec. II). To apply these results it is necessary to have a reliable estimate of the rough-slope runup correction factor, r , which is the ratio of wave runup on a rough or porous slope to the

runup on a smooth slope, all other conditions being the same (Stoa, 1978a). Normally, r is determined in laboratory experiments using monochromatic wave conditions but it appears that r factors determined in this manner can also be applied to irregular wave conditions (Battjes, 1974). Values of r for various types of rough and porous slopes are given by Stoa (1979) (shown in App. B).

Often wave runup on rough slopes must be corrected for scale effects and the correction factors are given in Stoa (1979) (shown in App. C). Example problem 3 illustrates how the results presented in this report can be applied to a rough and porous slope and the method of applying the rough-slope scale-effect correction factor.

V. EXAMPLE PROBLEMS

***** EXAMPLE PROBLEM 1 *****

This example illustrates the use of the runup equation, Figures 1 to 6, and the recommended method of interpolation between slopes.

GIVEN: A plane, smooth slope of 1 on 2.75 is subjected to irregular wave action. The significant wave height, significant wave period, and water depth at the toe of the structure are 6.0 feet (1.83 meters), 7.0 seconds, and 24.0 feet (7.3 meters), respectively.

FIND: \bar{R} , R_S , and R_2 for the given conditions. Would there be substantial wave overtopping if the freeboard of the structure were 20.0 feet (6.10 meters)?

SOLUTION: Since there is no figure or set of coefficients for the runup equation (eq. 2) for a slope of 1 on 2.75 it is necessary to compute R , R_S , and R_2 for slopes of 1 on 2.50 and 1 on 3.00 and interpolate between them. To start, calculate the period of peak (maximum) energy density, T_p , using equation (1).

$$T_p = 1.05 T_S = 1.05 (7.0) = 7.35 \text{ seconds}$$

Then compute the steepness parameter, H_S/gT_p^2

$$\frac{H_S}{gT_p^2} = \frac{6.0}{32.2(7.35)^2} = 0.00345$$

Using the above value of steepness in equation (2) with the coefficient given in Table 1 allows the computation of R_x/H_S . For example, to calculate R_2/H_S for a 1 on 2.5 slope

$$\frac{R_2}{H_S} = 3.39 + [129.0(0.00345)] + [-16,100(0.00345)^2] = 3.64$$

The above value of R_2/H_S can be confirmed, using Figure 4. Therefore,

$$R_2 = 3.64(H_S) = 3.64(6.0) = 21.8 \text{ feet (6.64 meters)}$$

The other runup parameters R_S and \bar{R} can be calculated in a similar manner, then used for interpolation to give the values of the runup parameters for the 1 on 2.75 slope as shown in Table 2.

Table 2. Values of the runup parameters for example problem 1.

$\cot \theta$	R_2/H_S	R_2 (ft)	R_S/H_S	R_S (ft)	\bar{R}/H_S	\bar{R} (ft)
2.50	3.64	21.8	2.52	15.1	1.58	9.5
3.00	3.49	21.0	2.43	14.6	1.56	9.4
2.75	--	21.4 ¹	--	14.9 ¹	--	9.4 ¹

¹Interpolated value.

The interpolated values in Table 2 should be corrected for scale effects to yield the required answer. The scale correction factor for a slope of 1 on 2.75 is 1.125 (see App. A); therefore,

$$R_2 = 21.4 (1.125) = 24.1 \text{ feet (7.35 meters)}$$

$$R_S = 14.9 (1.125) = 16.8 \text{ feet (5.12 meters)}$$

$$\bar{R} = 9.4 (1.125) = 10.6 \text{ feet (3.28 meters)}$$

A freeboard of 20.0 feet falls between R_2 and R_S , so the structure crest would not be overtopped frequently, probably by less than 10 percent of the waves. It is, therefore, expected that the volume of overtopping would not be great.

It is difficult to determine how high a smooth structure would have to be to prevent all wave overtopping but a reasonable estimate would be

$$R_{\max} \approx R_2 + H_S$$

where R_{\max} is the elevation of the maximum runup.

***** EXAMPLE PROBLEM 2 *****

This example illustrates how to calculate the approximate lower limit of rundown.

GIVEN: A plane, smooth 1 on 2.50 slope is subjected to irregular wave action. The significant wave height, significant wave period, and water depth at the toe of the structure are 7.0 feet (2.13 meters), 8.0 seconds, and 30.0 feet (9.14 meters), respectively.

FIND: R_{d98} for the above conditions; this is the approximate lower limit of wave rundown.

SOLUTION: The period of peak energy density is

$$T_p = 1.05(T_S) = 1.05 \times 8.0 = 8.40 \text{ seconds}$$

and the surf parameter is

$$\xi = \frac{1}{(H_S/L_0)^{1/2} \cot \theta} = \frac{1}{\{7.0/[32.2 \times (8.4)^2]/2\pi\}(2.5)} = 2.87$$

Using this value of ξ in equation (6) gives the relative rundown, i.e.,

$$\frac{Rd_{98}}{H_s} = -2.32e^{-2.46/\xi} = -0.99$$

which can be confirmed in Figure 8. Then

$$Rd_{98} = (7.0)(-0.99) = -6.9 \text{ feet } (-2.10 \text{ meters})$$

and using Appendix A to correct this rundown for scale effects gives

$$Rd_{98} \text{ (corrected)} = -6.9(1.128) = -7.8 \text{ feet } (-2.38 \text{ meters})$$

The same scale correction factor used for runup is used for rundown.

***** EXAMPLE PROBLEM 3 *****

This example illustrates how the results of tests with irregular waves on smooth slopes can be applied to situations where the structure is rough and porous.

GIVEN: A rubble-mound breakwater is to be built with a slope on the seaward face of 1 on 2 which will be overtopped by wave action only occasionally under the design conditions. The design conditions include a significant wave height, significant wave period, and water depth at the toe of the structure of 15.0 feet (4.57 meters), 12.0 seconds, and 45.0 feet (13.72 meters), respectively. The core of the breakwater will be slightly above the design water level, i.e., a high core breakwater.

FIND: The height at which the breakwater will only occasionally be overtopped during the design conditions.

SOLUTION: The period of peak energy density is

$$T_p = 1.05(T_s) = 1.05(12.0) = 12.6 \text{ seconds}$$

and the steepness parameter is

$$\frac{H_s}{gT_p^2} = \frac{15.0}{32.2(12.6)^2} = 0.00293$$

Using equation (2) with the coefficients in Table 1 for a plane, smooth slope of 1 on 2 and R_2H_s gives

$$\frac{R_2}{H_s} = 3.2083 + 71.879(0.00293) = 3.42$$

(this value can be checked in Fig. 3) and

$$R_2 = 3.42(15.0) = 51.3 \text{ feet } (15.64 \text{ meters})$$

The runup reduction factor, r , for rubble-mound breakwaters with high cores is 0.52 (see App. B) and the scale-effect correction factor is 1.06 (see App. C) so R_2 for the breakwater is

$$R_2 \text{ (breakwater)} = 51.3(0.52) 1.06 = 28.3 \text{ feet (8.63 meters)}$$

R_s and \bar{R} are found in a similar manner to be

$$R_s \text{ (breakwater)} = 20.0 \text{ feet (6.10 meters)}$$

$$\bar{R} \text{ (breakwater)} = 12.2 \text{ feet (3.72 meters)}$$

These calculations indicate that if the freeboard were 28.3 feet only 2 percent of the waves with a $H_s = 15$ feet and $T_s = 12$ seconds spectrum would overtop the structure while a freeboard of 12.2 feet would allow about half the waves to overtop. A freeboard equal to R_s , i.e., 20 feet, will satisfy the condition of only occasional wave overtopping since about 13 percent of the waves would be expected to overtop the breakwater.

VI. SUMMARY


Equations and curves are presented for computing three runup parameters and one rundown parameter for plane, smooth slopes exposed to irregular wave conditions where $d_s/H_s > 3$. These parameters are R_2 , the elevation exceeded by only 2 percent of the runups; R_s , the average runup of the highest one-third of the wave runups; R , the mean runup of all the runups; and Rd_{98} , the depth below the stillwater level which is just greater than 98 percent of the rundown. Example problem 1 illustrates the use of equation (2) in computing the rundowns, parameters, and the method of interpolation for runup on slopes not specifically covered in this report. Example problem 2 illustrates the method of computing rundown. Example 3 illustrates how the study results for smooth slopes can be applied to rough and porous slopes, in this case to compute the desired freeboard for a rubble-mound breakwater.

LITERATURE CITED

- AHRENS, J.P., "Prediction of Irregular Wave Runup," CETA 77-2, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., July 1977.
- AHRENS, J.P., "Irregular Wave Runup," *Proceedings of the Conference on Coastal Structures '79*, American Society of Civil Engineers, Vol. II, 1979, pp. 998-1019.
- BATTJES, J.A., "Wave Runup and Overtopping," Technical Advisory Committee on Protection Against Inundation, Rijkswaterstaat, The Hague, Netherlands, 1974.
- GODA, U., "Estimation of Wave Statistics from Spectral Information," *Proceedings of the Symposium on Ocean Wave Measurement and Analysis*, Vol. I, 1974, pp. 320-337.
- HUNT, I.A., "Design of Seawalls and Breakwaters," *Journal of the Waterways and Harbors Division*, Vol. 85, No. WW3, Sept. 1959, pp. 123-152.
- KAMPHUIS, J.W., and MOHAMED, N., "Runup on Irregular Waves on Plane, Smooth Slope," *Journal of the Waterway, Port, Coastal, and Ocean Division*, Vol. 104, No. WW2, May 1978.
- STOA, P.N., "Reanalysis of Wave Runup on Structures and Beaches," TP 78-2, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Mar. 1978a.
- STOA, P.N., "Revised Wave Runup Curves for Smooth Slopes," CETA 78-2, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., July 1978b.
- STOA, P.N., "Wave Runup on Rough Slopes," CETA 79-1, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., July 1979.
- U.S. ARMY, CORPS OF ENGINEERS, COASTAL ENGINEERING RESEARCH CENTER, *Shore Protection Manual*, 3d ed., Vols. I, II, and III, Stock No. 008-022-00113-1, U.S. Government Printing Office, Washington, D.C., 1977, 1,262 pp.
- VAN OORSCHOT, J.H., and D'ANGREMOND, K., "The Effect of Wave Energy Spectra on Wave Runup," *Proceedings of the 11th Conference on Coastal Engineering*, American Society of Civil Engineers, 1968, pp. 888-900.

APPENDIX A

RUNUP SCALE-EFFECT CORRECTION FACTOR, k , FOR SMOOTH SLOPES (Stoa. 1978a)

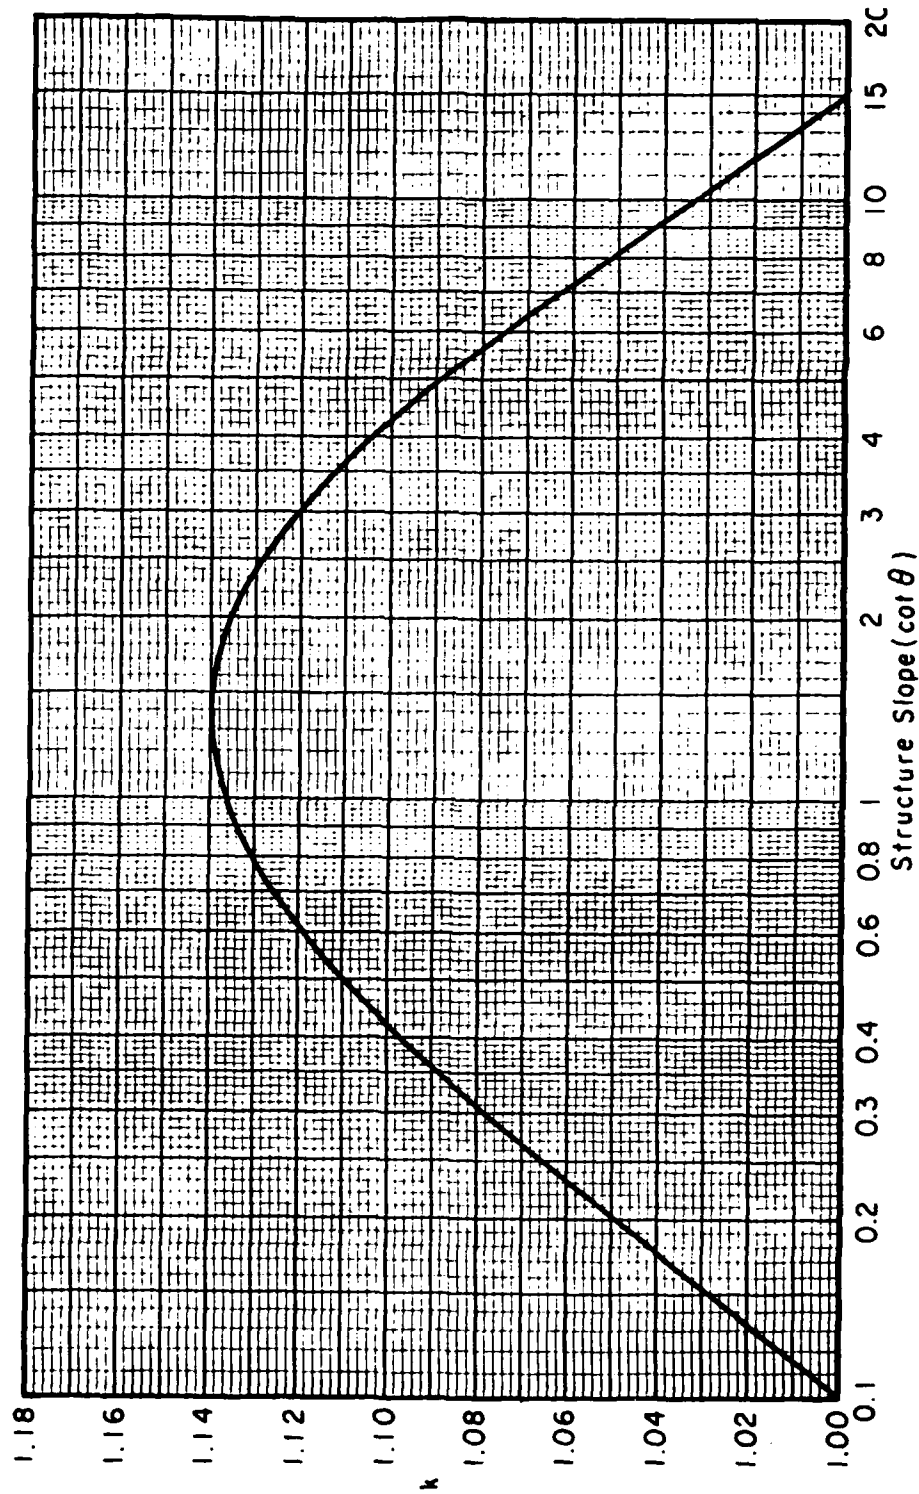


APPENDIX B

RUNUP REDUCTION FACTOR, r , FOR VARIOUS TYPES OF
ROUGH AND POROUS STRUCTURES (Stoa, 1979)

I. VALUE OF r FOR QUARRYSTONE RUBBLE-MOUND STRUCTURE (HIGH CORE)

$$r = 0.52$$

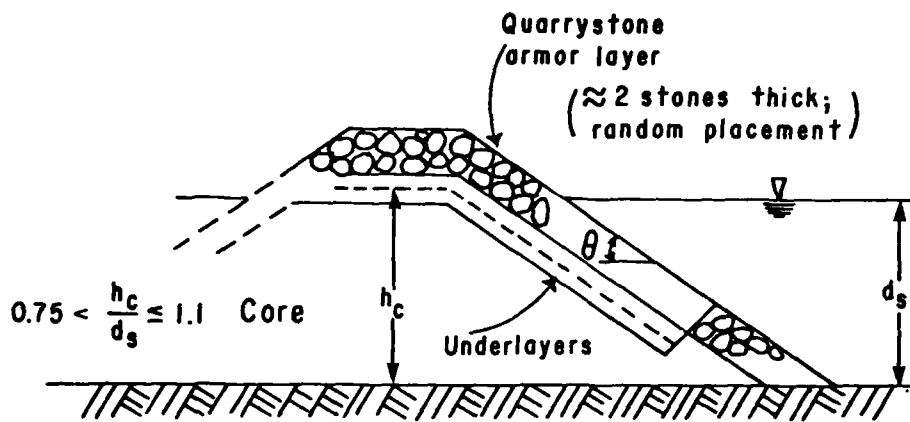


II. VALUES OF r FOR CONCRETE ARMOR UNITS

1. Embankment.

a. Gobi Blocks.

$$r \approx 0.93 \text{ for } H'_0/k_r \text{ or } H/k_r \approx 6$$

(use H'_0 when $d_g/H'_0 \geq 3$ and H when $d_g/H'_0 < 3$)

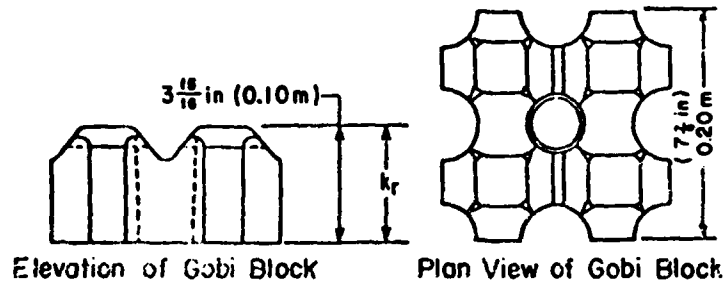

b. Stepped Slopes.





Values of r for stepped slopes.

Type of step	Slope (cot θ)	r^1
Vertical risers	1.5	0.75
	2.0	0.75
	3.0	0.70
Rounded edges	3.0	0.86

¹ $1 < H'_0/k_r \leq 12$ where k_r is the height of the riser.


2. Embankment and Rubble Mound.

Values of r for concrete armor units.

Armor unit and placement method	Length dimension, k_r	Armor-layer thickness (No. of units)	Values of r	Slopes (cot θ)
Tetrapod Random Uniform		2	0.45	1.3 to 3.0
		2	0.51	1.3 to 3.0
Quadripod Random Uniform		2	0.51	1.3 to 3.0
		2	0.51	1.3 to 3.0
Tribar Random Uniform		2	0.45	1.3 to 3.0
		1	0.50	1.3 to 3.0
Modified cube Random Uniform Uniform Uniform		2	0.48	1.3 to 3.0
		1	0.62	1.5
		1	0.73	2.0
		1	0.55	3.0

III. VALUES OF r FOR QUARRYSTONE EMBANKMENT

Slope (cot θ)	H/k_r	r
1.5	3 to 4	0.60
2.5	3 to 4	0.63
3.5	3 to 4	0.60
5.0	3	0.60
5.0	4	0.68
5.0	5	0.72

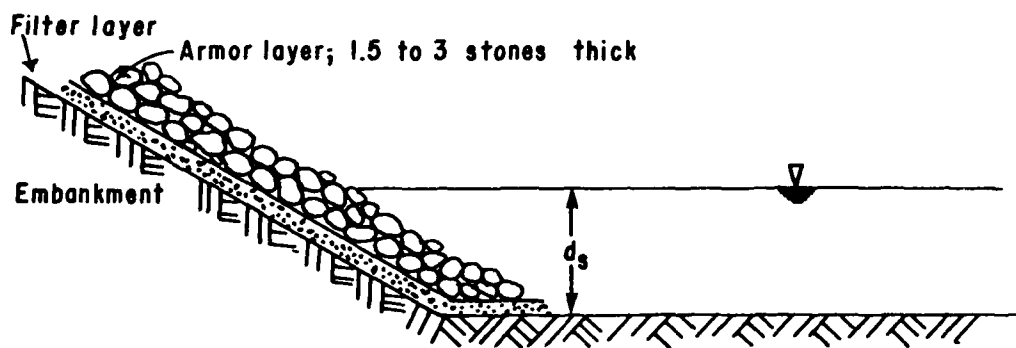

APPENDIX C

RUNUP SCALE CORRECTION FACTOR, k , FOR VARIOUS
TYPES OF ROUGH AND POROUS STRUCTURES (Stoa, 1979)

<u>Structure Type</u>	<u>k</u>
Quarrystone, rubble-mound breakwater	1.06
Quarrystone, riprap revetment	1.00
Concrete armor units, rubble mound or revetment	1.03

Ahrens, John P.
Irregular wave runup on smooth slopes / by John P. Ahrens.--Fort
Belvoir, Va. : U.S. Army Coastal Engineering Research Center ;
Springfield, Va. : available from NTIS, 1981.
[26] p. : ill. ; 28 cm.--(Coastal engineering technical aid ; no.
81-17)

Cover title.

"December 1981."

Bibliography: p. 19.

The results of several laboratory studies have been used to develop
a method to estimate the wave runup and rundown on plane, smooth
slopes caused by irregular wave action. Curves and equations are
presented which can be used to compute the 2-percent runup, signifi-
cant runup, mean runup, and approximate lower limit of rundown. A
procedure is suggested for adapting the smooth-slope results to wave
runup on rough and porous slopes. Example problems illustrate the
use of the material presented.

1. Wave runup. 2. Water waves. I. Title. II. Series.

TC203 no. 81-17 627

.U581ta

Ahrens, John P.
Irregular wave runup on smooth slopes / by John P. Ahrens.--Fort
Belvoir, Va. : U.S. Army Coastal Engineering Research Center ;
Springfield, Va. : available from NTIS, 1981.
[26] p. : ill. ; 28 cm.--(Coastal engineering technical aid ; no.
81-17)

Cover title.

"December 1981."

Bibliography: p. 19.

The results of several laboratory studies have been used to develop
a method to estimate the wave runup and rundown on plane, smooth
slopes caused by irregular wave action. Curves and equations are
presented which can be used to compute the 2-percent runup, signifi-
cant runup, mean runup, and approximate lower limit of rundown. A
procedure is suggested for adapting the smooth-slope results to wave
runup on rough and porous slopes. Example problems illustrate the
use of the material presented.

1. Wave runup. 2. Water waves. I. Title. II. Series.

TC203 no. 81-17 627

.U581ta

Ahrens, John P.
Irregular wave runup on smooth slopes / by John P. Ahrens.--Fort
Belvoir, Va. : U.S. Army Coastal Engineering Research Center ;
Springfield, Va. : available from NTIS, 1981.
[26] p. : ill. ; 28 cm.--(Coastal engineering technical aid ; no.
81-17)

Cover title.

"December 1981."

Bibliography: p. 19.

The results of several laboratory studies have been used to develop
a method to estimate the wave runup and rundown on plane, smooth
slopes caused by irregular wave action. Curves and equations are
presented which can be used to compute the 2-percent runup, signifi-
cant runup, mean runup, and approximate lower limit of rundown. A
procedure is suggested for adapting the smooth-slope results to wave
runup on rough and porous slopes. Example problems illustrate the
use of the material presented.

1. Wave runup. 2. Water waves. I. Title. II. Series.

TC203 no. 81-17 627

.U581ta

Ahrens, John P.
Irregular wave runup on smooth slopes / by John P. Ahrens.--Fort
Belvoir, Va. : U.S. Army Coastal Engineering Research Center ;
Springfield, Va. : available from NTIS, 1981.
[26] p. : ill. ; 28 cm.--(Coastal engineering technical aid ; no.
81-17)

Cover title.

"December 1981."

Bibliography: p. 19.

The results of several laboratory studies have been used to develop
a method to estimate the wave runup and rundown on plane, smooth
slopes caused by irregular wave action. Curves and equations are
presented which can be used to compute the 2-percent runup, signifi-
cant runup, mean runup, and approximate lower limit of rundown. A
procedure is suggested for adapting the smooth-slope results to wave
runup on rough and porous slopes. Example problems illustrate the
use of the material presented.

1. Wave runup. 2. Water waves. I. Title. II. Series.

TC203 no. 81-17 627

.U581ta