

MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS-1963-A

i.

RADC-TR-82-285 In-House Report November 1982



# FIBER OPTIC TRANCEIVER THERMAL ANALYSIS

Seymour F. Morris and Douglas J. Holzhauer



APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED

ROME AIR DEVELOPMENT CENTER
Air Force Systems Command
Griffiss Air Force Base, NY 13441

OTTE ELLE CORY

83 01 10 012

This report has been reviewed by the RADC Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.

PADC-IR-82-285 has been reviewed and is approved for publication.

APPROVED:

ANTHONY J. FEDUCCIA

Chief, Systems Reliability & Engineering Branch

Reliability & Compatibility Division

APPROVED:

EDMUND J. WESCOTT

Technical Director

Reliability & Compatibility Division

FOR THE COMMANDER: John P. Kleine

JOHN P. HUSS

Acting Chief, Plans Office

If your address has changed or if you wish to be removed from the RADC mailing list, or if the addressee is no longer employed by your organization, please notify RADC (RBES) Griffiss AFB NY 13441. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)

2. GOVT ACCESSION NO.  AD-A123532	BEFORE COMPLETING FORM  3. RECIPIENT'S CATALOG NUMBER		
Ah . Alz 2522			
<u> </u>			
	S. TYPE OF REPORT & PERIOD COVERED		
	In-House Report		
	6. PERFORMING ORG. REPORT NUMBER N/A		
	8. CONTRACT OR GRANT NUMBER(s)		
Seymour F. Morris Douglas J. Holzhauer			
)	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62702F 451921TK		
	12. REPORT DATE		
Rome Air Development Center (RBES) Griffiss AFB NY 13441			
			from Controlling Office)
Same			
,	)		

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

Same

18. SUPPLEMENTARY NOTES

None

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Reliability Thermal Analysis Computer Analysis

10. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report documents the thermal analysis done by the Systems Engineering Section in support of the in-house Air Support Operations Center (ASOC) Fiber Optic Remoting Project. The purpose of the ASOC project was to develop a fiber optic transceiver that would allow ASOC systems to replace the 26 pair metallic cable with the much lighter dual fiber optic cable. In support of this project, RBES used computer aided thermal analysis and laboratory thermal measurement to design and verify the thermal design of

DD 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE


UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Date Enter

#### UNCLASSIFIED

he	ASOC	experiment	al module.		• :	
						٠
		v		·		
		ession For				
		C 1/3				
	Jun	anoga sed Nistro ton.				
		tribution/				
	(	ailability    Avail ab	Codes			
	Dist	Special				
	H					
	_	ta Tan Bahayan en antana ayya <sup>l</sup> ayan, a				
DTI				 UNCLAS		

SECURITY CLASSIFICATION OF THIS PAGE(When Date Entered)

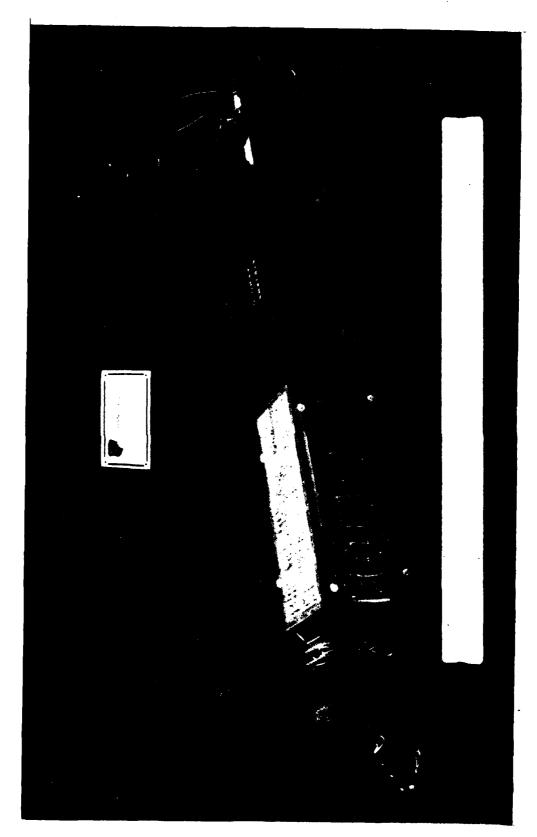

AOSC FIBER OPTIC TRANSCEIVER

#### **PREFACE**

This report describes the main portion of the mechanical engineering support furnished to the Air Support Operations Center (ASOC) Fiber Optic Remoting Project. The ASOC project was an RADC in-house program to design a tactical fiber optic communication link to replace the conventional metallic cables. The work that is reported here consists of the computer assisted thermal analysis and design and the laboratory temperature measurement of the electronics contained in the ASOC fiber optic transceiver. The thermal analysis was made by modeling the ASOC module and then using the Systems Improved Numerical Differencing Analyzer (SINDA) thermal analyzer computer program to calculate the component temperatures. The temperature measurement was made using thermocouples and a Hewlett Packard data acquisition system. In addition to the work that is reported here, a temperature measurement of the operating ASOC power supply and a reliability demonstration of the ASOC module were made in support of the ASOC project. The ASOC thermal design and laboratory measurement was performed between September 1980 and February 1982. Mr. Seymour Morris was employed by RADC under the Summer Engineering Aid Program during the summer of 1981. The authors also wish to acknowledge the work performed by Mr. John Carbone (RADC/RBE-1) on this project. This included a considerable amount of laboratory thermal measurement work as well as assistance in running the thermal model on the computer.

## TABLE OF CONTENTS

SECTION	TITLE	PAGE
I	Introduction	1
II	Cooling Methods	3
III	Analysis Methods	3
	1. Thermal Terms	3
	2. Kirchhoff's Laws for a Thermal Network	4
	3. Network Analysis	4
IV	Methods of Calculating Thermal Resistance	5
V	Calculating the Thermal Resistances	7
	1. Pulse Code Modulator (PCM)	7
	2. PCM Digital/Push to Talk	17
	3. Timing/Sequencer (T/S) Board	20
	4. Transmitter/Receiver (T/R) Board	21
	5. Power Supply	27
	6. Connector Board	31
	7. PCM Heat Sink to Chassis	33
	8. PCM Heat Sink	34
	9. Inner Chassis	35
	10. Case Exterior	39
IV	Computer Input and Results	43
VII	Thermal Measurement of the ASOC Module	62
VIII	Comparison of the Predicted and Measured Temperatures	63

## LIST OF FIGURES

NO.	TITLE	PAGE
1	ASOC Separation Distance	2
2a	Printed Circuit Board Nodes	8
2b	Inner Chassis Nodes	9
2c	Case Exterior Nodes	10
3	PCM Board	11
4	PCM Board Heat Sink - Cross Section	12
5	PCM Board Heat Sink	13
6	Circuit Board Locations	14
7	Key Node Locations	15
8	PCM/Push to Talk Heat Sinks	16
9	PCM Digital Board	18
10	PTT Converter	19
11	T/S Board Location	23
12	T/S Board	24
13	T/R Board	25
14	T/R Board Heat Sink	26
15	Power Supply Locations	30
16	Connector Board	22

## LIST OF TABLES


NO.	TITLE	PAGE
1	Source Data Summary	44
2	Thermal Resistances Summary	47
3	Computer Input	53
4	SINDA Results	60
5	Temperature Comparison	64

#### I INTRODUCTION

The Air Support Operations Centers (ASOC) deployed in support of the North Atlantic Treaty Organization (NATO) operate under a severe weight constraint in order to maintain a highly mobile posture. A continuing problem in this area is the weight and volume of the electrical cable that is required by the communication systems in the ASOCs. A fiber optic communication system is currently being developed at RADC to reduce the weight and volume of the system. Two electrical/optical transceivers connected by a dual fiber optic cable can directly replace the 26-pairmetallic cable that is presently being used for communications between stations. The new fiber optic system (Fig 1) will have the following advantages over the old system:

- a. A 75% reduction in weight and volume.
- b. Improved transmission performance.
- c. Longer lengths of cable on each reel, thus allowing for increased distances between stations which will increase survivability and improve operational flexibility.
- d. The elimination of ground loops, cross talk, electromagnetic interference, and electromagnetic pulse associated with the use of metallic conductors.

The trend in military electronic equipment has been to make systems as compact as possible for ease of installation and transportation. Compactness leads to high component density which, in turn, may lead to excessive component temperatures. Since inadequate cooling is a primary cause of poor reliability in military electronic equipment, a thermal analysis was performed on the ASOC transceiver unit to increase component reliability. Desired performance and reliability levels can only be accomplished if the electronic, thermal and mechanical designs are all well executed and carefully integrated. Because of a time limitation, these designs were not integrated sufficiently to achieve an optimized thermal design. The transceiver case dimensions were specified by ASOC early in the development stages so that existing connectors on the sides of the shelters could be used. Also the electronic design could not easily be changed to accommodate more efficient heat sinks.

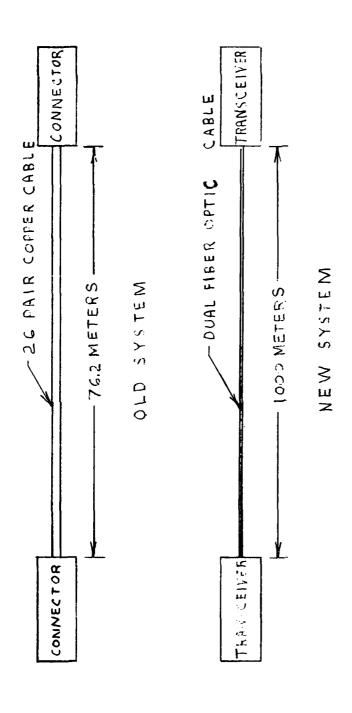

The new Fiber Optic System greatly increases the separation distance between transceivers with the use of thin plastic cable to carry light waves.

FIGURE 1 ASOC SEPARATION DISTANCE

#### II COOLING METHODS

Conduction and convection cooling are the two methods used to cool the ASOC transceiver unit.

Conduction cooling involves the transfer of kinetic energy from one molecule to another. Conductive heat transfer occurs in all solid materials and may also occur through air if the air space between the two surfaces is less than inch. But because of its high thermal resistance, the amount of heat transferred through air is very small. Conduction is the primary method used to transfer heat from the heat producing components to the outside of the transceiver case. This is usually accomplished by fastening a copper heat sink to the frame and then making a contact between the heat sink and the heat producing component.

Convection is the transfer of heat from the surface of a solid to a moving mass of fluid, either a gas or a liquid. This mode of heat transfer is brought about through a change of density of the air when it warms. The change of density makes the air rise and dissipates the heat. This is the method used to transfer heat from the transceiver case to the ambient air.

#### III ANALYSIS METHOD

#### 1. Thermal Terms

A thermal network has many similarities to an electrical one as listed below:

THERMAL	ELECTRICAL	THERMAL DEFINITION
Temperature	Voltage	The potential that causes heat
		to flow from hotter areas to
		cooler ones. (temperature difference)

Heat Flux	Electrical Current	The power	that an electrical
		component	dissipates.

Thermal Resistance Electrical Resistance The resistance to heat flow from one point to another.

Thermal Conductance

Electrical Conductance

The ability to conduct heat from one point to

another.

Ultimate Heat Sink

Ground

This is the ambient air around the transceiver unit.

#### 2. Kirchhoff's Laws for a Thermal Network

Kirchhoff's laws may be applied once a steady state condition has been reached in the thermal circuit. Kirchhoff's laws for a thermal circuit are:

- a. The sum of all the heat arriving at any junction in a circuit is equal to the sum of all the heat leaving that junction.
- b. Around any closed loop, the sum of the temperature rises is equal to the sum of the temperature drops.

When Kirchhoff's laws are applied to anything but the smallest of thermal circuits, the resulting simultaneous equations need to be solved with the aid of a computer.

#### 3. Network Analysis

The Systems Improved Numerical Differencing Analyzer (SINDA) is a computer program that is designed to handle lumped parameter thermal analysis problems that are represented in an electrical analogy. This program allows a maximum of 16,383 nodes to be defined in any single problem. Four types of data must be input to the program. They are the node, source and conductor data along with the initial temperatures of the nodes. The program will then apply Kirchhoff's laws from this data and solve the resulting equations for the node temperatures.

Node data consists of the node number, initial temperature of the node, and the type of node. Three node types are possible. Each node type is listed below along with its specific properties:

- (1) Diffusion Has thermal capacitance and can store energy.
- (2) Arithmetic Has zero thermal capacitance.
- (3) Boundary Has a constant temperature.

The source data consists of the node number and heat output (wattage) of that node.

The conductor data input consists of an assigned conductor number, the node numbers that the conductor is connected to, and the conductance value for the conductor. The conductance value for a conductor is the reciprocal of the thermal resistance between the two nodes.

Node numbers are assigned any time there is a significant thermal resistance and a temperature difference between one location and another.

#### I۷ METHODS OF CALCULATING THERMAL RESISTANCE

There are three types of thermal resistances that occur in the ASOC transceiver unit. They are conductive, convective and contact resistance.

The equation used to calculate the thermal resistance (R) for conduction cooling is given by Equation 1. The units of resistance are watt

$$R = \frac{x}{KA}$$
 (Equation 1)

where:

x - is the length between nodes. (in)

- is the cross sectional area through which the heat is flowing. (in<sup>2</sup>)

K - is the thermal conductivity of the substance through which the heat is flowing. The units of thermal conductivity are watt.

Natural convection for vertical flat plates, as we have on the outside of the case, depends on the coefficient of heat transfer h. For natural convection, the variable  $h_{c}$  defines the thermal characteristics of the air film which clings to the plate and restricts the flow of heat from the plate to the ambient air. The empirical equation for calculating  $h_c$  is given by Equation 2, and the units of  $h_c$  are watt  $o_{C in}^2$ 

$$h_C = 1.062 \times 10^{-3} (T/L)^{0.25}$$
 (Equation 2) (Ref 1)

where: T - is the temperature difference ( $^{O}$ C) between the ambient air and the vertical flat plate.

L - is the vertical height of the flat plate measured in feet.

The equation used to calculate the thermal resistance for convection cooling is given by Equation 3.

$$R = \frac{1}{h_C A}$$
 (Equation 3)

where: A - is the surface area of the flat plate.  $(in^2)$ 

 ${\rm h_{C}}$  - is the coefficient of heat transfer. For natural convection, it is calculated using Equation 2. It has units of watts.

in<sup>20</sup>C

A third type of thermal resistance is contact resistance. This occurs when two materials are in direct contact with each other with no other substance such as thermal grease in between. Contact resistance is really a type of conduction resistance and is a function of the types of materials in contact, the contact pressure, and the contact area.

The equation used to calculate the thermal resistance for two materials in direct contact is given by Equation 4.

$$R = \frac{1}{h_C A}$$
 (Equation 4)

where: A - is the contact area.  $(in^2)$ 

h<sub>c</sub> - is the coefficient of heat transfer. For contact resistance, its value can be found in heat transfer handbooks. It has units of watt.

in<sup>20</sup>C

The temperature outputs from the SINDA Program were examined for temperatures that would exceed component specifications. If temperature specifications were exceeded, then a new heat sinking design was specified, and revised thermal conductance data was input into the SINDA Program. The program was then rerun and a new temperature profile was obtained.

After arbitrary node numbers were assigned to the points of interest, they were connected into a circuit with the thermal resistances inserted between them as shown in Fig 2a - 2c.

#### V CALCULATING THE THERMAL RESISTANCES

#### 1. PULSE CODE MODULATOR (PCM)

The three PCM boards mounted on the left side of the transceiver will be considered first (Fig 6). They each have eight Integrated Circuits (IC's) mounted on them as shown in Fig 3. The IC's that are assigned Node numbers 60-63 are taller than the IC's with Node numbers 64-67. For maximum heat transfer, all IC's should come in contact with the heat sink; however, because of manufacturing difficulties, the copper heat sink can only be made so it contacts the taller IC's and leaves an air gap between the smaller IC's as shown in Fig 4. The thermal resistance between the taller IC's (Nodes 60-63) and their heat sink (Node 121) is calculated using Equation 1.

The thermal resistance between Nodes 60-63 and Node 121 is:

$$R = \frac{x}{KA}$$

$$x = .02 in$$

$$K_{air} = .00075 \frac{watt}{in^{o}C}$$

$$A = 1.15$$
" x .48" = .55in<sup>2</sup>

$$R = \frac{.02}{.00075(.55)} = 48.49^{\circ}C$$
 watt

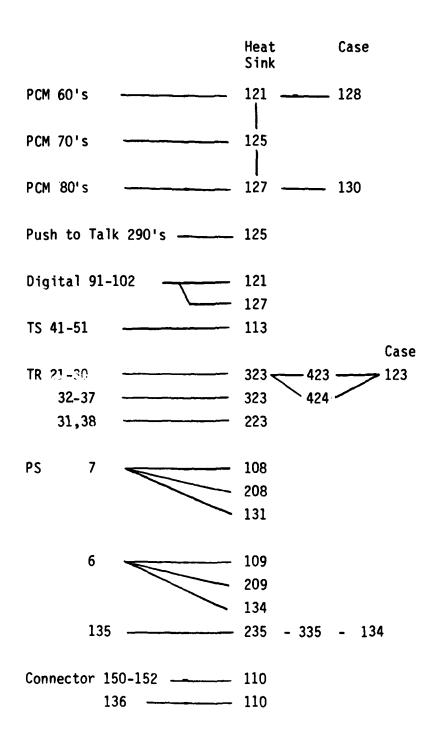


FIGURE 2a
PRINTED CIRCUIT BOARD NODES

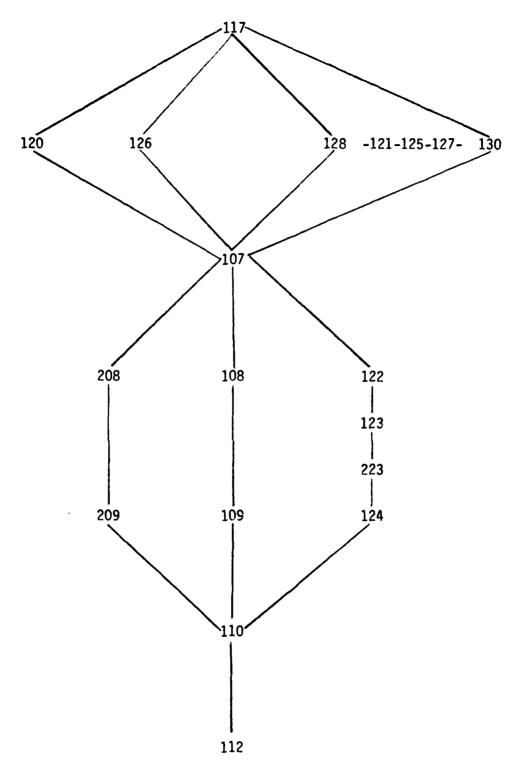


FIGURE 2b

INNER CHASSIS NODES

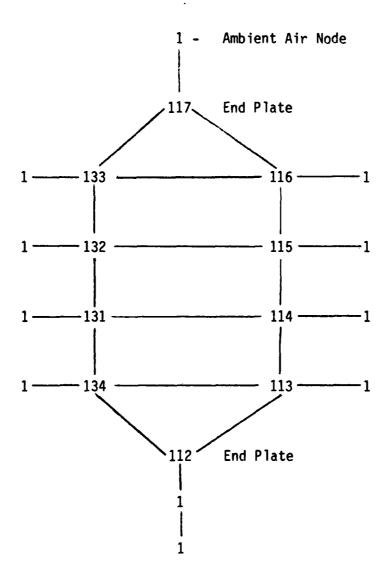


FIGURE 2c

CASE EXTERIOR NODES
10






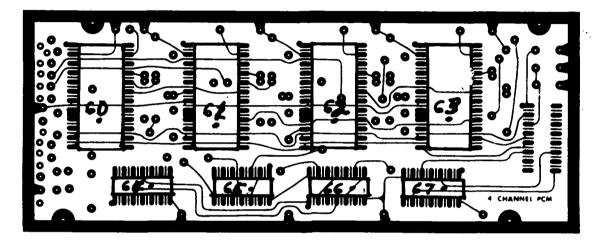


FIGURE 3

PCM BOARD

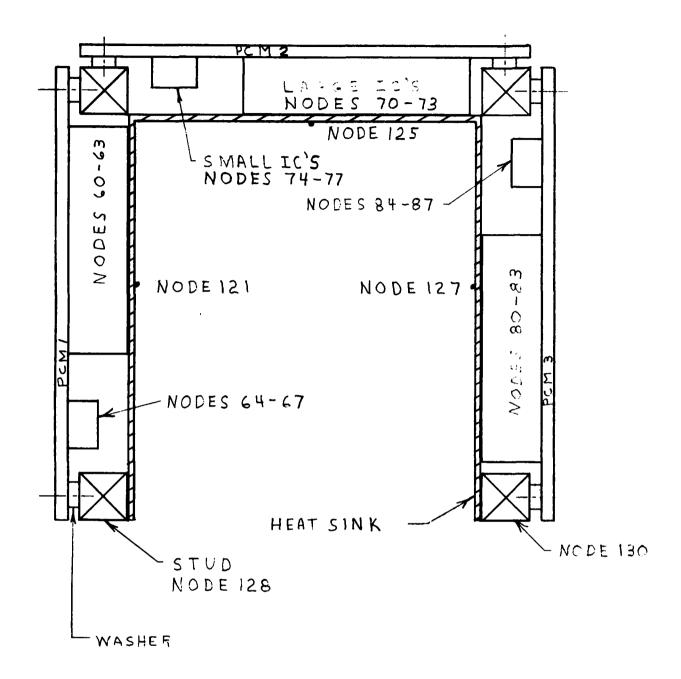

The three PCM boards are mounted to the framing studs with nylon washers as shown above. The heat sink channel contacts the four large IC's but leaves a 5/16" air gap between the four smaller IC's.

FIGURE 4

PCM BOARD HEAT SINK - CROSS SECTION

This shows a side view of the PCM heat sink. The cross-hatched area represents the contact surface between the heat sink and the framing studs.

SCALE: 1=1

FIGURE 5 PCM BOARD HEAT SINK


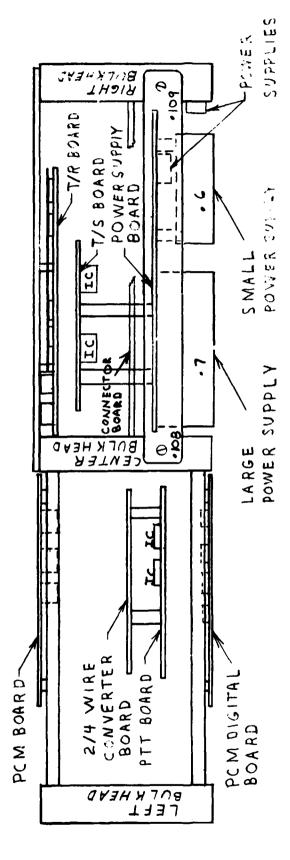


FIGURE 6 CIRCUIT BOARD LOCATIONS

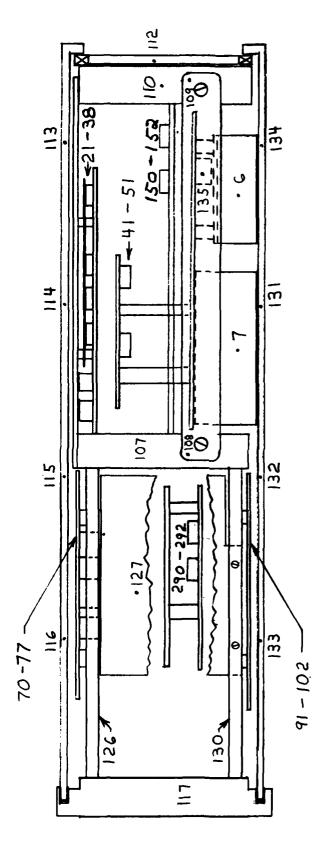

KEY NODE LOCATIONS

FIGURE 7

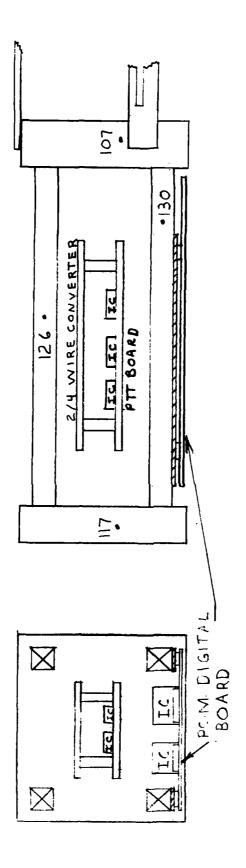


FIGURE 8 PCM/PUSH TO TALK HEAT SINKS

The heat transfer between the smaller IC's (Nodes 64-67) and their heat sink (Node 121) is also considered as conductive heat transfer. This is because a minimum of  $\frac{1}{3}$  inch between the IC and heat sink is required for substantial convection to take place. Our clearance is  $\frac{5}{32}$  inch (Fig 4); thus, we treat air as the conductive material and use Equation 1.

The thermal resistance between Nodes 64-67 and Node 121 is:

R = 
$$\frac{x}{KA}$$
  
x = 5/32 in (measured)  
 $K_{air} = .00075 \frac{watt}{in^{0}C}$  (Ref 1b)  
A = .75" x .25" = .188in<sup>2</sup>  
R =  $\frac{5/32}{(.00075)(.188)}$  = 1108.16°C watt

Since there are three identical PCM boards with identical heat sinking, the resistance calculations for the other two are the same as above.

### 2. PCM Digital/Push to Talk

Because of space constraints, the PCM digital and the push to talk board rely on conduction through the air for cooling. The design is poor, at best, and was utilized here only because of the experimental nature of the unit. The push to talk board is facing the PCM heat sink (Node 125) and will conduct its heat there.

The thermal resistance between Nodes 290-292 and Node 125 is:

$$x = .25 in.$$

$$K_{air} = .00075 \frac{watt}{O_{C} in}$$

$$A = .75" \times .25" = .18in^2$$

$$R = .25$$
 =  $1852 \frac{^{\circ}C}{}$  watt

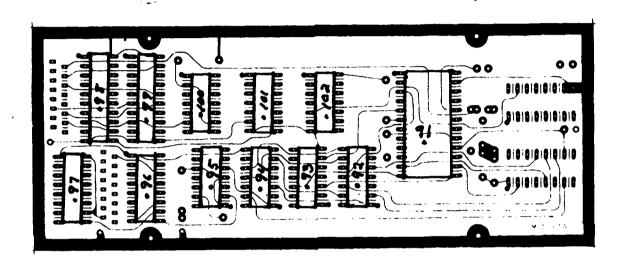


FIGURE 9
PCM DIGITAL BOARD

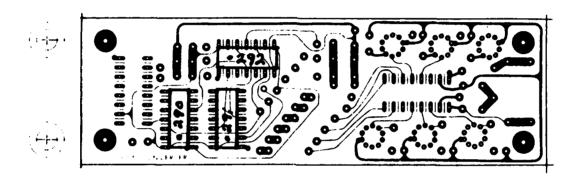


FIGURE 10

PTT CONVERTER

The thermal path for the heat flow from the IC's on the PCM digital board will be an approximation since the actual path is very complicated. For this approximation, it will be assumed that heat flows from each IC to both Nodes 121 and 127, which are both on the sides of the PCM heat sink.

The thermal resistance between IC's (Nodes 91-102) and Nodes 121, 127 is:

$$x_1 = 1$$
"
 $A = .5$ "  $\times 1$ " =  $.5$ in<sup>2</sup>
 $x_2 = 1.5$ "

 $R_1 = \frac{1}{.00075(1.8)} = 740.7$ °C (Between IC's and Node 121)

 $R_2 = \frac{1.5}{.00075(.18)} = 11,111$ °C (Between IC's and Node 127)

#### 3. Timing/Sequencer (T/S) Board

The T/S board contains IC Nodes 41-51 that make their thermal connection to Node 113. Because of manufacturing difficulties, a heat sink was not installed on the T/S board. Because of this, the board is cooled by natural convection. The air node is taken as the case Node 113 since the internal air temperature is assumed to be the same as the case temperature.

The heat transfer coefficient for each IC would be determined by their size since it is vertical. If we use a worst case temperature difference of  $50^{\circ}$ C between component and the inner air ambient, the h<sub>C</sub> value is approximately .0042  $\frac{\text{watt}}{2^{\circ}\text{C}}$ .

The thermal resistance between Nodes 47, 48 and Nodes 113 is:

$$A = 0.5$$
" x 1.2" = .6in<sup>2</sup>

$$R = 1 = 396.8^{\circ}C$$
 watt

The thermal resistance between Nodes 41-46, 49-51 and Node 113 is:

A = .75" x .25" = .19in<sup>2</sup>

R = 
$$\frac{1}{.0042(.19)}$$
 = 1253.13°C watt

#### 4. Transmitter/Receiver (T/R) Board

The T/R board is shown in Fig 13 with node numbers assigned to the different ICs. The Manchester chip (Node 31) and the clock chip (Node 38) are taller than the other ICs on the board and are in direct contact with the aluminum plate (Node 223) that holds the center and right bulkheads in place, as shown in Fig 14.

The thermal resistance between Node 31 and Node 223 is:

$$R = \frac{x}{KA}$$

$$x = .02in$$

$$K = .00075 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = 0.5 \times 1.22 = .61 \text{in}^2$$

$$R = \underbrace{.02}_{(.00075)(.61)} = 43.72^{\circ}C$$
 watt

The thermal resistance between Node 38 and Node 223 is:

$$R = \frac{x}{KA}$$

$$x = .02in$$

$$K = .00075 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = .75 \times .5 = .38in^2$$

$$R = \frac{.02}{(.00075)(.38)} = 70.18^{\circ}C$$
 watt

The remaining IC's on the T/R board dissipate their heat into a copper heat sink (Node 323) as shown in Fig 14. The thermal resistance between the remaining ICs (Nodes 21-30 and Nodes 32-37) and the heat sink is:

$$R = \frac{x}{KA}$$

$$x = .02in$$

$$K = .00075 \frac{\text{watts}}{\text{in}^{0}C}$$

From the copper heat sink (Node 323), the heat is conducted through two aluminum stand-offs (Nodes 423 and 424) to Node 123 as shown in Fig 14. The thermal contact resistance between Nodes 323 and 423 or 424 is:

$$R = \frac{1}{h_c A}$$

$$R = \frac{1}{h_c A}$$

$$\frac{1}{h_c} = .3^{in^2} \frac{o_c}{watt}$$

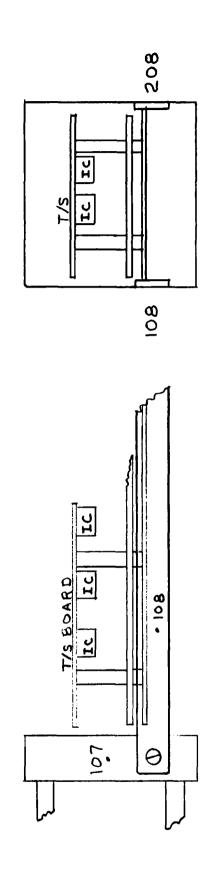


FIGURE 11

T/S BOARD LOCATION


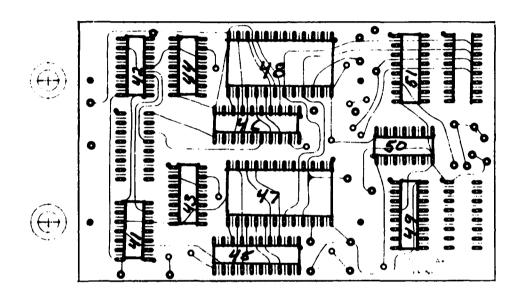


FIGURE 12 T/S BOARD

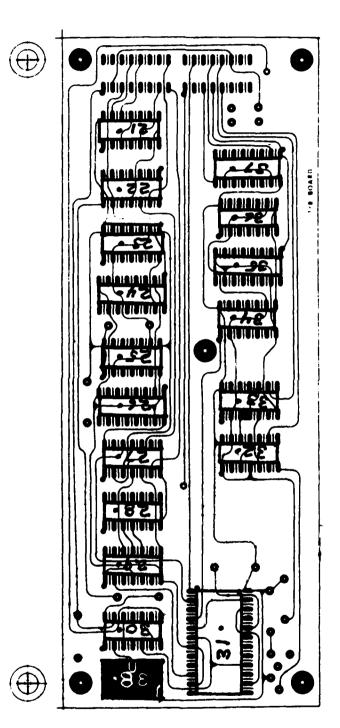

25

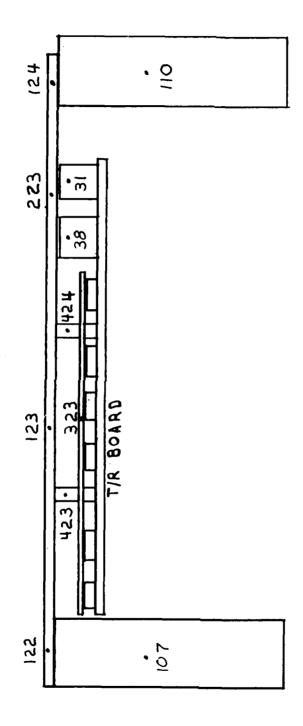


FIGURE 14 T/R BOARD HEAT SINK

A = 
$$\pi \left(\frac{1}{8}\right)^2 = .05 \text{ in}^2$$

R =  $\frac{.3}{.05} = 6.11 \frac{^{\circ}\text{C}}{\text{watt}}$ 

The thermal resistance between Nodes 423, 424 and the upper support plate (Node 123) (See Fig 8) is the same as calculated above due to symmetry.

#### 5. Power Supply

The large power supply (Node 7) is in contact with each of the two side plates as shown in Fig 6. The thermal resistance between either one of these plates (Nodes 108 or 208) and the large power supply (Node 7) is:

$$R = \frac{x}{KA}$$

$$x = .02in$$

$$K = .004 \frac{watts}{in^{0}C}$$
(Ref 1) (This is for a plastic coating on the supply case)

$$A = .65 \times 4.56 = 2.96 \text{ in}^2$$

$$R = \frac{.02}{(.004)(2.96)} = 1.69 \frac{^{\circ}C}{\text{watt}}$$

The bottom of the large power supply is in direct contact with the outside case (Node 131) as shown in Fig 7. The thermal resistance between Nodes 7 and 131 is:

$$R = \frac{x}{KA}$$

$$x = .01$$

$$< = .004$$

$$A = 4.56 \times 2.5 = 11.4 \text{ in}^2$$

$$R = \frac{.01}{(.004)(11.4)} = \frac{.22^{\circ}C}{\text{watt}}$$

The small power supply is located next to the large power supply (Fig 6) and dissipates its heat into the outside case (Node 134) and also into the two side plates (Nodes 109 and 209). The thermal resistance between Nodes 6 and Nodes 109/209 is:

$$R = \frac{x}{KA}$$

$$x = .02in$$

$$K = .004 \underline{\text{watts}}$$

$$in^{O}C$$

$$A = (.1)(2) = .2in^2$$

$$R = \frac{.02}{(.004)(.2)} = 25.0 \frac{^{\circ}C}{\text{watt}}$$

The thermal resistance between Nodes 6 and 134 is:

$$R = \frac{x}{KA}$$

$$x = .01 in$$

$$K = .004 \underline{\text{watts}}$$
  
 $in^{\circ}C$ 

$$A = 2 \times 2 = 4in^2$$

$$R = \frac{.01}{(.004)(4)} = .63^{\circ}C$$
 watt

The small IC power supply (Node 135) is attached to a heat sink that transfers the heat to the case (Fig 15).

The thermal resistance between Nodes 135 and 235 is:

$$R = \frac{x}{KA}$$

$$x = .02$$
 in

$$A = 1.25 \times 0.5 = .625 \text{ in}^2$$

$$K = .004 \frac{\text{watts}}{\text{in}^{0}C}$$

$$R = \frac{.02}{(.004)(.625)} = 8.0^{\circ}C$$

The thermal resistance between Nodes 235 and 335 (Fig 15) is:

$$R = \frac{x}{KA}$$

$$A = \frac{1}{32} \times 1.25 = .04 \text{ in}^2$$

$$K = 3.5 \frac{\text{watts}}{\text{in}^{0}\text{C}}$$

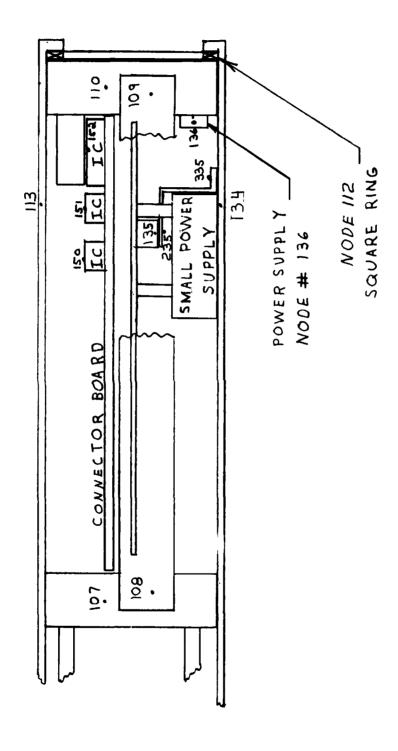


FIGURE 15 POWER SUPPLY LOCATIONS

$$R = 1.25 = 8.9^{\circ}C$$
(3.5)(.04) watt

The thermal contact resistance between Nodes 335 and 134 (Fig 15) is:

$$R = \frac{1}{h_c A}$$

$$\frac{1}{h_c} = .15 \frac{in^{20}C}{watt}$$

$$R = .15 = 0.5 \frac{o_C}{watt}$$

#### 6. Connector Board

There are three ICs mounted on the right side of the connector board as shown in Fig 15. The three ICs have Node numbers 150, 151, and 152 and are shown in Fig 16. Because of manufacturing difficulties, no heat sink could be manufactured for those IC's and they will conduct their heat through the air. The thermal resistance between Nodes 150, 151, 152 and the right bulkhead (Node 110) is:

$$R = \frac{x}{KA}$$

$$x = 0.5 \text{ in}$$

$$K = .00075 \frac{\text{watt}}{\text{in}^{0}C}$$

$$A = 1.2 \times .55 = .66 \text{ in}^{2}$$

$$R = \frac{0.5}{(.00075)(.66)} = 1010.1^{0}C$$
watt

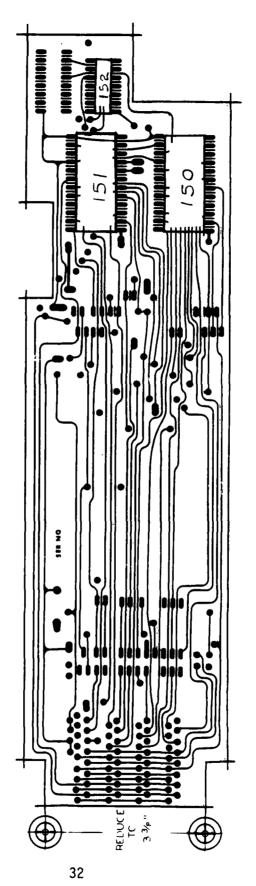


FIGURE 16

CONNECTOR BOARD

There is a small power supply (Node 136) mounted on the right bulkhead (Node 110) as shown in Fig 15. The thermal contact resistance between Nodes 136 and 110 is:

$$R = \frac{1}{h_c}A$$

$$\frac{1}{h_c} = 0.3 \frac{in^2C}{watt}$$

$$A = \pi (.5)^2 = .8in^2$$

$$R = 0.3 = .38^{\circ}C$$
0.8 watt

#### 7. PCM Heat Sink To Chassis

The heat flows from the PCM board heat sinks into the framing studs which have Node numbers 128 and 130 as shown in Fig 4. Two types of thermal resistances exist between Nodes 121 (heat sink) and 128 (stud).

There is a conductive resistance between Node 121 and the base of the heat sink, and a contact resistance between the base of the heat sink and the stud. A side view of the heat sink is shown in Fig 5. The cross-hatched portion is the contact area between the heat sink and the stud. Since the two resistances are in series they may be added together to give the total resistance between Nodes 121 and 128 (Fig 4).

For the conductive resistance:

$$R = \frac{x}{KA}$$

Between Nodes 128 - 121 130 - 127

$$x = 1 in$$

$$K = 3.5 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = \frac{1}{32} \times 2.75 = .086 \text{ in}^2$$
 (This is for the smallest possible conducting area, which occurs at the bottom of the heat sink)

$$R = \frac{1}{(3.5)(.086)} = 3.32^{\circ}C$$
 watt

For the contact resistance: R = 1

$$\frac{1}{h_c} = 0.3 \frac{in^2 {}^{\circ}C}{watt}$$
 (Ref 1d)

$$A = 2.75 \times \frac{1}{4} = .698 in^2$$

$$R = 0.3 = .44^{\circ}C$$
 watt

$$R_{tot} = R_1 + R_2$$

$$R_{\text{tot}} = 3.32 + .44 = 3.76 \frac{^{\circ}\text{C}}{\text{watt}}$$

Because of symmetry, the resistance between Nodes 127 and 130 (Fig 4) is the same as calculated above.

#### 8. PCM Heat Sink

Three nodes are placed on the PCM heat sink as shown in Fig 4. The heat sink is constructed of copper. Between each node there is a conductive heat flow.

Between Nodes 121 - 125 - 127

$$R = \frac{x}{k\Delta}$$

$$x = 2.0 in$$

$$K = 3.5 \underline{\text{watts}}$$

$$in^{O}C$$

Ref 1

$$A = \frac{1}{32} \times 4.625" = .145 in^2$$

$$R = \frac{2}{3.5(.145)} = 3.95^{\circ}C$$
 watt

#### 9. Inner Chassis

The inner chassis structure becomes quite complicated but by following Figure 2, we can keep the assumed heat flow paths straight. To make life easy, we will work from the top - down.

Between Nodes 117 and 120, 126, 128, 130 107 and 120, 126, 128, 130

Since each of the connections concerns identical shapes, distances and types of connections, a common thermal resistance value is defined for each. The thermal path consists of both a contact resistance and a conductive one in series. In that case, the two resistances are just additive and

Contact Resistance: 
$$R_{contact} = \frac{1}{h_c A}$$

$$\frac{1}{h_cA} = 0.2 \frac{in^{20}C}{watt}$$
(Ref 1) this value is for an aluminum connection and assumed contact pressure of 100psi

A = cross section area of framing stud = .25" x .25" = .0625in<sup>2</sup>

$$R = \frac{0.2}{(.0625)} = 3.2 \frac{^{\circ}C}{watt}$$

Conduction Resistance: R = x

x = distance from bulkhead to mid frame stud = 3.7in

$$K = 4.4 \frac{\text{watts}}{\text{in}^{\circ}C}$$
 (Ref 1a)

A = frame stud cross section area = .25" x .25" = .0625in<sup>2</sup>

$$R = \frac{3.7}{4.4(.0625)} = 13.45^{\circ} \frac{C}{\text{watt}}$$

The total thermal resistance is therefore

$$R_{tot} = 3.2 + 13.45 = 16.65 \frac{^{\circ}C}{watt}$$

Between Nodes 107 and 208, 209 110 and 109, 108

The thermal resistance of the paths between these nodes are the same because of identical shapes, materials and connections. This is a contact resistance between the aluminum struts and the aluminum bulkhead. Machine screws are used as fasteners.

$$\frac{1}{h_c} = 0.3 \quad in^{20}C$$

this is figured as an average figure because of the large contact area

$$A = 0.5$$
" x 1" =  $.5$ in<sup>2</sup>

$$R = \frac{1}{h_c A} = \frac{0.3}{0.5} = .6 \frac{0 C}{watt}$$

These are contact resistances between aluminum materials fastened by machine screws. Here the contact area is large so again the contact resistances are low.

$$\frac{1}{h_c} = 0.3 \frac{\text{in}^2}{\text{watt}}$$

$$A = 0.5"(2.75") = 1.38in^2$$

$$R = .3 = .22^{\circ}C$$
1.38 watt

Now each end of each of the longitudinal stringers or plates is, of course, connected to its other end. This thermal resistance is a conductive one and is dependent on the material, shape and distance between nodes.

Between Nodes 208 and 209 108 and 109

$$x = stringer length = 8.562in$$

K = thermal conductivity for aluminum 6061 = 
$$\frac{4.4\text{watts}}{\text{in}^{O}C}$$

$$A = 1" \times .0625" = .0625in^2$$

$$R = \frac{8.562}{4.4(.0625)} = 31.2^{\circ} \frac{C}{\text{watt}}$$

The thermal resistances between the nodes on the aluminum support plate between bulkheads (Fig 8) are:

Between Nodes 123 and 223 
$$R = \frac{x}{KA}$$

$$x = 3.75 in$$

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = 2.75(1) = .34in^2$$

$$R = \frac{3.75}{4.4(.34)} = 2.48$$

Between Nodes 122 and 123 x = 3.25 in

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = .34in^2$$

$$R = \frac{3.25}{(4.4)(.34)} = 2.48 \frac{\circ C}{\text{watt}}$$

Between Nodes 223 and 124 x = 2.6in

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = .34in^2$$

$$R = 2.6 = 1.69$$

$$4.4(.34)$$

The thermal resistance between Node 110 (right bulkhead) and Node 112 (square ring) is:

$$R = \frac{1}{h_c A}$$

$$\frac{1}{h_c} = \frac{0.3 \text{ in}^{20} \text{C}}{\text{watt}}$$

$$A = 2 \text{ in}^{2}$$

$$R = \frac{0.3}{2} = .15 \frac{\text{C}}{\text{watt}}$$

#### 10. Case Exterior

The heat flows from the left bulkhead to the outside case and is then dissipated into the surrounding air. The thermal resistance between the left bulkhead (Node 117) and the outside case (Nodes 116/133) is calculated as follows:

There is a contact resistance between the bulkhead and the case and a conductive resistance between the end of the case and Node 116.

For the contact resistance: 
$$R = \frac{1}{h_c A}$$

$$\frac{1}{h_c} = .3in \frac{2 \text{ o}_C}{\text{watt}}$$

The total contact area between the left bulkhead and the case is:

A = (length of one side) 
$$(4 \text{ sides})(\text{contact width})$$

$$A = (3.0)(4)(.35) = 4.2in^2$$

The contact area for the top half of the case (Node 116) is:

$$A = 4.2/2 = 2.1 \text{ in}^2$$

$$R(contact) = \frac{0.3}{2.1} = .14 \frac{O_C}{watt}$$

The conductive resistance between the end of the case and Node 116 is:

$$R = \frac{x}{KA}$$

$$x = 3.6in$$

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = 3.0 (2)(1/16) = .375$$

$$R_{conduct} = \frac{3.6}{4.4(.375)} = \frac{2.18^{\circ}C}{watt}$$

The total thermal resistance between the left bulkhead (Node 117) and the first Node on the top of the case (Node 116) is the sum of the contact resistance and the conductive resistance

$$R = .14 + 2.18 = 2.32 \frac{O_{C}}{watt}$$

Because of symmetry, the thermal resistance between Node 117 and Node 133 (Fig 7) is the same as calculated above.

Figure 2 shows the connections between the following case nodes:

116 and 115

115 and 114

114 and 113

133 and 132

132 and 131

131 and 134

The thermal resistance between each pair of nodes is:

$$R = \frac{x}{KA}$$

$$x = 3.6in$$

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = .375 in^2$$

Figure 2 shows the connections between the following pairs of nodes:

- 116 and 133
- 115 and 132
- 114 and 131
- 113 and 134

The thermal resistance between them is:

$$R = \frac{x}{KA}$$

$$x = 6in$$


(this is the perimeter from the top to the bottom of the case)

$$K = 4.4 \frac{\text{watts}}{\text{in}^{0}C}$$

$$A = 1/16(3.6) = .23$$

$$R = \frac{6}{4.4(.23)} = 6.06^{\circ} \frac{C}{\text{watt}}$$

The thermal circuit between Nodes 116 and 133 is shown below:

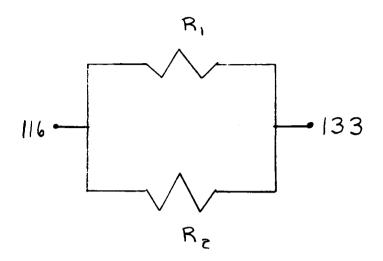

Since these two resistances are in parallel, the equivalent thermal resistance between Nodes 116 and 133 is calculated as follows:

$$\frac{1}{\text{Req}} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$$

$$\frac{1}{\text{Req}} = \frac{1}{6.06} + \frac{1}{6.06}$$

Req = 
$$3.03^{\circ}C$$
 watt

The heat is transferred by convection from the case nodes (113-116, 131-134) to the ambient air (Node 1). First the natural convection coefficient  $(h_{\rm C})$  is calculated using Equation 2 and then Equation 3 is used to calculate the thermal resistance between the case and the air

$$h_{c} = 1.062 \times 10^{-3} \left(\frac{T}{L}\right)^{0.25}$$

$$T = 10^{0}C$$

$$L = 2ft$$

$$h_{c} = 1.062 \times 10^{-3} \left(\frac{10}{2}\right)^{0.25}$$

$$h_{c} = .002 \frac{watt}{^{0}C \text{ in}^{2}}$$

$$R = \frac{1}{h_{c}A}$$

$$A = 6 \times 3.6 = 21.6 \text{ in}^{2}$$

$$R = \frac{1}{(21.6)(.002)} = 23.15 \frac{^{0}C}{^{watt}}$$

#### VI COMPUTER INPUT AND RESULTS

The following pages contain the input data for the computer analysis and the results of the analysis. Table 1 shows the heat output of each node. Table 2 shows the thermal resistances between nodes and the assigned connector numbers for these resistances. Table 3 is the actual computer input, and Table 4 contains the results where temperature is given in <sup>O</sup>F for each node.

TABLE 1
SOURCE DATA SUMMARY

		IC HEAT O	UTPUT
NODE	IC	WATTS	BTU/HR
PCM			
60	S3505	.5	1.707
61	S3505	.5	1.707
63	S3505	.5	1.707
64	54LS500	.044	.150216
65	54LS08	.044	.150216
66	54LS00	.033	.112662
67	54LS04	.044	.150216
70	S3505	.5	1.707
71	S3505	.5	1.707
72	S3505	.5	1.707
73	S3505	.5	1.707
74	54LS500	.044	.150216
75	54LS08	.044	.150216
76	54LS00	.033	.112662
77	54LS04	.044	.150216
80	S3505	.5	1.707
81	S3505	.5	1.707
82	S3505	.5	1.707
83	S3505	.5	1.707
84	54LS500	.044	.150216
85	54LS08	.044	.150216
86	54LS00	.033	.112662
87	54LS04	.044	.15J216

TABLE 1 (Con't)

	IC HEAT OUTPUT IC WATTS		
NODE	10	WATTS	BTU/HR
PUSH TO	TALK		
290	54LS86	.055	.18777
291	54LS86	.055	.18777
292	54LS04	.037	.126318
DIGITAL			
91	S3505	.5	1.707
92	54LS04	.033	.112662
93	54LS08	.033	.10242
94	54LS00	.044	.150216
95	54LS75	.04	.13656
96	54LS165	.18	.61452
97	54LS165	.18	.61452
98	54LS273	.14	.47796
99	54LS273	.14	.47796
100	54LS164	.135	.46089
101	54LS00	.180	.61452
102	54LS04	.033	.112662
T/S			
41	54LS271	.033	.112662
42	54LS04	.033	.112662
43	54LS393	.150	.5121
44	54LS393	.15	.5121
45	54LS273	.14	.47796
46	27L08	.14	.47796
47	54LS273	.416	1.420224
48	27L08	.416	1.420224
49	54LS138	.05	.1707
50	54LS393	.15	.5121
51	54LS138	.05	.1707

TABLE 1 (Con't)

NODE	IC	IC HEAT OUTPUT WATTS	BTU/HR
T/R			<del></del>
21	5425	.095	.32433
22	54LS04	.033	.112662
23	54LS164	.135	.46089
24	54LS165	.180	.61452
25	54LS164	.135	.46089
26	54LS165	.180	.61452
27	54LS08	.044	.150216
28	54LS74	.04	.13656
29	54LS74	.04	.13656
30	54LS00	.044	.150216
31	HD15530	.05	.1707
32	54LS74	.04	.13656
33	54LS08	.044	.150216
34	54LS164	.135	.46089
35	54LS165	.180	.61452
36	54LS164	.135	.46089
37	54LS165	.180	.61452
38	clock chip	.1	.3414
POWER S	UPPLY		
7	LG PS	8.0	27.312
8	SM PS	2.0	6.828
135		1.9	6.4866
CONN BO	<u>ard</u>		
150	7804	1.0	3.414
151	7804	1.0	3.414
152	54LS04	.033	.112662
136	LM117	6.0	20.484

TABLE 2
THERMAL RESISTANCES SUMMARY

CONN NO.	I C NODE	HEAT SINK	THERMAL RESISTANCE OC/WATT	THERMAL CONE	DUCTANCE BTU/HR <sup>O</sup> F
D.CM					
<u>PCM</u> 1	60	121	48.49	2.06 x 10 <sup>-2</sup>	3 91 x 10 <sup>-2</sup>
2	61	121	48.49	2.06 x 10 <sup>-2</sup>	$3.91 \times 10^{-2}$
3	62	121	48.49	$2.06 \times 10^{-2}$	$3.91 \times 10^{-2}$
4	63	121	49.49	2.06 x 20 <sup>-2</sup>	$3.91 \times 10^{-2}$
5	64	121	1108.2	9.02 x 10 <sup>-4</sup>	$1.71 \times 10^{-3}$
6	65	121	1108.2	9.02 x 10 <sup>-4</sup>	$1.71 \times 10^{-3}$
7	66	121	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
8	67	121	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
O	07	17.1	1100.2	J.02 X 10	1.71 \ 10
9	70	125	48.49	$2.06 \times 10^{-2}$	$3.91 \times 10^{-2}$
10	71	125	48.49	$2.06 \times 10^{-2}$	$3.91 \times 10^{-2}$
11	72	125	48.49	$2.06 \times 10^{-2}$	$3.91 \times 10^{-2}$
12	73	125	48.49	$2.06 \times 10^{-2}$	$3.91 \times 10^{-2}$
13	74	125	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
14	75	125	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
15	76	125	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
16	77	125	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
	, .				
17	80	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
18	81	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
19	82	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
20	83	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
21	84	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
22	85	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
23	86	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
24	87	127	1108.2	$9.02 \times 10^{-4}$	$1.71 \times 10^{-3}$
<del>-</del> -		** **	_		

TABLE 2 (Con't)

CONN NO.	IC	HEAT SINK	THERMAL RESISTANCE	THERMAL COND	UCTANCE
	NODE	NODE	OC/WATT	WATTS/OC	BTU/HR <sup>O</sup> F
PCM PUSH	TO TA				
25	290	125	1852.	$5.4 \times 10^{-4}$	$1.02 \times 10^{-3}$
26	291	125	1852.	$5.4 \times 10^{-4}$	$1.02 \times 10^{-3}$
27 PCM DIGI	292	125	1852.	$5.4 \times 10^{-4}$	$1.02 \times 10^{-3}$
28	91	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
29	92	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
30	93	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
31	94	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
32	95	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
33	96	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
34	97	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
35	98	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
36 37	99 100	121 121	740.7 740.7	$1.35 \times 10^{-3}$ $1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$ $2.56 \times 10^{-3}$
38	101	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
39	102	121	740.7	$1.35 \times 10^{-3}$	$2.56 \times 10^{-3}$
40	91	127	11,111	9. $\times 10^{-5}$	1.71 x 10 <sup>-4</sup>
41	92	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
42	93	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
43	94	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
44	95	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
45	96	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
46	97	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
47	98	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
48	99	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
49	100	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
50	101	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$
51	102	127	11,111	9. $\times 10^{-5}$	$1.71 \times 10^{-4}$

TABLE 2 (Con't)

CONN NO.	IC	HEAT SINK	THERMAL RESISTANCE	THERMAL COND	UCTANCE
	NODE	NODE	OC/WATT	WATTS/OC	BTU/HR <sup>O</sup> F
<u>T/S</u>	41	112	1252 12	7.98 x 10 <sup>-4</sup>	$1.51 \times 10^{-3}$
52 53	41	113	1253.13	7.98 x 10 <sup>-4</sup>	$1.51 \times 10^{-3}$ $1.51 \times 10^{-3}$
53	42	113	1253.13	7.98 x 10 7.98 x 10 <sup>-4</sup>	$1.51 \times 10^{-3}$ $1.51 \times 10^{-3}$
54	43	113	1253.13		$1.51 \times 10^{-3}$ $1.51 \times 10^{-3}$
55	44	113	1253.13	$7.98 \times 10^{-4}$	
56	45	113	1253.13	$7.98 \times 10^{-4}$	$1.51 \times 10^{-3}$
57	46	113	1253.13	$7.98 \times 10^{-4}$	$1.51 \times 10^{-3}$
58	47	113	396.8	$2.52 \times 10^{-3}$	$4.78 \times 10^{-3}$
59	48	113	396.8	$2.52 \times 10^{-3}$	$4.78 \times 10^{-3}$
60	49	113	1253.13	$7.98 \times 10^{-4}$	$1.51 \times 10^{-3}$
61	50	113	1253.13	7.98 x 10 <sup>-4</sup>	$1.51 \times 10^{-3}$
62	51	113	1253.13	$7.98 \times 10^{-4}$	$1.51 \times 10^{-3}$
T/R				2	2
63	21	323	140.35	7.13 x $10^{-3}$	$1.35 \times 10^{-2}$
64	22	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
65	23	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
66	24	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
67	25	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
68	26	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
69	27	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
70	28	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
71	29	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
72	30	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
73	31	223	43.72	$2.29 \times 10^{-2}$	$4.34 \times 10^{-2}$
74	32	323	140.35	7.13 x $10^{-3}$	$1.35 \times 10^{-2}$
75	33	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
76	34	343	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
77	35	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
78	36	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
79	37	323	140.35	$7.13 \times 10^{-3}$	$1.35 \times 10^{-2}$
80	38	223	70.18	$1.43 \times 10^{-2}$	$2.7 \times 10^{-2}$

TABLE 2 (Con't)

CONN NO.	IC NODE		THERMAL RESISTANCE OC/WATT	THERMAL COND	
81	323	423	6.11	1.64 x 10 <sup>-1</sup>	3.1 x 10 <sup>-1</sup>
82	323	424	6.11	$1.64 \times 10^{-1}$	
83	423	123	6.11	$1.64 \times 10^{-1}$	$3.1 \times 10^{-1}$
84	424	123	6.11	$1.64 \times 10^{-1}$	$3.1 \times 10^{-1}$
POWER SU	PPLY				
85	7	108	1.69	$5.92 \times 10^{-1}$	1.12
86	7	208	1.69	$5.92 \times 10^{-1}$	1.12
87	7	131	.22	4.55	8.62
88	6	109	25.	.04	$7.58 \times 10^{-2}$
89	6	209	25.	.04	$7.58 \times 10^{-2}$
90	6	134	.63	1.59	3.01
91	135	235	8.0	.125	$2.37 \times 10^{-1}$
92	235	335	8.9	$1.12 \times 10^{-1}$	$2.13 \times 10^{-1}$
93	335	134	.5	2.	3.79
CONNECTO	R BOAR	D		_	
94	150	110	1010.1	$9.9 \times 10^{-4}$	$1.88 \times 10^{-3}$
95	151	110	1010.1	$9.9 \times 10^{-4}$	$1.88 \times 10^{-3}$
96	152	110	1010.1	$9.9 \times 10^{-4}$	$1.88 \times 10^{-3}$
97	136	110	.38	2.63	4.98
PCM HEAT	SINK				
98	121	125	3.95	$2.53 \times 10^{-1}$	.48
99	125	127	3.95	$2.53 \times 10^{-1}$	.48
PCM HEAT	SINK	TO CHASSIS			
100	121	128	3.76	$2.66 \times 10^{-1}$	.50
101	127	130	3.76	$2.66 \times 10^{-1}$	.50

TABLE 2 (Con't)

INNER CHASSIS   102	CONN NO.	IC NODE	HEAT SINK	THERMAL RESISTANCE  OC/WATT	.=	UCTANCE BTU/HR <sup>O</sup> F
102         117         120         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 103         117         126         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 104         117         128         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 105         117         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106         117         120         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107         117         126         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108         117         128         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109         107         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109         107         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110         107         208         .6         1.67         3.16           111         107         209         .6         1.67         3.16           112         110         109         .6         1.67         3.16           113         110         108         .6         1.67 <th></th> <th></th> <th></th> <th>o,</th> <th>•</th> <th>510,111</th>				o,	•	510,111
102         117         120         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 103         117         126         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 104         117         128         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 105         117         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106         117         120         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107         117         126         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108         117         128         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109         107         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109         107         130         16.65         6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110         107         208         .6         1.67         3.16           111         107         209         .6         1.67         3.16           112         110         109         .6         1.67         3.16           113         110         108         .6         1.67 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
103 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 104 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 105 117 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106 117 120 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16  111 107 209 .6 1.67 3.16  112 110 109 .6 1.67 3.16  113 110 108 .6 1.67 3.16  114 107 122 .22 4.55 8.62  115 110 124 .22 4.55 8.62  116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77  119 122 123 2.48 .40 .77  120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12  CASE EXTERIOR  122 117 116 2.31 .433 .82	INNER CH	ASSIS			_	_
104 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 105 117 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106 117 120 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16 111 107 209 .6 1.67 3.16 112 110 109 .6 1.67 3.16 113 110 108 .6 1.67 3.16 114 107 122 .22 4.55 8.62 115 110 124 .22 4.55 8.62 115 110 124 .22 4.55 8.62 116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77 119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82	102	117	120	16.65		$1.14 \times 10^{-1}$
105 117 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106 117 120 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16  111 107 209 .6 1.67 3.16  112 110 109 .6 1.67 3.16  113 110 108 .6 1.67 3.16  114 107 122 .22 4.55 8.62  115 110 124 .22 4.55 8.62  116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77  119 122 123 2.48 .40 .77  120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12  121 110 112 .15 6.67 12.64  CASE EXTERIOR  122 117 116 2.31 .433 .82	103	117	126	16.65	$6.0 \times 10^{-2}$	1.14 x 10 <sup>-</sup> 1
105 117 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106 117 120 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16  111 107 209 .6 1.67 3.16  112 110 109 .6 1.67 3.16  113 110 108 .6 1.67 3.16  114 107 122 .22 4.55 8.62  115 110 124 .22 4.55 8.62  116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77  119 122 123 2.48 .40 .77  120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12  121 110 112 .15 6.67 12.64  CASE EXTERIOR  122 117 116 2.31 .433 .82						
105 117 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 106 117 120 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16  111 107 209 .6 1.67 3.16  112 110 109 .6 1.67 3.16  113 110 108 .6 1.67 3.16  114 107 122 .22 4.55 8.62  115 110 124 .22 4.55 8.62  116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77  119 122 123 2.48 .40 .77  120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12  121 110 112 .15 6.67 12.64  CASE EXTERIOR  122 117 116 2.31 .433 .82	104	117	128	16.65	$6.0 \times 10^{-2}$	$1.14 \times 10^{-1}$
107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16 111 107 209 .6 1.67 3.16 112 110 109 .6 1.67 3.16 113 110 108 .6 1.67 3.16 114 107 122 .22 4.55 8.62 115 110 124 .22 4.55 8.62 116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77 119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82	105	117	130	16.65	_	$1.14 \times 10^{-1}$
107 117 126 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16 111 107 209 .6 1.67 3.16 112 110 109 .6 1.67 3.16 113 110 108 .6 1.67 3.16 114 107 122 .22 4.55 8.62 115 110 124 .22 4.55 8.62 116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77 119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82						
108 117 128 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16 111 107 209 .6 1.67 3.16 112 110 109 .6 1.67 3.16 113 110 108 .6 1.67 3.16 114 107 122 .22 4.55 8.62 115 110 124 .22 4.55 8.62 116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77 119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82	106	117	120	16.65	$6.0 \times 10^{-2}$	$1.14 \times 10^{-1}$
109 107 130 16.65 6.0 x 10 <sup>-2</sup> 1.14 x 10 <sup>-1</sup> 110 107 208 .6 1.67 3.16 111 107 209 .6 1.67 3.16 112 110 109 .6 1.67 3.16 113 110 108 .6 1.67 3.16 114 107 122 .22 4.55 8.62 115 110 124 .22 4.55 8.62 116 208 209 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117 108 109 31.2 3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118 123 223 2.48 .40 .77 119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82	107	117	126	16.65	$6.0 \times 10^{-2}$	$1.14 \times 10^{-1}$
110       107       208       .6       1.67       3.16         111       107       209       .6       1.67       3.16         112       110       109       .6       1.67       3.16         113       110       108       .6       1.67       3.16         114       107       122       .22       4.55       8.62         115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	108	117	128	16.65	$6.0 \times 10^{-2}$	$1.14 \times 10^{-1}$
111       107       209       .6       1.67       3.16         112       110       109       .6       1.67       3.16         113       110       108       .6       1.67       3.16         114       107       122       .22       4.55       8.62         115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	109	107	130	16.65	$6.0 \times 10^{-2}$	$1.14 \times 10^{-1}$
112       110       109       .6       1.67       3.16         113       110       108       .6       1.67       3.16         114       107       122       .22       4.55       8.62         115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	110	107	208	.6	1.67	3.16
113       110       108       .6       1.67       3.16         114       107       122       .22       4.55       8.62         115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	111	107	209	.6	1.67	3.16
114       107       122       .22       4.55       8.62         115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	112	110	109	.6	1.67	3.16
115       110       124       .22       4.55       8.62         116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	113	110	108	.6	1.67	3.16
116       208       209       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	114	107	122	.22	4.55	8.62
117       108       109       31.2       3.21 x 10 <sup>-2</sup> 6.08 x 10 <sup>-2</sup> 118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	115	110	124	.22		8.62
118       123       223       2.48       .40       .77         119       122       123       2.48       .40       .77         120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	116	208	209	31.2	$3.21 \times 10^{-2}$	$6.08 \times 10^{-2}$
119 122 123 2.48 .40 .77 120 223 124 1.69 5.92 x 10 <sup>-1</sup> 1.12 121 110 112 .15 6.67 12.64  CASE EXTERIOR 122 117 116 2.31 .433 .82	117	108	109	31.2	$3.21 \times 10^{-2}$	$6.08 \times 10^{-2}$
120       223       124       1.69       5.92 x 10 <sup>-1</sup> 1.12         121       110       112       .15       6.67       12.64         CASE EXTERIOR         122       117       116       2.31       .433       .82	118	123	223	2.48	.40	.77
121     110     112     .15     6.67     12.64       CASE EXTERIOR       122     117     116     2.31     .433     .82	119	122	123	2.48	.40	.77
<u>CASE EXTERIOR</u> 122 117 116 2.31 .433 .82	120	223	124	1.69	$5.92 \times 10^{-1}$	1.12
122 117 116 2.31 .433 .82	121	110	112	.15	6.67	12.64
	CASE EXT	ERIOR				
123 117 133 2.31 .433 .82	122	117	116	2.31	.433	.82
	123	117	133	2.31	.433	.82

TABLE 2 (Con't)

CONN NO.	IC NODE	HEAT SINK NODE	THERMAL RESISTANCE  OC/WATT	THERMAL CONI WATTS 70C	DUCTANCE BTU/HR <sup>O</sup> F
124	116	115	2.18	.46	.87
125	115	114	2.18	.46	.87
126	114	113	2.18	.46	.87
127	133	132	2.18	.46	.87
128	132	131	2.18	.46	.87
129	131	134	2.18	.46	.87
130	116	133	3.03	.33	.626
131	115	132	3.03	.33	.626
132	114	131	3.03	.33	.626
133	113	134	3.03	.33	.626
134	113	1	23.15	.043	.082
135	114	1	23.15	.043	.082
136	115	1	23.15	.043	.082
137	116	1	23.15	.043	.082
138	131	1	23.15	.043	.082
139	132	1	23.15	.043	.082
140	133	1	23.15	.043	.082
141	134	1	23.15	.043	.082

## TABLE 3 COMPUTER INPUT

RAS, T100, IB70, CM230G00. D800685, RADC, 53021.
ATTACH, SINDA, SINDABNRY, ID=D800016, SN=AFFDL, MR=1.
ATTACH, LIB, SINDLIB, ID=D800016, SN=AFFDL, MR=1.
LIBRARY, LIB.
SINDA.
RETURN, SINDA.
REWIND, TAPE12, TAPE13, TAPE4.
FTN, I=TAPE13, B=SNDALGO, R.
SNDALGO.
RETURN, SNDALGO, LIB, TAPE4, TAPE13, TAPE12.
\*EOR

BCD STHERMAL SPCS BCD SASOC REMOTING END BCD SNODE DATA 60, 125, 0, -1, 0 61, 125, 0, -1, 0 62, 125, 0, -1, 0 63, 125, 0, -1, 0 64, 125, 0, -1, 0 65, 125, 0, -1, 0 66, 125, 0, -1, Q 67, 125, 0, -1, 0 121, 125. 0, -1 0 70, 125. 0, -1. 0 71, 125, 0, -1, 0 72, 125. 0, -1. 0 73, 125. 0, -1. 0 74, 125, 0, -1, 0 75, 125, 0, -1, 0 76, 125. 0, -1. 0 77, 125. 0, -1. 0 125, 125. 0, -1. 0 80, 125. 0, -1. 0 81, 125. 0, -1. 0 82, 125. 0, -1. 0 83, 125. 0, -1. 0 84, 125, 0, -1, 0 85, 125, 0, -1, 0 86, 125. 0, -1. 0 87, 125. 0, -1. 0 127, 125, 0, -1, 0 290, 125, 0, -1, 0 291, 125. 0, -1. 0 292, 125, 0, -1, 0 91, 125. 0, -1. 0 92, 125. 0, -1. 0 93, 125. 0, -1. 0 94, 125. 0, -1. 0 95, 125. 0, -1. 0 96, 125. 0, -1. 0 97, 125. 0, -1. 0 98, 125. 0, -1. 0 99, 125. 0, -1. 0 100, 125, 0, -1, 0 101, 125. 0, -1. G 102, 125, 0, -1, 0

```
41, 125. 0, -1. 0
 42, 125, 0, -1, 0
 43, 125. 0, -1. 0
 44, 125, 0, -1, 0
 45, 125. 0, -1. 0
 46, 125. 0, -1. 0
 47, 125. 0, -1. Q
 48, 125. 0, -1. 0
 49, 125. 0, -1. 0
 50, 125. 0, -1. 0
 51, 125. 0, -1. 0
 21, 125. 0, -1. 0
 22, 125. 0, -1. 0
 23, 125. 0, -1. 0
 24, 125. 0, -1. 0
 25, 125. 0, -1. 0
 26, 125. 0, -1. 0
 27, 125, 0, -1, 0
 28, 125, 0, -1, 0
 29, 125. 0, -1. 0
 30, 125. 0, -1. 0
 31, 125. 0, -1. 0
 32, 125, 0, -1, 0
 33, 125, 0, -1, 0
 34, 125, 0, -1, 0
 35, 125, 0, -1, 0
 36, 125, 0, -1, 0
 37, 125. 0, -1. 0
 38, 125, 0, -1, 0
 323, 125. 0, -1. 0
 423, 125. 0, -1. 0
 424, 125. 0, -1. 0
7, 125. 0, -1. 0
6, 125. 0, -1. 0
135, 125, 0, -1, 0
235, 125. 0, -1. 0
335, 125, 0, -1, 0
150, 125. 0, -1. 0
151, 125. 0, -1. 0
152, 125. 0, -1. 0
136, 125, 0, -1, 0
117, 125. 0, -1. 0
120, 125. 0, -1. 0
126, 125, 0, -1, 0
128, 125, 0, -1, 0
130, 125. 0, -1. 0
107, 125. 0, -1. 0
208, 125. 0, -1. 0
108, 125, 0, -1, 0
122, 125, 0, -1, 0
123, 125. 0, -1. 0
223, 125. 0, -1. 0
209, 125. 0, -1. 0
109, 125. 0, -1. 0
124, 125. 0, -1. 0
110, 125, 0, -1, 0
112, 125, 0, -1, 0
133, 125, 0, -1, 0
116, 125, 0, -1. 0
132-125.0,-1 0
```

#### Table 3 (con't)

```
115, 125, 0, -1, 0
     131, 125, 0, -1, 0
     114, 125, 0, -1 0
     134, 125, 0, -1, 0
     113, 125, 0, -1, 0
     -1,125.0,1.0
END
BCD BSOURCE DATA
     60.1.707
     61, 1. 707
     62, i. 707
    63, 1, 707
    64, 150216
    65, 150216
    66, 112662
    67, 150216
    70, 1, 707
    71, 1, 707
    72, 1. 707
     73, 1. 707
    74, 150216
    75, 150216
    76, 112662
    77, 150216
    80, 1, 767
    81.1.707
    82, 1, 707
83, 1, 707
    84. 150216
    85, 150216
    86, 112662
    87. 150216
    290, 18777
    291, 18777
292, 126318
91, 1.707
    927. 112662
    93, 10242
    94. 150216
    95/. 13656
    96, 61452
    97,.61452
98,.47796
    99, 47796
    100, 46089
    101, 61452
102, 112662
    417.112662
    42, 112662
43, 5121
    44, 5121
    45, 47796
    46, 47796
    47, 1, 420224
    48, 1, 420224
    49. 1707
50. 5121
    51, 1707
    217.32433
    22 112662
```

```
23, 46089
    24. 61452
    25, 46089
    26. 61452
    27, 150216
    28, 13656
    29, 13656
    30, 150216
    31, 1707
    32, 13656
    33, 150216
    34, 46089
    35, 61452
    36. 46089
    37, 61452
    38,.3414
    7, 27, 312
    6, 6, 829
    135, 6, 4866
    150, 3. 414
    151, 3, 414
    152, . 112662
136, 20, 484
END
BCD 3CONDUCTOR DATA
    1,60,121,.0391
    2,61,121,.0391
    3, 62, 121, . 0391
    4,63,121,.0391
    5,64,121,.00171
    6,65,121,.00171
    7, 66, 121, . 00171
    8,67,121,.00171
    9,70,125,.0391
    10,71,125,.0391
    11,72,125,.0391
    12,73,125,.0391
    13,74,125,.00171
    14, 75, 125, . 00171
    15, 76, 125, . 00171
    16, 77, 125, . 00171
    17,80,127,.0391
    18, 81, 127, . 0391
    19,82,127,.0391
    20, 83, 127, . 0391
    21,84,127,.00171
    22,85,127,.00171
    23, 86, 127, . 00171
    24,87,127,.00171
    25, 290, 125, . 00102
    26, 291, 125, . 00102
    27, 292, 125, . 00102
    28, 91, 121, . 00256
    29, 92, 121, . 00256
    30, 93, 121, . 00256
    31, 94, 121, . 00256
    32, 95, 121, . 00256
    33, 96, 121, . 00256
    34, 97, 121, . 00256
    35,98,121, 00256
```

36, 99, 121, 00256 37, 100, 121, 00256 38, 101, 121, 00258 39, 102, 121, , 00256 40, 91, 127, 000171 41,92,127,.000171 42, 93, 127, . 000171 43, 94, 127, . 000171 44, 95, 127, . 000171 45, 96, 127, 1000171 46, 97, 127, . 000171 47, 98, 127, . 000171 48,99,127,.000171 49,100,127,.000171 50, 101, 127, 000171 51, 102, 127, . 000171 52, 41, 113, . 00151 53, 42, 113, . 00151 54, 43, 113, . 00151 55, 44, 113, . 00151 56, 45, 113, . 00151 57, 46, 113, . 00151 58, 47, 113, . 00478 59,48,113,.00478 60, 49, 113, . 00151 61,50,113,.00151 62, 51, 113, . 00151 63, 21, 323, . 0135 64, 22, 323, . 0135 **65, 23, 323,** . 0135 66, 24, 323, . 0135 67, 25, 323, . 0135 68, 26, 323, . 0135 69, 27, 323, . 0135 70, 28, 323, . 0135 71, 29, 323, . 0135 72, 30, 323, . 0135 73, 31, 223, . 0434 74, 32, 323, . 0135 75, 33, 323, . 0135 76, 34, 323, . 0135 77, 35, 323, . 0135 78, 36, 323, . 0135 79, 37, 323, . 0135 80, 38, 223, . 027 81, 323, 423, . 31 82, 323, 424, . 31 83, 423, 123, . 31 84, 424, 123, . 31 85, 7, 108, 1, 12 86, 7, 208, 1, 12 87, 7, 131, 8, 62 88, 6, 109, . 0758 89, 6, 209, . 0758 90, 6, 134, 3, 01 91, 135, 235, . 237 92,235,335,213 93, 335, 134, 3, 79 94, 150, 110, . 00188 95, 151, 110, . 00188

```
76,152,110,.00198
      97, 136, 110, 4, 98
      98, 121, 125, . 48
      99, 125, 127, . 48
      100, 121, 128, . 50
       101, 127, 130, . 50
       102, 117, 120, . 114
       103, 117, 126, . 114
      104, 117, 128, . 114
       105, 117, 130, . 114
       106, 107, 120, . 114
      107, 107, 126, . 114
       108, 107, 128, . 114
      109, 107, 130, . 114
      110, 107, 208, 3, 16
      111, 107, 209, 3. 16
      112, 110, 109, 3, 16
      113, 110, 108, 3, 16
      114, 107, 122, 8, 62
      115, 110, 124, 8, 62
      114,208,209,.0608
      117, 108, 109, . 0408
      118,123,223,.77
      119,122,123, 77
      120, 223, 124, 1, 12
      121, 110, 112, 12 64
      122, 117, 116, . 82
      123, 117, 133, 82
      124, 116, 115, . 87
      125, 115, 114, . 87
      126, 114, 113, . 97
      127, 133, 132, . 97
      128, 132, 131, . 87
      129, 131, 134, . 87
      130, 116, 133, . 626
      131, 115, 132, . 626
      132, 114, 131, . 626
      133, 113, 134, . 626
      134, 113, 1, . 082
      135, 114, 1, . 082
      136, 115, 1, . 082
      137, 116, 1, . 082
      138, 131, 1, . 082
      139, 132, 1, . 082
      140, 133, 1, . 082
      141, 134, 1, . 082
 END
 BCD GCONSTANTS DATA
      NLOOP=100, ARLXCA=1. 0, DRLXCA=1. 0
 END
 BCD GARRAY DATA
 END
 BCD GEXECUTION
DIMENSION X(125)
NDIM=125
NTH=0
      CINDSS
 END
 BCD GVARIABLES 1
 END
```

BCD SVARIABLES 2 END BCD SOUTPUT CALLS TPRINT END BCD SEND OF DATA

#### TABLE 4

#### INDA RESULTS

```
*EOR
      SYSTEMS IMPROVED NUMERICAL DIFFERENCING ANALYZER
      ASOC REMOTING
             OLOGOOD DTIMEUM O.
                                                              0)= 0;
 TIME=
                                                CaGuin(
       60= 4.250U0E+02
                                  61= 1,25000Et94
                                                             62= 1,25000E+02
                                  67= 1,25000E=02
74= 1,25000E=02
                                                            121= 1,25000E+02
75= 1,25000E+02
       66= 1.25000E+02
                                                       T
       73= 1,25000E+02
 T
                            T
                                                       T
       80= 1,25000E+02
                                  81= 1.25000E=64
                                                             82= 1/25000E+02
 T
                            T
                                                       T
       86= 1.25000E+02
 T
                                  87= 1.25000# 02
                                                            127= 1,25000E+02
                            T
                                                       Ţ
                                  92= 1,250008±02
98= 1,250008±02
       91= 1.250V0E+02
                                                             93= 1,25000E+02
 T
                                                       T
       97= 1.25000E+02
                                                             99= 1,25000E+02
 T
                                                       T
       41= 1,25000E+02
 T
                                  42= 1.25000E=02
                                                             43= 1,25000E+02
                                                       T
       47= 1.25000E+02
                                  48= 1.250002-02
                                                             49= 1,25000E+02
                            T
                                                      T
       22= 1.250002+02
                                  23= 1.25000E+02
                                                             24= 1/25000E+02
 T
                            T
                                                      T
       28= 1.25000E+02
                                  29= 1.45000E±04
35= 1.25000E±04
                                                             30= 1,25000E+02
 T
                            T
                                                      Ţ
       34= 4.25000E+02 T
                                                             36= 1,25000E+02
                                                     T
                                 424# 1.25000E+62
150= 1.25000E+62
      423= 1.25000E+02
335= 1.25000E+02
                                                            7= 1,25000E+02
151= 1,25000E+02
 T
                            T
                                                       7
                                 126= 1,25000E+02
122= 1,25000E+02
110= 1,25000E+02
131= 1,25000E+02
      120= 1.25000E+02
 T
                            T
                                                       T
                                                            128= 1,25000E+02
      108= 1.25000E+02
 Ţ
                            T
                                                       T
                                                            123= 1,25000E+02
      124= 1,250000+02
                                                            112= 1,25000E+02
 T
                            Ţ
                                                       T
      115= 1.25000E+02
                                                            114= 1,250002+02
                                                       T
             O .OUUO DTIMEU O.
                                                              U)= Q.
 TIME
                                               CoGuin(
       60= 3,11459E+02
                                  61= 3,11459E+04
67= 3,55647E+04
                                                             62= 3,11459E+02
       66= 3.336862+02
                                                            121= 2,68700E+02
75= 3,598142+02
                                                       T
                                  74= 3,598148+02
       73= 3.45626E+02
                            T
 T
                                                       T
       80= 3.04504E+02
                            T
                                  81= 3.04564E+04
 T
                                                       T
                                                             82= 3,04564E+02
                                  87= 3.487528704
       86= 3.26791E+02
 T
                            T
                                                            127= 2/61797E+02
                                                       T
       91= 8.93314E+02
                                  92= 3,055218+04
 T
                            T
                                                             93= 3,057715+02
                                                       T
       97= 4,932848+02
                                  98= 4.432818-04
 T
                            T
                                                             99= 4.43281E+02
                                                       I
       41= 2.53503E+02
                                  42= 2.53503E+02
 T
                            T
                                                       T
                                                             43= 5,18032E+02
                                  48= 4.760118-04
 T
       47= 4.70011E+02
                            T
                                                       T
                                                             49= 2,91939E+02
       22= 2,00305E+02
                                  23= 2,321602-04
 T
                            T
                                                       T
                                                             24= 2,4354QE+02
                                 29= 2.081358+02
35= 2.435408+02
424= 1.913028+02
       28= 2.08135E+02
 T
                            T
                                                       Ţ
                                                             30= 2,09147E+02
 T
       34= 2,32100E+02
                            r
                                                       T
                                                             36= 2/32160B+02
      423= 1.91302E+02
                            T
 T
                                                       T
                                                              _{7} = 1_{48}3590E+02
                                 150= 1,996238+09
126= 1,820578+09
122= 1,829028+04
110= 1,812488+04
      335= 1,83298E+02
                            T
                                                            151= 1.99623E+03
 T
                                                       T
 Ţ
      120= 1.82057E+02
                            Ţ
                                                       T
                                                            128= 2,41565E+02
      10g= 1.81113E+02
                            T
 T
                                                       T
                                                            123= 1.845612+02
      124= 1.80442E+02
                                                            112= 1,8124gE+02
 T
                           Ţ
                                                       T
                                 131= 1.818588404
      115= 1.73430E+02
                                                       T
                                                            114= 1,75904E+02
                                  739954+02
 LOOPCT #
                 55 ENGBAL =
        END OF DATA
*BOR
                                       60
```

PAGE

1

CDC 6600 VERSION

IZNDA

T E	MPCC(	<b>6</b> j <b>=</b>	V •	R E	rxcc(	0)=	0.		
T	63=	1,25000	E+02	r 64=	1.25000	E+02	T	65=	1,250008+0
Ţ	70=	1,45000		r 71=	1,25000	E+02	T	72=	1,250002+0
r	·/6=	1,45000	E+02	r 77=			T		1,45000E+0
r	ģ3≈	1,45000		r 64=	1,25000	E+02	T		1,45000E+0
r	290=	1,25000		r 291=					1,450008+0
r	ğ4=	1,45000		r 95=		E+02	T	90=	1,450002+
T	100=	1,25000	) <b>5</b> +02		1,25000	E+02		102=	1,250008+0
T	44=	1,25000	E+U2	r 45=		E+02	Ţ	40=	1.45000E+0
r	50=	1,25000		r 51=			T		1,45000E+0
T	25≈	1,45000		r 26=			T	27-	1,45000g+0
ľ	31=	1,25000		r 32=			T		1,25000E+0
r	37*	1,45000	/Z+0,2	r jē≖	1,25000	<b>E</b> +0.2	T	3	1,250005+0
r	6=	1,45000	E#02 '	r <sub>1</sub> 35=	1.25000	<b>E</b> ±02	T ;	235=	1,4500QE+(
r	152=	1,25000	z+02	136=	1,25000	E+02	T	115=	1,250002+0
ľ	130=	1,25000	£+92 !	r 107=	1.25000	E+02			1,45000g+
r	223=	1,25000	z+ý2 !	=و20 ع	1.25000	<b>E</b> +02			1,25000E+
ľ	133=	1,25000	E+02 :	r 116=	1,25000	E+02	T	132=	1,45000#+0
r	134=	1,45000	z+02	1 1 1 3 =	1,25000	<b>E</b> +02	T	7=	1,450005+0
r e j	MPCC(	o)=	Ų,	RE	TXCC(	37)=	9,34	57 <u>5</u> 5-	ήĵ
r	63 <b>=</b>	3,11459	E+92	64=	3,55647	E+02	T		3,55647E+0
r	70=	3,15626 3,37853	E+02		3,15626	E+02	T	72=	3,156268+0
	/0=	3,3/833	E+02	77=		E+02		125= .	2.728692+0
r	83=	4,56958	E+02	84=	3,48752	E+02	T		3,48752g+(
	290=	4,30938	E+02	291=	4.5695g	E+02		294=	3,46,112+0
•	ġ4 <b>≈</b>	3,232/2	E+UZ :	95=	3,18272	E+02	T		4,932848+0
	1004	37030	MAN P	r 101=	4,93284	E+U2		102-	3,095212+(
7	50-	5,19032	WACO !		4,95423		T		4.95423 <b>2</b> +(
C C	- 10 = -	5,18032 2,32160	ETVZ :	r 51= r 26=	2,91939 2,43540	シャリル サムウラ	T T		2,22044E+0
[ [	31=	1.04720	# <b>TV4</b>	_	7 7 4 3 5	PAÚ2			2,091478+0 4,091478+0
	37=	2,43540	MAUS S	r 32= r 38=	2,08135 1,93438	型マリム 第五百つ	T T	33-	4.991475+0 1.990065+0
	6=	1.03760	2402	135=	2,38700			235=	2,121022+0
r		2,401y5	K+02	136=					1.622002+0
r r			MTV4	, ,,,,,,	1 4 5 7 3 3 4	# T V &	•	117-	1 4 5 4 4 0 0 5 7 0
r r	152=	2 36 24	Red2				ጥ 1	204	1.ころのつのモエバ
r r r	130=	2,36824	E+02 !	107=	1.82840	E+02			1.83020 <b>8</b> +0
r 1	130= 130= 223= 133=	2,36824 1,817/2 1,75357	E+02 :	107= 209=		E+02 E+02	T	109=	1.830208+0 1.803658+0 1.750378+0

#### VII THERMAL MEASUREMENT OF THE ASOC MODULE

After the ASOC module was constructed, a test unit was furnished to the Systems Reliability & Engineering Branch for thermal measurement of the unit. This was necessary since many of the predicted temperatures were much too high to allow a reliable operation of the ASOC module. To accomplish the measurement, the ASOC unit was disassembled and thermocouples were attached to a number of integrated circuit packages. The thermocouples were run through the ASOC module through an opening on the end of the module. These wires were connected to a Hewlett Packard data acquisition system to record and process the data. Once it was hooked up the ASOC module was powered and temperatures were taken until the unit reached thermal steady state. Temperatures of all the IC's were recorded every five minutes. The ASOC module was tested in the ambient laboratory environment (about 70°F). The following contains the measured temperatures of a number of IC's:

#### TEST RESULTS

Scanner Channel	Thermocouple Location	Measured Temperature( <sup>O</sup> C)	(°C)	Field Temperature* (°C)(°F)	
00	Ref Junction	27			
01	Ambient	23			
02	Node 91	50	21	73 163	
03	Node 96	44	21	73 163	
04	Node 62	44	21	73 163	
05	Node 67	41	18	70 158	
06	Node 47	57	34	86 187	
07	Node 43	47	24	76 169	
08	Node 150	47	24	76 169	
09	Node 31	36	13	65 149	
10	Node 25	42	19	71 160	
11	Node 135	42	19	71 160	

<sup>\*</sup>  $\triangle$  = Measured node temperature - measured ambient temperature

<sup>\*</sup> Field Temperature =  $52^{\circ}$ C +  $\triangle$ 

#### VIII COMPARISON OF THE PREDICTED AND MEASURED TEMPERATURES

Table 5 shows data that compares the predicted temperatures with the measured temperatures. It also shows how a major source of error impacted the prediction.

The first column shows the node number of the piece part under the heading of the printed circuit board on which it is placed. The second column has the temperature of the piece part that was predicted by the thermal model. The third column has the SINDA prediction that has been modified by a factor to account for electrical stress. The fourth column has the measured temperatures.

The SINDA computer analysis predicted temperatures are off by a large amount, approximately a factor of two for conduction cooled boards and a factor of four for convection cooled boards. During examination of the analysis and discussions with the electrical design engineers, a major source of error was found.

During the thermal analysis, the heat output for each electronic piece part was obtained by multiplying the maximum rated voltage by the maximum rated amperage. This, of course, gave the maximum wattage possible. When the actual power used by the ASOC unit was measured, it was found to be much smaller than the maximum rated power. This produced a large error in the temperature prediction. To eliminate this type of error, the electrical stress should be calculated, then used to calculate the power output for each piece part. In this way, much of the error incurred during an analysis could be avoided. When the predicted temperatures are multiplied by a general power factor, the temperatures of the conductively cooled boards are much closer to the actual temperatures, usually within  $40^{\circ}F$ . This is about right since the power factor is an average value for the entire ASOC unit and varied for various ASOC units between .4 and .6.

Even with using the correct power output for each IC, the convectively cooled board's temperatures were still off by a factor of two. This shows that the thermal model used for these boards is wrong and should be refined. One of the problems in making these models was the closeness of the boards and the fact that they used conductive cooling through air instead of

the common practice of using metal heat sinks. Because of this, normally used mathematical models (based on empirical data) could not be used directly, and estimations had to be made. This requires considerable experience in using this form of cooling with the given constraints. The errors were on the conservative side and did show up possible problem areas that were then evaluated with thermocouples during the test.

TABLE 5

		TEMPERATURE COMPARISON			
Item	SINDA Prediction o <sub>F</sub>	SINDA with Power Correction of	Measured Temperature OF	Notes	
Power Supply				Conduction	
135	239	146	160		
6	184	113			
7	184	113			
T/S				Convection	
41	254	156			
42	254	156			
43	598	317	169		
44	518	317			
45	495	303			
46	495	303			
47	476	291	187		
48	476	291			
49	476	291			
50	518	317			
51	292	179			
PCM				Conduction	
80	305	187			
81	305	187			
82	305	187			
83	305	187			
84	349	214			
85	349	214			
86	349	214			

TABLE 5 (con't)

Item	SINDA Grediction F	SINDA with Power Correction of	Measured Temperature <sup>O</sup> F	Notes
87	349	214		Convection
PTT	453	000		Convection
290	457	280		
291	280			
292	397	243		
PCM				Conduction
60	311	190		
61	311	190		
62	311	190	163	
63	311	190		
64	356	218		
65	356	218		
66	356	218		
67	356	218	158	
70	316	193		
71	316	193		
72	316	193		
73	311	193		
74	360	220		
75	360	220		
76	360	220		
77	360	220		
PCM Digit				Convection
91	893	335	163	
92	310	190		
93	306	187		
94	323	198		
95	318	195		
96	493	302	163	

TABLE 5 (con't)

Item	SINDA Prediction F	SINDA with Power Correction F	Measured Temperature F	Notes
97	493	302		
98	443	271		
99	443	271		
100	437	267		
101	310	190		
102	310	190		
Connector				Convection
152	240	147		
151	1996	1222		
150	1996	1222	169	
T/R Board				Conduction
21	222	136		
22	206	126		
23	232	142		
24	244	149		
25	232	126	160	
26	244	149		
27	209	128		
28	208	127		
29	208	127		
30	209	128		
31	185	113	149	
32	208	127		
33	209	128		
34	232	126		
35	244	149		
36	232	126		
37	244	149		
38	194	119		

#### REFERENCE

- 1. Military Handbook 251, Reliability/Design Thermal Applications, 1978
- a. Pg 484. A minimum thickness for a layer of thermal grease is .005in. since contacting surfaces are not flat, a thickness of .02in. is used.
- b. Pg 666. Using a temperature of  $60^{\circ}$ C for the air inside the case, a thermal conductivity of .00075  $\frac{\text{watt}}{\text{in}^{\circ}}$  is obtained after interpolation and unit conversions.
  - c. Pq 656. Thermal conductivity for copper.
- d. Pg 651. For a semi-smooth surface, curve "e" is chosen. Using a contact pressure of 25psi, a value of  $.3in^{20}C$  is obtained for  $\frac{1}{h_c}$  watt
- 2. Dave S. Steinberg, Cooling Techniques for Electronic Equipment (New York: John Wiley & Sons, 1980), Pg 63.
- 3. James P. Smith, <u>SINDA User's Manual</u>, (NASA Manned Spacecraft Center: TRW Systems Group, April 1971).

# MISSION

## Rome Air Development Center

RADC plans and executes research, development, test and selected acquisition programs in support of Command, Control Communications and Intelligence  $\{C^3I\}$  activities. Technical and engineering support within areas of technical competence is provided to ESP Program Offices  $\{POs\}$  and other ESP elements. The principal technical mission areas are communications, electromagnetic guidance and control, surveillance of ground and aerospace objects, intelligence data collection and handling, information system technology, ionospheric propagation, solid state sciences, microwave physics and electronic reliability, maintainability and compatibility.