

AD-A126 405

ANALYSIS OF THREE-DIMENSIONAL VISCOUS INTERNAL FLOWS
(U) CINCINNATI UNIV OH DEPT OF AEROSPACE ENGINEERING
AND APPLIED M. K N GHIA ET AL. AUG 82 AFL-82-8-65

1/1


UNCLASSIFIED

AFOSR-TR-83-0120 AFOSR-80-0160

F/G 20/4

NL

END
DATE
FILMED
4 83
DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

ADA126405



ANALYSIS OF THREE-DIMENSIONAL VISCOUS INTERNAL FLOWS

K.N. GHIA
AND
U. GHIA

This research was supported by the Air Force Office of Scientific Research, under AFOSR ~~88-0120~~ 80-0160.

Distribution of this report is unlimited.

August 1982

DTIC FILE COPY

DTIC
ELECTE
S APR 05 1983 D
E

88 04 05 149

ANALYSIS OF THREE-DIMENSIONAL VISCOUS INTERNAL FLOWS

K.N. GHIA*

AND

U. GHIA**

Department of Aerospace Engineering and
Applied Mechanics
University of Cincinnati
Cincinnati, Ohio



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

This research was supported by the Air Force Office
of Scientific Research, Bolling Air Force Base,
under AFOSR Grant No. 80-0160 with Dr. James D. Wilson
as Technical Monitor.

Distribution of this report is unlimited.

* Professor

** Research Associate Professor

AIR FORCE

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SCIENTIFIC

RESEARCH

OFFICE

OF

SC

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AFOSR-TR- 83-0120		2. GOVT ACCESSION NO. <i>AD-A126 405</i>	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) ANALYSIS OF THREE-DIMENSIONAL VISCOUS INTERNAL FLOWS		5. TYPE OF REPORT & PERIOD COVERED ANNUAL REPORT March 1, 1981-Feb. 28, 1982	
		6. PERFORMING ORG. REPORT NUMBER AFL 82-8-65	
7. AUTHOR(s) Kirti N. Ghia and Urmila Ghia		8. CONTRACT OR GRANT NUMBER(s) <i>HFOSR-80-0160</i>	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Dept. of Aerospace Engineering & Applied Mechanics University of Cincinnati Cincinnati, Ohio 45221		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 2307/A4 G1102 F	
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Office of Scientific Research/NA Building 410 Bolling Air Force Base, D.C. 20332		12. REPORT DATE August 1982	
		13. NUMBER OF PAGES 27	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified	
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited.			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) --			
18. SUPPLEMENTARY NOTES --			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Three-Dimensional Internal Flows Flow Separation, Secondary Flows Laminar and Turbulent k-ε Turbulence Model, Anisotropy Incompressible and Compressible Semi-Implicit & Implicit Numerical Methods Rectangular and Polar Curved Ducts Multi-Grid & Strongly Implicit Techniques Navier-Stokes Eqs., Parabolized NS Eqs. ADI; Block Gaussian Elimination Method			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report describes the technical progress achieved in research sponsored by the Air Force Office of Scientific Research during the period between March 1981 and February 1982. Three areas of research were pursued; two of these consist of (1) analysis of laminar and turbulent duct flows, and (2) study of laminar and turbulent separated flows. Both of these studies were aimed at acquiring a better understanding of isolated physical phenomena significant to turbomachinery applications via the use of appropriate model problems. The			

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 55 IS OBSOLETE

UNCLASSIFIED (over)

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

third area of research pursued consisted of (3) the analysis of numerical methods with the goal of improving the efficiency and accuracy of the various methods developed and implemented. In the first area of research, fine-grid asymptotic solutions were obtained for laminar flow through curved ducts of simple cross sections; also marching solutions have been obtained for turbulent flow in the entrance region of curved ducts of simple cross sections. The subject of streamwise separation is examined using the laminar flow through a constricted asymmetric channel and the laminar and turbulent flows past a thick blunt plate as the model problems. In the third category, high-Re very fine-grid solutions have been provided for the shear-driven cavity problem using a multi-grid strongly implicit method. Finally, the block Gaussian elimination method is implemented to solve the unsteady Navier-Stokes equations to provide true transient internal viscous flow solutions.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

ABSTRACT

This report describes the technical progress achieved in research sponsored by the Air Force Office of Scientific Research during the period between March 1981 and February 1982. Three areas of research were pursued; two of these consist of (1) analysis of laminar and turbulent duct flows, and (2) study of laminar and turbulent separated flows. Both of these studies were aimed at acquiring a better understanding of isolated physical phenomena significant to turbomachinery applications via the use of appropriate model problems. The third area of research pursued consisted of (3) the analysis of numerical methods with the goal of improving the efficiency and accuracy of the various methods developed and implemented. In the first area of research, fine-grid asymptotic solutions were obtained for laminar flow through curved ducts of simple cross sections; also marching solutions have been obtained for turbulent flow in the entrance region of curved ducts of simple cross sections. The subject of streamwise separation is examined using the laminar flow through a constricted asymmetric channel and the laminar and turbulent flows past a thick blunt plate as the model problems. In the third category, high-Re very fine-grid solutions have been provided for the shear-driven cavity problem using a multi-grid strongly implicit method. Finally, the block Gaussian elimination method is implemented to solve the unsteady Navier-Stokes equations to provide true transient internal viscous flow solutions.

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
	ABSTRACT	i
1	OBJECTIVES	1
2	DESCRIPTION OF SIGNIFICANT ACCOMPLISHMENTS . .	3
	Laminar and Turbulent Duct Flows	3
	Laminar and Turbulent Separated Flows . . .	5
	Numerical Methods	7
	REFERENCES	10
3	JOURNAL PAPERS PUBLISHED AND IN PREPARATION. .	12
4	PROFESSIONAL PERSONNEL	13
5	SCIENTIFIC INTERACTIONS - SEMINAR AND PAPER PRESENTATIONS	14
6	TECHNICAL APPLICATIONS	16
	TABLES	17
	FIGURES	19

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1	Values for Streamline and Vorticity Contours in Figures 6a and 6b	17
2	Properties of Primary and Secondary Vortices . .	18

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1a	Comparison of Streamwise Velocity Profiles; AR = 1, R = 100	19
1b	Effect of Dean Number on Streamwise Velocity For Polar Curved Ducts; AR=1, R=100	20
2	Effect of Dean Number on Secondary Flow for Polar Ducts - (A) Cross-Flow Streamline Contours, (B) Cross-Flow Velocity Profiles . . .	21
3	Effect of Aspect Ratio on Secondary Flow for Polar Ducts; K=100, R=100	22
4a	Steady-State Stream-Function Contours for Re=1,000. $\Delta\psi = 0.002$ Within Separation Bubble; $\Delta\psi = 0.1$ Elsewhere	23
4b	Steady-State Vorticity Contours for Re=1,000, $\Delta\omega = 2.0$	24
5a	Axisymmetric Flow Configuration and Coordinate System	25
5b	Comparison Between Predicted and Experimental Data for Velocity Profiles for Blunt Plates . . .	26
6a	Streamline Pattern for Primary, Secondary and Additional Corner Vortices	27
6b	Vorticity Contours for Flow in Driven Cavity . .	27

SECTION 1

OBJECTIVES

The objective of the present study was to develop analyses and improved understanding of viscous internal flows in a class of complex three-dimensional configurations related to turbo-machinery, using appropriate model problems.

1. Laminar and turbulent three-dimensional internal viscous flows were to be studied using the model problem of curved ducts with simple cross sections. The asymptotic form of this laminar flow was to be studied to investigate the occurrence of Dean's instability by varying the Dean number, K , and the aspect ratio of the duct cross section. An additional goal of studying this flow configuration was to provide a set of accurate asymptotic flow solutions, so that the marching solutions calculated earlier using the parabolized Navier-Stokes equations could be independently verified.
2. Separated flows were to be studied with two different objectives. For laminar flow, the model problem of a doubly infinite channel with an asymmetric constriction was to be studied to obtain solutions for high-Reynolds number flows. On the other hand, a turbulent separated-flow analysis was to be initiated to further understand the low-Reynolds number turbulence modelling techniques required at the boundaries in the second-order closure formulation of the time-averaged Navier-Stokes equations.

3. The efficiency and accuracy of semi-implicit and implicit methods were to be investigated using model problems. In the first category, the strongly implicit (SI) scheme was to be studied using the model problem of flow in a shear-driven cavity in order to improve its convergence rate. Also, the multi-grid technique was to be employed to further improve the convergence rate of semi-implicit solution techniques. In the latter category, a fully implicit scheme was to be developed for enabling direct solution of the Poisson equation in generalized orthogonal curvilinear coordinates.

The research performed in each of these areas is described briefly in the next section; the main results and conclusions obtained are also summarized.

SECTION 2

DESCRIPTION OF SIGNIFICANT ACCOMPLISHMENTS

All three areas of research proposed were initiated and the specific achievements made in these studies during this reporting period are briefly described in the following subsections.

2.1 Laminar and Turbulent Duct Flows

Asymptotic flows inside curved ducts of rectangular as well as polar cross section were analyzed using the Navier-Stokes equations in terms of the axial velocity, the axial vorticity and the cross-flow stream function. One of the objectives of this study was to investigate, for the polar duct, the possibility of Dean's instability which, for curved rectangular ducts, is characterized by the occurrence of an additional pair of secondary-flow vortices. The significance of this phenomenon is that this second pair of streamwise vortices creates additional pressure losses. To achieve this goal, the asymptotic form of the flow equations was used to calculate some benchmark solutions which serve as the only available quantitative check on the accuracy of the developing-flow numerical solutions for this class of flow problems. From the investigators' earlier work on this problem, it was felt that, for highly curved configurations, the strong coupling between the primary and the secondary flow should have to be honored by the numerical solution technique employed. In fact, Ghia et al. (1980) had observed, using an alternating-direction

implicit (ADI) method, that the simultaneous solution of the three differential equations governing the primary and the secondary flows in these highly curved configurations was essential for computational efficiency. Also, the initial conditions employed were observed to have a significant influence on the stability of the numerical scheme, particularly for cases with high Dean number K .

The strongly implicit (SI) scheme was developed to facilitate efficient high-Dean-number solutions of the coupled flow equations. Numerical experiments were conducted with all three governing equations being solved simultaneously as well as with the axial velocity equation being solved sequentially with a coupled solution of the vorticity and stream function equations. From the limited experiments conducted, it was observed that the coupling of all three equations was not crucial for the SI scheme; this was contrary to the findings for the ADI method. Further, a combined multi-grid-strongly implicit (MG-SI) scheme was also developed; brief remarks about this method will be made later in this section. Using this new method, fine-grid results were obtained by K. Ghia, U. Ghia and Shin (1981). Figures 1-3 show some of their typical results. The details of these results are given in a technical paper which was presented at the ASME Winter Annual Meeting, November 1981, in Washington, D.C. Additional details of the MG-SI method were also prepared and added to this study and the revised manuscript prepared has been submitted for journal publication.

A technical paper based on the analysis developed and the results obtained for turbulent flow inside curved ducts of regular cross section was completed by Goyal, K. Ghia and U. Ghia (1982) and has been submitted for journal publication. The wall-function approach and the low-Reynolds number modelling approach are carefully evaluated therein.

2.2 Laminar and Turbulent Separated Flow

Laminar incompressible flow with streamwise separation was studied further with the help of the model problem of a doubly infinite channel with an asymmetric constriction. The use of a semi-implicit method, such as the alternating-direction implicit (ADI) method, leads to poor convergence for this flow, particularly as the grid size is refined. To circumvent this difficulty, the ADI method for the vorticity-transport equation was coupled with the block-Gaussian elimination (BGE) method for the stream-function equation, to obtain accurate and efficient solutions for the channel flow problem. Since the analysis used the derived variables, namely, the vorticity ω , and the stream function ψ , it also provided an independent check for the results of U. Ghia et al. (1979b) which had been obtained using primitive variables. The present results for separated flow agreed well with those of U. Ghia et al. (1979b) for $Re = 100$. However, for a mildly separated flow configuration with $Re = 1000$, the present results show a very different internal structure. The results of the present true transient analysis, obtained using the ADI-BGE method, appeared to be

converging to steady-state values. These results for $Re = 1000$ are shown in Fig. 4. The streamline contours in Fig. 4a show four discrete eddy structures, all rotating in the clockwise sense, a transient characteristic of unsteady flows. This stable series of vortices formed on the lee side of the channel constriction shows a qualitative resemblance with an unstable series of like-rotating vortex structures in the separating boundary layer on the tail end of a blunt body shown by Prandtl and Tietjens (1934). The corresponding vorticity contours for the $Re = 1000$ flow configuration are shown in Fig. 4b. A careful reexamination of the results in the transformed plane revealed that the grid used is not adequate between the reattachment point and downstream infinity. Preliminary results have been obtained using a modified grid where the discrete eddies combine to a single eddy, a characteristic of steady flow in the constricted asymmetric channel.

A turbulent separated-flow analysis was developed for flow past a class of two-dimensional and axisymmetric blunt bodies as shown in Fig. 5a. The time-averaged Navier-Stokes equations for these flows were derived in surface-oriented conformal coordinates (ξ, η) in terms of similarity-type vorticity and stream-function variables. Turbulence closure was achieved by means of a two-equation (k, ϵ) turbulence model which enables determination of the isotropic eddy viscosity ν_t . The coupled vorticity and stream-function equations were solved simultaneously using an incremental formulation of the factored ADI scheme. Numerical solutions were obtained for a thin flat

plate and compared with available experimental and analytical data. Also, results were obtained for flow over a parabola and compared with the flat-plate results. Finally, solutions were obtained for flow past a two-dimensional semi-infinite body with a shoulder, at $Re_d = 24,000$. Typical mean-flow velocity profiles for the blunt plate were compared with the experimental data of Ota and Itasaka (1976) and are shown in Fig. 5b. All of the computed results have the same general trend as the experimental data of Ota and Narita (1978); possible causes for the differences within the separated-flow region were carefully examined. Some of these results were presented briefly by Abdelhalim, U. Ghia and K. Ghia (1982) at an AIAA Mini-Symposium at the Air Force Institute of Technology, Ohio. A full-length paper based on these results has been prepared by Abdelhalim, U. Ghia and K. Ghia (1982) for presentation at an ASME meeting.

2.3 Numerical Methods

A number of isolated effects were studied using model problems so as to maintain the accuracy and efficiency of the algorithms developed. This approach not only facilitates the assessment of various algorithms, but also provides benchmark solutions for some of the model problems used. With an eventual goal of solving flow through complex turbomachinery passages, every effort is made, during each grant period, to

improve the numerical methods already used and to develop new methods which can further enhance the convergence rate. The solution convergence rate is strongly dependent on many problem parameters, such as the Reynolds number, the mesh size and the total number of computational points. This led to carefully examining the recently emerging multi-grid (MG) technique as a useful means for enhancing the convergence rate of iterative numerical methods for solving discretized equations at a number of computational grid points so large as to be considered impractical previously.

The vorticity-stream function formulation of the two-dimensional incompressible Navier-Stokes equations was used to study the effectiveness of the coupled strongly-implicit multi-grid (CSI-MG) method in the determination of high-Re fine-mesh flow solutions. The driven flow in a square cavity was used as the model problem. Solutions were obtained for configurations with Reynolds number as high as 10,000 and meshes consisting of as many as (257 x 257) points. Figure 6a shows the streamline contours for the cavity-flow configuration with $Re = 10,000$. A magnified view of the various secondary vortices is also included. The values of ψ along the contours shown are listed in Table 1. For this case of $Re = 10,000$, the present results are in excellent agreement with those reported by Keller (1981), and are computationally very efficient. Figure 6b shows the corresponding vorticity contours with the values of ω along these contours listed in Table 1. This figure shows

that, in addition to the boundary layers at the walls, free-shear layers with high vorticity gradients appear in the interior of the cavity in a very complex manner. It was because of this complex flow structure that uniform mesh refinement was used in the present study. Earlier, some of these results were presented in a paper by U. Ghia, K. Ghia and Shin (1981) at a Multi-Grid Symposium held at NASA-Ames Research Center. The original manuscript was revised to include additional results for the convergence history of the MG-SI solution procedure. In the revised form, the paper has been accepted for publication in Journal of Computational Physics.

Towards the same goal of efficient numerical methods, the two-dimensional unsteady Navier-Stokes equations, in terms of vorticity and stream function, and generalized orthogonal coordinates, were used to analyze a fully implicit scheme developed for the general Poisson equation in this study. The vorticity-transport equation was solved using an ADI method, whereas the Dirichlet Poisson problem for the stream function was solved using a direct block Gaussian elimination (BGE) method. The BGE method was compared with the semi-direct (SD) method of Martin (1978) for the general Poisson problem for accuracy and efficiency and was found to yield a direct one-step solution, irregardless of the degree of grid clustering, with considerably improved efficiency as compared to the SD method. Osswald and K. Ghia (1981) presented detailed results of this study at a Multi-Grid Symposium held at NASA-Ames Research Center. The

manuscript is being revised to include accurate fine-grid results for the $Re = 1000$ flow configuration. The revised paper will be submitted shortly for journal publication.

REFERENCES

- Abdelhalim, A., Ghia, U. and Ghia, K.N., (1982), "Solutions of Navier-Stokes Equations for Incompressible Turbulent Flow," presented at AIAA Mini-Symposium on Aerospace Science and Technology, Air Force Institute of Technology, WPAFB, Ohio.
- Abdelhalim, A., Ghia, U. and Ghia, K.N., (1982), "Analysis of Turbulent Flow Past a Class of Semi-Infinite Bodies," submitted for presentation and publication to ASME Gas Turbine Division.
- Cheng, K.C., Lin, R. and Ou, J., (1975), "Fully Developed Laminar Flow in Curved Rectangular Channels," ASME Paper No. 75-FE-4.
- Ghia, K.N. and Sokhey, J.S., (1977), "Laminar Incompressible Viscous Flow in Curved Ducts of Regular Cross-Sections," Journal of Fluids Engineering, Vol. 88, No. 4, pp. 640-648.
- Ghia, K.N., Ghia, U., Reddy, D.R. and Shin C.T., (1980), "Analysis and Computation of Internal Viscous Flows," presented at Workshop on Application of Advanced Computational Methods, NASA-Lewis Research Center, Cleveland, Ohio.
- Ghia, K.N., Ghia, U., Shin, C.T. and Reddy, D.R., (1981), "Multi-Grid Simulation of Asymptotic Curved-Duct Flows Using a Semi-Implicit Numerical Technique," Computers in Flow Prediction and Fluid Dynamics Experiments, Editors: K.N. Ghia et al., ASME Publication.
- Ghia, U., Ghia, K.N. and Goyal, R.K., (1979a), "Three-Dimensional Viscous Incompressible Flow in Curved Polar Ducts," AIAA Paper No. 79-1536, presented at AIAA 12th Fluid and Plasma Dynamics Conference, Williamsburg, Virginia.
- Ghia, U., Ghia, K.N., Rubin, S.G. and Khosla, P.K., (197b), "Study of Incompressible Flow Separation Using Primitive Variables," presented at Symposium on Computers in Aerodynamics, Polytechnic Institute of New York, New York; also Computers and Fluids, Vol. 9, (1981), pp. 123-142.

- Ghia, U., Ghia, K.N. and Shin, C.T., (1981), "Solution of Incompressible Navier-Stokes Equations by Coupled Strongly-Implicit Multi-Grid Method," Multi-Grid Methods, NASA CP 2202.
- Goyal, R.K., Ghia, K.N. and Ghia, U., (1981), "Numerical Simulation of Three-Dimensional Turbulent Flow in Curved Ducts Using Parabolized Navier-Stokes Equations," presented at Third International Conference on Mathematical Modelling, Los Angeles, California.
- Keller, H.B., (1981), "Continuation Methods in Computational Fluid Dynamics," Numerical and Physical Aspects of Aerodynamic Flows, Editor: T. Cebeci; Springer-Verlag, New York.
- Martin, E.D., (1978), "A Split-Recoupled-Semidirect Computational Technique Applied to Transonic Flow Over Lifting Airfoils," AIAA Paper No. 78-11, presented at AIAA 16th Aerospace Sciences Meeting, Huntsville, Alabama.
- Ota, T. and Itasaka, M., (1976), "A Separated and Reattached Flow on a Blunt Plate," Journal of Fluids Engineering, Vol. 98, No. 1, pp. 79-86.
- Ota, T. and Narita, M., (1978), "Turbulence Measurements in a Separated and Reattached Flow Over a Blunt Plate," Journal of Fluids Engineering, Vol. 100, pp. 224-228.
- Osswald, G.A. and Ghia, K.N., (1981), "Study of Unsteady Incompressible Flow Using Non-Uniform Curvilinear Grids, Time Marching and a Direct Method," Multi-Grid Methods, NASA CP-2202.
- Prandtl, L. and Tietjens, O.G., (1934), Applied Hydro- and Aeromechanics, McGraw-Hill, New York, New York.

SECTION 3

JOURNAL PAPERS PUBLISHED AND IN PREPARATION

- Abdelhalim, A., Ghia, U. and Ghia, K.N., (1982), "Analysis of Turbulent Flow Past a Class of Semi-Infinite Bodies," submitted for publication in the Transactions of ASME.
- Ghia, K.N., Ghia, U. and Shin, C.T., (1982), "Study of Asymptotic Incompressible Flow in Curved Ducts Using a Multi-Grid Technique," submitted for publication in Journal of Fluids Engineering.
- Ghia, U. and Abdelhalim, A., (1982), "Longitudinal Flow Along Circular Cylinders and Thick Plates, Including Blunt Leading-Edge Separation," accepted for publication in AIAA Journal.
- Ghia, U., Ghia, K.N. and Shin, C.T., (1982), "High-Re Solutions for Incompressible Flow Using the Navier-Stokes Equations and a Multi-Grid Method," accepted for publication in Journal of Computational Physics.
- Goyal, R.K., Ghia, K.N. and Ghia, U., (1982), "Numerical Simulation of Three-Dimensional Turbulent Flow in Curved Ducts Using Parabolized Navier-Stokes Equations," submitted to International Journal of Mathematical Modelling.
- Mikhail, A.G. and Ghia, K.N., (1982), "Analysis and Asymptotic Solutions of Compressible Turbulent Corner Flow," Journal of Engineering Power, Vol. 104, No. 3, pp. 571-579.
- Osswald, G.A. and Ghia, K.N., (1982), "Application of Block Gaussian Elimination to the Study of Unsteady Incompressible Flows," submitted for publication in Journal of Computational Physics.

SECTION 4

PROFESSIONAL PERSONNEL

The principal investigators for the research reported herein were Professors K.N. Ghia and U. Ghia, of the Department of Aerospace Engineering and Applied Mechanics, University of Cincinnati. They were assisted, periodically, by Mr. A.A. Abdelhalim, Mr. G.A. Osswald and Mr. C.T. Shin, graduate students pursuing their advanced degrees in the same Department. Drs. A.G. Mikhail and R.K. Goyal, formerly graduate students in the Aerospace Engineering and Applied Mechanics Department, contributed by aiding in the preparation and presentation of technical papers based on their Ph.D. dissertations completed earlier.

SECTION 5

SCIENTIFIC INTERACTIONS - SEMINAR AND PAPER PRESENTATIONS

Invited Lectures

Ghia, K.N., (1981), A Series of 4 Lectures presented at the Indian Institute of Technology, Bombay, India, in the area of Complex Three-Dimensional Internal and External Flows and on Application of Higher-Order Techniques and Direct Solvers in Viscous Flows.

Ghia, K.N. and Ghia, U., (1981), "Use of Multi-Grid Method for Solution of Incompressible Navier-Stokes Equations," presented at First Computational Fluid Dynamics Conference, Vikram Sarabhai Space Center, Trivandrum, India.

Ghia, U., (1981), A Series of 4 Lectures presented at the Indian Institute of Technology, Bombay, India, in the areas of Complex Grid Generation and Advanced Numerical Methods Used in Computational Fluid Dynamics.

Ghia, U., (1981), "Analysis of Low-Speed Separated Flows," presented at the Air Force Institute of Technology, Wright Patterson Air Force Base, Ohio.

Contributed Papers

Abdelhalim, A., Ghia, U. and Ghia, K.N., (1982), "Solutions of Navier-Stokes Equations for Incompressible Turbulent Flow," presented at AIAA 8th Annual Mini-Symposium on Aerospace Science and Technology, AFIT, WPAFB, Ohio.

Ghia, K.N., Ghia, U., Shin, C.T. and Reddy, D.R., (1981), "Multi-grid Computations of Asymptotic Three-Dimensional Flow in Curved Ducts Using a Semi-Implicit Numerical Technique," presented at Symposium on Computers in Flow Predictions and Fluid Dynamics Experiments, ASME Winter Annual Meeting, Washington, D.C.

Ghia, U. and Abdelhalim, A., (1982), "Navier-Stokes Solutions for Longitudinal Flow Along Circular Cylinder, Including Blunt Leading-Edge Separation," AIAA Paper 82-0024, presented at the AIAA 20th Aerospace Sciences Meeting, Orlando, Florida.

Ghia, U., Ghia, K.N. and Shin, C.T., (1981), "Solution of Incompressible Navier-Stokes Equations by Coupled Strongly-Implicit and Multigrid Methods," presented at Symposium on Multigrid Methods, Moffett Field, California.

- Goyal, R.K., Ghia, K.N. and Ghia, U., (1981), "Numerical Simulation of Three-Dimensional Turbulent Flow in Curved Ducts Using Parabolized Navier-Stokes Equations," presented at Third International Conference on Mathematical Modelling, Los Angeles, California.
- Mikhail, A.G. and Ghia, K.N., (1981), "Analysis and Asymptotic Solutions of Compressible Turbulent Corner Flow," ASME Paper No. 81-GT-149, presented at the 26th International Gas Turbine Conference, Houston, Texas.
- Osswald, G.A. and Ghia, K.N., (1981), "Study of Unsteady Incompressible Flow Using Non-Uniform Curvilinear Grids, Time Marching and a Direct Method," presented at Symposium on Multigrid Methods, Moffett Field, California.
- Shin, C.T., Ghia, K.N. and Ghia, U., (1981), "Solution of Navier-Stokes Equations Using the Multi-Grid Method," presented at the AIAA 7th Annual Mini-Symposium on Aerospace Science and Technology, AFIT, Wright Patterson Air Force Base, Ohio.

SECTION 6

TECHNICAL APPLICATIONS

Of the various areas of research pursued, two appear to be most useful to the technical community. The multi-grid solution procedure formulated for the Navier-Stokes equations for determining fine-grid results for high-Re flows is a unique capability developed in the present research. This is particularly useful because, although the multi-grid procedure is generally recognized as beneficial for accelerating convergence, its adaptation to the solution of high-Re viscous flows has been extremely limited thus far. Secondly, the unsteady-flow solution procedure using time marching and block-Gaussian elimination yields useful information about transient separated internal flows. Both of these developments provide highly accurate benchmark solutions for the problems to which these have been applied so far. Both of these programs are developed in modular form, and several of the modules are prepared for general-purpose use and can be easily implemented in other applications. Some other researchers have already requested for some of these modules.

TABLE 1. VALUES FOR STREAMLINE AND VORTICITY
CONTOURS IN FIGURES AND

Stream Function				Vorticity	
Contour Letter	Value of ψ	Contour Number	Value of ψ	Contour Number	Value of ω
a	-1.0×10^{-10}	0	1.0×10^{-8}	0	0.0
b	-1.0×10^{-7}	1	1.0×10^{-7}	± 1	± 0.5
c	-1.0×10^{-5}	2	1.0×10^{-6}	± 2	± 1.0
d	-1.0×10^{-4}	3	1.0×10^{-5}	± 3	± 2.0
e	-0.0100	4	5.0×10^{-5}	± 4	± 3.0
f	-0.0300	5	1.0×10^{-4}	5	4.0
g	-0.0500	6	2.5×10^{-4}	6	5.0
h	-0.0700	7	5.0×10^{-4}		
i	-0.0900	8	1.0×10^{-3}		
j	-0.1000	9	1.5×10^{-3}		
k	-0.1100	10	3.0×10^{-3}		
l	-0.1150				
m	-0.1175				

TABLE 2. PROPERTIES OF PRIMARY AND SECONDARY VORTICES

No.	Property	Re	100	400	1000	3200	5000	7500	10000
Primary	$\psi_{\min}$		-0.103423	-0.113909	-0.117929	-0.120377	-0.118966	-0.119976	-0.119731
	$\omega_{v.c.}$		3.16646	2.29469	2.04968	1.98860	1.86016	1.87987	1.88082
	Location, x,y		0.6172, 0.7344	0.5547, 0.6055	0.5313, 0.5625	0.5156, 0.5469	0.5117, 0.5352	0.5117, 0.5322	0.5117, 0.5335
	$\psi_{\max}$		--	--	--	7.27682x10 ⁻⁴	1.45641x10 ⁻³	2.04620x10 ⁻³	2.42103x10 ⁻³
1st	$\omega_{v.c.}$		--	--	--	-1.71161	-2.08843	-2.15507	-2.18276
	Location, x,y		--	--	--	0.0547, 0.8984	0.0625, 0.9102	0.0664, 0.9141	0.0703, 0.9141
	H_L		--	--	--	0.0859	0.1211	0.1445	0.1589
	V_L		--	--	--	0.2057	0.2693	0.2993	0.3203
BL	$\psi_{\max}$		1.74877x10 ⁻⁶	1.41951x10 ⁻⁵	2.31129x10 ⁻⁴	9.78236x10 ⁻⁴	1.36119x10 ⁻³	1.46709x10 ⁻³	1.51829x10 ⁻³
	$\omega_{v.c.}$		-1.55509x10 ⁻²	-5.69697x10 ⁻²	-0.36175	-1.06301	-1.53055	-1.78511	-2.08560
	Location, x,y		0.0313, 0.0391	0.0508, 0.0469	0.0859, 0.0781	0.0859, 0.1094	0.0703, 0.1367	0.0645, 0.1504	0.0586, 0.1641
	H_L		0.0781	0.1273	0.2188	0.2844	0.3184	0.3339	0.3438
BR	V_L		0.0781	0.1081	0.1680	0.2305	0.2643	0.2793	0.2891
	$\psi_{\max}$		1.25574x10 ⁻⁵	6.42352x10 ⁻⁴	1.75102x10 ⁻³	3.13955x10 ⁻³	3.08358x10 ⁻³	3.28484x10 ⁻³	3.41831x10 ⁻³
	$\omega_{v.c.}$		-3.30749x10 ⁻²	-4.33519x10 ⁻¹	-1.15465	-2.27365	-2.66354	-3.49312	-4.0531
	Location, x,y		0.9453, 0.0625	0.8906, 0.1250	0.8594, 0.1094	0.8125, 0.0859	0.8086, 0.0742	0.7813, 0.0625	0.7656, 0.0586
BL	H_L		0.1328	0.2617	0.3034	0.3406	0.3565	0.3779	0.3906
	V_L		0.1484	0.3203	0.3536	0.4102	0.4180	0.4375	0.4492
	$\psi_{\min}$		--	-7.67738x10 ⁻¹⁰	--	-6.33001x10 ⁻⁸	-7.08860x10 ⁻⁸	-1.83167x10 ⁻⁷	-7.75652x10 ⁻⁷
	$\omega_{v.c.}$		--	9.18377x10 ⁻⁴	--	1.44550x10 ⁻²	1.88395x10 ⁻²	1.72980x10 ⁻²	2.75450x10 ⁻²
2nd	Location, x,y		--	0.0039, 0.0039	--	0.0078, 0.0078	0.0117, 0.0078	0.0117, 0.0117	0.0156, 0.0195
	H_L		--	0.0039	--	0.0078	0.0156	0.0234	0.0352
	V_L		--	0.0039	--	0.0078	0.0163	0.0254	0.0441
	$\psi_{\min}$		--	-1.86595x10 ⁻⁸	-9.31929x10 ⁻⁸	-2.51648x10 ⁻⁷	-1.43226x10 ⁻⁶	-3.28148x10 ⁻⁵	-3.14111x10 ⁻⁴
BR	$\omega_{v.c.}$		--	4.38726x10 ⁻³	8.52782x10 ⁻³	9.74230x10 ⁻³	3.19311x10 ⁻²	1.41058x10 ⁻¹	3.14111x10 ⁻¹
	Location, x,y		--	0.9922, 0.0078	0.9922, 0.0078	0.9844, 0.0078	0.9805, 0.0195	0.9492, 0.0430	0.9492, 0.0430
	H_L		--	0.0156	0.0078	0.0254	0.0528	0.1270	0.257
	V_L		--	0.0156	0.0078	0.0234	0.0417	0.0938	0.257
3rd	$\psi_{\max}$		--	--	--	--	--	1.58111x10 ⁻⁹	5.67510x10 ⁻⁹
	Location, x,y		--	--	--	--	--	0.9961, 0.0039	0.9961, 0.0039
	H_L		--	--	--	--	--	0.0039	0.0039
	V_L		--	--	--	--	--	0.0039	0.0039
Work Unit,			18.84	18.08	31.56	78.25	70.8125	68.50	
CPU seconds			55.59	215.05	92.27	207.26	734.49	705.62	
Mesh Point,			129	257	129	129	257	257	

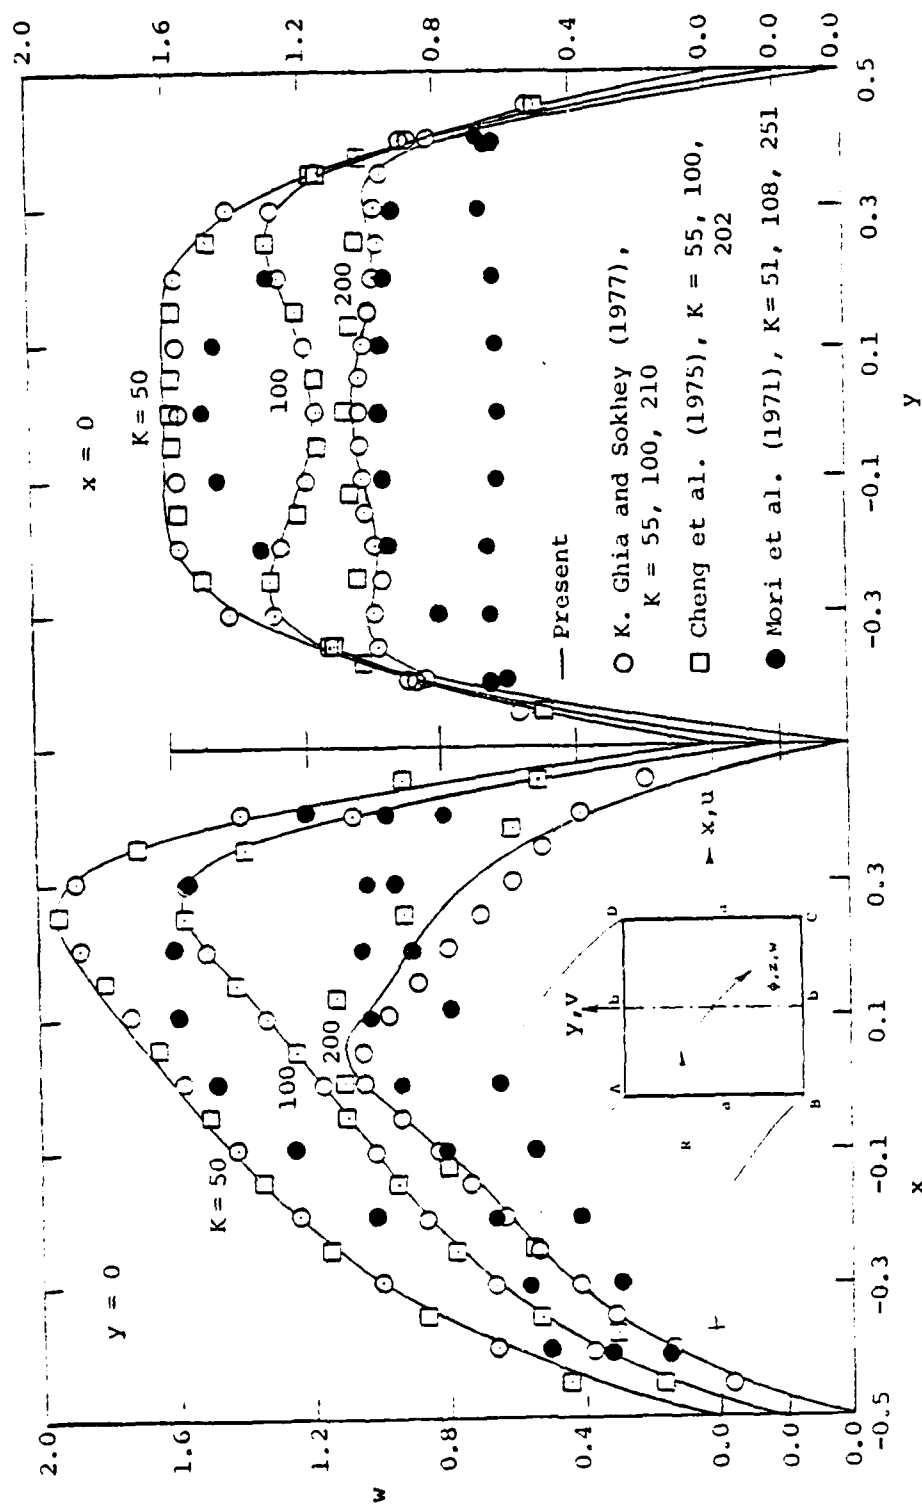


FIG. 1a. COMPARISON OF STREAMWISE VELOCITY PROFILES; $AR = 1$, $R = 100$.

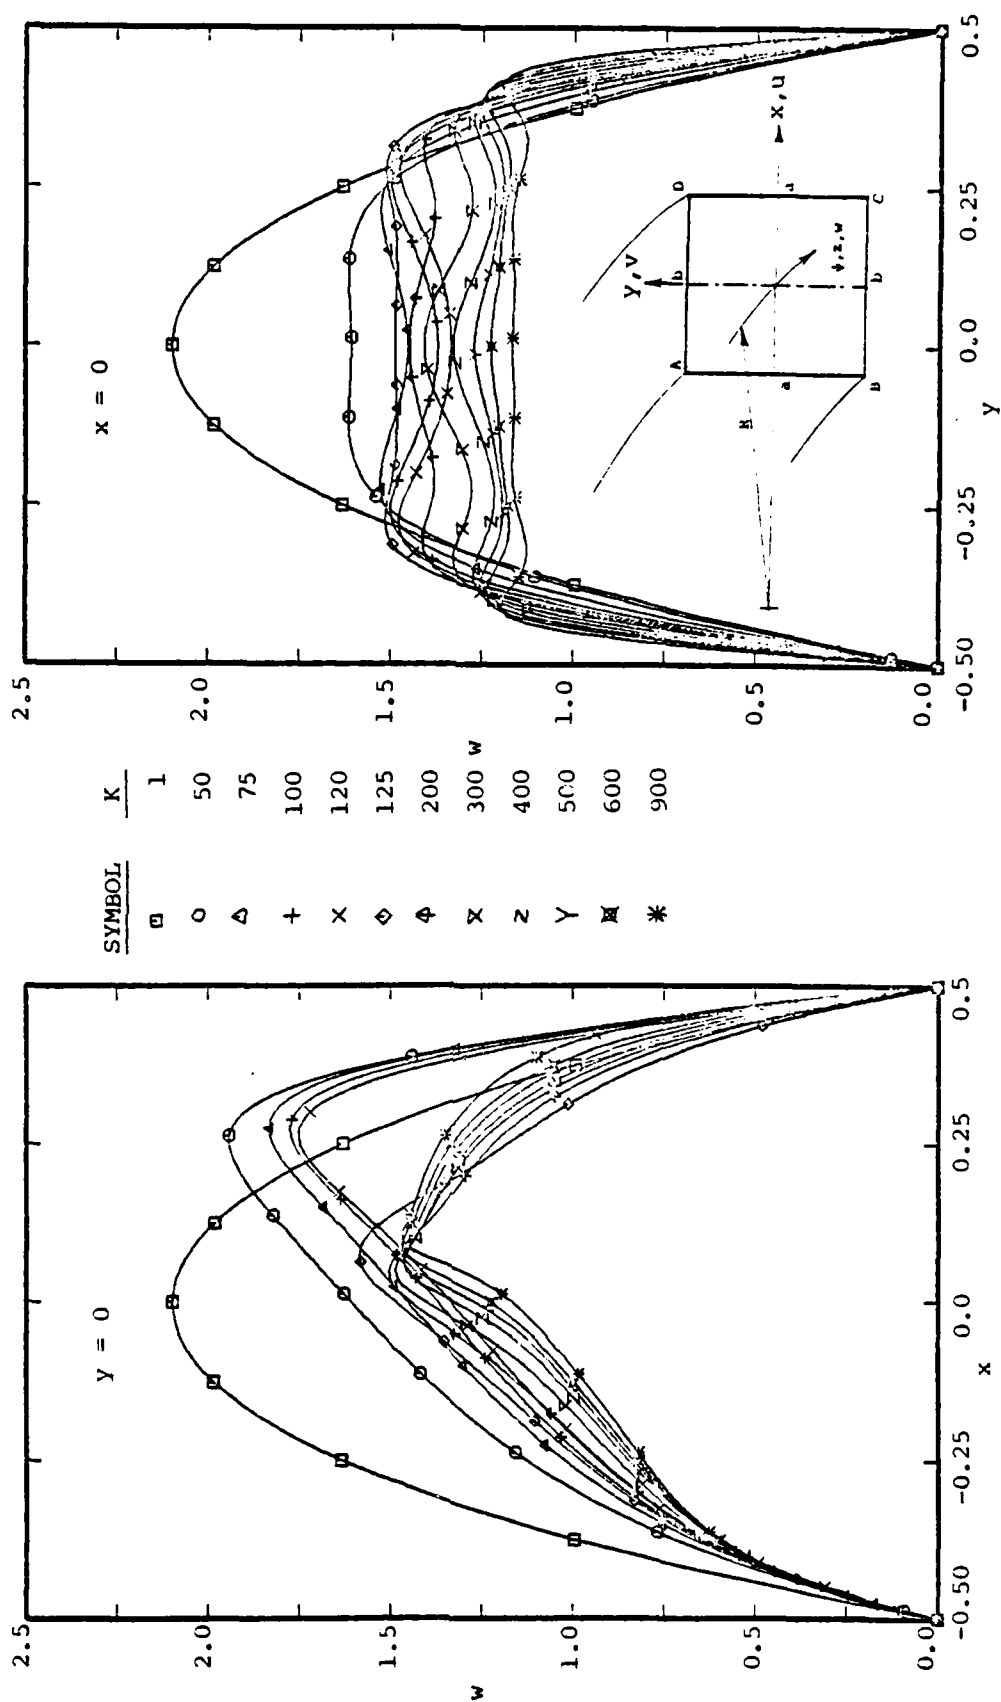


FIG. 1b. EFFECT OF DEAN NUMBER ON STREAMWISE VELOCITY FOR SQUARE CURVED DUCTS;

AR = 1, R = 100.

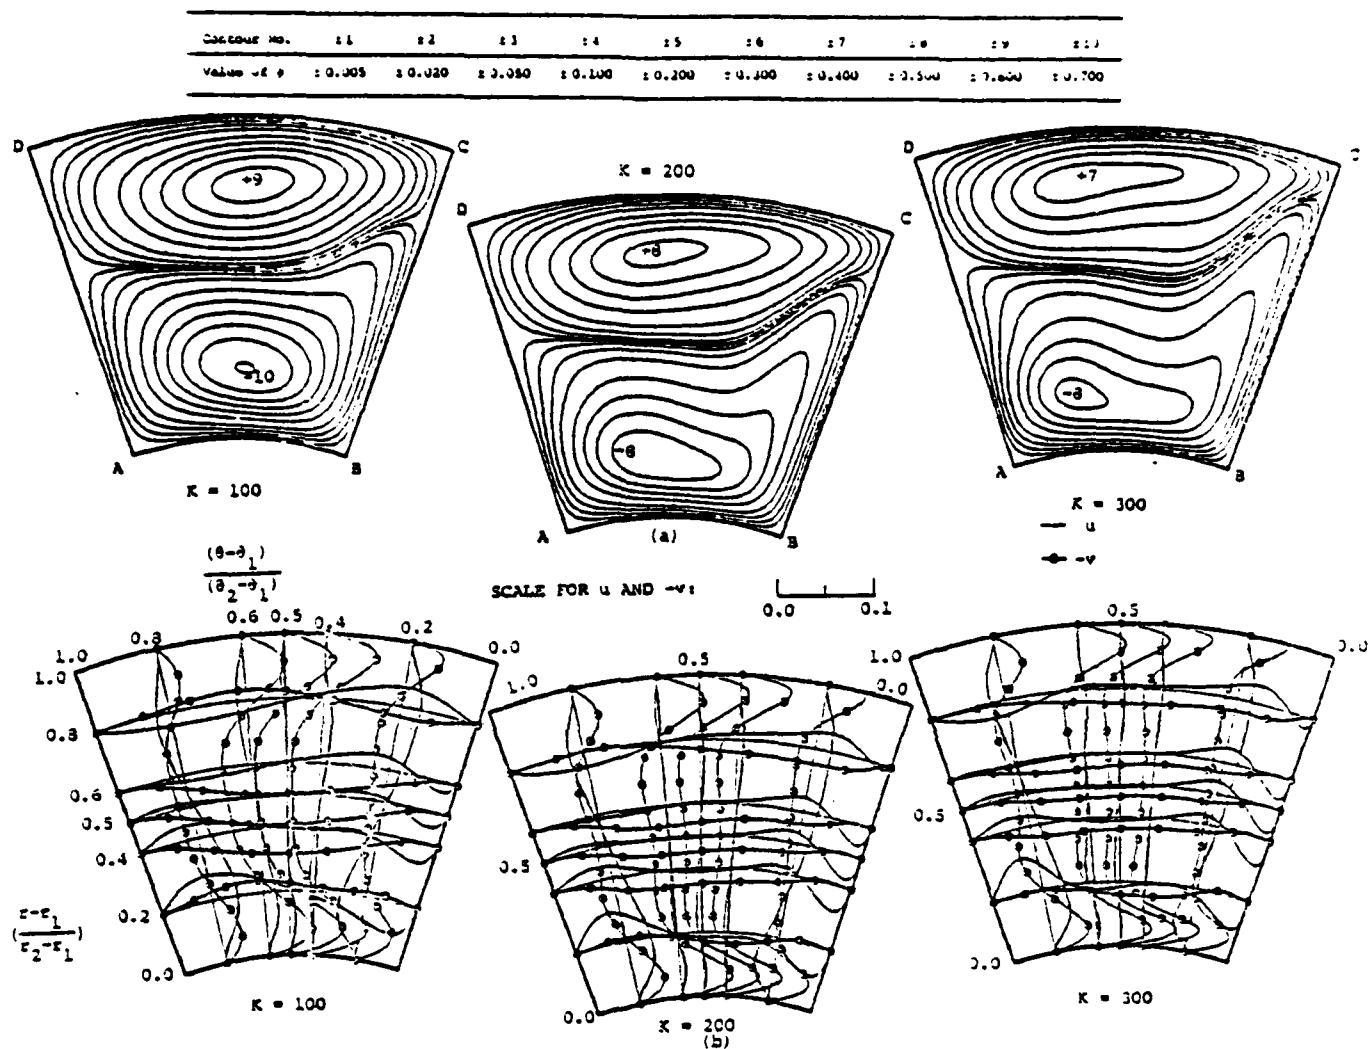


FIG. 2. EFFECT OF DEAN NUMBER ON SECONDARY FLOW FOR POLAR DUCTS -
 (A) CROSS FLOW STREAMLINE CONTOURS, (B) CROSS FLOW VELOCITY
 PROFILES.

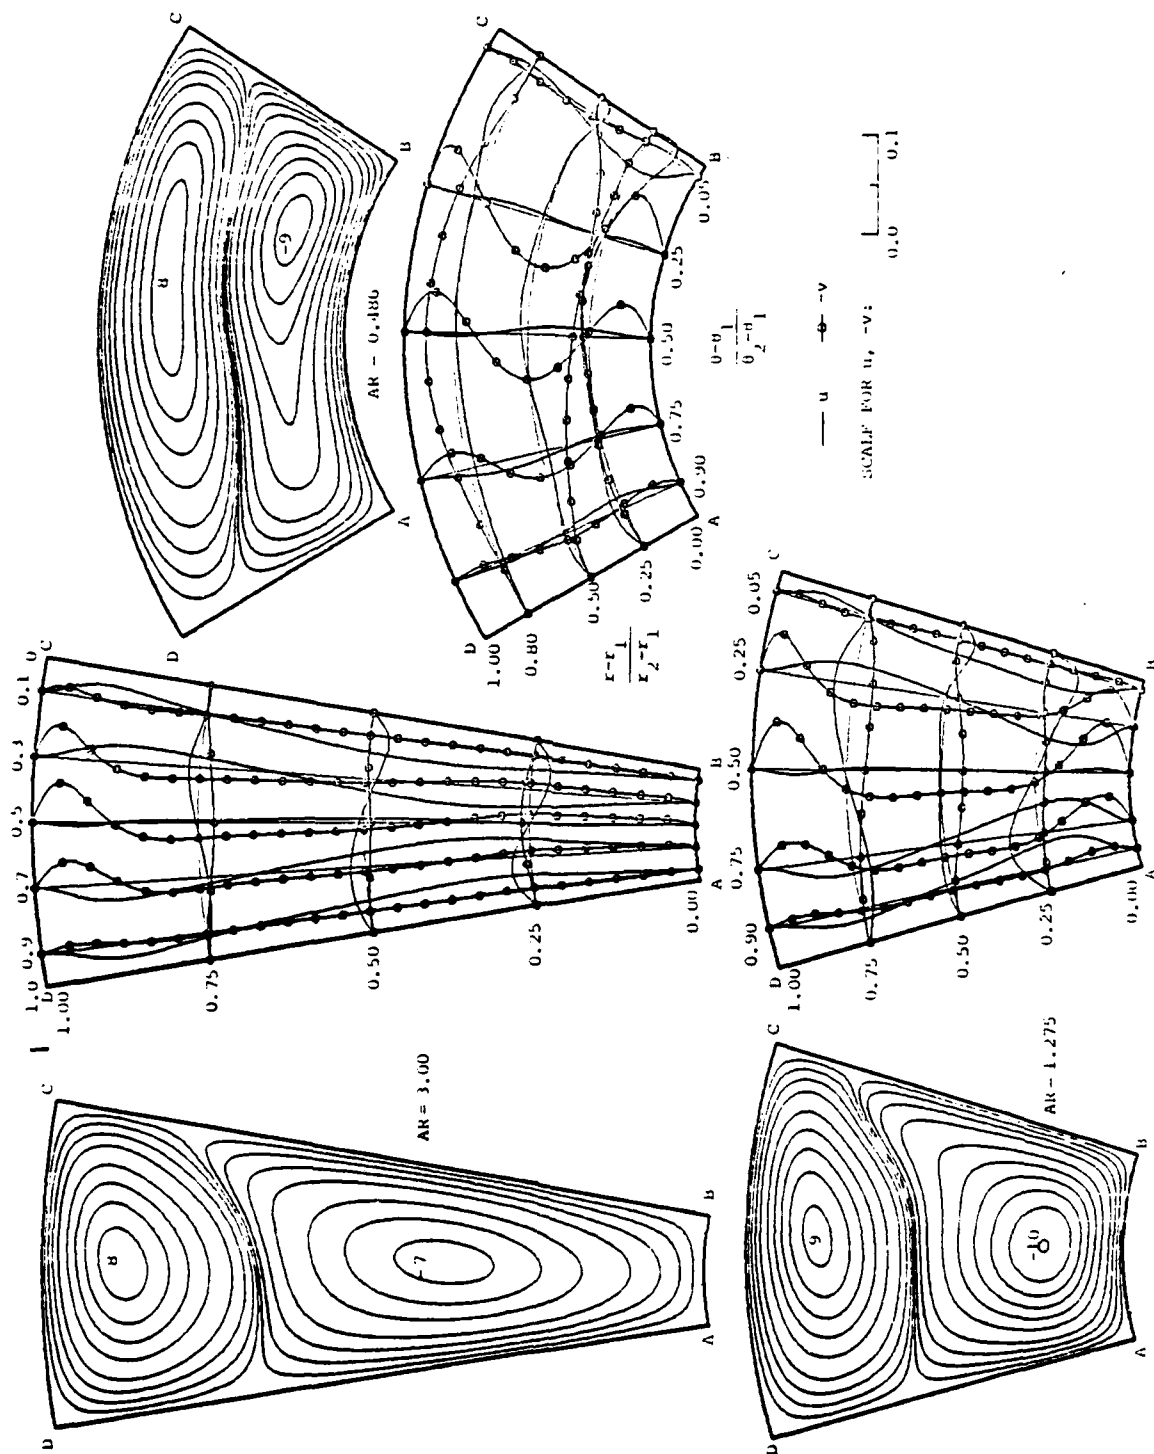


FIG. 3 . EFFECT OF ASPECT RATIO ON SECONDARY FLOW FOR POLAR DUCTS;
K = 100, R = 100.

CONTOUR PLOT. RE = 1000 SR = 1.3281
 STREAM FUNCTION (85,33) MESH D = 0.4097
 TIME = 44.0000

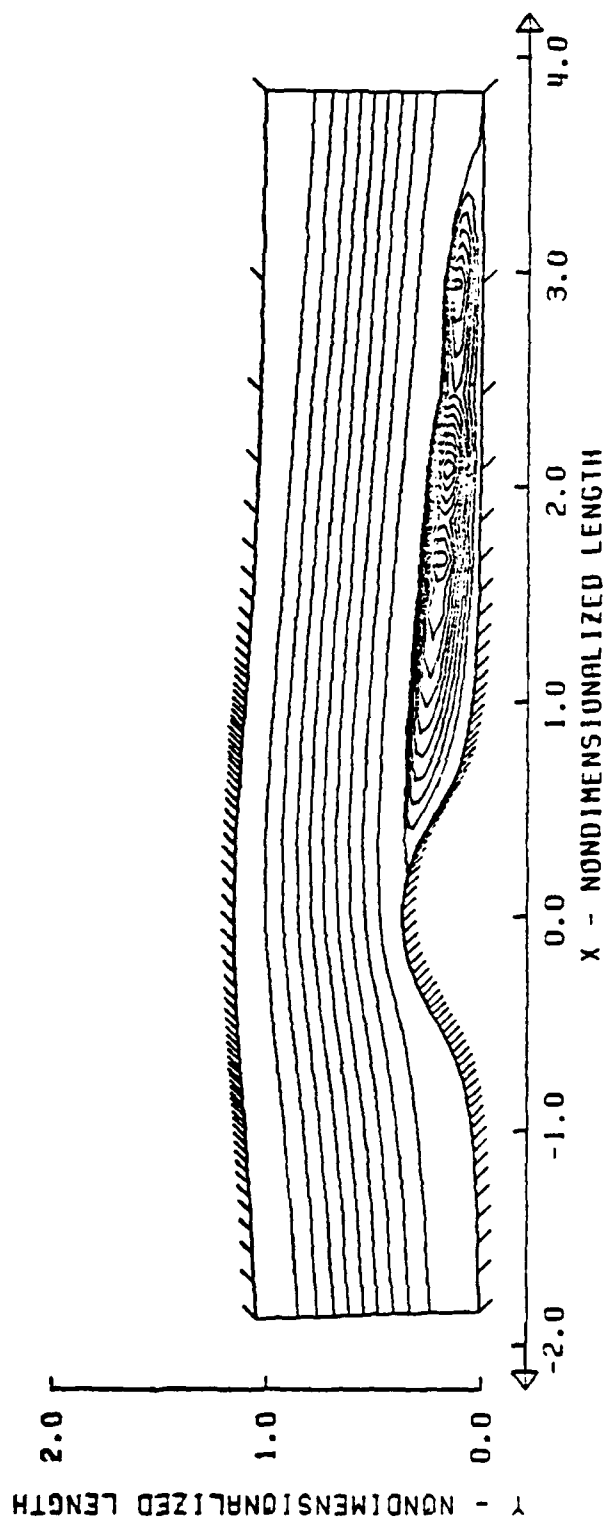


FIG. 4a, STREAM FUNCTION CONTOURS FOR $Re = 1,000$.
 $\Delta\psi = 0.002$ WITHIN SEPARATION BUBBLE; $\Delta\psi = 0.1$ ELSEWHERE.

CONTOUR PLOT
VORTICITY

RE = 1000	$A^2 = 0.2100$	SR = 1.3281
(85, 33) MESH	H = 0.7820	D = 0.4097
		TIME = 44.0000

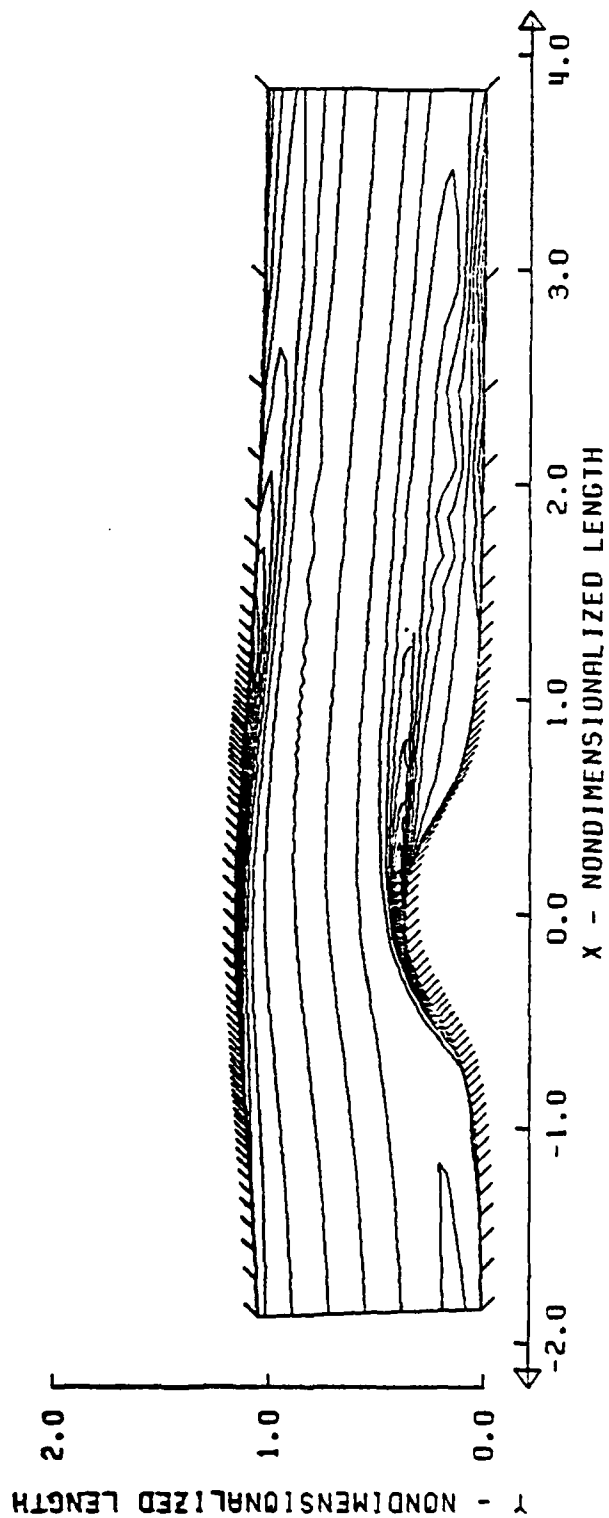


FIG. 4b. VORTICITY CONTOURS FOR $Re = 1,000$. $\Delta\omega = 2.0$.

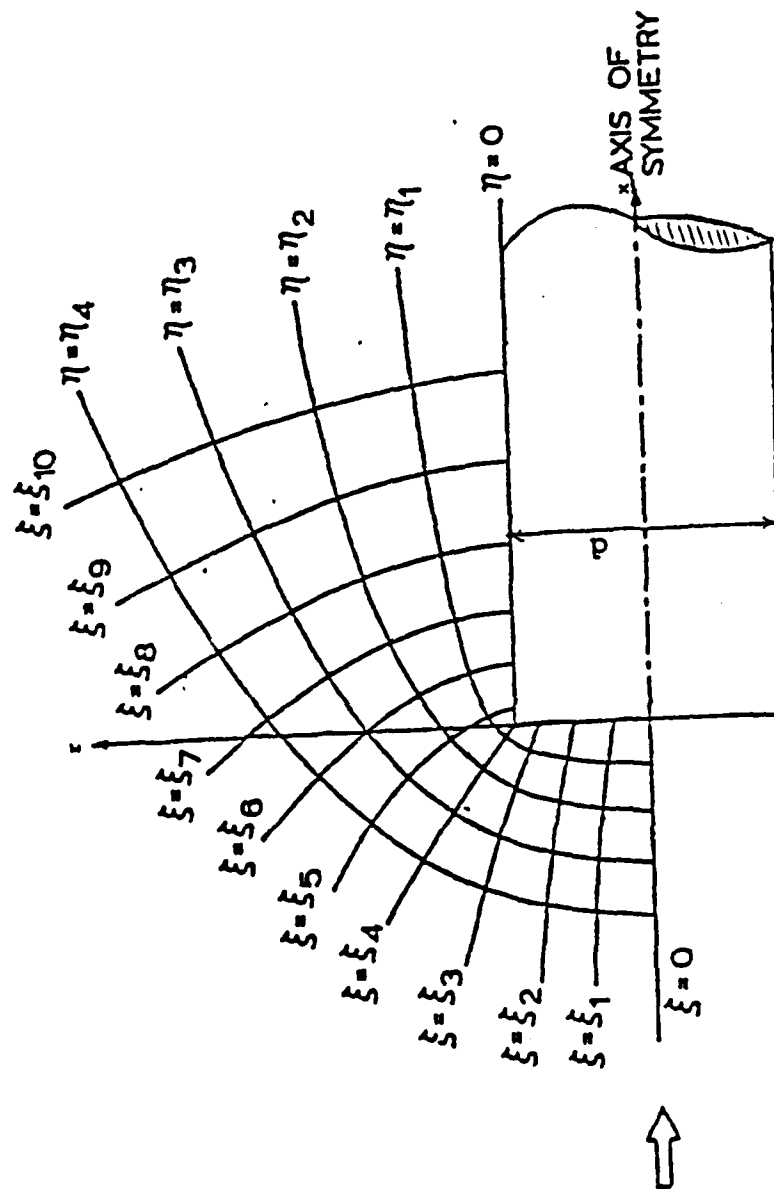


FIG. 5a. AXISYMMETRIC FLOW CONFIGURATION AND COORDINATE SYSTEM

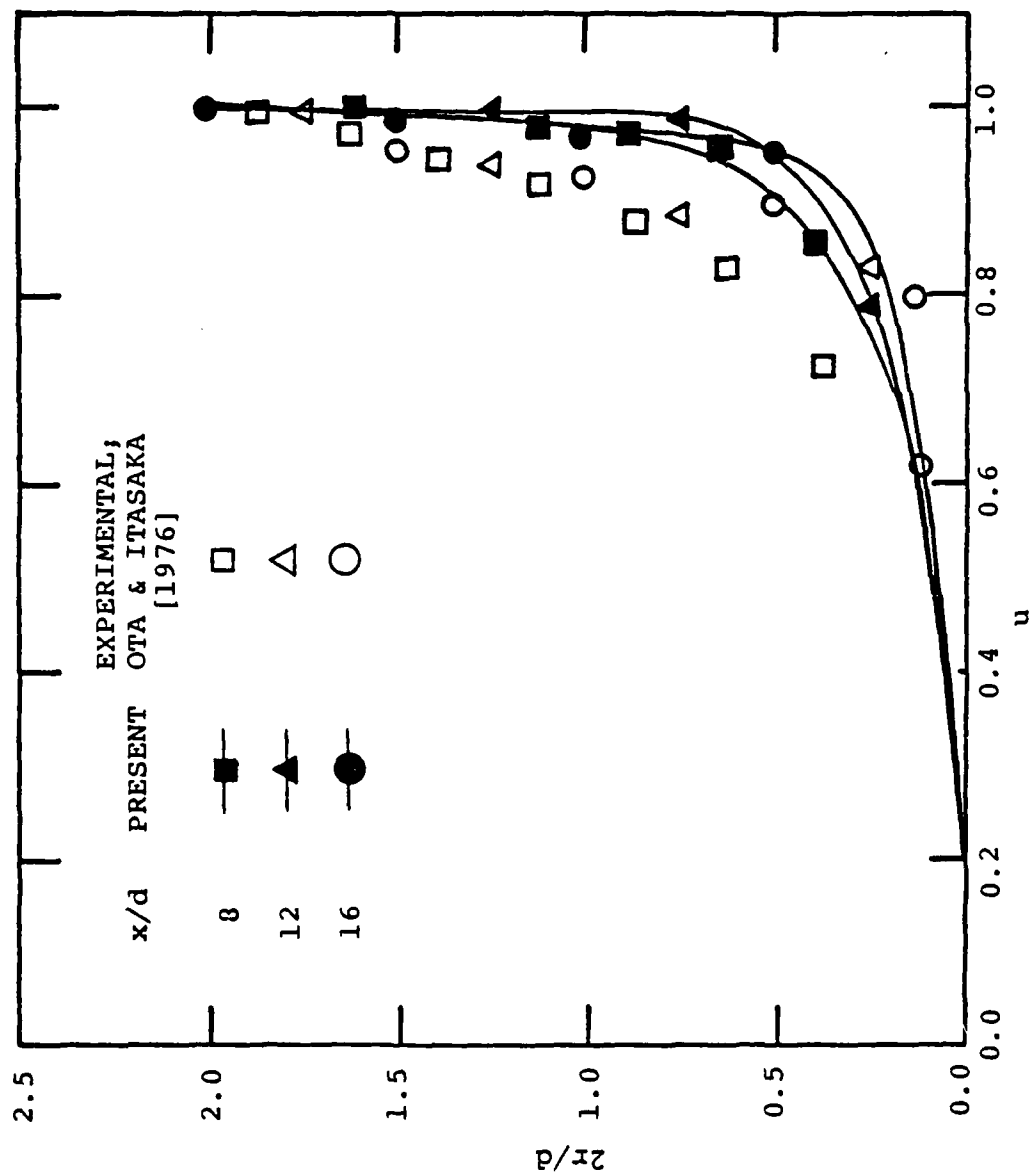


FIG. 5b. COMPARISON BETWEEN PREDICTED AND EXPERIMENTAL DATA FOR VELOCITY PROFILES FOR BLUNT PLATES.

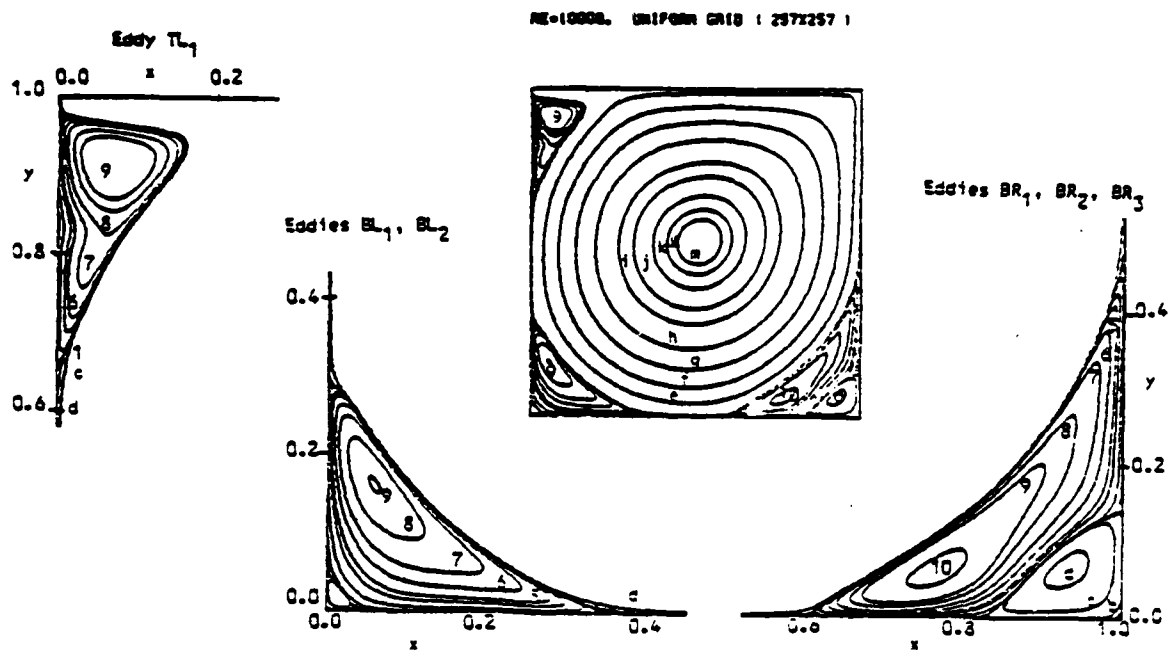


FIG. 6a.

STREAMLINE PATTERN FOR PRIMARY, SECONDARY AND
ADDITIONAL CORNER VORTICES.

RE=10000. UNIFORM GRID (257x257)




FIG. 6b. VORTICITY CONTOURS FOR FLOW IN DRIVEN CAVITY.

DATE
FILMED
— 8