

AD-A136 026


COMPUTER PROGRAM FOR PRELIMINARY HELICOPTER DESIGN(U)  
NAVAL POSTGRADUATE SCHOOL MONTEREY CA M W ROGERS  
SEP 83


1/2

UNCLASSIFIED

F/G 1/3

NL

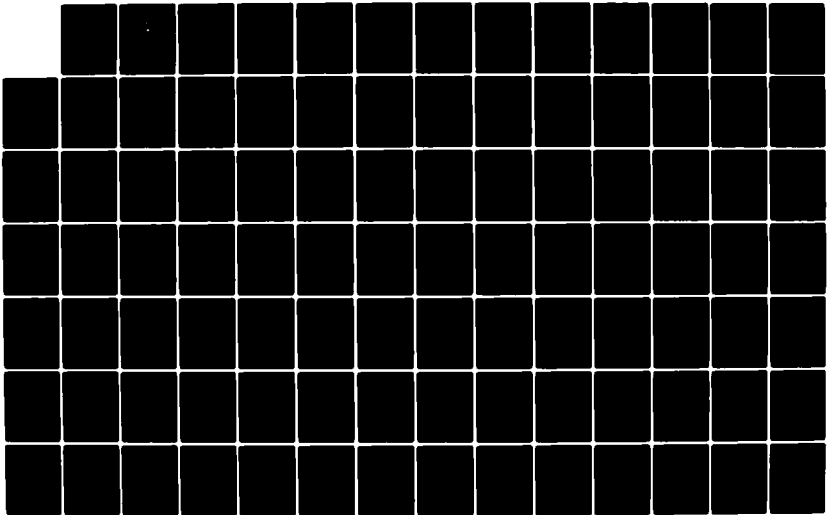



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD - A136026

0

NAVAL POSTGRADUATE SCHOOL  
Monterey, California



THESIS

5

COMPUTER PROGRAM  
FOR  
PRELIMINARY HELICOPTER DESIGN

by

Michael W. Rogers

September 1983

Thesis Advisor

Donald M. Layton

Approved for public release; distribution unlimited.

DTIC FILE COPY

83 12 20 018

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. AD-173602K	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Computer Program for Preliminary Helicopter Design		5. TYPE OF REPORT & PERIOD COVERED Master's Thesis; September 1983
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Michael W. Rogers		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		12. REPORT DATE September 1983
		13. NUMBER OF PAGES 125
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) Naval Postgraduate School Monterey, California 93943		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Calculator HP 41 Helicopter		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  This report gives the operator of the Hewlett-Packard (HP-41) handheld calculator the ability to quickly and accurately determine the power requirements of a helicopter in the preliminary design phase. These power requirements are computed for three landing gear configurations: skid,		

DD FORM 1473  
1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE 1  
S/N 0102-LF-014-5601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

fixed wheel, and retractable wheel. By comparing the power required for each configuration, the user can determine the optimum landing gear for the design.



Approved for public release; distribution unlimited.

Computer Program for Preliminary Helicopter Design

by

Michael W. Rogers  
Captain, United States Army  
B.S., United States Military Academy, 1974

Submitted in partial fulfillment of the  
requirements for the degree of

MASTER OF SCIENCE IN AERONAUTICAL ENGINEERING

from the

NAVAL POSTGRADUATE SCHOOL

September 1983

Author:

*Michael William Rogers*

Approved by:

*Donald M. Taylor* Thesis Advisor

*Donald M. Taylor*  
Chairman, Department of Aeronautics

*J. D. W.*  
Dean of Science and Engineering

## ABSTRACT

This report gives the operator of the Hewlett-Packard (HP-41) handheld calculator the ability to quickly and accurately determine the power requirements of a helicopter in the preliminary design phase. These power requirements are computed for three landing gear configurations: skid, fixed wheel, and retractable wheel. By comparing the power required for each configuration, the user can determine the optimum landing gear for the design.

## TABLE OF CONTENTS

I.	INTRODUCTION -----	8
	A. BACKGROUND -----	8
	B. GOALS -----	8
II.	APPROACH TO THE PROBLEM -----	10
	A. BASIC LINE OF APPROACH -----	10
	B. DETAILED LINE OF APPROACH -----	10
III.	RESULTS AND CONCLUSIONS -----	15
APPENDIX A:	HP-41 COMPUTER PROGRAMS -----	16
	MAIN ROTOR (MR) -----	16
	POWER TO HOVER (PHV) -----	24
	WEIGHT (WT) -----	30
	TOTAL POWER (PTOT) -----	41
	PCOMP (POWER REQUIRED DUE TO COMPRESSIBILITY EFFECTS) -----	72
	ESHP (EQUIVALENT SHAFT HORSEPOWER) -----	77
	FM (FIGURE OF MERIT) -----	80
	CHD (CHORD) -----	85
	RV (ROTATIONAL VELOCITY) -----	87
	EFPA (EFFECTIVE FLAT PLATE AREA) -----	90
	DENSITY (RHO) -----	94
	REGISTER FILE -----	97
APPENDIX B:	EXAMPLE/PROGRAM VALIDATION PROBLEMS -----	100
	PRELIMINARY DESIGN OF A CARGO HELICOPTER -----	100



HUGHES AAH-64 DESIGN COMPARISON -----	111
COMPARISON OF ADV. SYST. COMPUTER PROGRAM -----	115
APPENDIX C: COMPUTER GRAPHICS PRINTOUT -----	121
MYPLOT AND POWERPLO COMPUTER PRINTOUTS -----	121
LIST OF REFERENCES -----	124
INITIAL DISTRIBUTION LIST -----	125

#### ACKNOWLEDGEMENT

I wish to express my sincere appreciation to Professor Donald Layton for his guidance and assistance during the preparation of this thesis. I also wish to thank Mr. Ron Shinn from the Army Aviation Research and Development Command's Advanced Systems Branch, for his assistance in this project. The information he provided concerning the computation of landing gear data proved invaluable.

## I. INTRODUCTION

### A. BACKGROUND

The design process for any aircraft is a tedious, often repetitive procedure, and for a Helicopter, all complexities are compounded. In order to facilitate the design process, computer programs have been derived that will replace long calculations with a speedy solution to many of the problems. These programs, however, are generally quite lengthy and are not amenable to an educational conceptual design project, or to 'quick looks' at proposed decisions.

Two aids to the determination of helicopter performance and/or helicopter design have been developed in the Department of Aeronautics at the Naval Postgraduate School. These are the series of programs for the HP-41 handheld computer [Ref. 1] and the Helicopter Conceptual Design Manual [Ref. 2] which uses these programs.

None of these programs relate to the landing gear of the helicopter, even though such programs are necessary in order to determine the most advantageous landing gear configuration for a particular design.

### B. GOALS

The initial goal of this project was to develop a series of programs for the handheld HP-41 computer which would enable the student to determine which landing gear configuration best complements his design. In the course of

accomplishing this goal, it became apparent that numerous additional programs, written from the Helicopter Design Manual, would be required. A second goal was therefore established; to program the design course in such a way that the student could accomplish his required tasks without the mundane iterative calculations required in a design procedure. If hand calculations were required, instructors could rapidly check the student's work with these programs.

Mr. Ronald Shinn, from the Advanced Systems Branch, Army Aviation Research and Development Command, provided an additional goal. Inasmuch as a definite need exists for the design engineer to be able to quickly and inexpensively derive a design that is fairly accurate in the preliminary design phase, a third goal was established; to obtain an output from the programs which is, on average, within ten percent of the Advanced Systems Branch large scale computer program output.

A final goal was to design the programs in such a way as to eliminate the necessity for the student or design engineer to refer to charts and graphs for the necessary input information. Thus, the programs are designed to be "self-contained."

## II. APPROACH TO THE PROBLEM

### A. BASIC LINE OF APPROACH

A series of programs were written for the HP-41, which would output the horsepower required at various airspeeds and altitudes for a helicopter with skid, fixed wheel, or retractable type landing gear. From these power outputs, a graph can be plotted which will indicate the crossover point, i.e., where the retractable gear, with its additional weight and reduced drag, will require less power than the skid or fixed wheel configured aircraft. Thus, dependent on the average environment of the helicopter in question, a determination can be made as to which type of landing gear would contribute the most to the design.

### B. DETAILED LINE OF APPROACH

As stated in section 1B, one goal of this project was to eliminate, as much as possible, the use of graphs and charts to provide the necessary inputs when utilizing the programs. With this objective in mind, Chapters Two and Three of the Helicopter Design Manual were programmed. The Chapter Two program, entitled MR (Main Rotor), does not deviate from the design manual. By inputting the specification weight, rotor radius, critical Mach number, and maximum forward velocity, the program displays the maximum rotor tip velocity, disk loading, rotational velocity, coefficient of thrust, solidity,

chord length, aspect ratio, and coefficient of lift. The user is then prompted as to whether the value inputted for Rotor Radius, R, is satisfactory (i.e., are the displayed values within prescribed limits? A reduction in rotor radius will increase disk loading, decrease aspect ratio, and increase rotational velocity.) If a new value for R is not needed, the Chapter Three program, entitled PHV, (Power to Hover), is executed. This program computes the power to hover out of and in ground effect. The subroutine "FM," (Figure of Merit), is then executed from the PHV program. If the Figure of Merit is within limits (.7 to .8), the subroutine "WT," (Weight), is executed. If, however, "FM" is out of limits, the program prompts the user as to whether the value is high, in which case the subroutine "CHD," (Chord), is executed, or low (subroutine "RV," (Rotational Velocity), is executed).

The "WT" subroutine (using sixty percent of the specification gross weight as a first approximation for empty weight) computes a second approximation of the empty weight using the equations found in the Weight Estimating Relationships [Ref. 3]. To this empty weight are added fuel, useful load, and landing gear weight.

For the first iteration, a skid gear weight is added and is used as a case for future landing gear computations. The take-off gross weight is displayed and the user is prompted as to whether this weight is satisfactory (i.e., if enough allowance is made for the additional weight of the fixed and

retractable type landing gears, keeping in mind the maximum allowable gross weight specified for the design). If the weight is not satisfactory, the WT program uses the second approximation of empty weight as a base and re-computes the take-off gross weight as before. If this value is satisfactory, the MR, PHV, and associated subroutines are re-executed using this new gross weight approximation. If all displayed values are still within specifications, the program prompts the user to clear certain programs from computer memory and to input other programs. This must be done due to the limited number of storage registers available in the HP-41. The inputted programs are PTOT, PCOMP, and ESHP; (Power Total, Compressibility Power, and Equivalent Shaft Horsepower, respectively).

Three PTOT programs have been written. One is designed specifically for use with the HP 82143A printer. The output is automatic and consists of a velocity and the equivalent shaft horsepower required at that speed. A second program outputs only the ESHP required for an inputted velocity (no printer required). The third program may be used with or without the printer and displays all of the individual powers that comprise the ESHP for a specified velocity.

The subroutines EFPA, PCOMP, and ESHP are used in the main program PTOT. EFPA computes the effective flat plate area of the design helicopter. This value is determined from the aircraft gross weight, its landing gear configuration and

whether the aircraft, in the opinion of the user, has clean or dirty lines. PCOMP computes the additional horsepower required due to compressibility effects while ESHP computes the extra power needed due to accessories, transmission losses, and losses due to multiple engine installation.

Once PTOT has been executed and the data recorded, the user re-executes the WT program. Since the skid landing gear is to be used as a base for determining the weight of the fixed and retractable gear, the program automatically bypasses the component weight calculations, thereby allowing the identical empty weight to be used. The user inputs the same values for fuel and useful load weight. Following the calculator prompts, the user inputs fixed gear information. The new take-off gross weight is computed and the program transfers to PTOT. The reader will recall that during the first iteration of the WT program (using skid gear information), the MR program was re-executed to insure that the newly computed value of gross weight did not result in specification violations. The additional weight of the fixed and retractable landing gear results in less than a four percent increase in the total gross weight of the aircraft. It is therefore not necessary to again check the MR values, for this small increase in gross weight will not result in specification violations. After obtaining the power outputs with the fixed landing gear, re-execute the WT program, inputting retractable landing gear data. Once the three data sets have



been computed, it is a simple matter to compare these lists to determine the crossover points.

For a graphical display of the crossover points, two programs have been developed: MYPLOT and POWERPLO [Ref. 4]. These programs are compatible with the TEXTRONICS/DISSPLA package.

### III. RESULTS AND CONCLUSIONS

This series of programs allows the user to quickly and accurately determine the power required of a helicopter at any speed, and at any altitude. The user is able to determine the most advantageous landing gear configuration for his design depending on the projected mission environment of the aircraft.

In an attempt to display the accuracy of these programs, three sample problems are solved in Appendix B. The first is a step-by-step cargo helicopter design problem. The second is an attempt to design a current production helicopter, the Hughes AAH-64, and compare the actual power outputs with the HP-41 program outputs. The third problem compares the Army Aviation Research and Development Command's Advanced System's computer power outputs with that of the HP-41 program outputs given the identical input data.

Though accurate, inexpensive, and rapidly executed, it must be emphasized that these programs represent only the "back of the envelope" phase of preliminary design. Further detailed analysis currently requires the use of expensive main frame computers.

## APPENDIX A

### HP-41 COMPUTER PROGRAM

#### MAIN ROTOR (MR)

##### 1. PURPOSE

This program represents the Second Chapter in the Helicopter Design Manual. It computes the disk loading (DL), rotational velocity (PV), coefficient of thrust (CT), solidity (SD), chord length (c), aspect ratio (AR), coefficient of lift (CL), and the maximum rotor blade tip velocity V(TIP) given the following inputs:

A) Specification Weight (Spec Wt): the absolute maximum gross weight allowable.

B) Main Rotor Radius (R): this is an educated guess. Start by using the design maximum radius allowed.

C) Critical Mach Number (Mch Crit): to prevent the rotor blade from encountering undesirable compressibility effects, use the historically acceptable value of .65.

D) Maximum Forward Velocity (VF Max): input the design's maximum forward velocity.

Throughout all of these programs, when prompted for a Yes or No answer, the user should input a 1 for Yes, and a 0 for No.

##### 2. EQUATIONS

$DL = (GW) / ((PI) * R^{**2})$  where the first approximation  
of  $GW = (Spec\ Wt) * .8$

$$VT(max)ssl = (Mch Crit) * (a) \text{ where } a = \sqrt{\text{Gamma} * g * R * T}$$

$$RV=VT(Max)/(R)$$

$$CT=(GW)/(A * RHO * VT(Max)**2)$$

$$SD=(CT/(BL))$$

$$\text{where } BL=(.16667)*(VF Max/.59248)/VT Max) + .15515$$

Note: The blade loading calculation is derived from a chart of blade loading vs. advanced ratio. The chart is linear for an advanced ratio (VF Max)/(VT Max) of > .35. The equation for a straight line (y=mx+b) was therefore used for this approximation.

$$c= (SD * PI * R)/b$$

$$AR=(R)/c$$

$$CL= (6 * CT)/SD$$

where:

DL = disk loading

GW = gross weight

R = radius of the main rotor

VT(Max) = blade maximum tip velocity

RV = rotational velocity

CT = coefficient of thrust

RHO = density altitude

SD = solidity

BL = blade loading

b = no. of main rotor blades


c = chord (main rotor)

AR = aspect ratio


CL = coefficient of lift

A = Area of main rotor


3. FLOWCHART (MR)

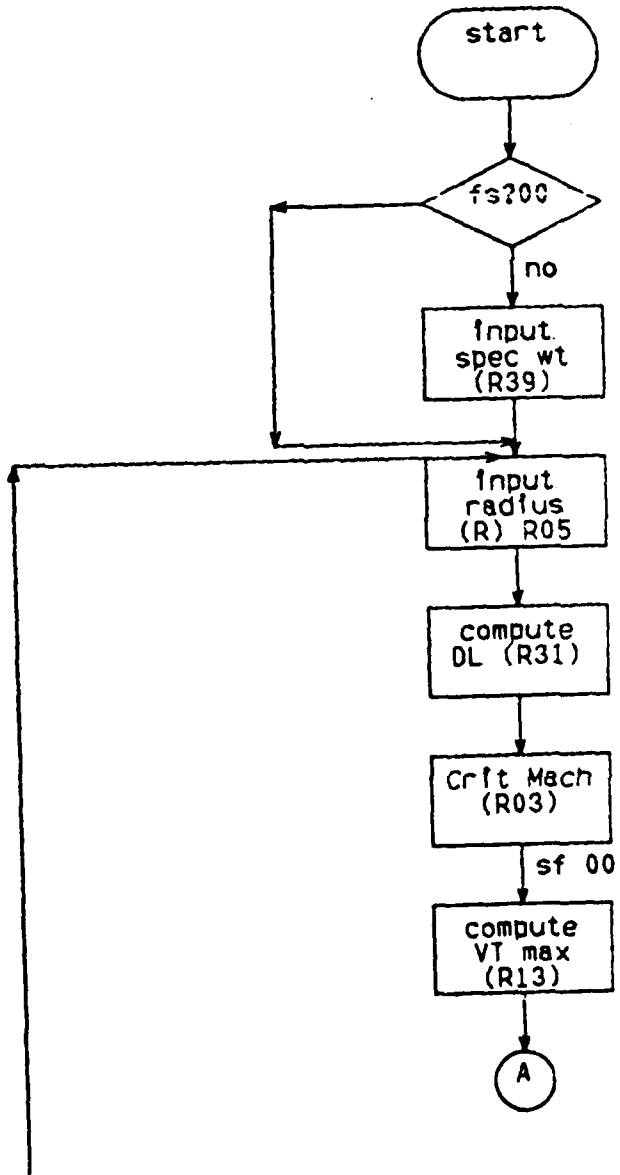

FLOWCHART (MR) (CONT)

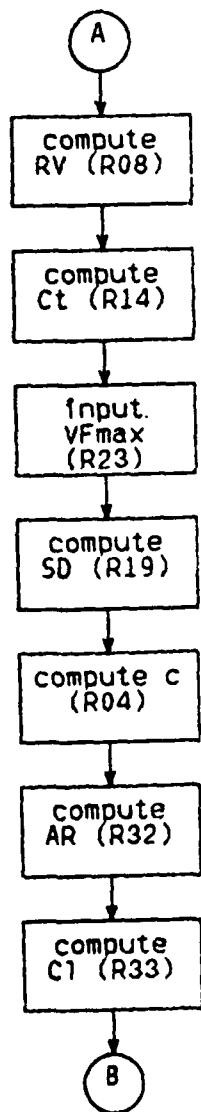

FLOWCHART (MR) (CONT)

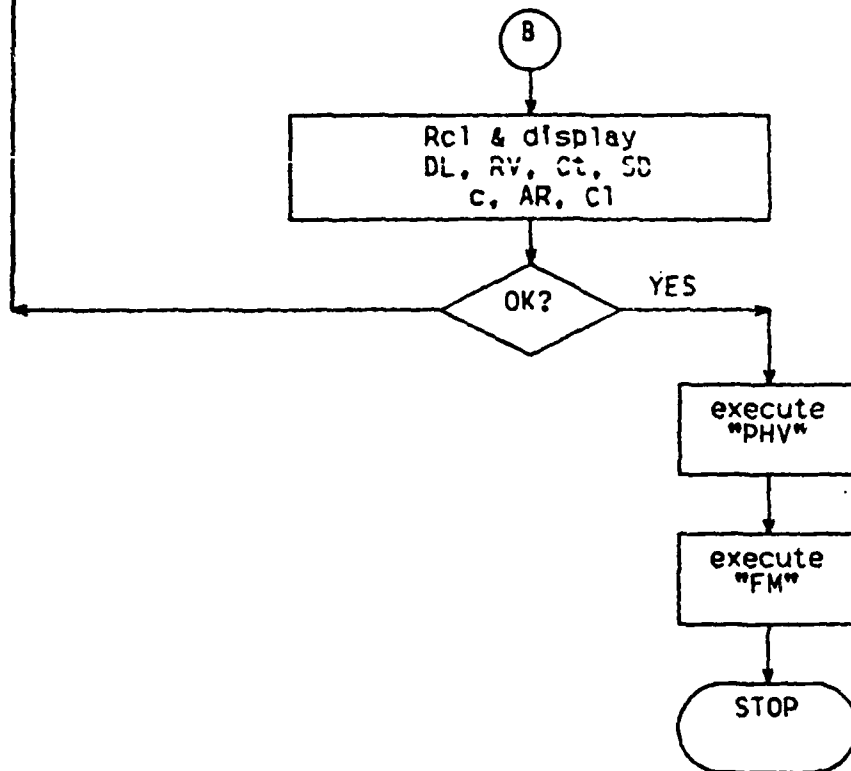

#### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS

A helicopter is to be designed with the following specifications:

VF(Max) = 160 kts

(Spec Wt) = 18000 lbs

Maximum Rotor Diameter = 58 ft

AR must be between 15 and 25 and DL must be less than 7.5.

Compute DL, RV, CT, SD, c, AR, and CL.

Input the MR (Main Rotor) program and clear all flags.

KEYSTROKES	DISPLAY
XEQ (alpha) SIZE (alpha)	SIZE...
068 XEQ (alpha) MR (alpha)	Spec Wt=?
18000 (r/s)	R=?
29 (r/s)	Mch Crit=?
0.65 (r/s)	VT MX=725.63
(r/s)	VF MX=?
160 (r/s)	DL=5.45
(r/s)	RV=25.02
(r/s)	CT=.004
(r/s)	SD=.047
(r/s)	c=1.065
(r/s)	AR=27.23
(r/s)	CL=.559
(r/s)	R ok?
0 (r/s)	



If these values are not within specifications, push (r/s) and input a new value of R. Since flag 00 is now set, the program automatically goes to R=? Because AR is rather high, input a new value of 27 feet for R. Proceeding as before, the following data is displayed.

KEYSTROKES	DISPLAY
(r/s)	DL=6.28
(r/s)	RV=26.37
(r/s)	CT=.005
(r/s)	SD=.054
(r/s)	c=1.144
(r/s)	AR=23.6
(r/s)	CL=.559
(r/s)	R ok?
l (r/s)	

By decreasing the rotor radius, the aspect ratio was decreased while disk loading was increased. Both values are now within the specifications. Because l was inputted for the prompt (R ok?), the program automatically advances to the PHV program.

## 5. PROGRAM LISTINGS

```

01+LBL "MR"
02 FS? 55
03 CF 21
04 FIX 3
05 FS? 00
06 GTD "88"
07 "SPEC WT=?"
08 PROMPT
09 STO 39
10 .8
11 *
12 STO 36
13+LBL "88"
14 .00237696
15 ENTER+
16 STO 11
17 "R=?"
18 PROMPT
19 STO 05
20 Y+2
21 PI
22 *
23 STO 12
24 RCL 36
25 X<Y
26 /
27 STO 31
28 "MCH CRIT="
29 PROMPT
30 STO 03
31 298.15
32 ENTER+
33 401.8
34 *
35 Sqrt
36 *
37 .3048
38 /
39 STO 13
40 "VT MX="
41 ARCL X
42 AVIEW
43 STOP
44 RCL 13
45 RCL 05
46 /
47 STO 08
48 SF 00
49 RCL 12
50 RCL 11
51 *
52 RCL 13
53 X+2
54 *
55 RCL 36
56 X<Y
57 /
58 STO 14
59 "VF MX=?"
60 PROMPT
61 .59248
62 /
63 STO 23
64 RCL 13
65 /
66 .166667
67 CHS
68 *
69 .15515
70 +
71 RCL 14
72 X<Y
73 /
74 STO 19
75 PI
76 *
77 RCL 05
78 *
79 4
80 /
81 STO 04
82 RCL 05
83 X<Y
84 /
85 STO 32
86 RCL 14
87 5
88 *
89 RCL 19
90 /
91 STO 37
92+LBL "AA"
93 RCL 31
94 "BL="
95 ARCL X
96 AVIEW
97 STOP
98 RCL 08
99 "RV="
100 ARCL X
101 AVIEW
102 STOP
103 RCL 14
104 "CT="
105 ARCL X
106 AVIEW
107 STOP
108 RCL 19
109 "SD="
110 ARCL X
111 AVIEW
112 STOP
113 RCL 04
114 "C="
115 ARCL X
116 AVIEW
117 STOP
118 RCL 32
119 "AP="
120 ARCL X
121 AVIEW
122 STOP
123 RCL 33
124 "CL="
125 ARCL X
126 AVIEW
127 STOP
128 "P OK?"
129 PROMPT
130 Y>0?
131 XEQ "PHV"
132 STO "88"
133 END

```

## POWER TO HOVER (PHV)

### 1. PURPOSE

This program computes the power required to hover in and out of ground effect at SSL. This program is to be run following satisfactory completion of the MR program. A subroutine entitled "FM" is used to calculate the Figure of Merit for the aircraft. If the Figure of Merit does not fall within prescribed limits, the subroutine chord (CHD), or rotational velocity (RV), will automatically be executed.

The following are required inputs for PHV.

- A) Number of main rotor blades.
- B) Coefficient of drag of the main rotor, (Cdo).
- C) Height of the main rotor above the ground, (H).

### 2. EQUATIONS

$$B(MR) = 1 - [(2 * CT(MR))^{.5} / b(MR)]$$

$$Pi(MR) = (1/B) * [(GW)^{1.5} / (2 * RHO * A)^{.5}]$$

$$Po(MR) = ((SD) * (Cdo) * (RHO) * (A) * (VT)^3) / 4400$$

$$Pt(OGE) = Pi + Po$$

$$P/P(OGE) = -0.1276 * (H / (2 * R))^{.4} + .7080 * (H / (2 * R))^{.3}$$

$$-1.4569 * (H / (2 * R))^{.2} + 1.3432 * (H / (2 * R)) + .5147$$

$$Pt(IGE) = Po(MR) + P/P(OGE) * Pt(OGE) + Pi(MR)$$

where:

B is the tip loss factor.

A is the area of the main rotor disk.

Pi is the induced power (with tip loss).


$C_{do}$  is the coefficient of drag for the main rotor (at zero lift).

$P_o$  is the profile power.


$P_t(OGE)$  is the total power to hover out of ground effect.

$P_t(IGE)$  is the total power to hover in ground effect.

3. FLOWCHART

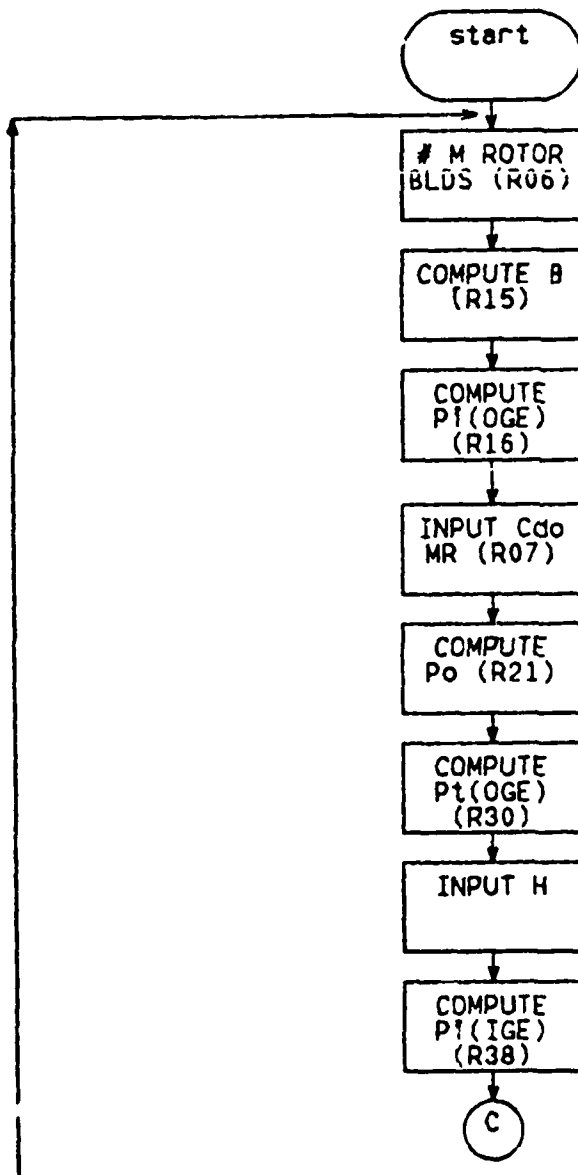

FLOWCHART (CONT)

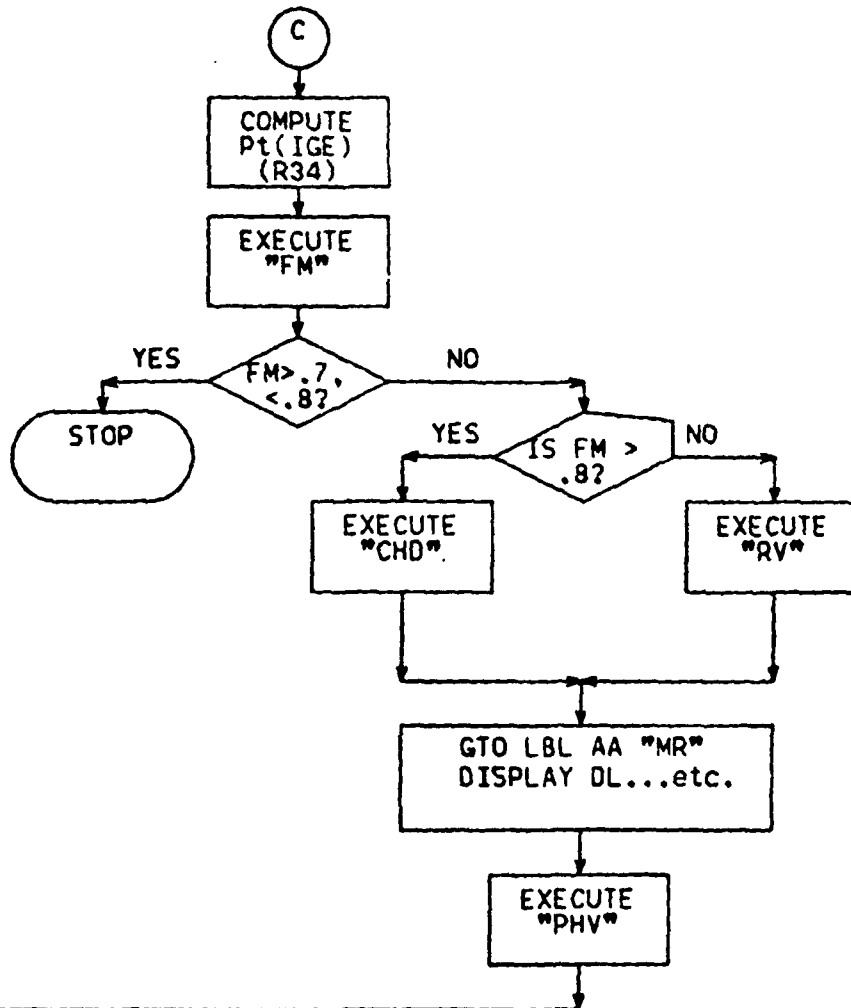

4. EXAMPLE PROBLEM AND USER INSTRUCTIONS:

Following a satisfactory run of "MR," determine the power to hover out of and in ground effect and the Figure of Merit for the helicopter.

Specifications:

Number of main rotor blades = 4

Coefficient of Drag (Cdo) of the main rotor = .01

Height of the main rotor above the ground = 14.4 ft

KEYSTROKES

(XEQ) (alpha) PHV (alpha)

4 (r/s)

0.01 (r/s)

(r/s)

14.4 (r/s)

(r/s)

(r/s)

1 (r/s)

DISPLAY

NO. MR BLDS=?

Cdo MR=?

Pth OGE=1232

H=?

Pth IGE=1019

FIG MER=0.74

FM ok?

WE=1080

## 5. PROGRAM LISTINGS

01+LBL "PHV"	36 3	71 .1276
02 FIX 0	37 Y*Y	72 *
03+LBL "TL"	38 RCL 12	73 CHS
04 RCL 14	39 *	74 RCL 17
05 2	40 RCL 11	75 2
06 *	41 *	76 Y*Y
07 SORT	42 "CDO MR=?"	77 .7000
08 "NO.MP BLDS=?"	43 PROMPT	78 *
09 PROMPT	44 STO 07	79 +
10 STO 06	45 *	80 RCL 17
11 /	46 RCL 19	81 2
12 CHS	47 *	82 Y*Y
13 1	48 4400	83 1.4569
14 +	49 /	84 *
15 STO 15	50 STO 21	85 -
16+LBL "PT"	51+LBL "OT"	86 RCL 17
17 RCL 11	52 RCL 21	87 1.3422
18 RCL 12	53 RCL 16	88 *
19 *	54 +	89 +
20 2	55 STO 30	90 .5147
21 *	56 "PTH QGE="	91 +
22 SORT	57 RCCL X	92 RCL 16
23 RCL 36	58 RVIEW	93 *
24 ENTER*	59 STOP	94 STO 38
25 1.5	60+LBL "PT IGE"	95 RCL 21
26 Y*Y	61 "H=?"	96 +
27 /	62 PROMPT	97 STO 34
28 1/X	63 STO 09	98 "PTH IGE="
29 RCL 15	64 2	99 RCCL Y
30 /	65 /	100 RVIEW
31 550	66 RCL 05	101 STOP
32 /	67 /	102 XEQ "CM"
33 STO 16	68 STO 17	103 END
34+LBL "PO"	69 4	
35 RCL 13	70 Y*Y	



## WEIGHT (WT)

### 1. PURPOSE

This program uses an iterative procedure to compute a more accurate estimate of the empty weight and total gross weight of the helicopter.

The program makes a "1st cut" estimate of the empty weight (WE) by multiplying the specification weight by .6. This WE is then used to compute the weight of the blades, hub, fuselage, controls, electrical and fixed equipment. The weight of the propulsion system is estimated by recalling R30 (Pth(OGE)) and multiplying by 1.2. These values are then added together and represent the second empty weight estimate (WE2). To estimate the total gross weight, fuel, useful load, and landing gear weight are added to the empty weight figure. Three types of landing gear are considered; skid, fixed wheel, and retractable wheel. A common practice among aircraft designers is to add two pounds to the gross weight of the aircraft for every additional pound added as a result of heavier equipment being installed. This is due to the fact that one additional pound requires more power which results in more fuel usage. In this case, the skid is lighter than the fixed wheel gear which, in turn, is lighter than the retractable gear.

This gross weight estimate is calculated as follows: the skid gear weight is calculated and is used as a reference point. This weight is subtracted from the fixed wheel gear

weight. An identical procedure occurs for the retractable gear. In this manner, every extra pound due to the addition of a heavier landing gear results in two extra pounds being added to the gross weight of the aircraft.

The formulas for computing the landing gear weight use the specification weight (absolute maximum weight allowed). If the user desires to incorporate a "buffer" to insure a satisfactory performance of the landing gear during a hard landing, this weight should be increased by a suitable percentage.

## 2. EQUATIONS

$$W_b = (.06) * (WE) * (R^{**.4}) * (SD)^{**.33}$$

$$W_h = (.0135) * (WE) * (R^{**.42})$$

$$W_p = (0.21) * P_{th}(OGE)$$

$$W_f = (0.21) * (WE)$$

$$W_c = (0.06) * (WE)$$

$$W_e = (0.06) * (WE)$$

$$W_q = (0.28) * (WE)$$

$$\text{Weight of the skid gear} = (.0245 * (\text{Spec Wt})^{**.8606}) \\ * (FL)^{**.8046}$$

$$\text{Weight of fixed and retractable landing gear} = 40.0 * \\ (\text{WMTO})^{**.6662} * (\text{NW})^{**.536} \\ * (\text{IRLG})^{**.1198}$$

where:

$W_b$  is the total weight of the blades.

$W_h$  is the weight of the hub.

$W_p$  is the weight of the propulsion system.

Wf is the weight of the fuselage.

Wc is the weight of the flight controls.

We is the weight of the aircraft's electrical equipment.

Wq is the weight of the installed fixed equipment.

WE2 is the empty weight (the sum of the above).

R is the main rotor radius.

SD is the main rotor solidity.

Pth(OGE) is the power to hover out of ground effect  
(recalled from R30).

FL is a coefficient. If the main rotor has two blades,  
the program uses a value of 2. If more than  
2, FL=4.


WMTO is the specification weight divided by one thousand.

NW is the number of landing gears.


IRLG is the retractable gear flag (1=fixed,2=retractable).

Mr. Ronald Shinn developed the equation for skid gear weight. Most designers use 2% of GW to determine skid weight. In an effort to achieve a more accurate equation, he used a multiple regression routine to arrive at his equation. This formula has an 11% error when compared against the skid weight of eight operational helicopters. The equation used to determine the fixed and retractable landing gear weights had an 8.5% error when compared with 29 operational aircraft.


3. FLOWCHART

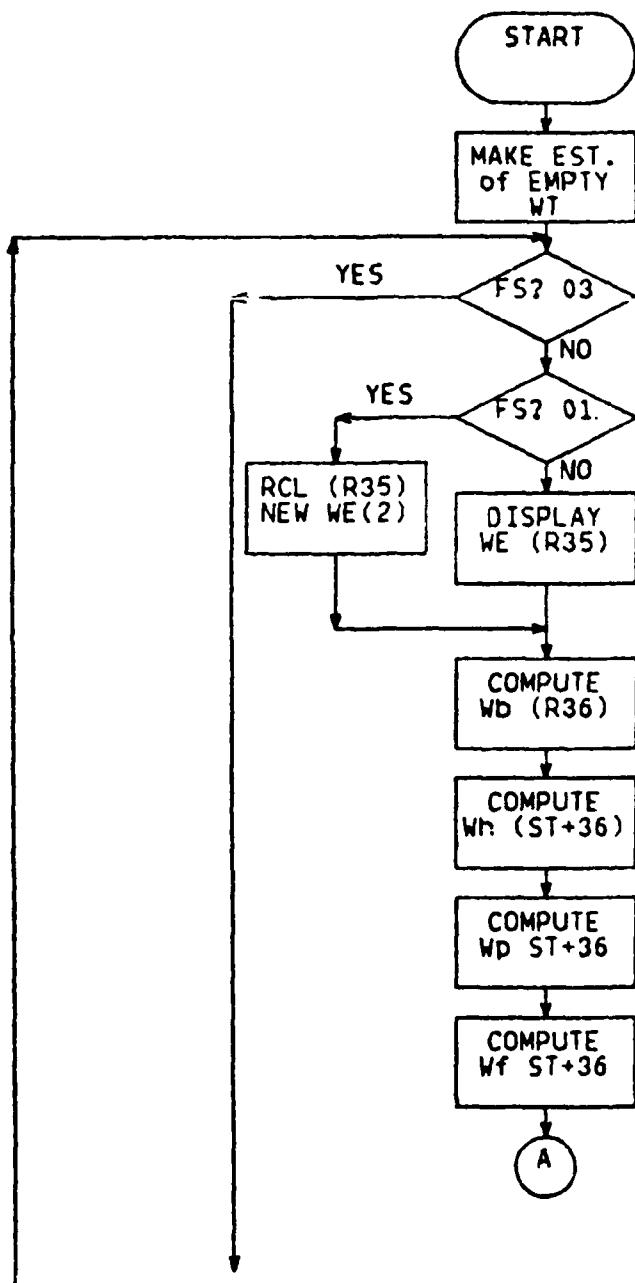


FLOWCHART (CONT)

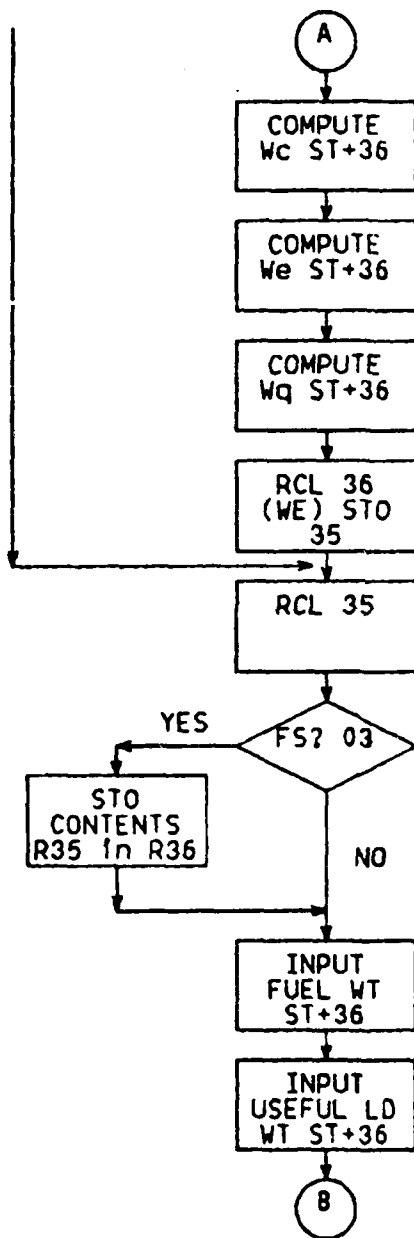

FLOWCHART (CONT)

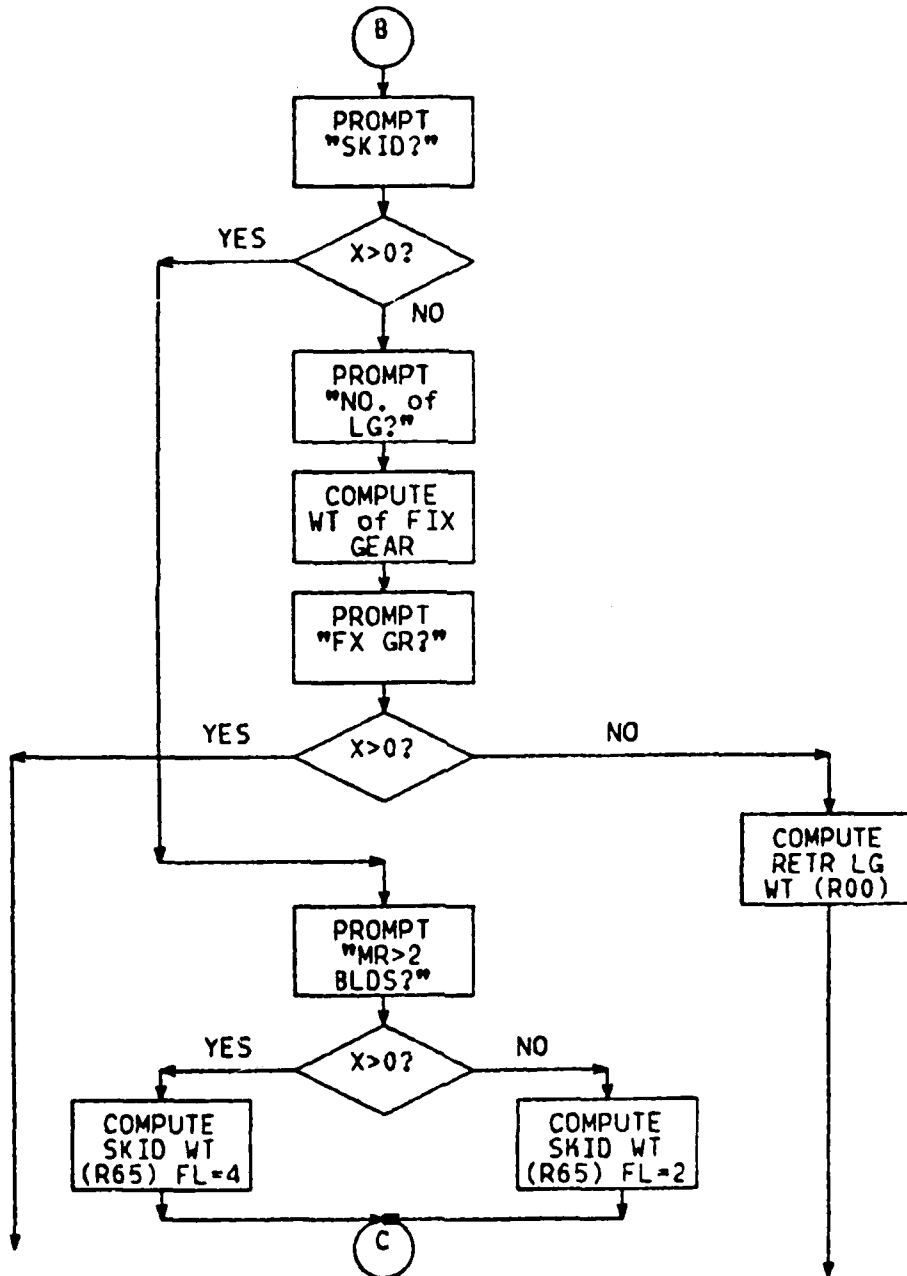

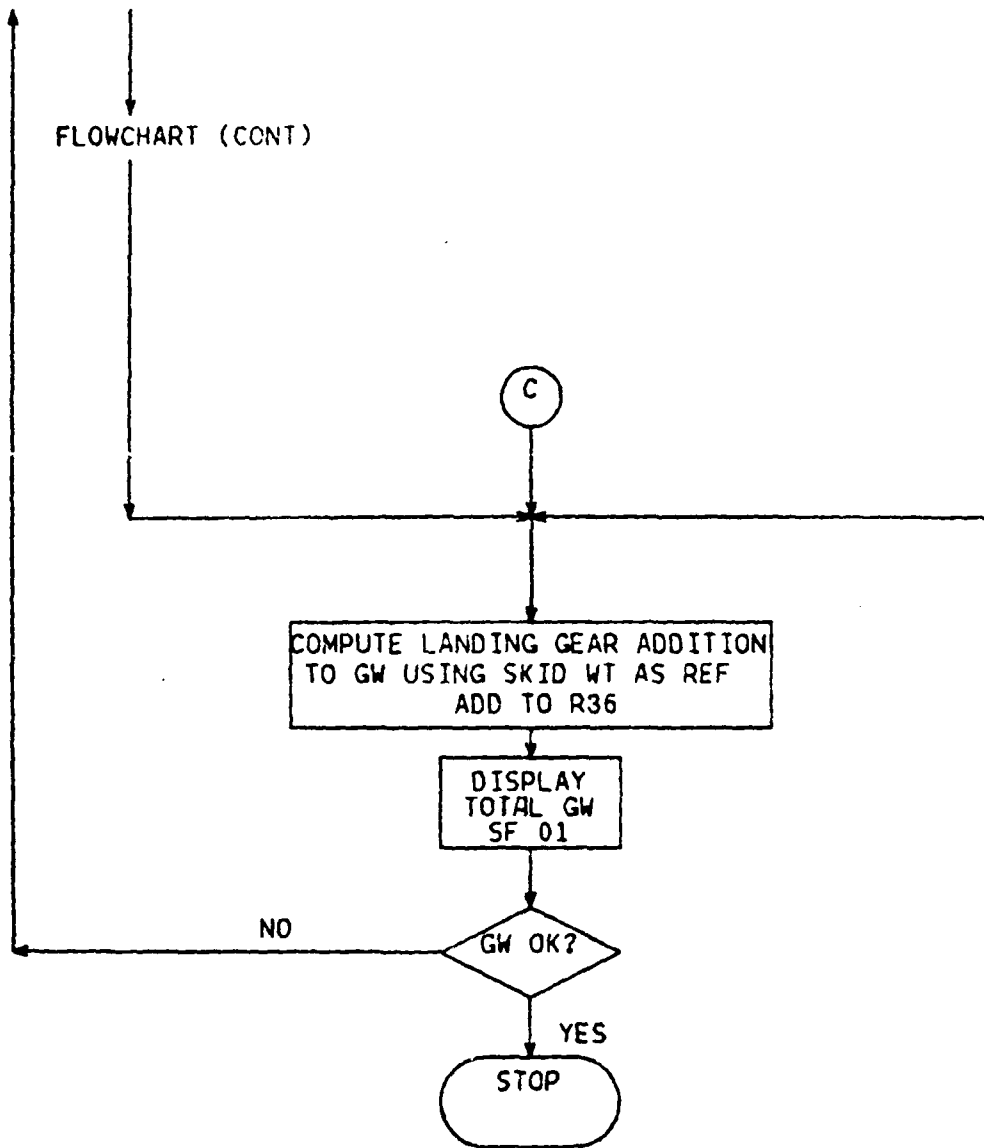

#### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS

The user will note that at the conclusion of the PHV example problem, the program transferred automatically to the WT program (WE=10800.00 was displayed). If this value is in the calculator display window, disregard the initial key stroke instruction.

KEYSTROKES	DISPLAY
XEQ (alpha) WT (alpha)	WE=10,800
(r/s)	Wb=924.0
(r/s)	Wh=582.01
(r/s)	Wp=1477.99
(r/s)	Wf=2268.00
(r/s)	Wc=648.00
(r/s)	We=648.00
(r/s)	Wq=3024.00
(r/s)	WE 2 =9572.01
(r/s)	W FL?
4000 (r/s)	USE LD?
3750 (r/s)	SKID?
1 (r/s)	MR>2 BLDS?
1 (r/s)	T GW=17665.30

At this point, push the (r/s) button. The computer will prompt, "WT OK?" If the weight is far enough below the specification weight to allow room for the added weight of the fixed and retractable landing gear, input 1 (Yes). Input



0 (No), otherwise. If this second option is taken, the computer displays the most recently computed value of empty weight and uses this as a base for iteration. For this example problem, perform an additional iteration.

KEYSTROKES	DISPLAY
(r/s)	WT OK?
0 (r/s)	WE=9572.01
(r/s)	Wb=818.94
(r/s)	Wh=515.83
(r/s)	Wp=1477.99
(r/s)	Wf=2010.12
(r/s)	Wc=574.32
(r/s)	We=574.32
(r/s)	Wq=2680.16
(r/s)	WE 2 =8651.69
(r/s)	W FL?
4000 (r/s)	USE LD=?
3750 (r/s)	SKID?
1 (r/s)	MB>2 BLDS?
1 (r/s)	T GW=16744.99
(r/s)	WT OK?
1 (r/s)	

The program transfers back to the MR program. This newly computed value of gross weight is now used to obtain the MR output. The user must again check to insure all values are within prescribed specifications.

## 5. PROGRAM LISTING

```

01*LBL *WT*
02 OF 05
03 FIX 2
04 F92 55
05 OF 21
06 RCL 39
07 .6
08 *
09*LBL 01
10 F92 02
11 STO 02
12 F92 01
13 RCL 35
14 *WE=*
15 ARCL Y
16 AVIEW
17 STOP
18 STO 35
19 RCL 05
20 .4
21 Y*Y
22 *
23 .06
24 *
25 RCL 19
26 .33
27 Y*Y
28 *
29 STO 36
30 *WB=*
31 ARCL X
32 AVIEW
33 STOP
34 RCL 35
35 .0135
36 *
37 RCL 05
38 .42
39 Y*Y
40 *
41 ST+ 36
42 *WH=*
43 ARCL Y
44 AVIEW
45 STOP
46 RCL 39
47 1.2
48 *
49 ST+ 36
50 *WP=*
51 ARCL Y
52 AVIEW
53 STOP
54 RCL 35
55 .21
56 *
57 ST+ 36
58 *WE=*
59 ARCL Y
60 AVIEW
61 STOP
62 RCL 35
63 .06
64 *
65 ST+ 36
66 *WD=*
67 ARCL X
68 AVIEW
69 STOP
70 RCL 35
71 .06
72 *
73 ST+ 36
74 *WB=*
75 ARCL X
76 AVIEW
77 STOP
78 RCL 35
79 .28
80 *
81 ST+ 36
82 *WB=*
83 ARCL X
84 AVIEW
85 STOP
86 RCL 36
87 *WE 2=*
88 ARCL X
89 AVIEW
90 STOP
91 STO 35
92*LBL 02
93 RCL 35
94 F92 03
95 STO 36
96 *W FLD*
97 PROMPT
98 ST+ 36

```

99 *USE L00*	148 GTO 09
100 PROMPT	149+LBL 05
101 ST+ 36	150 4
102 *SKID?	151 ENTER+
103 PROMPT	152 .8046
104 X>0?	153 Y+X
105 GTO 04	154 RCL 39
106 RCL 39	155 .8606
107 1000	156 Y+X
108 /	157 *
109 .66E2	158 .0245
110 Y+X	159 *
111 STO 00	160 GTO 65
112 *NO. LG?	161 GTO 09
113 PROMPT	162+LBL 07
114 .536	163 RCL 66
115 Y+X	164 RCL 65
116 ST* 00	165 -
117 40	166 2
118 ST* 00	167 *
119 RCL 00	168 RCL 66
120 STO 66	169 +
121 *FX GR?	170 GTO 09
122 PROMPT	171+LBL 08
123 X>0?	172 RCL 00
124 GTO 07	173 RCL 65
125 2	174 -
126 ENTER+	175 2
127 .1198	176 *
128 Y+X	177 RCL 00
129 ST* 00	178 +
130 RCL 00	179+LBL 09
131 GTO 08	180 ST+ 36
132+LBL 04	181 RCL 36
133 *MR? BLDG?	182 *T GW=
134 PROMPT	183 RPCL X
135 X>0?	184 RVIEW
136 GTO 05	185 STOP
137 2	186 FS? 03
138 ENTER+	187 XEQ *PTOT*
139 .8046	188 SF 01
140 Y+X	189 *WT OK?
141 RCL 39	190 PROMPT
142 .8606	191 X=0?
143 Y+X	192 GTO 01
144 *	193 SF 04
145 .0245	194 XEQ *MR*
146 *	195 END
147 STO 65	

## TOTAL POWER (PTOT)

### 1. PURPOSE

Three PTOT programs were written. The first program was designed specifically for use with the HP82143A printer. The printer outputs the velocity and corresponding engine shaft horsepower required. The second PTOT program was designed for the user who does not have access to the HP printer. This program displays the engine shaft horsepower required at an inputted velocity. The third program displays, for an inputted velocity, all of the individual powers required, for both main and tail rotors, the total power required and the engine shaft horsepower required. This program can be used with or without the printer. Because of the detail involved with this program, execution is much slower than with the other two programs.

### 2. EQUATIONS

$$P_p(\text{mr fwd}) = (0.5) * \rho * V(\text{fwd})^{**3} * E_{FPA}(\text{ff})$$
$$V_i(\text{mr hover}) = (GW / (2 * \rho * A))^{**0.5}$$
$$P_i(\text{mr fwd}) = GW * (- (V(\text{fwd})^{**2} / V_i(\text{hover})^{**2}) / 2 + ((V(\text{fwd})^{**2} / (2 * V_i(\text{hover})^{**2}) + 1)^{**0.5}))^{**0.5} * V_i(\text{hover})$$
$$P_o(\text{mr hover}) = (\text{SIGMA}(\text{mr}) * C_{do}(\text{mr}) * \rho * A(\text{mr}) * V(\text{mr tip})^{**3}) / 4400$$
$$MU(\text{mr}) = V(\text{fwd}) / V(\text{mr tip})$$
$$P_o(\text{mr fwd}) = (1 + 4.3 * MU^{**2}) * P_o(\text{mr hover})$$
$$P_t(\text{mr fwd}) = P_o(\text{mr fwd}) + P_p(\text{mr fwd}) + P_i(\text{mr fwd})$$
$$\text{Mach Tip}(\text{mr}) = (V(\text{fwd}) + V(\text{mr tip})) / (\text{gamma} * g * R * T)^{**0.5}$$

$$R(\text{tr}) = (\text{GW} / 1000)^{.5} * 1.3$$

$$L(\text{tail}) = R(\text{tr}) + R(\text{mr}) + .5$$

$$\text{Chord}(\text{tr}) = R(\text{tr}) / \text{AR}(\text{tr})$$

$$T(\text{tr}) = \text{Pt}(\text{mr hover oge}) / (\text{RV}(\text{mr}) * L(\text{tr}))$$

$$A(\text{tr}) = R(\text{tr})^{.2} * \text{PI}$$

$$V(\text{tr tip}) = \text{RV}(\text{mr}) * 4.5 * R(\text{tr})$$

$$\text{CT}(\text{tr}) = T(\text{tr}) / (A(\text{tr}) * \text{rho} * V(\text{tr tip})^{.2})$$

$$B(\text{tr}) = 1 - ((2 * \text{CT}(\text{tr}))^{.5} / b(\text{tr}))$$

$$\text{Pi}(\text{tr tl hover}) = (1 / B(\text{tr})) * (T(\text{tr})^{1.5} / (2 * \text{rho} * A(\text{tr})^{.5}))$$

$$\text{SIGMA}(\text{tr}) = (b(\text{tr}) * C(\text{tr})) / (R(\text{tr}) * \text{PI})$$

$$\text{Po}(\text{tr hover}) = (\text{SIGMA}(\text{tr}) * \text{Cdo}(\text{tr}) * \text{rho} * A(\text{tr}) * V(\text{tr tip})^{.3}) / 4400$$

$$\text{Pt}(\text{tr hover}) = \text{Po}(\text{tr}) + \text{Pi}(\text{tr tl})$$

$$\text{MU}(\text{tr}) = V(\text{fwd}) / V(\text{tr tl})$$

$$\text{Po}(\text{tr fwd}) = \text{Po}(\text{tr hover}) * (1 + 4.3 * \text{MU}(\text{tr})^{.2})$$

$$T(\text{tr fwd}) = \text{Pt}(\text{mr fwd}) / (\text{RV}(\text{mr}) * L(\text{tr}))$$

$$\text{CT}(\text{tr fwd}) = T(\text{tr fwd}) / (A(\text{tr}) * \text{rho} * V(\text{tr tip})^{.2})$$

$$B(\text{tr fwd}) = 1 - ((2 * \text{CT}(\text{tr}))^{.5} / b(\text{tr}))$$

$$V_i(\text{tr hover}) = (T(\text{tr}) / (2 * \text{rho} * A(\text{tr})^{.5}))^{.5}$$

$$V_i(\text{tr fwd}) = ((- (v(\text{fwd})^{.2} / 2) + (V(\text{fwd})^{.2} / 2)^{.2}) * (\text{Pi}(\text{fwd}) / \text{P}(\text{hover})^{.2} * V_i(\text{tr hover})^{.4}))^{.5}$$

$$\text{Pi}(\text{tr fwd}) = (1 / B(\text{tr})) * T(\text{tr}) * V_i(\text{tr fwd})$$

$$\text{Pt}(\text{tr fwd}) = \text{Pi}(\text{tr fwd tl}) + \text{Po}(\text{tr fwd})$$

$$\text{Mach Tip}(\text{tr}) = (V(\text{fwd}) + V(\text{tr tip})) / (\text{gamma} * g * R * T)^{.5}$$

where:

Pp is the parasite power.

$EFPA$  (ff) is the effective flat plate area (forward flight).

$V_i(\text{hover})$  is the induced velocity in hover.

$P_i(\text{hover})$  is the induced power required to hover.

$P_o(\text{hover})$  is the profile power required to hover.

$SIGMA$  is the solidity.

$C_{do}$  is the coefficient of drag.

$RHO$  is the density.

$A(\text{mr})$  is the area of the main rotor.

$V(\text{mr tip})$  is the tip velocity of the main rotor.

$R(\text{tr})$  is the radius of the tail rotor.

$L(\text{tr})$  is the length of the helicopter tail from the  
main rotor shaft to the tail rotor.


$T(\text{tr})$  is the thrust of the tail rotor.

$CT(\text{tr})$  is the coefficient of thrust of the tail rotor.


$B(\text{tr})$  is the tip loss (tl) factor (tail rotor).

3. FLOWCHART

A. PTOT (PRINTER)

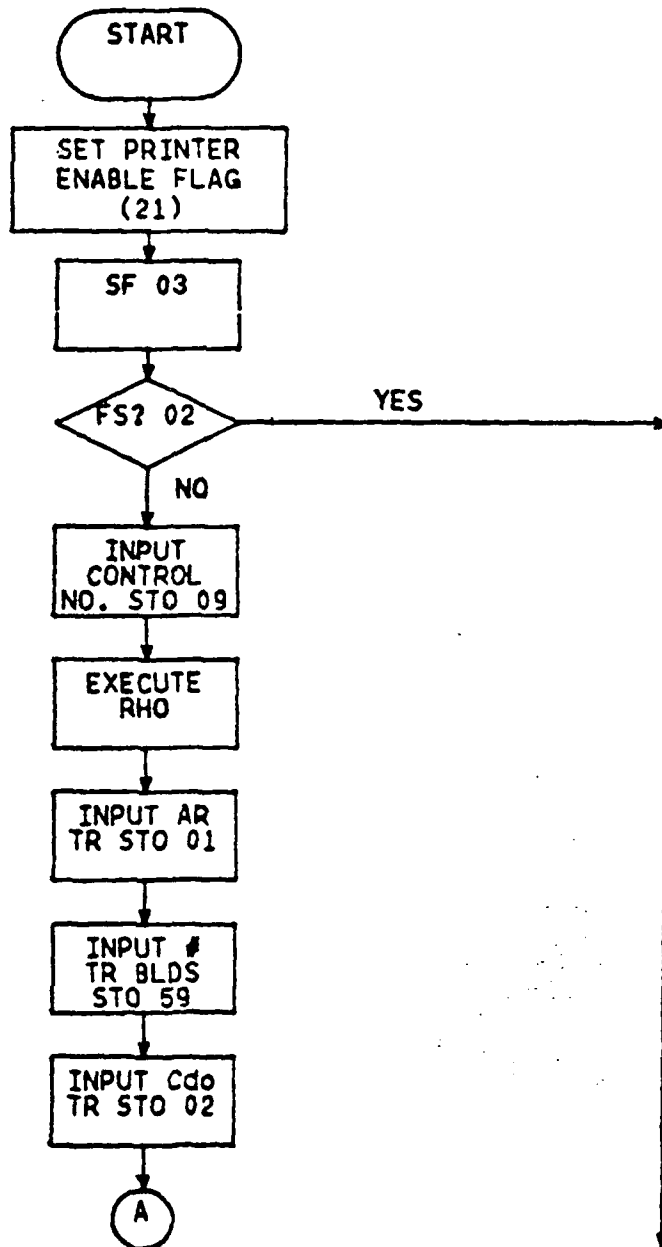


PTOT (PRINTER) (CONT)

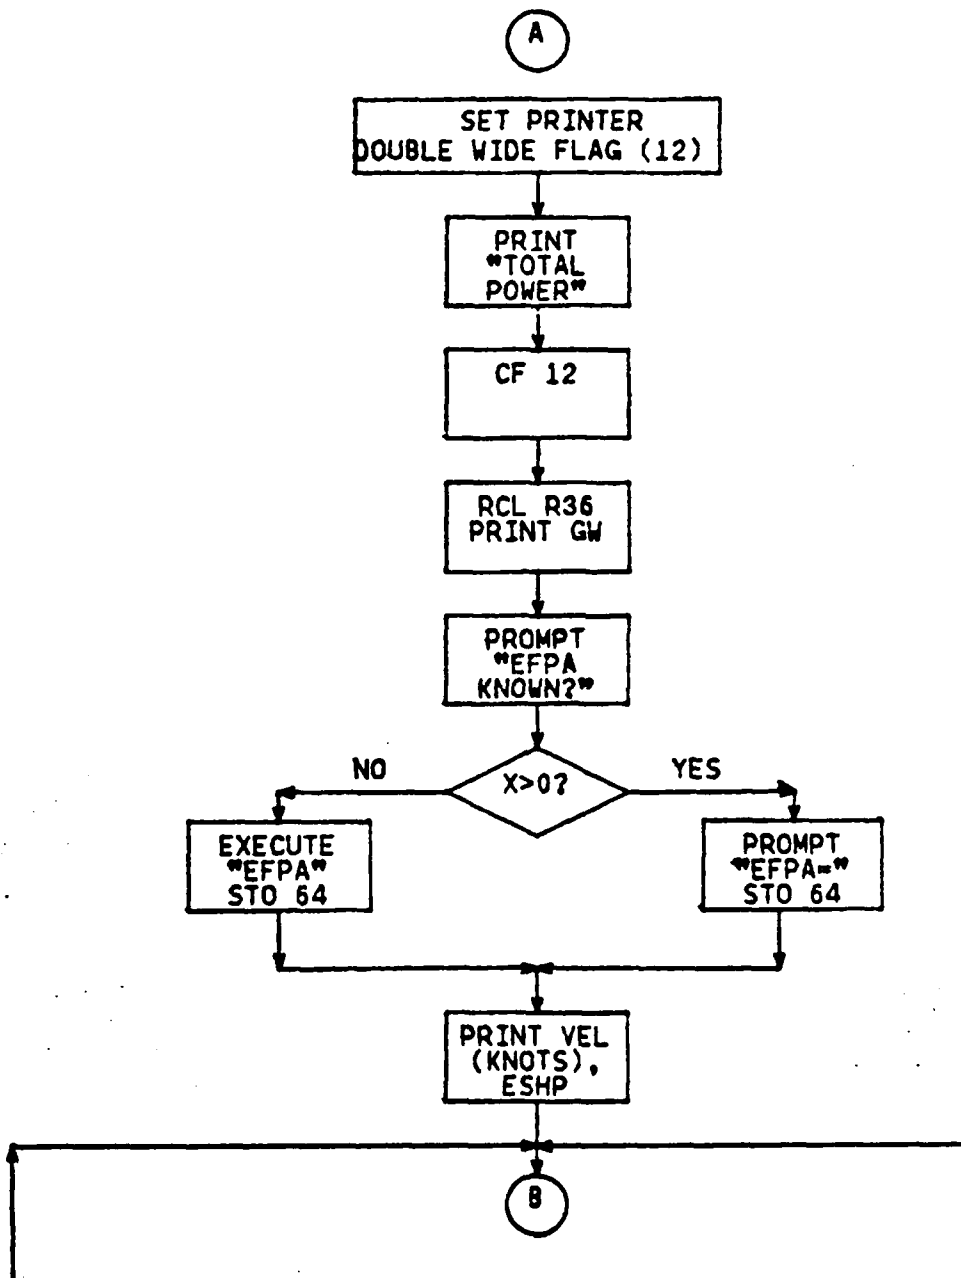





PTOT (PRINTER) (CONT)

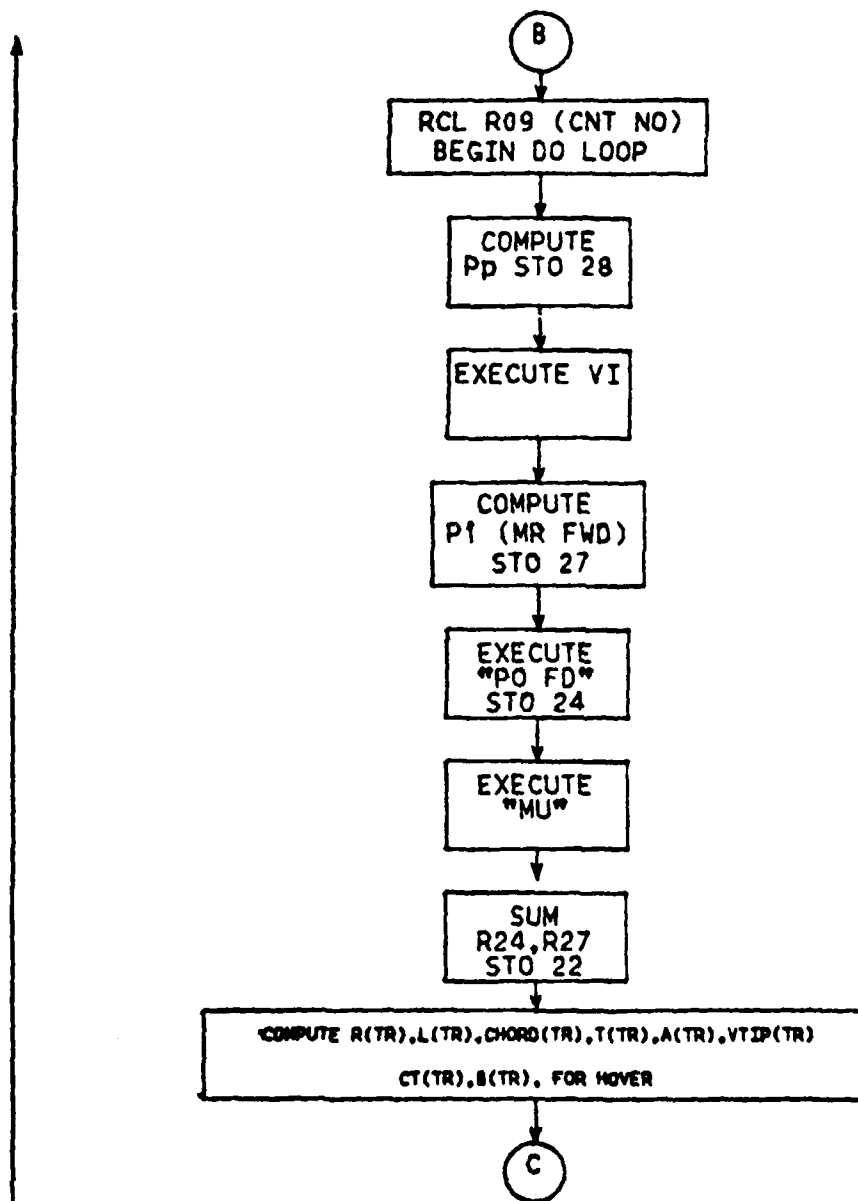


PTOT (PRINTER) (CONT)

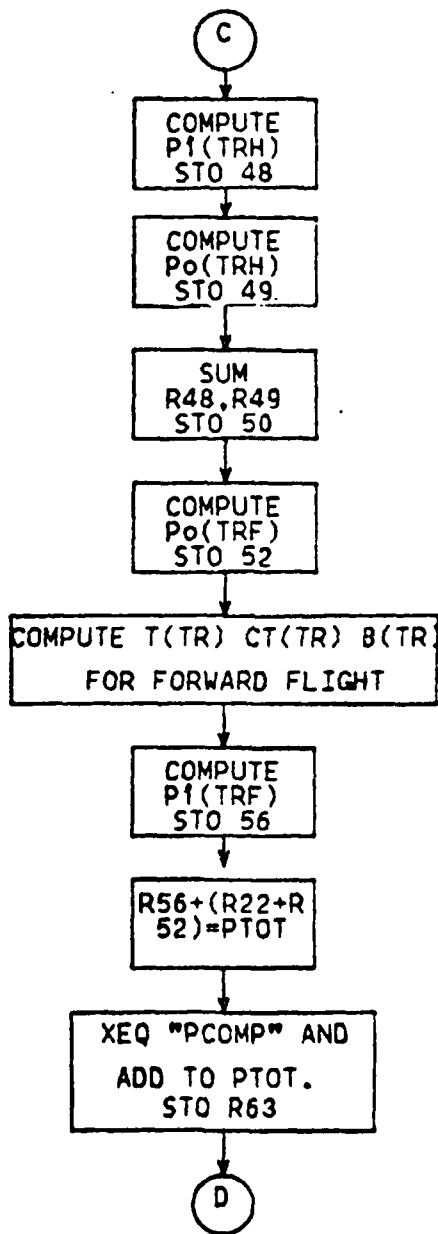


PTOT (PRINTER) (CONT)

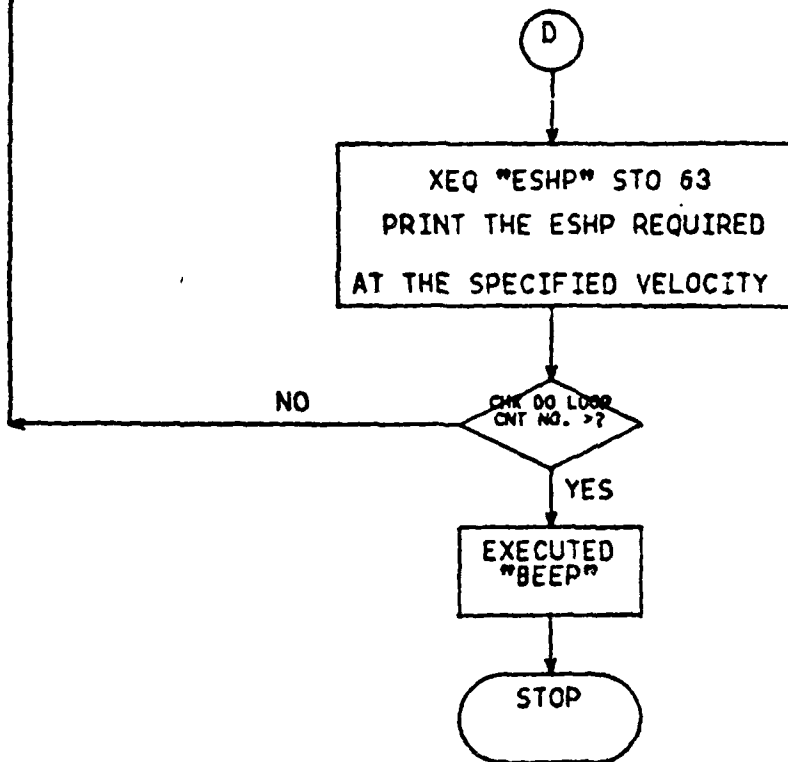


B. PTOT (ABBREVIATED)

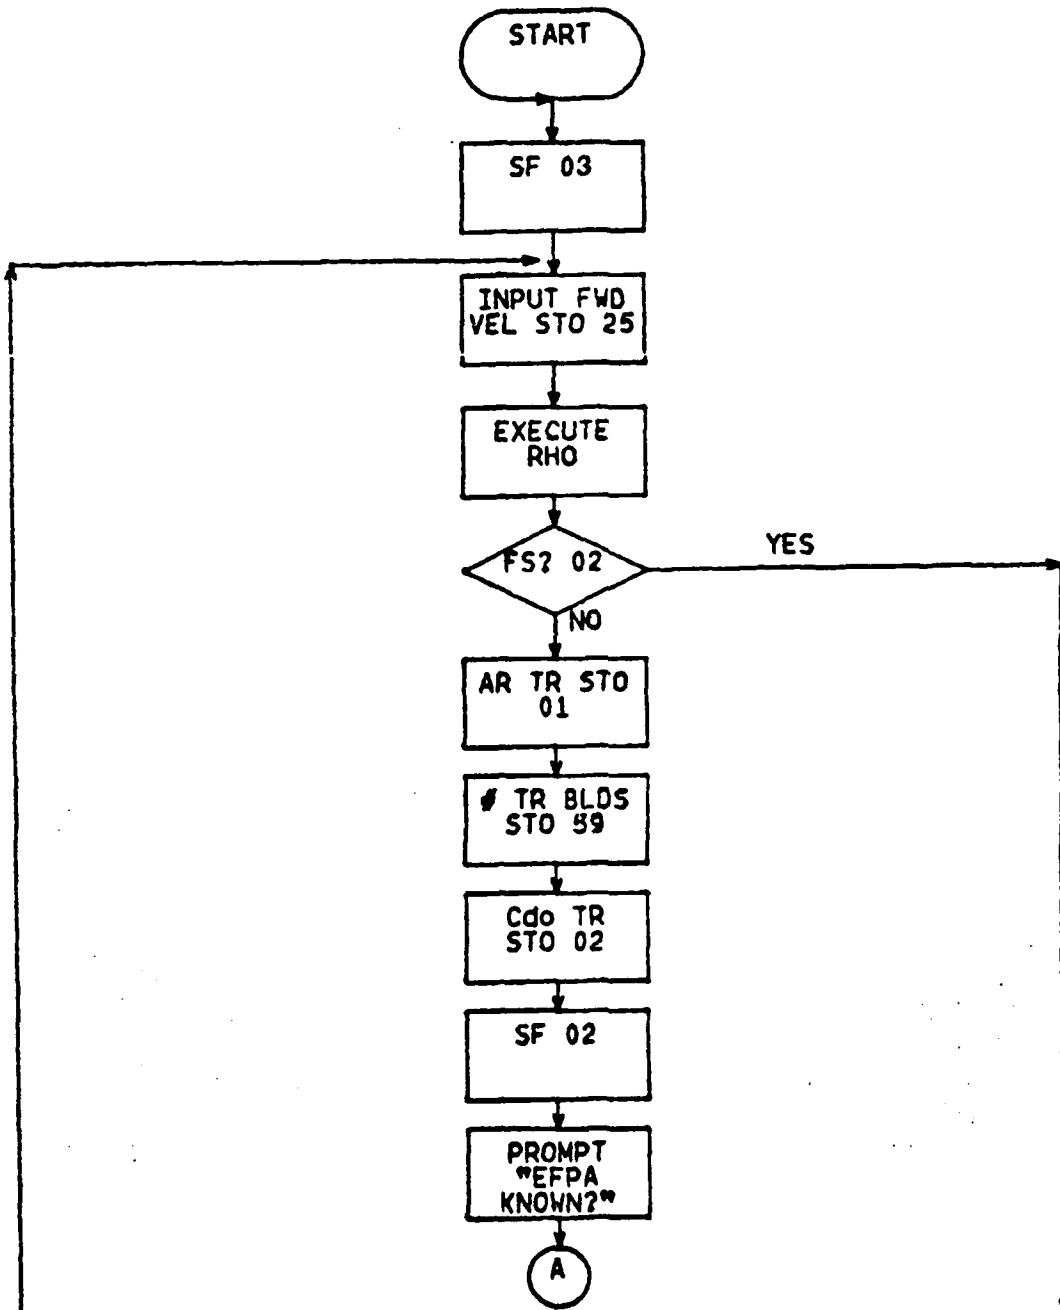


PTOT (ABBREVIATED) (CONT)

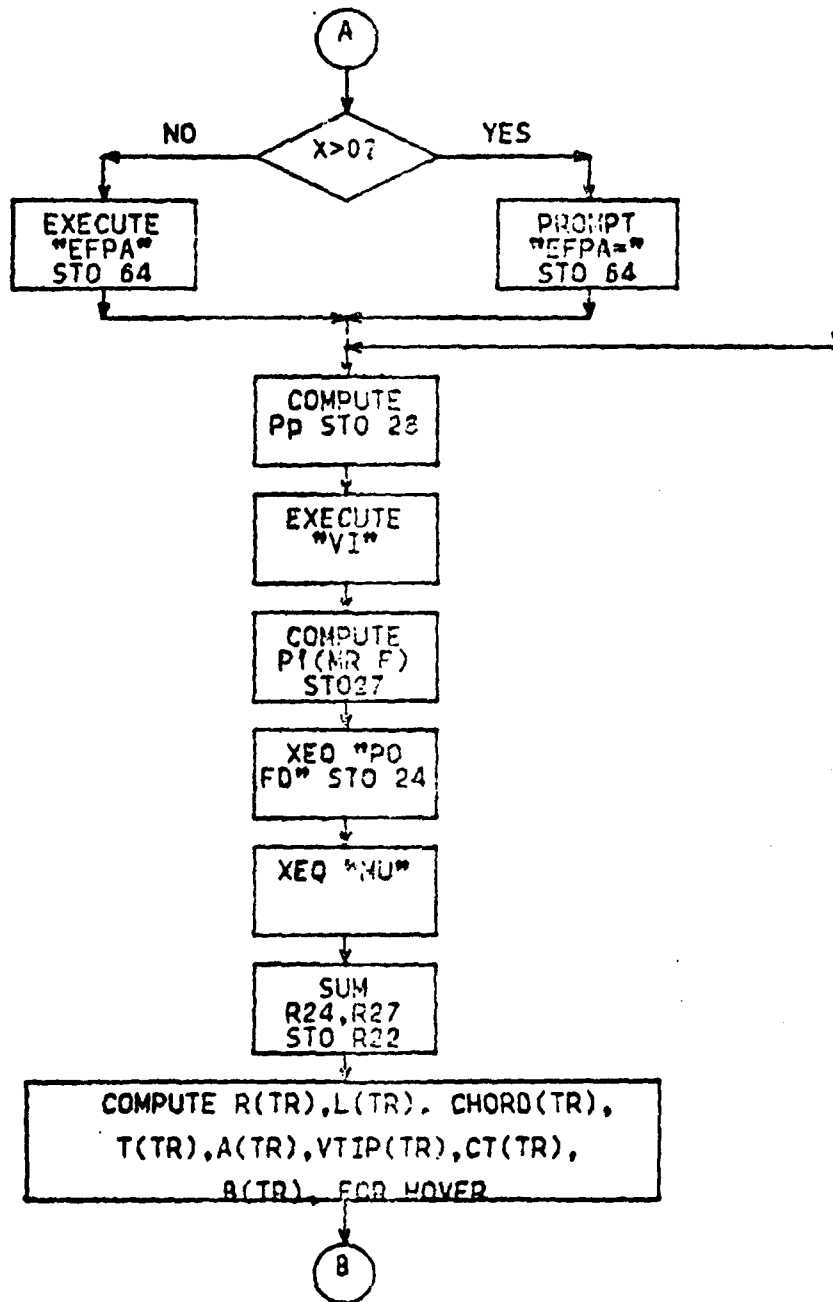


PTOT (ABBREVIATED) (CONT)

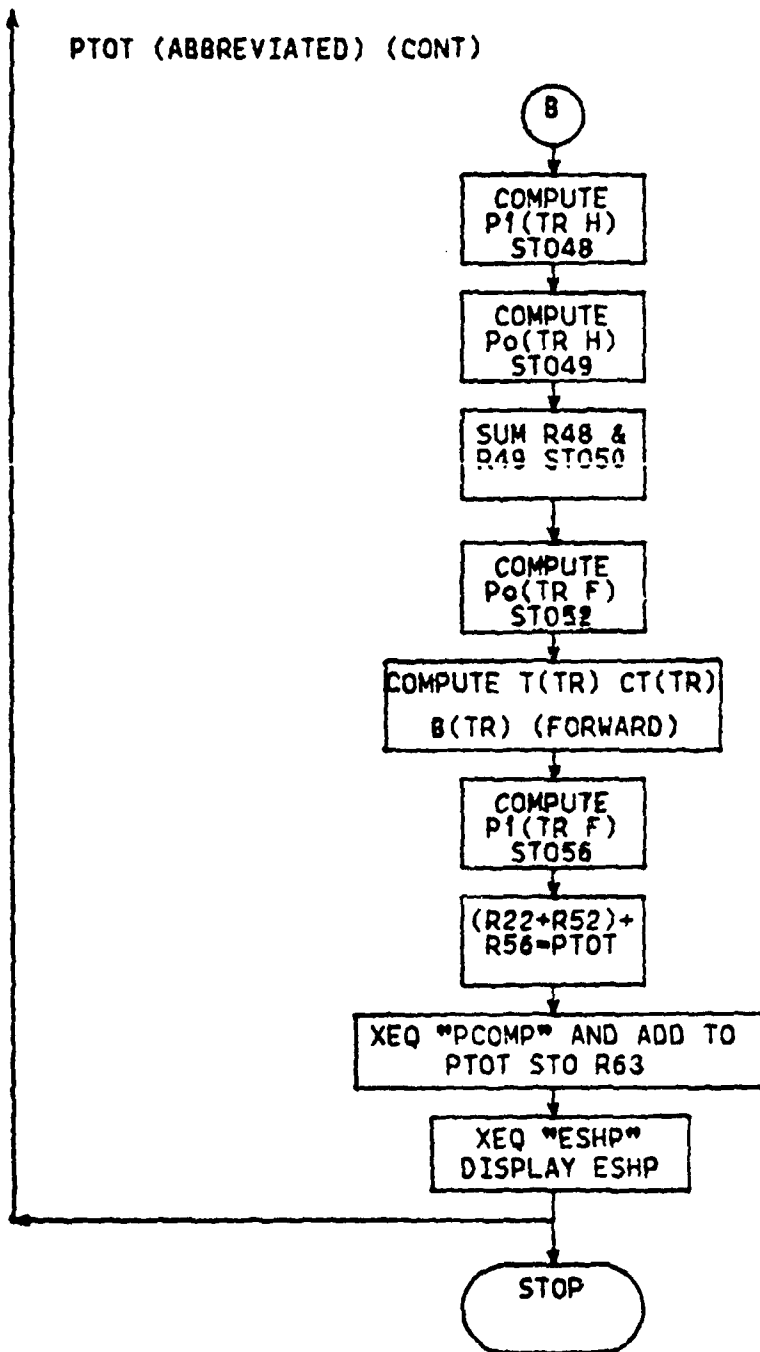

C. PTOT (FULL DISPLAY)

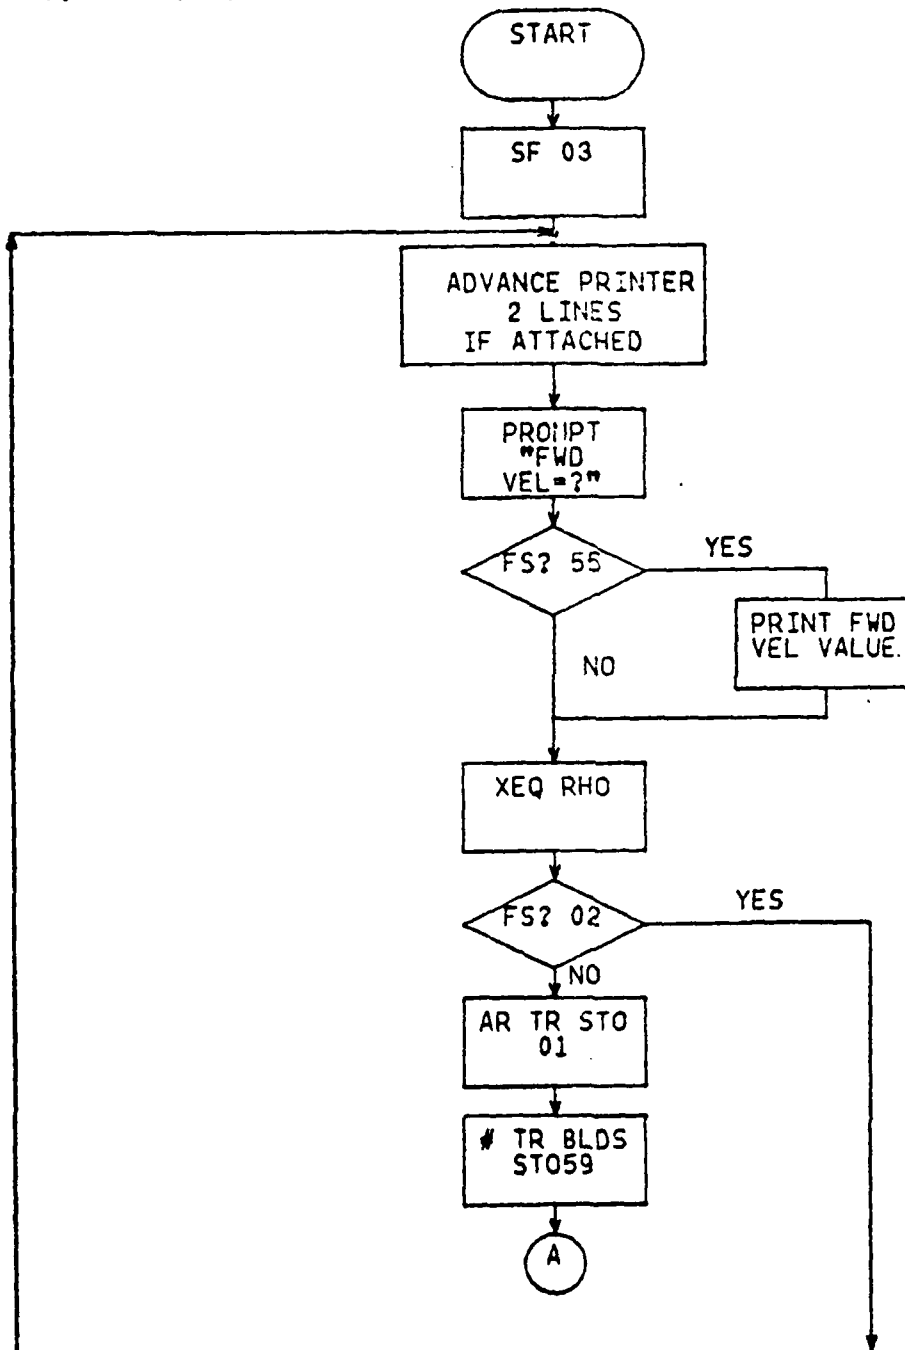


PTOT (FULL DISPLAY) (CONT)

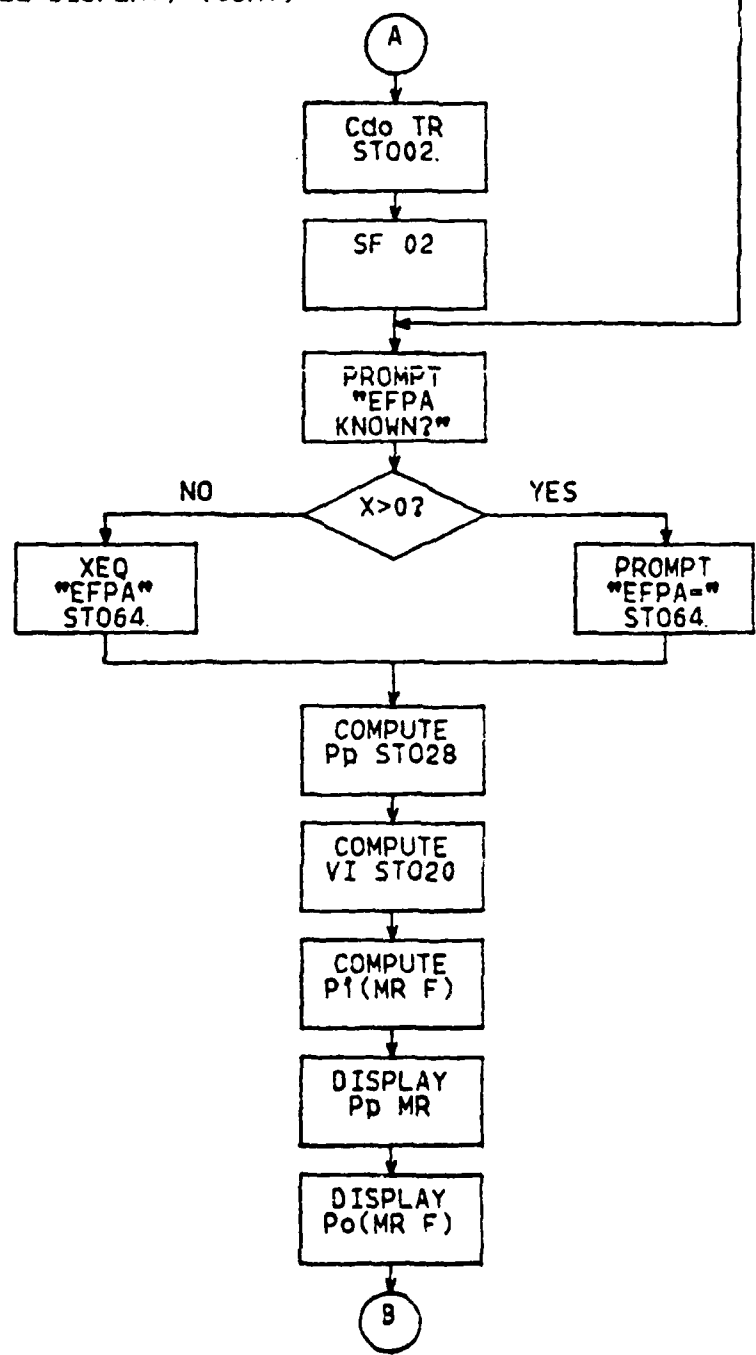




PTOT (FULL DISPLAY) (CONT)

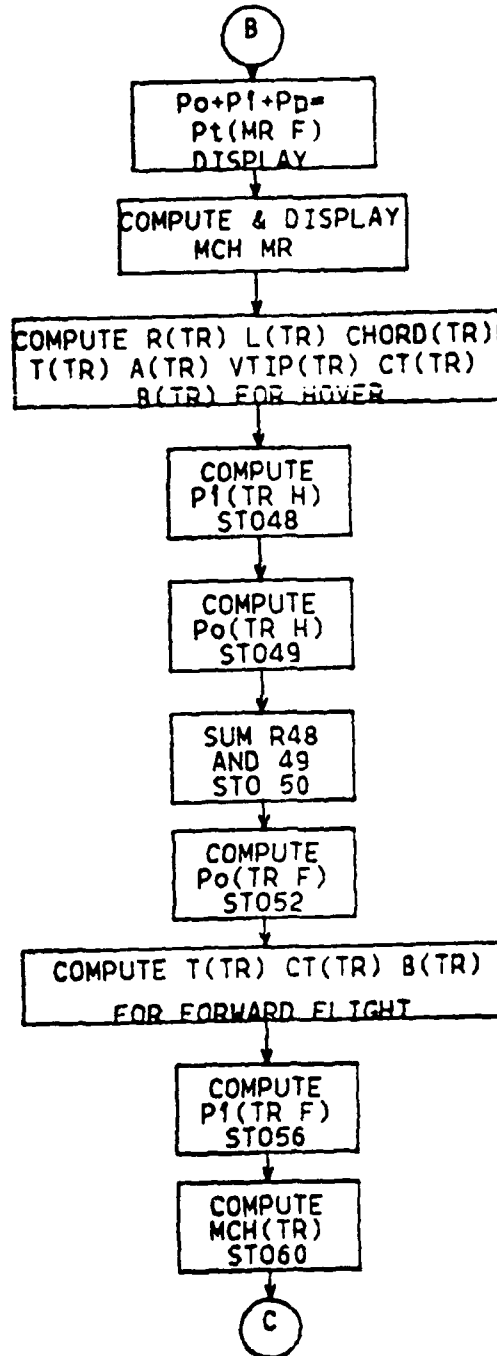

PTOT (FULL DISPLAY) (CONT)

(C)

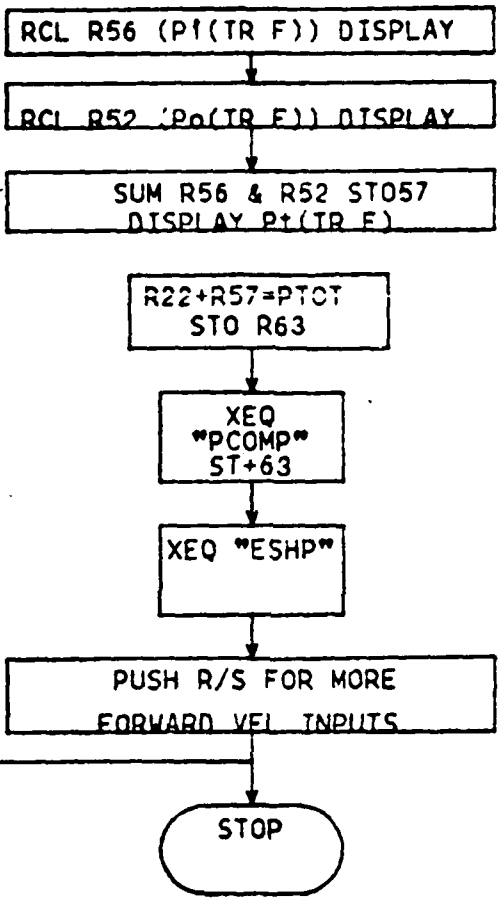

4. EXAMPLE PROBLEM AND USER INSTRUCTIONS (PTOT--PRINTER)

Calculate the total engine shaft horsepower required for the example helicopter from 0 to 160 knots at standard sea level (0 PA, 15 DEG CEN). Increment the velocity every 20 knots.

Note: When prompted to input the control number, the user should recall that this number is of the form CCC.XXXFF. The CCC describes the starting value. .XXX is the final value, and FF is the incremental spacing. If the starting value is zero, the CCC need not be entered. For this example, input .16020.

KEYSTROKES	DISPLAY
XEQ (ALPHA) PTOT (ALPHA)	INPUT CNT NO.
0.16020 (R/S)	PA=?
0 (R/S)	TEMP C=?
15 (R/S)	AR TR=?
8 (R/S)	NO. TR BLS?
4 (R/S)	CDO TR=?
0.0145 (R/S)	EFPA KNOWN?
0 (R/S)	CLEAN LINES?
1 (R/S)	SKID?
1 (R/S)	EFPA=20.95
(R/S)	NO. ENGS=?
2 (R/S)	

Note: This program can, at this point, only be executed using skid data because the gross weight computation used in the "WT" program was computed on the basis of skid landing gear.

Definitions:

PA is the pressure altitude.

TEMP C is the temperature in centigrade.

AR TR is the aspect ratio of the tail rotor (historically between 4.5 and 8.0).

NO. ENGS is the number of engines.

5. PRINTER OUTPUT

TOTAL POWER

GW=16744.99

EFFRQ=20.95

VEL (KNOTS)

ESHP

0	***
1861	***
20	***
1608	***
40	***
1204	***
60	***
1107	***
80	***
1173	***
100	***
1056	***
120	***
1647	***
140	***
2049	***
160	***
2576	***

6. EXAMPLE PROBLEM AND USER INSTRUCTIONS (PTOT--ABBREVIATED)

Note: Clear PTOT (PRINTER) and insert PTOT (ABBREVIATION).

Clear flags 02 and 05 manually.

KEYSTROKES	DISPLAY
(SHIFT) CF 02	0
(SHIFT) CF 05	0
XEQ (ALPHA) CLP (ALPHA)	CLP__
(ALPHA) PTOT (ALPHA)	-----

AFTER INPUTTING PTOT (ABBREVIATED):

KEYSTROKES	DISPLAY
XEQ (ALPHA) PTOT (ALPHA)	FWD VEL=?
0 (R/S)	PA=?
0 (R/S)	TEMP C=?
15 (R/S)	AR TR=?
8 (R/S)	NO. TR BLS?
4 (R/S)	CDO TR=?
0.0145 (R/S)	EFPA KNOWN?
1 (R/S)	EFPA=?
20.95 (R/S)	NO. ENGS=?
2 (R/S)	ESHP=1861.14
(R/S)	FWD VEL?
20 (R/S)	ESHP=1608.01
(R/S)	FWD VEL?
40 (R/S)	ESHP=1204.25
(R/S)	FWD VEL?

60	(R/S)	1107.36
	(R/S)	FWD VEL?
80	(R/S)	1173.43
	(R/S)	FWD VEL?
100	(R/S)	ESH P=1356.32
	(R/S)	FWD VEL?
120	(R/S)	1646.68
	(R/S)	FWD VEL?
140	(R/S)	ESH P=2049.57
	(R/S)	FWD VEL?
160	(R/S)	ESH P=2575.93

Note: When prompted "EFPA KNOWN?" a 1 was inputted (Yes) since the EFPA was known from the PTOT (PRINTER) program. This results in a more rapid program execution.

#### 7. EXAMPLE PROBLEM AND USER INSTRUCTIONS (PTOT-FULL DISPLAY)

Note: Clear PTOT (ABBREVIATION) and input PTOT (FULL DISPLAY). Also clear flags 02, 03, and 05.

KEYSTROKES	DISPLAY
XEQ (ALPHA) PTOT (ALPHA)	FWD VEL=?
0 (R/S)	PA=?
0 (R/S)	TEMP C=?
15 (R/S)	AR TR=?
8 (R/S)	NO. TR BLDS?
4 (R/S)	CDO TR=?
0.0145 (R/S)	EFPA KNOWN?

1 (R/S)

EFPA=?

20.95 (R/S)

For the inputted forward velocity of 0 knots, the following power values are displayed:

Pi(fwd)=1227.14

Pp=0.0

Po(fwd)=296.54

Pt(fwd)=1523.69

MCH(mr) = .65

MCH(tr)=0.58

Pi(tr fwd)=85.04

Po(tr fwd)=29.51

Pt(tr fwd)=114.55

PTOT=1638.24

The user is then prompted for the number of engines (this only occurs during the first iteration). After inputting 2 engines, the engine shaft horsepower required at zero air-speed is displayed: 1861.14. After pushing the (r/s) key, the user will be prompted for the forward velocity, pressure altitude, and temperature. In this way, power requirements at any airspeed and altitude may be computed anytime during the program operation. The user may transcribe a table of values from the displayed output.



8. PRINTER OUTPUT (PTOT--FULL DISPLAY)

With the HP 82143A printer attached, the following data is outputted during the running of the program (two iterations are shown).

0.00 \*\*\*  
PI FD=1237.14  
PP=0.00  
PO FD=296.54  
PT FD=1523.69  
MCH MR=0.65  
MCH TR=0.58  
PI TRF=85.04  
PO TRF=29.51  
PT TRF=114.55  
PTOT=1638.24  
ESHP=1061.14

20.00 \*\*\*  
PI FD=1023.74  
PP=1.74  
PO FD=299.30  
PT FD=1324.79  
MCH MR=0.68  
MCH TR=0.61  
PI TRF=59.56  
PO TRF=29.86  
PT TRF=89.42  
PTOT=1414.20  
ESHP=1608.01

9. PROGRAM LISTINGS

A. PTOT (PRINTER) LISTING

01*LBL "PTOT"	39 GTO 03	77*LBL "PO FD"
02 SF 21	40*LBL 02	78 RCL 13
03 SF 03	41 "EFPA=?"	79 ?
04 "INPUT CNT NO."	42 PROMPT	80 Y+Y
05 PROMPT	43 PRA	81 RCL 12
06 STO 09	44 STO 64	82 *
07 FS? 02	45 XEQ "PRX"	83 RCL 11
08 GTO 02	46*LBL 03	84 *
09 XEQ "PHO"	47 FIX 0	85 RCL 07
10 "AR TR=?"	48 RCL 09	86 *
11 PROMPT	49 ADV	87 RCL 19
12 STO 01	50 "VEL (KNOTS)"	88 *
13 "NO. TR BLS?"	51 PRA	89 4400
14 PROMPT	52 "ESHP"	90 /
15 STO 59	53 PRA	91 STO 21
16 "CDO TR=?"	54 ADV	92 XEQ "MU"
17 PROMPT	55*LBL 01	93 Y+2
18 STO 02	56 RCL 09	94 4.3
19 SF 02	57 INT	95 *
20*LBL 02	58 PRX	96 1
21 SF 12	59 .59248	97 +
22 ADV	60 /	98 *
23 ADV	61 STO 25	99 STO 24
24 "TOTAL POWER"	62 3	100 RTN
25 PRA	63 Y+X	101*LBL "MU"
26 ADV	64 RCL 64	102 RCL 25
27 ADV	65 RCL 11	103 RCL 13
28 CF 12	66 *	104 /
29 RCL 36	67 .5	105 RTN
30 "GW="	68 *	106*LBL "VI"
31 ARCL X	69 RCL 25	107 RCL 36
32 AVIEW	70 ?	108 RCL 11
33 "EFPA KNOWN?"	71 Y+X	109 RCL 12
34 PROMPT	72 *	110 *
35 X'0?	73 550	111 2
36 GTO 02	74 /	112 *
37 XEQ "EFPA"	75 STO 28	113 /
38*LBL "DD"	76 GTO "PT FD"	114 SORT

115 STO 20	153 +	191 STO 44
116*LBL *PI FD*	154 STO 22	192 Y+2
117 RCL 25	155*LBL *TR*	193 RCL 11
118 X+2	156 RCL 36	194 *
119 RCL 20	157 1000	195 RCL 43
120 X+2	158 /	196 *
121 /	159 SQRT	197 RCL 41
122 2	160 1.3	198 X<Y
123 /	161 *	199 /
124 CHS	162 STO 42	200 STO 45
125 RCL 25	163 RCL 05	201 2
126 X+2	164 +	202 *
127 RCL 20	165 .5	203 SQRT
128 X+2	166 +	204 RCL 59
129 2	167 STO 40	205 /
130 *	168 RCL 42	206 CHS
131 /	169 RCL 01	207 1
132 X+2	170 /	208 +
133 1	171 STO 58	209 STO 47
134 +	172 RCL 30	210 RCL 41
135 SQRT	173 550	211 1.5
136 +	174 *	212 Y+X
137 SQRT	175 RCL 08	213 RCL 43
138 RCL 20	176 RCL 40	214 RCL 11
139 *	177 *	215 *
140 RCL 36	178 /	216 2
141 *	179 STO 41	217 *
142 RCL 15	180 RCL 42	218 SQRT
143 /	181 X+2	219 /
144 550	182 PI	220 RCL 47
145 /	183 *	221 /
146 STO 27	184 STO 43	222 550
147 RTN	185 4.5	223 /
148*LBL *PT FD*	186 ENTER+	224 STO 48
149 XEQ *VI*	187 RCL 08	225 RCL 59
150 RCL 28	188 *	226 RCL 58
151 +	189 RCL 42	227 *
152 XEQ *PO FD*	190 *	228 RCL 42

229 PI	267 /	305 RCL 25
230 *	268 550	306 X+2
231 /	269 *	307 RCL 26
232 STO 29	270 STO 53	308 X+2
233 RCL 44	271 RCL 43	309 2
234 3	272 RCL 11	310 *
235 Y+X	273 *	311 /
236 RCL 43	274 RCL 44	312 X+3
237 *	275 X+2	313 1
238 RCL 11	276 *	314 +
239 *	277 /	315 SQRT
240 RCL 02	278 STO 54	316 +
241 *	279 2	317 SQRT
242 RCL 29	280 *	318 RCL 26
243 *	281 SQRT	319 *
244 4400	282 RCL 59	320 RCL 53
245 /	283 /	321 *
246 STO 49	284 CHS	322 550
247 RCL 48	285 1	323 /
248 +	286 +	324 RCL 55
249 STO 50	287 STO 55	325 /
250+LBL "TR2"	288 RCL 25	326 STO 56
251 RCL 25	289 X+2	327 RCL 22
252 RCL 44	290+LBL "VI<TR>"	328 +
253 /	291 RCL 53	329 RCL 52
254 STO 51	292 RCL 11	330 +
255 X+2	293 RCL 43	331 XEQ "PCOMP"
256 4.3	294 *	332 +
257 *	295 2	333 STO 63
258 1	296 *	334 XEQ "ESHP"
259 +	297 /	335 STO 63
260 RCL 49	298 SQRT	336 PRX
261 *	299 STO 26	337 ADV
262 STO 52	300 X+2	338 ISG 09
263 RCL 22	301 /	339 GTD 01
264 RCL 08	302 2	340 BEEP
265 RCL 40	303 /	341 STOP
266 *	304 CHS	342 END

B. PTOT (ABBREVIATED) LISTING

01*LBL *PTOT*	37 STO 64	77 *
02 SF 03	38*LBL 04	74 STO 24
03*LBL 03	39 RCL 64	75 RTN
04 FIX 2	40 RCL 11	76*LBL *MU*
05 *FWD VEL?*	41 *	77 RCL 25
06 PROMPT	42 .5	78 RCL 13
07 .59249	43 *	79 /
08 /	44 RCL 25	80 RTN
09 STO 25	45 3	81*LBL *VI*
10 3	46 Y+X	82 RCL 36
11 Y+X	47 *	83 RCL 11
12 FS? 05	48 550	84 RCL 12
13 STO 04	49 /	85 *
14 XEQ *RHO*	50 STO 28	86 2
15 FS? 02	51 GTO *PT FD*	87 *
16 GTO 04	52*LBL *PO FD*	88 /
17 *OR TR=?*	53 RCL 13	89 SORT
18 PROMPT	54 3	90 STO 20
19 STO 01	55 Y+X	91*LBL *PI FD*
20 *NO,TR BLS?*	56 RCL 12	92 RCL 25
21 PROMPT	57 *	93 X+2
22 STO 59	58 RCL 11	94 RCL 20
23 *CDO TR=?*	59 *	95 X+2
24 PROMPT	60 RCL 07	96 /
25 STO 02	61 *	97 2
26 SF 02	62 RCL 19	98 /
27 *EPPA KNOWN?*	63 *	99 CHS
28 PROMPT	64 4400	100 RCL 25
29 X>0?	65 /	101 X+2
30 GTO 02	66 STO 31	102 RCL 20
31 XEQ *EPPA*	67 XEQ *MU*	103 X+2
32*LBL *DD*	68 X+2	104 2
33 GTO 04	69 A,3	105 *
34*LBL 02	70 *	106 /
35 *EPPA=?*	71 1	107 X+2
36 PROMPT	72 *	108 1

109 +	145 RCL 01	181 /
110 SQRT	146 /	182 CHS
111 +	147 STO 58	183 1
112 SQRT	148 RCL 30	184 +
113 RCL 20	149 550	185 STO 47
114 *	150 *	186 RCL 41
115 RCL 36	151 RCL 08	187 1.5
116 *	152 RCL 40	188 Y+X
117 RCL 15	153 *	189 RCL 43
118 /	154 /	190 RCL 11
119 550	155 STO 41	191 *
120 /	156 RCL 42	192 2
121 STO 27	157 X+2	193 *
122 RTN	158 PI	194 SQRT
123*LBL "PT FD"	159 *	195 /
124 XEQ "VI"	160 STO 43	196 RCL 47
125 RCL 28	161 4.5	197 /
126 +	162 ENTER+	198 550
127 XEQ "PO FD"	163 RCL 08	199 /
128 +	164 *	200 STO 48
129 STO 22	165 RCL 42	201 RCL 59
130*LBL "TR"	166 *	202 RCL 58
131 FIX 2	167 STO 44	203 *
132 RCL 36	168 X+2	204 RCL 42
133 1000	169 RCL 11	205 PI
134 /	170 *	206 *
135 SQRT	171 RCL 43	207 /
136 1.3	172 *	208 STO 29
137 *	173 RCL 41	209 RCL 44
138 STO 42	174 X<Y	210 3
139 RCL 05	175 /	211 Y+X
140 +	176 STO 45	212 RCL 43
141 .5	177 2	213 *
142 +	178 *	214 RCL 11
143 STO 40	179 SQRT	215 *
144 RCL 42	180 RCL 59	216 RCL 02

217 *	253 /	289 1
218 RCL 29	254 STO 54	290 -
219 *	255 2	291 SQRT
220 4400	256 *	292 +
221 /	257 SQRT	293 SQRT
222 STO 49	258 RCL 59	294 RCL 26
223 RCL 48	259 /	295 *
224 +	260 CHS	296 RCL 53
225 STO 50	261 1	297 *
226*LBL "TR2"	262 +	298 550
227 RCL 25	263 STO 55	299 /
228 RCL 44	264 RCL 25	300 RCL 55
229 /	265 X↑2	301 /
230 STO 51	266*LBL "VI(TR)"	302 STO 56
231 X↑2	267 RCL 53	303 RCL 22
232 4.3	268 RCL 11	304 +
233 *	269 RCL 43	305 RCL 52
234 1	270 *	306 +
235 +	271 2	307 XEQ "PCOMP"
236 RCL 49	272 *	308 +
237 *	273 /	309 STO 63
238 STO 52	274 SQRT	310 XEQ "ESHP"
239 RCL 22	275 STO 26	311 STO 63
240 RCL 08	276 X↑2	312 "ESHP="
241 RCL 40	277 /	313 RPCL X
242 *	278 2	314 RVIEW
243 /	279 /	315 STOP
244 550	280 CHS	316 STO 03
245 *	281 RCL 25	317 END
246 STO 53	282 X↑2	
247 RCL 43	283 RCL 26	
248 RCL 11	284 X↑2	
249 *	285 2	
250 RCL 44	286 *	
251 X↑2	287 /	
252 *	288 X↑2	

C. PTOT (FULL DISPLAY) LISTING

01*LBL "PTOT"	44 .5	87*LBL "VI"
02 SF 03	45 *	88 RCL 36
03*LBL 03	46 RCL 25	89 RCL 11
04 FIX 2	47 3	90 RCL 12
05 ADV	48 Y+X	91 *
06 ADV	49 *	92 2
07 "FWD VEL=?"	50 550	93 *
08 PROMPT	51 /	94 .
09 FS? 55	52 STO 28	95 SORT
10 PRX	53 GTO "PT FD"	96 STO 20
11 .59248	54*LBL "PO FD"	97*LBL "PI FD"
12 /	55 RCL 13	98 RCL 25
13 STO 25	56 3	99 X+2
14 3	57 Y+X	100 RCL 20
15 Y+X	58 RCL 12	101 X+2
16 XEQ "RHO"	59 *	102 /
17 FS? 02	60 RCL 11	103 2
18 GTO 04	61 *	104 /
19 "OP TR=?"	62 RCL 07	105 CHS
20 PROMPT	63 *	106 RCL 25
21 STO 01	64 RCL 19	107 X+2
22 "NO. TR BLDS?"	65 *	108 RCL 20
23 PROMPT	66 4400	109 X+2
24 STO 59	67 /	110 2
25 "C00 TR=?"	68 STO 21	111 *
26 PROMPT	69 XEQ "MU"	112 /
27 STO 02	70 X+2	113 X+2
28 SF 02	71 4.3	114 1
29 "EFPA KNOWN?"	72 *	115 +
30 PROMPT	73 1	116 SORT
31 X>0?	74 +	117 +
32 GTO 02	75 *	118 SORT
33 XEQ "EFPA"	76 STO 24	119 RCL 20
34*LBL "DD"	77 "PO FD="	120 *
35 GTO 04	78 RCCL X	121 RCL 36
36*LBL 02	79 AVIEW	122 *
37 "EFPA=?"	80 STOP	123 RCL 15
38 PROMPT	81 RTN	124 .
39 STO 64	82*LBL "MU"	125 550
40*LBL 04	83 RCL 25	126 /
41 RCL 64	84 RCL 13	127 STO 07
42 RCL 11	85 .	128 RTN
43 *	86 RTN	129*LBL "PT FD"



130 XEQ "VI"	173 RCL 05	216 CHS
131 "PI FD="	174 +	217 1
132 ARCL X	175 .5	218 +
133 AVIEW	176 +	219 STO 47
134 STOP	177 STO 40	220 RCL 41
135 RCL 28	178 RCL 42	221 1.5
136 "PP="	179 RCL 01	222 Y+Y
137 ARCL X	180 /	223 RCL 43
138 AVIEW	181 STO 58	224 RCL 11
139 STOP	182 RCL 30	225 *
140 +	183 550	226 2
141 XEQ "PO FD"	184 *	227 *
142 +	185 RCL 08	228 SQRT
143 "PT FD="	186 RCL 40	229 /
144 ARCL X	187 *	230 RCL 47
145 AVIEW	188 /	231 /
146 STO 22	189 STO 41	232 550
147 STOP	190 RCL 42	233 /
148 RCL 25	191 X+2	234 STO 48
149 RCL 13	192 PI	235 RCL 59
150 +	193 *	236 RCL 58
151 401.8	194 STO 43	237 *
152 ENTER+	195 4.5	238 RCL 42
153 RCL 18	196 ENTER+	239 PI
154 *	197 RCL 08	240 *
155 SQRT	198 *	241 /
156 .3048	199 RCL 42	242 STO 29
157 /	200 *	243 RCL 44
158 /	201 STO 44	244 7
159 "MCH MR="	202 X+2	245 Y+X
160 ARCL X	203 RCL 11	246 RCL 43
161 AVIEW	204 *	247 *
162 STO 37	205 RCL 43	248 RCL 11
163 STOP	206 *	249 *
164 LBL "TR"	207 RCL 41	250 RCL 02
165 FIX 2	208 X+Y	251 *
166 RCL 36	209 /	252 RCL 29
167 1000	210 STO 45	253 *
168 /	211 2	254 4400
169 SQRT	212 *	255 /
170 1.3	213 SQRT	256 STO 49
171 *	214 RCL 59	257 RCL 48
172 STO 42	215 /	258 *

259 STO 50	302 RCL 11	345 *
260 LBL "TP2"	303 RCL 43	346 SORT
261 RCL 25	304 *	347 .3048
262 RCL 44	305 2	348 /
263 /	306 *	349 /
264 STO 51	307 /	350 STO 60
265 X+2	308 SORT	351 "MCH TR="
266 4.3	309 STO 26	352 ARCL X
267 *	310 X+2	353 AVIEW
268 !	311 /	354 STOP
269 +	312 2	355 RCL 56
270 RCL 49	313 /	356 "PI TRF="
271 *	314 CHS	357 ARCL X
272 STO 52	315 RCL 25	358 AVIEW
273 RCL 22	316 X+2	359 STOP
274 RCL 08	317 RCL 26	360 RCL 52
275 RCL 40	318 X+2	361 "PO TRF="
276 *	319 2	362 ARCL X
277 /	320 *	363 AVIEW
278 550	321 /	364 STOP
279 *	322 X+2	365 RCL 57
280 STO 53	323 1	366 "PT TRF="
281 RCL 43	324 +	367 ARCL X
282 RCL 11	325 SORT	368 AVIEW
283 *	326 +	369 STOP
284 RCL 44	327 SORT	370 RCL 22
285 X+2	328 RCL 26	371 +
286 *	329 *	372 "PTOT="
287 /	330 RCL 53	373 ARCL X
288 STO 54	331 *	374 AVIEW
289 2	332 550	375 STO 63
290 *	333 /	376 STOP
291 SORT	334 RCL 55	377 XEQ "PCOMP"
292 RCL 59	335 /	378 ST+ 63
293 /	336 STO 56	379 XEQ "ESHF"
294 CHS	337 RCL 52	380 "ESHF="
295 1	338 +	381 ARCL X
296 +	339 STO 57	382 AVIEW
297 STO 55	340 RCL 25	383 STOP
298 RCL 25	341 RCL 44	384 STO 03
299 X+2	342 +	385 END
300 LBL "VI<TR>"	343 RCL 18	
301 RCL 53	344 001.8	

PCOMP (POWER REQUIRED DUE TO COMPRESSIBILITY EFFECTS)

1. PURPOSE

This subroutine is used in the main program, PTOT. It computes the additional horsepower necessary due to the compressibility effects from the main rotor.

2. EQUATIONS

$$M(\text{tip mr}) = \frac{V(\text{tip mr}) + V(\text{fwd mr})}{(\text{gamma} * \text{g} * \text{R} * \text{T})^{.5}}$$

$$\text{MD} = M(\text{tip mr}) - M(\text{crit}) - 0.06$$

$$\text{P}(\text{COMP}) = \text{rho} * \text{A}(\text{mr}) * V(\text{tip mr})^{.3} * \text{sigma}(\text{mr}) * (0.012 * \text{MD} + 0.01 * \text{MD}^{.3})$$

where:


V(fwd) is the forward velocity in knots.

V(tip) is the main rotor tip velocity.

M(crit) is the critical mach number (a good approximation is .65).

DISCUSSION: The horsepower required due to compressibility effects does not become a positive value until a certain forward velocity is attained. By providing a check for negative MD, only positive values of PCOMP are stored in Register 63 (R63). When run independent of the main program, MD is displayed if the value is negative. PCOMP is displayed and stored in R63 otherwise. When run in conjunction with PTOT, MD and PCOMP are not displayed. PCOMP is computed and added to the total power computed in PTOT.

3. FLOWCHART (PCOMP)

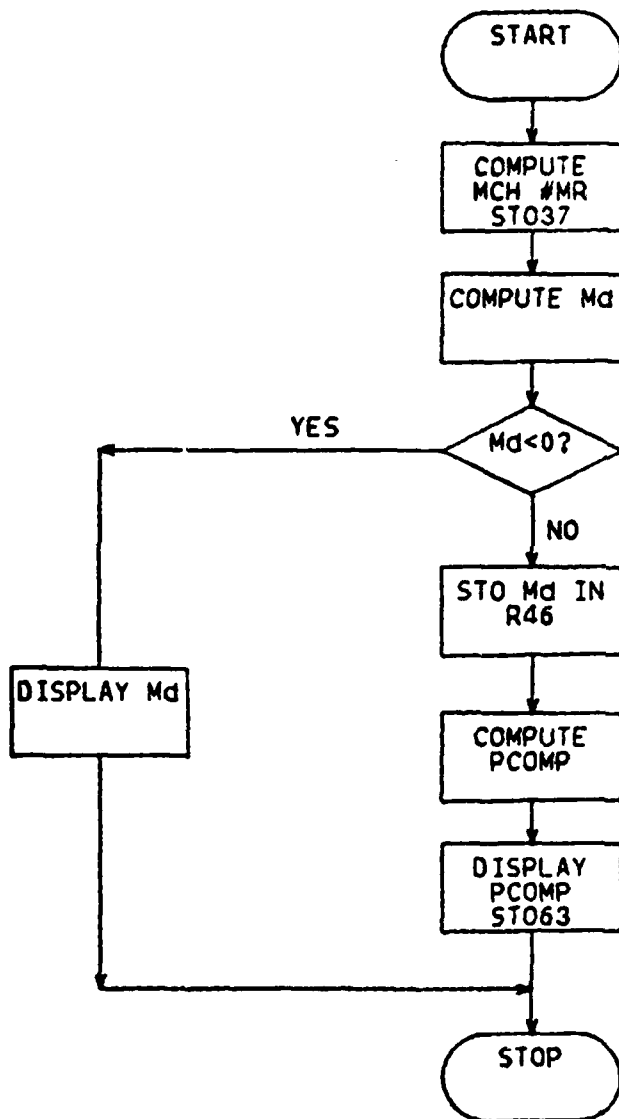

#### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS:

A) Compute the horsepower required due to compressibility effects at 20 knots forward velocity, 0 PA, and 15 deg C.

Register 25 contains the value, in ft per sec, of forward velocity. Register 11 contains the density altitude (rho). To execute PCOMP independent of the main program, the desired forward velocity must be converted to units of ft/sec and stored into Register 25. The subroutine "rho" must be executed to insure the correct value of density is stored in Register 11.

KEYSTROKES	DISPLAY
20 enter	20.00--
0.59248 /	33.76
sto 25	33.76
XEQ (alpha) RHO (alpha)	PA=?
0 (r/s)	TEMP C=?
15 (r/s)	2.38 -03
XEQ (alpha) PCOMP (alpha)	-0.03

DISCUSSION: At 20 knots, the compressibility factor is negative, therefore there is no extra horsepower needed due to compressibility effects. The value of MD is displayed.

B) Compute the horsepower required due to compressibility effects at 160 knots forward airspeed, 4000 ft pa, 35 deg C.

KEYSTROKES	DISPLAY
160 enter	160
0.59248 /	270.05
STO 25	270.05
XEQ (alpha) RHO (alpha)	PA=?
4000 (r/s)	TEMP C=?
35 (r/s)	1.92 -03
XEQ (alpha) PCOMP (alpha)	418.48

DISCUSSION: At a forward velocity of 160 knots at 4000 ft PA and 35 deg C, an additional power requirement of 418.48 horsepower results due to compressibility effects from the main rotor. This value is stored in Register 63 and will be added to other power requirements in the main program.

## 5. PROGRAM LISTING

```
01*LBL "PCOMP"  
02 RCL 25  
03 RCL 13  
04 +  
05 RCL 18  
06 401.8  
07 *  
08 SQRT  
09 /  
10 .3848  
11 *  
12 STO 37  
13 RCL 03  
14 -  
15 .06  
16 -  
17 X<0?  
18 GTO 01  
19 STO 46  
20 3  
21 Y*  
22 .1  
23 *  
24 .012  
25 ENTER↑  
26 RCL 46  
27 *  
28 +  
29 RCL 19  
30 *  
31 RCL 13  
32 3  
33 Y*  
34 *  
35 RCL 12  
36 *  
37 RCL 11  
38 *  
39 550  
40 /  
41 STO 63  
42*LBL 01  
43 END
```

## ESHP (EQUIVALENT SHAFT HORSEPOWER)

### 1. PURPOSE

This subroutine is used in the main program PTOT. It computes the engine shaft horsepower required. The ESHP is equivalent to the rotor shaft horsepower (PTOT + PCOMP) adjusted for transmission and accessory losses. In addition, a 10 percent shaft horsepower loss is computed for every additional engine installed.

### 2. EQUATIONS

$$ESHP = (0.10 * RSHP * (N-1) + 1.03 * RSHP + 10.0 \text{ HP})$$

where:


N is the number of engines installed.

10.0 hp is the approximate horsepower required due to accessory usage.

RSHP is the rotor shaft horsepower (PTOT + PCOMP).



3. FLOWCHART (ESHP)

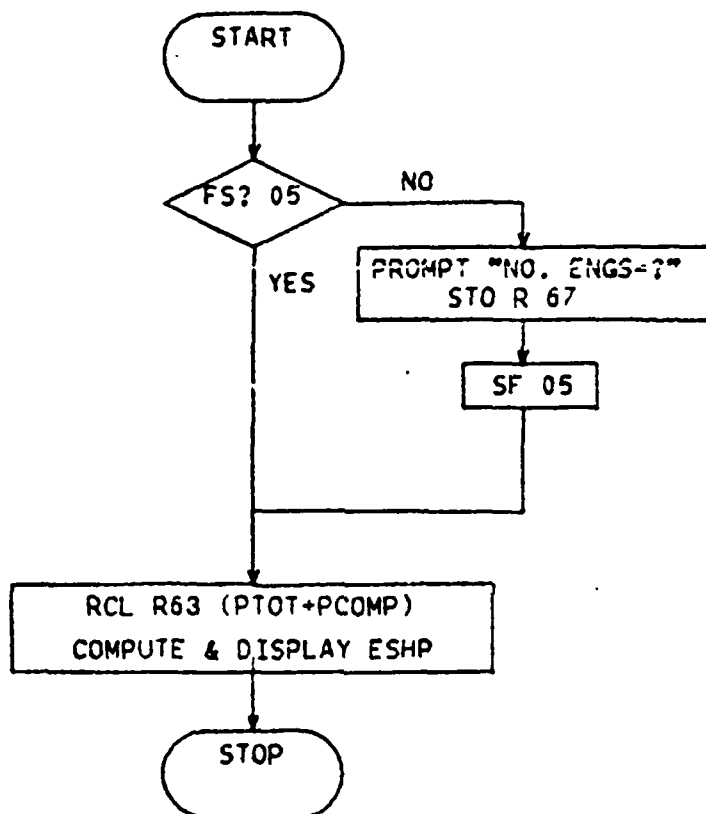

#### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS

Compute the engine shaft horsepower required for a helicopter with two engines having a RSHP of 1500 hp.

KEYSTROKES	DISPLAY
1500 STO 63	1500
CF 05	1500
XEQ (alpha) ESHP (alpha)	NO. ENGS=?
2 (r/s)	1705.00

DISCUSSION: A helicopter with a RSHP of 1500 hp will require 205 additional horsepower due to transmission and accessory losses, as well as a 10 percent SHP loss due to an additional engine. To execute this subroutine independently of the main program, a value for RSHP must be known and stored in R63. Flag 05 must be cleared for the prompt "NO. ENGS=?" to be viewed.

#### 5. PROGRAM LISTING

01*LBL "ESHP"	12 RCL 63
02 F52 05	13 *
03 GTD 01	14 .1
04 "NO. ENGS=?"	15 *
05 PROMPT	16 RCL 63
06 STO 67	17 1.03
07 SF 05	18 *
08*LBL 01	19 +
09 RCL 67	20 10
10 1	21 +
11 -	22 END

## FM (FIGURE OF MERIT)

### 1. PURPOSE

This subroutine is used in the main program PHV (Power to Hover). It computes the Figure of Merit which is the ratio of induced power (Pi), to the total power (Pt), of the main rotor. A computer value of between 0.7 and 0.8 is acceptable.

### 2. EQUATIONS


$$FM = (100 - ((Pt(mr\ ige) - Pi(mr\ oge)) / Pi(mr\ oge)) * 100) * .01$$

where:

Pt(mr ige) is the total power required to hover in ground effect for the main rotor (stored in R30).

Pi(mr oge) is the induced power required out of ground effect for the main rotor (stored in R16).

3. FLOWCHART (FM)

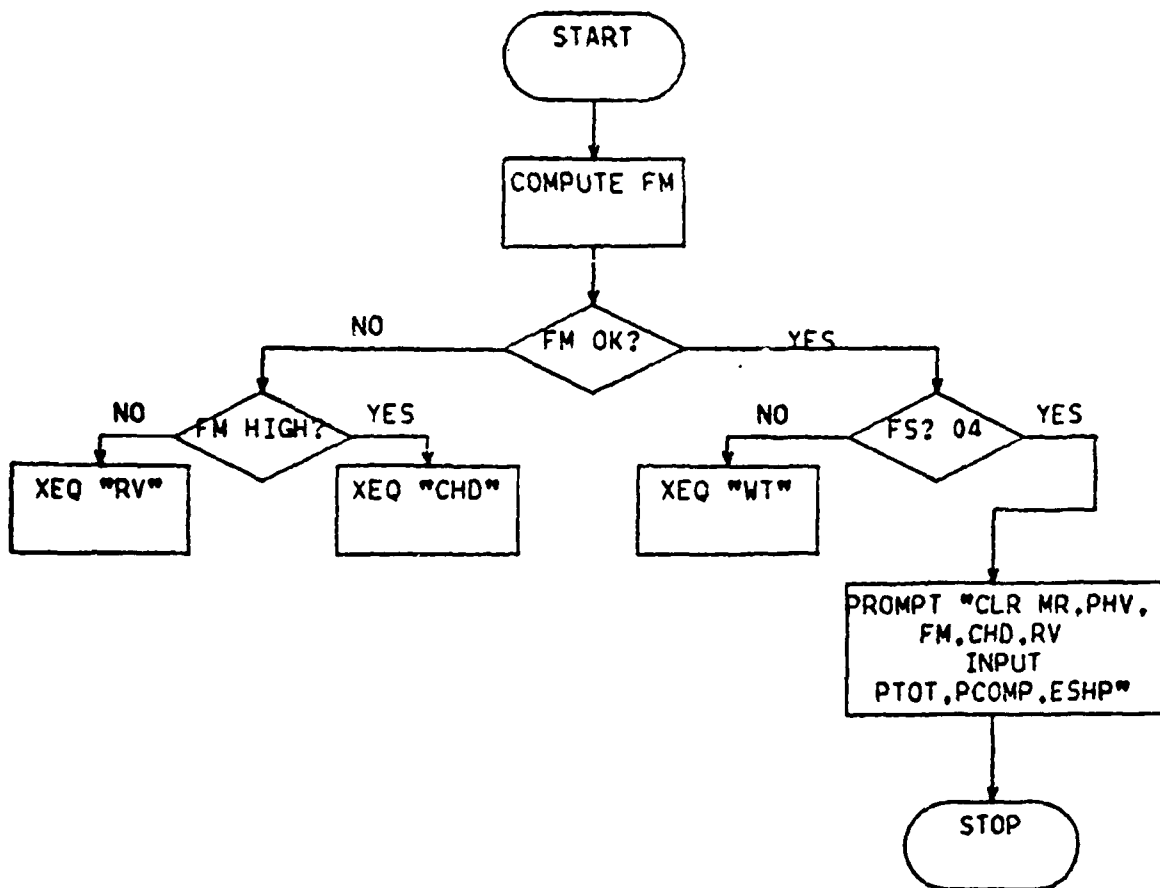

4. EXAMPLE PROBLEM AND USER INSTRUCTIONS:

A) Compute the Figure of Merit of a helicopter which has  $P_i$  (hp) of 1000 and a  $P_t$  (hp) of 1500 hp.

KEYSTROKES	DISPLAY
1000 STO 16	1000
1500 STO 30	1500
XEQ (alpha) FM (alpha)	FIG MER=0.50
(r/s)	FM OK?
0 (r/s)	FM HIGH?
0 (r/s) (program transfers to subroutine "RV")	

B) Compute the Figure of Merit for a helicopter with a  $P_i$  (hp) of 1250 and a  $P_t$  (hp) of 1400 hp.

KEYSTROKES	DISPLAY
1250 STO 16	1250
1400 STO 30	1400
XEQ (alpha) FM (alpha)	FIG MER=0.88
(r/s)	FM OK?
0 (r/s)	FM HIGH?
1 (r/s) (program transfers to subroutine (CHD"))	

C) Compute the Figure of Merit for a helicopter with a  $P_i$  (hp) of 1200 and a  $P_t$  (hp) of 1500 hp.

KEYSTROKES	DISPLAY
1200 STO 16	1200
1500 STO 30	1500

XEQ (alpha) FM (alpha)

FIG MER=0.75

(r/s)

FM OK?

1 (r/s) (If flag 04 is set, the user is prompted "clr MR, PHV, FM, CHD, RV, input PTOT, PCOMP, ESHP." If flag 04 is not set, the program transfers to the "WT" program and the first empty weight approximation is displayed.)

DISCUSSION: To run this subroutine independently of the main program "PHV," the values for  $P_i$ (mr oge) and  $P_t$ (mr ige) must be inputted manually into their appropriate registers. In the first example, the Figure of Merit was computed to be 0.50, well below the minimum acceptable value of 0.70. The subroutine "RV" was therefore executed (this subroutine enables the user to increase the FM value). In the second example, the Figure of Merit was higher than the acceptable value of 0.80 and the subroutine "CHD" was executed (this subroutine enables the user to decrease the FM value). In the third example, the Figure of Merit was within the specified limits. When executing "FM" as part of the main program, if the "WT" program has not been executed (flag 04 has not been set), then the program automatically transfers to "WT" and displays the first approximation for the aircraft empty weight ( $.6 * \text{spec. wt}$ ). If, however, flag 04 is set, the user is instructed to clear from program memory the programs that are no longer needed and to input three additional programs.

## 5. PROGRAM LISTING

```
01*LBL "FM"
02 FIX 2
03 RCL 16
04 ENTER+
05 RCL 30
06 %CH
07 100
08 X<>Y
09 -
10 .01
11 *
12 "FIG MEP="
13 ARCL X
14 RVIEW
15 FIX 4
16 STOP
17 "FM OK?"
18 PROMPT
19 X=0?
20 GTO 02
21 FS? 04

22 GTO 01
23 XEQ "WT"
24*LBL 01
25 "CLR MP. PHV. FM"
26 "L. CHD. RV"
27 PROMPT
28 "INPUT PTOT. PC"
29 "LAMP. ESHP."
30 PROMPT
31 GTO 04
32*LBL 02
33 "FM HIGH?"
34 PROMPT
35 X=0?
36 GTO 03
37 XEQ "RV"
38*LBL 03
39 XEQ "CHD"
40*LBL 04
41 END
```

## CHD (CHORD)

### 1. PURPOSE

This subroutine is called up in the "FM" program. It is designed to reduce the value computed for the Figure of Merit. When executed, the former chord value is displayed momentarily. The user must input a larger value of chord length. This larger chord will increase the solidity, decrease the blade loading and decrease the aspect ratio. Once these values have been computed and stored in their appropriate registers, the program transfers to the "MR" program and immediately displays the values for DL, RV, CT, SD, c, AR, and CL. Program execution continues as before. A new Figure of Merit will be displayed. Proceed as before, depending on this value.

### 2. EQUATIONS

$$SD=(c * b) / (PI * R)$$

$$BL=CT / SD$$

$$AR=R / c$$

where:

SD is the solidity.

c is the chord.

b is the number of main rotor blades.

R is the radius of the main rotor.

CT is the coefficient of thrust (main rotor).

AR is the aspect ratio.



3. FLOWCHART (None)

4. EXAMPLE PROBLEMS AND USER INSTRUCTIONS:

This subroutine can only be used in conjunction with several main programs. See "PHV" for example problems involving this subroutine.

5. PROGRAM LISTING

```
01 LBL "HR"  
02 RCL 04  
03 "CH="  
04 ARCL X  
05 AVIEW  
06 PSE  
07 "NEW CD="  
08 PROMPT  
09 STO 04  
10 RCL 06  
11 *  
12 RCL 05  
13 ENTER+  
14 PI  
15 *  
16 /  
17 STO 19  
18 RCL 14  
19 X<Y  
20 /  
21 "BL="  
22 ARCL X  
23 AVIEW  
24 STOP  
25 RCL 05  
26 RCL 04  
27 /  
28 STO 32  
29 STO "QA"  
30 END
```

## RV (ROTATIONAL VELOCITY)

### 1. PURPOSE

This subroutine is called up in the "FM" program. It is designed to increase the computed Figure of Merit values. When executed, the former tip velocity is displayed momentarily. The user is then instructed to input a new value for V(tip). This value must be lower than the former value. The program then calculates new values for RV, BL, CT, SD, c, AR, and CL using the new V(tip). The program automatically transfers to "MR" and displays DL and the above values. Program execution continues as before. A new Figure of Merit will be displayed. Proceed as before, depending on the value. The user should be aware that a dramatic reduction in V(tip) is required to increase the Figure of Merit.

### 2. EQUATIONS

$$RV = V(\text{tip}) / R$$

$$BL = -0.16667 * ((V)_{\text{max fwd}} / 0.59248) / V(\text{tip}) + .15515$$

$$CT = GW / (A * \rho * V(\text{tip})^2)$$

$$SD = CT / BL$$

$$c = (SD * \pi * R(\text{mr})) / b(\text{mr})$$

$$AR = R(\text{mr}) / c(\text{mr})$$

$$CL = (6.0 * CT) / SD$$

where:

GW is the gross weight.

R(mr) is the radius of the main rotor.

V(tip) is the maximum tip velocity of the main rotor.

RV is the rotational velocity of the main rotor.

CT is the coefficient of thrust of the main rotor.

rho is the density.

SD is the solidity.

BL is the blade loading.

b is the number of main rotor blades.

c is the chord.

AR is the aspect ratio.

CL is the coefficient of lift.

3. FLOWCHART (None)

4. EXAMPLE PROBLEM AND USER INSTRUCTIONS:

This subroutine can only be used in conjunction with several main programs. See "PHV" for example problems involving this subroutine.

## 5. PROGRAM LISTING

```
01 *LBL "RV"  
02 RCL 13  
03 "VTIP="  
04 ARCL X  
05 RVIEW  
06 PSE  
07 "NEW VTIP="*  
08 PROMPT  
09 STO 13  
10 RCL 05  
11 /  
12 STO 08  
13 RCL 23  
14 RCL 13  
15 /  
16 .166667  
17 CHS  
18 *  
19 .15515  
20 +  
21 "BL="*  
22 ARCL X  
23 RVIEW  
24 STOP  
25 RCL 12  
26 RCL 11  
27 *  
28 RCL 13  
29 X+2  
30 *  
31 RCL 36  
32 X<>Y  
33 /  
34 STO 14  
35 X<>Y  
36 /  
37 STO 19  
38 PI  
39 *  
40 RCL 05  
41 *  
42 RCL 06  
43 /  
44 STO 04  
45 RCL 05  
46 X<>Y  
47 /  
48 STO 32  
49 RCL 14  
50 6  
51 *  
52 RCL 19  
53 /  
54 STO 33  
55 RCL 31  
56 GTO "RR"  
57 END
```

## EFPA (EFFECTIVE FLAT PLATE AREA)

### 1. PURPOSE

This program determines the effective flat plate area of a design helicopter as a function of the following parameters: gross weight, clean or dirty lines, skid, fixed wheel, or retractable type landing gear. The formula used in the determination of the EFPA is:


EFPA = (A) \* (GW)\*\*.66667 where the coefficient (A) is determined as shown below.

	SKID	FIXED	RETRACTABLE
CLEAN CONFIGURATION	.032	.037	.027
DIRTY CONFIGURATION	.050	.056	.046

These figures were computed through an iterative procedure of comparing the known EFPA values of production aircraft and their gross weights to values computed with the above formula. A degree of accuracy to within 10% can be achieved using these coefficients. It is left to the user to determine if his design is clean or dirty (i.e., is the design streamlined or does it contain numerous wing stores, flat plate canopy, etc.).

### 2. EQUATIONS (See above)

3. FLOWCHART (EFPA)

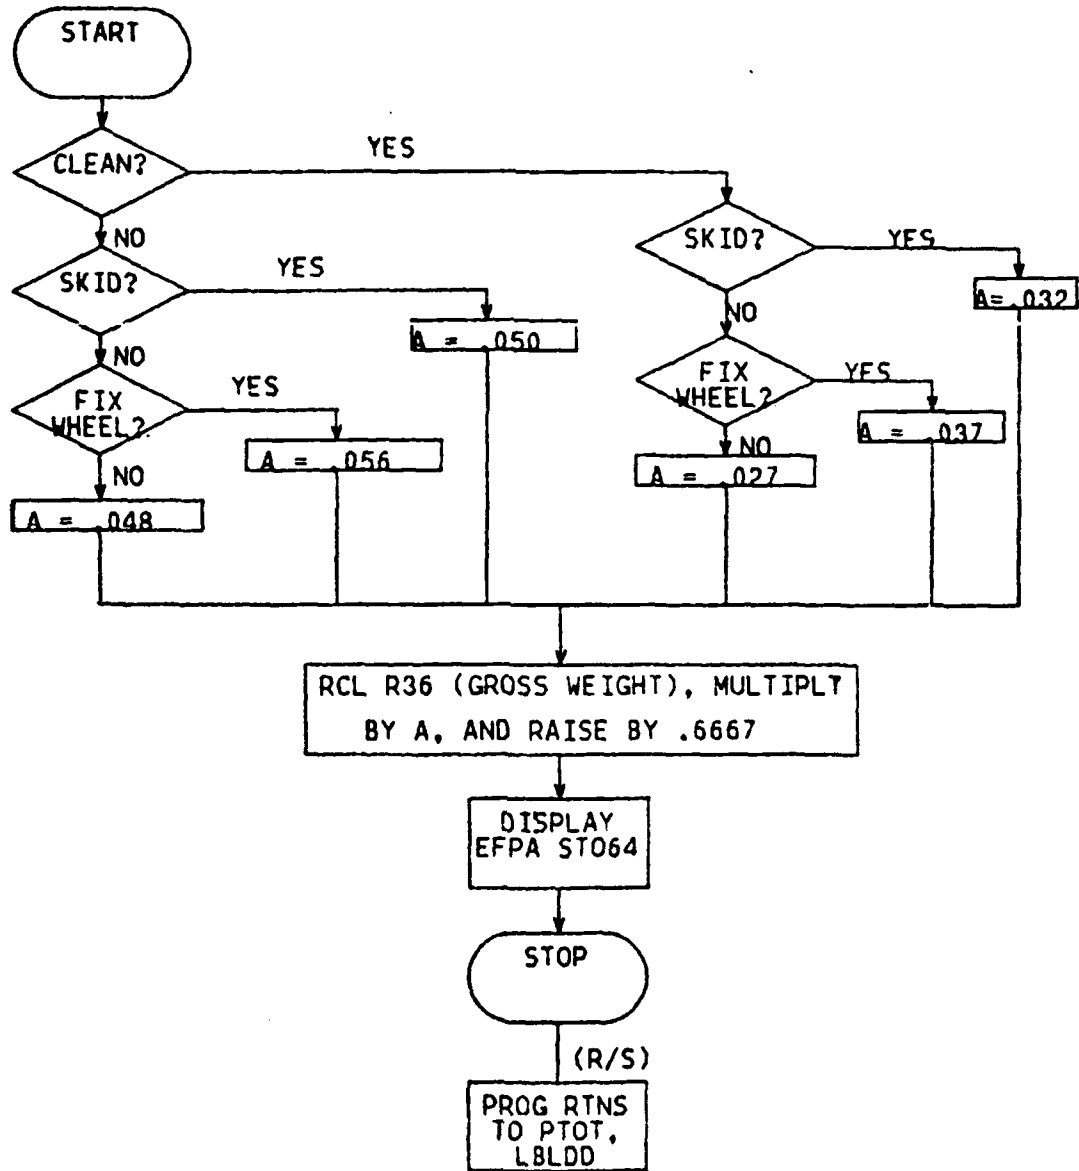

4. EXAMPLE PROBLEMS AND USER INSTRUCTIONS:

A) Determine the effective flat plate area of a helicopter with the following specifications:

Configuration: Dirty  
Gross Weight: 14500 lbs  
Landing Gear: Fixed wheel

Note: To run EFPA independent of the main program, the desired gross weight must be inputted manually into Register 36. This is done automatically when execution of the main program is performed.

KEYSTROKES	DISPLAY
14500 STO 36	14500
XEQ (alpha) EFPA (alpha)	CLEAN?
0 (r/s)	SKID?
0 (r/s)	FIX WHEEL?
1 (r/s)	EFPA=33.3

The above specifications were from the AAH-64 Attack Helicopter whose actual EFPA is 33 sq ft. The computed EFPA differs by .9%.

B) Determine the EFPA of a helicopter with the following specifications:

Configuration: Clean  
Gross Weight: 2150 lbs  
Landing Gear: Skid

KEYSTROKES	DISPLAY
2150 STO 36	2150
XEQ (alpha) EFPA (alpha)	CLEAN?
1 (r/s)	SKID?
1 (r/s)	EFPA=5.33

Again, the above specifications represent a production aircraft, the OH6A, whose actual EFPA is 5.4 sq ft. The computed value differs by 1.3%.

#### 5. PROGRAM LISTING

01+LBL "EFPA"	26 .027
02 FIX 2	27 GTO 10
03 "CLEAN?"	28+LBL 02
04 PROMPT	29 .050
05 X)0?	30 GTO 10
06 GTO 01	31+LBL 03
07 "SKID?"	32 .056
08 PROMPT	33 GTO 10
09 X)0?	34+LBL 04
10 GTO 02	35 .032
11 "FIX WHEEL?"	36 GTO 10
12 PROMPT	37+LBL 05
13 X)0?	38 .037
14 GTO 03	39+LBL 10
15 .048	40 PCL 36
16 GTO 10	41 .666667
17+LBL 01	42 Y+X
18 "SKID?"	43 *
19 PROMPT	44 "EFPA="
20 X)0?	45 ARCL Y
21 GTO 04	46 RVIEW
22 "FIX WHEEL?"	47 STO 64
23 PROMPT	48 STOP
24 X)0?	49 GTO "00"
25 GTO 05	50 END



## DENSITY (RHO)

### 1. PURPOSE

This program computes the density of the air at a specified pressure altitude and temperature. In so doing, the program automatically calculates, but does not display, the density altitude and stores this value in Register ten. The equation used for this calculation is based upon the standard ICAO atmosphere and is accurate to an altitude of 36,089 ft.

### 2. EQUATIONS

$$\text{RHO} = \text{RHO}(\text{SSL}) * (1 - (K) * (H))^{**4.2561}$$


where:

RHO(SSL) is the density of the air at standard sea level which is equal to 0.0023769 (lb sec\*\*2/ft\*\*4).


$$K = 6.875 * 10^{**-6}$$

H = density altitude (ft)

3. FLOWCHART (RHO)

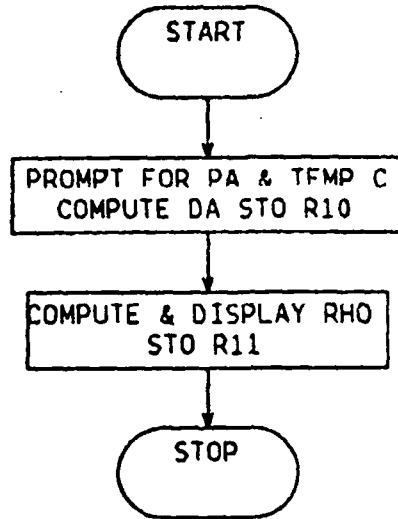





MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

4. EXAMPLE PROBLEM AND USER INSTRUCTIONS:

Find the density and density altitude when the pressure altitude is 0.0 ft and the temperature is 15 deg. C.

KEYSTROKES	DISPLAY
XEQ (alpha) RHO (alpha)	PA=?
0 (r/s)	TEMP C=?
15 (r/s)	2.38 -03

To find the density altitude simply recall Register 10 (-1.19).

5. PROGRAM LISTING

01 *LBL "RHO"	20 Y*Y
02 "PA=?"	21 CHS
03 PROMPT	22 1
04 6.875 E-06	23 +
05 *	24 6.875 E-06
06 CHS	25 /
07 1	26 STO 10
08 +	27 6.875 E-06
09 5.2561	28 *
10 Y*Y	29 CHS
11 "TEMP C=?"	30 1
12 PROMPT	31 +
13 273.15	32 ENTER+
14 +	33 4.2561
15 STO 18	34 Y*Y
16 /	35 .0023769
17 288.16	36 *
18 *	37 STO 11
19 .23496	38 END

REGISTER FILE

REGISTER NUMBER-----INFORMATION IN REGISTER

00-----Landing Gear Information

01-----Aspect Ratio (tr)

02-----Cdo (tr)

03-----Mach Crit

04-----Chord Main Rotor (c)

05-----Radius Main Rotor (r)

06-----# main rotor blades (b)

07-----Cdo (mr)

08-----Rotational Vel mr (rv)

09-----Control # (printer)

10-----Density Altitude (da)

11-----RHO

12-----Area mr (A)

13-----Tip Velocity (Vt)

14-----Coeff of Thrust mr (CT)

15-----Tip Loss Factor mr (B)

16-----Pi (oge) mr

17-----H/D

18-----Temperature (c to k)

19-----Solidity mr (SD)

20-----Induced Vel hover (Vi)

21-----Profile Power hover (Po)  
22-----Total Power mr fwd (Pt fwd)  
23-----Max Fwd Vel  
24-----Profile Power fwd (Po mr)  
25-----Forward Velocity (Vf)  
26-----Induced tr Vel (portion)  
27-----Induced Power (mr fwd)  
28-----Parasite Power (Pp)  
29-----Solidity (tr)  
30-----Total Power (mr oge)  
31-----Disk Loading (DL)  
32-----Aspect Ratio (AR)  
33-----Coefficient of Lift (CL)  
34-----Total Power (mr ige)  
35-----Empty Weight (WE)  
36-----Gross Weight (GW)  
37-----Tip Mach # (mr)  
38-----Induced Power (mr ige)  
39-----Max GW (specification)  
40-----Length of Tail (L tr)  
41-----Thrust of tr  
42-----Radius of tr (R)  
43-----Area of tr (A)  
44-----Tip Vel tr (Vt)  
45-----Coeff of Thrust tr (CT)  
46-----MD

47-----Tip Loss Factor tr (B)  
 48-----Pi (tl-tr) hover SSL oge  
 49-----Po (tr) hover SSL oge  
 50-----Pt (tr) hover SSL oge  
 51-----MU (tr)  
 52-----Profile Power (tr fwd)  
 53-----Thrust (tr fwd)  
 54-----CT (tr fwd)  
 55-----B (tr fwd)  
 56-----Pi (tl-tr-fwd)  
 57-----Pt (tr-fwd)  
 58-----Chord tr (c)  
 59-----# tr Blades (b)  
 60-----Tip Mach (tr)  
 61-----Pi total (mr+tr)  
 62-----Po total (mr+tr)  
 63-----PTOT (mr+tr)  
 64-----EFPA  
 65-----Skid Gear Weight  
 66-----Fixed Wheel Gear Wt  
 67-----No. of Engines



APPENDIX B

EXAMPLE/PROGRAM VALIDATION PROBLEMS

PRELIMINARY DESIGN OF A CARGO HELICOPTER

The student is tasked to design a heavy cargo helicopter. A determination must be made as to the most practical type landing gear to be utilized in the design. The following specifications are provided:

Maximum Allowable Gross Weight	40,000 lbs
Maximum Rotor Diameter:	76 ft
Maximum Velocity:	180 kts
Useful Load:	9000 lbs
Fuel Weight:	4500 lbs
Height of Rotor Above the Ground:	16 ft
Cdo Main Rotor:	.01
Cruise Velocity:	150 kts
Tail Rotor Aspect Ratio (4.5 - 8.0):	6.5
Cdo Tail Rotor (1.25 Cdo mr < Cdo tr < 1.5 Cdo mr):	.0145
No. of Tail Rotor Blades:	4.0
No. of Main Rotor Blades:	6.0
Critical Mach Number:	.65
Number of Landing Gear:	4.0
Number of Engines:	2.0

In an effort to eliminate unnecessary repetition, the user is advised to refer to the individual program summaries

for a more detailed description. Before proceeding further with this problem, the user must clear all flags and load MR, PHV, FM, CHD, RV, RHO, WT, and EFPA.

KEYSTROKES		DISPLAY
XEQ (alpha)	SIZE (alpha)	SIZE---
068		0.00
XEQ (alpha)	MR (alpha)	Spec Wt=?
40,000	(r/s)	R=?
38	(r/s)	Mch Crit=?
0.65	(r/s)	Vt max= 725.6
	(r/s)	Vf max=?
180	(r/s)	DL=7.054
	(r/s)	RV=19.095
	(r/s)	CT= .006
	(r/s)	SD= .066
	(r/s)	c= 1.97
	(r/s)	AR= 19.28
	(r/s)	CL= .512
	(r/s)	R ok?
1	(r/s)	No. MR Blds?
6	(r/s)	Cdo mr=?
0.01	(r/s)	Pth oge= 2900
	(r/s)	H=?
16	(r/s)	Pth ige= 2305
	(r/s)	FIG MER= 0.73
	(r/s)	FM OK?

1	(r/s)	WE= 24,000
	(r/s)	Wb= 2516.35
	(r/s)	Wh= 1492.98
	(r/s)	Wp= 3479.66
	(r/s)	Wf= 5040.00
	(r/s)	Wc= 1440.00
	(r/s)	We= 1440.00
	(r/s)	Wq= 6720.00
	(r/s)	WE 2= 22,128.99
	(r/s)	W FL?
4500	(r/s)	USE LD?
9000	(r/s)	SKID?
1	(r/s)	MR>2 blds?
1	(r/s)	TGW= 36,311.5
	(r/s)	WT OK?
1	(r/s)	R=?
38	(r/s)	Mch Crit=?
0.65	(r/s)	Vt Mx= 725.62
	(r/s)	Vf Mx=?
180	(r/s)	DL= 8.004
	(r/s)	RV= 19.095
	(r/s)	CT= .006
	(r/s)	SD= .075
	(r/s)	c= 2.236
	(r/s)	AR= 16.996
	(r/s)	CL= .512

	(r/s)	R OK?
1	(r/s)	NO MR bls?
6	(r/s)	Cdo mr=?
0.01	(r/s)	Pth oge= 3463
	(r/s)	H=?
16	(r/s)	Pth ige= 2743
	(r/s)	FIG MER= 0.75
	(r/s)	FM OK?
1	(r/s)	Clr MR,PHV,FM,CHD,RV
	(r/s)	Input PTOT,PCOMP,ESHP
XEQ (alpha)	CLP (alpha)	CLP-
(alpha) MR	(alpha)	1.0

Continue for PHV, FM, CHD, and RV. Input PCOMP and ESHP.  
 If a printer is to be used, connect it after inputting the  
 appropriate PTOT program. For this example, a printer will be  
 used.

XEQ (alpha)	PTOT (alpha)	INPUT CNT NO.
0.18020	(r/s)	PA=?
0	(r/s)	TEMP C=?
15	(r/s)	AR tr=?
6.5	(r/s)	No. tr Blds?
4	(r/s)	Cdo tr=?
0.0145	(r/s)	EFPA KNOWN?
0	(r/s)	CLEAN?
0	(r/s)	SKID?

1	(rs)	EFPA= 54.83
	(r/s)	No. Engs=?
2	(r/s)	

For this example, the power requirements are applicable to standard sea level conditions (0 pa, 15 deg C). The user may, of course, use any altitude. The aircraft, being of the cargo type, will probably not have clean lines. For this first iteration, a skid gear is used. Recall that the skid is used as a base for the fixed and retractable type gears. The control number (.18020) was selected because the maximum velocity of the aircraft is 180 knots and 20 knots is a suitable increment. Note how the printer outputs the power required at specific velocities. Once the printer signals the completion of the program, the user re-executes the "WT" program.

XEQ (alpha)	WT (alpha)	W FL?
4500	(r/s)	USE LD?
9000	(r/s)	SKID?
0	(r/s)	NO. LG?
4	(r/s)	FX GR?
1	(r/s)	T GW= 37209.57
	(r/s)	INPUT CNT NO.
0.18020	(r/s)	EFPA KNOWN?
0	(r/s)	CLEAN?
0	(r/s)	SKID?

0	(r/s)	FIX WHEEL?
1	(r/s)	EFPA= 62.42
	(r/s)	NO. ENGS=?
2	(r/s)	

The printer now displays the power required from 0 to 180 knots, incremented every 20 knots.

XEQ (alpha)	WT (alpha)	W FL?
4500	(r/s)	USE LD?
9000	(r/s)	SKID?
0	(r/s)	NO. LG?
4	(r/s)	FX GR?
0	(r/s)	T GW= 37464.62
	(r/s)	INPUT CNT NO.
0.18020	(r/s)	EFPA KNOWN?
0	(r/s)	CLEAN?
0	(r/s)	SKID?
0	(r/s)	FIX WHEEL?
0	(r/s)	EFPA= 53.74
	(r/s)	NO. ENGS=?
2	(r/s)	

The printer now displays the power required for the aircraft with a retractable landing gear.

SKID	FIXED WHEEL	RETRACTABLE GEAR
TOTAL POWER	TOTAL POWER	TOTAL POWER
GW=36311.5125 EPPA=54.93	GW=37289.57 EPPA=62.42	GW=37464.62 EPPA=53.74
VEL (KNOTS) ESHP	VEL (KNOTS) ESHP	VEL (KNOTS) ESHP
0 *** 4247 ***	0 *** 4376 ***	0 *** 4413 ***
20 *** 3721 ***	20 *** 3843 ***	20 * 3876 *
40 *** 2843 ***	40 *** 2943 ***	40 * 2963 *
60 *** 2638 ***	60 *** 2727 ***	60 *** 2724 ***
80 *** 2817 ***	80 *** 2918 ***	80 *** 2880 ***
100 *** 3283 ***	100 *** 3419 ***	100 *** 3328 ***
120 *** 4018 ***	120 *** 4215 ***	120 *** 4047 ***
140 *** 5039 ***	140 *** 5324 ***	140 *** 5049 ***
160 *** 6374 ***	160 *** 6779 ***	160 *** 6362 ***
180 *** 8059 ***	180 *** 8622 ***	180 *** 9021 ***

From the above data, the user can readily see that, at a hover, The helicopter configured with the skid gear requires less power due to the gear's reduced weight. As forward speed increases, however, the effective flat plate area value (parasite drag) begins to affect power requirements. The skid configured aircraft always requires less power than the fixed wheel aircraft due to its lighter weight and smaller EFPA value.

The benefits of the retractable gear's reduced drag versus the skid gear's lighter weight are not appreciated until the aircraft attains its designed cruise velocity of one hundred and fifty knots. Since the aircraft will certainly be flying at or below cruise velocity more than above this speed, it seems logical that a skid type gear should be employed in the design. This logic begins to lose its validity when it is understood that heavy cargo helicopters are often not capable of performing a hovering type take-off, as would be required with skid gear.


The environment these aircraft operate in (heavy loads and oftentimes high density altitude) results in rolling take-offs being used to keep within engine and transmission limitations. The question of skid versus wheel type gear is therefore academic when heavy cargo helicopters are concerned.

When comparing the fixed and retractable data, it is apparent that at approximately 60 knots the retractable geared aircraft begins to require less power even though that



aircraft is heavier by more than two hundred pounds! Since the helicopter will be flying at speeds much greater than sixty knots, the most advantageous landing gear is the retractable type.

The landing gear data may be evaluated in graphical form by using the program "Myplot." The following is a graph of the preceding data.

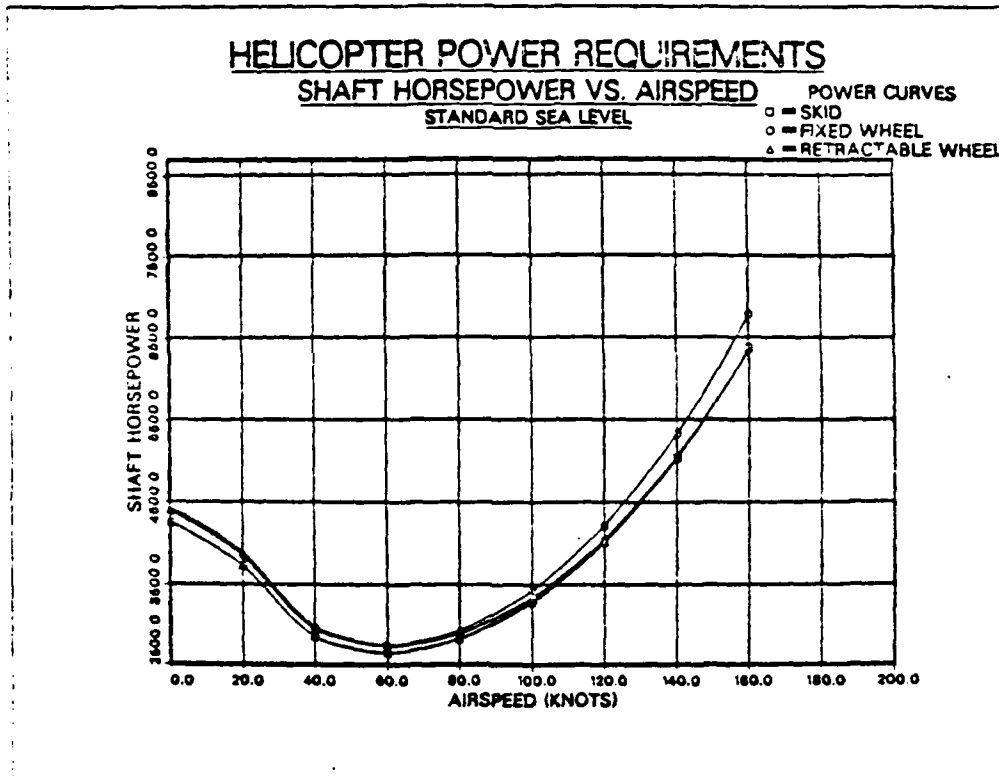

The user might well want to know how much additional velocity could be attained by using the retractable type gear as opposed to the fixed wheel. From the data, 8622 hp is required to achieve the maximum forward velocity using the fixed wheel gear, 601 more horsepower than the helicopter with the retractable gear. If power is the limiting factor, it is a simple matter to convert the 601 excess hp into velocity.

KEYSTROKES		DISPLAY
XEQ (alpha) PTOT (alpha)		INPUT CNT NO.
180.19001	(r/s)	EFPA KNOWN?
1	(r/s)	EFPA=?
53.74	(r/s)	

The printer computes the power required from 180 to 190 knots in increments of 1 hp.

TOTAL POWER		184	***
		8397	***
GW=37465		185	***
EFPA=?		8493	***
	54	***	
VEL (KNOTS)		186	***
ESHP		8591	***
		187	***
	180	***	8690
	8020	***	
		188	***
	181	***	8789
	8113	***	
		189	***
	182	***	8890
	8207	***	
		190	***
	183	***	8991
	8301	***	

From the data, 8622 horsepower is required at approximately 186.5 knots. By using the retractable gear, the maximum velocity has been increased by over five knots.

### HUGHES AAH-64 DESIGN COMPARISON

The following data is from the AAH-64 helicopter:

Specification weight:	17,640 lbs
Critical mach #:	.65
Fuel weight:	1600 lbs
Useful load:	4351 lbs
Max. fwd. vel.	155 knots
Main rotor diameter:	48 ft
Cdo main rotor:	.01
Cdo tail rotor:	.01
No. main rotor blades:	4
No. tail rotor blades:	4
Configuration:	Dirty
No. of engines	2
No. of landing gear:	3
Height of rotor above grd:	12.59 ft
Aspect ratio, tr	5.53

Using the above data and the procedure of the example problem, the following power results were attained:

SKID

FIXED WHEEL

RETRACTABLE GEAR

TOTAL POWER

TOTAL POWER

TOTAL POWER

GW=15,785.3026  
 EFPA=31.46

GW=16,236.47  
 EFPA=35.91

GW=16,363.17  
 EFPA=30.94

VEL (KNOTS)  
 ESHP

VEL (KNOTS)  
 ESHP


VEL (KNOTS)  
 ESHP

0.	***
1.890.	***
20.	***
1.667.	***
40.	***
1.280.	***
60.	***
1.174.	***
80.	***
1.252.	***
100.	***
1.476.	***
120.	***
1.839.	***
140.	***
2.351.	***
160.	***
3.029.	***
180.	***
3.893.	***

0.	***
1.958.	***
20.	***
1.731.	***
40.	***
1.334.	***
60.	***
1.223.	***
80.	***
1.309.	***
100.	***
1.553.	***
120.	***
1.952.	***
140.	***
2.516.	***
160.	***
3.265.	***
180.	***
4.222.	***

0.	***
1.977.	***
20.	***
1.749.	***
40.	***
1.345.	***
60.	***
1.221.	***
80.	***
1.287.	***
100.	***
1.501.	***
120.	***
1.855.	***
140.	***
2.358.	***
160.	***
3.025.	***
180.	***
3.875.	***

The Hughes AAH-64 utilizes a fixed wheel type landing gear. The airspeed vs. power graph depicts the actual power requirements of the AAH-64 at various airspeeds and weights.

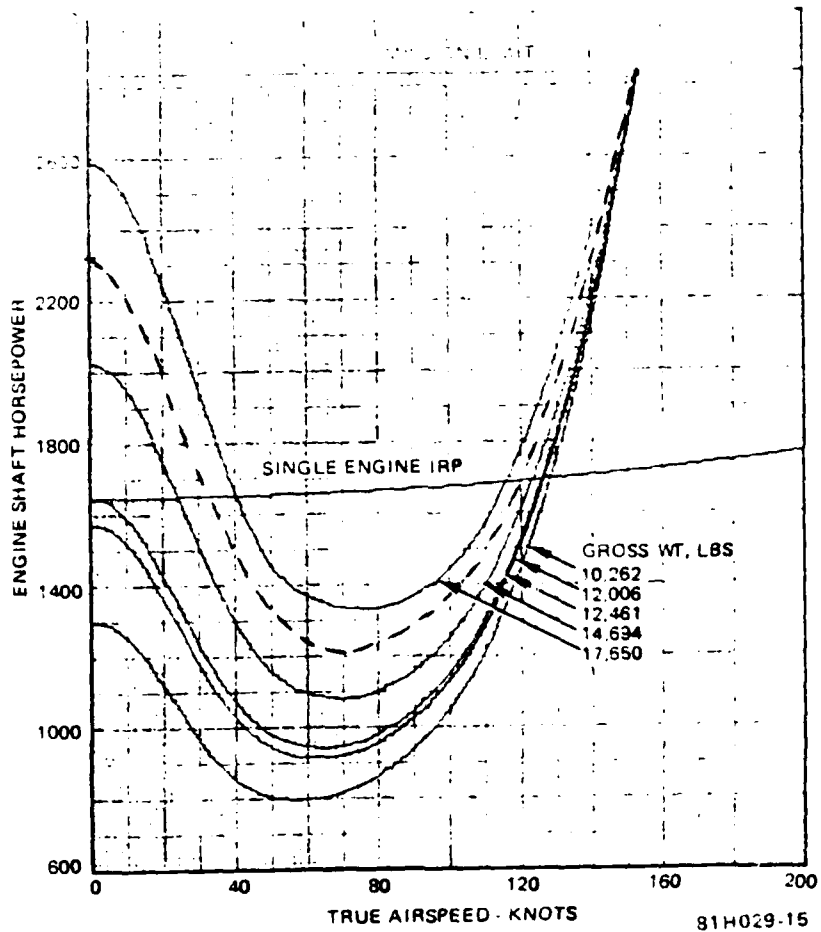

By approximating the computed gross weight line for the fixed wheel gear data (16,236.47 lbs), a comparison between the actual and computed power requirements can be made. The following table shows this comparison and the percent error.

VEL	HP ACTUAL	HP COMPUTED	% ERROR
0	2320	1958	15.6
20	2000	1731	13.5
40	1500	1334	11.1
60	1220	1223	0.2
80	1220	1309	7.3
100	1375	1553	12.9
120	1680	1952	16.2
140	2300	2516	9.4

The average percent error is 10.15

COMPARISON OF ADV. SYST. COMPUTER PROGRAM

One of the primary goals of this project is to develop programs for the HP-41 which output values to within 10 percent of the Army Aviation Research and Development Command's Advanced System's Computer Program. The following data was inputted into both programs.

Radius of main rotor blade=	27 ft
Critical mach number=	.65
Maximum fwd. velocity=	160 knots
Specification weight=	18000 lbs
No. of main rotor blades=	4
Coefficient of drag at 0 lift=	.01
Height of rotor above ground=	14.4 ft
Fuel weight=	4000 lbs
Useful load=	3750 lbs
Tail rotor aspect ratio=	8.0
Coeff of drag at 0 lift (tr)=	.0145
No. of tail rotor blades=	4
Configuration=	Clean
No. of engines=	2
No. of landing gear=	3



Using the PTOT (printer) program, the following data was outputted:

SKID	FIXED WHEEL	RETRACTABLE GEAR
TOTAL POWER	TOTAL POWER	TOTAL POWER
GW=16744.9881 EFPA=28.95	GW=17198.23 EFPA=24.65	GW=17326.65 EFPA=18.88
VEL (KNOTS) ESHP	VEL (KNOTS) ESHP	VEL (KNOTS) ESHP
0 *** 1861 ***	0 *** 1923 ***	0 *** 1941 ***
20 *** 1688 ***	20 *** 1666 ***	20 *** 1682 ***
40 *** 1204 ***	40 *** 1251 ***	40 *** 1258 ***
60 *** 1107 ***	60 *** 1149 ***	60 *** 1141 ***
80 *** 1173 ***	80 *** 1221 ***	80 *** 1188 ***
100 *** 1356 ***	100 *** 1421 ***	100 *** 1348 ***
120 *** 1647 ***	120 *** 1741 ***	120 *** 1618 ***
140 *** 2049 ***	140 *** 2187 ***	140 *** 1976 ***
160 *** 2576 ***	160 *** 2772 ***	160 *** 2453 ***

A comparison of the Advanced System's output reveals the following:

VEL	SKID			FIX WHEEL			RETR GEAR		
	HP41	AD SY	%ER	HP41	AD SY	%ER	HP41	AD SY	%ER
0	1861	1998	6.86	1923	2065	6.88	1941	2085	6.91
20	1608	1781	9.71	1666	1846	9.75	1682	1865	9.81
40	1204	1344	10.42	1251	1396	10.39	1258	1406	10.53
60	1107	1152	3.91	1149	1198	4.09	1141	1193	4.36
80	1173	1143	2.62	1221	1194	2.26	1188	1166	1.89
100	1356	1264	7.28	1421	1330	6.84	1348	1269	6.23
120	1647	1508	9.22	1741	1621	7.40	1610	1498	7.48
140	2049	1984	3.28	2187	2147	1.86	1976	1956	1.02
160	2576	2688	4.17	2772	2780	.28	2453	2628	6.66

Skid avg % error= 6.39

Fixed wheel avg % error= 5.53

Retr gear avg % error= 6.10

It is readily apparent that the goal of 10% accuracy has been exceeded. These programs are rapidly executed, inexpensive to run, and sacrifice a very small percentage of accuracy.

The following printouts depict the Advanced System's Branch computer output for Skid, Fixed Wheel, and Retractable Type landing gears.

UTILITY DESIGN, SAIC ALIGHTING LEAD  
WEST BASE FOR WISE 435RS

---

POWER REQUIRED VERSUS FORWARD SPEED  
Y=FT/SEC V=MPH=1.48\*V

GROSS WEIGHT = 14745.0	POWER REQUIRED VERSUS FORWARD SPEED									
	0	20	40	60	80	100	120	140	160	180
WIND	132.7	1197.	781.	545.	414.	334.	287.	248.	218.	197.
WHEEL	0.	-10.	17.	73.	171.	311.	445.	707.	1117.	1717.
WHEEL	0.	0.	0.	1.	4.	34.	99.	232.	444.	707.
WHEEL	0.	0.	0.	0.	0.	0.	0.	100.	300.	600.
WHEEL	155.	170.	63.	51.	43.	52.	53.	67.	77.	77.
WHEEL	71.	67.	54.	50.	50.	54.	51.	77.	77.	77.
WHEEL	53.	53.	53.	53.	53.	53.	53.	53.	53.	53.
WHEEL	1773.	1742.	1344.	1112.	1143.	1144.	1144.	1703.	1744.	1744.
WHEEL	2427.	2377.	1924.	1624.	1624.	1624.	1624.	2427.	2427.	2427.
WHEEL	3024.	3038.	3038.	3038.	3038.	3038.	3038.	3038.	3038.	3038.
WHEEL	1777.	187.	113.	74.	74.	74.	74.	105.	105.	105.
WHEEL	0.	0.0203	0.0406	0.0609	0.0812	0.1015	0.1218	0.1421	0.1624	0.1827
WHEEL	20.7	20.1	23.3	27.3	31.3	35.3	39.3	43.3	47.3	51.3
WHEEL	0.0	0.047	0.093	0.140	0.187	0.233	0.279	0.325	0.371	0.417
WHEEL	0.0	-0.4	0.	1.4	2.4	3.4	4.4	5.4	6.4	7.4
WHEEL	0.0	1.7	2.7	2.4	2.1	1.9	1.6	1.1	0.8	0.5
WHEEL	0.0	2.6	1.4	1.2	0.9	0.7	-0.4	-0.7	-0.7	-0.7
WHEEL	0.	0.	11.	10.	8.	6.	4.	2.	0.	0.
WHEEL	0.	0.	11.	6.	-23.	-27.	-19.	-25.	-37.	-37.
WHEEL	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
WHEEL	0.	-167.	110.	19.	64.	111.	137.	155.	155.	155.
WHEEL	0.	0.	0.	0.	0.	0.	0.	0.	0.	0.
WHEEL	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WHEEL	-1.00	1.00	0.	0.	-0.5	-1.0	-1.5	-1.5	-1.5	-1.5
WHEEL	17147.	14727.	10722.	14722.	16742.	16742.	16742.	16742.	16742.	17071.
WHEEL	17147.	14727.	10722.	14722.	16742.	16742.	16742.	16742.	16742.	17071.
WHEEL	0.00	0.00	1.73	3.23	5.00	6.47	7.30	6.73	5.80	5.80
WHEEL	0.00	0.00	1.55	2.83	4.50	6.00	6.00	5.00	4.00	4.00

UTILITY DESIGN: FIXED WHEEL ALIQUOT DATA  
TEST CASE: 100 MISC. MODES


	BASE WEIGHTS: 17133.0 LB							
	100% WING				100% WING			
	C.F.1/50.000				C.F.1/50.000			
	VMOP=155.0 FT				VMOP=155.0 FT			
	SHIFTS: 100.000							
WING WEIGHT	0.	0.	0.	0.	0.	0.	0.	0.
WING AREA	141.3.	1251.	950.	575.	417.	363.	277.	241.
WING CHORD	302.	360.	308.	219.	149.	134.	101.	84.
WING SPAN	0.	-11.	15.	49.	110.	147.	193.	244.
WING TIP	0.	0.	0.	0.	0.	0.	0.	0.
WING ROOT	0.	0.	0.	0.	0.	35.	100.	177.
WING LEAN	0.	0.	0.	0.	0.	0.	0.	0.
WING TWIST	1.0.	100.	70.	53.	40.	50.	60.	70.
WING STAG	72.	50.	38.	28.	20.	15.	10.	8.
WING LEAD	53.	53.	53.	53.	53.	53.	53.	53.
HP AVAILABLE	1000.	1000.	1000.	1000.	1000.	1000.	1000.	1000.
HP AVAILABLE	2720.	2070.	1520.	1170.	820.	720.	540.	450.
WING AVAILABLE	3020.	1030.	1330.	1040.	510.	370.	270.	220.
WING (100/40)	1075.	1011.	835.	751.	700.	611.	461.	380.
WING AREA	0.	0.	0.	0.	0.	0.	0.	0.
WING AREA	24.7.	27.2.	27.2.	26.3.	25.2.	25.6.	24.4.	24.4.
WING CHORD	0.0.	0.007.	0.013.	0.018.	0.023.	0.033.	0.040.	0.047.
WING SPAN	0.0.	-0.6.	0.4.	1.4.	2.5.	3.7.	4.8.	5.9.
WING STAG	0.0.	0.0.	0.7.	0.7.	0.1.	0.5.	0.7.	-0.1.
WING ANGLE	0.0.	2.5.	1.0.	1.1.	0.4.	-0.2.	-0.7.	-1.0.
WING LIFT	0.	0.	11.	17.	25.	31.	38.	45.
WING TAIL LIFT	0.	0.	10.	2.	-32.	-34.	-30.	-30.
WING LIFT	0.	0.	0.	0.	0.	0.	0.	0.
WING PROD FURT	0.	-175.	100.	434.	753.	1131.	1511.	1770.
WING PROD	0.	0.	0.	0.	0.	0.	0.	0.
WING PROD	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WING LIFT	1700.	17130.	17170.	17170.	17204.	17240.	17280.	17320.
WING LIFT	1700.	17130.	17170.	17170.	17204.	17240.	17280.	17320.
L/D (1-100)	1.00	2.65	1.70	3.13	4.80	6.44	7.83	9.07
L/D (1-100)	1.00	2.65	1.70	3.13	4.80	6.44	7.83	9.07



APPENDIX C  
COMPUTER GRAPHICS PRINTOUT

MYPLOT AND POWERPLO COMPUTER PRINTOUTS

The following program graphs the power data for a skid, fixed wheel, and retractable geared configured helicopter. The attached graph is an actual plot of the example cargo helicopter.

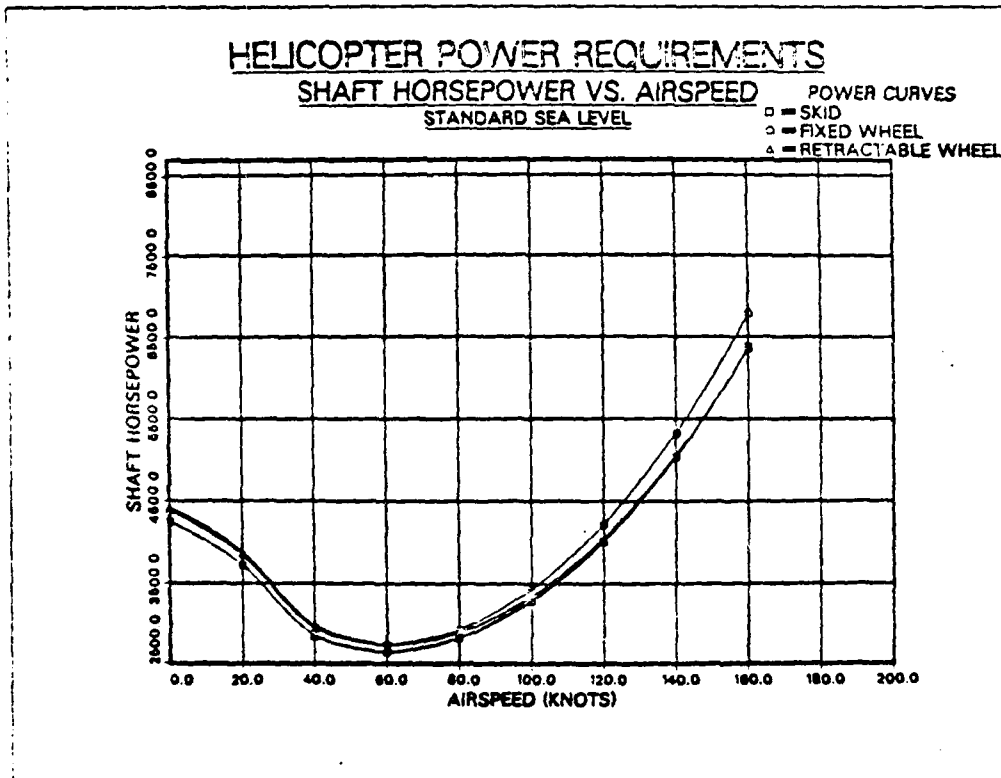

FILE: MYPLOT FORTRAN AL NAVAL POSTGRADJATE SCHJOL

```
C PROGRAM TO PLOT POWER REQUIREMENTS VS. AIRSPEED FOR A HELICOPTER
C WITH SKID, FIXED WHEEL, AND RETRACTABLE LANDING GEAR USING THE
C TEXTRONIX ELECTROSTATIC PLOTTER AND DISPLA SOFTWARE.
C REAL SKID,SKIDS,FIX,FIXED,RETR,RETRA
C DIMENSION SKID(10),SKIDS(10),FIX(10),FIXED(10),RETR(10),RETRA(10)
C
DATA SKID/0.,20.,40.,60.,80.,100.,120.,140.,160.,180./
DATA SKIDS/4247.3741,2843.2838,2817.3293,4013.5039,6377.8059/
DATA FIX/0.,20.,40.,60.,80.,100.,120.,140.,160.,180./
DATA FIXED/4378.3843,2943.2727,2918,3419,4215,5524,8779,8622/
DATA RETR/0.,20.,40.,60.,80.,100.,120.,140.,160.,180./
DATA RETRA/413.3876,963.2724,2380.3329,4047.5049,6562.8021/
C CALL TEKTRONIX 515 PLOTTER
CALL TKS018
C IF PLOT EXCEEDS SCREEN SIZE, SCALE DOWN TO FIT SCREEN
CALL HWSCAL('SCREEN')
C SET PAGE SIZE
CALL PAGE(11.,8.5)
C DEFINE AREA OF PLOT ON PAGE
CALL AREA2D(8.,3.5,5)
C FRAME THE SUBPLOT AREA
CALL FRAME
C SET THE TYPE FONT DESIRED
CALL SWISSL
C SET THICKNESS OF CURVE (IN INCHES)
CALL THKCRV(.015)
C DEFINE NAME OF X AXIS
CALL XNAME('AIRSPEED (KNOTS)','$',100)
C DEFINE NAME OF Y AXIS
CALL YNAME('SHAFT HORSEPOWER','$',100)
C DEFINE HEADING OF PLOT
CALL HEADIN('HELICOPTER POWER REQUIREMENTS$',-100,2.0,3)
CALL HEADIN('SHAFT HORSEPOWER VS. AIRSPEED$',-100,1.5,3)
CALL HEADIN('STANDARD SEA LEVEL$',-100,1.0,3)
C SET X ORIGIN, X STEP, X MAXIMUM, Y ORIGIN, Y STEP, Y MAXIMUM
CALL GRAF(0.,0,20.,200.,2500.,1000.,8700.)
CALL RASPLN(1,5)
CALL GRID(1,1)
C CALL CURVE(IPTSX,TPTSY, ,0)
CALL CURVE(SKID,SKIDS,9,1)
CALL CURVE(FIX,FIXED,9,1)
CALL CURVE(RETR,RETRA,9,1)
CALL LINES('SKID$',IPAK1,1)
CALL LINES('FIXED WHEELS$',IPAK1,2)
CALL LINES('RETRACTABLE WHEELS$',IPAK1,3)
CALL MYLEGN('POWER CURVES',12)
CALL LEGEND(IPAK1,3,0.8,5.5)
CALL ENOPL(0)
CALL DONEPL
STOP
END
```

The following program plots the data from the PTOT (Full Display) program.

FILE: POWERPLO FORTRAN AI NAVAL POSTGRADUATE SCHOOL

```

C PROGRAM TO PLOT THE PARASITE, PROFILE, INDUCED, AND TOTAL
C POWER REQUIRED FOR A HELICOPTER WITH SKID, FIXED WHEEL, OR
C RETRACTABLE LANDING GEAR.
C REAL PAR, PARA, PRO, PROS, INC, INCU, TOT, TOTS
C DIMENSION PAR( ), PARA( ), PRO( ), PROS( ), INDI( ), INDU( ), TOT( ),
C TOTS( )
C DATA PAR/0.,20.,40.,60.,80.,100.,120.,140.,160./
C DATA PARA/
C DATA PRO/0.,20.,40.,60.,80.,100.,120.,140.,160./
C DATA PROS/
C DATA INDI/0.,20.,40.,60.,80.,100.,120.,140.,160./
C DATA INDU/
C DATA TOT/0.,20.,40.,60.,80.,100.,120.,140.,160./
C DATA TOTS/
C CALL TEKTRONIX 518 PLOTTER
C CALL TEK618
C IF PLOT EXCEEDS SCREEN SIZE, SCALE DOWN TO FIT SCREEN
C CALL HMSCAL('SCREEN')
C SET PAGE SIZE
C CALL PAGE(11.,8.5)
C DEFINE AREA OF PLOT ON PAGE
C CALL AREA2D(8.0,5.5)
C FRAME THE SUBPLOT AREA
C CALL FRAME
C SET THE TYPE FONT DESIRED
C CALL SWISSL
C SET THICKNESS OF CURVE (IN INCHES)
C CALL THKCRV(.015)
C DEFINE NAME OF X AXIS
C CALL XNAME('AIRSPEED (KNOTS)',100)
C DEFINE NAME OF Y AXIS
C CALL YNAME('SHAFT HORSEPOWERS',100)
C DEFINE HEADING OF PLOT
C CALL HEADIN('HELICOPTER POWER REQUIREMENTS',-100,1.5,3)
C CALL HEADIN('SHAFT HORSEPOWER VS. AIRSPEEDS',-100,1.0,3)
C CALL HEADIN('SKID LANDING GEAR',-100,1.0,3)
C CALL HEADIN('FIXED WHEEL',-100,1.0,3)
C CALL HEADIN('RETRACTABLE GEARS',-100,1.0,3)
C SET X ORIGIN, X STEP, X MAXIMUM, Y ORIGIN, Y STEP, Y MAXIMUM
C CALL GRAF(0.0,20.,180.,0.,500.,2000.)
C CALL RASPLN(1.5)
C CALL GRID(1,1)
C CALL CURVE(TPTSX,TPTSX, TPTSX, ,0)
C CALL CURVE(PAR,PARA,9,1)
C CALL CURVE(PRO,PROS,9,1)
C CALL CURVE(IND,INDU,9,1)
C CALL CURVE(TOT,TOTS,9,1)
C CALL LINES('PARASITES',1,PAK1,1)
C CALL LINES('PROFILES',1,PAK1,2)
C CALL LINES('INDUCED',1,PAK1,3)
C CALL LINES('TOTAL',1,PAK1,4)
C CALL MYLEGN('POWER CURVES',12)
C CALL LEGEND(1,PAK1,4,6.6,6.0)
C CALL ENDPLOT
C CALL DONEPL
C STOP
C ENO

```



#### LIST OF REFERENCES

1. Fardink, P. J., Hand-held Computer Programs for Preliminary Helicopter Design, pp. 30-178, M.S. Thesis, Naval Postgraduate School, Monterey, California, 1982.
2. Kee, S. G., Helicopter Design Manual, pp. 5-19, M.S. Thesis, Naval Postgraduate School, 1983.
3. Schwab, R. T., Computer Program Analysis of Helicopter Weight Estimate Relationships Utilizing Parametric Equations, pp. 8-50, M.S. Thesis, Naval Postgraduate School, 1983.
4. DISSPLA Pocket Guide, pp. 6-12, Integrated Software Systems Corporation, 1981.

INITIAL DISTRIBUTION LIST

	No. Copies
1. Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2
2. Library, Code 0142 Naval Postgraduate School Monterey, California 93943	2
3. Department Chairman, Code 67 Department of Aeronautics Naval Postgraduate School Monterey, California 93943	1
4. CPT. Michael W. Rogers 217 So. Orchard St. Hillside, Ill. 60162	2
5. Professor Donald M. Layton, Code 67Ln Department of Aeronautics Naval Postgraduate School Monterey, California 93943	5
6. Commander, USAAVRADC Attn: DRDAV-NC (R. Shinn) 4300 Goodfellow Boulevard St. Louis, Missouri 63120	1

LMED  
8