

AD-A136 958

MINIMUM TIME TURNS WITH DIRECT SIDEFORCE(U) AIR FORCE  
INST OF TECH WRIGHT-PATTERSON AFB OH SCHOOL OF  
ENGINEERING M R BRINSON DEC 83 AFIT/GAE/AA/83D-1


1/1

UNCLASSIFIED

F/G 20/4

NL

END  
DATE  
FILMED  
2-84  
DTIC



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AFIT/GAE/AA/83D-1

①

MINIMUM TIME TURNS WITH

DIRECT SIDEFORCE

THESIS

AFIT/GAE/AA/83D-1

Michael R. Brinson

DTIC  
ELECTE  
JAN 19 1984  
S D  
E

MINIMUM TIME TURNS WITH DIRECT SIDEFORCE

THESIS

Presented to the Faculty of the School of Engineering  
of the Air Force Institute of Technology  
Air University  
in Partial Fulfillment of the  
Requirements for the Degree of  
Master of Science

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

by

Michael R. Brinson, B.S.

Graduate Aeronautical Engineering

December 1983



Approved for public release; distribution unlimited.

### Acknowledgements

I would like to thank my thesis advisor, Lt Col George Watt, for contributing much time and effort in helping me complete this effort. I also appreciate the advise given by my thesis committee consisting of Dr. Robert Calico and Lt Sal Leone. Without the benefit of their knowledge, I could not have completed this thesis. I would also like to thank my wife, Cindy, and acknowledge her many contributions during the 18 month program at AFIT.

## Table of Contents

	Page
Acknowledgements . . . . .	ii
List of Figures . . . . .	v
List of Symbols . . . . .	vi
Abstract . . . . .	viii
I. Introduction . . . . .	1
Background . . . . .	1
Problem Statement . . . . .	2
Scope . . . . .	2
Assumptions . . . . .	3
Approach . . . . .	4
Summary of Current Knowledge . . . . .	4
II. The Minimum Time Turn Problem . . . . .	6
The Maneuver . . . . .	6
Equations of Motion . . . . .	6
Aircraft Forces . . . . .	7
Atmosphere . . . . .	9
The Control Variable Constraints . . . . .	9
III. The Optimal Control Problem . . . . .	11
Optimal Control Problem . . . . .	11
Conditions to be Satisfied . . . . .	11
IV. The Suboptimal Control Problem . . . . .	14
Conditions to be Satisfied . . . . .	15
Method of Solution . . . . .	15
V. Solving the Minimum Turning Time Problem . . . . .	18
Equations of Motion . . . . .	18
The Control Variables . . . . .	19
Numerical Forms for the Control Variables . . . . .	21
Numerical Methods . . . . .	22
VI. Results . . . . .	24
The Effects of Sideforce . . . . .	25
Variations in Parameters . . . . .	35

VII. Conclusions and Recommendations . . . . .	50
Appendix A: Data Tables . . . . .	52
Appendix B: Program Listing . . . . .	54
Bibliography . . . . .	72
VITA . . . . .	73

### List of Figures

Figure	Page
1. Maximum Angle of Attack vs Velocity . . . . .	10
2. Optimal Thrust Coefficient vs Initial Velocity . . . . .	26
3. Turning Time vs Initial Velocity . . . . .	27
4. Heading Angle Time History . . . . .	28
5. Change in Turning Time vs Maximum Sideforce . . . . .	29
6. Altitude vs Velocity Trajectory for $V_1 = 420$ ft/sec . .	30
7. Altitude vs Velocity Trajectory for $V_1 = 621$ ft/sec . .	31
8. Altitude vs Velocity Trajectory for $V_1 = 903$ ft/sec . .	32
9. Energy Gained in Turn vs Initial Velocity . . . . .	33
10. Turning Time Reduction due to Sideforce . . . . .	34
11. Bank Angle Time History for Nominal Aircraft . . . . .	37
12. Altitude vs Crossrange Trajectory for Nominal Aircraft	38
13. Altitude vs Velocity Trajectory for Nominal Aircraft	39
14. Velocity and Flight Path Angle Time Histories . . . . .	40
15. Altitude vs Crossrange Trajectories for $T/W = .75$ . . .	42
16. Thrust Required/Available for Nominal Aircraft . . . . .	43
17. Aircraft Drag Polars . . . . .	44
18. Thrust Required/Available for $K_1 = .22$ . . . . .	45
19. Bank Angle Time History for $K_1 = .22$ . . . . .	46
20. Altitude vs Crossrange Trajectory for $K_1 = .22$ . . . .	47
21. Altitude vs Velocity Trajectory for $K_1 = .22$ . . . . .	48



### List of Symbols

$x$	- distance (x-direction)
$y$	- distance (y-direction)
$h$	- altitude
$V$	- velocity
$\gamma$	- flight path angle
$X$	- heading angle
$S$	- wing area
$W$	- weight
$T$	- thrust
$L$	- lift
$D$	- drag
$Q$	- sideforce
$\epsilon$	- thrust angle of attack
$\zeta$	- thrust side slip angle
$\mu$	- bank angle
$\alpha$	- angle of attack
$\alpha$	- thrust control variable
$\Sigma$	- sideforce control variable
$g_o$	- gravitational acceleration at sea level
$\rho$	- density
$\rho_o$	- density at sea level
$\sigma$	- density ratio
$\tau$	- nondimensional time
$C_L$	- lift coefficient
$C_D$	- drag coefficient

$C_{L_\alpha}$  - lift curve slope  
 $C_{D_0}$  - parasite drag coefficient  
 $K_1$  - induced drag due to lift parameter  
 $K_2$  - induced drag due to sideforce parameter  
 $G$  - performance index ( $t_f$ )  
 $F$  - augmented performance index  
 $\underline{X}$  - state vector  
 $U$  - control vector  
 $M$  - final condition vector  
 $H$  - Variational Hamiltonian  
 $\lambda$  - Lagrange multiplier vector (differential equations)  
 $v$  - Lagrange multiplier vector (final conditions)  
 $A$  - unknown parameter vector  
 $( )_i$  - initial value  
 $( )_f$  - final value  
 $( )_c$  - corner value  
 $( )_A$  - (A arbitrary)  
 $\dot{a}$  -  $\frac{da}{dt}$  (a arbitrary)  
 $A^T$  - a transposed (a arbitrary)

### Abstract

The objective of the study is to find the optimal trajectories and corresponding minimum turning times for a high performance aircraft with and without direct sideforce to perform a prescribed turn. These trajectories and times are then compared to evaluate the benefit of direct sideforce. Optimal control theory is applied to solve the minimum time to turn optimal control problem using a suboptimal control problem approach and a second order parameter optimization method.

The results indicate that the use of direct sideforce is beneficial in reducing turning time. In addition, the use of sideforce causes a small loss of energy for initial velocities lower and much higher than the corner velocity.

## MINIMUM TIME TURNS WITH DIRECT SIDEFORCE

### I Introduction

#### Background

In air-to-air combat, the aircraft with a higher turn rate capability has an advantage. The turn rate of a conventionally controlled aircraft is completely determined by specifying the load factor and velocity. The maximum turn rate occurs at maximum load factor and one particular airspeed. The maximum load factor, however, is bounded by two limits, a maximum structural limit and a maximum lift limit. Since these limits are heavily influenced by other design requirements, aircraft designed for similar roles tend to have similar maximum turn rates.

One possible way of improving turning time without sacrificing performance in other design areas may be through the use of conventional control such as direct sideforce control. The Air Force is currently flight testing the Advanced Fighter Technology Integrator (AFTI) aircraft which has the capability of generating both sideforce and lift without the accompanying yawing and pitching moments required by conventionally controlled aircraft.

Another important parameter in air-to-air engagements is specific energy. Since maximum performance turns generally cause a loss of energy, the presence of sideforce may minimize the loss or even allow a gain of energy.

Several studies such as Humphreys, Hennig, Bolding and Helgeson (4) and Well and Berger (7) have been published on the optimal trajectories and control schedules of conventional aircraft necessary to minimize turning time. However, none have considered the use of a translational force such as direct sideforce. This study, therefore, considers the effects on the optimum turning maneuver of applying direct sideforce.

#### Problem Statement

The problem is to find the control schedule which will minimize the time to maneuver a high performance aircraft from a set of initial conditions to a set of prescribed final conditions.

The controls to be optimized are bank angle, thrust, angle of attack, and sideforce. Additionally, the controls must not cause the aircraft to exceed its capability or design limits. These limits include maximum angle of attack or buffet limit, maximum structural load factor, minimum and maximum thrust, and the maximum allowable sideforce.

The objective of this study is to find the optimal controls, subject to constraints, which will minimize the turning time both with and without direct sideforce. From this study, the benefit of sideforce will then be evaluated.

#### Scope

The scope of this study is to find the trajectories which minimizes turning time for a variety of initial conditions. Additionally, the scope involves determining the effects of sideforce application on turning time.

### Assumptions

The assumptions made in this study can be divided into two parts, those used in modeling the aircraft and those made in deriving the equations of motion. First, the aircraft is modeled as a point mass with three degrees of freedom. This simplification is common for the type of trajectories considered in this study (4:91, 7:84). The fuel burn during the maneuver is considered negligible due to the short time it takes to complete a turn. Another simplification is that the error from the thrust vector not being colinear with the aircraft centerline is negligible. The coefficient of lift was assumed to be a linear function of angle of attack up to the stall limit. The drag coefficient was modeled as a function of the square of the lift coefficient and a linear function of sideforce. Standard incompressible aerodynamic theory shows these assumptions to be valid (8:11.8). The choice for a linear sideforce term in the drag equation is substantiated by windtunnel data from a similarly configured experimental Air Force aircraft. The maximum thrust was considered constant in this study. Since the maneuver is carried out within a narrow altitude band, the air density, and hence thrust, remains nearly constant.

The equations of motion were developed (1) assuming a flat earth with a constant gravitational acceleration. All atmospheric data were obtained from the 1962 Standard Atmosphere defined by NASA (2). In all cases the turning maneuver was initiated from straight and level flight, but the control variables angle of attack, bank angle, sideforce, and thrust were allowed to vary instantaneously. This simplification was made to reduce the problem to manageable

complexity and allow the effects of different control schedules to be evaluated without contamination from a arbitrarily assumed generic control response data.

#### Approach

To determine the effect of sideforce on turning flight, a realistic aircraft model must be derived and the parameters of the maneuver determined. The particular aircraft model and two turning situations were taken from Johnson's study (5:7-8). This was done in order to check the optimization computer code written by Johnson (5) after modification to include sideforce. From these two baseline cases, without sideforce, various parameters of the aircraft and maneuver were varied. These parameters include initial airspeed, thrust to weight ratio, and drag due to lift coefficient. The aircraft parameters were changed from the basic model in an attempt to compare the results with the qualitative conclusions of Well and Berger (7).

The following sections will define the turning problem, summarize the optimal and suboptimal control approaches, and discuss solutions and results.

#### Summary of Current Knowledge

Henning, Bolding, and Helgeson (4) generated several minimum turning time trajectories for a generic aircraft without sideforce. Results were presented for two initial velocities, several maximum thrust to weight ratios, and several final conditions. For the study, only the cases with a final heading of 180 degrees and a zero final flight path angle were useful for comparison results.

complexity and allow the effects of different control schedules to be evaluated without contamination from a arbitrarily assumed generic control response data.

#### Approach

To determine the effect of sideforce on turning flight, a realistic aircraft model must be derived and the parameters of the maneuver determined. The particular aircraft model and two turning situations were taken from Johnson's study (5:7-8). This was done in order to check the optimization computer code written by Johnson (5) after modification to include sideforce. From these two base-line cases, without sideforce, various parameters of the aircraft and maneuver were varied. These parameters include initial airspeed, thrust to weight ratio, and drag due to lift coefficient. The aircraft parameters were changed from the basic model in an attempt to compare the results with the qualitative conclusions of Well and Berger (7).

The following sections will define the turning problem, summarize the optimal and suboptimal control approaches, and discuss solutions and results.

#### Summary of Current Knowledge

Henning, Bolding, and Helgeson (4) generated several minimum turning time trajectories for a generic aircraft without sideforce. Results were presented for two initial velocities, several maximum thrust to weight ratios, and several final conditions. For the study, only the cases with a final heading of 180 degrees and a zero final flight path angle were useful for comparison results.



Johnson (5) and Peterson (6) use the results from two cases in (4) to verify a suboptimal numerical technique for finding the optimal control schedules required to minimize the turning time.

Well and Berger (7) used a different optimization technique to obtain general trends in optimal controls. One parameter of interest is the inclination of the plane in which the turn is performed. Well and Berger (7) show that for any initial velocity below a specific value, the optimum maneuver is a vertical Split-S. For initial velocities faster than some definable value, a half loop maneuver results in minimum time to turn. The optimum turning plane varies between these two extremes for initial velocities between the two key velocities. Unfortunately, Well and Berger (7) did not provide the specific aircraft characteristics used to generate their results. Although direct comparison of results cannot be made, the general trends can be used to qualitatively check the results beyond the two cases used by Johnson (5) and Peterson (6).

## II The Minimum Time Turn Problem

In order to evaluate the benefits of direct sideforce in a turning maneuver, it is first necessary to define a baseline from which a difference in performance due to the sideforce can be shown.

Establishing the baseline involves defining the turning maneuver as well as developing the governing equations of motion and a realistic model of an aircraft.

### The Maneuver

The initial conditions for all cases in this study are straight and level flight at 13,990 feet. From these conditions and a specified initial velocity, the aircraft turns to a final heading of 180° with a final flight path angle of zero.

### Equations of Motion

The equations of motion for flight of a point mass aircraft over a flat earth are derived by Miele (1:42-49) as:

$$\dot{X} = V \cos \gamma \cos \chi \quad (1)$$

$$\dot{Y} = V \cos \gamma \sin \chi \quad (2)$$

$$\dot{h} = V \sin \gamma \quad (3)$$

$$T \cos \epsilon \cos \zeta - D - mg \sin \gamma - m \dot{V} = 0 \quad (4)$$

$$T \cos \epsilon \sin \zeta - Q + mg \sin \mu \cos \gamma + m \dot{V}$$

$$(-\dot{\chi} \cos \mu \cos \gamma + \dot{\gamma} \sin \mu) = 0 \quad (5)$$

$$T \sin \epsilon + L - mg \cos \mu \cos \gamma - m \dot{V} (\dot{\chi} \sin \mu \cos \gamma + \dot{\gamma} \cos \mu) = 0 \quad (6)$$

Assuming the error due to neglecting the thrust sideslip angle is small, then  $\sin \zeta = 0$ ,  $\cos \zeta = 1$ , and  $\epsilon = \gamma$ . Substituting these values into equations (1) through (6) and rearranging yields:

$$\dot{X} = V \cos \gamma \cos \chi \quad (7)$$

$$\dot{Y} = V \cos \gamma \sin \chi \quad (8)$$

$$\dot{h} = V \sin \gamma \quad (9)$$

$$\dot{V} = g((T/W) \cos \gamma - D/W - \sin \gamma) \quad (10)$$

$$\dot{\chi} = \frac{g}{V \cos \gamma} ((T/W) \sin \alpha \sin \mu - (Q/W) \cos \mu + (L/W) \sin \mu) \quad (11)$$

$$\dot{\gamma} = \frac{g}{V} ((T/W) \sin \alpha \cos \mu + (Q/W) \sin \mu + (L/W) \cos \mu - \cos \gamma) \quad (12)$$

These equations are written in the wind axes and model the motion of an aircraft with respect to an earth fixed coordinate frame. The state variables are  $X$ ,  $Y$ ,  $h$ ,  $V$ ,  $\chi$ , and  $\gamma$ . The control variables are  $\alpha$ ,  $\mu$ ,  $T$ , and  $Q$ . New forms of the control variables  $T$  and  $Q$  will be defined later. The aerodynamic forces of  $L$  and  $D$  are discussed in the next section. The two variables,  $g$  and  $W$ , are assumed to be constant during the maneuver.

#### Aircraft Forces

The aerodynamic forces of lift and drag can be expressed as follows:

$$L = \frac{\rho_0 \sigma V^2 S C_L}{2} \quad (13)$$

$$D = \frac{\rho_0 \sigma V^2 S C_D}{2} \quad (14)$$

Expressions for  $C_L$  and  $C_D$  can be assumed from their airfoil theory for conventional aircraft. However, the sideforce in this study is assumed to be generated by aerodynamic surfaces. Therefore, the aircraft drag must include the effects of generating sideforce.

An expression for this effect was obtained from windtunnel data of an experimental Air Force aircraft with similar characteristics to the model used in this study. The expressions for  $C_L$  and  $C_D$  thus derived are:

$$C_L = C_{L\alpha} \alpha \quad (15)$$

$$C_D = C_{D_0} + K_1 C_L^2 + K_2 Q \quad (16)$$

Substituting these equations into (13) and (14) and dividing by the weight for use in the equations of motion yield:

$$\frac{L}{W} = \frac{\rho_0 \sigma V^2 S}{2W} C_{L\alpha} \alpha \quad (17)$$

$$\frac{D}{W} = \frac{\rho_0 \sigma V^2 S}{2W} (C_{D_0} + K_1 C_L^2 + K_2 Q) \quad (18)$$

Finally, the thrust to weight ratio and the sideforce to weight ratio are needed for use in the equations of motion. The maximum thrust and the maximum sideforce are both assumed to be constant throughout the turn. Therefore, thrust and sideforce can be defined as:

$$T = T_{MAX} \pi \quad (19)$$

$$Q = Q_{MAX} \Sigma \quad (20)$$

Now  $\pi$  and  $\Sigma$  become the control variables for thrust and sideforce, respectively. Forming thrust and sideforce to weight ratios yields,

$$T/W = \frac{T_{MAX}}{W} \pi = \left(\frac{T}{W}\right)_{MAX} \pi \quad (21)$$

$$Q/W = \frac{Q_{MAX}}{W} \Sigma = \left(\frac{Q}{W}\right)_{MAX} \Sigma \quad (22)$$

The actual values of the aircraft parameters used in this study are listed below. In some cases the values for  $(T/W)_{MAX}$  and  $K_1$  were varied to show their influence on the problem. These special cases are detailed in Chapter VI so only the nominal values are listed here.

$$W = 12,150 \text{ lb}$$

$$S = 237 \text{ sq.ft.}$$

$$C_{L\alpha} = 5.0$$

$$\alpha_{MAX} = .2 \text{ radians}$$

$$C_{D_0} = .02$$

$$(L/W)_{MAX} = 7.22$$

Note that the induced drag factor,  $K_1$ , can be calculated for a given aircraft geometry. Typical values range from 0.1 up to 0.3 for fighter type aircraft (8:11.9, E.7). A value of 0.05, therefore, indicates this is a very low drag aircraft.

### Atmosphere

A standard atmosphere defined in (2) was used throughout the study. The density ratio is expressed as:

$$\sigma = \frac{\rho}{\rho_0} = [1 - (\frac{n-1}{n}) \frac{g_0}{RT_0} h]^{\frac{1}{n-1}} \quad (23)$$

where,

$$\rho_0 = .002377 \text{ slugs/ft}^3$$

$$g_0 = 32.174 \text{ ft/sec}^2$$

$$T_0 = 518.688^\circ\text{R}$$

$$n = 1.235$$

$$R = 1715 \text{ ft}^2/\text{sec}^2\text{-}^\circ\text{R}$$

### The Control Variable Constraints

There are aircraft related constraints on all control variables except bank angle. These constraints are the maximum lift limit, maximum load factor, minimum and maximum thrust and maximum sideforce.

The angle of attack is limited by either the maximum lift limit or the maximum load factor, whichever is less. This effect on maximum angle of attack is shown as function of airspeed in Fig 1. The velocity where these two limits meet is called the corner

velocity and is discussed in section V.

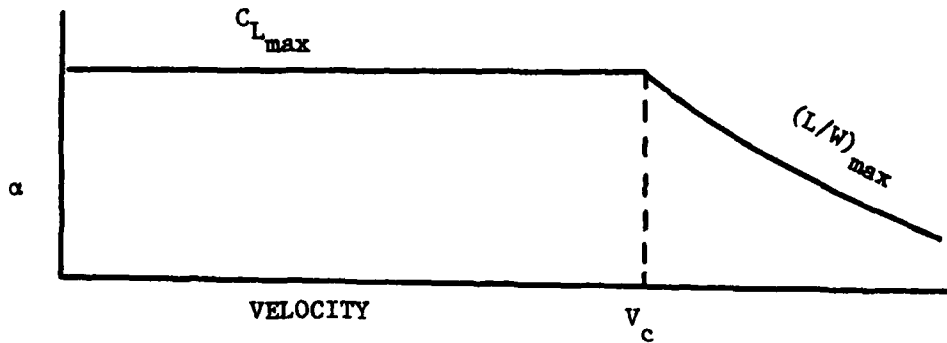


Fig 1. Maximum Angle of attack vs velocity

The thrust is bounded on the lower side by the minimum thrust which is defined as zero in this study. From this and equation (21), the thrust control variable is limited to,

$$0 \leq \pi \leq 1 \quad (24)$$

Sideforce can be generated in either direction up to the maximum value in equation (22). Therefore, the sideforce control must fall in the range,

$$-1 \leq \xi \leq 1 \quad (25)$$

These limits and their effects on the problem are discussed more fully in Section V.

### III The Optimal Control Problem

The optimal control approach is discussed in this chapter to define the basic conditions to be satisfied by the optimal solution. The discussion also shows the complexity and the inherent solution difficulties of the approach.

#### Optimal Control Problem

The optimal control problem requires finding the functional relationships for the control variables that will minimize the performance index,

$$G = t_f \quad (26)$$

subject to the differential constraints expressed vectorially as

$$\dot{\underline{X}} = \underline{f} \quad (27)$$

where  $\underline{X}$  is the state vector and  $\underline{f}$  is the vector containing the right side of Eqs (7) to (12). The problem is also subject to the control constraints defined in the previous chapter and to the final conditions expressed as:

$$M_1 = \gamma_f \quad (28)$$

$$M_2 = \chi_f - 180^\circ \quad (29)$$

Thus, the final conditions are satisfied when,

$$\underline{M} = \begin{pmatrix} M_1 \\ M_2 \end{pmatrix} = 0 \quad (30)$$

The Calculus of Variations is applied to find the necessary and sufficient conditions to be satisfied by the optimal control variables.

#### Conditions to be Satisfied

From Johnson's work (5:13-14) the augmented performance index,  $J$ , is defined by:

$$J = G + v^T M + \int_{t_1}^{t_f} \lambda^T (f - \dot{X}) dt \quad (31)$$

where  $v$  and  $\lambda$  are Lagrange multiplier vectors, then the variational Hamiltonian,  $H$ , is expressed as

$$H = \lambda^T f \quad (32)$$

The optimal controls, expressed vectorially as  $U$ , must satisfy the first variational requirement or the Euler-Lagrange equations:

$$\dot{\lambda} = -H_X^T = -\left(\frac{\partial H}{\partial X}\right)^T \quad (33)$$

$$\dot{X} = H_\lambda^T = \left(\frac{\partial H}{\partial \lambda}\right)^T \quad (34)$$

$$U_{opt} = \min_U (H) \quad (35)$$

Equation (35) states that the optimal controls are those which minimize  $H$ . The optimal solution must also satisfy the transversality conditions and corner conditions:

$$H_1 = G_{t_1} = 0 \quad (36)$$

$$H_f = G_{t_f} = 0 \quad (37)$$

$$\lambda_1^T + G_{x_1} = 0 \quad (38)$$

$$\lambda_f^T - G_{x_f} = 0 \quad (39)$$

$$\Delta (H) - G_{t_c} = 0 \quad (40)$$

$$\Delta (\lambda^T) + G_{x_c} = 0 \quad (41)$$

$$G_v = 0 \quad (42)$$

Explicitly solving the optimal control problem is at best complex. If the controls intersect boundaries or are singular, the difficulty increases. It is desirable therefore, to find a



technique which will yield a reasonable solution. The Suboptimal Control Method developed by Hull and Edgeman (3) fulfills these requirements.

#### IV     The Suboptimal Control Problem

The suboptimal control approach used in this study transforms the optimal control problem into a parameters optimization problem. This is accomplished by assuming a known mathematical form with a number of unknown constants for the control variables. This technique is used by several numerical optimization methods including the well known Raleigh-Ritz method and reduces the problem to one of finding the coefficients which satisfy the conditions of the problem.

If the unknown constants of the controls are formed into a vector B, the controls can be written as

$$U = U(t, B) \quad (43)$$

And, the vector of all unknowns in the problem can be represented as

$$A = [t_f, B]^T \quad (44)$$

For any vector A, the equations of motion can be integrated from  $t=0$  to  $t=t_f$  to yield a set of final state variables expressed functionally as

$$\underline{X}_f = \underline{X}_f(A) \quad (45)$$

Therefore, the performance index, G, as well as the final conditions vector, M, are functions of the A vector only.

The problem is then to find the A vector which minimizes the turning time,

$$G = G(A) \quad (46)$$

subject to the equations of motion

$$\dot{\underline{X}} = f(\underline{X}, A, t) \quad (47)$$

the physical control constraints and the final conditions,

$$M(A) = 0 \quad (48)$$

#### Conditions to be Satisfied

An augmented performance,  $F$ , can be defined as:

$$F(A, v) = G(A) + v^T M(A) \quad (49)$$

Ordinary differential calculus requires two conditions to be satisfied:

$$F_A^T(A, v) = G_A + v^T M_A = 0 \quad (50)$$

$$F_v^T(A, v) = M(A) = 0 \quad (51)$$

where  $M_A$  and  $G_A$  are defined as

$$M_A = \frac{\partial M}{\partial A} \quad (52)$$

$$G_A = \frac{\partial G}{\partial A} \quad (53)$$

The gradient,  $F_A^T$ , is a column vector containing first order information or the slope indicating the change in  $F$  with respect to changes in each element of  $A$ .  $F_A^T$  then reveals the direction which  $A$  must change to drive  $F$  to zero. Since equations (50) and (51) are the only two conditions imposed by the suboptimal control approach, it is clearly much less complex than the optimal approach and requires less knowledge of the peculiarities of each specific problem.

#### Method of Solution

Hull and Edgeman (3) present a second order parameter optimization technique and an algorithm ideally suited to be used in a digital computer program. Basically the paper develops two vector equations which yield the changes necessary in the

Lagrange multipliers,  $v$ , and the  $A$  vector to drive  $F_A^T$  and  $M$  to zero. These equations are:

$$\delta v = (M_{AA} F_{AA}^{-1} M_A^T)^{-1} (-P M_{AA} F_{AA}^{-1} F_A^T + Q M) \quad (54)$$

$$\delta A = -F_{AA}^{-1} (P F_A^T + M_A^T \delta v) \quad (55)$$

where

$$M_A = \frac{\partial M}{\partial A} \quad (56)$$

$$F_{AA} = \frac{\partial^2 F}{\partial A^2} \quad (57)$$

and  $P$  and  $Q$  are scaling factors which control optimization and satisfaction of the end conditions, respectively. The algorithm to solve the suboptimal problem was written into computer code by Johnson (5) and presented here as follows:

1. guess  $A$  and  $v$ ;
2. integrate the equations of motion to obtain  $\underline{y}_f$ ;
3. compute  $M$ ,  $M_A$ ,  $M_{AA}$ ,  $F_A$ , and  $F_{AA}$ ;
4. select values for  $P$  and  $Q$  and compute  $\delta v$  and  $\delta A$ ;
5. set  $A = A + \delta A$  and  $v = v + \delta v$ ;
6. check convergence criteria and if unsatisfied go to step 2.

Guessing an initial  $A$  vector is relatively simple since the elements of  $A$  are physical parameters of the problem. However, finding an initial value for the  $v$  vector and picking  $P$  and  $Q$  are not obvious. Hull and Edgeman (3) developed a first order-approach which eliminates the need to guess  $v$ . The vector equations for this purpose are:

$$v = (M_A M_A^T)^{-1} [(Q/P)M - M_A G_A^T] \quad (58)$$

$$\delta A = -PF_A^T \quad (59)$$

The first order information of Equations (58) and (59) can be used to iterate to some region close to a solution. Then a switch can be made to the second order method (Eqs (54) and (55)) for quicker final convergence.

In this study the value of Q remained fixed at (1) throughout the iteration. The optimization weighting factor was initially set small and allowed to increase until the norm  $||\delta A||$  began to get too large. If  $\delta A$  becomes too large, the iteration process may skip over the solution and increase convergence time or prevent convergence completely. When a solution is eminent, P is set equal to one and norms  $||F_A^T||$  and  $||M||$  are monitored. When they are less than some small positive number, convergence is achieved.

## V Solving the Minimum Turning Time Problem

The solution of the suboptimal control problem is sufficiently complex to require the use of numerical techniques. In order to implement these techniques, the optimal problem defined in an earlier chapter must be adapted. In this chapter the equations of motion are presented in their final form, the control variables are discussed further, and the numerical methods used to implement the algorithm in Chapter VI are specified.

### Equations of Motion

One step of the suboptimal control algorithm requires the equation of motion to be integrated from  $t = 0$  to  $t = t_f$ . However, the final time is an unknown in the problem. For convenience, the time can be nondimensionalized as

$$\tau = \frac{t}{t_f} \quad (0 \leq \tau \leq 1) \quad (60)$$

Then the time dependence in the equations of motion can be eliminated by transforming the equations to functions of the non-dimensional time,  $\tau$ . By the use of the chain rule,

$$\dot{X} = \frac{dX}{dt} = \frac{dX}{d\tau} \frac{d\tau}{dt} = \frac{dX}{d\tau} \left( \frac{1}{t_f} \right) \quad (61)$$

or

$$\frac{dX}{d\tau} = t_f \dot{X} \quad (62)$$

The other variables in Eqs (7) through (12) can similarly be transformed. Doing this and substituting the expressions for aerodynamic forces, atmospheric parameters, and control variables the equations can be rewritten as:

$$\frac{dX}{d\tau} = t_f V \cos \gamma \cos \chi \quad (63)$$

$$\frac{dY}{d\tau} = t_f V \cos \gamma \sin \chi \quad (64)$$

$$\frac{dH}{d\tau} = t_f V \sin \gamma \quad (65)$$

$$\begin{aligned} \frac{dV}{d\tau} = t_f \{ & 48.261 \pi \cos \alpha - [1.4917 \times 10^{-5} + 9.3238 \times 10^{-4} \alpha^2 \\ & + 6.9547 \times 10^{-8} |\Sigma|] [1 - 6.8823 \times 10^{-6} h]^{4.2553} V^2 \\ & - 32.174 \sin \gamma \} \end{aligned} \quad (66)$$

$$\begin{aligned} \frac{d\chi}{d\tau} = \frac{t_f}{V \cos \gamma} \{ & 48.261 \pi \sin \alpha \sin \mu - 16.087 \Sigma \cos \mu \\ & + 3.7295 \times 10^{-3} (1 - 6.8823 \times 10^{-6} h)^{4.2553} V^2 \alpha \sin \mu \} \end{aligned} \quad (67)$$

$$\begin{aligned} \frac{dY}{d\tau} = \frac{t_f}{V} \{ & 48.261 \pi \sin \alpha \cos \mu + 16.087 \Sigma \sin \mu \\ & + 3.7295 \times 10^{-3} (1 - 6.8823 \times 10^{-6} h)^{4.2553} V^2 \alpha \cos \mu \\ & - 32.174 \cos \gamma \} \end{aligned} \quad (68)$$

#### The Control Variables

Equations (24) and (25) give the ranges of the thrust and sideforce controls respectively. The angle of attack is limited by either one of two constraints. For speeds below the corner velocity, it is bounded by the maximum lift limit given by

$$\alpha \leq 0.2 \text{ radians} \quad (69)$$

For speeds above the corner velocity, the angle of attack is limited by the maximum load factor.

$$\left(\frac{L}{W}\right) \leq 7.22 \quad (70)$$

Substituting the relationship from Equation (17) yields

$$\frac{\rho_0 \sigma V^2 S C_L}{2W} \leq 7.22 \quad (71)$$

Further substitution of the known parameters simplifies

Equation (71) to

$$\alpha \leq \frac{62286.8}{\sigma v^2} \quad (72)$$

Thus, Equations (69) and (72) form the complete boundary for angle of attack as shown in Fig 1. The corner velocity is defined as the velocity at which the lift limit equals the load factor limit and can be calculated by equating Equations (69) and (72).

$$0.2 = \frac{62286.8}{\sigma v_c^2} \quad (73)$$

or

$$v_c = 558.06 \sigma^{-1/2} \quad (74)$$

The corner velocity plays an important part in a minimum time turning maneuver and is discussed further in Chapter VI.

The constraints on thrust, sideforce, and angle of attack are brought into the problem when the optimization algorithm causes the controls to exceed their limits. When this occurs, the control is set equal to its limit. In addition to limiting the control variable itself, the effect on the optimization routine must be eliminated if a convergence is to be attained. This is done by checking the sign of the  $F_A$  terms for each limit bound control. A negative  $F_A$  term indicates the control must be increased to drive  $F_A$  to zero. But, if the control is already at its maximum limit,  $F_A$  cannot be driven to zero. For these cases the effected control is no longer a variable in the problem because its value is fixed at the maximum or minimum values. Therefore, the matrices used to calculate  $\delta A$  and  $\delta v$  are computed without the presence of that control.



### Numerical Forms for the Control Variables

In this study, all control variables are described by Chebyshev polynomials with  $\tau$  as the independent variable. The polynomials,  $T_i$  for  $i = 1$  to  $i = 4$  are

$$T_1 = 1 \quad (75)$$

$$T_2 = 2\tau - 1 \quad (76)$$

$$T_3 = 8\tau^2 - 8\tau + 1 \quad (77)$$

$$T_4 = 32\tau^3 - 48\tau^2 + 18\tau - 1 \quad (78)$$

The control variables are then described by

$$\mu = \sum_{k=1}^{NMU} B_k T_k \quad (79)$$

$$\pi = \sum_{l=1}^{NPI} C_l T_l \quad (80)$$

$$\alpha = \sum_{m=1}^{NA} D_m T_m \quad (81)$$

$$\Sigma = \sum_{n=1}^{NS} E_n T_n \quad (82)$$

where  $B$ ,  $C$ ,  $D$ , and  $E$  are the unknown coefficients and  $NMU$ ,  $NPI$ ,  $NA$ , and  $NS$  are the number of coefficients for  $\mu$ ,  $\pi$ ,  $\alpha$ , and  $\Sigma$  respectively. It should be mentioned that Johnson's results (5) show little changes to either the control time histories or the turning times for controls described by more than four coefficients. For this reason the control equations in this study were limited to third order. The actual values and number of coefficients representing each control is discussed in Chapter VI.

### Numerical Methods

The numerical algorithm used in the suboptimal control approach requires the matrices  $M$ ,  $M_A$ ,  $M_{AA}$ ,  $F_A$ , and  $F_{AA}$  to be computed. From Ref 3:484,  $F_A$  and  $F_{AA}$  can be calculated from

$$F_A = G_A + v^T M_A \quad (83)$$

$$F_{AA} = G_{AA} + v^T M_{AA1} + v^T M_{AA2} \quad (84)$$

Since  $G = t_f$ ,  $G_A$  and  $G_{AA}$  can be analytically determined,  $M$ ,  $M_A$ , and  $M_{AA}$  are the only unknowns.

To evaluate  $M$ , Equations (63) through (68) can be integrated from  $\tau = 0$  to  $\tau = 1$ . The  $M_A$  and  $M_{AA}$  are computed by a central difference numerical derivative technique. This technique requires the individual elements of  $A$  to be perturbed both positively and negatively one by one. After each perturbation the equations of motion must be integrated from  $\tau = 0$  to  $\tau = 1$ . The  $M_A$  is calculated by:

$$M_{A_n} = \frac{M_+ - M_-}{2\delta n} \quad (85)$$

where  $M_{A_n}$  are the two  $M_A$  elements calculated by perturbing the  $n$ th element of  $A$ .  $M_+$  and  $M_-$  are the final conditions computed by changing  $A_n$  a small amount,  $\delta n$ . The second derivative is computed similarly by:

$$M_{A_n A_m} = \frac{M_{++} - 2M_{+-} + M_{--}}{\delta_n^2} \quad (86)$$

when  $n = m$  and,

$$M_{A_n A_m} = \frac{M_{++} - M_{+-} - M_{-+} + M_{--}}{4\delta_n\delta_m} \quad (87)$$

if  $n \neq m$ . The two subscripts indicate two elements.  $A_n$  and  $A_m$  must be perturbed both positively and negatively. The equations of motion then must be integrated for each combination of  $A_n$  and  $A_m$  although the  $M_{AA}$  matrices are symmetric. The total number of times the equations of motion must be integrated for one iteration of the algorithm is then given by:

$$N = \frac{1}{2}(n^2 + n + 3) \quad (88)$$

where  $n$  is the number of elements in the  $A$  vector and can be calculated as

$$n = 1 + NNV + NPI + NA + NS \quad (89)$$

From Equation (88) it is apparent an efficient numerical integration routine is imperative. A fifth order, Runge-Kutta integration routine with variable step size is used in this study. Another problem which influences the integration routine is the discontinuous slope of the angle of attack limit at the corner velocity.

If the velocity traverses the corner velocity as the equations of motion are integrated, small inaccuracies occur due to the angle of attack limit changing across the corner velocity. These inaccuracies, while not severe when compared to the absolute values of the state variables, are large enough to prevent the optimization algorithm from converging to an answer. Therefore, the step size must be controlled as velocity approaches the corner velocity. But, since the variable of integration is nondimensional time,  $\tau$ , an iterative procedure is required to find the  $\tau$  at which velocity equals the corner velocity. Once the corner velocity is passed the integration routine can be allowed to optimize step size to minimize computation time.

## VI Results

The results of this study are divided into two parts. The first part discusses the effects of sideforce on the minimum turning time problem. The second part shows the results of attempting to match the qualitative data presented by Well and Berger (7).

In all cases, two of the controls stayed consistently against their limits. The angle of attack always migrated to its limit of 0.2 and  $\Sigma$  always went to the maximum negative limit of -1.0 when that control was included in the problem. For this reason, these two controls were represented by constant coefficients only instead of higher order polynomials. This greatly reduced the number of control coefficients and sped up convergence time. One other variable, thrust, was limited to a single coefficient. Though Johnson's results (4:61) concluded a near bang-bang type control for thrust yields smaller turning times, real world engines have finite spool up and spool down times. Therefore, the short duration of the maneuver would not realistically allow large excursions in thrust. In addition, it was felt the computation time could more constructively be spent investigating the effect of sideforce if thrust remained constant throughout the turn. The plot in Figure 2 shows the optimal value for the thrust coefficient as a function of initial velocity for the case where all controls are represented by single coefficients. Values for thrust are also shown for variations in aircraft parameters such as T/W and the drag due to lift coefficient,  $K_1$ . These parameter variations are discussed later in this chapter.

### The Effects of Sideforce

The effect of sideforce on turning time is shown in Figure 3. The graph shows that sideforce has more influence on the final time the farther the initial velocity is from the corner velocity. It also shows that even if the turn for a conventional aircraft is initiated at the corner velocity, which is the speed that yields the quickest turn, the use of sideforce reduces the turning time though not very much. The reason for this can be seen in Figure 4. The presence of a direct sideforce generates a sideslip angle. This sideslip angle then reduces the angle through which the velocity vector must be turned by conventional means. Hence, the turning time is reduced. One would assume that more sideforce would generate more sideslip and thereby reduce the turning time even more. Figure 5 illustrates the effect of various values of maximum sideforce up to one "g" lateral acceleration. The changing slope of these curves indicates that even greater benefit can be realized if the sideforce is allowed to increase above the one "g" limit shown in Figures 6 through 8. If the specific energy is given as

$$E_s = (h + \frac{v^2}{2g}) \quad (90)$$

where  $g = 32.174 \text{ ft/sec}^2$ , then the change in specific energy during the maneuver can be calculated

$$E_s = E_{s_f} - E_{s_i} = (h_f - h_i) + \frac{(v_f^2 - v_i^2)}{2g} \quad (91)$$

where subscripts i and f denote initial and final conditions respectively. Values of  $\Delta E_s$  are plotted as a function of initial airspeed both with and without sideforce in Figure 9. As can be seen at the low initial speeds, an aircraft using sideforce gains less energy during

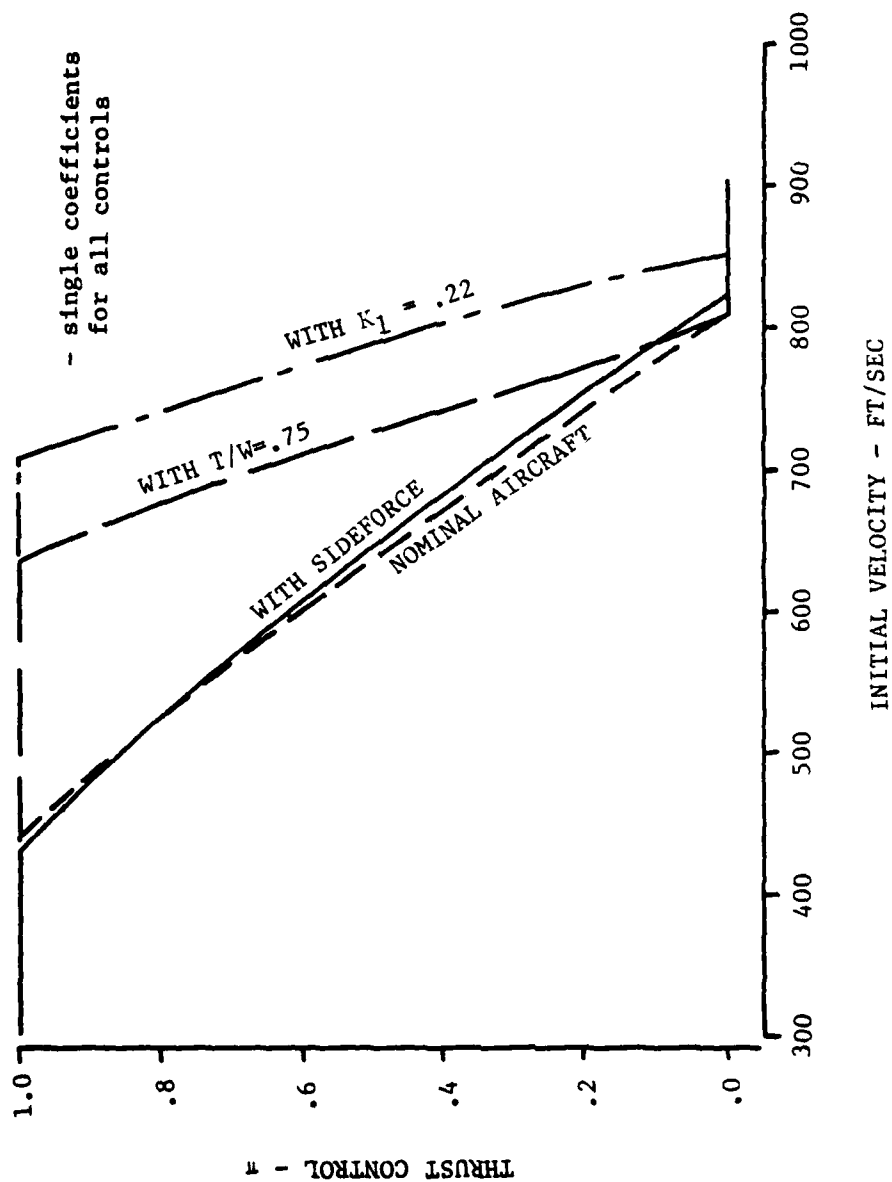


Fig. 2. Optimum Thrust Coefficient vs. Initial Velocity

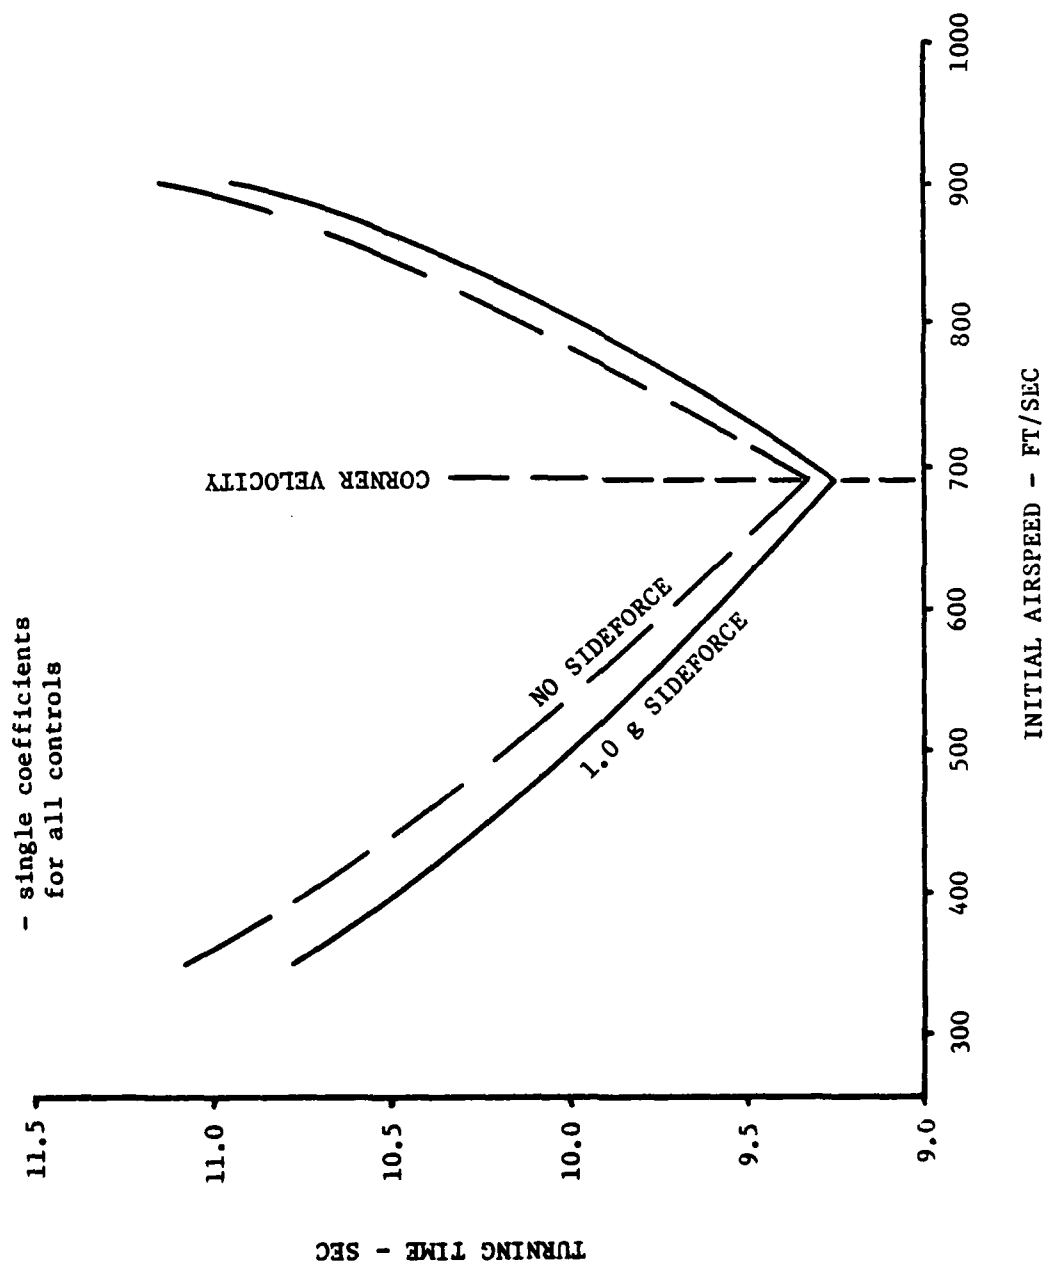


Fig. 3. Turning Time vs. Initial Velocity

- single coefficients  
for all controls

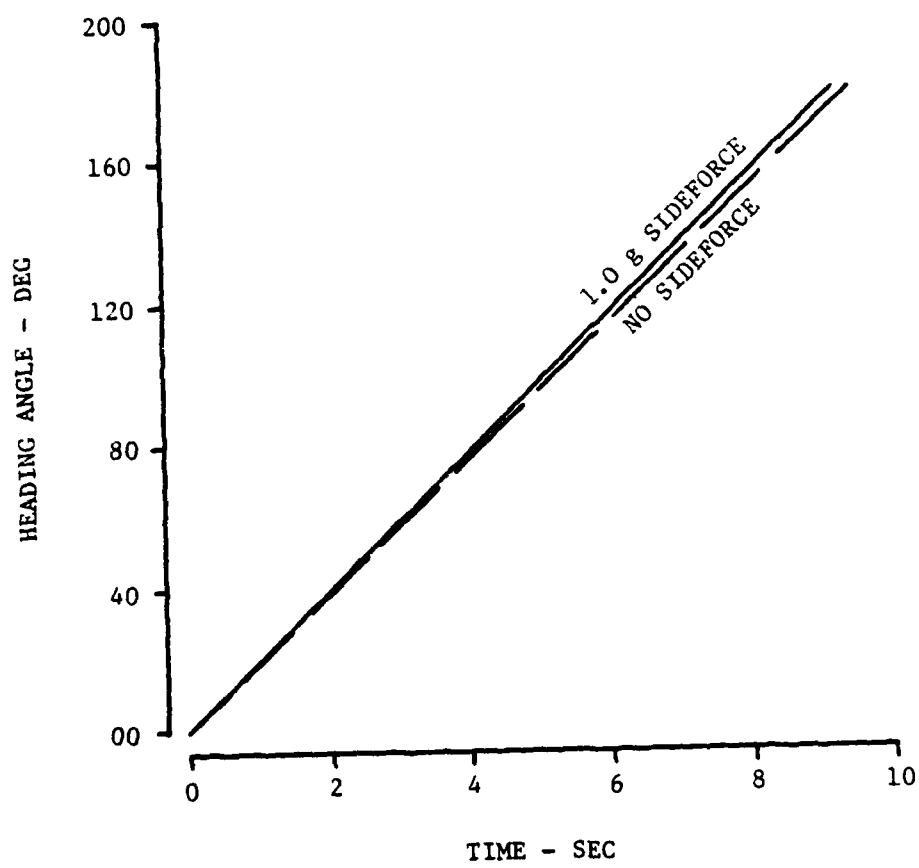


Fig. 4. Heading Angle Time History



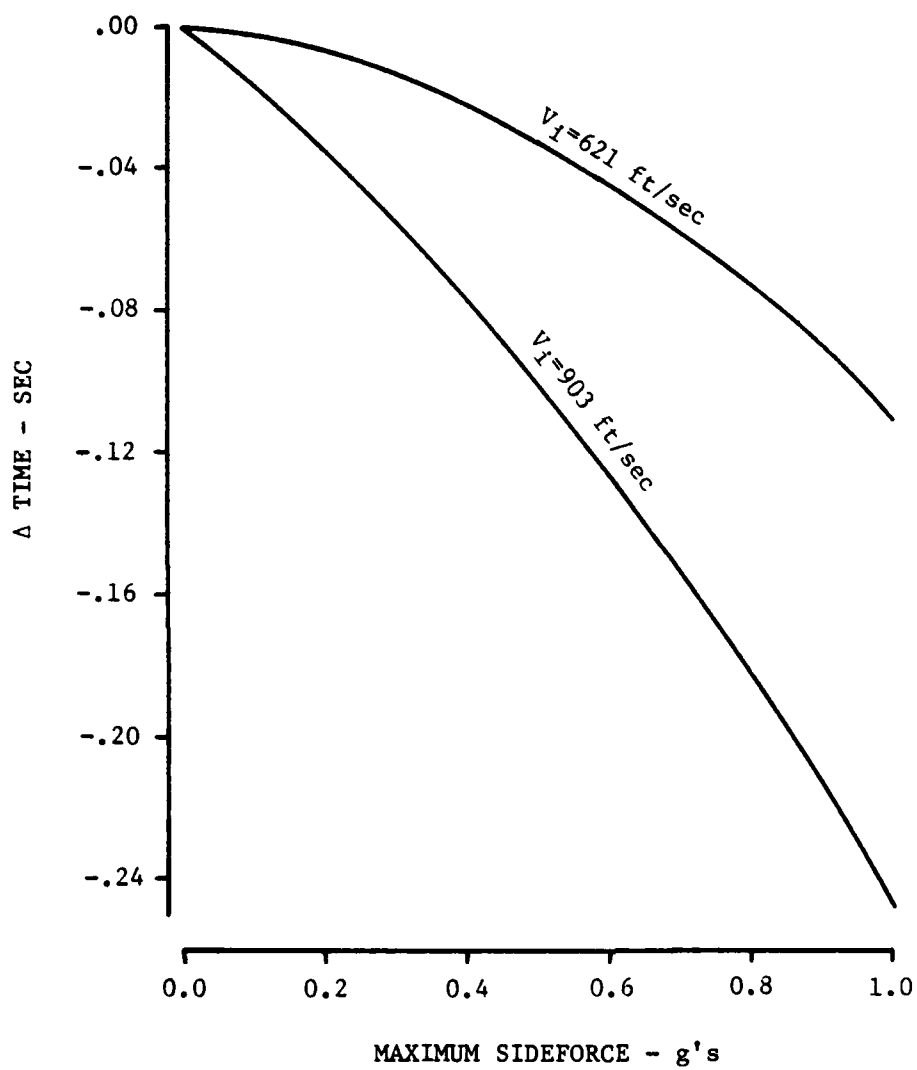


Fig. 5. Change in Turning Time vs. Maximum Sideforce

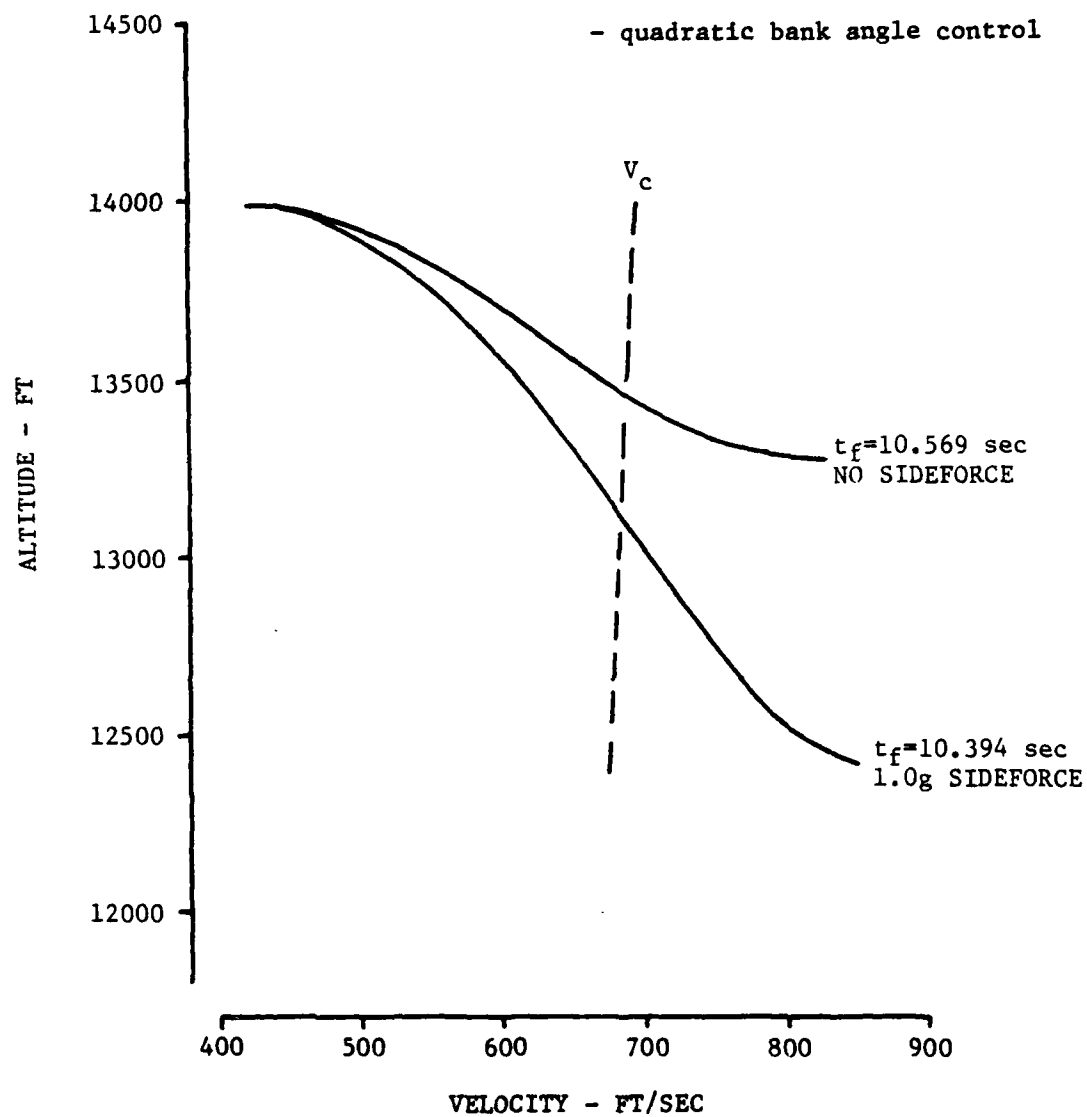


Fig. 6. Altitude vs. Velocity Trajectory for  $V_1 = 420$  ft/sec

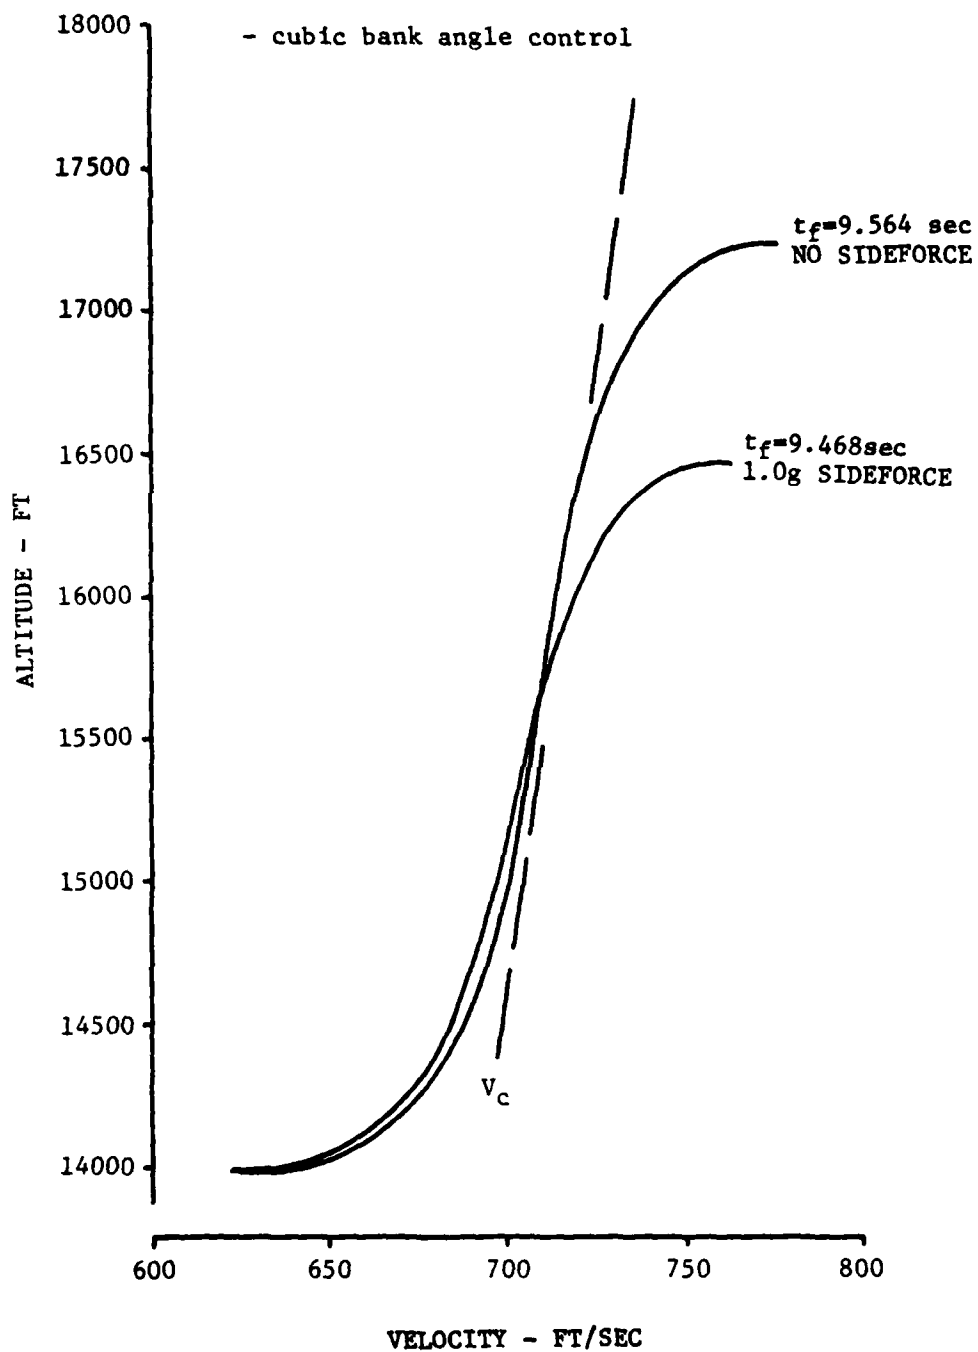


Fig. 7. Altitude vs. Velocity Trajectory for  $V_i = 621$  ft/sec

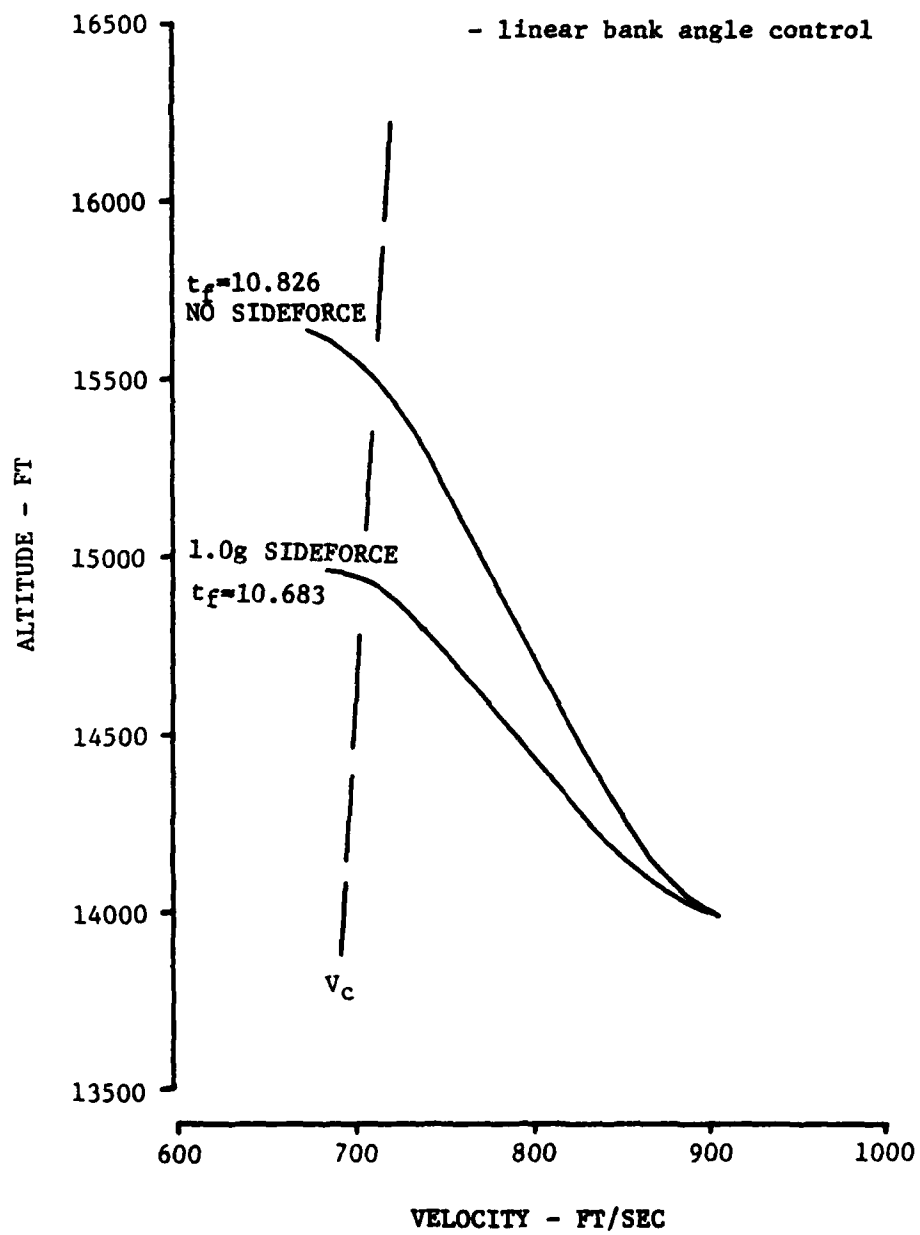


Fig. 8. Altitude vs. Velocity Trajectory for  $V_1 = 903$  ft/sec

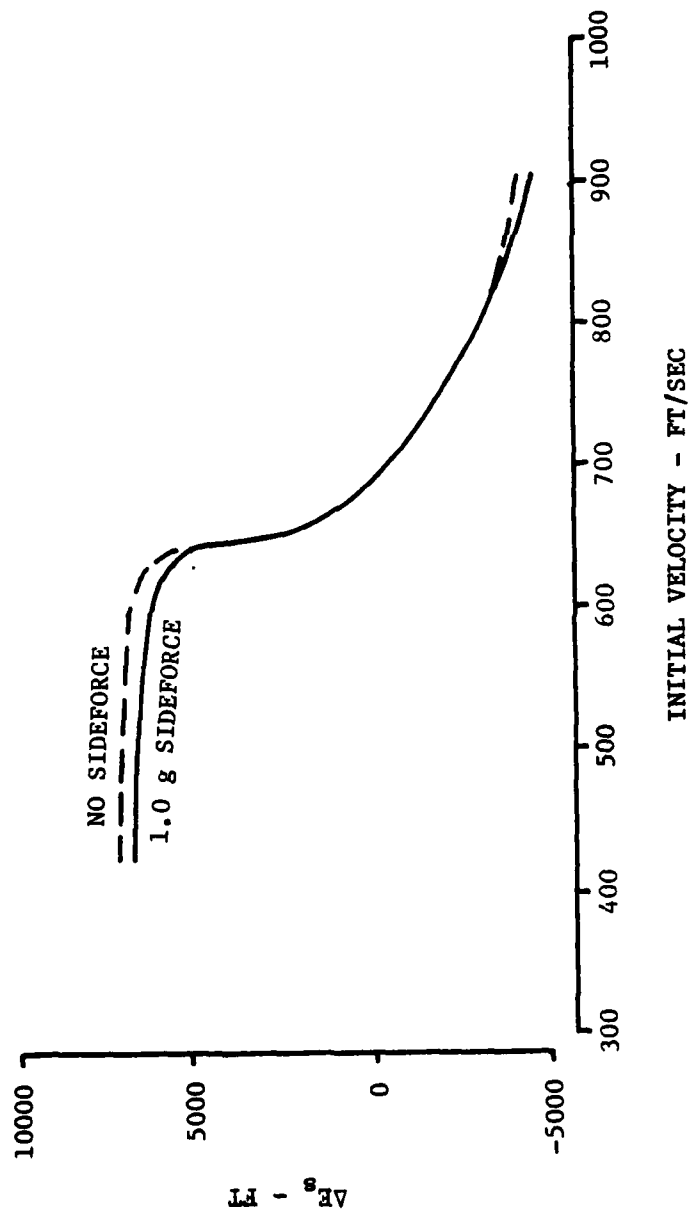


Fig. 9. Energy Gained in Turn vs. Initial Velocity

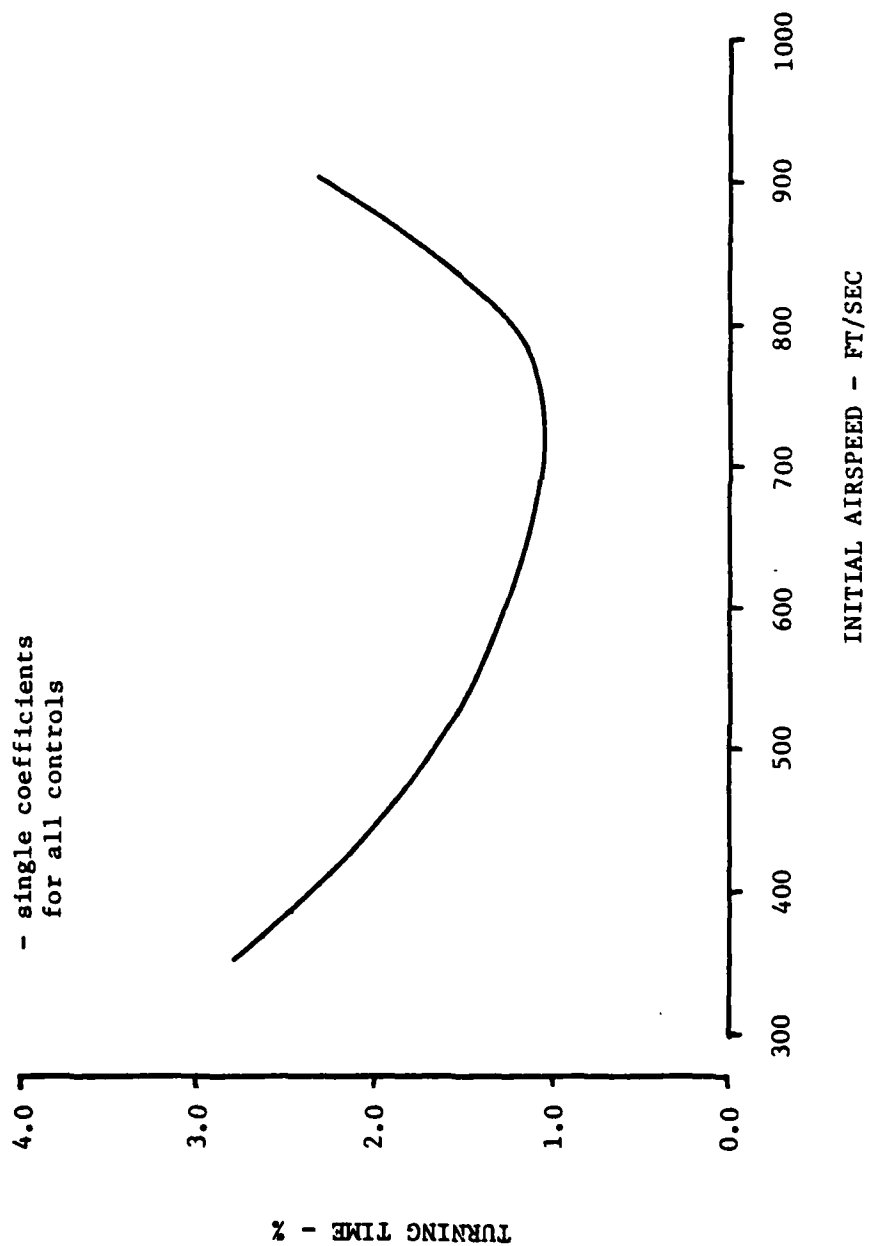


Fig. 10. Turning Time Reduction due to Sideforce

the turn. This is apparently caused by the added induced drag of the sideforce generator. And, since the thrust control is against the upper limit, no additional thrust is available to counteract the additional drag. Likewise, the high initial velocity case shows a slight loss of energy due to sideforce. In this case the thrust is at its lower limit in order for the aircraft to quickly slow to the corner velocity. In this respect the added drag due to sideforce aids the deceleration, but it also causes a slightly higher energy loss.

In summary of the primary function of sideforce, Figure 10 shows the percent of turning time saved by the use of direct sideforce. Additionally, the control coefficients, final time and change in specific energy are tabulated in the appendix.

#### Variations in Parameters

The general results given by Well and Berger (7) indicates there exists some initial velocity below the corner velocity for which the optimum maneuver is a split-S. That is, a roll of 180 degrees followed by a pull through in the vertical plane. The strategy in this technique is to use gravity, in conjunction with thrust, to accelerate the aircraft to the corner velocity as quickly as possible. And, as can be seen in Figure 3, the aircraft which can get to its corner velocity the quickest and maintain it will complete the turn the quickest. On the other side of the corner velocity, Well and Berger (7) found for some initial speed above the corner velocity, the optimum maneuver will be a vertical pull-up. The physical reasoning again being to use gravity to help slow the aircraft to the corner velocity.

The curves in Figures 11 and 13 show the bank angle time history, the vertical plane trajectory, and the altitude/velocity trajectory, respectively. Of particular interest is Figure 12 because it indicates the turn is performed in nearly a constant plane. As can be seen, even for the wide variation in initial velocities, the plane of the turn approaches vertical only for very low or very high initial airspeeds. Extrapolating from the values of Figure 12 indicates the lower velocity would be well below stall speed (256 ft/sec @  $h = 13,990$  ft) and the upper velocity must be far into the compressible flow region where the aircraft model is inadequate. The reason the maneuver plane angle varies so little with initial airspeed can be seen in Figure 14. This figure shows velocity and flight path angle as a function to time. In the beginning of the turn, the flight path angle is negative and the aircraft is accelerated toward the corner velocity with the aid of gravity. Upon, or slightly before reaching the corner velocity, the optimal solution indicates  $\gamma$  should bottom out and become more positive in order to prevent the aircraft from accelerating too far past the corner velocity. If the plane of the turn were steeper, the  $\gamma$  curve in Figure 14 would become more deeply cupped and would increase the acceleration due to gravity during the initial part of the turn. With the increases in acceleration, however, the corner velocity would be attained quicker, much before the  $\gamma$  curve bottomed out. Hence, the aircraft would be accelerated well beyond the corner velocity thereby increasing the turning time.

In an effort to try and match the general results of Well and Berger and represent an aircraft of more modest performance, the available thrust was reduced by half. This would force the optimiza-



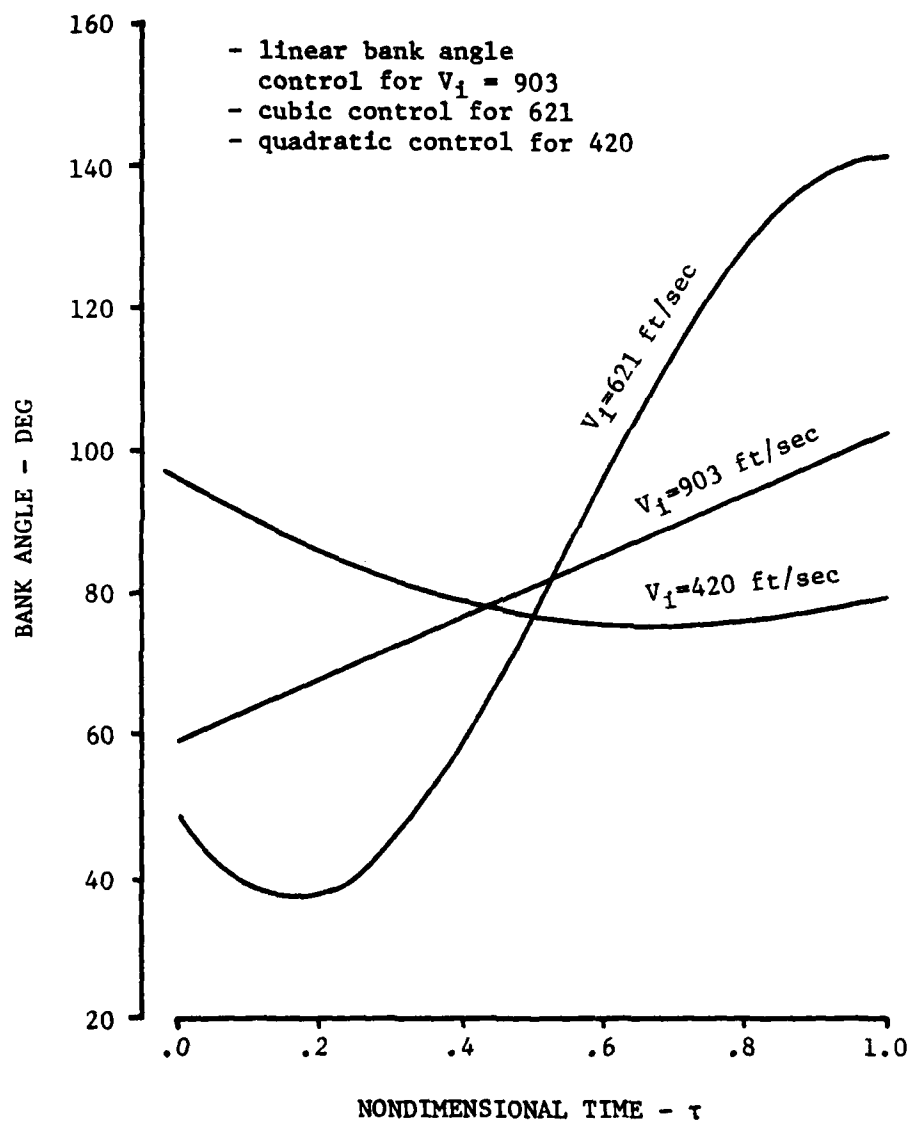


Fig. 11. Bank Angle Time History for Nominal Aircraft

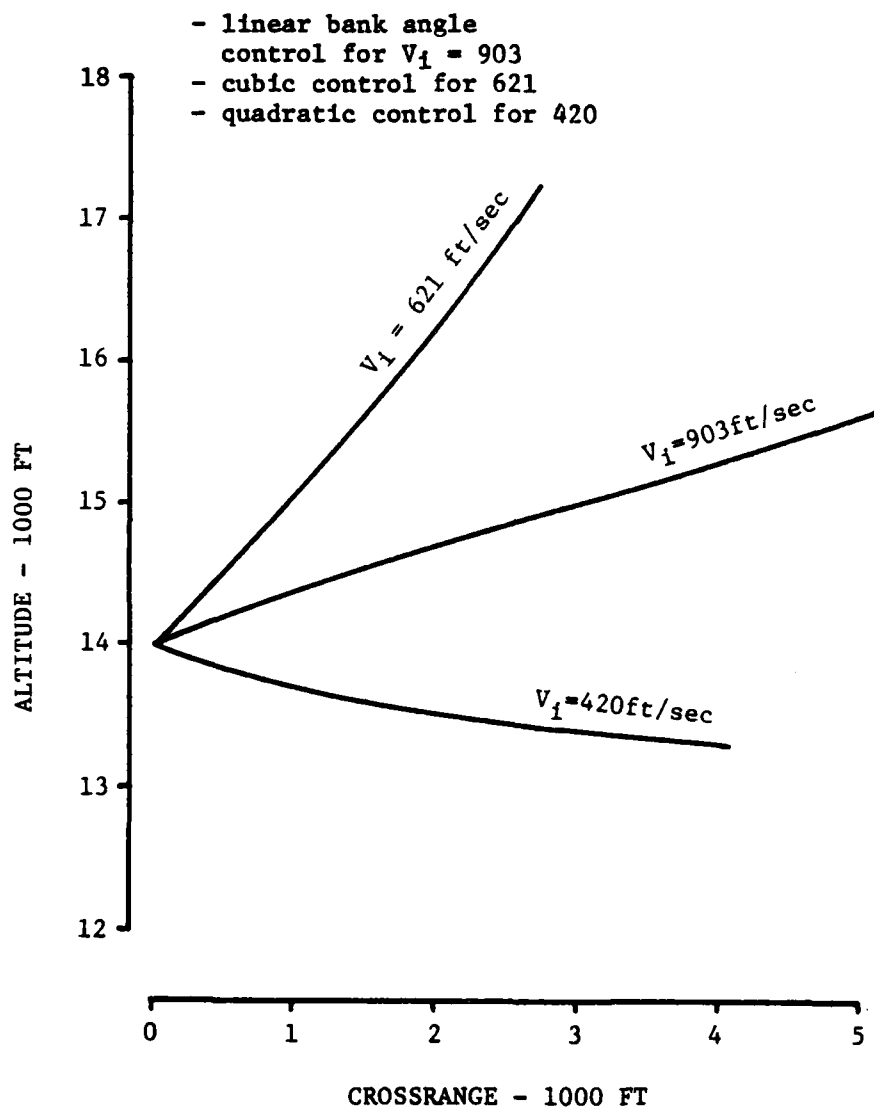


Fig. 12. Altitude vs. Crossrange Trajectory for Nominal Aircraft

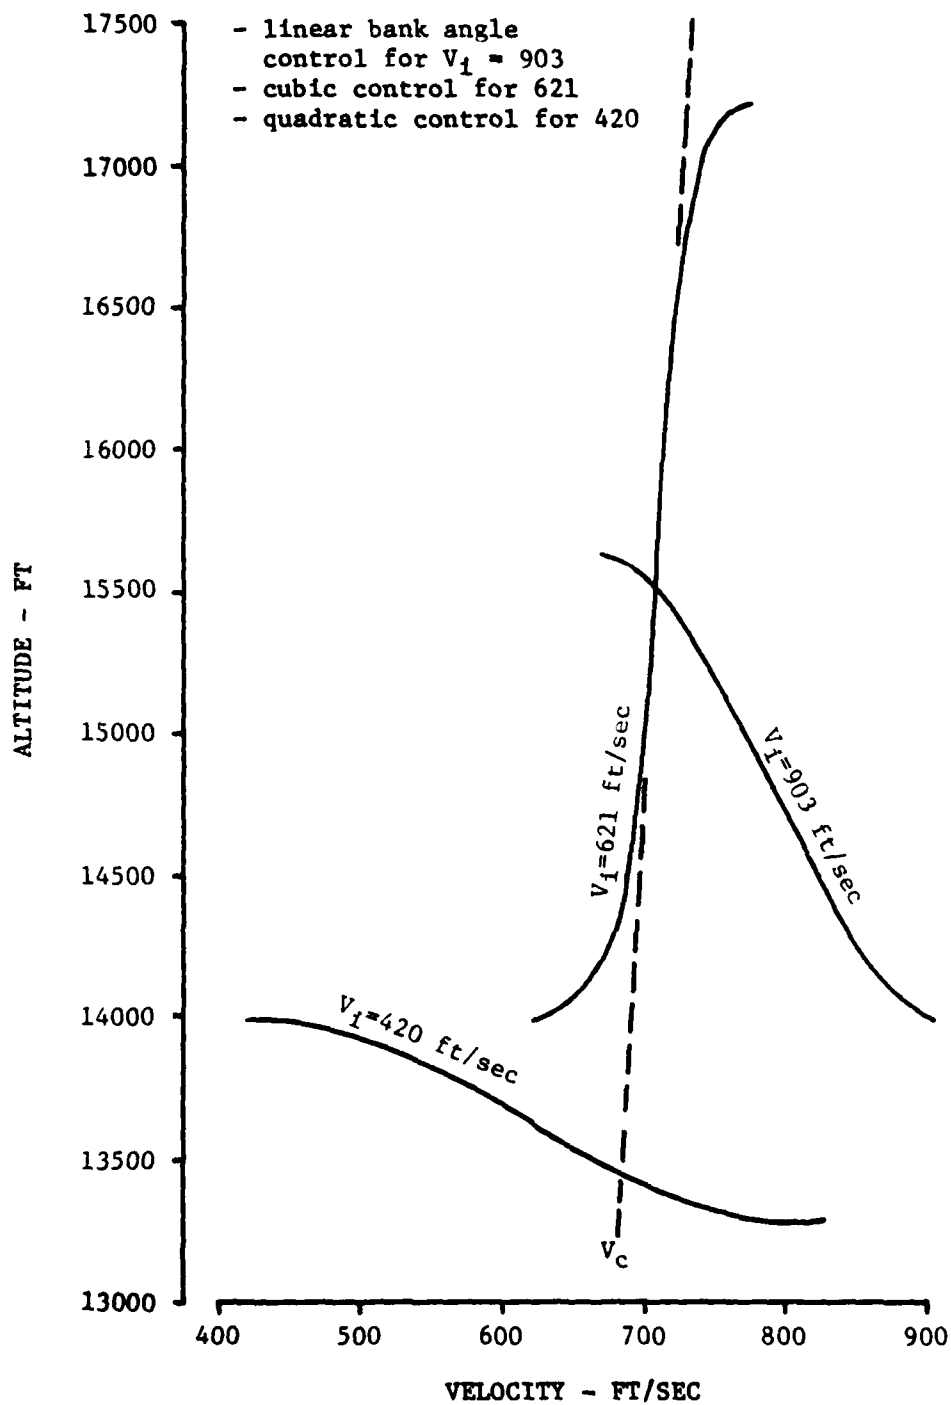


Fig. 13. Altitude vs. Velocity Trajectory for Nominal Aircraft

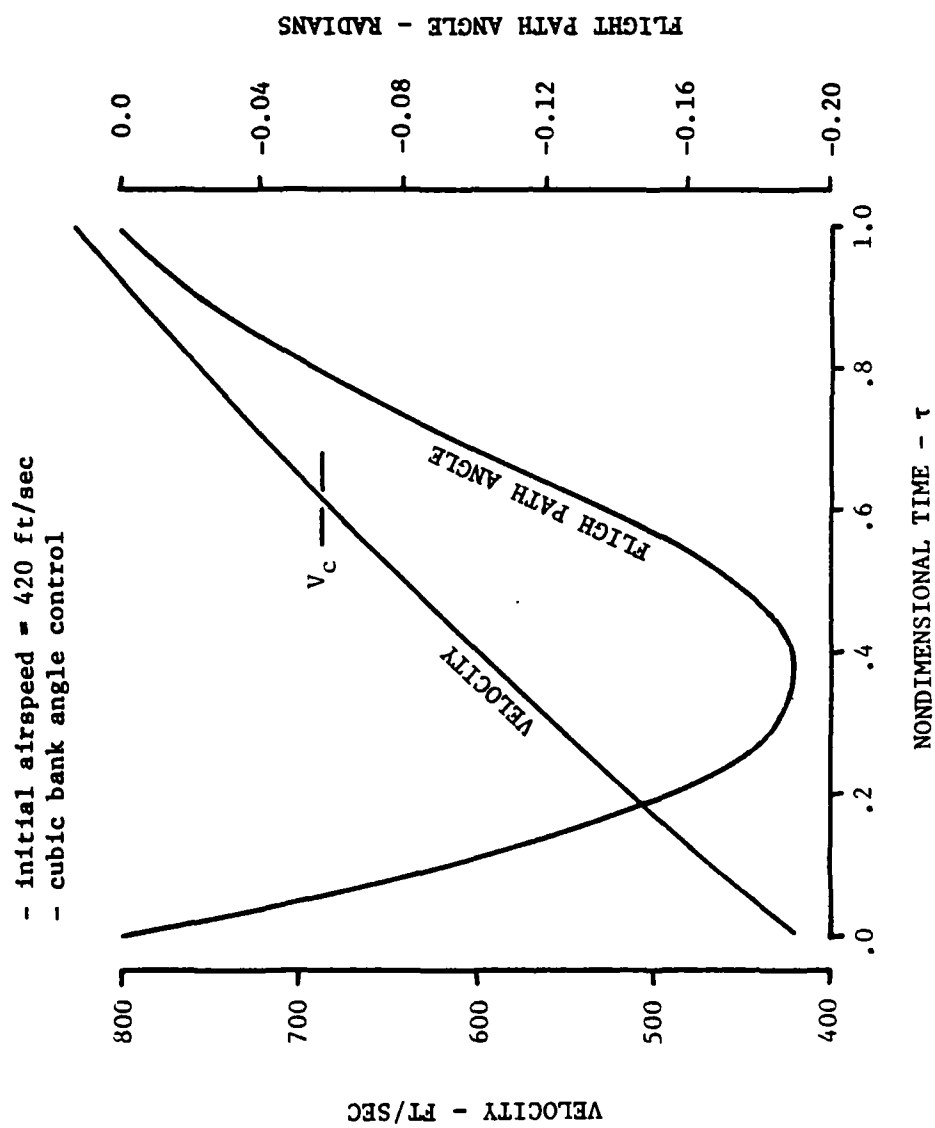


Fig. 14. Velocity and Flight Path Angle Time Histories

tion technique to use gravity more heavily and hence steepen the maneuver plane angle. The altitude/crossrange trajectory is shown in Figure 15. In comparison to the curves for the nominal aircraft in Figure 12, the turning planes are steeper. However, they still do not approach vertical for velocities within the scope of the aircraft model. Also note that changing the maximum thrust limit does not affect the high initial velocity case since the thrust is set to zero throughout the turn. One explanation for the weak effect thrust has on the turning plane can be seen Figure 16. This plot shows the drag to weight ratio of the aircraft for a given normal load factor as a function of velocity. The two horizontal lines at values of 1.5 and 0.75 represent the thrust available to counteract the drag. It is apparent that the nominal aircraft model requires very little thrust to maintain even its maximum load factor. Hence the aircraft tended to use its large excess thrust to attain corner velocity without much dependence on gravity.

A survey of similar aircraft was made to determine if the drag model was unrealistic. The drag polars in Figure 16 show the nominal model and a more realistic one derived from actual data. It is interesting to note the form drag or  $C_{D_0}$  is the same in both cases.

However, the drag due to lift coefficient,  $K_1$ , was increased by more than four times. This change greatly affected the drag curves of Figure 16 as shown in Figure 18. Again the bank angle time histories, vertical plan trajectories, and altitude/velocity trajectories are illustrated in Figures 19 through 21. Only the thrust to weight ratio of 1.5 was used with the new drag model.

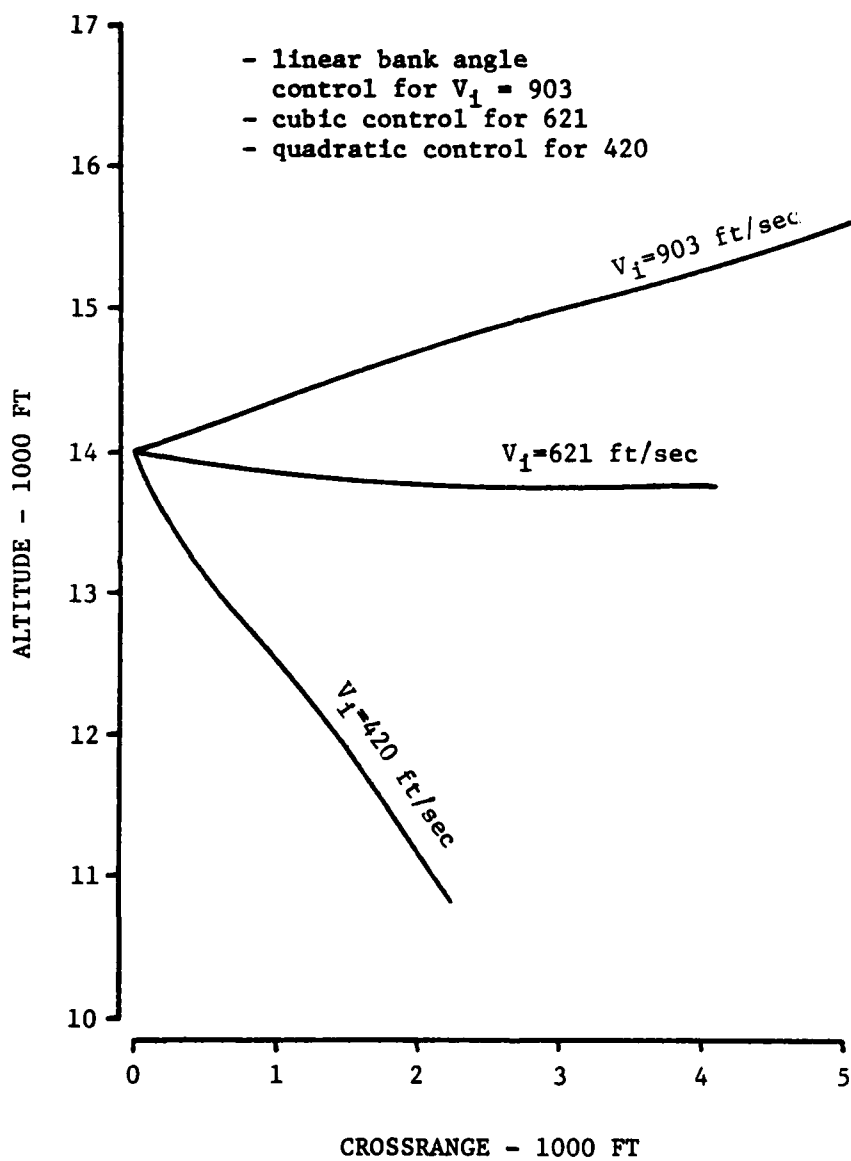


Fig. 15. Altitude vs. Crossrange Trajectories for  $T/W = .75$

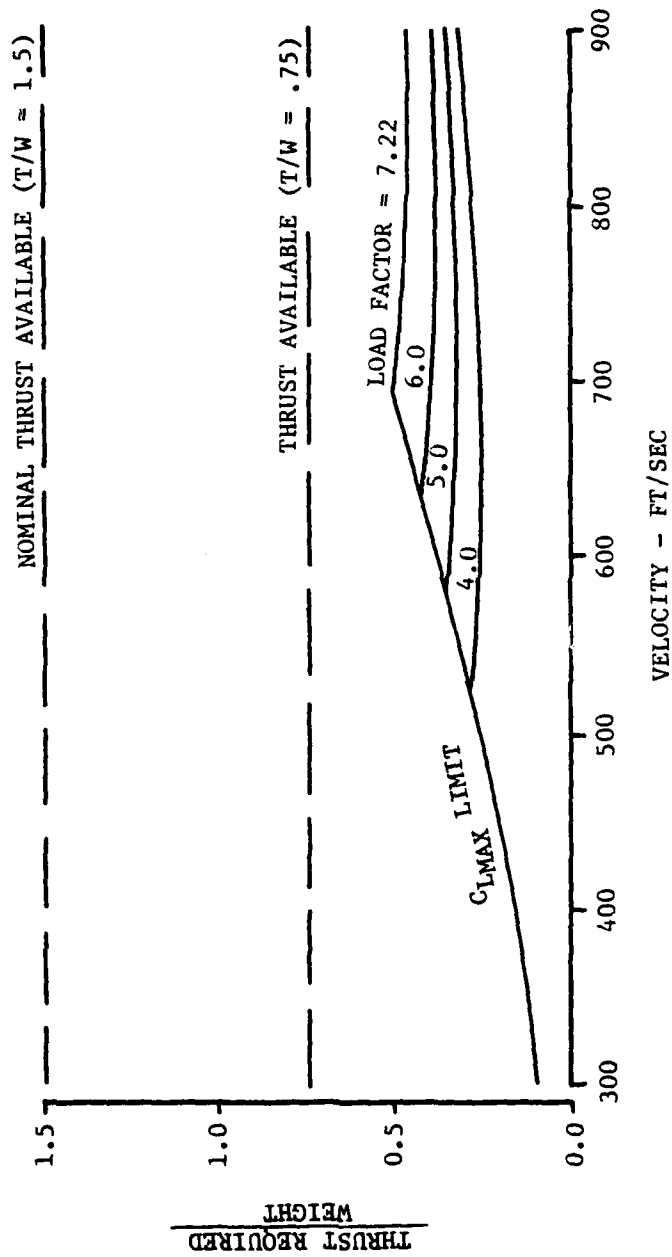


Fig. 16. Thrust Required/Available for Nominal Aircraft

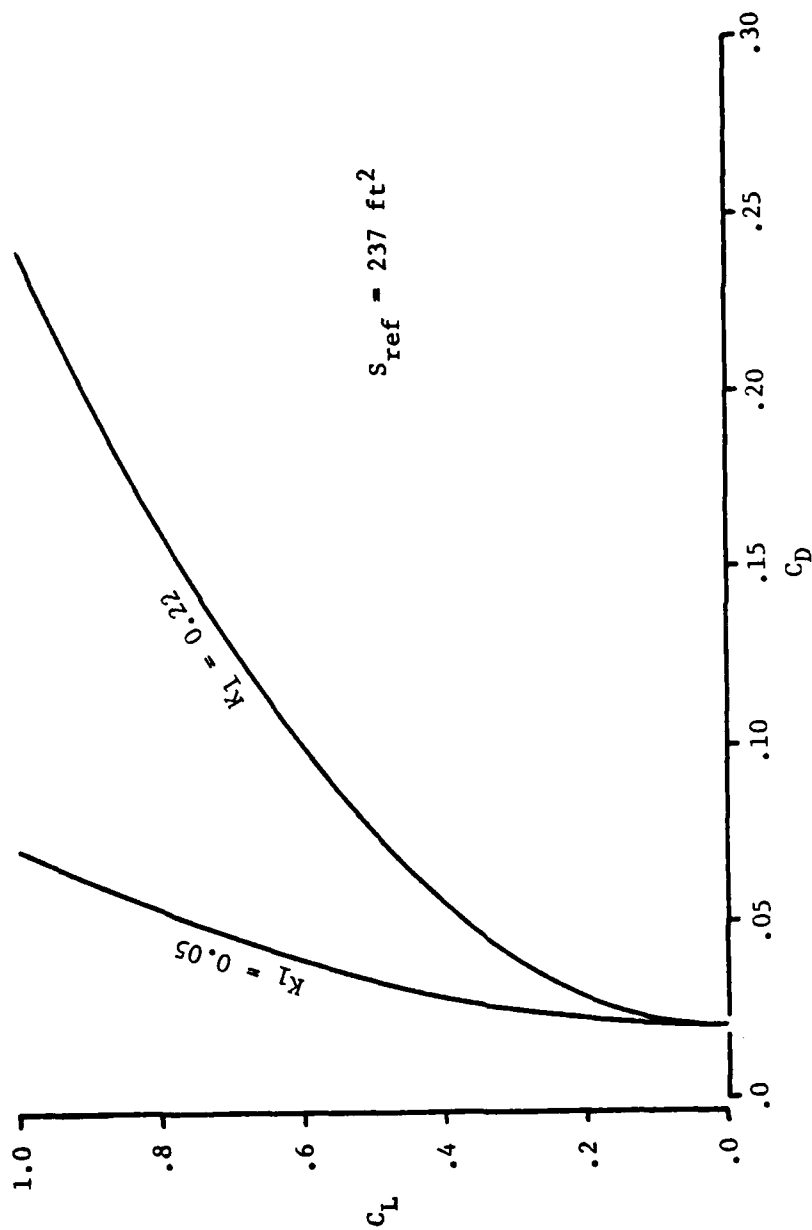


Fig. 17. Aircraft Drag Polars



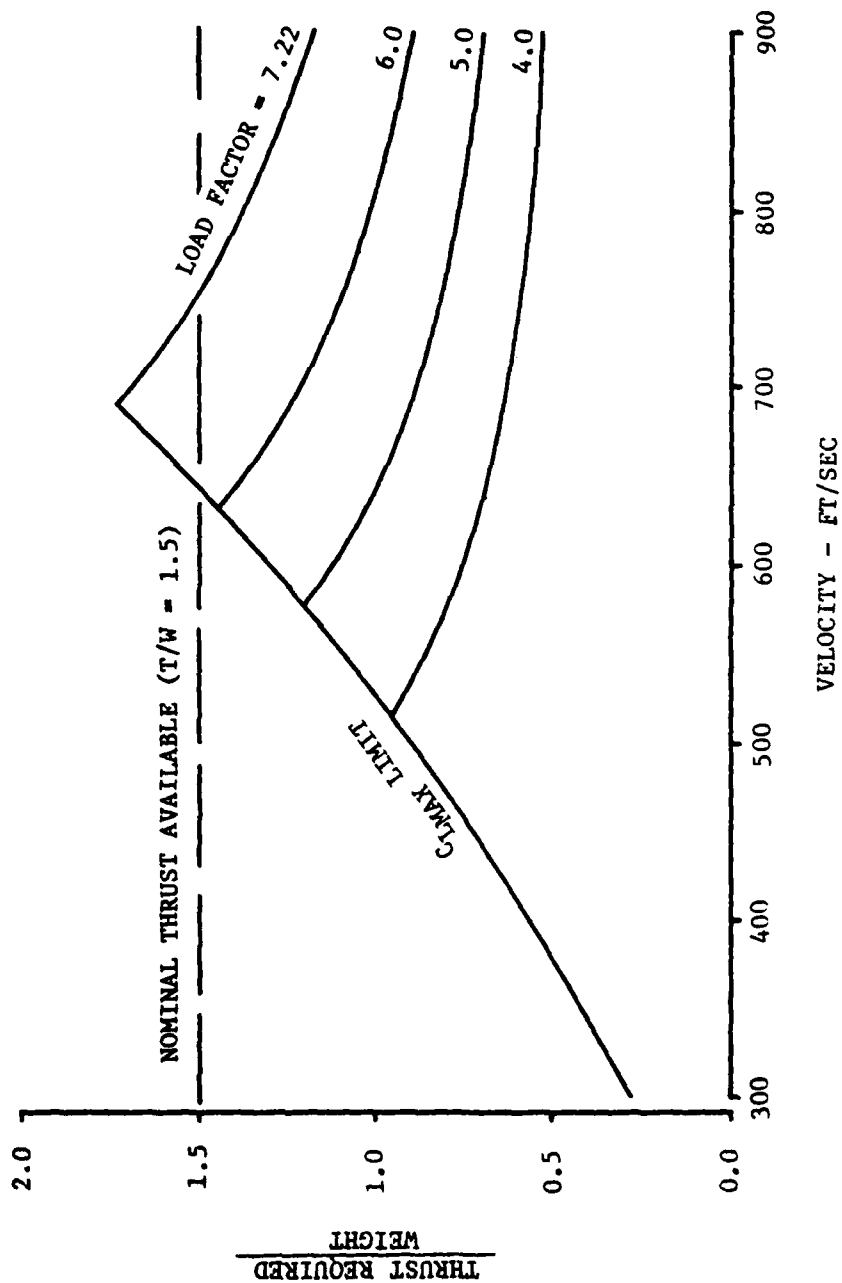


Fig. 18. Thrust Required/Available for  $K_1 = .22$

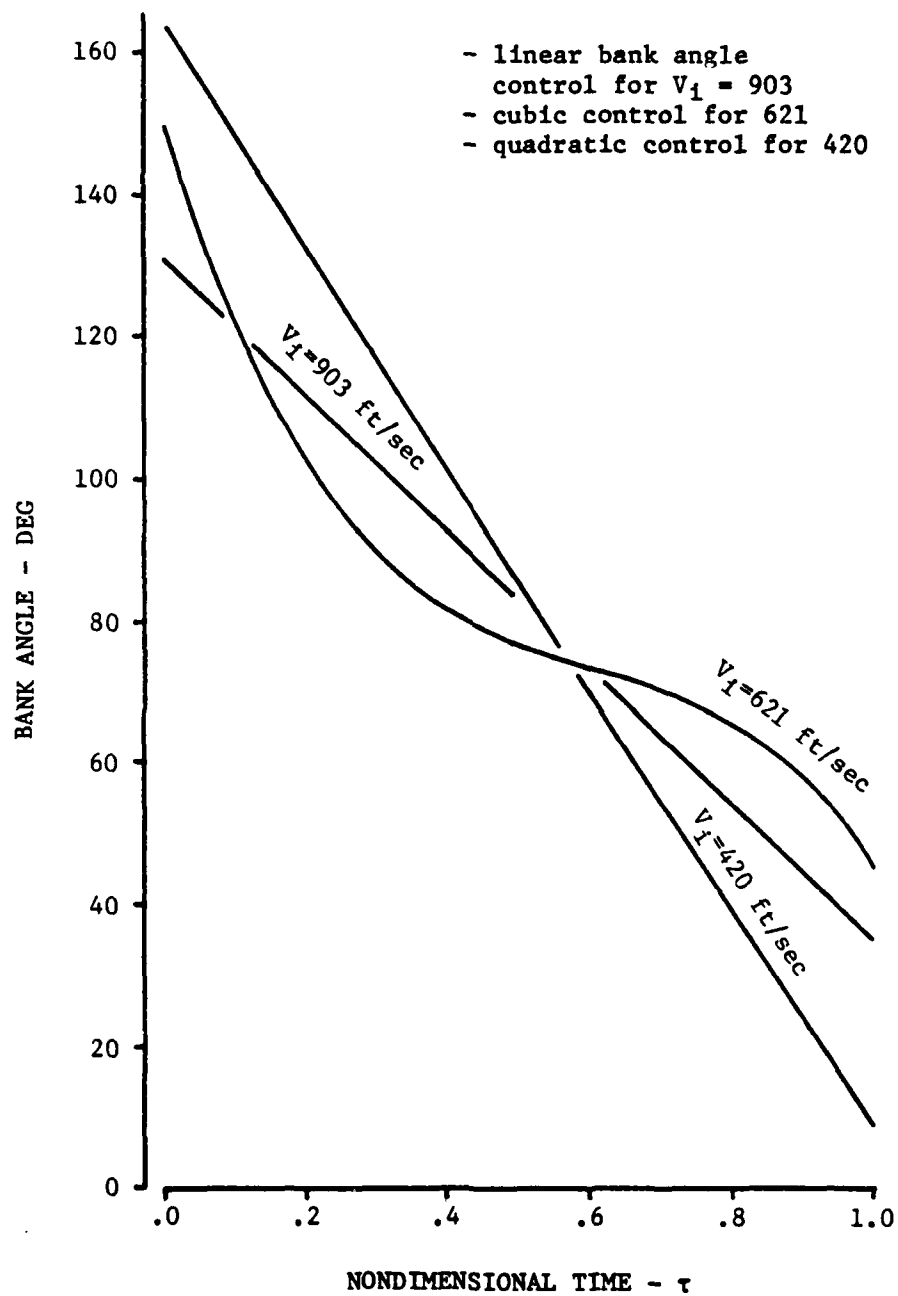


Fig. 19. Bank Angle Time History for  $K_1 = .22$

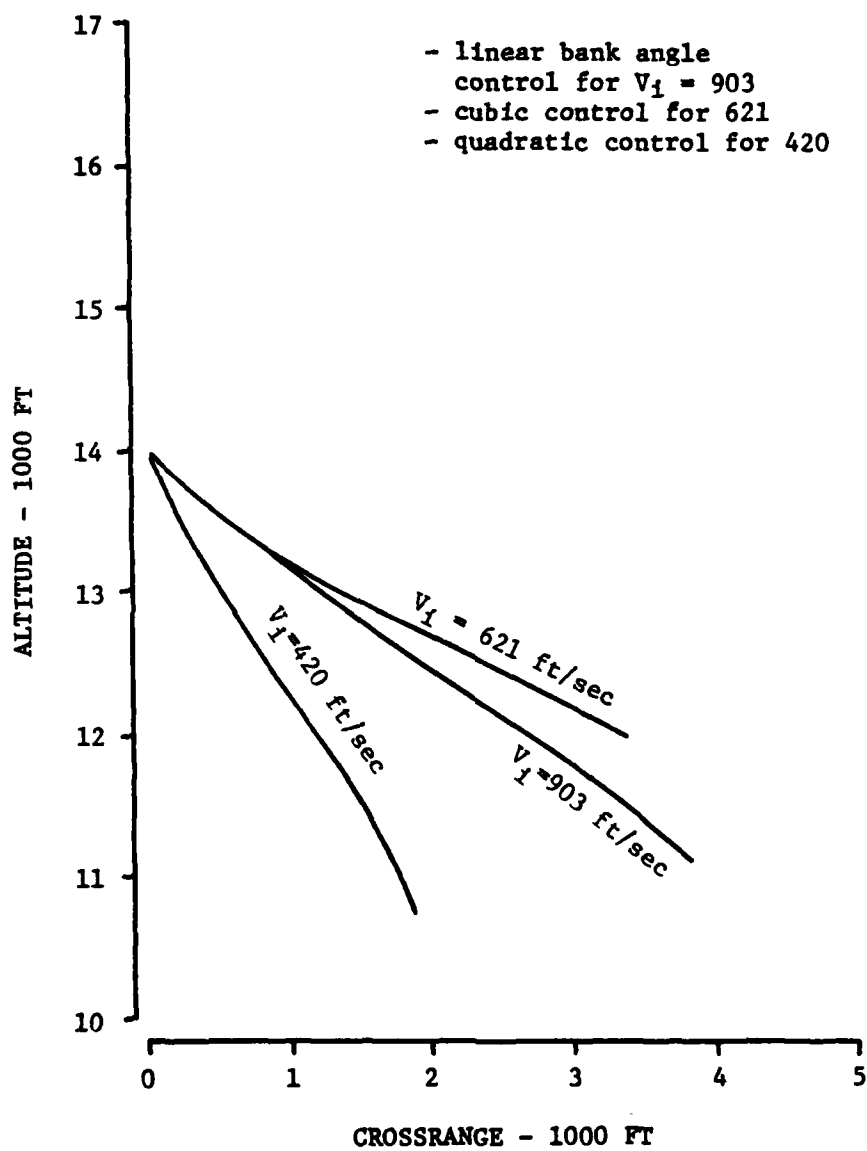


Fig. 20. Altitude vs. Crossrange Trajectory for  $K_1 = .22$

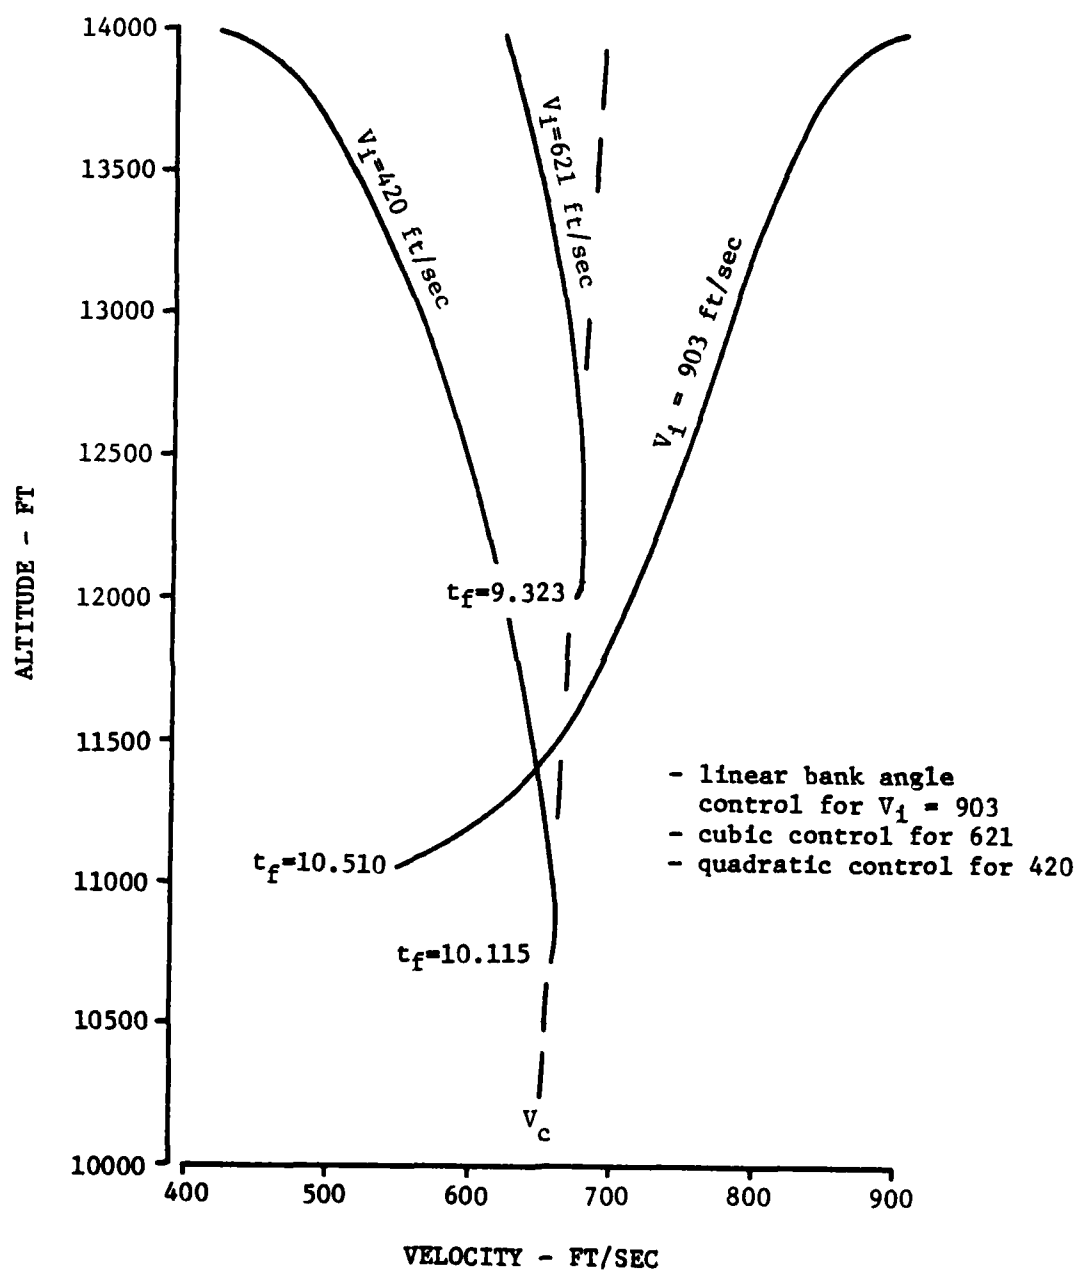


Fig. 21. Altitude vs. Velocity Trajectory for  $K_1 = .22$

But Figure 20 shows that the turning plane is steeper for the low speed case and a vertical optimum turning plane is possible for a slightly slower initial airspeed. For the high speed case, the drag actually helps slow the aircraft and hence reduces the plane angle. Therefore, for the optimum maneuver to be a half-loop, the initial airspeed must be far beyond the upper bound of this study.

## VII Conclusions and Recommendations

The conclusions on the benefits of using direct sideforce to reduce turning time based on the results of the previous chapter are:

1. The use of direct sideforce reduces the turning time from 1% to 3%.
2. The further the initial airspeed is from the corner velocity, the more the turning time is reduced.
3. In all cases considered, the optimal use of sideforce to minimize time is to use maximum sideforce for the full duration of the maneuver.
4. The additional energy gained or lost due to the use of sideforce depends on the initial conditions of the maneuvers as well as the characteristics of the aircraft.

From these conclusions it appears the use of direct sideforce is an effective way of reducing the turning time; however, the reduction is not large for the conditions studied here. But, under certain circumstances the reduction in turning time is accompanied by a loss in energy, therefore, judgement would have to be exercised by the pilot as to whether the energy loss could be tolerated.

The secondary effort of attempting to match the results of Well and Berger (2) was moderately successful. It appears the trends are the same in that turns initiated below the corner velocity tended to use gravity to accelerate to  $V_c$  and those initiated above the corner velocity tended to do the opposite. However, for the cases and aircraft parameters considered here, no threshold velocities for vertical turning planes could be found.

An aircraft's velocity vector can only be turned by an acceleration component normal to the flight path. A normal force component, therefore, is necessary. And, the larger this force, the less time it requires to perform a turn. There are two ways to increase this normal force. The first is through the use of speed control. This technique accelerates the aircraft as quickly as possible to the airspeed which maximizes the normal force of lift. An example is the use of reversible thrust by Johnson (4). Although the thrust does not directly aid in turning the aircraft, it accelerates or decelerates the aircraft to the velocity which maximizes lift, thereby minimizing turning time. The second way of increasing the normal force is by applying an additional force generator such as sideforce fins or vectored thrust. This technique can directly increase the resultant normal force over a wide range of velocities. This conclusion is supported by Figure 3 where the final turning time is reduced nearly uniformly over a wide initial velocity band.

It is recommended that the minimum time to turn problem be considered for an aircraft which incorporates both forms of control. The longitudinal acceleration could take the form of reversible thrust or aerodynamic fins which could be symmetrically deployed. The normal acceleration could be augmented by either a vectorable nozzle for direct lift from the engine or by aerodynamic sideforce surfaces.

Appendix A: Data Tables



$V_{initial}$		420 ft/sec		621 ft/sec		903 ft/sec	
		WITHOUT SIDEFORCE	WITH SIDEFORCE	WITHOUT SIDEFORCE	WITH SIDEFORCE	WITHOUT SIDEFORCE	WITH SIDEFORCE
BANK ANGLE COEFFICIENTS	A						
	B <sub>1</sub>	1.4384	1.2570	1.5016	1.3336	1.4138	1.2830
	B <sub>2</sub>	-0.1455	-1.2798	1.0103	0.7728	0.3816	0.2166
	B <sub>3</sub>	0.0953	0.7114	0.1605	0.1012		
	B <sub>4</sub>			-0.2046	-0.0813		
THRUST COEFFICIENT	C <sub>1</sub>	1.0	1.0	1.0	0.9266	0.0	0.0
ANGLE OF ATTACK COEFFICIENT	D <sub>1</sub>		0.2 FOR $V \leq V_c$ , $\alpha = (62287/\sigma V^2)$ FOR $V > V_c$				
SIDEFORCE COEFFICIENT	E <sub>1</sub>		-1.0		-1.0		-1.0
SPECIFIC ENERGY GAINED DURING MANEUVER	E <sub>s</sub>	7155 ft	6711 ft	6606 ft	5530 ft	-4009 ft	-4473 ft
LAGRANGE MULTIPLIERS	v <sub>1</sub>	-0.7648	-0.9305	2.1213	1.6692	0.3745	0.2634
	v <sub>2</sub>	-3.4781	-3.3762	-1.9620	-2.4437	-3.1798	-3.1052
FINAL TIME	t <sub>f</sub>	10.5694	10.3565	9.5637	9.4684	10.8261	10.6825

$V_{initial}$		420 ft/sec		621 ft/sec		903 ft/sec	
		0.75	1.5	0.75	1.5	0.75	1.5
$[T/W]_{max}$							
$K_1$		0.05	0.22	0.05	0.22	0.05	0.22
BANK ANGLE COEFFICIENTS	$B_1$	1.5300	1.5050	1.4645	1.5132	1.4138	1.4526
	$B_2$	-1.2378	-1.3545	-0.0683	-0.7572	0.3816	-0.8408
	$B_3$	0.0917	0.0045	0.1124	0.1795		
	$B_4$			-0.0222	-0.1406		
THRUST COEFFICIENT	$C_1$	1.0	1.0	1.0	1.0	0.0	0.0
ANGLE OF ATTACK COEFFICIENT	$D_1$		0.2 FOR $V < V_c$	$V_c$ ; $\alpha = (62287/\sigma V^2)$ FOR $V > V_c$			
LAGRANGE MULTIPLIERS	$v_1$	-2.9311	-2.9296	-0.3310	-0.9924	0.3745	-3.0546
	$v_2$	-1.9365	-1.5034	-3.0410	-3.0237	-3.1789	-2.6690
FINAL TIME	$t_f$	10.5748	10.1153	9.6101	9.3231	10.8261	10.5100

Appendix B: Program Listing

```

1      PROGRAM SUBOPT(INPUT,OUTPUT)
      DIMENSION A(22),AA(22),DA(22),GA(22),M(2),MA(2,22),MAAI(22,22),
      1MAA2(22,22),X(6),XX(6),XP(6),XP1(6),XP2(6),XP3(6),XP4(6),
      2DEL(22),MAMAT(2,2),MAMATI(2,2),MAGAT(2),FAT(22),FAA(22,22),
      3FAAI(22,22),MAFAAI(2,2),B(2,2),BI(2,2),C(2),D(22),PNU(2),
      4DPNU(2),PNUMA(22),TOT(5),Z(7),E(22),FA(22),FFAA(22,22),
      5FFAAI(22,22),II(7)
      COMMON/MISC/NPH,NPI,NA,NS,IF,DT,N,S,LL,NN,PP,QQ,AA,TOT
      COMMON/MISC1/BA,PI,SIG,ALF
      REAL M,M1,M2,M3,M4,M5,M6,M7,MM6,MM7,MM8,MA,MAA1
      REAL MAA2,MAMAI,MAMATI,MAGAT,MAFAAI,NUKMA,NORMA,NORMP

C
C  PROGRAM SUBOPT IS A SUBOPTIMAL CONTROL TECHNIQUE USED TO FIND AN
C  APPROXIMATE SOLUTION TO AN OPTIMAL CONTROL PROBLEM.  THE SOLUTION TO
15  C  MOST OPTIMAL CONTROL PROBLEMS IF THE CONTROLS CANNOT BE SOLVED
C  ANALYTICALLY IS TO GUESS THE CONTROLS AND THE LAGRANGE MULTIPLIERS
C  AND SEE IF END CONDITIONS ARE MET AND THE PERFORMANCE INDEX MINIMIZED
C  THE SUBOPTIMAL CONTROL TECHNIQUE ASSUMES THE CONTROLS ARE A LINEAR
C  COMBINATION OF POLYNOMIALS WITH UNKNOWN COEFFICIENTS.  IN SO DOING
20  C  THE PROBLEM IS CHANGED FROM A FUNCTIONAL MINIMIZATION PROBLEM TO A
C  PARAMETER OPTIMIZATION PROBLEM.
C
C
C  A  = MATRIX OF PARAMETERS (FINAL T,PHI COEF,PI COEF,ALPHA COEF)
25  C  DA = MATRIX OF PARAMETER CHANGES (NP X 1)
C  NE = NUMBER OF DIFFERENTIAL CONSTRAINTS (STATE EQUATIONS)
C  NPH = NUMBER OF PHI COEFFICIENTS
C  NA  = NUMBER OF ALPHA COEFFICIENTS
C  NPI = NUMBER OF PI COEFFICIENTS
30  C  NS = NUMBER OF SIDE FORCE COEFFICIENTS
C  NP  = TOTAL NUMBER OF PARAMETERS (1+NPH+NPI+NA+NS)
C  NC  = NUMBER OF END CONDITIONS TO BE SATISFIED
C  P   = SCALING FACTOR FOR PERFORMANCE INDEX
C  U   = SCALING FACTOR FOR END CONDITION CONSTRAINTS (M)
35  C  G  = SCALAR PERFORMANCE INDEX
C  GA  = PARTIAL DERIVATIVES OF G WRT A'S (1 X NP)

```

	C	M	= MATRIX OF PRESCRIBED FINAL CONDITIONS (NC X 1)
	C	MA	= PARTIAL DERIVATIVES OF M WRT A'S (NC X NP)
	C	MAA	= SECOND PARTIAL DERIVATIVES OF M WRT A'S (2 - NP X NP)
40	C	X	= STATE VARIABLES (X,Y,H,VEL,THETA,PSI)
	C	UX	= DERIVATIVE OF STATE VARIABLES WRT (T/TF)
	C	F	= AUGMENTED PERFORMANCE INDEX (G + PNU*M)
	C	FA	= PARTIAL DERIVATIVE OF F WRT A'S (1 X NP)
	C	FAT	= PARTIAL DERIVATIVES OF F WRT A'S TRANSPOSED (NP X 1)
45	C	FAA	= SECOND PARTIAL DERIVATIVE OF F WRT A'S (NP X NP)
	C	PNU	= LAGRANGE MULTIPLIERS (NC X 1)
	C	OPNU	= CHANGE IN LAGRANGE MULTIPLIERS (NC X 1)
	C		
	C		
50	C		PARAMETERS, INITIAL CONDITIONS AND GUESSES
	C		
		NE=6	
		N=NE	
		X(1)=X(2)=X(5)=X(6)=0.0	X(3)=13990.0
55		NPH=3	X(4)=420.0
		NPI=1	
		NA=1	
		NS=0	
		NP=NPH+NPI+NA+NS+1	
60		NC=2	
		FGNORM=10.0	
		FMGRMA=10.0	
		ITER=0	
		MAX=15	
65		DELTA=1.0E-4	
		CC1=1.0E-4	
		CC2=1.0E-2	
		CC3=1.0E-8	
		CC4=1.0E-4	
70		CC5=1.0E-4	
		P=1.0	
		P=.1	

```

U=1.0
V=1.0
70 C INITIAL GUESSES
C FINAL TIME COEFFICIENTS
A(1)=10.12004417
BA COEFFICIENTS
A(2)=1.506341517
A(3)=-1.437617675
A(4)=-.003685144245
C THRUST COEFFICIENTS
A(5)=1.0
C ALPHA COEFFICIENTS
A(6)=0.2
PNU(1)=-2.825251987-.1992591
PNU(2)=-1.363341708-.06010897
DPNU(1)=DPNU(2)=0.0
50 FORMAT(5X,"PNU'S ",4E17.10)
51 FORMAT(1X,"A MATRIX ",7E17.10)
52 FORMAT(1X,5E15.7)
53 FORMAT(100X,"NORM OF M'S",E15.7)
54 FORMAT(1X,"FA MATRIX ",8E15.7)
C....NOTE NC=2 HERE.....
55 FORMAT(5X,"DPNU'S ",2E15.7,10X,"NORM OF DPNU'S ",E15.7)
56 FORMAT(1X,"DA MATRIX ",8E15.7)
57 FORMAT(100X,"NORM OF DA'S ",E15.7)
C
100 C DETERMINING N MATRIX BY INTEGRATING DIFFERENTIAL CONSTRAINTS
C
DO 1 I=1,NP
DA(I)=0.0
1000 DO 2 J=1,NP
A(I)=A(I)+DA(J)
2 AA(I)=A(I)
ITRAT=0
PRINT*, " "
PRINF*, "ITERATION NUMBER ", ITRAT, " P= ", P, " DELTA= ", DELTA

```

```

110      PRINT*, " "
        DO 3 I=1,NE
          XX(I)=X(I)
          S=1.0
          N3=1
          N4=1
          N5=1
115      LL=0
          OT=.01
          T=0.0
          TF=1.0
          CALL RK45(T,XX)
          M(1)=XX(5)-1.0E-10
          M(2)=XX(6)-3.141592654
          ITER=ITER+1
          PRINT*, " "
          PRINT 51,(A(I),I=1,NP)
          PKINF*, " "
          DO 4 I=1,NC
            PNU(I)=PNU(I)+OPNU(I)
125      4      PRINT*, "M(",I,")= ",M(I)
          NORMM=0.0
          DO 5 I=1,NC
            NORMM=NORMM+M(I)**2
130      5      NORMM=SQRT(NORMM)
          PRINT*, " "
          PRINT 53,NORMM
135      C
          C DETERMINING MA AND MAA BY CENTRAL DIFFERENCES
          C
          S=0.0
          DO 100 I=1,NP
            DO 6 J=1,NP
140      6      AA(J)=A(J)
              DEL(I)=DELTA*A(I)
              IF (ABS(DEL(I)).LE.DELTA) DEL(I)=DELTA
              AA(I)=A(I)+DEL(I)
145

```

DO 7 J=1,NE  
XP(J)=X(J)

LL=0  
DT=.01

T=0.0  
TF=1.0

CALL RK45(T,XP)  
M1=XP(5)-1.0E-10  
M2=XP(6)-3.141592654  
AA(1)=A(1)-DEL(1)

DO 6 J=1,NE  
XP(J)=X(J)

LL=0  
DT=.01

T=0.0  
TF=1.0

CALL RK45(T,XP)  
M3=XP(5)-1.0E-10  
M4=XP(6)-3.141592654  
MA(1,1)=(M1-M3)/(2.0\*DEL(1))  
MA(2,1)=(M2-M4)/(2.0\*DEL(1))

DO 100 K=1,I  
IF(K.EQ.I) GO TO 707  
DO 9 J=1,NP

AA(J)=A(J)  
AA(I)=A(I)+DEL(I)  
DEL(K)=DELTA\*VA(K)

IF(ABS(DEL(K)).LE.DELTA) DEL(K)=DELTA  
AA(K)=A(K)+DEL(K)

DO 10 J=1,NE  
XP1(J)=X1(J)

LL=0  
DT=.01

T=0.0  
TF=1.0



185	11	CALL RK45(I,XP1) MM1=XP1(5)-1.0E-10 MM2=XP1(6)-3.141592654 DO 11 J=1,NP AA(J)=A(J) AA(I)=A(I)+DEL(I) AA(K)=A(K)-DEL(K) DO 12 J=1,NE XP2(J)=X(J) LL=0 DT=.01 T=0.0 TF=1.0 CALL RK45(I,XP2) MM3=(XP2(5)-1.0E-10) MM4=XP2(6)-3.141592654 DO 13 J=1,NP AA(J)=A(J) AA(I)=A(I)-DEL(I) AA(K)=A(K)+DEL(K) DO 14 J=1,NE XP3(J)=X(J) LL=0 DT=.01 T=0.0 TF=1.0 CALL RK45(I,XP3) MM5=XP3(5)-1.0E-10 MM6=XP3(6)-3.141592654 DO 15 J=1,NP AA(J)=A(J) AA(I)=A(I)-DEL(I) AA(K)=A(K)-DEL(K) DO 16 J=1,NE XP4(J)=X(J) LL=0
190	12	
195	13	
200	14	
205	15	
210	16	
215		

```

DT=.01
I=0.0
TF=1.0
220 CALL RK45(T,XP4)
MM7=XP4(5)-1.0E-10
MM8=XP4(6)-3.141592654
MAA1(I,K)=MAA1(K,I)=(MM1-MM3-MM5+MM7)/(4.0*DEL(I)*DEL(K))
MAA2(I,K)=MAA2(K,I)=(MM2-MM4-MM6+MM8)/(4.0*DEL(I)*DEL(K))
225 GO TO 100
707 MAA1(I,I)=(M1-2.0*M(1)+M3)/(DEL(I)**2)
MAA2(I,I)=(M2-2.0*M(2)+M4)/(DEL(I)**2)
100 CONTINUE
C
230 C DETERMINING GA
C
GA(I)=1.0
DO 17 I=2,NP
17 GA(I)=0.0
C
235 C CALCULATING DPNU AND DA (SECOND ORDER TECH)
C
747 DO 24 I=1,NP
DO 24 J=1,NP
240 FAA(I,J)=PNU(1)*MAA1(I,J)+PNU(2)*MAA2(I,J)
ITRAT=ITRAT+1
IF(ITRAT*GE.MAX) PRINT*, "ITERATIONS ", ITRAT
IF(ITRAT*GE.MAX) GO TO 757
DO 22 I=1,NP
245 PNUMA(I)=0.0
DO 23 J=1,NC
23 PNUMA(I)=PNUMA(I)+PNU(J)*MA(J,I)
22 FAT(I)=GA(I)+PNUMA(I)
PRINT*, "
PRINT 54,(FAT(I),I=1,NP)
250 C*****TAKE OUT EFFECTS OF CONTROLS OUTSIDE OF LIMITS*****

```

C\*\*\*\*\*AND SHRINK MATRICES\*\*\*\*\*

IF(N4.EQ.1.AND.FAT(1+NPH+NPI).LE.0.0) N3=0  
 IF(NN.EQ.-1.AND.FAT(1+NPH+NPI).GT.0.0) N3=0  
 IF(PP.EQ.1.0.AND.FAT(1+NPH+NPI+NA).LE.0.0) N4=0  
 IF(QQ.EQ.1.0.AND.FAT(NP).LE.0.0) N5=0  
 IF(UU.EQ.-1.0.AND.FAT(NP).GE.0.0) N5=0

NI=NP

IF(N3.NE.0) GO TO 62

NP=NP-NPI

IT=2+NPH

DO 61 I=IT,NP

FAT(I)=FAT(I+NPI)

DO 60 J=1,NC

MA(J,I)=MA(J,(I+NPI))

DO 61 J=IT,NP

DO 61 K=1,NI

FAA(I,K)=FAA((I+NPI),K)

FAA(K,I)=FAA(K,(I+NPI))

FAA(I,J)=FAA((I+NPI),(J+NPI))

IF(N4.NE.0) GO TO 65

NP=NP-NA

IT=2+NPH+NPI

DO 64 I=IT,NP

FAT(I)=FAT(I+NA)

DO 63 J=1,NC

MA(J,I)=MA(J,(I+NA))

DO 64 J=IT,NP

DO 64 K=1,NI

FAA(I,K)=FAA((I+NA),K)

FAA(K,I)=FAA(K,(I+NA))

FAA(I,J)=FAA((I+NA),(J+NA))

IF(N5.NE.0) GO TO 66

NP=NP-NS

CONTINUE

255

260

265

270

275

280

285

	58	DO 58 I=1,NP
		DO 58 J=1,NP
	58	FFAAI(I,J)=FAAI(I,J)
290		CALL GAUSD(NP,1.0E-30,FFAA,FFAAI, JER,22)
		DO 48 I=1,NP
	48	DO 48 J=1,NP
		FAAI(I,J)=0.0
		DO 49 I=1,NP
		DO 49 J=1,NP
295	49	FAAI(I,J)=FFAAI(I,J)
		DO 25 I=1,NC
		DO 25 J=1,NP
		MAFAAI(I,J)=0.0
		DO 25 K=1,NP
300	25	MAFAAI(I,J)=MAFAAI(I,J)+MA(I,K)*FAAI(K,J)
		DO 26 I=1,NC
		DO 26 J=1,NC
		BI(I,J)=0.0
		DO 26 K=1,NP
305	26	B(I,J)=B(I,J)+MAFAAI(I,K)*MA(J,K)
		CALL GAUSD(NC,1.0E-30,B,BI,KER,NC)
		DO 27 I=1,NC
		C(I)=0.0
		DO 27 J=1,NP
310	27	C(I)=C(I)+MAFAAI(I,J)*FAT(J)
		DO 28 I=1,NC
		DPNU(I)=0.0
		DO 28 J=1,NC
315	28	DPNU(I)=DPNU(I)+BI(I,J)*(-P*C(J)+U*M(J))
		DO 29 I=1,NP
		U(I)=0.0
		DO 29 J=1,NC
	29	U(I)=U(I)+MA(J,I)*DPNU(J)
		DO 30 I=1,NP
320		OA(I)=0.0

```

30      DO 30 J=1,NP
        DA(I)=DA(I)+FAAI(I,J)*(-P*FAT(J))-U(J))
C*****RE-EXPAND THE MATRICES*****
C*****INSERTING ZERUS APPROPRIATELY*****
325      IF(N3.NE.0) GO TO 69
        NP=NP+NPI
        IT=NA+NS
        DO 67 I=1,IT
          DA(NP+1-I)=DA(NP+1-I-NPI)
330      DO 67 J=1,NC
          MA(J,(NP+1-I))=MA(J,(NP+1-I-NPI))
        DO 68 I=1,NPI
          DA(1+I+NPH)=0.0
          DO 69 J=1,NC
            MA(J,(1+I+NPH))=0.0
335      IF(N4.NE.0) GO TO 72
        NP=NP+NA
        IF(NS.EQ.0) GO TO 75
        DO 70 I=1,NS
          DA(NP+1-I)=DA(NP+1-I-NA)
340      DO 70 J=1,NC
          MA(J,(NP+1-I))=MA(J,(NP+1-I-NA))
        DO 71 I=1,NA
          DA(1+I+NPH+NPI)=0.0
          DO 71 J=1,NC
            MA(J,(1+I+NPH+NPI))=0.0
345      IF(N5.NE.0) GO TO 74
        DO 73 I=1,NS
          DA(1+NPH+NPI+NA+I)=0.0
          DO 73 J=1,NC
            MA(J,(1+NPH+NPI+NA+I))=0.0
350      NP=NI
        NORAP=0.0
        DO 31 I=1,NC
          NORMP=NORMP+DPNU(I)*2
355

```

```

NORMP=SQRT(NORMP)
PRINT*, " "
PRINT 50, (PNU(I), I=1, NC)
PRINT*, " "
PRINT 55, (DPNU(I), I=1, NC), NORMP
PRINT*, " "
PRINT 56, (OA(I), I=1, NP)
NORMA=0.0
DO 32 I=1, NP
  NORMA=NORMA+DA(I)**2
365  NORMA=SQRT(NORMA)
  DIF=(FNORMA-NORMA)/FNORMA
  FNORMA=NORMA
  PRINT*, " "
370  PRINT 57, NORMA
      C
      C CONVERGENCE CRITERIA
      C
      IF (NORMA.LT.0.3) GO TO 200
      IF (NORMA.LT.1.0E+3.AND.NORMA.GT.1.0E+2) P=P+1.0E-4
      IF (NORMA.LT.1.0E+2.AND.NORMA.GT.1.0E+1) P=P+1.0E-3
      IF (NORMA.LT.1.0E+1.AND.NORMA.GT.1.0E+0) P=P+1.0E-2
      IF (NORMA.LT.1.0E+0.AND.NORMA.GT.1.0E-1) P=P+1.0E-1
      GO TO 747
380  200  IF (NORMA.LE.CC3.AND.NORMA.LE.CC4.AND.P.EQ.1.0) GO TO 201
      P=P+1.0E+2
      IF (P.GT.1.0) P=1.0
      GO TO 1000
201  PRINT*, " "
385  PRINT*, "CONVERGENCE# PERFORMANCE INDEX= ", A(1), " P= ", P
757  STOP
      END

```

```

1  SUBROUTINE GAUSS(M, EPS, B, C, KER, LAY)
   DIMENSION B(LAY, LAY), C(LAY, LAY), A(20, 20), X(20, 20)
   DOUBLE PRECISION Z, A, X, S, RATIO, EP
   DOUBLE PRECISION Z, A, X, S, RATIO, EP
   EP = EPS
   N = M
   DO 100 J = 1, N
   DO 100 K = 1, N
   100 A(J, K) = B(J, K)
   DO 1 I = 1, N
   DO 1 J = 1, N
   1 X(I, J) = 0.0
   DO 2 K = 1, N
   2 X(K, K) = 1.0
   15 10 DO 34 L = 1, N
      KP = 0
      Z = 0.0
      DO 12 K = L, N
      IF (Z - DABS(A(K, L))) 11, 12, 12
   20 11 Z = DABS(A(K, L))
      KP = K
   12 CONTINUE
   13 DO 14 J = L, N
      Z = A(L, J)
      A(L, J) = A(KP, J)
   25 14 A(KP, J) = Z
      DO 15 J = 1, N
      Z = X(L, J)
      X(L, J) = X(KP, J)
   30 15 X(KP, J) = Z
   20 IF (DABS(A(L, L)) - EP) 50, 50, 30
   30 IF (L - N) 31, 34, 34
   31 LPI = L + 1
   DO 36 K = LPI, N
   35

```

```

        IF(A(K,L))32,36,32
32  RATIO=A(K,L)/A(L,L)
    DO 33 J=LPI,N
33  A(K,J)=A(K,J)-RATIO*A(L,J)
40  DO 35 J=1,N
35  X(K,J)=X(K,J)-RATIO*X(L,J)
36  CONTINUE
34  CONTINUE
40  DO 43 I=1,N
    II=N+1-I
    DO 43 J=1,N
        S = 0.0
        IF(II-II)41,43,43
41  IIP1=II+1
50  DO 42 K=IIP1,N
42  S=S+A(II,K)*X(K,J)
43  X(II,J)=(X(II,J)-S)/A(II,II)
        KER=1
    DO 200 J = 1,N
    DO 200 K = 1,N
200 C(J,K) = X(J,K)
    GO TO 75
50  KER=2
70  PRINT 71
71  FORMAT(IX,*MATRIX SINGULAR IN GAUSS*)
60 75  CONTINUE
    RETURN
    END

```



```

1 SUBROUTINE RK45(T,X)
C FIFTH-ORDER RUNGE-KUTTA INTEGRATION WITH STEPSIZE CONTROL
C FEMUR BONE COEFFICIENTS
DIMENSION ALPHA(6),B(6,5),CH(6),CO(6),AA(22),TDT(5)
DIMENSION X(6),XDUM(6),F1(6),F2(6),F3(6),F4(6),F5(6),F6(6)
COMMON/MISC/NPH,NPI,NA,NS,TF,DT,N,S,LL,NN,PP,QZ,AA,TOT
DATA (ALPHA(I),I=1,6)/
1000000000000000000008,1716400000000000000008,1716600000000000000008
2171773047304730473058,1720400000000000000008,1717400000000000000008
DATA (G(I),I=1,30)/
1000000000000000000008,1716400000000000000008,1714600000000000000008
1171770217434430454128,172140411366411366408,606132045732045732048
12*00000000000000000008,1716440900000000000008,605613441152757350268
16054377777777777778,1721400000000000000008,3*00000000000000000008
1172165104577100433308,172271306471306471308,605723622472137323628
14*000000000000000008,605213224553224553228,171671756011766011768
15*000000000000000008,606134631463146314638/
DATA (CH(I),I=1,6)/
1171474534726220074548,00000000000000000008,171741156112131524328
2171740310725254772448,606221727024365605078,171345171011236202258
DATA (CD(I),I=1,6)/
1607022372237223722368,00000000000000000008,171275243753314726738
2171273632235427765778,606527024365605075338,606432606766541575528
DATA ERP5,TOL,TOLT/1.E-12,1.E-09,1.E-10/
IP=1 $ IS=0 $ IR=0
25 IP=5
9 IF(ABS(DT).GE.ABS(TF-T)) DT = TF-T
10 DO 20 I=1,N
20 XDUM(I) = X(I)
CV=SQRT(311362.98/(1.0-.0000069*X(3)))**4.256)
DEL1=CV-X(4)
12 TS=T+ALPHA(1)*DT
CALL DERIVATS,X,F1)
IF(MOD(IS,IP).EQ.0.AND(S.EQ.1.0) PRINT 4,T,X
FORMAT(IX,ZE15.7)

```

30 CONTINUE

```

      B21 = B(2,1)*DT
      TS = T + ALPH(2)*DT
      DO 42 I=1,N
40      X(I) = B21*F1(I) + XDUM(I)
      CALL DERIV(TS,X,F2)
      B31 = B(3,1)*DT $ B32 = B(3,2)*DT
      TS = T + ALPH(3)*DT
      DO 43 I=1,N
45      X(I) = B31*F1(I) + B32*F2(I) + XDUM(I)
      CALL DERIV(TS,X,F3)
      B41 = B(4,1)*DT $ B42 = B(4,2)*DT $ B43 = B(4,3)*DT
      TS = T + ALPH(4)*DT
      DO 44 I=1,N
50      X(I) = B41*F1(I) + B42*F2(I) + B43*F3(I) + XDUM(I)
      CALL DERIV(TS,X,F4)
      B51 = B(5,1)*DT $ B52 = B(5,2)*DT $ B53 = B(5,3)*DT
      B54 = B(5,4)*DT
      TS = T + ALPH(5)*DT
      DO 45 I=1,N
55      X(I) = B51*F1(I) + B52*F2(I) + B53*F3(I) + B54*F4(I) + XDUM(I)
      CALL DERIV(TS,X,F5)
      B61 = B(6,1)*DT $ B62 = B(6,2)*DT $ B63 = B(6,3)*DT
      B64 = B(6,4)*DT $ B65 = B(6,5)*DT
      TS = T + ALPH(6)*DT
      DO 46 I=1,N
60      X(I) = B61*F1(I) + B62*F2(I) + B63*F3(I) + B64*F4(I) + B65*F5(I)
      CALL DERIV(TS,X,F6)
      C1 = CH(1)*DT $ C3 = CH(3)*DT
      C4 = CH(4)*DT $ C5 = CH(5)*DT $ C6 = CH(6)*DT
      DO 100 I=1,N
      XDUM(I) = XDUM(I) + C1*F1(I) + C3*F3(I) + C4*F4(I)
      XDUM(I) + C5*F5(I) + C6*F6(I)
100      XDUM(I) = XDUM(I) + C1*F1(I) + C3*F3(I) + C4*F4(I)
      C01 = C0(I)*DT $ C03 = C03(I)*DT
70

```

```

C      CD4 = CD(4)*DT  $  CD5 = CD(5)*DT  $  CD6 = CD(6)*DT
      ESTIMATE NEW STEP SIZE
      ER = 0.0
      DO 150 J=1,N
      A = X(J)
      IF (ABS(A).LT.ERPS) GO TO 150
      ES = ABS((CD1*F1(J) + CD3*F3(J) + CD4*F4(J) +
1      CD5*F5(J) + CD6*F6(J))/A)
      IF (ES.GT.ER) ER = ES
80      150 CONTINUE
      ER = ER + 1.0E-20
      DT1 = DT
      DT = TOLT/ER
      DT = DT1*DT**0.2
85      IF (ER-TOL) 7,7,8
      8 IR = IR + 1
      GO TO 30
7      CONTINUE
C TOLERANCE IS PASSED
      TOLM=T+DT1
90      CV=SQR(311302.98/(1.0-.0000069*X(3))**.256)
      DEL2=CV-X(4)
      SS1=SIGN(1.0,DEL1)
      SS2=SIGN(1.0,DEL2)
95      IF (ABS(DEL1).LT.1.0E-8.AND.SS1.NE.SS2) GO TO 999
      IF (SS1.EQ.SS2) GO TO 180
      DT=ABS((DEL1+DT1)/(DEL2-DEL1))
      IF (ABS(DEL2).GE.1.0E-8) GO TO 30
999      DT=DT1
100     IF (LL.EQ.0) GO TO 1
      GO TO 2
1      LL=1
      GO TO 3
2      LL=0
105     3 IF (S.EQ.1.0) PRINT*, "LL= ",LL
      IF (S.EQ.1.0) PRINT 4,I,X

```

180 CONTINUE

I = I + DT

IF(TF-T) 5,5,6

6 IS = IS + 1

GO TO 9

IF(S.EQ.1.0) PRINT 4,I,X

RETURN 3 END

1 SUBROUTINE DERIV(T,X,DX)

DIMENSION X(6),DX(6),AA(22),TOT(5)

COMMON/MISC/NPH,NPI,NA,NS,TF,DT,N,S,LL,NV,PP,UQ,AA,TOT

COMMON/MISC1/BA,PI,SIG,ALF

ROW=(1.0-0.0000068823\*X(3))\*4.2553

CALL CALC(BA,PI,ALF,SIG,I,X,ROW)

A=0.0000149166+0.00410241\*ALF\*\*2+.0000022377\*ABS(SIG)

B=0.0037295

DX(1)=X(4)\*COS(X(5))\*COS(X(6))

DX(2)=X(4)\*COS(X(5))\*SIN(X(6))

DX(3)=X(4)\*SIN(X(5))

DX(4)=48.261\*PI\*COS(ALF)-A\*ROW\*X(4)\*\*2-32.174\*SIN(X(5))

DX(6)=(48.261\*PI\*SIN(ALF)\*SIN(BA)-16.087\*SIG\*COS(BA)+B\*ROW\*X(4)\*\*2

2\*ALF\*SIN(BA))/(X(4)\*COS(X(5)))

DX(5)=(48.261\*PI\*SIN(ALF)\*COS(BA)+16.087\*SIG\*SIN(BA)+B\*ROW\*X(4)\*\*2

2\*ALF\*COS(BA)-32.174\*COS(X(5)))/X(4)

DO 1 I=1,6

DX(I)=DX(I)\*AA(1)

RETURN

END

```

1 1 SUBROUTINE CALC(BA,PI,ALF,SIG,T,X,ROW)
   DIMENSION X(6),AA(22),TOT(5)
   COMMON/MISC/NPH,NPI,NA,NS,TF,DT,N,S,LL,NN,PP,QQ,AA,TOT
   CALL CHEBY(T,TOT)
   BA=0.0
   ALF=0.0
   SIG=0.0
   PI=0.0
   QQ=0.0
   PP=0.0
   NN=0
   DO 2 I=1,NPH
     2 BA=BA+AA(1+I)*TOT(I)
   C THRUST
   DO 3 I=1,NPI
     3 PI=PI+AA(1+I+NPH)*TOT(I)
     IF(PI.LT.0.0) PI=0.0
     IF(PI.GT.1.0) PI=1.0
     IF(PI.GE.1.0) NN=1
     IF(PI.LE.0.0) NN=-1
   C CLMAX LIMIT
   ALFLIM=0.2
   VC=558.1/(ROW**0.5)
   IF(X(4).LE.VC) GO TO 4
   25 ALFLIM=62286.8/(X(4)**2*ROW)
   4 CONTINUE
   DO 5 I=1,NA
     5 ALF=ALF+AA(1+I+NPH+NPI)*TOT(I)
     IF(ALF.GT.ALFLIM) ALF=ALFLIM
     IF(ALF.EQ.ALFLIM) PP=1.0
     IF(NS.EQ.0) GO TO 7
   DO 6 I=1,NS
     6 SIG=SIG+AA(1+I+NPH+NPI+NA)*TOT(I)
     7 IF(SIG.GT.2.0) SIG=2.0
     IF(SIG.LT.-2.0) SIG=-2.0
     IF(SIG.EQ.2.0) QQ=1.0
     IF(SIG.EQ.-2.0) QQ=-1.0
   RETURN
   END

```

```

1      SUBROUTINE CHEBY(I,TOT)
      DIMENSION TOT(5),Z(4)
      Z(1)=T
      DO 1 I=2,4
      K=I-1
      1  Z(I)=Z(K)*Z(1)
      TOT(1)=1.0
      TOT(2)=2.0*Z(1)-1.0
      TOT(3)=8.0*Z(2)-8.0*Z(1)+1.0
      TOT(4)=32.0*Z(3)-48.0*Z(2)+18.0*Z(1)-1.0
      TOT(5)=128.0*Z(4)-256.0*Z(3)+160.0*Z(2)-32.0*Z(1)+1.0
      RETURN
      END

```

### Bibliography

1. Miele, Angelo. "Theory of Flight Paths," Flight Mechanics, 1. Massachusetts: Addison-Wesley Publishing Company, Inc. 1962.
2. NASA. U.S. Standard Atmosphere. Washington, D.C., December 1962.
3. Hull and Edgeman. "Suboptimal Control Using a Second-Order Parameter-Optimization Method," Journal of Optimization Theory and Application, 17 (5/6): 482-491 (December 1975).
4. Humphreys, Hennig, Bolding, and Helgeson. "Optimal 3-Dimensional Minimum Time Turns for an Aircraft," The Journal of the Astronautical Sciences, XX (2): 88-112 (September-October 1972).
5. Johnson, Capt Thomas L. Minimum Time Turns with Thrust Reversal. MS Thesis, School of Engineering, Air Force Institute of Technology, Wright-Patterson AFB OH, December 1979.
6. Peterson, 1Lt Steven. Time Constrained Maximum-Energy Turns. MS Thesis, School of Engineering, Air Force Institute of Technology, Wright-Patterson AFB OH, December 1980.
7. Well and Berger. "Minimum-Time 180° Turns of Aircraft," Journal of Optimization Theory and Application, 38 (1): 83-96 (September 1982).
8. Nicolai, Leland M. Fundamentals of Aircraft Design. Fairborn, OH: E.P. DOMICONE, 1975.

#### VITA

Michael R. Brinson was born on 9 November 1953 in Franklin, Indiana. He graduated from high school in Greenwood, Indiana in 1972 and attended Purdue University from which he received the degree of Bachelor of Science in Aerospace Engineering in May 1977. After graduation he was employed by the USAF as an aeronautical engineer in the Aerodynamics and Performance Branch, Flight Technology Division, Directorate of Flight Systems Engineering at Wright-Patterson AFB, Ohio until entering the School of Engineering, Air Force Institute of Technology, in June 1982.

Permanent Address: 250 Wistowa Trail

Beavercreek, Ohio 45430



## REPORT DOCUMENTATION PAGE

REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>			1b. RESTRICTIVE MARKINGS			
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release distribution unlimited			
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE						
4. PERFORMING ORGANIZATION REPORT NUMBER(S) <b>AFIT/GAE/AA/83D-1</b>			5. MONITORING ORGANIZATION REPORT NUMBER(S)			
6a. NAME OF PERFORMING ORGANIZATION <b>School of Engineering</b>		6b. OFFICE SYMBOL (If applicable) <b>AFIT/EN</b>		7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State and ZIP Code) <b>Air Force Institute of Technology Wright-Patterson AFB, OH 45433</b>			7b. ADDRESS (City, State and ZIP Code)			
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State and ZIP Code)			10. SOURCE OF FUNDING NOS.			
			PROGRAM ELEMENT NO.		PROJECT NO.	TASK NO.
						WORK UNIT NO.
11. TITLE (Include Security Classification) <b>See box 19</b>						
12. PERSONAL AUTHOR(S) <b>Michael R. Brinson, B.S.</b>						
13a. TYPE OF REPORT <b>MS Thesis</b>		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Yr., Mo., Day) <b>1983 December 1</b>		15. PAGE COUNT <b>83</b>
16. SUPPLEMENTARY NOTATION <div style="text-align: right;">Approved for public release: DAW AFR 190-17. <i>[Signature]</i> <b>LYNN E. WOLANER</b> Dean for Research and Professional Development Air Force Institute of Technology (AFIT) <b>3 JAN 1984</b></div>						
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)			
FIELD	GROUP	SUB. GR.	<b>Aircraft, Jet Fighters</b>			
<b>01</b>	<b>02</b>					
19. ABSTRACT (Continue on reverse if necessary and identify by block number) <b>TITLE: MINIMUM TIME TURNS WITH THE USE OF DIRECT SIDEFORCE</b>  <b>THESIS ADVISOR: George W. Watt, Lt Col, USAF</b>						
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <b>UNCLASSIFIED/UNLIMITED</b> <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>				21. ABSTRACT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>		
22a. NAME OF RESPONSIBLE INDIVIDUAL <b>George W. Watt, Lt Col, USAF</b>			22b. TELEPHONE NUMBER (Include Area Code) <b>513-255-4478</b>		22c. OFFICE SYMBOL <b>AFIT/EN</b>	

Abstract

The objective of the study is to find the optimal trajectories and corresponding minimum turning times for a high performance aircraft with and without direct sideforce to perform a prescribed turn. These trajectories and times are then compared to evaluate the benefit of direct sideforce. Optimal control theory is applied to solve the minimum time to turn optimal control problem using a suboptimal control problem approach and a second order parameter optimization method.

The results indicate that the use of direct sideforce is beneficial in reducing turning time. In addition, the use of sideforce causes a small loss of energy for initial velocities lower and much higher than the corner velocity.

L MED  
- 8