

AD-A151 268

FLOW OF GAS-PARTICLE MIXTURES(U) COLORADO UNIV AT
BOULDER DEPT OF MECHANICAL ENGINEERING M C BRANGH
NOV 83 AFOSR-TR-85-0237 AFOSR-82-0065

1/1

UNCLASSIFIED


F/G 2/4

NL

END

FILED

BTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS										
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for Public Release; Distribution is Unlimited.										
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE													
4. PERFORMING ORGANIZATION REPORT NUMBER(S) AD-A151 268			5. MONITORING ORGANIZATION REPORT NUMBER(S) AFOSR-TR- 85 - 0237										
6a. NAME OF PERFORMING ORGANIZATION UNIVERSITY OF COLORADO		6b. OFFICE SYMBOL (If applicable)		7a. NAME OF MONITORING ORGANIZATION AFOSR/NA									
6c. ADDRESS (City, State and ZIP Code) Mechanical Engineering Dept - CB 427 Boulder, CO 80309			7b. ADDRESS (City, State and ZIP Code) Building 410 Bolling AFB, DC 20332										
8a. NAME OF FUNDING/SPONSORING ORGANIZATION AIR FORCE OFFICE OF SCIENTIFIC RESEARCH		8b. OFFICE SYMBOL (If applicable) NA		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER AFOSR 82-0065									
8c. ADDRESS (City, State and ZIP Code) BOLLING AFB, DC 20332			10. SOURCE OF FUNDING NOS.										
11. TITLE (Include Security Classification) FLOW OF GAS-PARTICLE MIXTURES			<table border="1"> <tr> <th>PROGRAM ELEMENT NO.</th> <th>PROJECT NO.</th> <th>TASK NO.</th> <th>WORK UNIT NO.</th> </tr> <tr> <td>61102F</td> <td>2308</td> <td>A1</td> <td></td> </tr> </table>			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.	61102F	2308	A1	
PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.										
61102F	2308	A1											
12. PERSONAL AUTHOR(S) MELVYN C BRANCH													
13a. TYPE OF REPORT FINAL		13b. TIME COVERED FROM 01OCT81 TO 30SEP82		14. DATE OF REPORT (Yr., Mo., Day) 1983, November									
15. PAGE COUNT 14													
16. SUPPLEMENTARY NOTATION													
17. COSAT: CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)										
FIELD	GROUP	SUB GR.	TWO-PHASE FLOW; EXHAUST PLUMES; NOZZLE FLOW; JET MIXING.										
19. ABSTRACT (Continue on reverse if necessary and identify by block number) This report outlines studies conducted to characterize the flow of a gas-particle mixture in an axisymmetric jet including the characterization of particle interactions with shock waves formed in the jet in compressible flow. The measurements made include profiles of axial and radial velocity components of the particles and turbulence characteristics of the flow. Flow visualization was used to measure particle concentration and the structure of the shock waves. Samples extracted from the flow provide the particle size distribution in the jet. These studies are needed because of the lack of a sufficiently detailed understanding of these flows, particularly particle-shock interactions, to verify existing computational techniques.													
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS <input type="checkbox"/>													
21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED													
22a. NAME OF RESPONSIBLE INDIVIDUAL LEONARD H CAVENY		22b. TELEPHONE NUMBER (Include Area Code) (202) 767-4937		22c. OFFICE SYMBOL AFOSR/NA									

DTIC FILE COPY

I. Research Objectives

There are many practical examples of engineering systems in which small, solid particles are mixed with a gas and the mixture flows through the system. The visible trailing plume from a rocket engine is formed in part by burning of small particles flowing from the rocket engine when they mix with the air in the atmosphere. These particles can also collect on the outer surfaces of spacecraft windows and reduce transmission and reception of light used for navigation and scientific data collection. When finely crushed powders of coal (pulverized coal) are burned in a power plant the coal powder must be sprayed with a nozzle into the boiler and mixed with air before it can burn. One method for producing a synthetic natural gas (entrained gasification) is to spray powdered coal into a heated gas mixture containing steam and hydrogen under carefully controlled conditions. Mixtures of small particles and gases also occur in aircraft engines, diesel engines, and woodburning fireplaces and stoves.

Understanding of these flows with gases and particles is necessary to design the systems and predict their performance. For example, how fast the particle burns depends on how far into the surrounding air it moves and how much air it is exposed to. Unfortunately, these flow systems are very complex and poorly characterized even though they occur so frequently. The particles usually move in a different direction than the gas, with a different speed and a different temperature. All of these quantities should be known to design the practical system and they are influenced by the spray nozzle shape and gas flow. Because the particles are so small (about one millionth of a meter), measurements on the system are difficult. In addition, particles of different size and shape move to different locations in the gas flow. Careful measurements under well-characterized conditions are needed to understand the flow and to develop an ability to design the flow.

**Approved for public release;
distribution unlimited.**

This research sponsored by the
Air Force Office of Scientific
Research (performed by Univ of
Colorado under Grant AFOSR 82-
0065)

Previous studies of two phase round jet flow have been reviewed in considerable detail in recent reports describing our experimental results (Hayashi¹, Hayashi and Branch^{2,3}). In dilute two phase jets with few solid particles, Hetsroni and Sokolov⁴, and Popper, et al⁵ showed that the solid particle velocity is higher than the gas velocity in many regions of the jet. Other authors have investigated the characteristics of turbulence in a suspension of solid particles. Goldschmidt, et al⁶ and Hedman and Smoot⁷ showed that turbulent transport is dependent on particle size distribution. Other studies have reported that the turbulent energy level decreases with the suspension of particles into a jet^{4,8}. Carrier⁹ showed theoretically that behind a shock wave the velocity of the gas is smaller than the velocity of the suspended particles and that the particles are then decelerated. Korkan et al¹⁰ observed no change in the particle direction through an oblique shock wave, even though the gas does change direction.

The studies considered above are for systems with few particles in the flow. There is a significant lack of detailed experimental characterization of gas particle jets in flow with high particle concentration where particles can interact or collide. Among the uncertainties are axial and radial particle drag coefficients. These data are necessary both to develop phenomenological models of two phase jet flow and to provide comparison data for evaluation of theoretical models. A second area of almost no current understanding and experimental characterization is particle interactions with shock waves in these flows. This is particularly true of oblique shock waves. The details of flow of particles and gas in passing through a shock wave are needed to evaluate the important processes describing the interaction in order to model these effects.

AIR FORCE OFFICE OF SCIENTIFIC RESEARCH (AFSC)
NOTICE OF TRANSMITTAL TO DTIC
This technical report has been reviewed and is
approved for publication in DTIC Report 190-12.
Distribution is unlimited.
MATTHEW J. KEEPER
Chief, Technical Information Division

II. Status of Research

Previous studies supported by this grant have concentrated on the experimental characterization of gas-solid two phase jet and nozzle flow. These studies have included the development of a flexible two phase flow facility, development and utilization of a new optical technique for measurement of particle concentration and the use of other diagnostic methods for measurement of gas velocity and temperature, particle velocity and particle size distribution. The most recent measurements which have been made examined the effect of jet Mach number, particle size, particle loading and nozzle configuration on the detailed structure of the two phase free jet.

Recent studies (2,11,12,13,14) have focused on prediction of the characteristics of nozzles and exhaust plumes of rocket engines in order to evaluate nozzle flow and plume visibility, radiation signatures, and impingement effects. Oblique shock waves occur in these flows and accompany detonation and blast waves in heterogeneous media. The nature of oblique shock waves in two phase flow has not been extensively characterized experimentally or theoretically.

In our studies, oblique shock waves in two phase flow were studied, and the relation between gas-particle flow properties ahead of an oblique shock wave and gas particle flow properties behind the shock wave were derived by a solution of the steady-state conservation equations of mass, momentum, and energy for the mixture phase. Some of the important assumption made are that the particles are uniform in size, uniformly distributed, and in thermal equilibrium with the gas ahead of the oblique shock wave. Large particles ($>10 \mu\text{m}$) do not change direction immediately after passing through the shock wave. Particle drag coefficients in two phase flow were reviewed, and the data used in this study were obtained from aeroballistic range measurements. Results of the oblique shock wave calculations are presented as the relation between the incident angle β of the two phase flow and the deflection angle θ . The

solution considered the effects of the shock wave Mach number, particle velocity lag, particle feeding rate, and particle size. A comparison of the calculations to experimental data was used as a guide to selection of the drag coefficient and gave good agreement between theory and experiment for the available data. It was found that the shock wave structure was influenced by shock wave Mach number, particle feeding rate, and particle velocity lag.

The deflection angles of gas in two phase flow are smaller than those in single phase flow and become smaller when the particle feeding rate increases. The suspension of particles affects weak shock waves more than strong shock waves. The deflection angle of the gas becomes smaller when the particle velocity lag increases. Particle size and particle type have little effect on the oblique shock wave relations in two-phase flow.

The drag coefficient of large particles is smaller than that of small particles and does not change significantly over a large range of incident angles. The pressure ratio between that ahead of the shock wave and that behind the shock wave in two phase flow is smaller than the ratio in single phase flow and decreases at any incident angle as the particle feeding rate increases. An increase in the suspension of particles strengthens the oblique shock wave, but the large particle velocity lag weakens the oblique shock wave in two phase flow.

This study provides some fundamental characteristic features of the oblique shock wave in two phase flow and suggests an appropriate choice of drag coefficient for the problem. The equations developed in this study may be used further for the problems of triple shock waves, detonation, and blast waves in multiphase media.

Solid particle-gas mixture flows have been examined in a wide variety of systems of engineering interest. Some of these are, for example, the pulverized coal combustion system in a power plant and small particles entrained

in rocket exhaust plumes. There are, however, few measurements of heat and mass transfer effects on heavily particle-laden two phase jets because of difficulties in the measurement.

Abramovich, et al.¹⁵ investigated turbulent jets of different gases and measured the Prandtl and Schmidt numbers for those gases. They showed that both dimensionless number depend on the local density ratio between the two different gases. Rychkov¹⁶ and Blagosklonov and Strasenkov¹⁷ showed that the gas temperature at the jet axis was increased and the particle temperature was decreased due to heat transfer between the two phases. The gas and particle temperatures equilibrated further downstream.

The Schmidt number is a measure of the diffusion of an additional phase through the gaseous phase. The effect of turbulence can be determined by comparing a turbulent Schmidt number with a laminar Schmidt number. Goldschmidt, et al.¹⁸ defined and interpreted the Schmidt number as a function of the velocity, concentration and particle size. Their Schmidt numbers in two phase flow experiments were larger than unity and became larger with an increase in particle size. Abramovich and Girshovich¹⁹ defined the Schmidt number as a ratio of the gaseous diffusion scale to the particle dispersion scale. Their Schmidt number was unity in the laminar air jet case, but it was less than unity in the turbulent air jet case. Hedman and Smoot²⁰ as well as Abramovich and Girshovich observed an interesting phenomenon that the heavier particle in the two phase system dispersed faster than the lighter particle.

In previous studies^{1,2} we have developed an optical method to measure particle concentration, gas velocity and gas temperature to evaluate the turbulent particle Schmidt number and turbulent gas Prandtl number in two-phase jet flows. From measurements of average turbulent gas velocity, average turbulent gas temperature and average particle concentration in gas-solid two-phase jet flows, the turbulent gas Prandtl number and the turbulent particle Schmidt number have been investigated.

It was found that the turbulent particle Schmidt number is large at the nozzle exit and decreases slightly downstream. The turbulent gas Prandtl number is lower when particles are suspended in the flow than without particles. However, the thermal diffusion rate in air is similar to the viscous diffusion rate of air.

The effect of jet velocity on the turbulent gas Prandtl number is significant, but not that of gas Reynolds number of the Prandtl number. The Prandtl number in the jet flow with the faster velocity is smaller than that with the slower velocity. The effect of particle size on the turbulent particle Schmidt number was found to be significant also. The turbulent particle Schmidt number in the heavier particle-gas two phase flow was smaller than that in the lighter particle gas flow. The gas Reynolds number had a linear relation with the turbulent particle Schmidt number in this measurement range. These results indicate that a large lag in two phase flows affects the thermal and momentum transports significantly. Another important result is the finding that heavier particles disperse faster than lighter particles in the two phase jet flows. A simplified treatment of the interaction between solid particles and turbulent eddies gave results which supported the conclusions of the experimental study.

A dual beam, self-aligning LDV system was developed to measure the particle velocities. The system which is used in our experiments has a commercially available TSI counter-type signal processor. This signal processor serves as a high frequency filter which identifies and validates individual particle doppler bursts and calculates the frequency and hence corresponding particle velocity of the bursts. The data rate from the signal processor is very rapid and these data must be averaged externally to the signal processor.

Accession For
 1955 GR&I
 1956 IAS
 1957
 1958
 1959
 1960
 1961
 1962
 1963
 1964
 1965
 1966
 1967
 1968
 1969
 1970
 1971
 1972
 1973
 1974
 1975
 1976
 1977
 1978
 1979
 1980
 1981
 1982
 1983
 1984
 1985
 1986
 1987
 1988
 1989
 1990
 1991
 1992
 1993
 1994
 1995
 1996
 1997
 1998
 1999
 2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025
 2026
 2027
 2028
 2029
 2030
 2031
 2032
 2033
 2034
 2035
 2036
 2037
 2038
 2039
 2040
 2041
 2042
 2043
 2044
 2045
 2046
 2047
 2048
 2049
 2050
 2051
 2052
 2053
 2054
 2055
 2056
 2057
 2058
 2059
 2060
 2061
 2062
 2063
 2064
 2065
 2066
 2067
 2068
 2069
 2070
 2071
 2072
 2073
 2074
 2075
 2076
 2077
 2078
 2079
 2080
 2081
 2082
 2083
 2084
 2085
 2086
 2087
 2088
 2089
 2090
 2091
 2092
 2093
 2094
 2095
 2096
 2097
 2098
 2099
 2100
 2101
 2102
 2103
 2104
 2105
 2106
 2107
 2108
 2109
 2110
 2111
 2112
 2113
 2114
 2115
 2116
 2117
 2118
 2119
 2120
 2121
 2122
 2123
 2124
 2125
 2126
 2127
 2128
 2129
 2130
 2131
 2132
 2133
 2134
 2135
 2136
 2137
 2138
 2139
 2140
 2141
 2142
 2143
 2144
 2145
 2146
 2147
 2148
 2149
 2150
 2151
 2152
 2153
 2154
 2155
 2156
 2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167
 2168
 2169
 2170
 2171
 2172
 2173
 2174
 2175
 2176
 2177
 2178
 2179
 2180
 2181
 2182
 2183
 2184
 2185
 2186
 2187
 2188
 2189
 2190
 2191
 2192
 2193
 2194
 2195
 2196
 2197
 2198
 2199
 2200
 2201
 2202
 2203
 2204
 2205
 2206
 2207
 2208
 2209
 2210
 2211
 2212
 2213
 2214
 2215
 2216
 2217
 2218
 2219
 2220
 2221
 2222
 2223
 2224
 2225
 2226
 2227
 2228
 2229
 2230
 2231
 2232
 2233
 2234
 2235
 2236
 2237
 2238
 2239
 2240
 2241
 2242
 2243
 2244
 2245
 2246
 2247
 2248
 2249
 2250
 2251
 2252
 2253
 2254
 2255
 2256
 2257
 2258
 2259
 2260
 2261
 2262
 2263
 2264
 2265
 2266
 2267
 2268
 2269
 2270
 2271
 2272
 2273
 2274
 2275
 2276
 2277
 2278
 2279
 2280
 2281
 2282
 2283
 2284
 2285
 2286
 2287
 2288
 2289
 2290
 2291
 2292
 2293
 2294
 2295
 2296
 2297
 2298
 2299
 2300
 2301
 2302
 2303
 2304
 2305
 2306
 2307
 2308
 2309
 2310
 2311
 2312
 2313
 2314
 2315
 2316
 2317
 2318
 2319
 2320
 2321
 2322
 2323
 2324
 2325
 2326
 2327
 2328
 2329
 2330
 2331
 2332
 2333
 2334
 2335
 2336
 2337
 2338
 2339
 2340
 2341
 2342
 2343
 2344
 2345
 2346
 2347
 2348
 2349
 2350
 2351
 2352
 2353
 2354
 2355
 2356
 2357
 2358
 2359
 2360
 2361
 2362
 2363
 2364
 2365
 2366
 2367
 2368
 2369
 2370
 2371
 2372
 2373
 2374
 2375
 2376
 2377
 2378
 2379
 2380
 2381
 2382
 2383
 2384
 2385
 2386
 2387
 2388
 2389
 2390
 2391
 2392
 2393
 2394
 2395
 2396
 2397
 2398
 2399
 2400
 2401
 2402
 2403
 2404
 2405
 2406
 2407
 240



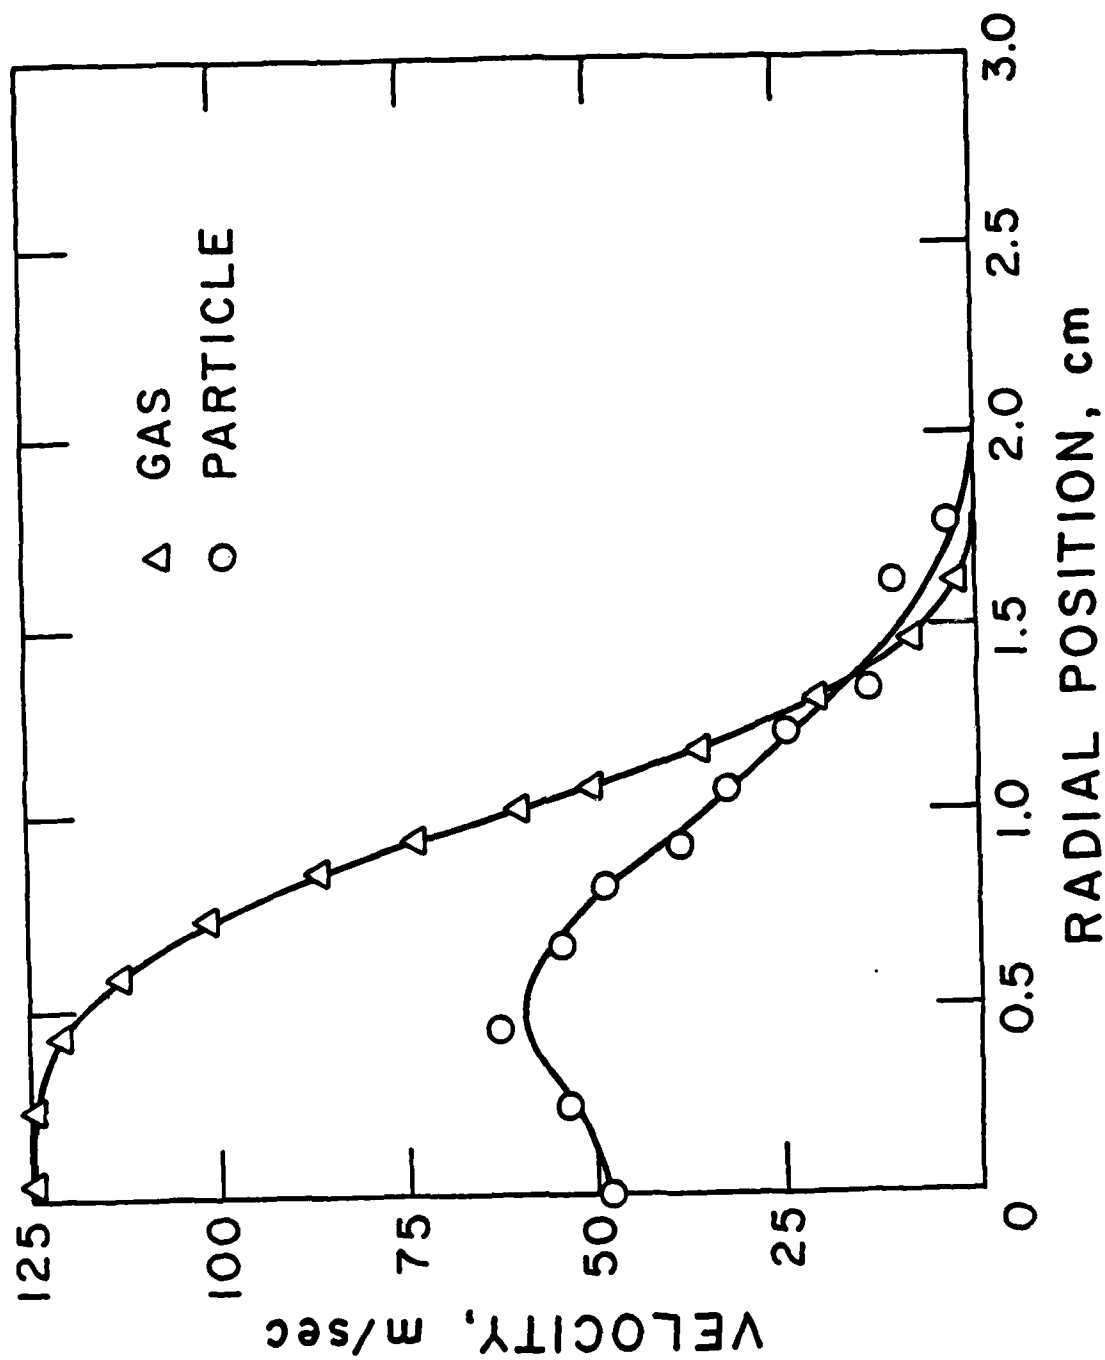


Figure 2. Mean velocity profiles of particles and gas in an axisymmetric jet of air measured 5 nozzle diameters from the nozzle exit plane.

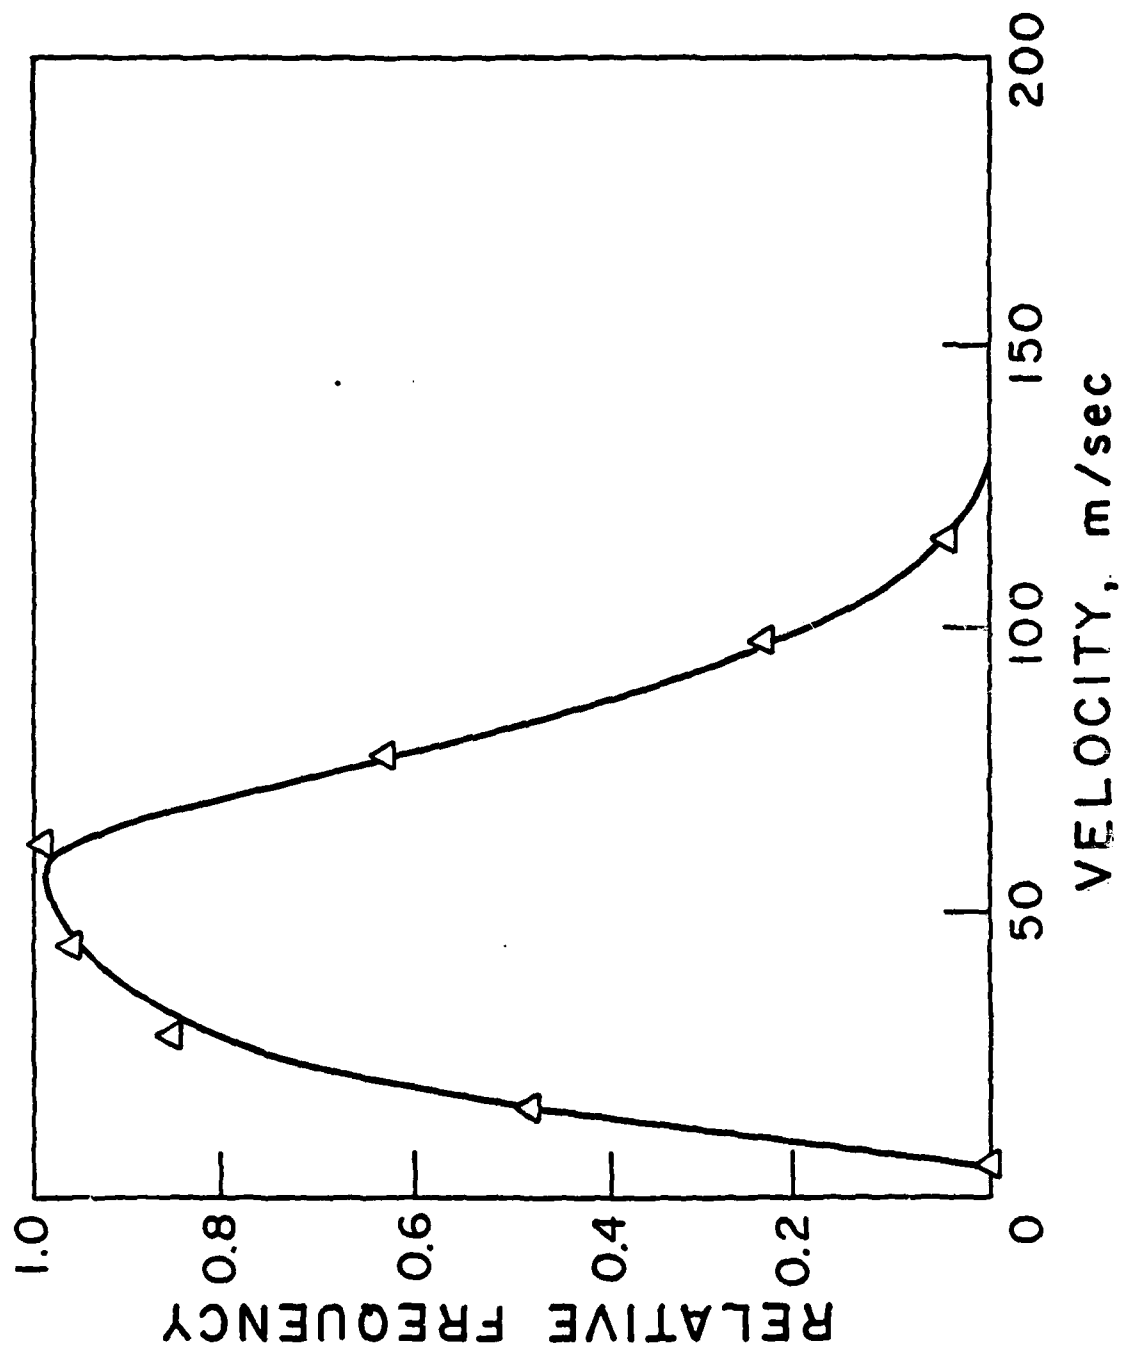


Figure 1. Particle velocity distribution function for 27 μm (mean) diameter particles in an axisymmetric jet of air. The velocity profile is given in Figure 2.

III. References

1. Hayashi, K., "Measurement and Calculation of Properties of Gas-Solid Two-Phase Jets," PhD Thesis, Mechanical Engineering Department, University of Colorado, Boulder, CO, 1980.
2. Hayashi, K. and Branch, M.C., "Concentration, Velocity and Particle Size Measurement in Gas-Particle Two-Phase Jets," Journal of Energy, 4, pp. 193-198, 1980.
3. Hayashi, K. and Branch, M.C., "Oblique Shock Waves in Two Phase Flow," Aeronautics and Astronautics, in press.
4. Hetsroni, G. and Sokolov, M., "Distribution of Mass, Velocity and Intensity of Turbulence in a Two Phase Turbulent Jet," Journal of Applied Mechanics, Vol. 38, June 1971, pp. 315-327.
5. Popper, J., Abuaf, N., and Hetsroni, G., "Velocity Measurement in a Two Phase Turbulent Jet," International Journal of Multiphase Flow, Vol. 1, 1974, pp. 715-726.
6. Goldschmidt, V.W., Householder, M.K., Ahmadi, G., and Chuang, S.C., "Turbulent Diffusion of Small Particles Suspended in Turbulent Jets," Progress in Heat and Mass Transfer, Vol. 6, 1972, pp. 487-508.
7. Hedman, P.O. and Smoot, L.D., "Particle Gas Dispersion Effects in Confined Coaxial Jets," AIChE Journal, Vol. 21, March 1975, pp. 372-379.
8. Danon, H., Wolfshtein, M., and Hetsroni, G., "Numerical Calculations of Two Phase Turbulent Round Jet," International Journal of Multiphase Flow, Vol. 3, 1977, pp. 223-234.
9. Carrier, G.F., "Shock Waves in a Dusty Gas," Journal of Fluid Mechanics, Vol. 4, part 4, 1958, pp. 376-382.
10. Korkan, K.D., Petrie, S.L., and Bodony, R.J., "Particle Concentrations in High Mach Number Two-Phase Flow," AIAA Paper 74-606, July 1974.
11. Morgenthaler, J.H., "Analysis of Two Phase Flow in Supersonic Exhausts," Detonation and Two-Phase Flow: AIAA Progress in Astronautics and Rocketry, edited by S.S. Penner and F.A. Williams, Vol. 6, pp. 145-171, AIAA, New York, 1962.
12. Pergament, H.S. and Thorpe, R.D., "A Computer Code for Fully-Coupled Rocket Nozzle Flows (FULNOZ)," Aerochem TP-322 (AFOSR-TR-75-1563), 1975.
13. Alkhimov, A.P., Papyrin, A.N., Predein, A.L., and Soloukhin, R.I., "Experimental Investigation of the Effect of Velocity Lag of Particles in a Supersonic Gas Stream," Zh. Prikl. Mekh. Tekh. Fiz. 4, 80-88, 1977.

14. Chang, I.S., "Three-dimensional Two-phase Supersonic Nozzle Flow," AIAA 14th Fluid and Plasma Dynamic Conference, Palo Alto, CA, 1981.
15. Abramovich, G.N., Yakovlevsky, O.V., Smirnova, A.N., and Krashennnikov, S. Ya., "An Investigation of the Turbulent Jets of Different Gases in a General Stream," Astronautica Acta, Vol. 14, 1969, pp. 229-240.
16. Rychkov, A.D., "Flow of a Mixture of Gas and Solid Particles in Supersonic Underexpanded Jets," Izvestiya Akademii Nauk SSSR, Mekhanika Zhidkosti i Gaza, No. 2, March-April 1974, pp. 75-79.
17. Blagosklonov, V.I. and Stasenok, A.L., "Two-Dimensional Nozzle and Jet Flows of a Multiphase Mixture," Fluid Mechanics Soviet Research, Vol. 8, No. 2, March-April 1979, pp. 157-168.
18. Goldschmidt, V.W., Householder, M.K., Ahmadi, G., and Chuang, S.C., "Turbulent Diffusion of Small Particles Suspended in Turbulent Jets," Progress in Heat and Mass Transfer, Vol. 6, 1972, pp. 487-508.
19. Abramovich, G.N. and Girshovich, T.A., "Diffusion of Heavy Particles in Turbulent Gas Streams," Soviet Physics Doklady, Vol. 18, No. 9, March 1974, pp. 587-589.
20. Hedman, P.O. and Smoot, L.D., "Particle-Gas Dispersion Effects in Confined Coaxial Jets," AIChE Journal, Vol. 21, No. 2, March 1975, pp. 372-379.

IV. Recent Publications from this AFOSR Support

1. K. Hayashi and M.C. Branch, "Concentration, Velocity and Particle Size Measurements in Gas-Solid Two-Phase Jets," J. of Energy, 4, 193-198, 1980.
2. K. Hayashi and M.C. Branch, "Particle Transport Effects in Gas-Solid Two-Phase Nozzle and Jet Flow," Paper No. 81-2100, AIAA 14th Fluid and Plasma Dynamics Conference, Palo Alto, CA, June 23-25, 1981.
3. K. Hayashi and M.C. Branch, "Oblique Shock Waves in Two Phase Flow," Progress in Astronautics and Aeronautics, 87, pp. 22-40, 1983.
4. K. Hayashi and M.C. Branch, "Some Aspects of Heat and Mass Transfer in Gas Solid Two Phase Flow," Proceedings of the ASME/JSME Thermal Engineering Conference, ASME, pp. 441-449, 1983.
5. M.C. Branch and K. Hayashi, "Thermodynamic Derivatives," International Journal of Mechanical Engineering Education, in press.
6. K. Hayashi and M.C. Branch, "Particle Transport Effects in Gas-Solid Two Phase Nozzle and Jet Flow," submitted to Israel Journal of Technology.

V. Personnel

1. Melvyn C. Branch, Associate Professor of Mechanical Engineering, Project Director and Principal Investigator.
2. Gary Shamshoian, Research Assistant. Awarded M.S. in Mechanical Engineering, May 1983. Thesis Title: "Design Study of a Laser Velocimeter for Heavily Particle Laden Two Phase Jets".
3. Ke Nguyen, Research Assistant, PhD Candidate.

VI. Interactions

Formal presentations of results obtained in this study have included a paper presented at the ASME/JSME Thermal Engineering Conference in May 1983 entitled "Some Aspects of Heat and Mass Transfer in Gas-Solid Two-Phase Jets". An oral progress report and abstract entitled "Flow of Gas Particle Mixtures" was presented at the AFOSR/AFRPL Rocket Propulsion Research Meeting, March 1983 in Lancaster, California. Publications from this AFOSR support are summarized in Section III.

Interaction with Edwards Air Force Base, California and Aeronautical Research Associates of Princeton has been maintained to determine the availability of numerical prediction codes for two phase nozzle and plume flow. Data obtained in the present study will be compared to predictions using these codes when they become available.

END

FILMED

4-85

DTIC