

AD-A151 610

THE DESIGN AND OPERATION OF A SIMPLE LOW-SPEED
FLUTTER-SUPPRESSION MODEL(U) AERONAUTICAL RESEARCH LABS
MELBOURNE (AUSTRALIA) A GOLDMAN APR 84

1/1

UNCLASSIFIED

ARL-STRUC-TM-377


F/G 20/4

NL

END

FILED

DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

②

ARL-STRUC-TM-377

AR-003-020



AD-A151 610

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORIES
MELBOURNE, VICTORIA

Structures Technical Memorandum 377

THE DESIGN AND OPERATION OF A SIMPLE LOW-SPEED
FLUTTER-SUPPRESSION MODEL

A. GOLDMAN

Approved for Public Release

DTIC
ELECTE
MAR 21 1985

E

(C) COMMONWEALTH OF AUSTRALIA 1984

APRIL 1984

COPY No

UNCLASSIFIED

DTIC FILE COPY

AR-003-020

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORIES

Structures Technical Memorandum 377

THE DESIGN AND OPERATION OF A SIMPLE LOW-SPEED
FLUTTER-SUPPRESSION MODEL

by

A. GOLDMAN

SUMMARY

A dynamic model has been developed for use in a small low-speed wind tunnel. A feedback system has been used to drive a control surface in order to suppress flutter. Details of the model and the results of preliminary tests are presented.



© COMMONWEALTH OF AUSTRALIA 1984

POSTAL ADDRESS: Director, Aeronautical Research Laboratories,
P.O. Box 4331, Melbourne, Victoria, 3001, Australia

CONTENTS

	<u>PAGE NO.</u>
1. INTRODUCTION	1
2. DESCRIPTION OF MODEL	1
3. DESCRIPTION OF INSTRUMENTATION	2
4. TEST PROCEDURES	3
5. RESULTS	4
6. CONCLUSION AND DISCUSSION	5

REFERENCES

TABLES

FIGURES

DISTRIBUTION LIST

DOCUMENT CONTROL DATA

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



1. INTRODUCTION

As a preliminary investigation, prior to a detailed mathematical analysis, a small dynamic flutter model has been designed and tested, in order to explore the problems of instrumentation and control. The wind tunnel working section of 460 millimetres x 460 millimetres, and a maximum speed of 19.5 metres per second were the major constraints in the model design.

The model has a driven control surface and three built-in accelerometers. The stiffness and mass distribution were adjusted to cause a wing torsion-bending coupled flutter, within the tunnel speed range. The electronic control system provided a feedback signal to the control surface which could be adjusted in gain and phase.

2. DESCRIPTION OF MODEL

The wing section has a span of 205 millimetres and chord 163 millimetres and a control surface of span 95 millimetres and chord 54 millimetres. The wing itself can be regarded as inflexible for the purpose of this project. The flexibility required was introduced by mounting the wing on a piece of spring steel, which provided low frequency pitch and bending modes. The mass distribution was adjusted by moving a mass on a rod attached to the trailing edge of the wing.

In order to obtain a flutter model at speeds below 19 metres per second it was necessary to have the torsional axis well behind the centre of pressure, and to have the torsional and bending frequencies below 6 hertz and closely spaced.

Fig. 1 shows the general arrangement of the model on its support, and Fig. 2 is a photograph of the model mounted on the removable wind-tunnel window.

Because the whole wing moved as a rigid body, the wing root could not be fixed, and the control surface actuator had to form part of the dynamic system. A 6-volt, 5-watt motor was mounted at the wing-root and direct-coupled to the control-surface shaft. Rotational stops were fitted to prevent oscillations of greater than ± 10 degrees. The motor was tested and found to follow a sinusoidal current input quite accurately up to 30 hertz.

3. DESCRIPTION OF INSTRUMENTATION

To monitor the motion of the wing, three accelerometers, Endevco type 2250, are mounted within the wing. The locations of these are shown on Fig. 1 and are designated M, L and C as abbreviations for Mid-chord, Leading-edge, and Control-surface.

The accelerometer output to be used for control purposes is passed through two stages of amplification and filtering before being fed into a power amplifier which controls the actuator. The filters have a 1 hertz high-pass and 50 hertz low-pass characteristic and, when connected in series, have a phase characteristic as shown in Fig. 3. The amplification stages provide an overall gain of 1000.

This amplified signal, as well as controlling the power amplifier, is also connected, via a 10 hertz low-pass filter, to the input of a random decrement analyser. This device, designed at A.R.L. and based on principles set out in Ref. 1, produces an averaged time history which indicates the impulse response of the structure, and hence provides an indication of the damping of the mode being examined.

An instantaneous spectrum of the response of the wing is obtained by connecting the output of the accelerometers to a dual-channel spectrum analyser.

4. TEST PROCEDURES

The tunnel was operated at speeds from 14 to 19.5 metres per second with measurements of damping being made at each speed. Power spectra were then obtained from locations M and L at 19 metres per second without feedback control, and with feedback from each of the two accelerometers in turn. Measurements of damping were also made at 18 and 19.5 metres per second with feedback control operating.

As a test of the reaction time of the system, a crude store was attached to the wing in such a way that the wing with store was stable at a speed of 18 metres per second. The store was released when the feedback control was on and also when it was off. The system was observed to maintain minimum vibration levels before release and immediately afterwards. Without feedback control, the vibrations rapidly became quite violent.

Because this work was a preliminary task prior to mathematically modelling the structure for digital control purposes, it was necessary to measure several physical parameters of the model. These were the mass, location of centre of gravity, moments of inertia about both axes of rotation, and the location of these axes of rotation for each of the two modes of vibration.

Moments of inertia were measured using the parallel axis theorem, and treating the model as a pendulum pivoted about two separate axes. The locations of the axes of rotation, or nodal lines, for each mode were measured using a travelling accelerometer located successively at each corner of the model. The transfer function was obtained using the built-in accelerometer at location L as a reference. As the model can be regarded as rigid, the nodal line location was obtained by straight-line extrapolation and interpolation.

5. RESULTS

From Figs. 4 to 9 it can be seen that damping has gone from greater than 10 percent of critical at 14 metres per second to approximately 0.5 percent of critical at 19.5 metres per second. Table 1 lists the estimates of damping made at each speed and at two speeds with feedback control applied. The damping was estimated using the relationship between successive amplitudes over the first two cycles of oscillation.

The effect of feedback control may be seen in Figs. 10 and 11 which show the random decrement signatures with the control activated. These should be compared with Figs. 7 and 9 which show the respective uncontrolled signatures. The damping has increased by approximately 7.5 percent in both cases.

The results of averaging in the frequency domain are presented in Figs. 12 to 17. These figures were produced using 8 ensembles and a 128 point display. The resolution is 0.25 hertz. Figs. 12 and 13 show the response at the wing tip, "LOC-L" being leading edge location L on Fig. 1, and "LOC-M" being mid-chord location M on the same figure. It will be seen that the predominant frequency is approximately 6.5 hertz. Figs. 14 and 15 show the averaged response at both locations when controlled by feedback from location "M". The frequency content at 6.5 hertz has been eliminated and the overall vibration level greatly reduced. Figs. 16 and 17 show the effect of feedback from location "L" being applied to the control system. The vibration levels have been increased and the predominant frequency lowered to between 6.0 and 6.25 hertz. A transfer function of the two frequency spectra revealed that there was approximately 90 degrees phase displacement between the two displacements at the predominant frequency.

The results of the physical dimension measurements are presented in Table 2. From these measurements, the following moments of inertia were calculated:-

About XX axis : 0.00182 Kg - m²

About YY axis : 0.0036 Kg - m²

About X' X' axis : 0.00159 Kg - m²
(product of
inertia)

6. CONCLUSIONS AND DISCUSSION

The work to date has demonstrated that it is possible to operate a dynamic model of small dimensions in a small low-speed wind-tunnel, successfully monitor vibrations, and use these vibration signals to operate a feedback control.

The preliminary tests were completed in a relatively short period of time using general laboratory equipment.

The problems that exist are the poor control of phase using a variable analogue filter, and the amount of noise being transmitted to the actuator. The filter characteristics are generally such that any significant change in phase at one frequency is likely to have an adverse effect on other frequencies. The noise transmission is brought about by the high gain in the feedback system. This is necessary because of the low output of the accelerometers (5 millivolts per "g") and the use of a 6-volt actuator.

The next stage of the project will be to utilize more sophisticated analogue feedback control systems, prior to the use of a digital computer and a digital control algorithm.

Similar work has been carried out at NASA Langley (Ref. 2) using much larger models and a high-speed digital computer. The present work indicates that flutter suppression can be demonstrated in a very simple test facility.

REFERENCES

1. On-line failure detection and damping measurement of aerospace structures by random decrement signatures.

Henry A. Cole Jnr. - NASA CR-2205
March 1973

2. Adaptive Flutter Suppression - Analysis and Test.

Johnson, E.H., - AGARD-R-703
Harvey, C.A., January 1983.
Huttsell, L.T., and
Farmer, M.G.

TABLE 1


Damping vs. Air-speed

Air speed metres per second	Damping (% critical)	
	No control	Feedback control
14	> 10	-
16	9.6	-
17	3.7	-
18	2.4	9.8
19	0.8	-
19.5	0.5	8

TABLE 2

Physical measurements

Wing span	205 mm
Wing chord	163 mm
Control surface span	95 mm
Control surface chord	54 mm
Bending mode frequency	4.5 Hz
Pitch mode frequency	6.6 Hz
Pendulum frequency about an axis 35 mm leading XX	1.4 Hz
Pendulum frequency about an axis 30 mm outboard from YY	0.96 Hz
Location of C.G. aft of XX	35 mm
Location of C.G. out from YY	58.5 mm
Total mass	0.349 Kg

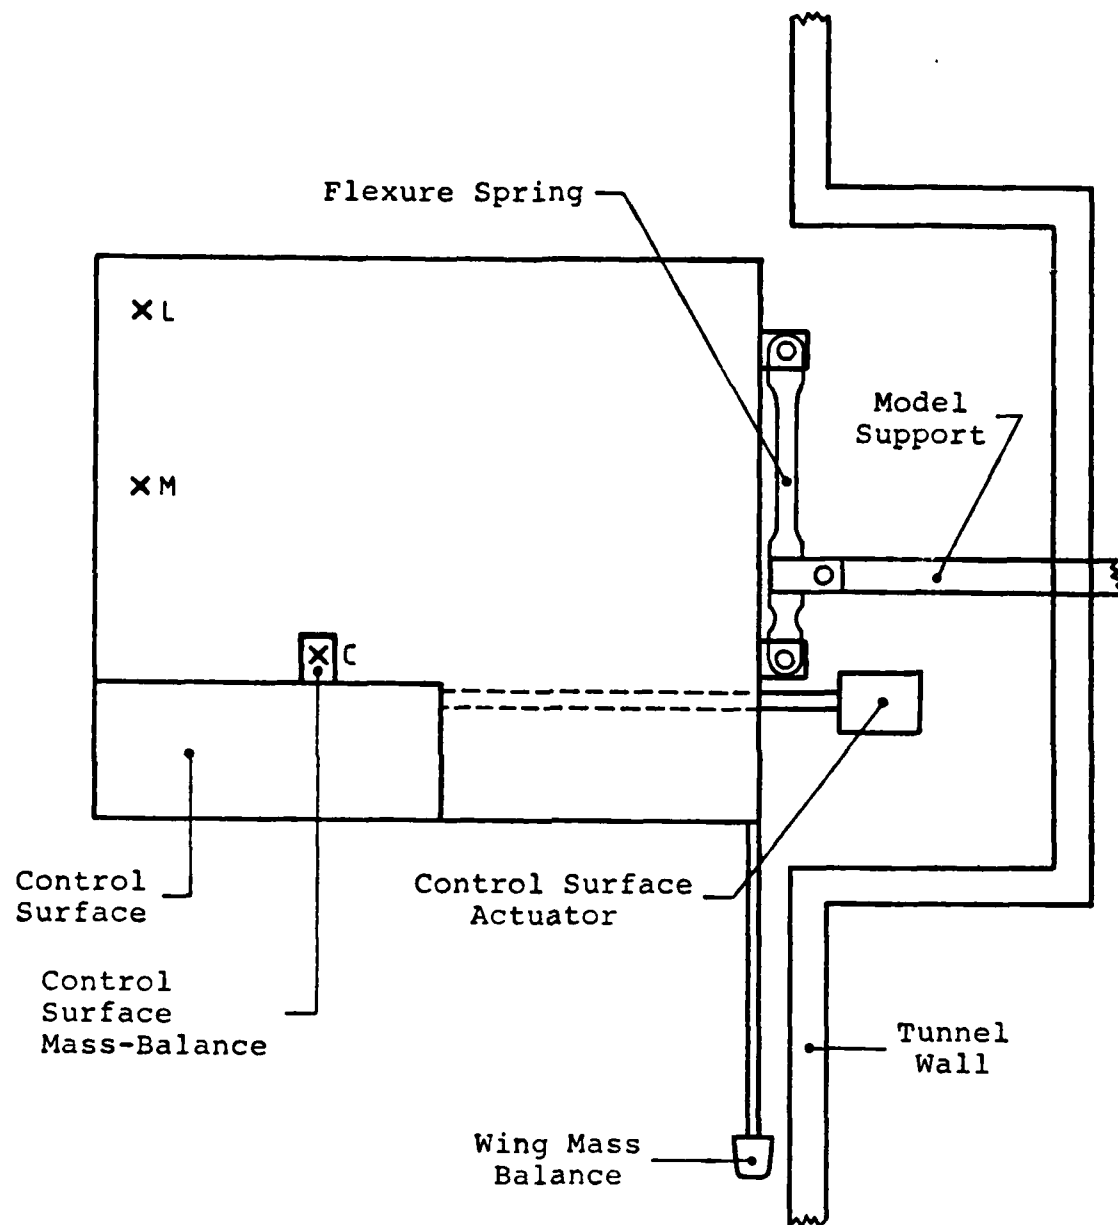

X = Accelerometer
Locations Inside
Wing Structure

FIG. 1(a) GENERAL LAYOUT OF MODEL

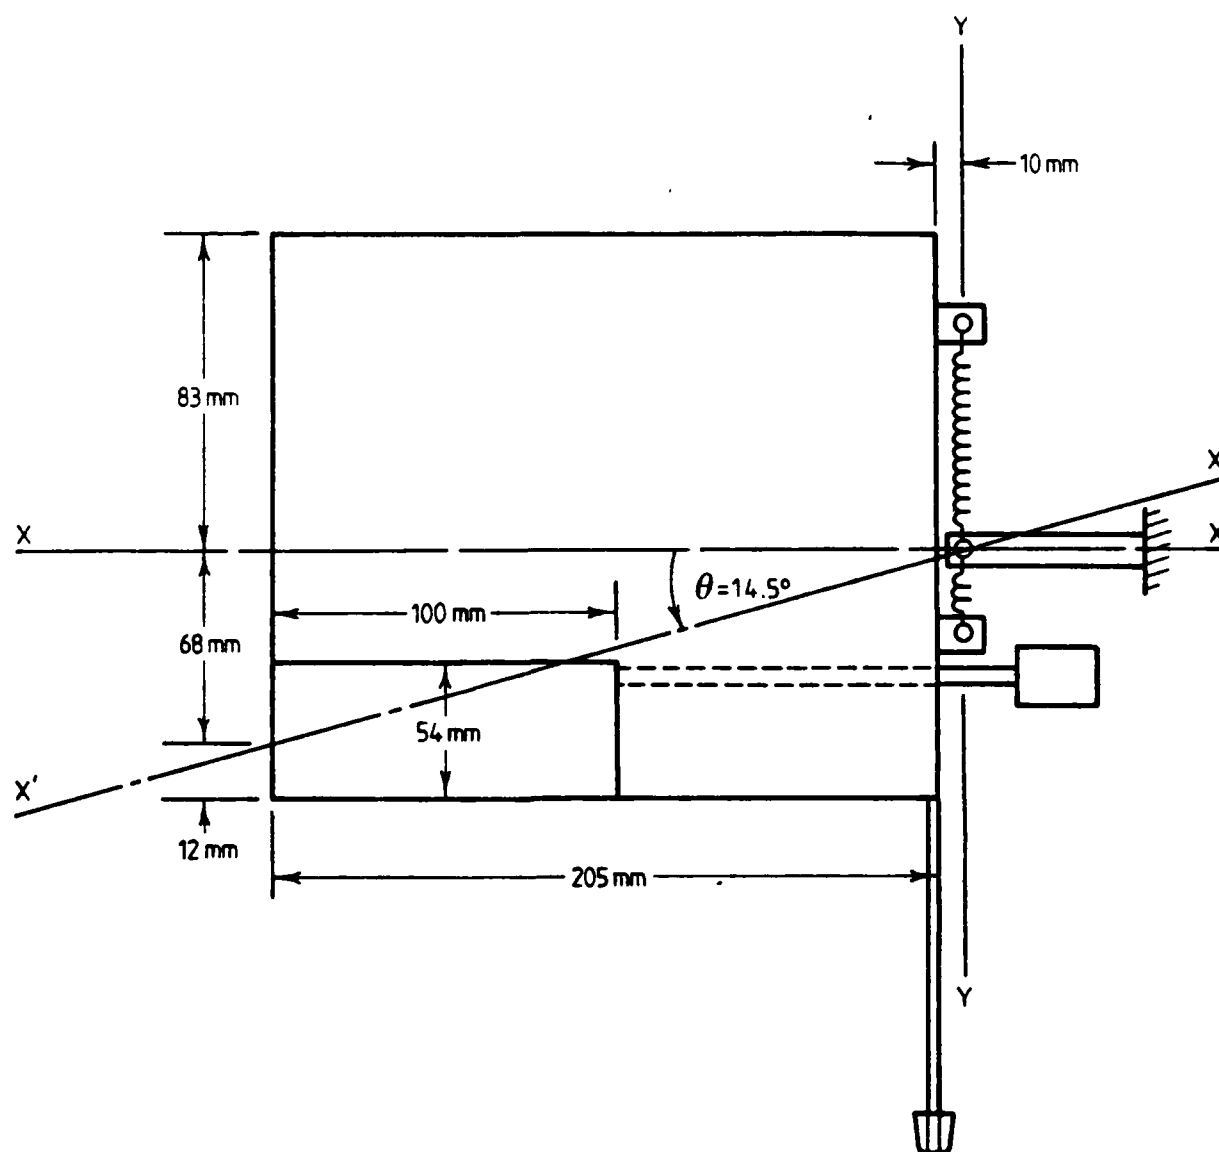


FIG. 1(b) PLANFORM OF MODEL SHOWING PRINCIPAL DIMENSIONS

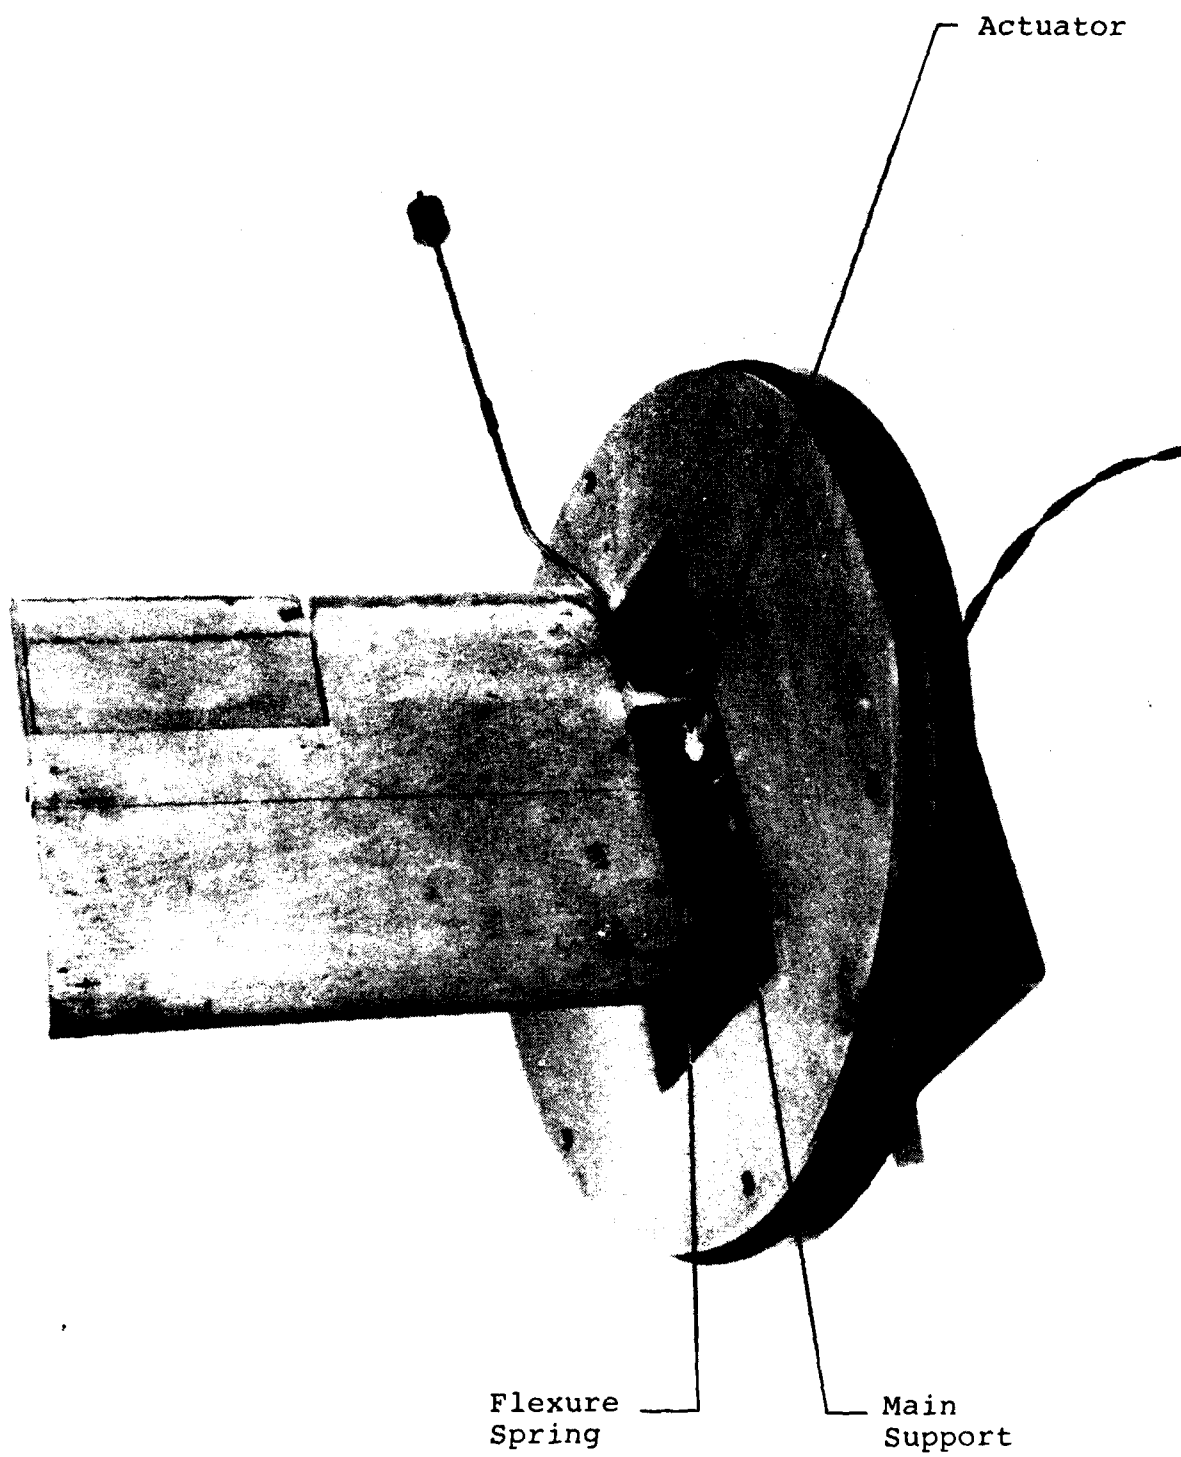


FIG. 2. MODEL MOUNTED ON REMOVABLE TUNNEL WINDOW

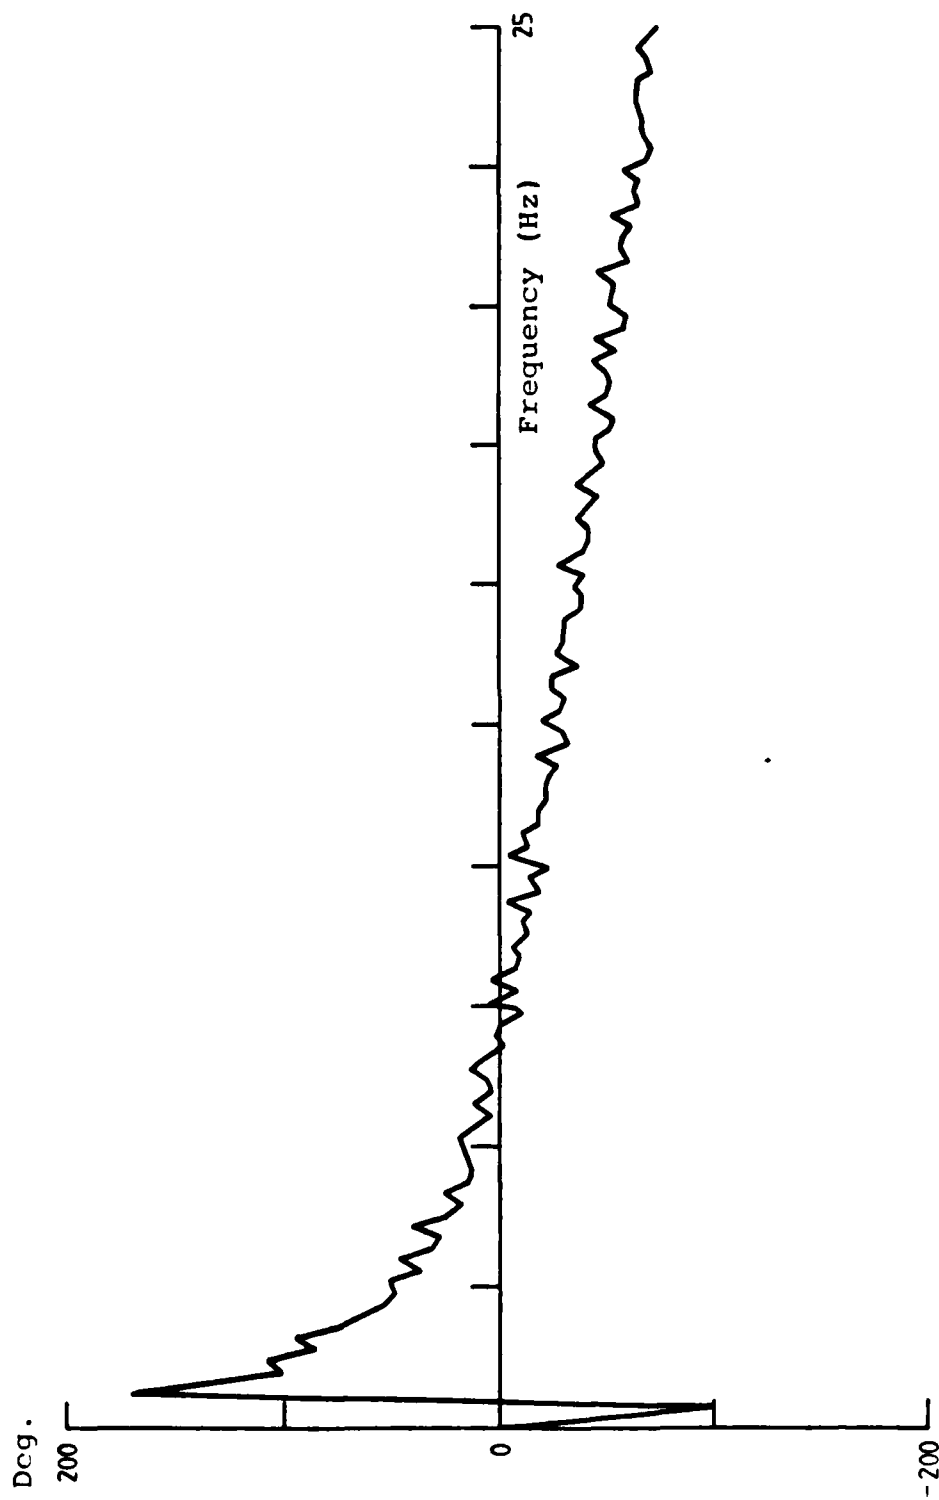


FIG. 3. PHASE DIAG OF AMP/FILT SYSTEM

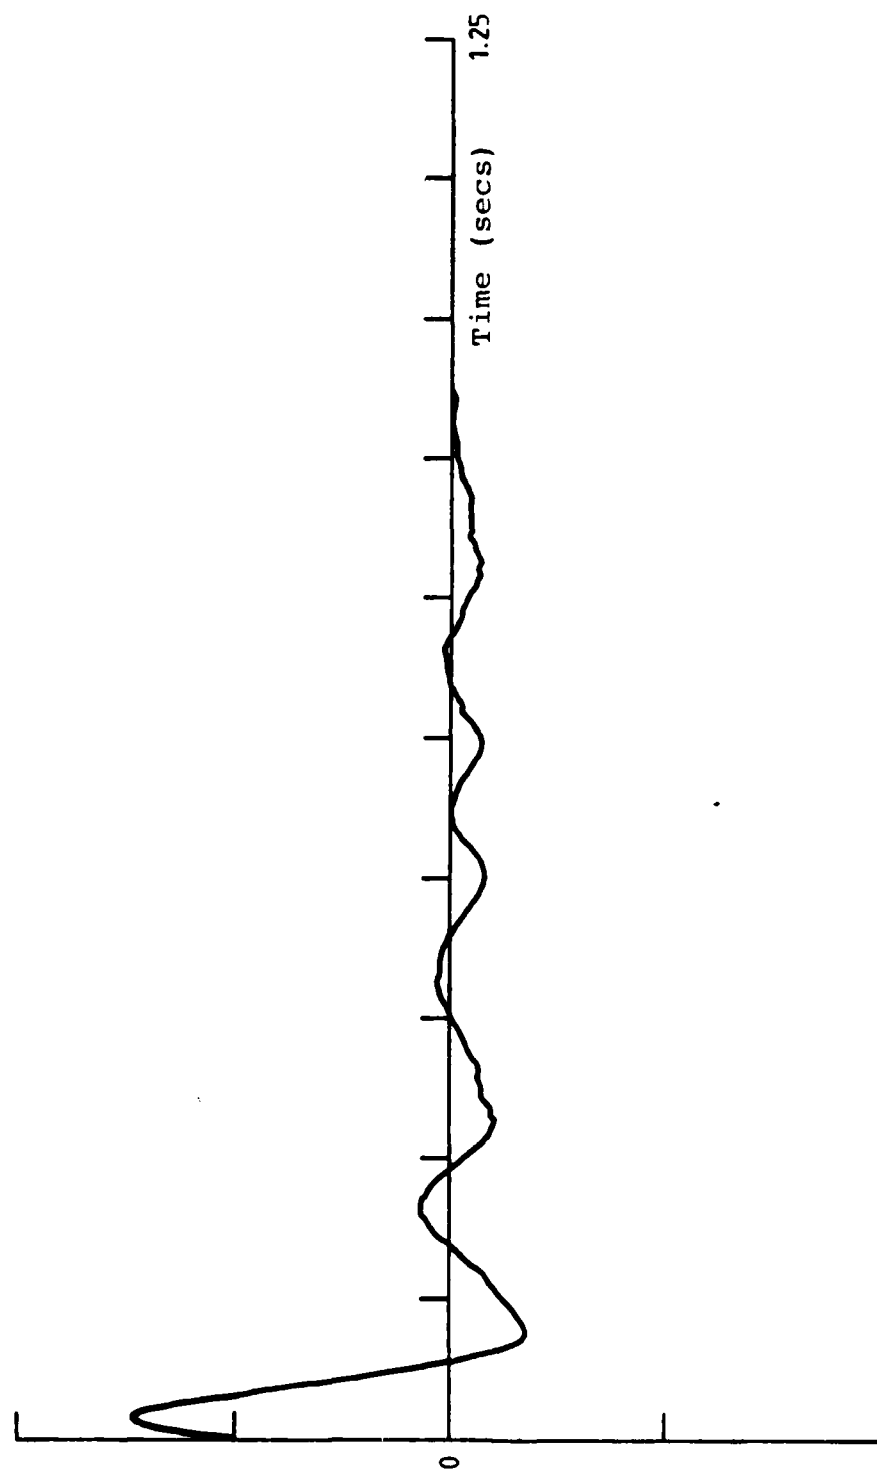


FIG. 4. DAMPING AT 14m/s

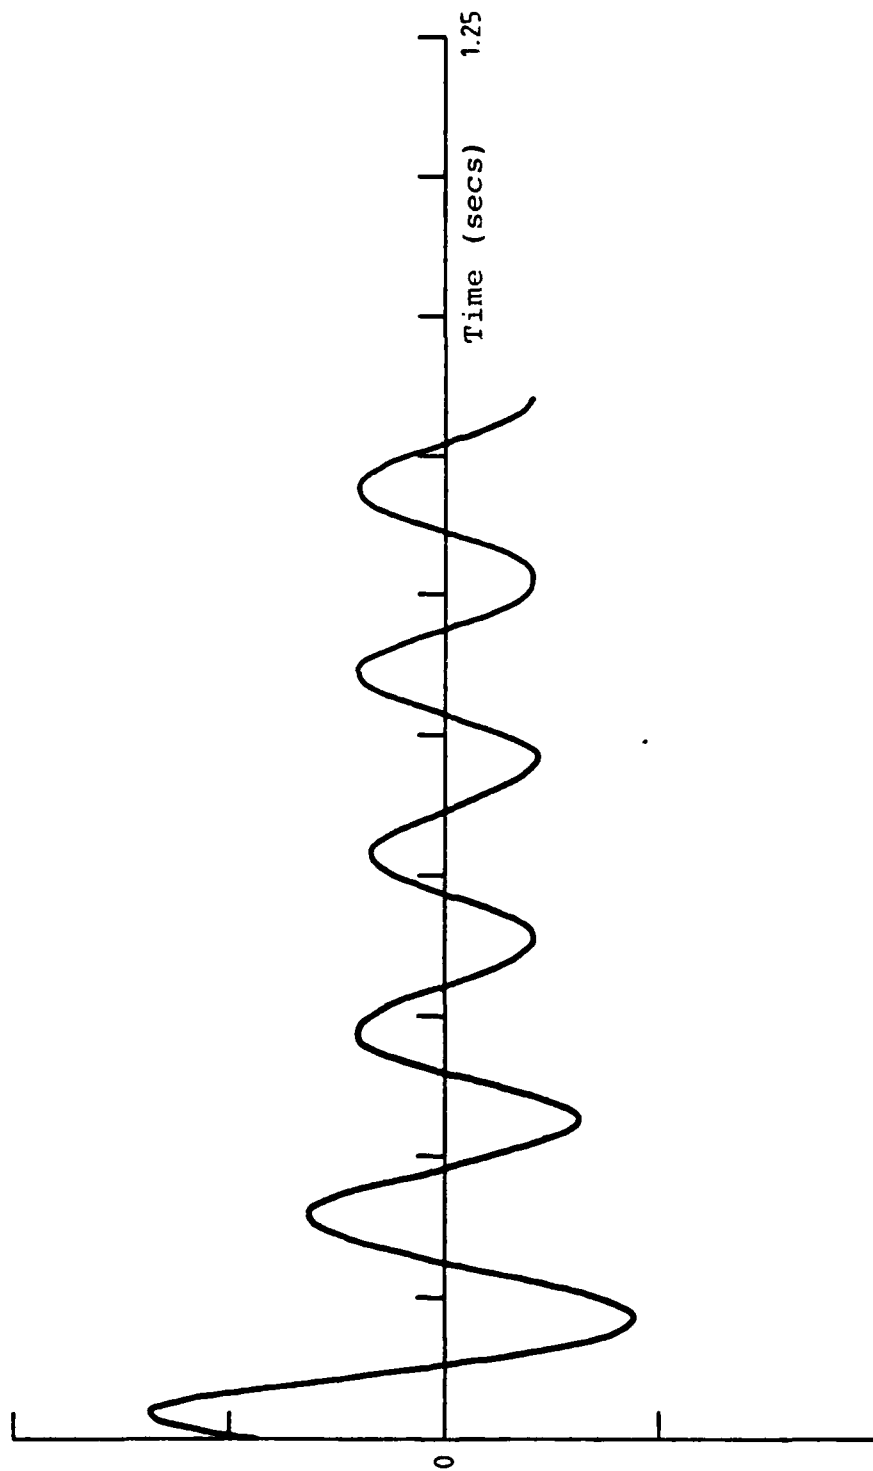


FIG. 5. DAMPING AT 16m/s

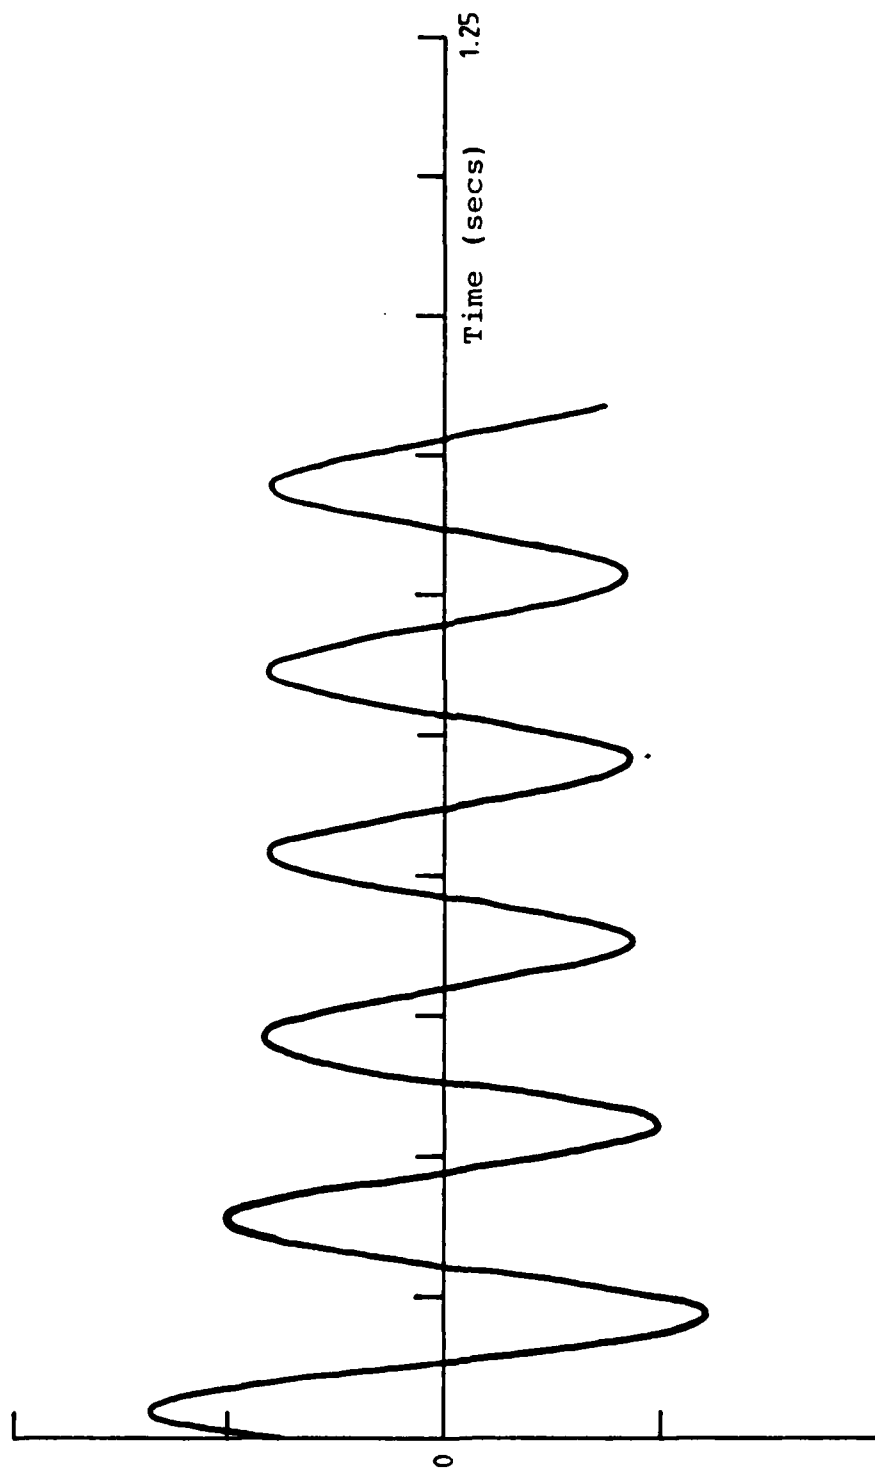


FIG. 6. DAMPING AT 17m/s

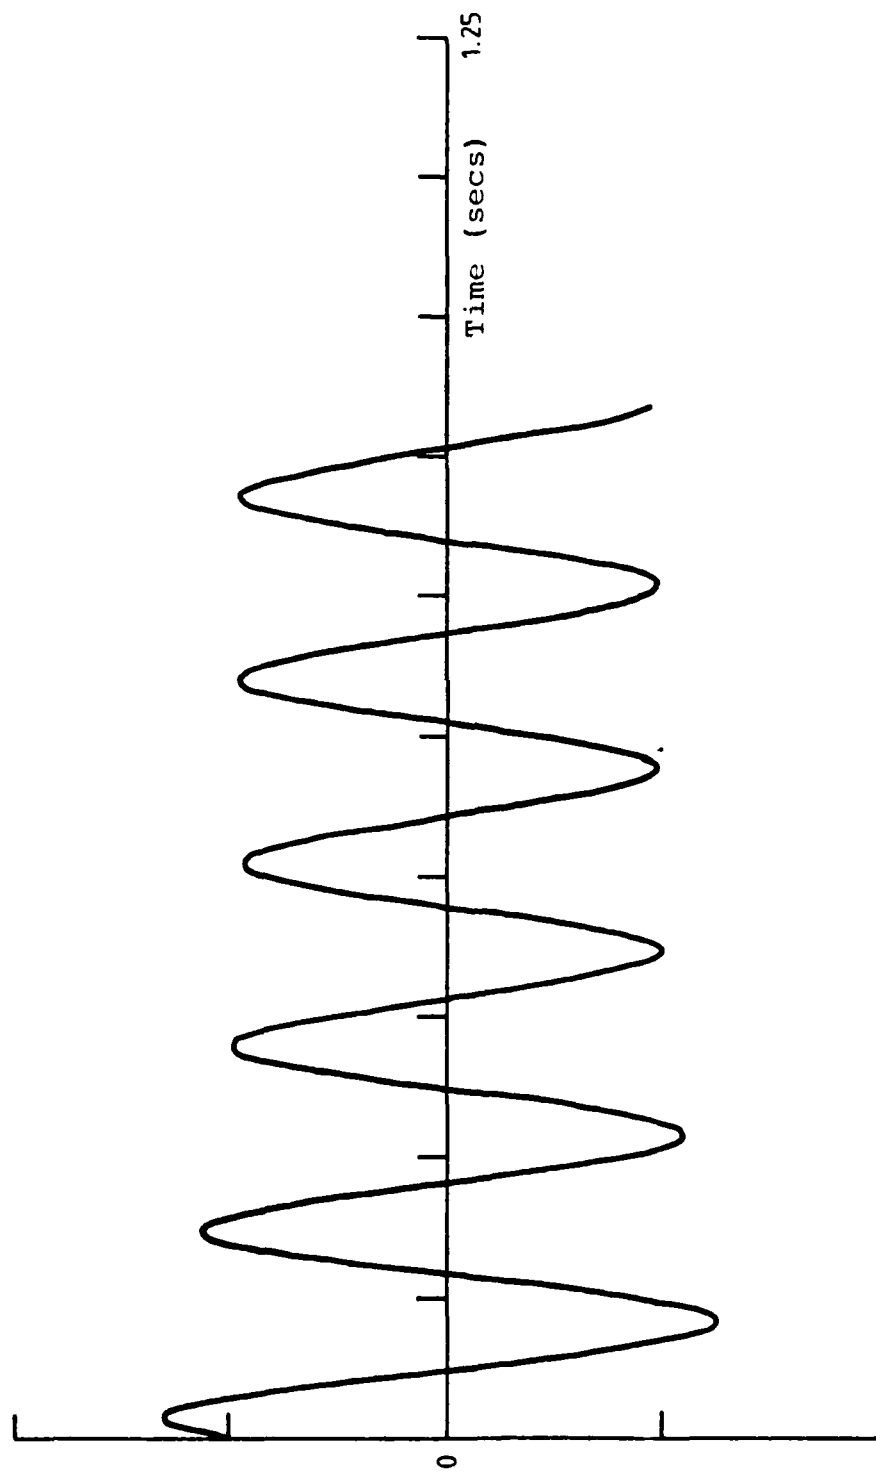


FIG. 7. DAMPING AT 18m/s

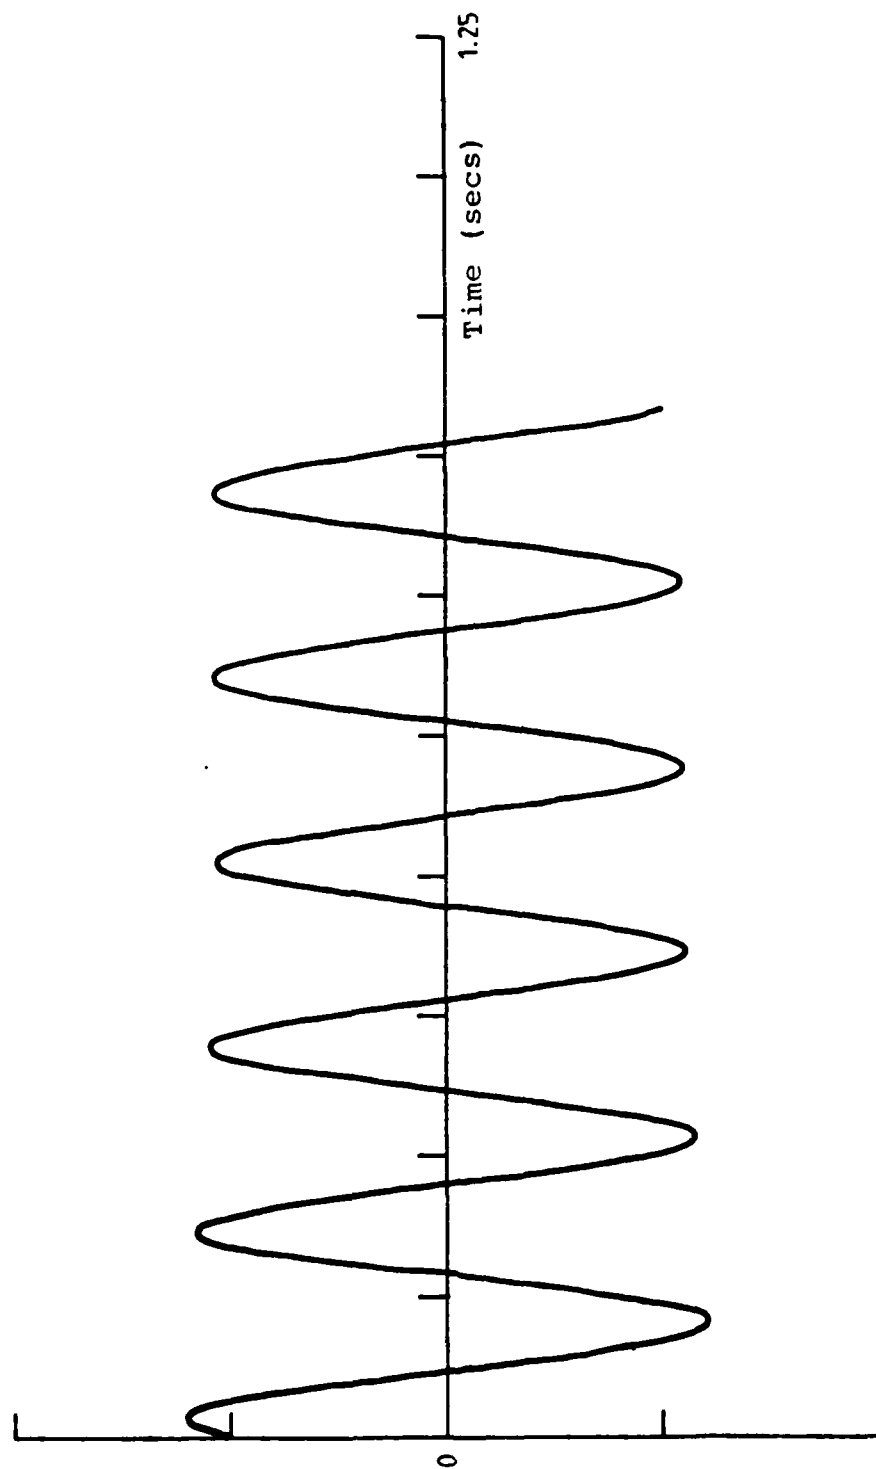


FIG. 8. DAMPING AT 19m/s

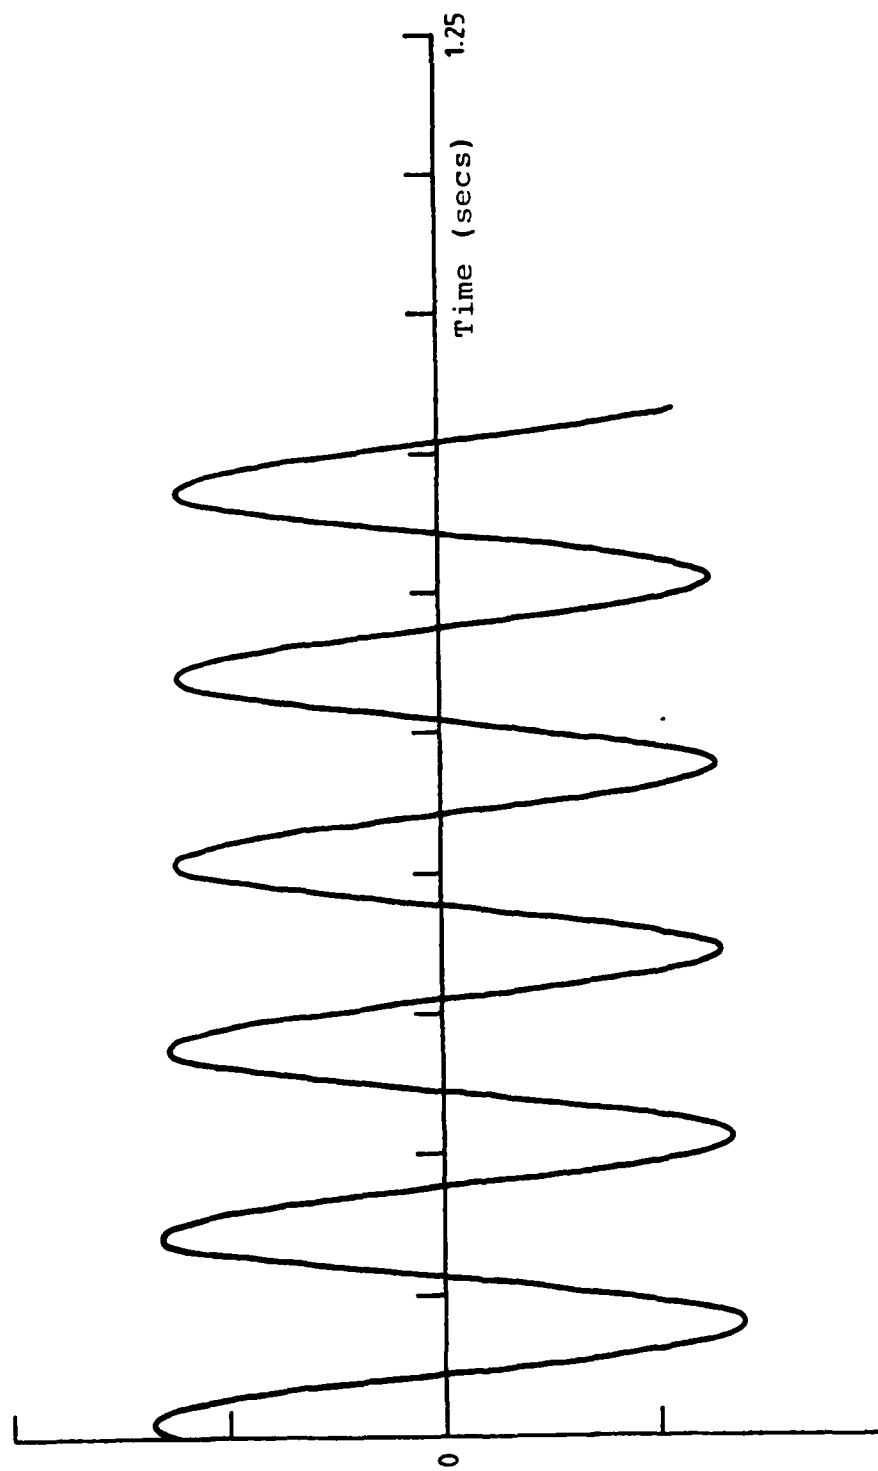


FIG. 9 DAMPING AT 19.5 m/s

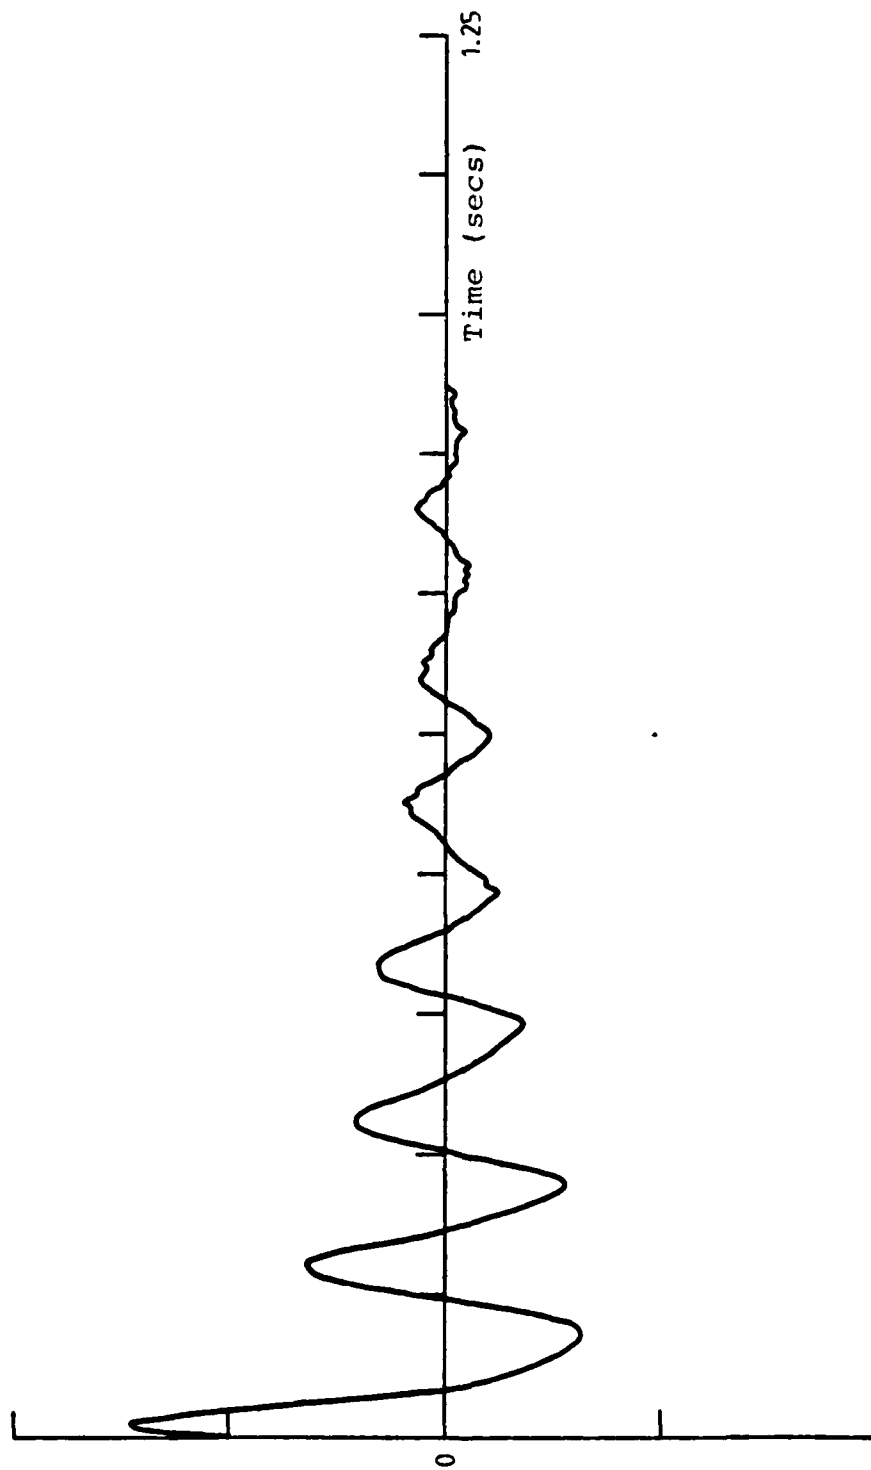


FIG. 10. DAMPING AT 18m/s - WITH CONTROL ON

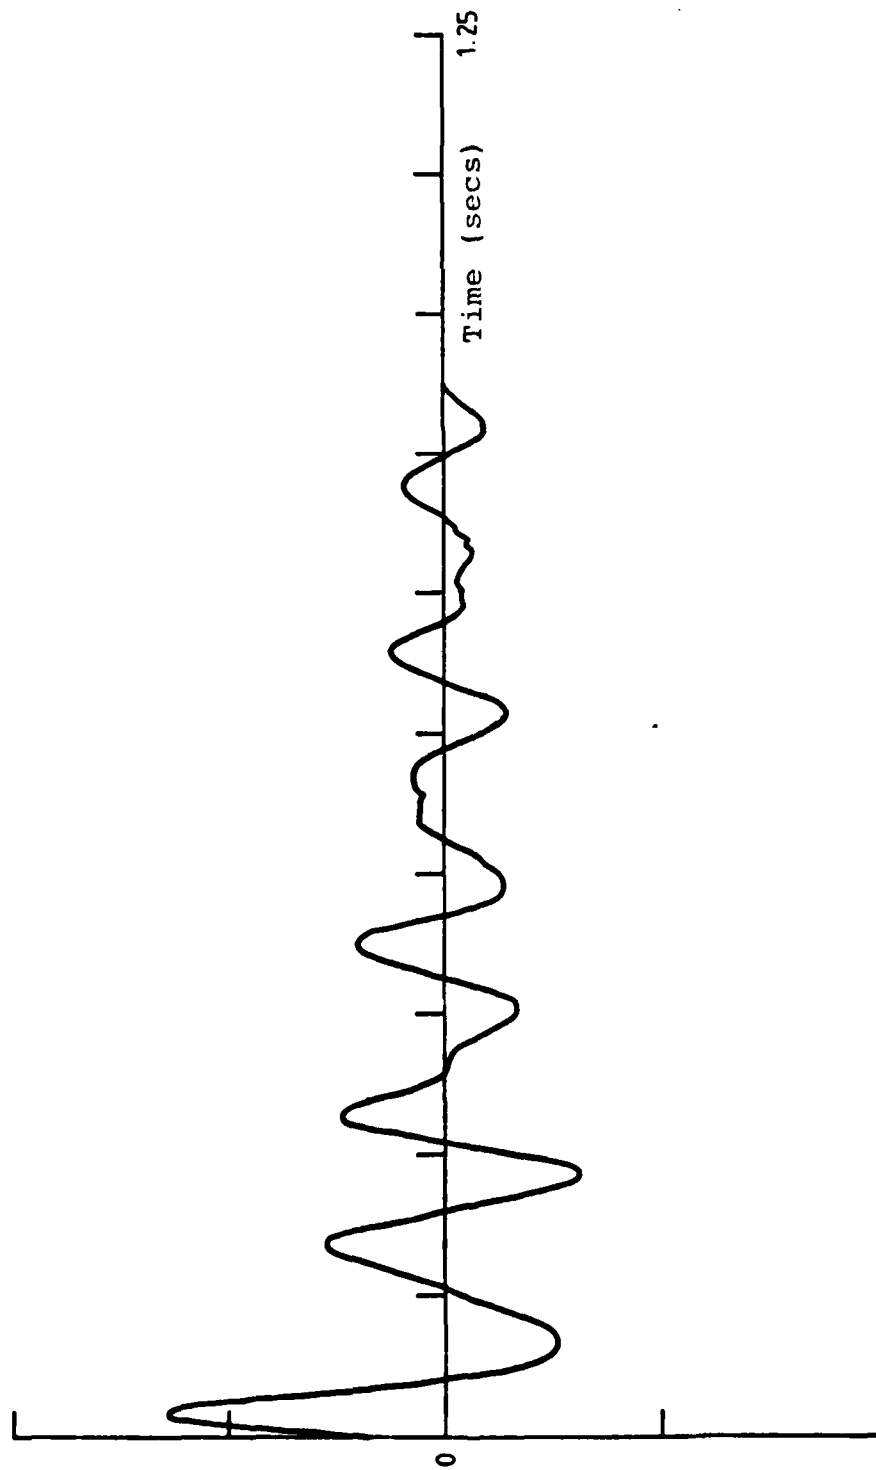


FIG. 11. DAMPING AT 18.5m/s - WITH CONTROL ON

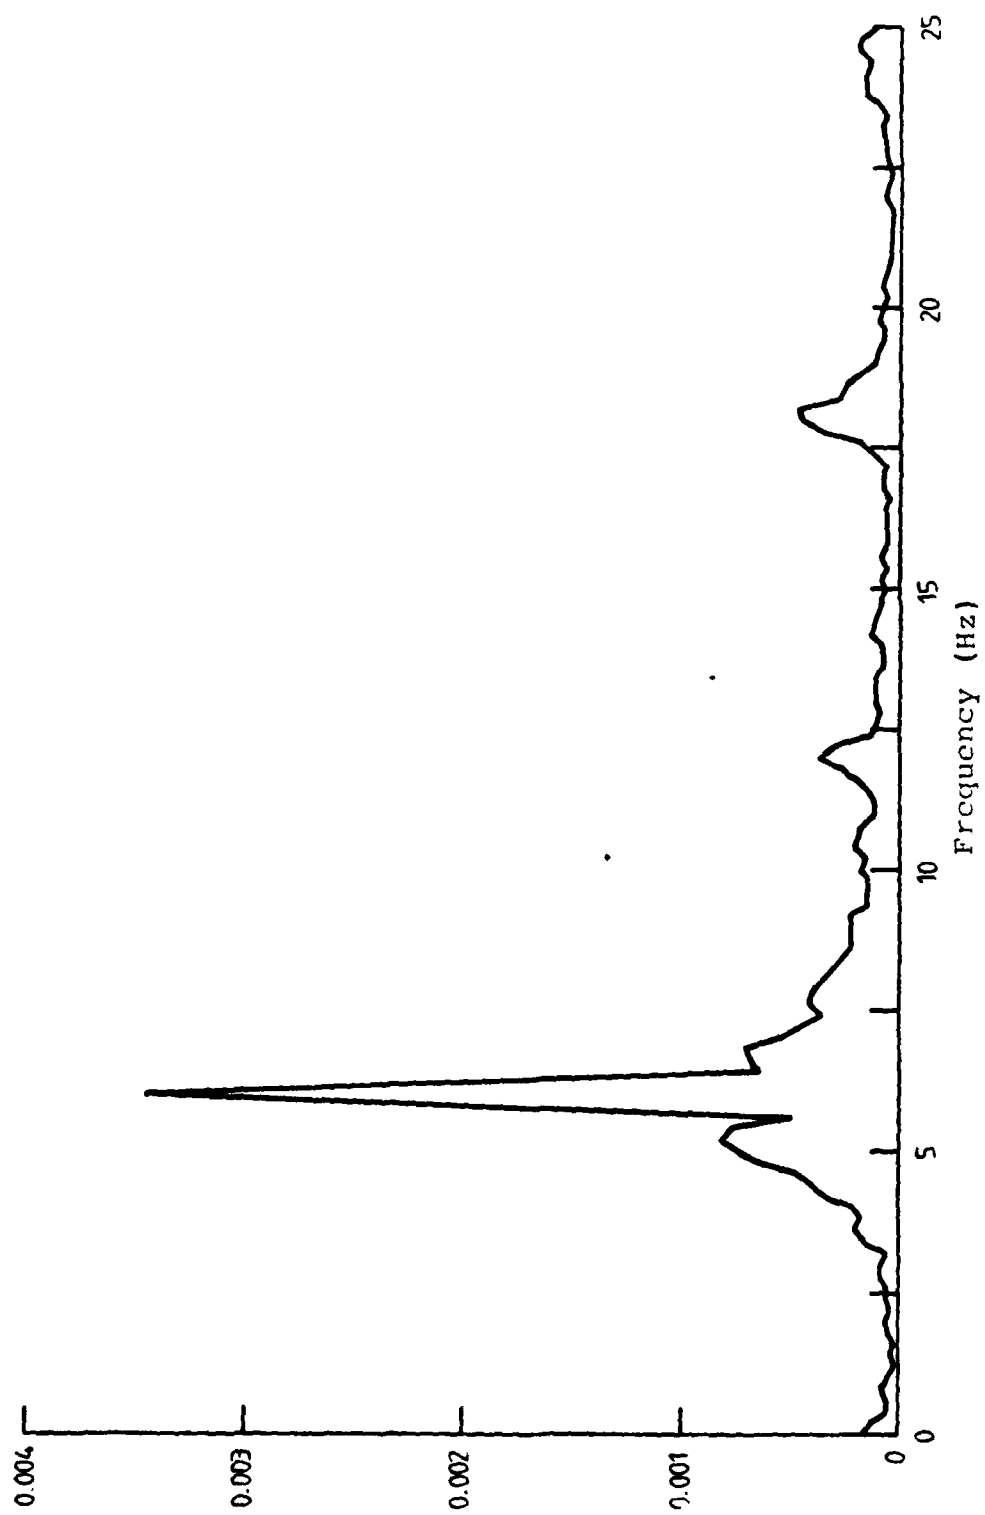


FIG. 12 LOC-L SUP-OFF
VEL-19m/s

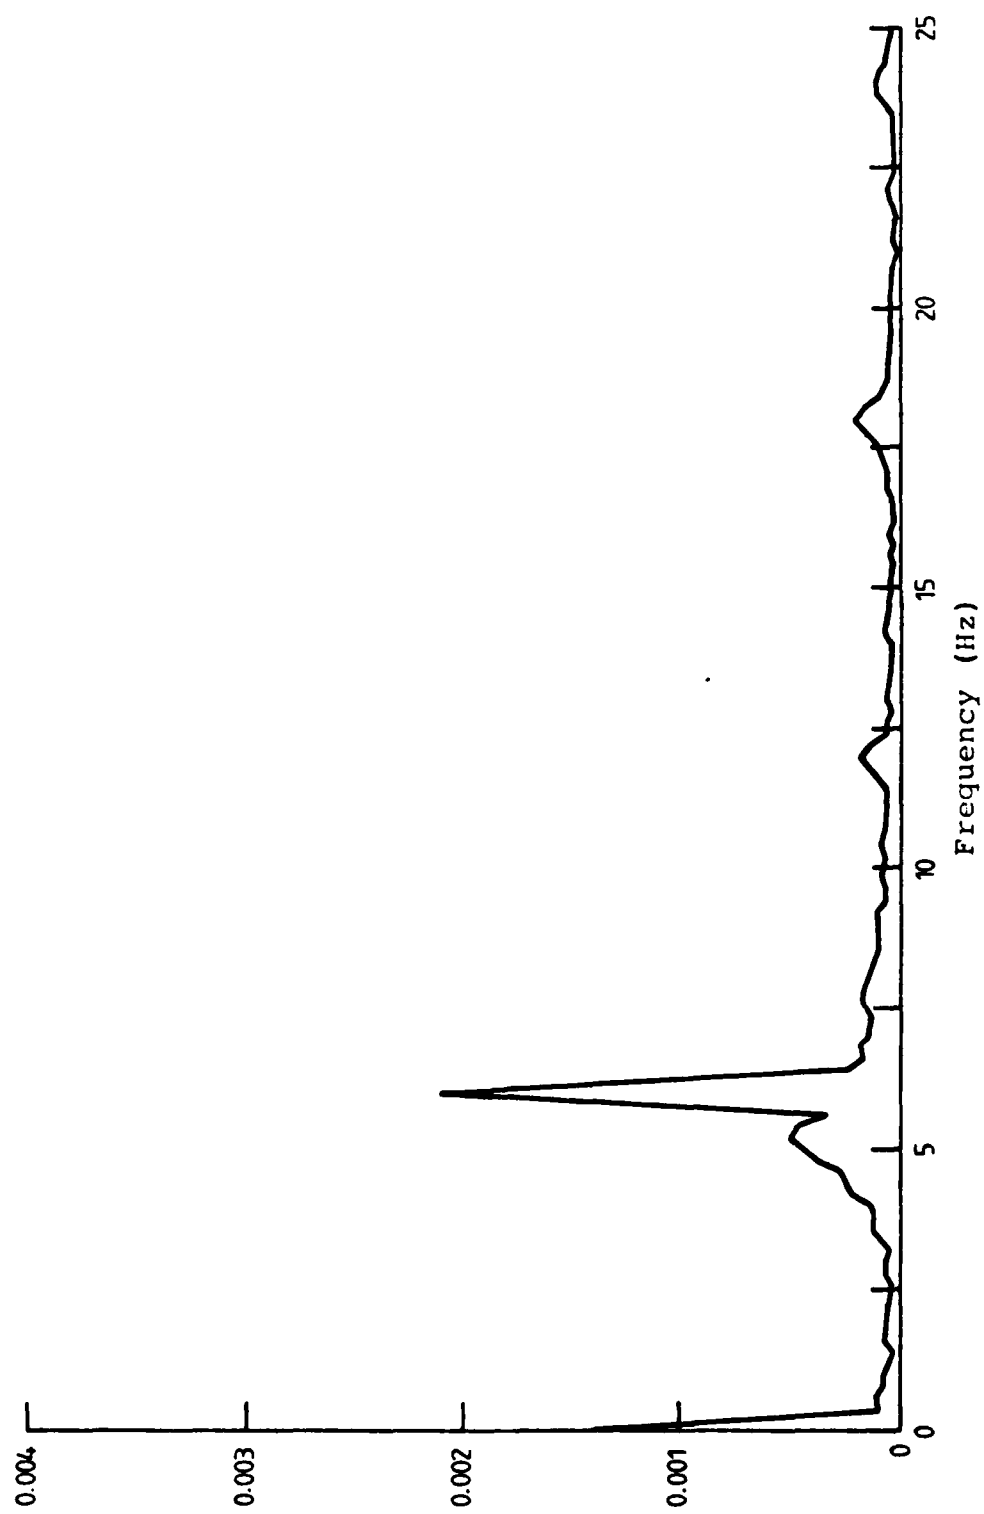


FIG. 13. LOC-M SUP-OFF
VEL-19m/s

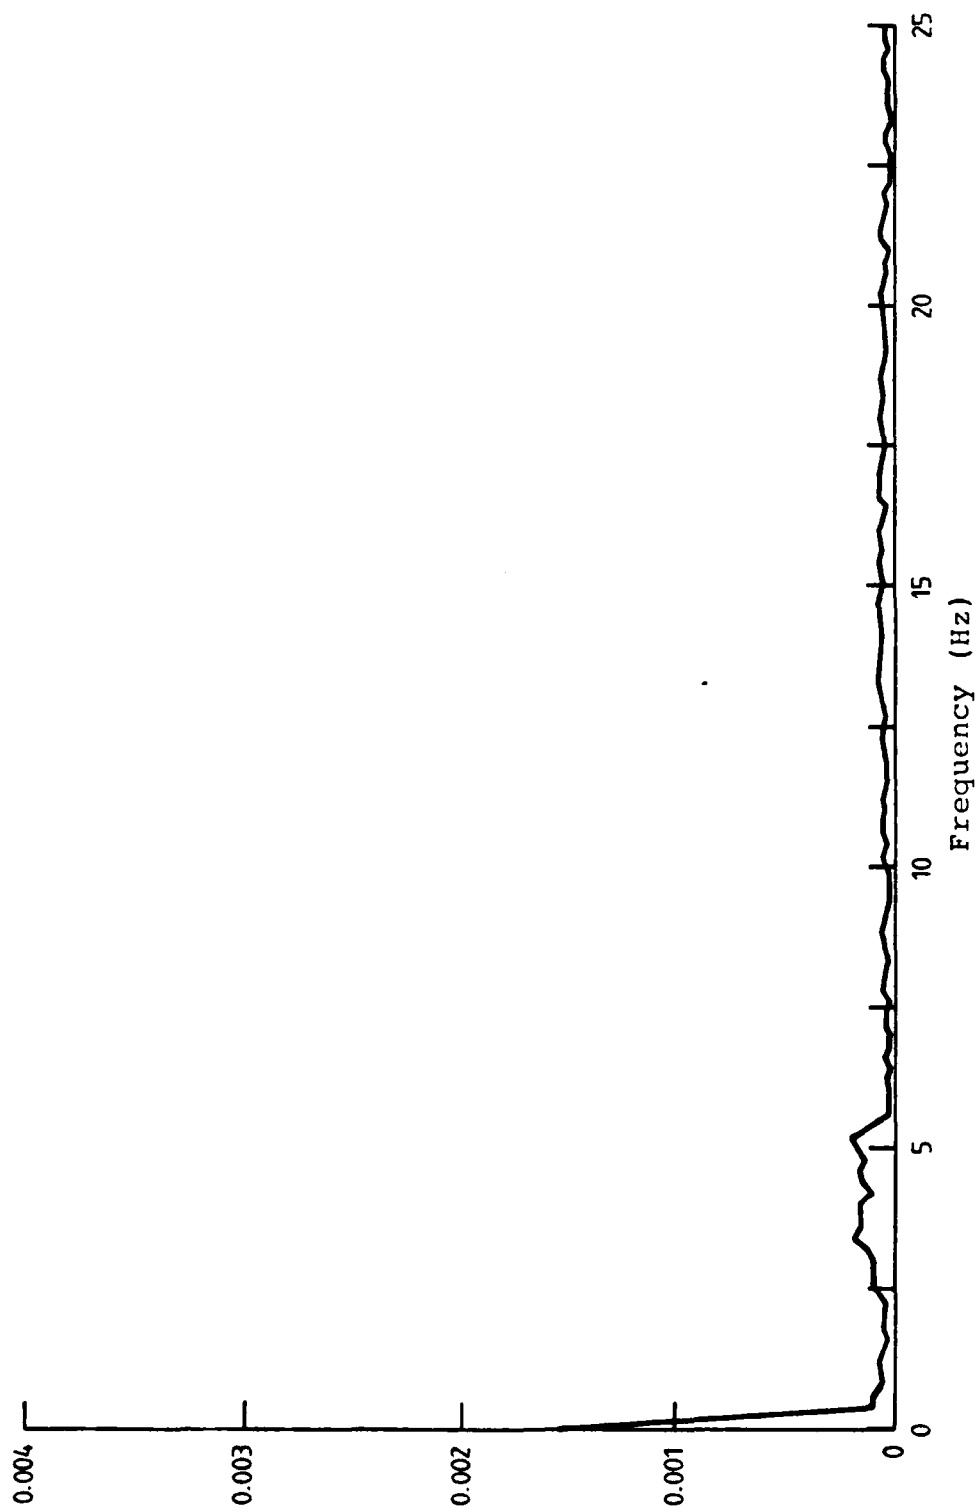


FIG. 14. LOC-M SUP-ON CONT-M 19m/s

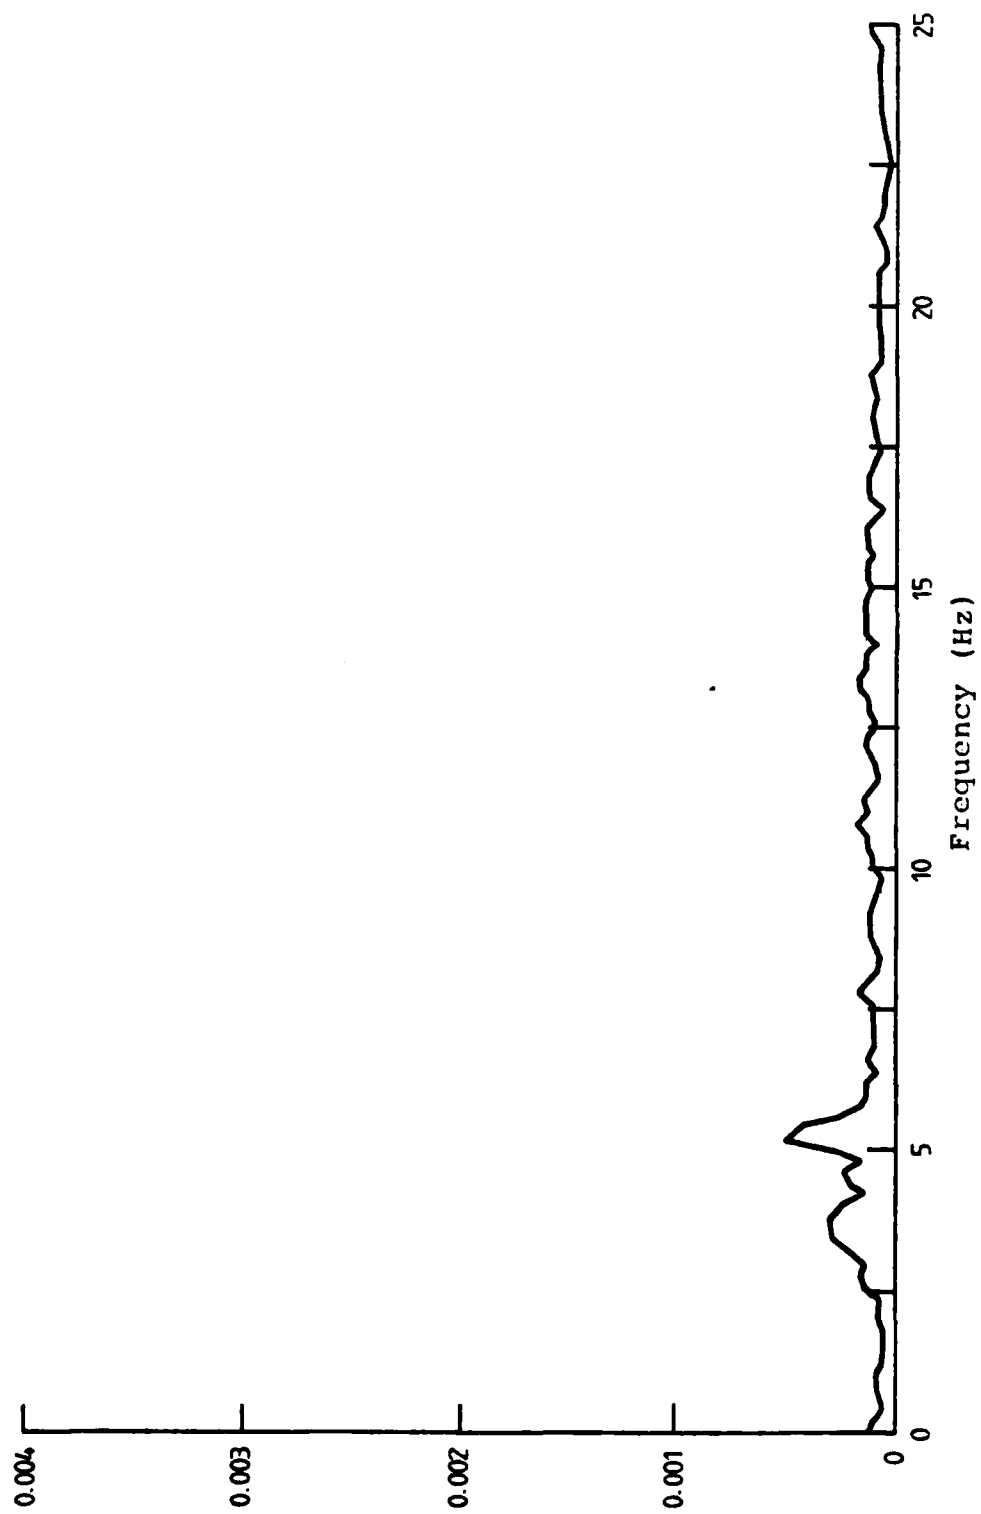


FIG. 15. LOC-L SUP-ON CONT-M 19m/s

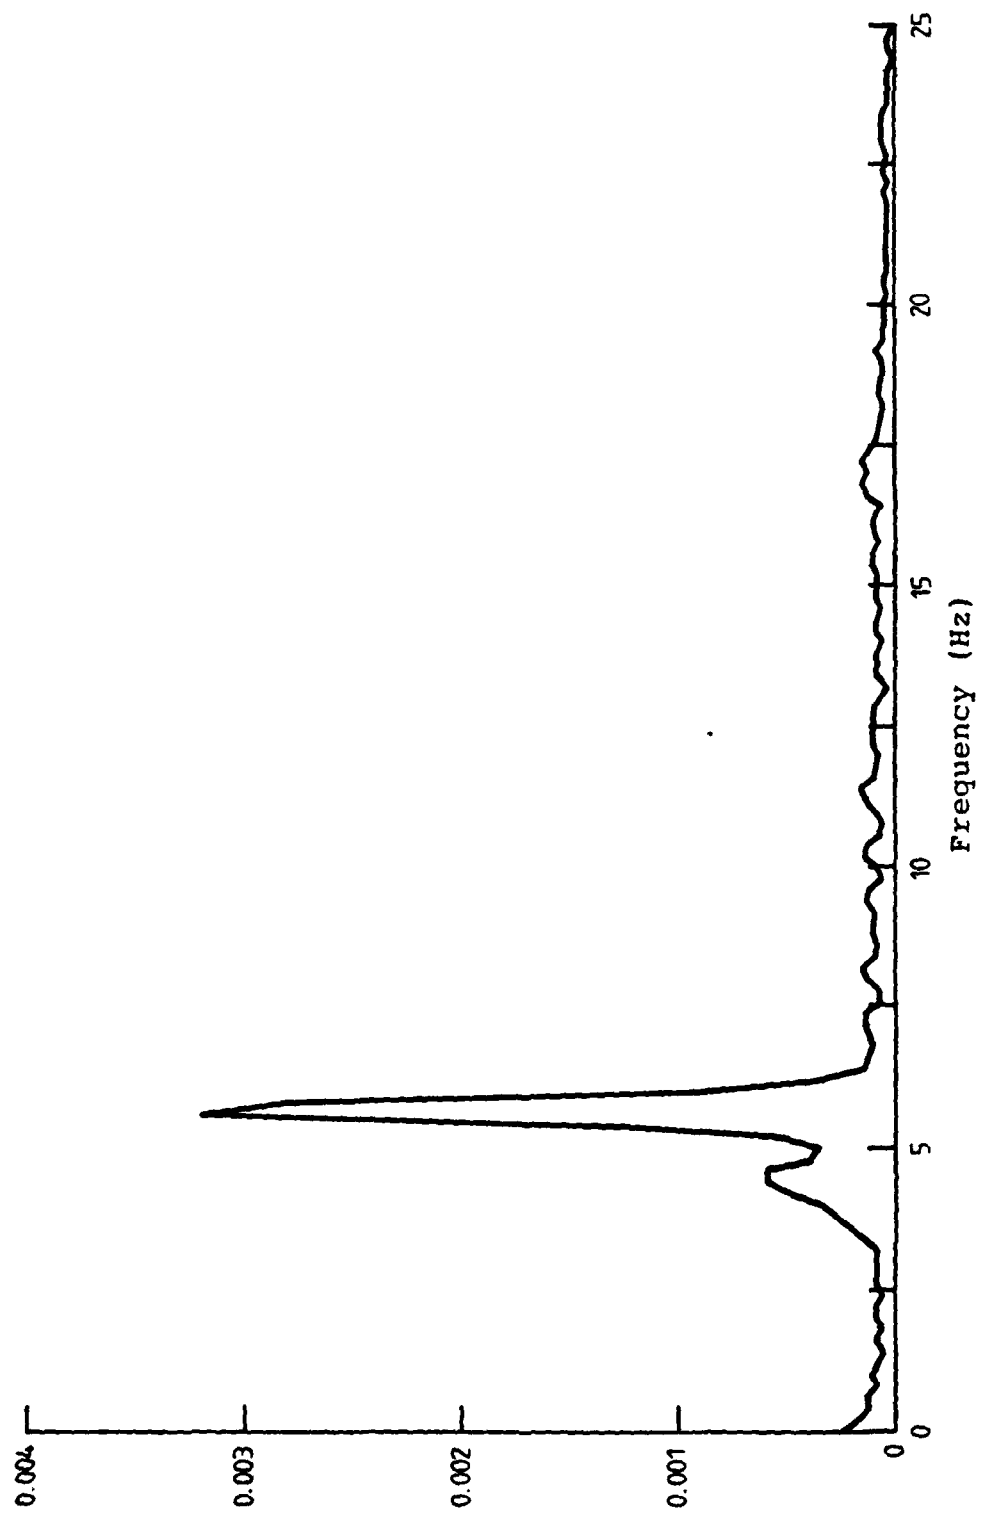


FIG. 16. LOC-M SUP-ON CONT-L 19m/s

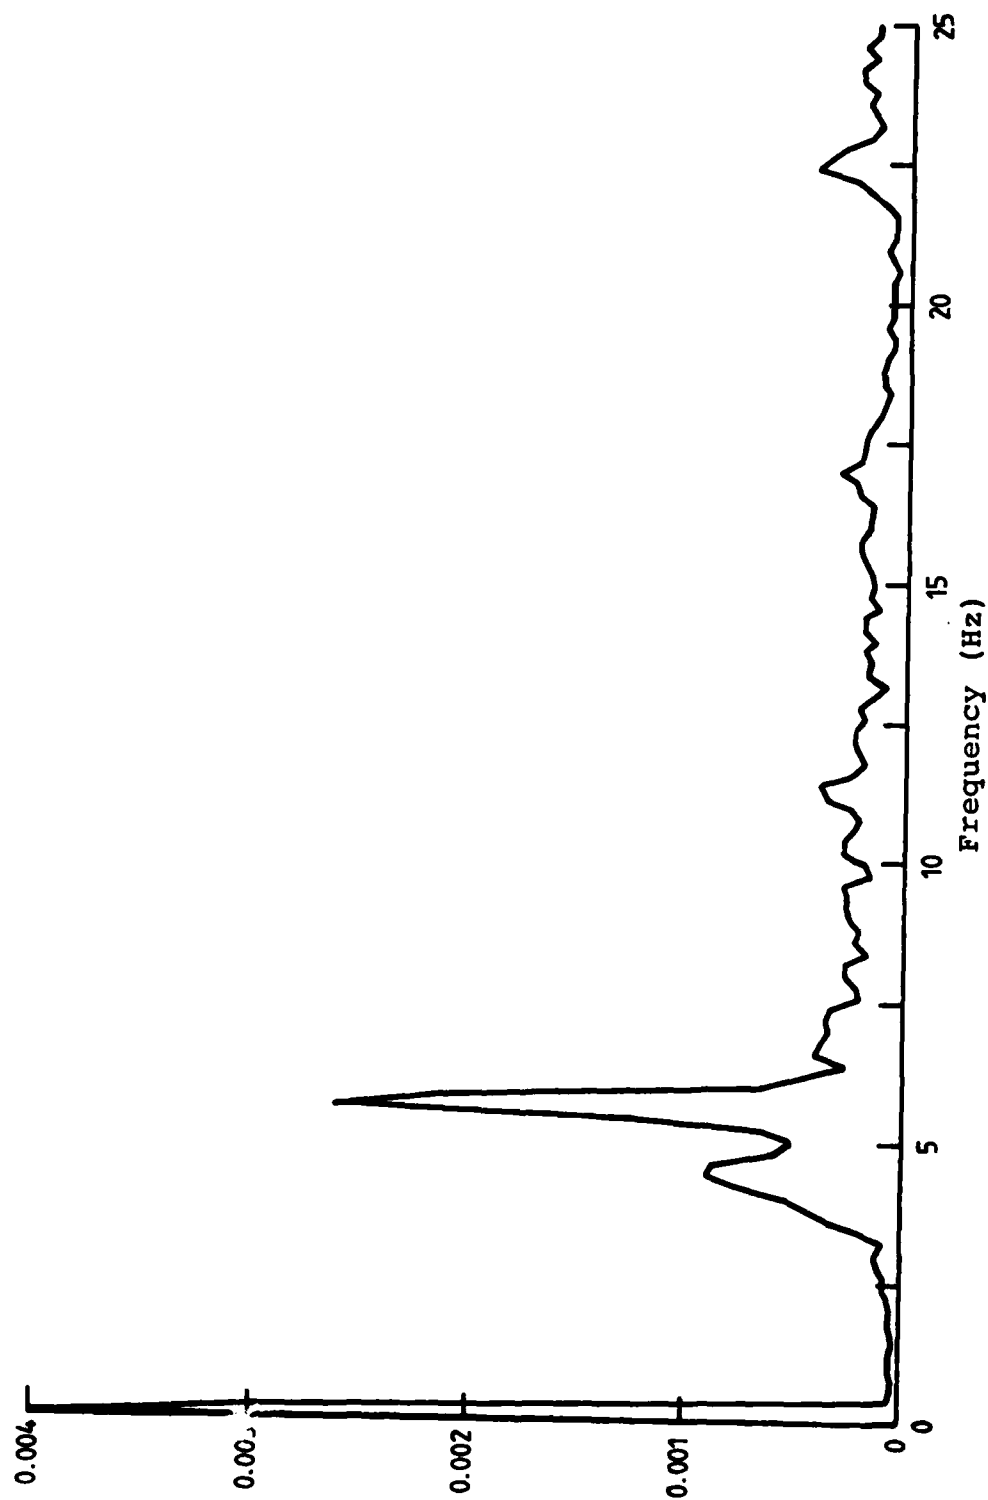


FIG. 17. LOC-L SUP-ON CONT-L 19m/s

DISTRIBUTION

AUSTRALIA

Department of Defence

Central Office

Chief Defence Scientist)
Deputy Chief Defence Scientist)
Superintendent, Science and Technology Programmes) (1 copy)
Controller, Projects and Analytical Studies)
Defence Science Adviser (U.K. (Doc Data sheet only)
Counsellor, Defence Science (U.S.A.) (Doc Data sheet only)
Defence Science Representative (Bangkok)
Defence Central Library
Document Exchange Centre, D.I.S.B. (18 copies)
Joint Intelligence Organisation
Librarian H Block, Victoria Barracks, Melbourne
Director General - Army Development (NSO) (4 copies)

Aeronautical Research Laboratories

Director
Library
Superintendent - Aerodynamics
Divisional File - Structures
Author: A. Goldman
R. Jones
P.A. Farrell
T.G. Ryall
B. Emslie
W. Waldman
W.B. Duncan

Materials Research Laboratories

Director/Library

Defence Research Centre

Library

Air Force Office

Air Force Scientific Adviser
Aircraft Research and Development Unit
Scientific Flight Group
Library
Technical Division Library
RAAF Academy, Point Cook

Central Studies Establishment

Information Centre

.../contd.

DISTRIBUTION (CONT.)

Department of Defence Support

Government Aircraft Factories

Manager
Library

Department of Aviation

Library
Flying Operations and Airworthiness Division

Statutory and State Authorities and Industry

Trans-Australia Airlines, Library
Qantas Airways Limited
SEC of Vic., Herman Research Laboratory, Library
Ansett Airlines of Australia, Library
Commonwealth Aircraft Corporation, Library
Hawker de Havilland Aust. Pty Ltd, Bankstown, Library
Swannell Consultants, Perth
Transavia Pty Ltd, Mr J. Corby

Universities and Colleges

Adelaide	Barr Smith Library Professor of Mechanical Engineering
Latrobe	Library
Melbourne	Engineering Library
Monash	Hargrave Library
Newcastle	Library
Sydney	Engineering Library
N.S.W.	Physical Sciences Library Professor R.A.A. Bryant, Mechanical Engineering
Queensland	Library
Tasmania	Engineering Library
Western Australia	Library Associate Professor J.A. Cole, Mechanical Engineering
R.M.I.T.	Library Dr H. Kowalski, Mech. & Production Engineering

SPARE COPIES (10)

TOTAL (83 copies)

Department of Defence
DOCUMENT CONTROL DATA

1. a. AR No AR-003-020	1 b. Establishment No ARL-STRUC-TM-377	2. Document Date April 1984	3. Task No DST 82/053
4. Title THE DESIGN AND OPERATION OF A SIMPLE LOW-SPEED FLUTTER-SUPPRESSION MODEL.		5. Security a. document UNCLASSIFIED b. title c. abstract U U	6. No Pages 6
		7. No Refs 2	
8. Author(s) A. GOLDMAN		9. Downgrading Instructions —	
10. Corporate Author and Address Aeronautical Research Laboratories, P.O. Box 4331, MELBOURNE, VIC. 3001		11. Authority (as appropriate) a. Sponsor b. Security c. Downgrading d. Approval —	
12. Secondary Distribution (of this document) Approved for Public Release.			
Overseas enquirers outside stated limitations should be referred through ASDIS, Defence Information Services Branch, Department of Defence, Campbell Park, CANBERRA ACT 2601			
13. a. This document may be ANNOUNCED in catalogues and awareness services available to ... No Limitations.			
13. b. Criterion for other purposes (ie casual announcement) may be (select) unrestricted (or) as for 13 a.			
14. Descriptors Flutter Wind tunnel models Active control			15. COSATI Group 01010 14020
16. Abstract A dynamic model has been developed for use in a small low-speed wind tunnel. A feedback system has been used to drive a control surface in order to suppress flutter. Details of the model and results of preliminary tests are presented.			

2

This page is to be used to record information which is required by the Establishment for its own use but which will not be added to the DISTIS data base unless specifically requested.

16 Abstract (Contd)

17. Imprint

Aeronautical Research Laboratories, Melbourne.

18 Document Series and Number

Structures Technical
Memorandum 377

19. Cor: Code

23-7000

20 Type of Report and Period Covered

21. Computer Programs Used

22. Establishment File Ref(s)

END

FILMED

4-85

DTIC