

AD-A159 921

ONE-DIMENSIONAL MODEL FOR MUD FLOWS(U) HYDROLOGIC  
ENGINEERING CENTER DAVIS CA D R SCHAMBER ET AL. OCT 85  
HEC-TP-109

1/1

UNCLASSIFIED

F/G 8/13


ML



END

FILED

DTM



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS - 1963 - A



**US Army Corps  
of Engineers**

**The Hydrologic  
Engineering Center**

**AD-A159 921**

# **One-Dimensional Model For Mud Flows**

by

**D. R. Schamber**

**R. C. MacArthur**

**DTIC FILE COPY**

**Technical Paper No. 109**

**October 1985**

**DTIC  
ELECTE**  
OCT 09 1985  
**S D**  
E

This document has been approved  
for public release and sale; its  
distribution is unlimited.

**85 10 08 001**

Papers in this series have resulted from technical activities of the Hydrologic Engineering Center. Versions of some of these have been published in technical journals or in conference proceedings. The purpose of this series is to make the information available for use in the Center's training program and for distribution within the Corps of Engineers.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

# ONE-DIMENSIONAL MODEL FOR MUD FLOWS<sup>1</sup>

David R. Schamber<sup>2</sup>, A.M. ASCE and Robert C. MacArthur<sup>3</sup>, A.M. ASCE

## ABSTRACT

In this paper a transient, one-dimensional model for dynamic flood routing of mud flows is presented. The governing equations of mass and momentum conservation incorporate laminar flow resistance effects and utilize a power law expression to represent the cross-sectional geometry of the channel. The equations are solved by the method of characteristics on fixed time lines and program execution is performed on a micro-computer. Numerical results are compared with published experimental data for a laminar flow, dambreak problem of a viscous oil.

## INTRODUCTION

During the spring of 1983, widespread landslides and debris flows caused an estimated 250 million dollars in damage in the state of Utah. Along a thirty-mile length of the Wasatch Front Mountains, over ninety significant landslides and debris flows sent torrents of mud, debris and water down steep canyons onto residential areas located on alluvial fans at the base of the mountains.

The ability to model these types of events is clearly needed and will be useful in preparing maps which delineate potential flood damage areas. The purpose of this paper is to present a one-dimensional mathematical model which can be used to route a mudflow down a confining channel. Equations of mass and momentum conservation are presented, with frictional resistance terms, which account for the laminar flow of a Bingham plastic fluid. The equations are solved by the method of characteristics on fixed time lines. To verify the model, comparison is made with experimental results of a laminar flow dambreak problem.

## GOVERNING EQUATIONS

The flow is governed by the equations of mass and momentum conservation which are given respectively by [6]

<sup>1</sup>Presented at the ASCE Hydraulic Division Specialty Conference, Hydraulics and Hydrology in the Small Computer Age, Orlando, Florida,

<sup>2</sup>Associate Professor, Civil Engineering Department, University of Utah, Salt Lake City, Utah 84112

<sup>3</sup>Research Hydraulic Engineer, U. S. Army Corps of Engineers, The Hydrologic Engineering Center, 609 Second Street, Davis, California 95616

$$A \frac{\partial V}{\partial x} + VB \frac{\partial y}{\partial x} + B \frac{\partial y}{\partial t} + VA_x^y = 0 \quad (1)$$

$$\frac{\partial V}{\partial t} + V \frac{\partial V}{\partial x} + g \frac{\partial y}{\partial x} = g(S_0 - S_f) \quad (2)$$

in which  $x$  = coordinate along the channel;  $t$  = time;  $A$  = cross-sectional area of flow;  $V$  = average velocity;  $B$  = channel top width;  $y$  = flow depth;  $A_x^y$  = rate of change of area with  $x$  for a constant depth (nonprismatic term);  $g$  = gravitational constant;  $S_0$  = slope of the channel bottom; and  $S_f$  = resistance slope.

In most hydraulic applications, the flow is turbulent and  $S_f$  is generally given by Manning's equation. The flow of mud presents an entirely different situation. DeLeon and Jeppson [1] summarize the data from a number of debris flows, mud flows and pipe sludge flows and conclude that the flow is usually laminar. By fitting a line through a number of data points, these authors postulate a power law relation between the Chezy coefficient and the flow Reynolds number. Jeyapalan *et al.* [2], in their analysis of mine tailing dam failures, develop an expression for  $S_f$  by analyzing the laminar flow of materials with Bingham plastic fluid characteristics. Other researchers, [1,5] have noted a similar behavior for mud flows, which often exhibit plug like flow with a critical yield stress. In this work, the resistance term for a Bingham plastic fluid is adopted [2]. Mathematically,

$$S_f = \frac{2\eta_p Vh^2}{\gamma y^2 R^2} + \frac{\tau_y h}{\gamma y R} \quad (3)$$

in which  $\eta_p$  = plastic viscosity;  $\gamma$  = unit weight of the fluid;  $\tau_y$  = yield stress of the fluid;  $h$  = hydraulic depth; and  $R$  = hydraulic radius. The first term on the right hand side of Eq. 3 is similar in form to the expression postulated by DeLeon and Jeppson [1].

Equations 1 and 2 are hyperbolic in nature and have the property that, through linear combination, they can be reduced to equations involving differentiation in one less direction than the original equations [6]. This characteristic form for Eqs. 1 and 2 is given by

$$\frac{d}{dt} (V \pm \omega) = g(S_0 - S_f) \mp \frac{c}{A} VA_x^y \mp (V \pm c) \int_0^y \frac{g}{c^2} \frac{\partial c}{\partial x} d\eta \quad (4)$$

$$\frac{dx}{dt} = V \pm c \quad (5)$$

in which  $c$  = celerity of an elementary gravity wave is given by

$$c = \left(\frac{gA}{B}\right)^{1/2} \quad (6)$$

and  $\omega$  = Escoffier stage variable is given by

$$\omega = \int_0^y \frac{q}{c} d\eta \quad (7)$$

Eqs. 4 comprise a forward (+) and a backward (-) characteristic equation valid on the curves in the  $x$ - $t$  plane defined by Eqs. 5, respectively.

A power law expression is used to represent the top width and area in Eqs. 4 and 5. Mathematically,

$$B = (k_L + k_R) y^m \quad (8)$$

$$A = \left( \frac{k_L + k_R}{m + 1} \right) y^{m+1} \quad (9)$$

Here  $k_L$  and  $k_R$  define the left and right width at any depth  $y$  and the exponent  $m$  defines the shape of the cross-section. The parameters  $k_L$ ,  $k_R$  and  $m$  can be specified functions of distance  $x$  to capture the nonprismatic nature of the channel. Using the definitions of Eqs. 8 and 9, Eqs. 6 and 7 reduce to

$$c = \left( \frac{qy}{m + 1} \right)^{\frac{1}{2}} \quad (10)$$

$$\omega = 2[g(m + 1)y]^{\frac{1}{2}} \quad (11)$$

### NUMERICAL SOLUTION

The numerical solution of Eqs. 4 and 5 is developed with reference to Fig. 1. At a sequence of points  $x_k$ ,  $k = 1, 2, \dots, n$ , at some time  $t_i$ , the solution is known. It is desired to find the solution for the points  $x_k$  on time line  $t_{i+1}$ , an interval  $\delta t$  later. The characteristic

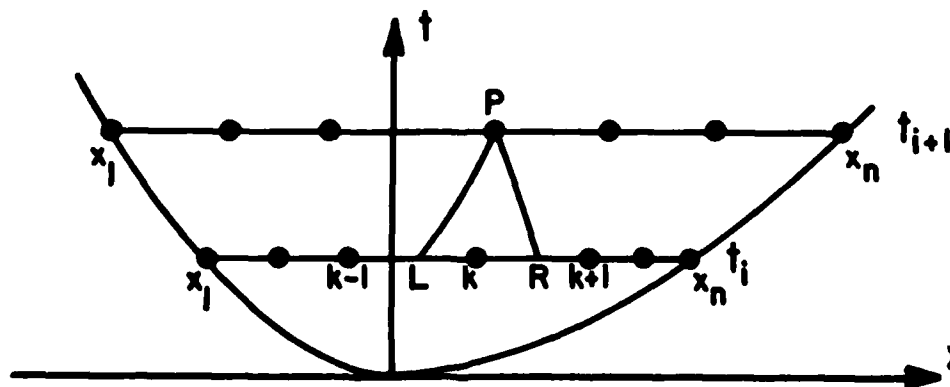


Fig. 1 - Characteristics Computational Scheme.



ession For	
IS GRA&I	<input checked="" type="checkbox"/>
IC TAB	<input type="checkbox"/>
announced	<input type="checkbox"/>
x.stification	

istribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

curves in Fig. 1, i.e., L-P and R-P are approximated by parabolas in the x-t plane. With this approximation, the finite difference form of Eqs. 5 is given by

$$\frac{x_p - x_L}{\delta t} = \lambda_L (V_L + c_L) + \lambda_p (V_p + c_p) \quad (12)$$

$$\frac{x_p - x_R}{\delta t} = \lambda_R (V_R - c_R) + \lambda_p (V_p - c_p) \quad (13)$$

in which  $\lambda_L = \lambda_p = \lambda_R = \frac{1}{2}$ . The forward and backward version of Eqs. 4 are also written in finite difference form. Mathematically,

$$\frac{(V_p + \omega_p) - (V_L + \omega_L)}{\delta t} = \lambda_L F_L^+ + \lambda_p F_p^+ \quad (14)$$

$$\frac{(V_p - \omega_p) - (V_R - \omega_R)}{\delta t} = \lambda_R F_R^- + \lambda_p F_p^- \quad (15)$$

in which

$$F^\pm = g(S_0 - S_f) \mp \frac{c}{A} VA_x^y \mp (V \pm c) \int_0^y \frac{g}{c^2} \frac{\partial c}{\partial x} dn \quad (16)$$

The set of four nonlinear equations, Eqs. 12-15, determines the locations of points L and R as well as  $V_p$  and  $y_p$ . The variation of  $y_L$ ,  $V_L$ ,  $y_R$  and  $V_R$  is determined by parabolic interpolation along time line  $t_i$ . A simple search procedure assures that the interpolation nodes  $(x_{k-1}, x_k, x_{k+1})$  always straddle the points in question, so that extrapolation is avoided.

Eqs. 12-15 are solved iteratively by Newton's method [4]. A first guess to the solution is found by solving a linear version of Eqs. 12-15 in which  $\lambda_L = \lambda_R = 1$  and  $\lambda_p = 0$ . The equations are solved at a number of points between  $x_1$  and  $x_n$  to define the wave profile. At the boundaries of the flow domain, if only the velocity or depth is specified, the remaining unknown is determined by application of the appropriate backward or forward characteristic equation. For the case of advance on a dry bed, Whitham's assumption is used, i.e.,  $V_n = V_{n-1}$ .

During the early stages of flooding, the effects of boundary roughness and channel slope are small. A solution which ignores friction and slope is therefore used as the initial condition from which to start the numerical solution.



## RESULTS

The model is compared with several dambreak experiments performed by Jeyapalan *et al.* [3]. In these experiments, oil is used to simulate a laminar flow of a viscous fluid. The experiments are conducted in a 6 foot long glass flume which has a constant width of 1 foot. The dam is located 4 feet from the downstream edge of the flume giving a reservoir length of 2 feet. Table I gives the parameters characterizing the

Test No.	$H_0$ (ft)	$\beta$ (degrees)	$\gamma$ (lb/ft <sup>3</sup> )	$\eta$ (lb sec/ft <sup>2</sup> )
2	0.50	0	56	0.078
6	0.75	0	56	0.078
7	0.50	0	56	0.156

examples presented herein. The test numbers listed in Table I correspond to several of the flood examples presented in [3]. In Table I,  $H_0$  = depth of oil immediately behind the dam before failure;  $\beta$  = bottom slope of the flume; and for all cases  $\tau_y = 0$ .

Results of the numerical simulation are presented in Figs. 2-3 and compared with the available experimental data. The agreement between theory and experiment is generally good. The numerical algorithm is programmed in Fortran and executed on an Apple Macintosh micro-computer. Computation times are on the order of 0.25-0.34 seconds per computational node.

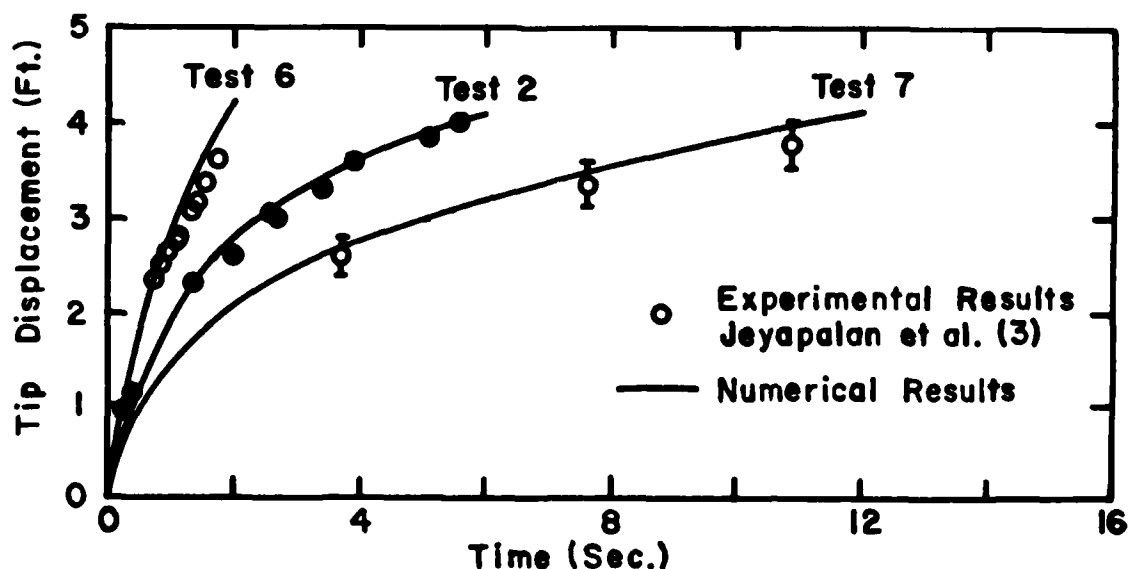


Fig. 2 - Wave Advance.

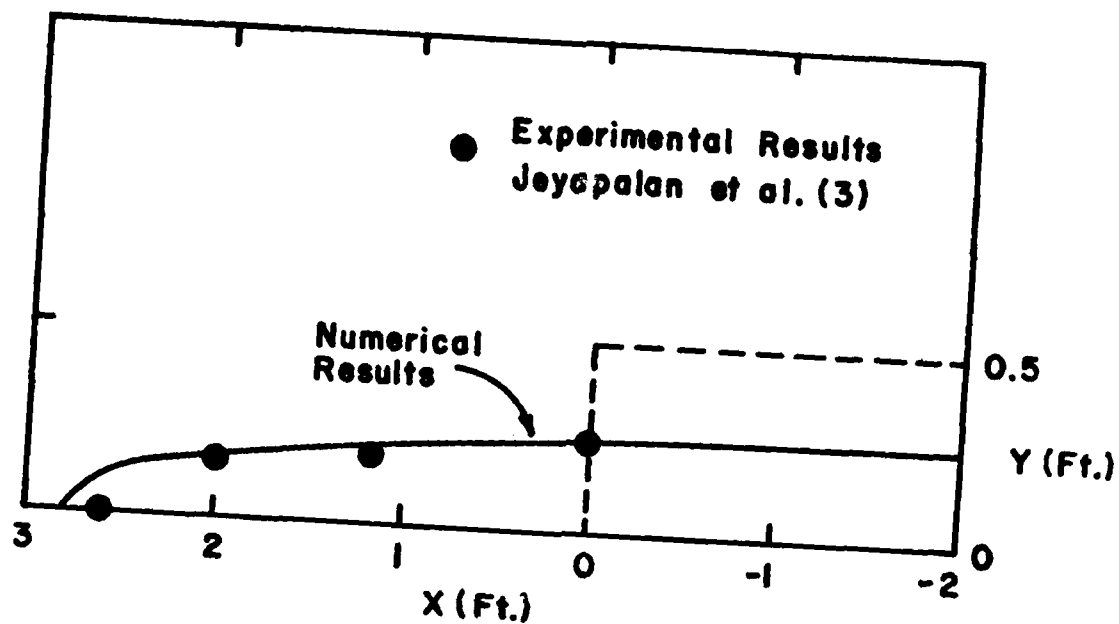


Fig. 3 - Wave Profile at  $t=1.95$  sec., Test 2.

#### ACKNOWLEDGMENT

This research is supported by The Hydrologic Engineering Center, Army Corps of Engineers.

#### REFERENCES

1. DeLeon, A. A., and Jeppson, R. W., "Hydraulics and Numerical Solutions of Steady-State but Spatially Varied Debris Flow," Report, Utah Water Research Laboratory, Logan, Utah, July 1982, 95 pp.
2. Jeyapalan, J. K., Duncan, J. M., and Seed, H. B., "Analyses of Flow Failures of Mine Tailings Dams," Journal of Geotechnical Engineering, ASCE, Vol. 109, No. 2, Feb. 1983, pp. 150-171.
3. Jeyapalan, J. K., Duncan, J. M., and Seed, H. B., "Investigation of Flow Failures of Tailings Dams," Journal of Geotechnical Engineering, ASCE, Vol. 109, No. 2, Feb. 1983, pp. 172-189.
4. Katopodes, N. D., and Strelkoff, T., "Hydrodynamics of Border Irrigation - Complete Model," Journal of the Irrigation and Drainage Division, ASCE, Vol. 103, No. IR3, Sept. 1977, pp. 309-324.
5. Pierson, T. C., "Composition and Dynamics of Rudd Canyon Mudflows," presentation, Specialty Conference on the Delineation of Landslide, Flash Flood and Debris Flow Hazards in Utah, June 14-15, 1984, Utah State University, Logan, Utah.
6. Strelkoff, T., "Numerical Solution of Saint-Venant Equations," Journal of the Hydraulics Division, ASCE, Vol. 96, No. HY1, Jan. 1970, pp. 223-252.

## TECHNICAL PAPERS (TP)

Technical papers are written by the staff of the HEC, sometimes in collaboration with persons from other organizations, for presentation at various conferences, meetings, seminars and other professional gatherings.

This listing includes publications starting in 1978.

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-52	Potential Use of Digital Computer Ground Water Models, D. L. Gundlach, Apr 78, 38 pp.		AD-A106 251
TP-53	Development of Generalized Free Surface Flow Models Using Finite Element Techniques, D. M. Gee and R. C. MacArthur, Jul 78, 21 pp.		AD-A106 252
TP-54	Adjustment of Peak Discharge Rates for Urbanization, D. L. Gundlach, Sep 78, 7 pp.		AD-A106 253
TP-55	The Development and Servicing of Spatial Data Management Techniques in the Corps of Engineers, R. P. Webb and D. W. Davis, Jul 78, 26 pp.		AD-A106 254
TP-56	Experiences of the Hydrologic Engineering Center in Maintaining Widely Used Hydrologic and Water Resource Computer Models, B. S. Eichert, Nov 78, 16 pp.		AD-A106 255
TP-57	Flood Damage Assessments Using Spatial Data Management Techniques, D. W. Davis and R. P. Webb, May 78, 27 pp.		AD-A106 256
TP-58	A Model for Evaluating Runoff-Quality in Metropolitan Master Planning, L. A. Roesner, H. M. Michandros, R. P. Shubinski, A. D. Feldman, J. W. Abbott, and A. O. Friedland, Apr 72, 81 pp.		AD-A106 257

TECHNICAL PAPERS (TP)(Continued)

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-59	Testing of Several Runoff Models on an Urban Watershed, J. Abbott, Oct 78, 53 pp.		AD-A106 258
TP-60	Operational Simulation of a Reservoir System with Pumped Storage, G. F. McMahon, V. R. Bonner and B. S. Eichert, Feb 79, 32 pp.		AD-A106 259
TP-61	Technical Factors in Small Hydropower Planning, D. W. Davis, Feb 79, 35 pp.		AD-A109 757
TP-62	Flood Hydrograph and Peak Flow Frequency Analysis, A. D. Feldman, Mar 79 21 pp.		AD-A109 758
TP-63	HEC Contribution to Reservoir System Operation, B. S. Eichert and V. R. Bonner, Aug 79, 28 pp.		AD-A109 759
TP-64	Determining Peak-Discharge Frequencies in an Urbanizing Watershed: A Case Study, S. F. Daly and J. C. Peters, Jul 79, 15 pp.		AD-A109 760
TP-65	Feasibility Analysis in Small Hydropower Planning, D. W. Davis and B. W. Smith, Aug 79, 20 pp.		AD-A109 761
TP-66	Reservoir Storage Determination by Computer Simulation of Flood Control and Conservation Systems, B. S. Eichert, Oct 79, 10 pp.		AD-A109 762
TP-67	Hydrologic Land Use Classification Using LANDSAT, R. J. Cermak, A. D. Feldman and R. P. Webb, Oct 79, 26 pp.		AD-A109 763
TP-68	Interactive Nonstructural Flood-Control Planning, D. T. Ford, Jun 80, 12 pp.		AD-A109 764

TECHNICAL PAPERS (TP)(Continued)

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-69	Critical Water Surface by Minimum Specific Energy Using the Parabolic Method, B. S. Eichert, 1969, 15 pp.		AD-A951 599
TP-70	Corps of Engineers Experience with Automatic Calibration of a Precipitation-Runoff Model, D. T. Ford, E. C. Morris, and A. D. Feldman, May 80, 12 pp.		AD-A109 765
TP-71	Determination of Land Use from Satellite Imagery for Input to Hydrologic Models, R. P. Webb, R. Cermak, and A. D. Feldman, Apr 80, 18 pp.		AD-A109 766
TP-72	Application of the Finite Element Method to Vertically Stratified Hydrodynamic Flow and Water Quality, R. C. MacArthur and W. R. Norton, May 80, 12 pp.		AD-A109 767
TP-73	Flood Mitigation Planning Using HEC-SAM, D. W. Davis, Jun 80, 17 pp.		AD-A109 756
TP-74	Hydrographs by Single Linear Reservoir Model, J. T. Pederson, J. C. Peters, and O. J. Helweg, May 80, 17 pp.		AD-A109 768
TP-75	HEC Activities in Reservoir Analysis, V. R. Bonner, Jun 80, 10 pp.		AD-A109 769
TP-76	Institutional Support of Water Resource Models, J. C. Peters, May 80, 23 pp.		AD-A109 770
TP-77	Investigation of Soil Conservation Service Urban Hydrology Techniques, D. G. Altman, W. H. Espey, Jr. and A. D. Feldman, May 80, 14 pp.		AD-A109 771
TP-78	Potential for Increasing the Output of Existing Hydroelectric Plants, D. W. Davis and J. J. Buckley, Jun 81, 20 pp.		AD-A109 772

TECHNICAL PAPERS (TP)(Continued)

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-79	Potential Energy and Capacity Gains from Flood Control Storage Reallocation at Existing U. S. Hydropower Reservoirs, B. S. Eichert and V. R. Bonner, Jun 81, 18 pp.		AD-A109 787
TP-80	Use of Non-Sequential Techniques in the Analysis of Power Potential at Storage Projects, G. M. Franc, Jun 81, 18 pp.		AD-A109 788
TP-81	Data Management Systems for Water Resources Planning, D. W. Davis, Aug 81, 12 pp.		AD-A114 650
TP-82	The New HEC-1 Flood Hydrograph Package, A. D. Feldman, P. B. Ely and D. M. Goldman, May 81, 28 pp.		AD-A114 360
TP-83	River and Reservoir Systems Water Quality Modeling Capability, R. G. Willey, Apr 82, 15 pp.		AD-A114 192
TP-84	Generalized Real-Time Flood Control System Model, B. S. Eichert and A. F. Pabst, Apr 82, 18 pp.		AD-A114 359
TP-85	Operation Policy Analysis: Sam Rayburn Reservoir, D. T. Ford, R. Garland and C. Sullivan, Oct 81, 16 pp.		AD-A123 526
TP-86	Training the Practitioner: The Hydrologic Engineering Center Program, W. K. Johnson, Oct 81, 20 pp.		AD-A123 568
TP-87	Documentation Needs for Water Resources Models, W. K. Johnson, Aug 82, 16 pp.		AD-A123 558
TP-88	Reservoir System Regulation for Water Quality Control, R.G. Willey, Mar 83, 18 pp.		AD-A130 829
TP-89	A Software System to Aid in Making Real-Time Water Control Decisions, A. F. Pabst and J. C. Peters, Sep 83, 17 pp.		AD-A138 616

TECHNICAL PAPERS (TP)(Continued)

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-90	Calibration, Verification and Application of a Two-Dimensional Flow Model, D. M. Gee, Sep 83, 6 pp.		AD-A135 668
TP-91	HEC Software Development and Support, B. S. Eichert, Nov 83, 12 pp.		AD-A139 009
TP-92	Hydrologic Engineering Center Planning Models D. T. Ford and D. W. Davis, Dec 83, 17 pp.		AD-A139 010
TP-93	Flood Routing Through a Flat, Complex Floodplain Using A One-Dimensional Unsteady Flow Computer Program, J. C. Peters, Dec 83, 8 pp.		AD-A139 011
TP-94	Dredged-Material Disposal Management Model, D. T. Ford, Jan 84, 18 pp.		AD-A139 008
TP-95	Infiltration and Soil Moisture Redistribution in HEC-1, A. D. Feldman, Jan 84,		AD-A141 626
TP-96	The Hydrologic Engineering Center Experience in Nonstructural Planning, W. K. Johnson and D. W. Davis, Feb 84, 7 pp.		AD-A141 860
TP-97	Prediction of the Effects of a Flood Control Project on a Meandering Stream, D. M. Gee, Mar 84, 12 pp.		AD-A141 951
TP-98	Evolution in Computer Programs Causes Evolution in Training Needs: The Hydrologic Engineering Center Experience, V. R. Bonner, Jul 84, 20 pp.		AD-A145 601
TP-99	Reservoir System Analysis for Water Quality, J. H. Duke, D. J. Smith and R. G. Willey, Aug 84, 27 pp.		AD-A145 680

TECHNICAL PAPERS (TP)(Continued)

<u>HEC NUMBER</u>	<u>TITLE</u>	<u>HEC PRICE</u>	<u>NTIS NUMBER</u>
		<u>\$2.00 Each</u>	
TP-100	Probable Maximum Flood Estimation - Eastern United States, P. B. Ely and J. C. Peters, Jun 84, 5 pp.		AD-A146 536
TP-101	Use of Computer Program HEC-5 For Water Supply Analysis, R. J. Hayes and Bill S. Eichert, Aug 84, 7 pp.		AD-A146 535
TP-102	Role of Calibration in the Application of HEC-6, D. Michael Gee, Dec 84, 19 pp.		AD-A149 269
TP-103	Engineering and Economic Considerations in Formulating Nonstructural Plans, M. W. Burnham, Jan 85, 16 pp.		A150 154
TP-104	Modeling Water Resources Systems for Water Quality, R. G. Willey, D. J. Smith and J. H. Duke, Feb 85, 10 pp.		AD-A154 288
TP-105	Use of a Two-Dimensional Flow Model to Quantify Aquatic Habitat, D. M. Gee and D. B. Wilcox, Apr 85, 10 pp.		AD-A154 287
TF-106	Flood-Runoff Forecasting with HEC1F, J. C. Peters and P. B. Ely, May 85, 7 pp.		AD-A154 286
TP-107	Dredged-Material Disposal System Capacity Expansion, D. T. Ford, Aug 85, 23 pp.		
TP-108	Role of Small Computers in Two-Dimensional Flow Modeling, D. M. Gee, Oct 85, 6 pp.		
TP-109	One-Dimensional Model For Mud Flows, D. R. Schamber and R. C. MacArthur, Oct 85, 6 pp.		



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Paper No. 109	2. GOVT ACCESSION NO. AD-A159 921	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) One-Dimensional Model For Mud Flows		5. TYPE OF REPORT & PERIOD COVERED
7. AUTHOR(s) Schamber, David R. and MacArthur, Robert C.		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Corps of Engineers Hydrologic Engineering Center 609 Second Street Davis, CA 95616		8. CONTRACT OR GRANT NUMBER(s)
11. CONTROLLING OFFICE NAME AND ADDRESS		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE October, 1985
		13. NUMBER OF PAGES 6
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Distribution of this paper is unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Presented at the American Society of Civil Engineers Hydraulic Division Specialty Conference on Hydraulics and Hydrology in the Small Computer Age, Orlando, Florida, 12-17 August 1985.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Mud and Debris Flows, One-Dimensional Unsteady Flows, Numerical Modeling, Non-Newtonian Fluid Properties, Bingham Fluids, Laminar Flows, High Viscosity - High Solids Concentrations, Model Verification, Method of Characteristics, Micro-Computers.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) In this paper a transient, one-dimensional model for dynamic flood routing of mud flows is presented. The governing equations of mass and momentum conservation incorporate laminar flow resistance effects and utilize a power law expression to represent the cross-sectional geometry of the channel. The equations are solved by the method of characteristics on fixed time lines and program execution is performed on a micro-computer. Numerical results are compared with published experimental data for a laminar flow, dambreak problem of a viscous oil.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

**END**

**FILMED**

**11-85**

**DTIC**