

AD-A167 698


NAVAL SUBMARINE SUPPORT BASE KINGS BAY FLEET MOORINGS  
UNDERWATER INSPECTI (U) NAVAL FACILITIES ENGINEERING  
COMMAND WASHINGTON DC CHESAPEAKE. 31 MAR 83  
CHES/NAVFAC-FPO-8318 5


1/1

UNCLASSIFIED

F/G 13/2

NL

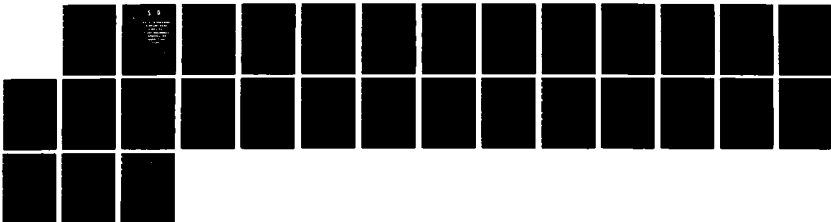



NATIONAL BUREAU OF STANDARDS  
MICROCOPY RESOLUTION TEST

FPO  
8318.5  
c. 2



AD-A167 698

DTIC  
ELECTE  
MAY 02 1986  
S D

2

**NAVAL SUBMARINE  
SUPPORT BASE  
KINGS BAY  
FLEET MOORINGS  
UNDERWATER  
INSPECTION  
PLAN**

**DISTRIBUTION STATEMENT A**

Approved for public release;  
Distribution Unlimited

**31 MARCH 1983**

OCEAN ENGINEERING  
AND CONSTRUCTION PROJECT OFFICE  
CHESAPEAKE DIVISION  
NAVAL FACILITIES ENGINEERING COMMAND  
WASHINGTON, D.C. 20374

DTIC FILE COPY

86 4 22 027

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE

AD-A167698

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION

1b. RESTRICTIVE MARKINGS

Unclassified

2a. SECURITY CLASSIFICATION AUTHORITY

3. DISTRIBUTION AVAILABILITY OF REP.  
Approved for public release;  
distribution is unlimited

2b. DECLASSIFICATION/DOWNGRADING SCHEDULE

4. PERFORMING ORGANIZATION REPORT NUMBER  
FPO 8318.5

5. MONITORING ORGANIZATION REPORT #

6a. NAME OF PERFORM. ORG. 6b. OFFICE SYM  
Ocean Engineering  
& Construction  
Project Office  
CHESNAVFACENGCOM

7a. NAME OF MONITORING ORGANIZATION

6c. ADDRESS (City, State, and Zip Code)  
BLDG. 212, Washington Navy Yard  
Washington, D.C. 20374-2121

7b. ADDRESS (City, State, and Zip)

8a. NAME OF FUNDING ORG. 8b. OFFICE SYM

9. PROCUREMENT INSTRUMENT INDENT #

8c. ADDRESS (City, State & Zip)

10. SOURCE OF FUNDING NUMBERS  
PROGRAM PROJECT TASK WORK UNIT  
ELEMENT # # # ACCESS #

11. TITLE (Including Security Classification)  
Naval Submarine Support Base Kings Bay Fleet Moorings Underwater Inspection  
Plan

12. PERSONAL AUTHOR(S)

13a. TYPE OF REPORT 13b. TIME COVERED  
FROM TO

14. DATE OF REP. (YYMMDD) 15. PAGE  
83-03-31 25

16. SUPPLEMENTARY NOTATION

17. COSATI CODES  
FIELD GROUP SUB-GROUP

18. SUBJECT TERMS (Continue on reverse if nec.)  
Fleet moorings, Mooring inspections,  
Underwater inspections, Naval Submarine  
Support Base Kings Bay

19. ABSTRACT (Continue on reverse if necessary & identify by block number)  
As part of COMNAVFACENGCOM's Fleet Mooring Maintenance (FMM) Program, CHESNAV-  
FACENGCOM has been assigned the responsibility for the conduct of underwater  
inspections of fleet moorings worldwide. This plan provides guidelines for  
the underwater inspection of the three fleet moorings operated and (Con't)

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT  
SAME AS RPT.

21. ABSTRACT SECURITY CLASSIFICATION

22a. NAME OF RESPONSIBLE INDIVIDUAL  
Jacqueline B. Riley  
DD FORM 1473, 84MAR

22b. TELEPHONE 22c. OFFICE SYMBOL  
202-433-3881

SECURITY CLASSIFICATION OF THIS PAGE

**BLOCK 19 (Con't)**

**maintained by the Naval Submarine Support Base, Kings Bay, Georgia. This inspection is scheduled to take place in early April 1983.**

**CHESNAVFACENGCOM has designated an Engineer-in-Charge (EIC) to provide on site technical guidance to Underwater Construction Team One (UCT 1) divers who will actually perform the underwater portion of the inspection and collect the data. In addition, the EIC will prepare the post inspection report which will include the results of the inspection and recommendations for required maintenance actions.**

## TABLE OF CONTENTS

Paragraph		Page
1.0	BACKGROUND .....	1
2.0	PROJECT RESPONSIBILITIES .....	1
3.0	GENERAL MOORING HISTORY .....	1
4.0	INSPECTION PROCEDURES .....	4
4.1	Inspection Objectives .....	4
4.2	Buoy .....	5
	4.2.1 Buoy Upper Portion .....	5
	4.2.2 Buoy Lower Portion .....	5
	4.2.3 Bottom Jewelry .....	5
4.3	Riser .....	6
4.4	Ground Ring .....	6
4.5	Ground Legs .....	6
4.6	Anchors .....	6
4.7	Photography .....	8
	4.7.1 Topside .....	8
	4.7.2 Underwater .....	8
4.8	Cathodic Protection .....	9
5.0	DOCUMENTATION .....	9
6.0	MEETINGS/BRIEFINGS .....	9
7.0	LOGISTICS .....	10
	7.1 UCT ONE .....	10
	7.2 CHESNAVFACENCOM .....	10
 ANNEX		
A	MEASURING DEVICES AND THEIR USE .....	A-1
B	SAMPLE INSPECTION FORMS .....	B-1
C	MEDITERANNEAN MOORING AS BUILT DATA .....	C-1



Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification .....	
By .....	
Distribution /	
Availability Codes	
Dist	Avail and / or Special
A-1	

# **NSSB KINGS BAY UNDERWATER INSPECTION PLAN**

## **1.0 BACKGROUND**

As part of COMNAVFACENGCOM's Fleet Mooring Maintenance (FMM) Program, CHESNAVFACENGCOM has been assigned the responsibility for the conduct of underwater inspections of fleet moorings worldwide. This plan provides guidelines for the underwater inspection of three fleet moorings operated and maintained by the Naval Submarine Support Base, Kings Bay, Georgia. This inspection is scheduled to take place in early April 1983.

CHESNAVFACENGCOM has designated an Engineer-in-Charge (EIC) to provide on site technical guidance to Underwater Construction Team One (UCT 1) divers who will actually perform the underwater portion of the inspection and collect the data specified in paragraph 4.0. In addition, the EIC will prepare the post inspection report which will include the results of the inspection and recommendations for required maintenance actions.

## **2.0 PROJECT RESPONSIBILITIES**

CHESNAVFACENGCOM will develop the FM underwater inspection plan, provide technical assistance to the dive team, prepare the required inspection forms, evaluate the observed inspection data, and report the results of the inspection to interested activities.

UCT-1 will provide sufficient divers to accomplish the inspection within the allotted time frame, ensure that the required amount of diving support material/equipment is available, and that all desired data is gathered and accurately reported.

The activity responsible for the moorings being inspected will provide logistic support as required by the Engineer-in-Charge and the UCT dive team.

## **3.0 GENERAL MOORING HISTORY**

NSSB Kings Bay currently operates and maintains three fleet moorings . . . a Mediterranean type mooring and two F class riser type moorings. The Mediterranean mooring is installed in about 38 feet of water and is utilized year around. The two F class moorings are in approximately 30 feet of water but are only used about 28% of the time. Figures 1 and 2 depict typical riser and Mediterranean type moorings.


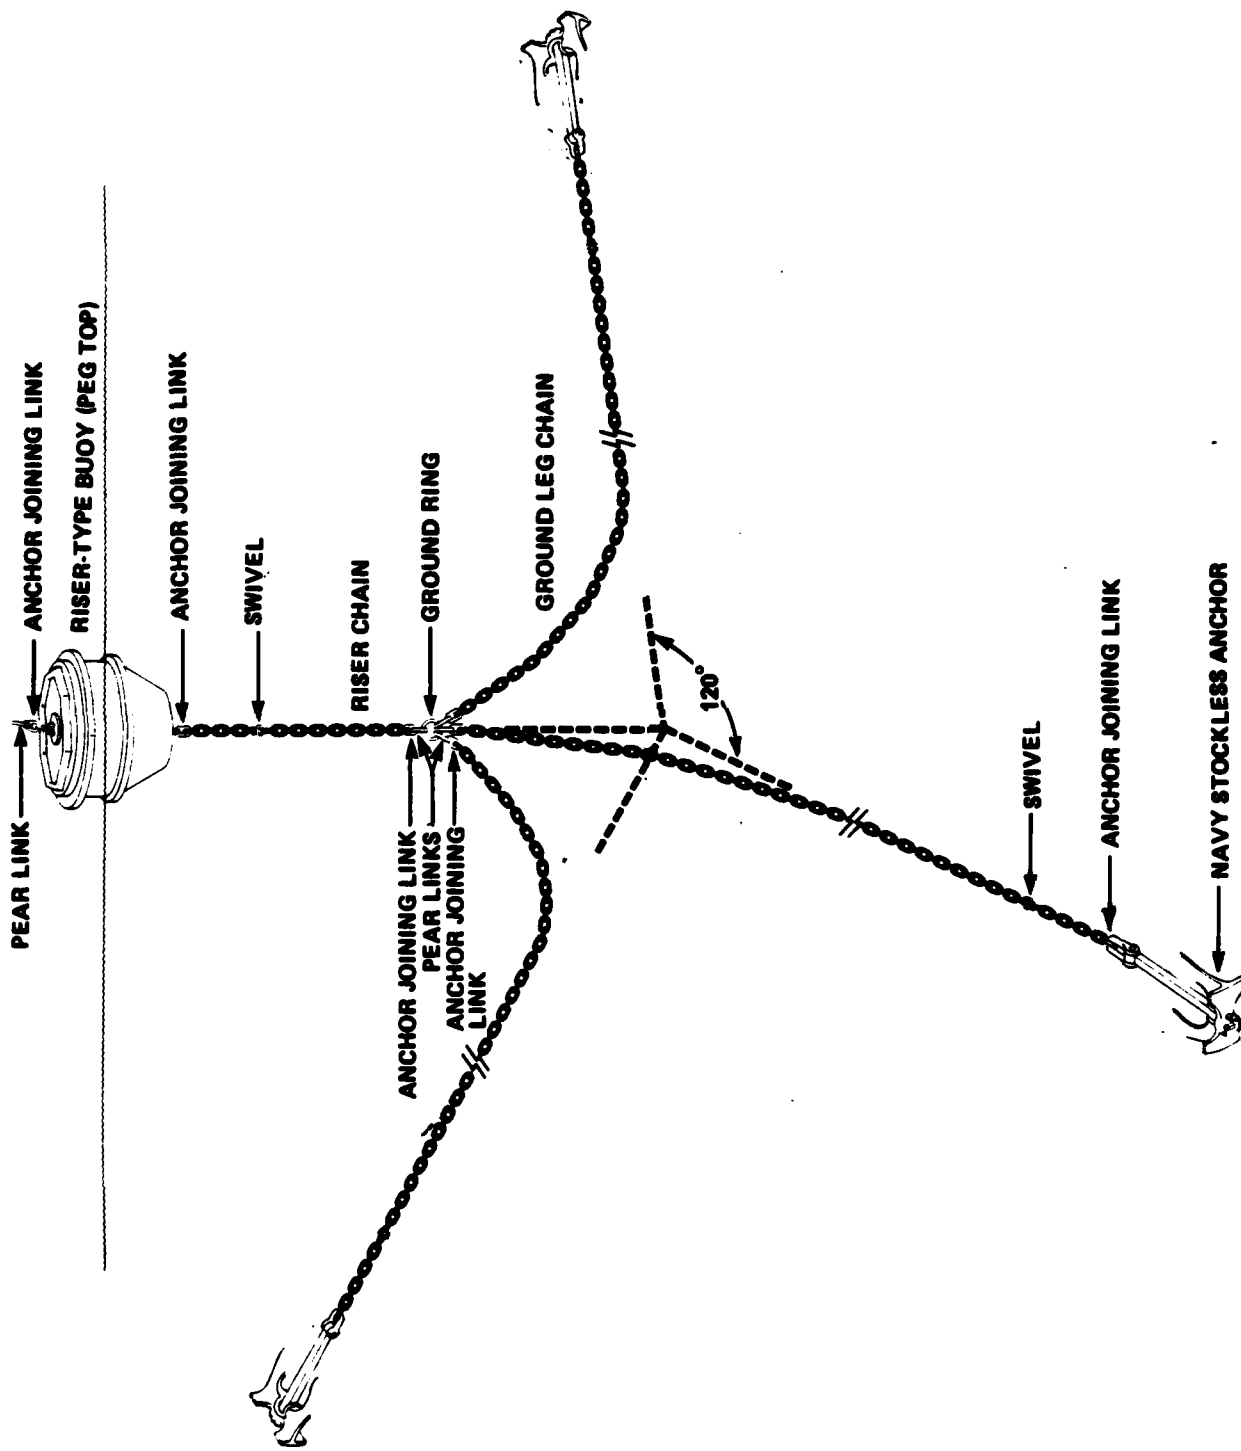


FIGURE 1. TYPICAL RISER-TYPE MOORING



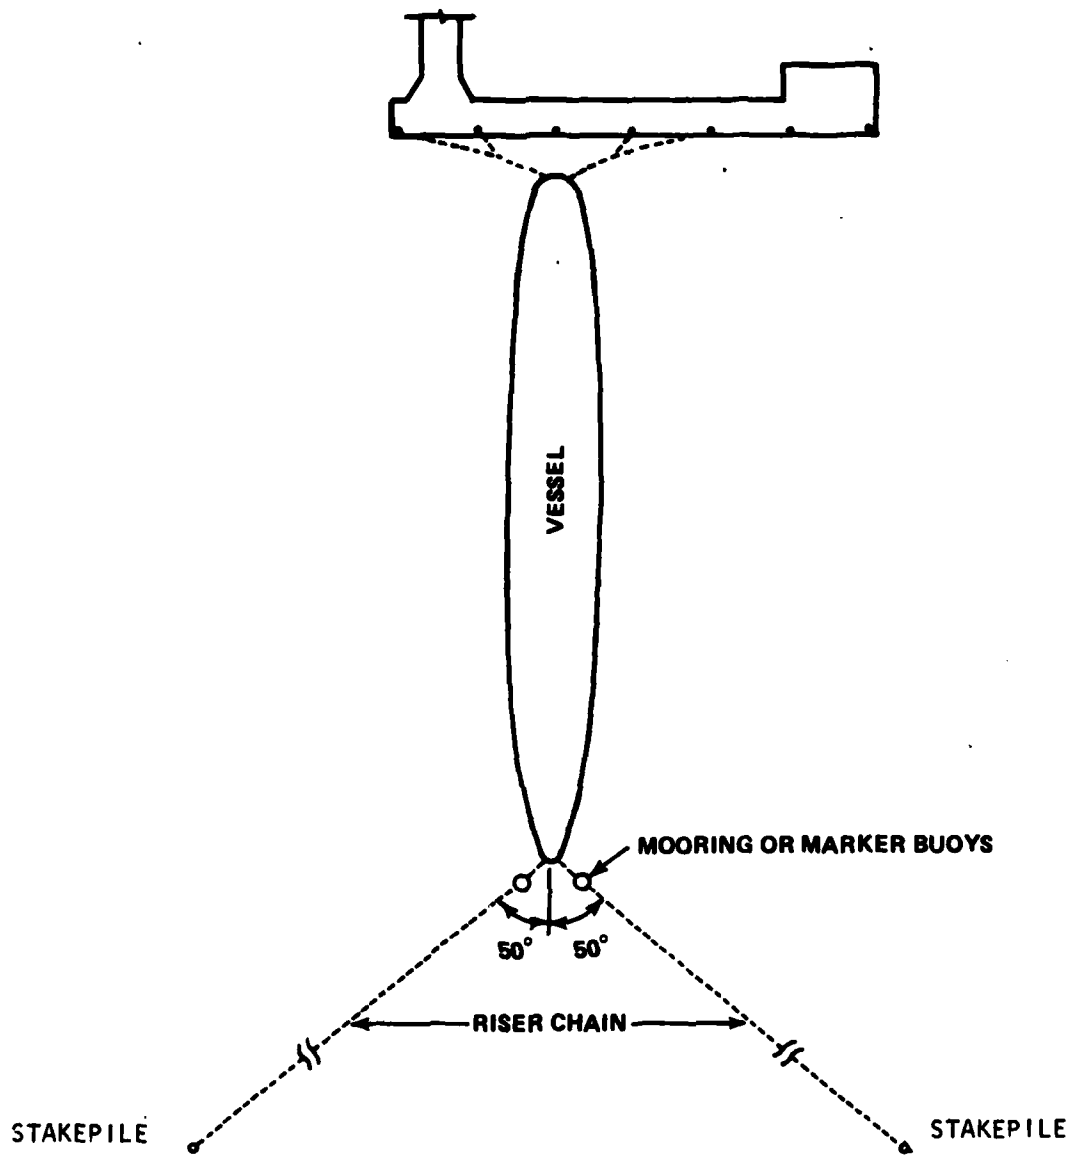

(NOT TO SCALE)

FIGURE 2. TYPICAL MEDITERRANEAN MOORING

The Mediterranean mooring consists of two steel stakepile type mooring systems used to moor the bow of a tender. The stern of the tender is tied up to a wharf. The stakepile mooring systems are installed to the port and starboard of the tender's bow, and each consists of four and a half shots (about 400 feet) of 3 1/2 inch Dilok chain, two 12,600 pound cast iron sinkers, and a 300,000 pound design load stakepile. Annex C contains the Mediterranean mooring's as-built data. During July of 1979, the starboard stakepile failed and pulled loose from the bottom while the system was sustaining moderate wind forces of 30 - 40 knots. Since both the port and starboard mooring systems were similar in construction, a decision was made to replace both systems with increased load capacity stakepiles. The two new stakepile anchors were installed in August of 1979.

Each of the two F class moorings consists of a ten foot diameter buoy, 1 5/8 inch Dilok chain, and a 40,000 pound standard Navy stockless anchor. Both of these moorings were newly installed during the fall of 1979.

#### 4.0 INSPECTION PROCEDURES

4.1 Inspection Objectives. The purpose of mooring inspections is to determine the general physical condition of buoys and chain assemblies and, when possible, to verify or update existing as-built and maintenance records. Divers inspect only a portion of the submerged buoy hull and chain assemblies in order to compile a general description of the mooring's condition. The existence of fairly consistent measurements during this inspection provides a good indication of the mooring's overall condition. It should be kept in mind that periodic underwater inspections are intended as an expedient and relatively inexpensive supplement to accurate maintenance records. As such, they cannot fully substitute for a complete inspection involving recovery of the mooring and the measurement and evaluation of each component.

One of the more important parameters used to evaluate the condition of a mooring is chain wire diameter. After cleaning to bare metal, a selective sampling of the wire diameter of chain links and connecting hardware is taken in order to determine the amount of deterioration due to corrosion and wear. "Single Link" measurements are taken where chain is slack, and detect only corrosion loss. "Double Link" measurements, taken where two links connect under tension, detect the combined effects of corrosion and wear. Chain links and other components which measure 90% or greater of original wire diameter are considered to be in "good" condition; measurement between 80% and 90% of original diameter is considered "fair" condition and is cause for the mooring to be downgraded in classification; any measurement less than 80% is considered "poor" and is cause for the mooring to be declared unsatisfactory for fleet use. Figure A-1 in Annex A depicts the proper method of taking both single and double link measurements.

Standard underwater inspection procedures do not call for the inspection of any part of the mooring which is buried. Ground legs and risers are observed only to the point at which they become buried; no attempt is made to locate and inspect anchors or other mooring materials which are not readily visible.

The following paragraphs contain the general inspection procedures that will be followed.

**4.2 Buoy.** The geographic position of each buoy will be verified. In order to accomplish this, a transit will be used to accurately sight each buoy from known positions ashore.

**4.2.1 Buoy Upper Portion.** The buoy shall be observed to determine its general condition. The size of the buoy (diameter and height) should be recorded along with its freeboard. Physical damage such as holes, dents, or listing shall be described. If the buoy is fiberglass coated, then the fiberglass should be inspected for cracks, wear, peeling, or rust-bleeding. A check will be made to see if the hatches have been fiberglassed over. If the buoy has not been fiberglassed, then the paint will be checked for cracking, chipping, and peeling. Hatches, openings, and penetrations will be examined and broken parts and rust will be reported. Inspection check lists are contained in Annex B.

The buoy fenders and chafing rail shall be checked for integrity and secure connection to the buoy.

Buoy top jewelry shall be identified and measured with calipers to find the overall outside dimensions and areas of most severe reduction in wire size. Methods for presetting calipers are contained in Annex A.

**4.2.2 Buoy Lower Portion.** Divers shall thoroughly inspect the buoy below the waterline. The thickness of marine growth shall be recorded, three one-foot-square areas shall be selected and cleared of growth without damaging the paint or fiberglass, and the condition of the paint or fiberglass will be noted. If the buoy is a riser-type with a hawse pipe, the presence and condition of the rubbing casting shall be recorded. If the buoy is cathodically protected, the condition, dimensions, and connection of anodes are to be noted. Then, electrical potential readings are to be taken with an underwater voltmeter at three locations on the buoy bottom.

**4.2.3 Bottom Jewelry.** On each mooring, the jewelry connecting the buoy to the riser shall be identified and measured with calipers. As with the topside jewelry, the overall dimensions and the smallest wire size of each type of link or shackle will be recorded.

**4.3** Riser. Three consecutive double link measurements using pre-cut gauges will be made at both ends and near the center of the riser. Procedures for the use of pre-cut gauges are also contained in Annex A. The swivel and detachable links contained within the riser assembly shall be visually inspected and measured. As the divers swim down the riser, all chain links and other mooring hardware will be visually observed. Material suspected to be in worn or damaged condition will be investigated.

**4.4** Ground Ring. The ground ring shall be examined for general and localized wear. Caliper measurements shall be made of both the wire size in the region of the most severe wear and across the inner diameter.

**4.5** Ground Legs. Three consecutive double link measurements of each ground leg shall be taken every 45 feet. In those cases where the ground leg chain is slack and not in tension, three single link measurements shall be taken of each selected link as shown in Figure A-1 (Annex A). All connecting hardware including detachable links, anchor joining links, pear links, end links, swivels and shackles shall be identified and measured with calipers. Worn hardware and unusual chain joining practices shall be recorded and photographed.

The legs shall be labeled A, B, and C clockwise from magnetic north and their orientation (determined by the diver's compass) sketched as in Figure 3.

In addition, the divers will survey each ground leg of each of the three moorings using an inclinometer (to be provided by the EIC) and a depth gauge in order to establish ground leg catenary profiles. The catenary angle will be measured at each ten feet of depth, as shown in Figure 4, between the ground ring and the mud line. A pop float will be attached to the ground leg chain where it meets the bottom (and the water depth recorded) so that topside personnel can measure the horizontal distance between the buoy and the point at which the ground leg reaches the bottom. The EIC will also determine the height of the tide at the time these measurements are being taken and the wind speed and direction. This data will determine the catenary profile of each ground leg.

**4.6** Anchors. If an anchor is located, a pop float shall be attached to it so that the relative positions of the anchor from the mooring buoy can be observed from the surface. The anchor's position shall be recorded. The hardware connecting an anchor to its ground leg will be measured by calipers and the wire diameters recorded.

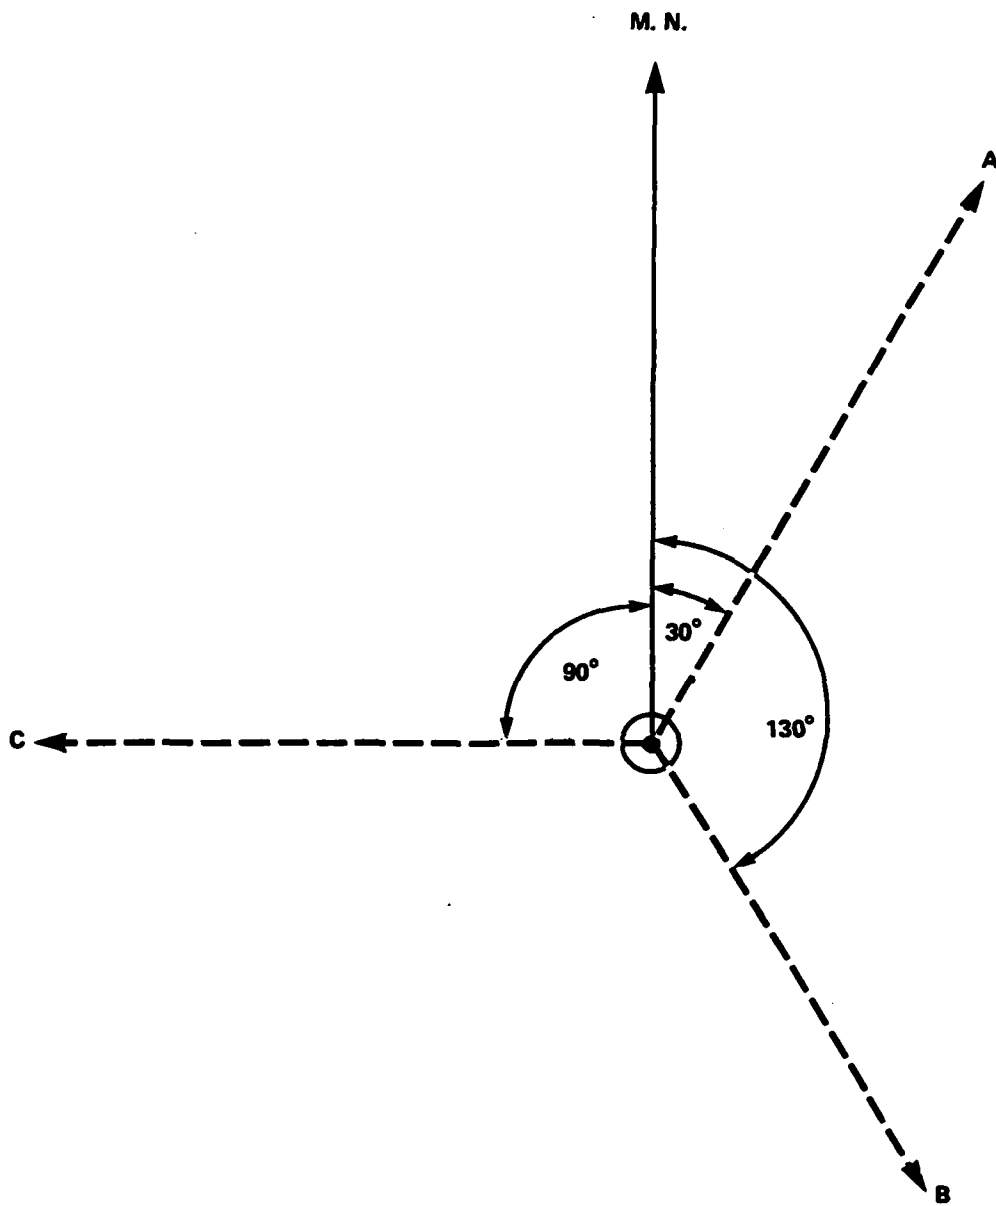


FIGURE 3. MAGNETIC BEARING OF GROUND LEGS

#### 4.7 Photography

4.7.1 Topside. Topside photography and ashore photographs are the responsibility of the Engineer-in-Charge.

Photographs will be taken of each buoy showing its general condition. Photographs of the topside jewelry and damaged buoy components will be taken as deemed appropriate by the EIC.

Photographs will be taken of ashore spare mooring material inventories and construction equipment as deemed necessary.

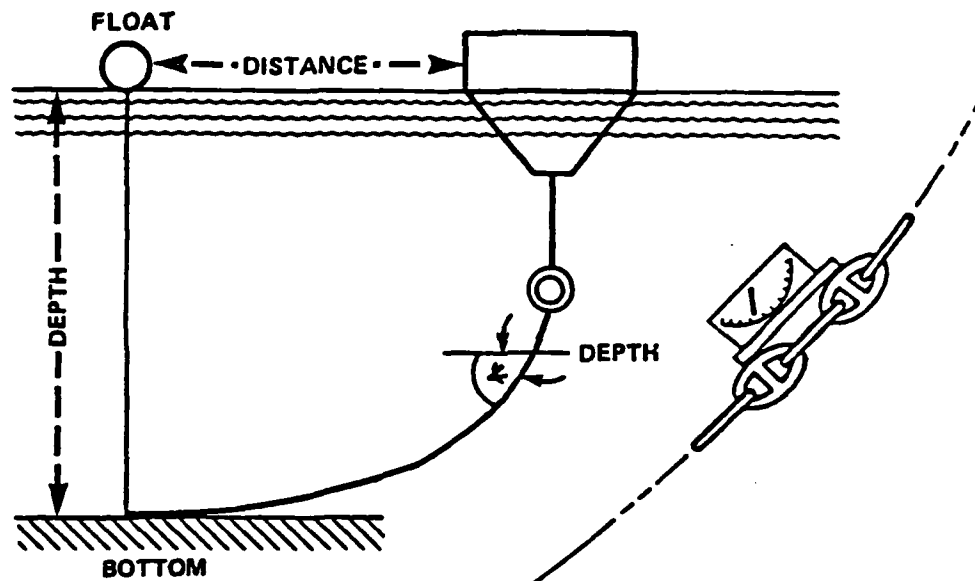


FIGURE 4. DETERMINING CATENARY PROFILES

4.7.2 Underwater. Underwater photography shall be the responsibility of the dive team. Buoy bottoms, bottom jewelry, worn links, swivels, ground rings, and other hardware shall be photographed wherever required to support material conditions and when environmentally feasible. Photographs shall include clear annotation as to the location of the hardware being photographed.

**4.8 Cathodic Protection.** Any moorings found to have cathodic protection will be inspected using the following procedures.

The underwater voltmeter (after on-site calibration by the dive team) will be used to probe the chain every 15 feet commencing with the buoy and bottom jewelry and continuing until the anchor is reached or the chain disappears into the bottom. Before cleaning, divers will photograph each anode and record the thickness, type and accumulation of the coating. Several anodes should be brushed to remove the oxidation and the length, width and depth of the remaining zinc measured and photographed. Anodes in poor condition should be measured, reported and photographed.

## **5.0 DOCUMENTATION**

The Engineer-in-Charge will document the inspection procedures used and record the data obtained by the dive team. He may require additional or alternative inspection procedures as deemed necessary during the course of the inspection. He will maintain a time log of events occurring during the inspection, and the master inspection form. In addition, the EIC must be prepared to debrief each diver, upon his return to the surface, in order to gain immediate knowledge of what the diver observed. The information obtained from the divers will be recorded, and this data will subsequently be the basis for the development of the moorings as-built configuration and for the preparation of the Fleet Mooring Inspection Report, which will contain the results of the inspection and recommendations for corrective maintenance actions.

While on site, the EIC will investigate the availability and cost of local mooring maintenance support. In addition, he will conduct a cursory inspection of any on-shore Fleet Mooring Inventory (FMI) used for maintenance and repair or ready reserve. The type, size, quantity and general condition of the inventory shall be reported.

## **6.0 MEETINGS/BRIEFINGS**

Upon arrival on site, the Engineer-in-Charge will conduct a pre-dive briefing to familiarize all diver personnel with mooring component design and inspection criteria and to advise them of possible modifications to this inspection plan. In addition, the EIC will give a post-inspection debriefing to advise interested NWS Earle personnel of the preliminary inspection findings.

## **7.0 LOGISTICS**

**7.1 UCT ONE.** The following equipment will be provided by the UCT in support of this inspection:

- Arrangement for messing, berthing, and transportation of diver personnel.
- Acquisition of a dive platform/boat.
- All diving support equipment
- Measuring aids
  - Go/no go gauges
  - 100' tape measures for use underwater
  - Scales 1, 2, and 3 feet with large numbers suitable for underwater photo documentation
  - Accurate depth gauges
  - Marker tags to relocate or mark chain links or accessories
  - Calipers
- Survey equipment
  - Compass (diver's)
  - Survey buoys with line (pop floats)
  - Underwater voltmeters
- Two Underwater still cameras (35mm) with film (color and B & W) flash with spare batteries
- Cleaning equipment – Hand tools including wire brushes, chipping hammers, and sharp chisels. Water blaster with water or hydraulic power supply and brush tool.

**7.2 CHESNAVFACENGCOM.** The CHESNAVFACENGCOM Engineer-in-Charge will provide the following:

- Inspection plan
- Data sheets and forms
- 35mm surface camera and film



- Drafting supplies, graph paper, scales
- Calculator
- Pre-dive briefing data
- DM-26

**ANNEX A**

**MEASURING DEVICES AND THEIR USE**

## ANNEX A

### 1.0 MEASURING DEVICES AND THEIR USE

Tables A-1 and A-2 outline the 80 and 90 percent measurements for mooring components. These tables are based on the standard sizes of mooring material listed in DM-26 and can be used to preset calipers before measuring various items. For example, a class BB riser type mooring will require calipers set to 3.15" (90%) and 2.80" (80%) for single link measurements on the riser; 6.30" (90%) and 5.60" (80%) for double link on the riser; 2.25" and 2.0" for single link on the ground legs; 4.50" and 4.00" for double link on the ground legs; and for the ground ring 5.85" and 5.20".

The preferred measuring devices, however, are back-to-back 80 and 90 percent "go-no go" gauges. These gauges simplify the diver's job in that, unlike calipers, they cannot be knocked out of adjustment underwater, and they do not have to be checked and reset between dives. Figure A-1 contains the drawings and data required to fabricate these gauges. Although these gauges are a quick and efficient way of sampling the wire size of chain links and some jewelry, the divers still have to carry calipers to measure ground rings and chain connecting links.

The locations for measuring chain links are shown in Figure A-1.

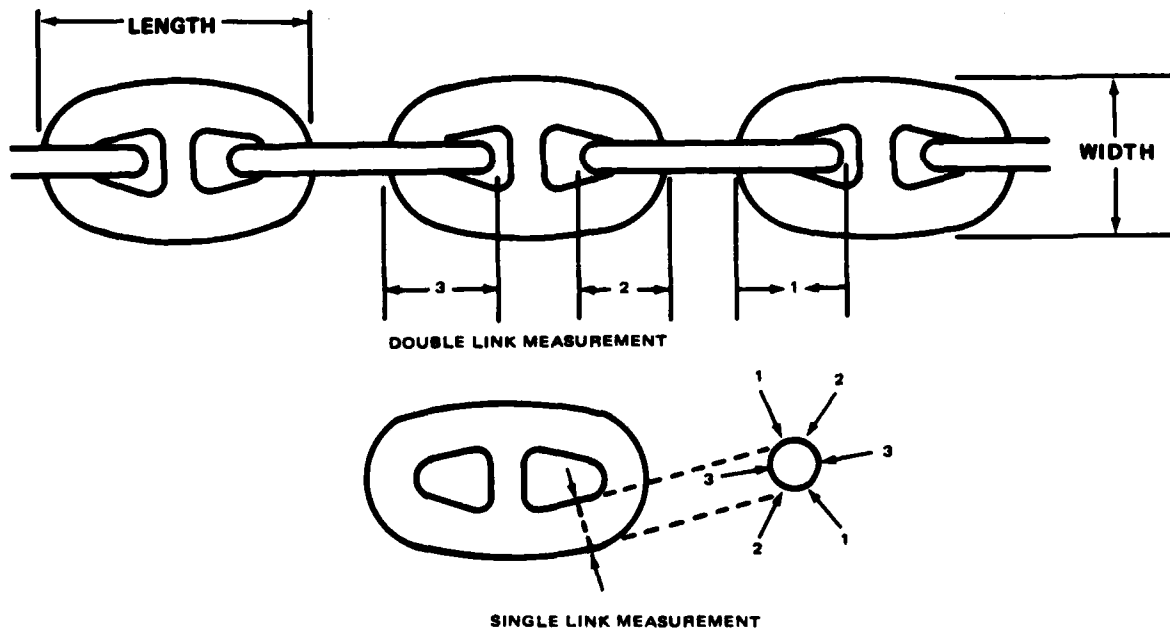


FIGURE A-1. LOCATIONS FOR TAKING CHAIN LINK MEASUREMENTS

TABLE A-1. SINGLE LINK MEASUREMENTS FOR COMPONENTS OF RISER-TYPE MOORINGS  
(DOUBLE VALUES FOR DOUBLE LINK MEASUREMENTS)


Class Moorings	Percent Remaining	Top of Buoy		Riser Chain	Ground Ring		Ground Tackle Chain	Anchor <sup>a</sup>		
		F-Shackle	End Link		AJL	Spider		Stockless w/Stabilizer	LWT	
A-A	100	5 3/8	4 1/2	4	4"	6 1/2	4 3/4	2 3/4"	25,000	-
	90	4.838	3.285	3.6	type	5.85	3.6 2.7	2.475		
	80	4.3	2.92	3.2		5.2	3.2 2.4	2.2		
B-B	100	4 15/16	3 15/16	3 1/2	3 1/2"	6 1/2	4 3/4	2 1/2"	20,000	13,000
	90	4.44	3.544	3.15	type	5.85	3.6 2.7	2.25		
	80	3.75	3.15	2.8		5.2	3.2 2.4	2.0		
C-C	100	4 15/16	3 15/16	3 1/2	3 1/2"	6 1/2	4 3/4	2 1/2"	18,000	10,000
	90	4.44	3.544	3.15	type	5.85	3.6 2.7	2.025		
	80	3.95	3.15	2.8		5.2	3.2 2.4	1.8		
D-D	100	4 3/16	3 3/4	3	3"	6	-	3"	30,000	-
	90	3.769	3.375	2.7	type	5.4	-	2.7		
	80	3.35	3	2.4		4.8	-	2.4		
A	100	3 7/8	3 3/8	2 3/4	2 3/4"	5 1/2	2 3/4"	2 3/4"	25,000	-
	90	3.488	3.038	2.475	type	4.95	2.475	2.475		
	80	3.1	2.7	2.2		4.4	2.2	2.2		
B	100	3 1/8	3 1/8	2 1/2	2 1/2"	4 3/4	-	2 1/2"	20,000	13,000
	90	3.15	2.813	2.25	type	4.215	-	2.25		
	80	2.8	2.5	2.0		3.8	-	2.25		
C	100	3 1/8	2 3/4	2 1/2	2 1/2"	4 1/2	-	2 1/2"	10,000	10,000
	90	2.813	2.813	2.025	type	4.05	-	2.025		
	80	2.5	2.5	1.8		3.6	-	1.8		
D	100	2 13/16	2 1/2	2	2"	4	-	2"	13,000	6,000
	90	2.531	2.25	1.8	type	3.6	-	1.8		
	80	2.25	2.0	1.6		3.2	-	1.6		
E	100	2 7/16	2 1/2	1 3/4	1 3/4"	3 1/2	-	1 3/4"	9,000	4,000
	90	2.174	2.025	1.575	type	3.15	-	1.575		
	80	1.95	1.8	1.4		2.8	-	1.4		
F	100	1 3/4	1 3/4	1 1/2	1 1/2"	2 3/4	-	1 1/2"	5,000	2,000
	90	1.575	1.575	1.125	type	2.813	-	1.125		
	80	1.4	1.4	1.0		2.5	-	1.0		
G	100	1 1/16	.1	3/4	3/4"	1 7/8	-	3/4"	3,000	300
	90	.956	.9	.675	type	1.688	-	.675		
	80	.85	.8	.6		1.5	-	.6		

1. All measurements vary according to manufacturer. see DM-26
2. Assumes firm sand bottom
3. Assumes cast steel chain

TABLE A-2. SINGLE LINK MEASUREMENTS FOR COMPONENTS OF TELEPHONE-TYPE MOORINGS  
(DOUBLE VALUES FOR DOUBLE LINK MEASUREMENTS)

Class Moorings	Percent Remaining	Top of Buoy (rod Link)	Buoy-to-Ground Tackle	Buoy-to-Ground Tackle Spider	Ground Tackle	Anchor, Shackles/Stabilizer	LM
A-A	100	4", 3.285	4 11/16	4	2 3/4"	25,000	-
	90	3.285	4.219	3.6	2.475		
	80	2.92	3.75	3.2	2.4	2.2	
B-B	100	4", 3.285	4 11/16	4	2", type	20,000	13,000
	90	3.285	4.219	3.6	2.25		
	80	2.92	3.75	3.2	2.0	2.0	
C-C	100	4", 3.285	4 11/16	4	2", type	18,000	10,000
	90	3.285	4.219	3.6	2.025		
	80	2.92	3.75	3.2	1.8	1.8	
D-D	100	4", 3.285	4 11/16	4	3", type	30,000	-
	90	3.285	4.219	3.6	2.7		
	80	2.92	3.75	3.2	2.4	2.4	
A	100	3 3/8, 3.038	3 7/8	3 3/4"	2 3/4"	25,000	-
	90	3.038	3.486	3.486	2.475		
	80	2.7	3.1	3.1	2.2	2.2	
B	100	3 3/8, 3.038	3", type	3", type	2", type	20,000	13,000
	90	3.038	3.15	3.15	2.25		
	80	2.7	2.8	2.8	2.0	2.0	
C	100	3 3/8, 3.038	3 1/8	3 1/8	2", type	10,000	10,000
	90	3.038	2.813	2.813	2.025		
	80	2.7	2.5	2.5	1.8	1.8	
D	100	3 3/8, 3.038	2 13/16	2 13/16	2", type	13,000	6,000
	90	3.038	2.531	2.531	1.8		
	80	2.7	2.25	2.25	1.6	1.6	

1. All measurements vary according to manufacturer, see IM-26
2. Assumes firm sand bottom
3. Assumes cast steel chain

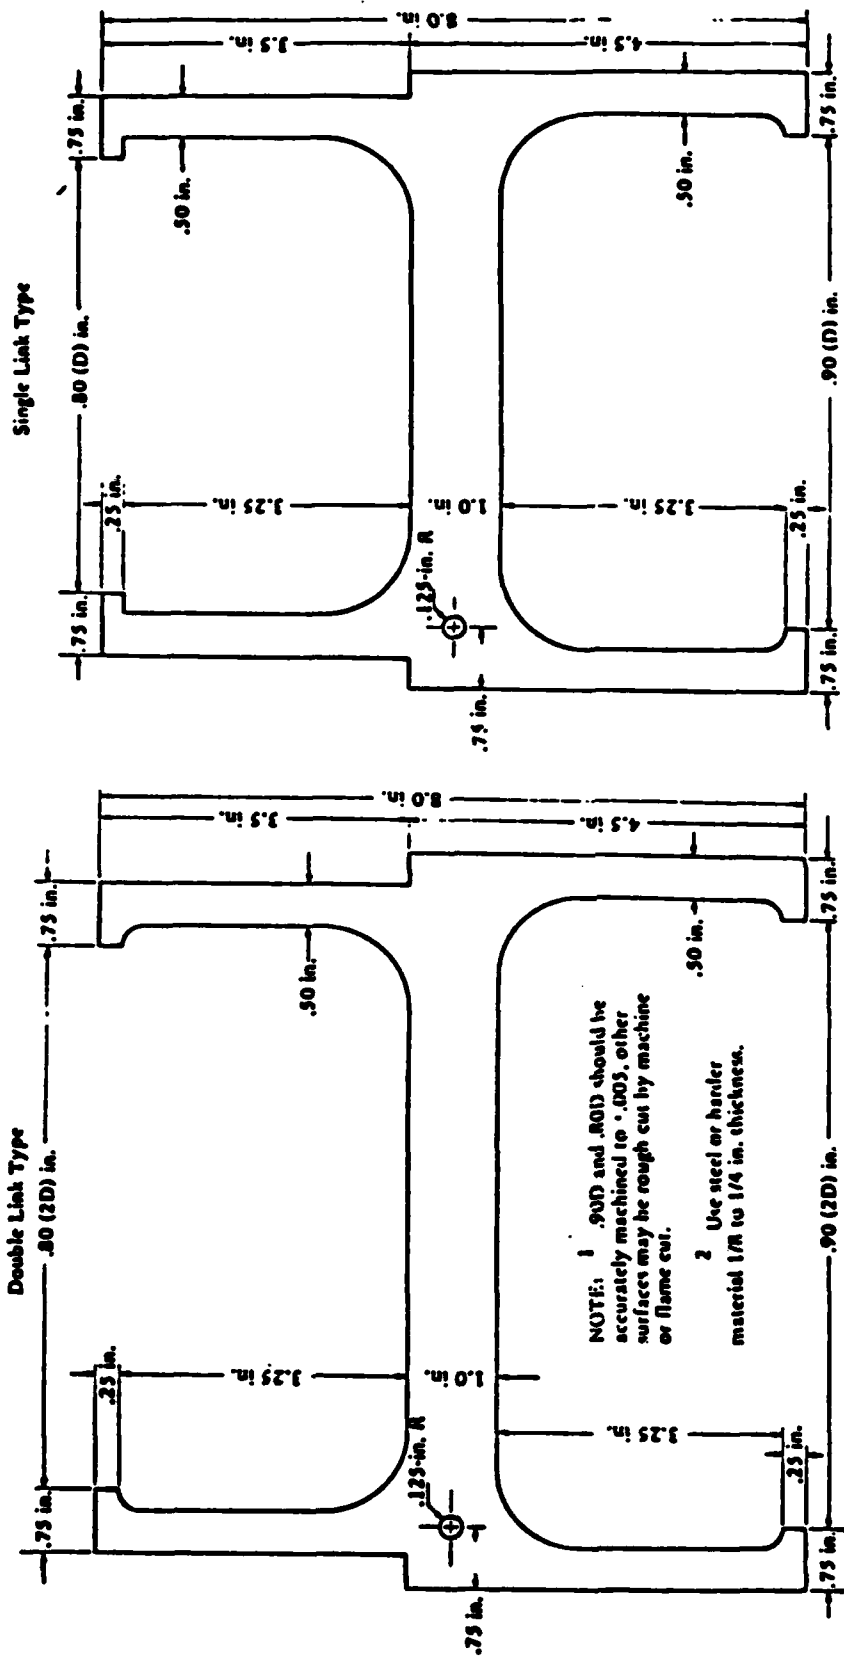

NOTE: 1 .90D and .80D should be accurately machined to .003, other surfaces may be rough cut by machine or flame cut.  
 2 Use steel or harder material 1/8 to 1/4 in. thickness.

D"	Single Link		Double Link		D"	Single Link		Double Link	
	.90D	.80D	.90(2D)	.80(2D)		.90D	.80D	.90(2D)	.80(2D)
6-1/2	① 5.85	5.20	⑥ 3.15	2.80	2	① 1.80	⑦ 6.30	5.60	② 3.60
6	② 5.40	4.80	⑦ 2.70	2.40	3	② 1.69	⑧ 5.40	4.80	
5-1/2	③ 4.95	4.40	⑧ 2.48	2.20	2-3/4	③ 1.58	⑨ 4.95	4.40	③ 3.06
4-1/2	④ 4.05	3.60	⑨ 2.25	2.00	2-1/2	④ 1.35	⑩ 4.50	4.00	④ 2.70
4	⑤ 3.60	3.20	⑩ 2.03	1.80	2-1/4	⑤ 1.125	⑪ 4.08	3.60	⑤ 2.40

FIGURE A-2. 10 PERCENT "GO-NO-GO" GAUGES

## ANNEX B

### SAMPLE INSPECTION FORMS

Tables B-1, B-2, and B-3 depict three forms the EIC and divers may use to record measurements and as-built data.

MOORING NO.: \_\_\_\_\_ CLASS: \_\_\_\_\_ LOCATION: \_\_\_\_\_ LAT: \_\_\_\_\_ LONG: \_\_\_\_\_  
 WATER DEPTH: \_\_\_\_\_ ANCHOR SIZE/TY: \_\_\_\_\_ BUOY TYPE: \_\_\_\_\_  
 BOTTOM TYPE:  SAND  MUD  CLAY  CORAL  ROCK Visibility \_\_\_\_\_ D = depth NI = not inspected, inaccessible

COMPONENTS	NI	CONDITION					COMMENT		
		NEW	SINGLE LINK %		DOUBLE LINK %			D	
BUOY HARDWARE			90+	80+	80-	90+	80+	80-	
NEAR BUOY									
MIDDLE									
NEAR GRD RG									
GROUND RING									
UPPER END									
MIDDLE									
ENTERS BOTTOM									
UPPER END									
MIDDLE									
ENTERS BOTTOM									
UPPER END									
MIDDLE									
ENTERS BOTTOM									
UPPER END									
MIDDLE									
ENTERS BOTTOM									
UPPER END									
MIDDLE									
ENTERS BOTTOM									

DATE: \_\_\_\_\_ ENGINEER-IN-CHARGE: \_\_\_\_\_ DIVERS: \_\_\_\_\_



**TABLE B-2. CATENARY DATA**

MOORING NO: \_\_\_\_\_ CLASS: \_\_\_\_\_ LOCATION: \_\_\_\_\_

DATE: \_\_\_\_\_ ENGINEER-IN-CHARGE: \_\_\_\_\_ DIVERS: \_\_\_\_\_

LEG A		LEG B		LEG C	
DEPTH	ANGLE	DEPTH	ANGLE	DEPTH	ANGLE


**NOTE:** Take readings at specified depths.

**MOORING DATA SUMMARY FOR PREPARATION OF AS-BUILTS**

MOORING# \_\_\_\_\_ CLASS \_\_\_\_\_ LOCATION \_\_\_\_\_ DATE \_\_\_\_\_  
 BOTTOM TYPE \_\_\_\_\_ WATER DEPTH \_\_\_\_\_ MOORING CONDITION \_\_\_\_\_  
 ENGINEER-IN-CHARGE \_\_\_\_\_ DIVERS \_\_\_\_\_


<p><b>BUOY TYPE</b></p> <p>DIMENSIONS _____</p> <p>CONDITION _____</p> <p>TOP HARDWARE _____</p> <p>BOTTOM HARDWARE _____</p> <p><b>RISER LENGTH</b></p> <p>TYPE CHAIN _____</p> <p>LINK WIDTH _____</p> <p>WIRE DIAM. _____</p> <p><b>GROUND RING LOC.</b></p> <p>OUTER DIAM. _____</p> <p>WIRE DIAM. _____</p> <p>CONDITION _____</p> <p><b>LEG A LENGTH</b></p> <p>EXPOSED LENGTH _____</p> <p>TYPE CHAIN _____</p> <p>LINK WIDTH _____</p> <p>WIRE DIAM. _____</p> <p><b>LEG B LENGTH</b></p> <p>EXPOSED LENGTH _____</p> <p>TYPE CHAIN _____</p> <p>LINK WIDTH _____</p> <p>WIRE DIAM. _____</p>	<p><b>LEG C LENGTH</b></p> <p>EXPOSED LENGTH _____</p> <p>TYPE CHAIN _____</p> <p>LINK WIDTH _____</p> <p>WIRE DIAM. _____</p> <p><b>LEG D LENGTH</b></p> <p>EXPOSED LENGTH _____</p> <p>TYPE CHAIN _____</p> <p>LINK WIDTH _____</p> <p>WIRE DIAM. _____</p> <p><b>RISER CONNECTIONS</b> _____</p> <p>_____</p> <p>_____</p> <p><b>LEG CONNECTIONS</b></p> <p>_____</p> <p>_____</p> <p><b>OTHER</b> _____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p> <p>_____</p>
---	--

**ANNEX C**  
**MEDITERANNEAN MOORING**  
**AS-BUILT DATA**

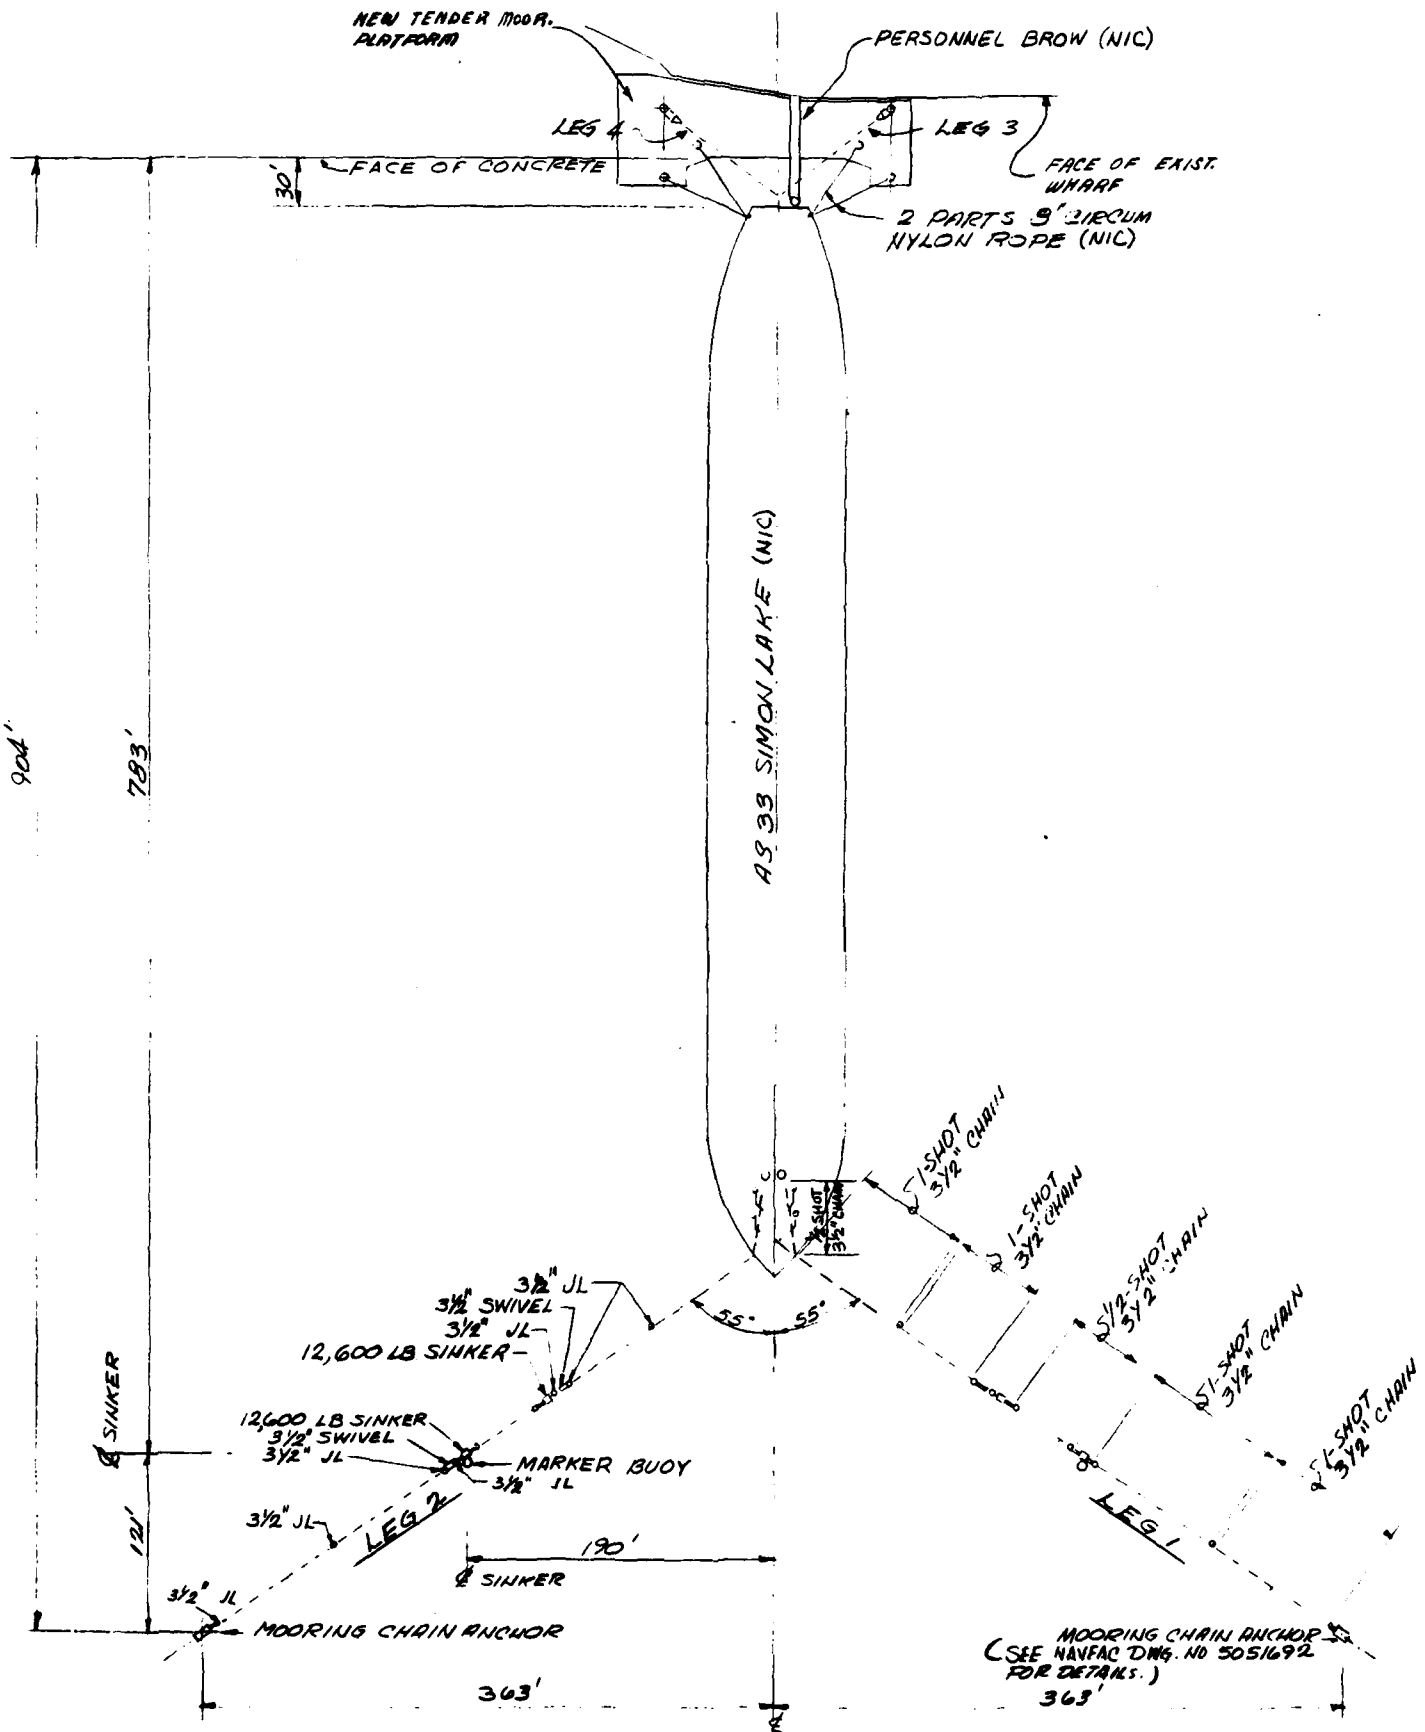

AS 33 SIMON LAKE MOORING PLAN  
SCALE: 1" = 60' 0"

NOTE: MOORING CHAIN PARTS & BUOY PARTS TO BE GOV'T FURNISHED CONTRACTOR ASSEMBLED AND INSTALLED.

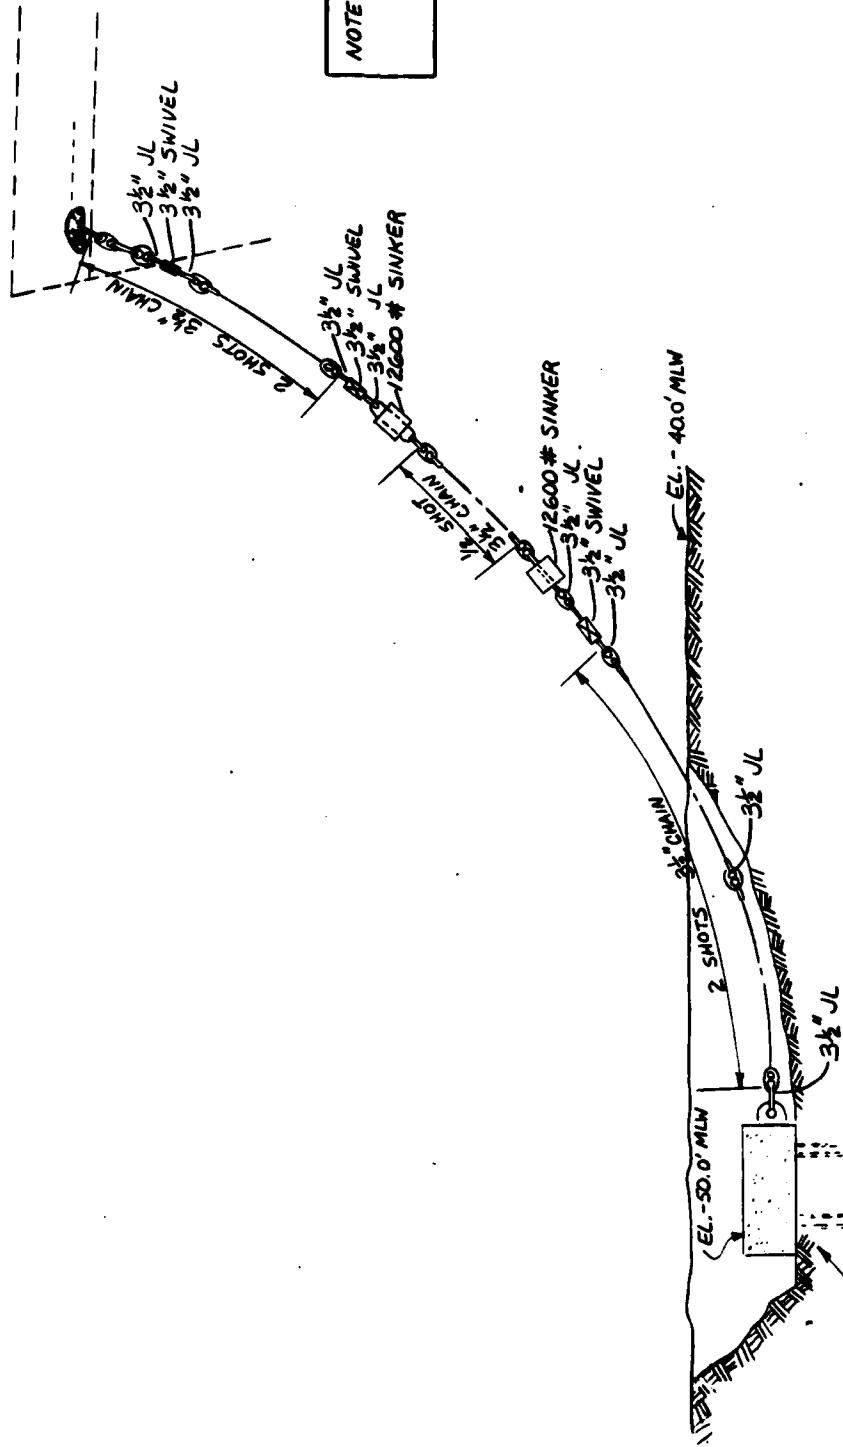

MOORING CHAIN ANCHOR (SEE MANUFACT. AUG. NO. 58571691 FOR DETAILS)

TABLE 1 - PARTS LIST FOR BOW CHAIN (ONE LEG ONLY) LEG 1 OR LEG 2*		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
3 1/2" ANCHOR JOINING LINK	5	GFCI
3 1/2" JOINING LINK	7	"
3 1/2" SWIVEL	4	"
12,600 LB CAST IRON SINKER	2	"
3 1/2" CHAIN 90 FT SHOT	5	"
3 1/2" DETACHABLE LINK	1	"
3" DIE-LOCK DETACH. LINK	1	"

REV. 1 →  
REV. 1 →

\*TOTAL OF 2 LEGS REQUIRED, ONE LEG 1 AND ONE LEG 2.

TABLE 2 - PARTS LIST FOR STERN BRIDLE CHAIN LEGS 3 & 4		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
2 1/2" N.D. DETACHABLE LINK	1	GFCI
3" DETACHABLE LINK	1	"
3 1/2" ANCHOR JOINING LINK	9	"
3 1/2" JOINING LINK	4	"
3 1/2" SWIVEL	4	"
3 1/2" GROUND RING	2	"
2 1/2" ANCHOR JOINING LINK	4	"
2 1/2" CHAIN 7 LINKS	2	"
SPIDER "A"	1	"
SPIDER "B"	2	"
3 1/2" CHAIN 90 FT. SHOT	2	"
3 1/2" CHAIN 24 LINKS	1	"

REV. 1 →

TABLE 3 - PARTS LIST FOR LOCATING & RETRIEVING END OF 1 CHAIN LEG*		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
1" - 6x3x19 GALVANIZED SPRINGLAY WIRE ROPE	80LF	GFCI
MARKER BUOY, MIN. OF 55 GALLON OIL DRUM	1	"
WIRE ROPE CLIPS FOR 1" WIRE ROPE	8	"
1" SCREW PIN SHACKLE AT TOP	1	"
1" WIRE ROPE THIMBLE AT TOP & BOTTOM - HEAVY	2	"

\*TOTAL OF 2 REQUIRED, ONE FOR LEG 1 AND ONE FOR LEG 2.

REVISIONS			
LET	DESCRIPTION	DATE	APPROVED
1	MOORING CHAIN ASSEMBLY DETAILS REVS. K100 & DELETE STD 802,000 LBS STROKE / ALL FIN TABLE 1 DIMS UNEXPECTED TO ASSEMBLY	1/12/70	BTP/mtt JRM/H1/70

TABLE 4 - PARTS LIST FOR ONE SINKER MARKER BUOY ASSEMBLY*		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
55 GAL. DRUM BUOY	1	GFCI
1" - 6x3x19 GALV. SPRINGLAY WIRE ROPE	80LF	"
WIRE ROPE CLIPS FOR 1" WIRE ROPE	8	"
1" SCREW PIN SHACKLE AT TOP AND BOTTOM	2	"
1" WIRE ROPE THIMBLE AT TOP & BOTTOM - HEAVY	2	"
CONCRETE SINKER	1	CFCI

\*TOTAL OF 2 ASSEMBLIES REQUIRED.

TABLE 5 - PARTS LIST LIST OF SPARE PARTS FOR LEGS 1 & 2 - AND STERN BRIDLE CHAIN LEGS 3 & 4		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
3 1/2" ANCHOR JOINING LINK	2	GFCI
3 1/2" JOINING LINK	2	"
3 1/2" SWIVEL	1	"
3" DIELOCK DETACH. LINK	1	"
2 1/2" DIELOCK DETACH. LINK	1	"
2 1/2" ANCHOR JOINING LINK		"
FOR BARREL BOW CHAIN MARKER BUOY		
WIRE ROPE CLIPS FOR 1" WIRE ROPE	3	GFCI
1" SCREW PIN SHACKLE	1	"
1" WIRE ROPE THIMBLE	1	"

TABLE 6 - PARTS LIST BROWS, PERSONNEL		
DESCRIPTION OF ITEM	NO. REQ'D	REMARKS
5-70 ALUM BROW W/CASTER WHEELS (GFCI)	1	SEE Y&D DWG. B36947
4-60 ALUM BROW W/CASTER WHEELS (GFCI)	1	SEE Y&D DWG. B36927 (PROVIDE PIPE HANDRAILS)
PAD EYES (GFCI)	2	SEE Y&D DWG. 470785
4-B TIMBER BROW (GFCI)	1	SIMILAR TO Y&D DWG. 470781

NOTE: SEE Y&D DWG. NOS. B36924 & B36925 FOR CASTER WHEEL INFORMATION.

LEGEND:  
GFCI - GOV'T FURNISHED GOV'T INSTALLED  
GFCI - GOV'T FURNISHED CONTRACTOR INSTALLED  
CFCI - CONTRACTOR FURNISHED & INSTALLED

END

DTIC

6-86