

S.

A STATES A CALLER OF

4697 MS.01

# MC FILE COPY G

# TRANSPARENT GLASS CERAMICS DOPED BY CHROMIUM(III) AND CHROMIUM(III) AND NEODYMIUM(III) AS NEW MATERIALS FOR LASERS AND LUMINESCENT SOLAR CONCENTRATORS

Research supported by U.S. Army under Contract No. DAJA 45-85-C-0051

> Progress Report 1.10.85 - 31.3.86

> > Submitted by

Professor Renata Reisfeld Department of Inorganic and Analytical Chemistry The Hebrew University of Jerusalem Jerusalem 91904 Israel

to

European Office of the U.S. Army and 223/231 Old Marylebone Rd. London WC1 5TH England

AD-A191 14

ł

Army Materials and Mechanical Research Center, Watertown, Massachusetts 02172 U.S.A.

Tait oursament has been approved to public release and salet in distribution is enlimitation association E 882 71 086

EB 1 7 1988

#### Summary

In our efforts to develop new materials based on Cr(III) doped transparent glass ceramics we have prepared a variety of glass ceramics with Cr(III) in  $Si0_2^{\Gamma}-A1_2^{\circ}S_3^{\circ}-RO$  (R = Mg, Ca, Zn).

Spectroscopic properties (absorption and emission) as well as luminescence lifetimes of  ${}^{4}T$  and  ${}^{2}\overline{E}$  of Cr(III) were measured.

 $\leq$  A correlation was found between the crystalline phases obtained after appropriate heat treatment as determined by X<sup>2</sup>ray diffraction and the spectroscopic data.

Interpretation was made based on the experimental results as to the position of Cr(III) in various crystalline phases.

The results were summarized in a paper entitled "Transparent glassceramics doped by Cr(III): Spectroscopic properties and characterization of crystalline phases", by A. Kiselev, R. Reisfeld, A. Buch and M. Ish-Shalom and submitted to the Journal of Noncrystalline Solids.

In the near future we shall study the experimental conditions of glassceramics preparation using interchangeably electric and gas furnaces. In addition to spectroscopic and X-ray measurements of the samples we plan to perform a series of EPR measurements which will enable us to distinguish between various species of Cr(III).

ccession For NTIS GRA&I DUIC TAB Unannounced Justification By\_ Distribution/ Availability Codes Avail and/or Special Dist

12. TO ......

March 31 - Afril 4, 1986 Vilamoura (Algerre) reserved

OPTICAL PROPERTIES OF RARE-EARTHS AND TRANSITION METAL IONS IN FLUORIDE GLASSES.

LANDLIN THAT THE TANK THE PARTY AND THE

222222

11240

51.5

RENATA REISFELD

DEPARTMENT OF INORGANIC AND ANALYTICAL CHEMISTRY THE HEBREW UNIVERSITY OF JERUSALEM, JERUSALEM 91904, ISRAEL.

#### 1. ABSTRACT

The absorption spectra of chromium(III) and nickel(II) at octahedral sites in a zirconium barium fluoride glass are analyzed and compared with vitreous and crystalline mixed oxides, suggesting slightly longer Cr-F and Ni-F distances than in crystalline fluorides. Laser properties of rare earth ions in fluoride glass(ZBLA) having composition of 57ZrF(1,34BaF) 5LaF(,4AIF), or (PBLA) having composition of 36PbF(1,24ZnF),35GaF(1,34F) 2AIF, for Nd(III) were calculated. Pumping efficiencies, lifetimes of excited and terminal levels and stimulated peak cross-sections are presented. It is shown that multiphonon relaxations ((in the case of energy difference less than 3000 cm<sup>-</sup>) are always orders of magnitude lower in the fluoride glass than in the tellurite glass and the inhomogeneous width is consistently smaller in fluoride glass. No significant difference was found for concentration quenching between the two kinds of glasses. Energy transfer between Mn(II) and Nd(III) can increase pumping efficiencies of Nd(III) lasers(Kenwork-) / SKAKL

# 2. INTRODUCTION

Fluoride glasses containing about 50 mole% of  $ZrF_{4}$  which can be replaced by  $HfF_{4}$  or  $TnF_{4}$ [1-3], colloquially called ZBLA glass ,have been considered as materials for fiber optics in the range of 0.3-5 µm [4]. Another important category of fluoride glasses containing zinc(II) (or manganese), gallium (III) and lead(II) fluorides was invented [5,6] at the University of Maine, Le Mans (PBLA glass). The absorption spectra and luminescence of  $4f^{-1}$  erbium(III) and 3d<sup>-2</sup> manganese (II), and the mutual energy transfer between excited states of these two species were studied in such a glass [7]. In ZBLA glass, the luminescence of  $4f^{-2}$  praseodymium(III) [8,9],  $4f^{-2}$ europium(III) [10,42], $4f^{-10}$  holmium(III) [11,12] and erbium(III) [13-15] occurs from more excited J-levels than usual, the lower limit still allowing perceptible luminescence for the energy gap between the emitting J-level and the closest lower-lying J-level being 2000 cm<sup>-2</sup> (0.25 eV), some 2 to 4 times smaller than in nearly all other glasses and crystals. It may be noted that this rich emission spectrum to several J-levels besides the groundstate is observed also at room temperature.

The superior optical characteristics of fluoride glasses for IR fiber optic applications also provide an ideal medium or host enabling the glass to be integrated into a system acting as a laser light source as well as the actual waveguide material. The spectroscopic and fluorescent properties of Nd(III) containing fluorozirconate glasses have been reported by Weber in work with the Lucas-Poulain group at Rennes [16] and optical absorption of 3d transition metal ions such as Fe, Co, Ni and Cu by Ohishi et al.[17].

progen

conce and nonradiative relaxation of rare earths in amorphous materials has recently been reviewed [18].

3. CHROMIUM(III) AND NICKEL(II) IN ZBLA GLASSES

The absorption spectra of Cr(III) and Ni(II) at room temperature are a in Fig 1. The observed band peaks, and ligand field and Racah proceeders are presented in Table I.

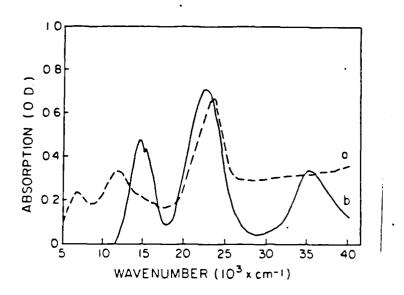


FIGURE 1. Absorption spectra of a) Cr(III) and b) Ni(II) in ZBLA  $(56.752rF_4, 34.25BaF_2, 4.5LaF_3, 4AlF_3, 0.5(NiF_2, CrF_3))$  at room temperature.

From the absorption spectra of Cr(III) and Ni(II) in ZBLA glass, both in the work of Reisfeld et al.[19] and in that of Ohishi et al. [17], as well as from the absorption spectra of these ions in PBLA glass [5], it can be demonstrated that the site symmetry for both Cr(III) and Ni(II) in these glasses is close to cubic octahedral symmetry. Sites of lower symmetry would have relatively much stronger absorption bands. Such a situation could be predicted for PBLA glass in view of the feasible substitution of Zn(II) and Ga(III) by Cr(III) of comparable radius.

Also it is shown that almost all Cr(III) and a large majority of all paramagnetic Ni(II) complexes in solution as well as solid compounds show the coordination number N = 6 with octahedral symmetry. However it is not perfectly trivial that Cr(III) and Ni(II) in ZBLA glass (known from Raman spectra [20] to have more complicated coordination behaviour) turns out to be octahedral to a high approximation. The sub-shell energy difference dq (also designated as  $\triangle$ ) corresponds to the maximum (or strictly to the center of gravity) of the first spin-allowed transition. The Racah parameter [21,22] of interelectronic repulsion B is derived from the diagonal sum rule. Also it is known that:

$$B = (\sigma_2 + \sigma_3 - 3\sigma_1)/1!$$

(1)

Such a derivation is rarely possible in Cr(III) because the third spinthlowed transition is usually hidden by electron transfer bands or other intense absorption. In such Cr(III) cases, B can be derived [23] from  $\sigma_1$ and  $\sigma_2$  alone, providing B = 850 cm<sup>-1</sup> for Cr(III) in ZBLA and PBLA. The nephelauxetic ratio  $\beta$  is the ratio between B from Eq.(1) and B for the gaseous ion, 918 cm<sup>-1</sup> for Cr<sup>-3</sup> and 1041 cm<sup>-1</sup> for Ni<sup>-2</sup>. It is interesting to compare the parameters of Table I with related materials (vitreous and crystalline oxides) which were compiled for 36 Cr(III) cases [24]. スカシンとととも

NATIONAL RECEIPTION

1

0.232.2322

The value for dq of Cr(III) in ZBLA glass is distinctly lower than 16100 cm reported [25] for the cubic elpasolites  $K_2NaGa_{0.05}Cr0_{0.05}F_6$  and  $K_2NaCrF_6$  suggesting 1.5 percent (0.03 A) longer average Cr f distances in the glass than in the crystal as discussed below for analogous Ni(II) cases. The parameters in Table I are closer to CrF\_6 in solution [21] having dq=15200 cm and B=820 cm according to Claus Shaffer. They fall inside the intervals dq=14500 to 16400 cm and B=620 to 850 cm given [26] for Cr(III) in 14 highly different mixed oxide glasses, and may also be compared with dq=17450 and B=725 cm for Cr(OH\_2)\_6^3. The first absorption band of the fluorides and many oxide cases shows a complicated structure because the first two doublet levels E and T almost coincide with T<sub>2</sub> providing additional complications of spin-orbit coupling. The most prominent narrow peak occurs at 654 nm (15300 cm ) in our ZBLA glass, to be compared with 15430 cm in a zirconium barium thorium fluoride glass [26], which should represent the position of E to a good approximation. Since T<sub>2</sub> stretches distinctly well below E one expects any

Since T<sub>2</sub> stretches distinctly well below E one expects any luminescence to be a broad-band transition between the two lowest quartet levels. Only very weak fluorescence of Cr(III) was seen in fluorophosphate glass [26] and in ZBLA [19]. Lifetimes as well as the peak emissions of Cr(III) in ZBLA glass are presented in Table II. The short lifetimes form a striking contrast, not only to the cubic elpasolites [25] with temperaturedependent lifetimes in the range 0.2 to 0.6 msec, but also to Cr(III) in a lithium lanthanum phosphate glass [27] with lifetimes around 0.02 msec (0.025 msec at the same low Cr(III) concentration as in the ZBLA glass) and a quantum yield up to 0.23. Much higher quantum yields are observed in glass-ceramics containing crystallites (much smaller than 400 nm) of spinel-type MgAl<sub>2</sub> Cr O<sub>4</sub> and the isotypic gahnite  $ZnAl_{2-x}$  Cr O<sub>4</sub> [28] and other types [24,29,30]. Such glass-ceramics may be useful as laser materials, conceivably replacing the crystalline alexandrite  $Al_{2-x}$  Cr BeO<sub>4</sub>

materials, conceivably replacing the crystalline alexandrite Al\_\_Cr\_BeO<sub>4</sub> The dq value for nickel(II) in ZBLA glass is unusually small when compared with 8800 NiO; 8650 Ni Mg\_\_O; 8500 Ni(OH<sub>2</sub>)<sub>6</sub><sup>-/-</sup>; 7400 NiTiO<sub>2</sub>; and 7300 Ni Mg\_\_TiO\_ (all values [21] in cm<sup>-/-</sup>). It is particularly interesting to compare with crystalline fluorides [21,31] such as 7800 spinel-type Li\_NiF<sub>4</sub>; 7700 rutile-type NiF<sub>2</sub>; 7500 perovskite-type KNiF<sub>2</sub> (B=950 and 960 cm<sup>-/-</sup> in the two latter compounds to be compared with 940cm<sup>-/-</sup> in Ni(OH<sub>2</sub>)<sub>6</sub><sup>-/-</sup> and 840cm<sup>-/-</sup> in Ni Mg<sub>1-X</sub>TiO<sub>3</sub>). Rüdorff, Kandler and Babel [31] pointed out that such variations can be ascribed to slightly varying internuclear distances R. In this perspective ZBLA seems to have Ni-F distances on the average 1.6% (0.03A) longer than crystalline KNiF<sub>2</sub>. In mixed oxides more dramatic effects can occur, dq of Ni(II) being decreased to 6000 cm<sup>-/-</sup> in ilmenite-type Ni Cd\_TiO<sub>2</sub> (isotypic with NiTiO<sub>2</sub> and MgTiO<sub>3</sub>) and, as shown by Reinen, to only 4800 cm<sup>-/-</sup> in the perovskite (telpasolite superstructure?) Ba<sub>2</sub>Ca\_TENi O<sub>6</sub> [21]. However in such substituted crystals (like in the classical case of ruby Cr Al<sub>2</sub>O<sub>3</sub>) a weak doubt always remains whether the distance M-X between M carrying a partly filled shell and the closest neighbour atoms X fully adapts to the internuclear distances in the closed-shell host lattice. More convincing evidence comes from the Distatic high pressure (especially for atoms [32] on special positions) but substituted crystals remain the only technique of significantly increasing R. A direct determination of R (with a precision of about 0.02A) is accessible to EXAFS using the X-ray absorption edge of the substituting M even in low concentration [33]. DAM DECEMENTS PROVING FREEZERA

NUCCONST.

Contract of

TABLE I:Optical transitions of Cr(III) and Ni(III) in fluoride glasses

ION	TRANSITION ASSIGNMENT				
		[17]	[19]	[17]	[19]
Cr(III)	$4_{A_{2a}}(4_{F}) - 4_{T_{2a}}(4_{F})$	14749	14800		
• •	$\begin{bmatrix} 4 & 2g & 4 \\ A & 2g & 4 \\ \mu & 2g & \mu & \mu & 1g & \mu \end{bmatrix}$	15385	-	Dg=1475	Dq=1480
• •	$ \begin{array}{c} 4 & 2g & 4 \\ - A & 2g & 4 \\ - \mu & 2g & \mu \\ \end{array} \begin{array}{c} 1 & 2g & 4 \\ - \mu & 1g & \mu \\ \end{array} $	22472	22500	B=847	B=850
* *	$4^{2g}_{2g}(4^{F}) - 4^{1g}_{1g}(4^{P})$	34483	34700	C=3136	1
Ni(II)	$3_{A} (3_{F}) - 3_{T} (3_{F})$	6536	6900	]	. 
* *	$A_{-}(F) - T_{-}(F)$	11364	11500	Dg=663	Dg=690
* *	$  ^{2}A (^{2}F) - ^{2}E (^{2}D)$	14925	-	B=956	B=970
• •	$3_{A_{2g}}(3_{F}) - 3_{T_{1g}}(3_{P})$	22936	23300	c=4006	

同ない ひょう ひつきょうけい しょう

)

Nephelauxetic parameter  $\beta$  in ZBLA glass [19] is 0.926 for Cr(III) and 0.932 for Ni(II)

TABLE II:Lifetimes of Nd(III)(876 nm emission) and Cr(III)(~800nm emission) in ZBLA glass.

DOPANT 1	DOPANT 2	EXCITATION	EMISSION ג, [מתח]	DEC	CAY,[μ	sec]
- 0.5 Mn 0.5 Nd 0.5 Mn 0.5 Nd 0.5 Nd	0.5 Cr 0.5 Cr 0.5 Cr 0.5 Cr 0.5 Cr 0.5 Cr	465 414 337 337 450 579	797 790 804 804 876 876	1.4 0.4 0.6 0.5 381 380	3.0 1.0 1.2 1.9 410 405	5 6.0 3.1 3.1 3.9 410 -

The only possibility of luminescence of Ni(II) in ZBLA glass would be at the foot (some 6000 cm<sup>-</sup>) of the first absorption band, but we did not detect any. The spin-forbidden absorption band due to the first singlet level E corresponds to the rather broad shoulder at 15000 cm<sup>-</sup> (see Fig.1)

parable to the peak [31] of crystalline Ni(II) fluorides between 15000 and 15400 cm  $^{-1}$ .

# 4. NEODYMIUM(III) IN FLUORIDE GLASSES:

1.1. Intensity parameters and radiative transitions of Nd(III)

The absorption spectrum of Neodymium(III) serves as a basis for a complete set of predictions of transition rates within the  $4f^3$  configuration of Nd(III). The procedure is based on the theory of Judd - Ofelt and is described in detail elsewhere [14]. Here we describe briefly the main steps of its evaluation;

According to the theory the otherwise forbidden transitions within the f-f configuration of rare-earths become slightly allowed by admixing of wavefunctions of the f-f configuration with odd components of crystal field potential. The intraconfigurational transitions then become subject to a new set of selection rules and oscillator strengths of the transitions depend parametrically on the three phenomenological parameters  $\Omega_2$ ,  $\Omega_4$ ,  $\Omega_6$ . Reduced matrix elements for the transitions are almost invariant in respect to the crystal field strength [34] and were tabulated for all rare earths ions [35].

The optical transitions of rare earths in solids are predominantly of electric dipole character and their spectral intensities can be described using the treatment of Judd and Ofelt. In this approach the line strength S of a transition between two J states is given by the sum of products of empirical intensity parameters  $\Omega_t$  and matrix elements of tensor operators  $U^{(t)}$  of the form

$$S(J,J') = e^{2} \sum_{t} \Omega_{t} |\langle aJ | | U^{(t)} | |bJ' \rangle|^{2}$$

(2)

たんたいたんかん

# where t=2,4,6

The values of  $Q_{t}$  are obtained from a least-squares fit of measured and calculated absorption line strengths and typically have an experimental uncertainty of about 10%. The integrated intensities of the absorption bands yield Q's which are an effective average over the different rare earths environments in the glass.

The most significant factor determining the values is the strengths of the odd-order terms in the expansion of the local field at the rare earth sites. These in turn are affected by the nearest-neighbour anion(s) and cations. For a given glass former systematic changes of  $\Omega$ , have been observed with the changes in the size and charge of network modifier ions [36].

The three omega's are determined by solving an overdetermined set of linear equations built by equating the measured oscillator strengths with the sum of products of the unknown omega's with the appropriate reduced matrix elements. The three omega's found from the solution are put into a computer program which calculates all the radiative transition rates possible in the system analyzed. The omega parameters for ZBLA and PBLA glasses are given in Table III. The oscillator strengths of Nd(III) are given in Table IV. Generally  $\Omega_2$  is lower in flucride than in oxide glasses, which is of no consequence for the  $F_{3/2} - I_{11/2}$  laser transition for which  $U^{(2)}=0$ 

Table III: Omega parameters in ZBLA and PBLA glasses.

GLASS	REFERENCE	Ω <sub>2</sub> .[pm <sup>2</sup> ]	Ω <sub>4</sub> ,[pm <sup>2</sup> ]	Ω <sub>6</sub> ,[pm <sup>2</sup> ]
PBLA	[19]	1.01±0.28	3.73±0.35	6.19±0.43
ZBLA	[19]	1.10±0.25	3.80±0.30	5.53±0.20
ZBLA	[16]	1.95±0.26	3.65±0.38	4.17±0.17

## 4.2 Fluorescent lifetimes and nonradiative transitions

The calculation of nonradiative transfer rates due to multiphonon decay is accomplished by subtracting the calculated radiative rates from the reciprocals of the integrated lifetimes of as many as possible energy levels of the rare earth ions and plotting the logarithms of the numbers against energy gaps between the levels and their nearest lower neighbour. Then the two parameters of the exponential multiphonon decay rate law are calculated; the exponential parameter  $\alpha$  from the slope of the plot and the electronic factor B from its intercept [37].

Since only three energy levels of Nd(III) in fluoride glasses have lifetimes long enough to be measurable the  $\alpha$  and B were determined from 3 points only. Fortunately the result, which is  $\alpha = 0.0053\pm0.0005$  and B = 1.63±0.1×10<sup>-0</sup>, agrees well with other sets of data which were measured on Ho(III) in ZBLA glass in our laboratory [8]. The parameters are substituted into formula (3)

W\_= Bexp[-aAE]

(3)

where  $\Delta E$  is the energy gap from the electronic level to its next lower neighbour. The entire set of transition rates is calculated, now with the nonradiative transition rates included [37].

The result of such a procedure is shown in Table IV for Nd(III) in PBLA glass. The calculated oscillator strengths agree well with the measured values. The omega's calculated from our ZBLA glass compare well with the values obtained by Lucas et al.[16] in their study of Nd(III) in ZBLA glass. The last two columns in Table IV compare calculated lifetimes with the measured lifetimes. The outstanding property of fluoride glasses is the relatively long-lived luminescence from levels which are separated only by a small energy gap to the next lower level [12]. Here we are able to record and measure the lifetimes of emissions from two levels; ther alized D<sub>3</sub>/2 (361nm) and P<sub>2</sub>/2 (387nm). The first three emission lines are identified as belonging to the transitions: D<sub>3</sub>/2<sup>-1</sup> I<sub>9</sub>/2 (361nm), D<sub>3</sub>/2<sup>-1</sup> I<sub>1</sub>/2 (412nm). The next, much weaker group of Tines the lines are given in Table IV for Nd(III) in PBLA glass alone and in Table V for Nd(III) with Mn(II). The integrated lifetimes of these emissions are not influenced by the presence of Mn(II) ions. In both Tables the first group of transitions from the D manifold. Its predicted lifetime is 0.97 µsec. The second group of lifetimes (15-20µsec) belongs to the transitions from the D manifold. Its predicted lifetime is 0.97 µsec. The second group of lifetimes (15-20µsec) belongs to the transitions from the D manifold. Its predicted lifetime is 0.97 µsec. The second group of lifetimes (15-20µsec) belongs to the transitions from the D manifold. Its predicted lifetime is 13.6 µsec. The predictions which are based on the theory of Judd-Ofelt combined with the exponential multiphonon law are not expected to give better agreement [8].

Ble IV:Oscillator strengths and lifetimes of Nd(III) in PBLA glass: 36PbF<sub>2</sub>,24ZnF<sub>2</sub>,35GaF<sub>3</sub>,2AlF<sub>3</sub>,3YF<sub>3</sub>,2LaF<sub>3</sub>,2NdF<sub>3</sub>)

	T	····			
TRANSITION	WAVELENGTH	OSCILLATOR	STRENGTHS	LIFETI	MES,[µsec]
	[ [nm]	OBSERVED	CALCULATED	OBSERVED	CALCULATE
$D_{1/2} - 4I_{0/2}$	354	9.04	4.27	-	0.00007
$D_{5/2} - I_{9/2}$	357 <sup>5</sup>	9.04	1.27	-	0.00009
$D_{3/2} - \frac{1}{1} \frac{9}{2}$	361	-	3.7	1.5 .	1.0
3/2 $4$ $3/2$ $3/2$ $11/2$	381	-	11.5	1.4	1.0
$3/2$ $4^{1}/2$ 3/2 $13/2$	412	-	1.15	1.2	1.0
3/2 + 5/2	637	-	5.10	1.70	1.0
3/2 4 3/2 3/2 9/2	387	0.09	0.05	_	13.6
$3/2^{-4}$ $11/2$	419		1.00	19.0	13.6
3/2 4 11/2 3/2 13/2	454	0.04	0.04	15.0	13.6
3/2 1 15/2	502	-	0.01	18.0	13.6
$3/2 - H_{0/2}$	746	-	2.40	18.0	13.6
3/2 <sup>-1</sup> F9/2	886	-	2.40	18.5	13.6
$5/2^{-4}$	1 426-440 I	0.17	0.04	-	0.0008
$\frac{1}{2} \frac{1}{2} \frac{1}$		0.17	0.09	- 1	0.3000
11/2 $43/2$ $11/2$ $9/2$	475	1.38	0.21	- 1	0.00003
$3/2^{-1}$	478	1.38	0.35		0.00005
$\frac{3}{2} \frac{4}{19}$	483	1.38	0.42	-	0.1000
$\frac{1}{2}$	510}	1.38	1.50	-	0.0002
$\frac{1}{7/2} \frac{1}{4} \frac{3/2}{10/2}$	523	<sup>′</sup> 6.98	2.70	-	0.2500
7/2 <sup>-1</sup> 9/2	577,	9.78	2.74	-	0.00015
$\frac{1}{2} \frac{1}{4} \frac{1}{2}$	577 <sup>}</sup>	9.78	7.30	-	0.0040
11/2 $49/2$ $11/2$ $9/2$	620	0.18	0.18	-	0.0200
$\frac{1}{9/2} - \frac{1}{1} \frac{9/2}{9/2}$	678	0.37	0.66	-	0.0100
<sup>4</sup> I	732,	6.41	5.70		0.00004
7/2 4 <sup>-9/2</sup>   3/2-1 <sup>1</sup> 9/2	743 -	6.41	0.03	-	0.0009
$\frac{3}{2} \frac{4}{1} \frac{9}{2}$	797,	7.13	1.40	-	0.00006
5/2 4 9/2   5/2 19/2	802	7.13	6.20	-	0.0090
JIE L 7/6	860	1.92	2.20	190.0	337.00

میر جرید مدر اداره (۲۰۰۰) به و اداری (۲۰۰۰) به و مردی (۲۰۰۰)

÷.

The integrated lifetime of  ${}^{4}$ F<sub>3/2</sub> level of Nd(III) is 190 µsec in 36PbF<sub>2</sub>.24ZnF<sub>2</sub>,35GaF<sub>3</sub>.2AlF<sub>3</sub>,3YF<sub>3</sub>.2LaF<sub>2</sub>,2NdF<sub>2</sub>, 330 µsec in 36PbF<sub>2</sub>.24MnF<sub>2</sub>, 35GaF<sub>3</sub>.2AlF<sub>3</sub>,3.8LaF<sub>3</sub>,0.2NdF<sub>3</sub> and about 400 µsec in 56.50ZrF<sub>4</sub>,34.00BaF<sub>2</sub>, 4.5LaF<sub>3</sub>,4AlF<sub>3</sub>,0.5CrF<sub>3</sub>,0.5NdF<sub>3</sub> (Table II). Here the prediction which is 450 µsec for ZBLA and 337 µsec for PBLA is near to the experimental result, while the short 190 µsec is due to the cross-relaxation mechanism, vide infra. A summary of lifetimes of Nd(III) ions in various samples is shown in Tables II,IV and V.

TABLE V.Neodymium in PBLA glass; 35PbF<sub>2</sub>, 24MnF<sub>2</sub>, 35GaF<sub>3</sub>, AlF<sub>3</sub>, (4-x)LaF<sub>3</sub>, xNdF<sub>3</sub>

					1					
			WAVELEN	TH ,[nm]	LIFE	TIMES	,[µse	c]	RISE	rime
	TRANSITION	X	EXCITATION	EMISSION	τ <sub>1</sub>	172	172	<sub>1</sub>	SHORT	LONG
				<u> </u>	+	<u>⊢</u>				
	$4_{D_{3/2}} - 4_{I_{9/2}}$	0.2	337	360	1.4	1.5	1.8	1.5	<0.5	-
	$ ^{4}D_{3/2}^{3/2} - {}^{4}I_{11/2}^{3/2}$	0.2	337	381	1.8	2.0	2.3	2.0	<0.5	-
		0.2		810	471	1 -	-	471	0.60	44
)	?	0.2	407	810	614	-	-	614	0.60	49
	$ {}^{4}F_{3/2} - {}^{4}I_{9/2} $	0.2	337	865	567	507	499	500	1.5	70
1		0.2	407	865	632	642	-	637	1.5	85
[		0.2	579	865	265	327	345	330	-	7.0
		0.2	337	361	1.3	1.5	1.7	1.5	<0.5	-
	${}^{4}D_{2/2} - {}^{4}I_{11/2}$	0.2	337	381	1.2	1.4	1.8	1.5	<0.5	-
	Z_** 4_ * (	2.0	337	419	18.0	20.0	21.0	20.0	<0.5	1.5
	$^{2}_{P}^{3/2}_{3/2}$ $^{11/2}_{15/2}$	2.0	337	499	19.0	18.0	18.0	18.0	<0.5	1.5
	4 - 4	2.0	337	637	1.8	-	-	1.8	<0.5	-
		2.0	337	743	18.0	18.0	20.0	18.0	<0.5	1.5
.	4 - 4 -	2.0	337	<b>6</b> 867	176	215	238	220	-	3.0
		2.0	407	867	180	210	240	220	-	3.0
1	$ {}^{4}_{F_{3/2}}, {}^{5/2}_{I_{9/2}} $	2.0	579	867	172	192	210	196	-	3.0
	<u>, , , , , , , , , , , , , , , , , , , </u>	2.0	337	886	18.0	24.0	28.0	25.0	<0.5	2.5
I		1		L	1	L	L	L!		J

# 4.3. Cross-relaxation

Special cases of energy transfer are cross-relaxations when the original system loses the energy  $(E_2-E_2)$  by obtaining the lower state  $E_2$  (which may also be the groundstate  $E_1$ ) and another system aquires the energy by going to a higher state  $E_2$  [37]. Cross-relaxation may take place between the same lanthanide (being a major mechanism for quenching at higher concentration in a given material) or between two differing elements, which happen to have two pairs of energy levels separated by the same amount. The cross-relaxation between a pair of rare earth ions is graphically presented in Fig.3 of [37].

The measured lifetime of luminescence is related to the total relaxation when by

معاد وراغا فالجد شاق

لندينينين

$$1/\tau = \Sigma W_{nr} + \Sigma A + P_{cr} = 1/\tau_{o} + P_{cr}$$

where  $\Sigma A$  is the total radiative rate,  $\Sigma W$  is the nonradiative rate and P is the rate of cross-relaxation between adjacent ions, and  $\tau$  is intrinsic lifetime.

(4)

(5)

(6)

The critical radius R for cross-relaxation is defined by

 $P_{cr}(R_{o}) \cdot (1/\tau_{o}) = 1$ 

R being the critical distance at which the probability for cross-

relaxation P equals the sum of radiative and multiphonon relaxations. The cross relaxation channel for Nd(III) is  $(F_{3/2}) + (I_{9/2}) = 2(I_{15/2})$ . The critical radii in various glasses are presented in Table VI.

TABLE VI. Critical radii for cross-relaxation of Nd(III) in tellurite and fluoride glasses

COMPOUND	CONCENTRATION [10 <sup>20</sup> /cm <sup>3</sup> ]	CRITICAL RADIUS[A]	† iptrinsic [µsec]	T measured [µsec]	EXCITATION ۲.[nm]
0.5/ZnTe	1.10	4.74±.11	187	178	579
1.6/ZnTe	3.50	5.07±.36	187	130	579
2.7/ZnTe	5.80	5.81±.25	187	102	579
0.5/ZBLA	.85	3.72±.80	455	443	576
2.0/PBLA	<b>h70</b> 4.02	5.07±.61	345	264	576

ZnTe- 35Zn0,65Te0,

4.4 Laser action :

The formula for peak cross-section is [38]

 $\sigma = \frac{\lambda^4 A}{8\pi cn^2 \Delta \lambda} [cm^2]$ 

where  $\lambda$  - emission wavelength [cm]  $\Delta \lambda$  - full width at half height of emission band [cm] n - refractive index A - radiative transfer probability [sec<sup>-1</sup>]

... Threshold power for transverse pumping is

$$P_{th} = \frac{hc(L_o+L_{res}).10^{-7}}{2\lambda_p \tau_f^{1F\sigma \alpha_p}}$$
(7)

where L  $\,$  - resonant power loss due to self-absorption at the laser wavelength which is defined as

where N - number density of lasing lines

- Boltzmann factor for the terminal laser level

 $\beta$  - Boltzmann factor is  $Z^{y}$  - partition function

1 - length of laser

Md(III) the terminal level, I positioned at 2000 cm<sup>-1</sup> then E/kT<sup>-11/2</sup> for the 1060nm luminescence is Boltzmann factor is - 4.5x10<sup>-5</sup>. For a 1 cm long minilaser at representative values of N and o:

Lres = 0.2-0.1 %.

 $L_0$  - Nonresonant loss which is mainly due to the absorption of the

- medium and loss at mirrors. It is usually taken to be 0 1.5% - pumping wavelength. In our case it is 806nm of LED, having 25nm р bandwidth.
- r lifetime of lasing level. F<sup>f</sup> Boltzmann population function of the lasing level. The  ${}^{4}F_{3/2}$  of Nd(III) is split into 2 main bands in glasses. The fraction of the population at the lasing level  $(R_1)$  is 0.64 - 0.72R
- absorption coefficient of the pumped level which in our case is centered at 800nm ( $F_{5/2}$ + $H_{0/2}$ ) and is obtained by dividing the optical density of the sample by its thickness a۶

Table VII presents the comparison of peak cross-section and threshold  $p_{U \to C}$  for laser action of Nd(III) in fluoride, oxide and chalcogenide glasses for transverse pumping. From the Table it can be seen that the laser characteristics for Nd(III) in fluoride glasses are quite similar and even better than in ED-2 glass.

TABLE VII:Spectroscopic and Laser Properties of Nd(III) in Fluoride Glases as Compared to Chalcogenide and Oxide Glasses

Host	Assignment	wavelen.	[ cm <sup>3</sup> ]	Abs.coef.  at 806nm   [cm <sup>-1</sup> ]	1		12-17	12 -1%	l	hef.
ZBLA	$ ^{4}F_{3/2}  ^{4}I_{11/2}$	1049	2.72	3.14	26.7	2.9	57	-	400	16
PELA	$  \frac{4}{5} \frac{5}{2} \frac{4}{11/2} \frac{11/2}{11/2}$	1039	4.02	3.57	33.0	2.75	112	I -	190	19
PBLA	$\frac{4}{5}$ $\frac{5}{2}$ $\frac{4}{1}$ $\frac{11}{2}$ $\frac{11}{2}$ $\frac{11}{2}$	1306	4.02	3.57	65.0	0.85	-	256	190	19
ED-2	<sup>4</sup> F <sub>3/2</sub> <sup>-1</sup> 11/2	1060	1.83	1.27	27.8	2.9	173	-	300	38
ED-2	<sup>4</sup> F <sub>3/2</sub> <sup>-1</sup> I <sub>13/2</sub>	1340	1.83	3.14	64.4	0.72	-	590	300	38
	$  F_{3/2} - I_{11/2}  $		3.46	4.73	29.0	3.6	93	-	130	19
	$  F_{3/2} - 1_{13/2}   F_{3/$		3.46	4.73	173.0	0.76	-	367	130	19
	$ F_{3/2} ^{13/2}$		2.63	14.50	-	7.95	11.3	† -	100	41
عنت	$ {}^{4}F_{3/2} - {}^{4}I_{13/2}$	1370	2.63	14.50	1 -	3.60	-	27.7	100	41

ZELA - 57.0ZrF4,34.0BaF2,3.0LaF3,4.0A1F3,2.0NdF3 moleX PBLA - 36PbF2.24ZnF2.35GaF3.2A1F3.31F3.2LaF3.2NdF3 molex ED-2 - 605102.27.5L120,10C80,2.5A1203.0.16CeO2 molex.2.012Nd203 W1X Chalcogenide, GLS - 3Ga2S3,0.85LaS3,0.15Nd2S3 Zinc Tellurite.2nTe - 35Zn0.65TeC\_ moleX.2 Nd203 wtX

(8)

うちょうかん たいのののため 日本のないかられたからない


1.1

ENERGY TRANSFER FROM MANGANESE(II) TO ERBIUM(III) AND NEODYMIUM(III) (1. Energy transfer from Mn(II) to Er(III)

Energy transfer between Mn(II) and Er(III) in PBLA glass having composition  $36PbF_{2}$ ,  $24(Mn, Zn)F_{2}$ ,  $35GaF_{3}$ ,  $5A1(PO_{3}, F)_{3}$  doped with Er(III) has been studied recently [7]. The emission of Mn(II) in absence of Er(III)consists of a broad band centered around 630nm and an integrated lifetime of 1.4msec. In the presence of Er(III) the intensity and lifetimes are decreased as a result of energy transfer to the  $F_{0/2}$  level of Er(III). The fluorescence of Er(III) arising from  $S_{3/2}$  at 543nm has an integrated lifetime of 60µsec in the absence of Mn(II) and is decreased to 10µsec in the presence of Er(III) is enhanced in the presence of Mn(II). The 666nm luminescence of Er(III) is enhanced in the presence of Mn(II) and has a non-exponential time dependence. The longer component corresponds to the transfer of energy from Mn(II) to Er(III) while the short-lived component is probably due to the cascading down Er(III)-Mn(II)-Er(III) through states above the Stokes threshold of Mn(II).

5.2. Energy transfer from Mn(II) to Nd(III)

The evidence of energy transfer between Mn(II) and Nd(III) in PBLA and ZBLA glass is seen in Figs. 3 and 4 where Nd(III) can be excited via Mn(II)at 337 nm or at 400 nm [43]. The risetime of about 0.1 msec in Figs. 3 and 4 is characteristic of the time at which the energy transfer takes place. Fig.4 shows the approximately exponential decay with lifetime 0.34 msec by excitation in the Nd(III) band at 579nm, the emission being measured at

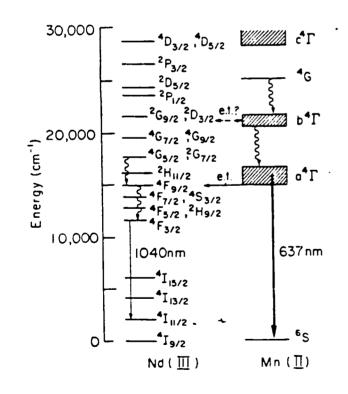

7)

Fig.2 Scheme of energy levels of Nd(III) and Mn(II) in fluoride glass.

876nm. When the excitation is done at 404nm, at the low-energy edge of the narrow S - G absorption band of Mn(II), the same Nd(III) emission at 876nm shows a rise-time of about 0.1 msec followed by an exponential decay with the lifetime 1.45 msec. Such storage of energy in the lowest guartet of Mn(II) was previously observed [7] for Mn(II) and Er(III) in zinc gallium lead fluoride glass. The energy scheme for transfer between Mn(II) and Nd(III) in such a glass is presented in Fig.2. In the absence of Nd(III) the luminescence of Mn(II) in ZBLA measured at 545nm shows an approximately exponential decay curve with lifetime between 13 and 14 msec(note the concentration of Mn(II) of 1 wt%). This mechanism of energy storage has obvious potential applications in laser materials

"Issistant"

La contrata de la contrat contrata de la contrata

للتحدد

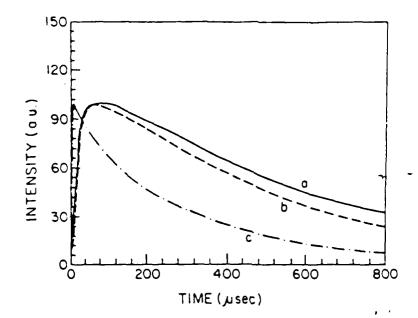


Fig.3 Luminescence decay curves of Nd(III) in PBLA glass(36PbF<sub>2</sub>,24MnF<sub>2</sub>, 35GaF<sub>3</sub>,2AlF<sub>2</sub>,3.8LaF<sub>3</sub>,0.2NdF<sub>3</sub>). a) Excitation 407nm. Lifetime 637 µsec. Risetime 85psec. b) Excitation 337nm. Lifetime 500µsec. Risetime 70µsec. c) Excitation 579nm. Lifetime 330µsec. Risetime 2.0µsec. NAMES NOT STREET STREET STREET STORES STREET STREETS STREETS

1444452

2

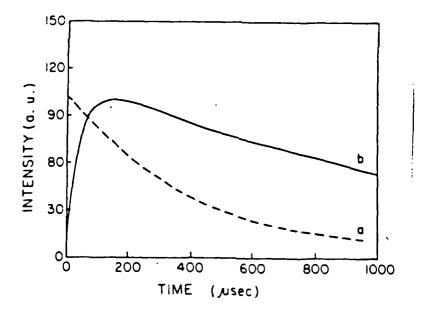


Fig.4 Luminescence decay curves of Nd(III) in ZBLA glass (55.75ZrF<sub>4</sub>, 33.75BaF<sub>2</sub>,4.5LaF<sub>2</sub>,4AlF<sub>2</sub>,1MnF<sub>2</sub>,1NdF<sub>2</sub>). a)Direct excitation of Nd(III) at 579 nm. Lifetime 340psec. <sup>3</sup>b)Excitation of Mn(II) at 404nm. Lifetime 1450 psec.

Quantitative calculation of energy transfer between Mn(II) and Nd(III) in PBLA glass was performed by the steady state and dynamic measurements. The

results of the calculations using the two methods [43] are presented in Table VIII.

Table VIII. Efficiency of energy transfer from Mn(II) to Nd(III) in PBLA glass (35PbF<sub>2</sub>,24MnF<sub>2</sub>,35GaF<sub>3</sub>,AlF<sub>3</sub>,(4-x)LaF<sub>3</sub>,xNdF<sub>3</sub>)

x	EXCITATION WAVELENGTH	EFFICIEN DECAY TIME	TRANSFER RATE[sec <sup>1</sup> ]		
0.2 0.2 2.0 2.0	407	0.52 0.57 0.94 0.92	0.57 0.56 0.93 0.92	1040 1550 14400 12700	+

A fair agreement between the two series of results using steady state and dynamic measurements indicates that the two methods are mutually consistent in respect to the system studied.

The transfer rates indicate that the transfer proceeds according to a first-order kinetics, the concentration of Mn(II) being constant and concentration of Nd(III) variable. The transfer rates depend strongly on the concentration of Mn(II); the transfer rate for higher concentration of Mn(II)is larger as the Mn-Nd distance decreases. The conclusion being in full accord with intuition nevertheless raises the question whether the kinetics depend on the concentration of ground state Mn(II) ions or rather on the concentration of the excited ions. In our work we observed a systematic trend of faster transfer rates and shorter lifetimes of Mn(II) in presence of Nd(III) when the samples were excited at 337nm. The intensity of the 337nm light from the nitrogen laser is, in our case, a factor of 10 higher than the 407nm light from a dye laser, and the oscillator strength of Mn(II) at 337nm is some 5 times lower than at 407nm. Thus we can expect a twofold increase in excited Mn(II) concentration in the case of excitation at  $337 n^m$ If the transfer rates were dependent on the concentration of the excited Mn(II) ions we would then expect an increase in transfer rate, decrease in the lifetime of Mn(II), decrease in the risetime of luminescence of Nd(III) 12 level and decrease in the lifetime of the same level. The experimental results favor the excited state concentration dependence.

# 7. SUMMARY

Energy transfer between manganese and neodymium ions in the system studied proceeds through at least three distinct channels; 1- Radiative energy transfer from neodymium to manganese ions in the range

of 27700 cm<sup>-1</sup> to 22000cm<sup>-1</sup>.

2- Nonradiative energy transfer from manganese to neodymium ions. The energy transfer occurs probably among the lowest manifold of manganese and a number of levels of neodymium in the range of 25000 cm to 20000 cm.

The transfer rate of the process is almost linear with concentration of neodymium ions, from 0.2 mole% of neodymium to 2.0 mole% at constant 24 mole% of manganese. At low concentration of neodymium the manganese serves as an efficient storage of energy, which results in the lifetime of neodymium with a factor 2-3 longer than its intrinsic lifetime. The phenomena may be utilized in a Q-switched Nd laser for energy storage 3- Radiative energy transfer from manganese to neodymium ions. The radiation emitted by manganese is absorbed by the  $G_{5/2}$  band of Nd(III) in the region around 600 nm.

There is evidence pointing towards the role which the intensity of the exciting light plays in respect to the rate of energy transfer between Mn(II) and Nd(III) in the system investigated.

A series of experiments is planned in order to study the dependence of the energy transfer rate on the intensity of exciting light, as well as a number of computer simulations of the apropriate model. RECORD DEFENSE REALESS

The systems studied are particularly suitable for a theoretical analysis; the PBLA samples represent an almost ideal case of acceptors Nd(III) which donot interact strongly one with another( $36PbF_2$ ,  $24MnF_2$ ,  $35GaF_3$ ,  $2A1F_3$ ,  $3.8LaF_3$ 0.2NdF<sub>3</sub>) and a similar case but with a moderately strong interaction among the acceptors ( $36PbF_2$ ,  $24MnF_2$ ,  $35GaF_3$ ,  $2A1F_2$ ,  $2LaF_2$ ,  $2NdF_2$ ).

the acceptors (36PbF<sub>2</sub>,24MnF<sub>2</sub>,35GaF<sub>3</sub>,2AlF<sub>3</sub>,2LaF<sub>3</sub>,2NdF<sub>3</sub>). On the other hand the 55.75ZrF<sub>4</sub>,33.75BaF<sub>2</sub>,4.5LaF<sub>3</sub>,4AlF<sub>3</sub>,1MnF<sub>2</sub>,1NdF<sub>3</sub> glass represents a system in which there is a moderate interaction between the donors and weak interaction between the acceptors at equal concentrations of both. Finally by examining Table VII we come to the conclusion that Nd(III) in fluoride glasses has good laser qualities and could be incorporated into fiber optics systems as an integrated light source.

ACKNOWLEDGEMENT: Research partly supported by US Air Force Weapon Laboratory AFB New Mexico, under Contract No. F29601-81-C-0012.

The author is very grateful to Prof C.K. Jørgensen and Dr. M. Eyal for

discussion and to Mrs. Esther Greenberg for her help in preparing this work.

## REFERENCES

e and they are

- 1. Poulain, M., Poulain, M. and Lucas, J., Mater. Res. Bull.10, 243 (1975).
- 2. Poulain, M., Chanthanasinh, M. and Lucas, J., Mater. Res. Bull. 12, 151 (1977).
- 3. Poulain, M. and Lucas, J., Verres Refract. 32, 505 (1978).
- 4. Tran, D. C., Sigel, Jr. G. H. and Bendow, B., J. Lightwave Technology, LT-2, 566 (1984).
- 5. Miranday, J. P., Jacoboni, C. and De Pape, R., J. Noncryst. Solids 43, 393 (1981).
- 6. Miranday, J. P., Jacoboni, C. and De Pape, R., Rev. Chim. Miner. 16, 277 (1979).
- 7. Reisfeld, R., Greenberg, E., Jacoboni, C., De Pape, R. and Jørgensen, C. K., J. Solid State Chem. 53, 236 (1984).
- 8. Eyal, M., Greenberg, E., Reisfeld, R. and Spector, N., Chem. Phys. Lett. 117, 108 (1985).
- 9. Adam, J. L. and Sibley, W. A., J. Noncryst. Solids 76, 267 (1985).
- Reisfeld, R., Greenberg, E., Brown, R. N., Drexhage, M. G. and Jørgensen, C. K., Chem. Phys. Lett. 95, 91 (1983).
- 11. Tanimura, K., Shinn, M. D., Sibley, W. A., Drexhage, M. G. and Brown, R. N., Phys. Rev. B 30, 2429 (1984).
- 12. Reisfeld, R., Eyal, M., Greenberg, E. and Jørgensen, C. K., Chem. Phys. Lett. 118, 25 (1985).
- 13. Reisfeld, R., Katz, G., Jacoboni, C., De Pape, R., Drexhage, M. G.,
- Brown, R. N. and Jørgensen, C. K., J. Solid State Chem. 48, 323 (1983).
- 14. Reisfeld, R., Katz, G., Spector, N., Jørgensen, C. K., Jacoboni, C. and De Pape, R., J. Solid State Chem. 41, 253 (1982).
- 15. Shinn, M. D., Sibley, W. A., Drexhage, M. G. and Brown, R. N., Phys.

Rev. B. 27, 6635 (1983).

- Lucas, J., Chanthanasinh, M., Poulain, M., Poulain, M., Brun, P. and Weber, M. J., J. Noncryst. Solids 27, 273, (1978).
- 17. Ohishi, Y., Mitachi, S., Kanamori, K. and Manabe, T., Phys. Chem. Glasses 24, 135 (1983).
- Reisfeld, R., Proc. Int'l. Symp. on Rare Earth Spectroscopy, Wroclaw, Poland, 1984. World Scientific Pub. Co. PTE. Ltd. 587 (1985).
- Reisfeld, R., Eyal. M., Jorgensen, C.K., Guenther, A.H. and Bendow, B., Chimia (in publication).

NAMES OF A DESCRIPTION OF A

- 20. Bendow, B., Banerjee, P. K., Lucas, J., Fonteneau, G. and Drexhage, M. G., J. Am. Ceramic Soc., 68, C92 (1985).
- Jørgensen, C. K., Oxidation Numbers and Oxidation States, Springer-Verlag, Berlin (1969).
- Jørgensen, C. K., Modern Aspects of Ligand Field Theory, North-Holland, Amsterdam (1971).
- Jørgensen, C. K., Pappalardo, R. and Rittershaus, E., Z. Naturforsch. 20a, 54 (1965).
- Reisfeld, R., Rep. Ser. Swedish Acad. Engineering Sciences in Finland (Proc. Advanced Summer School on Electronic Structure of New Materials, Loviisa, Finland, 1984) 40, part I. 7 (1985).
- Ferguson, J., Guggenheim, H. J. and Wood, D. L., J. Chem. Phys. 54, 504 (1971).
- 26. Andrews, L. J., Lempicki, A. and McCollum, B. C., J. Chem. Phys. 74, 5526 (1981).
- 27. Reisfeld, R. and Kisilev, A., Chem. Phys. Lett. 115, 457 (1985).
- 28. Reisfeld, R., Kisilev, A., Greenberg, E., Buch, A. and Ish-Shalom, M., Chem. Phys. Lett. 104, 153 (1984).
- 29. Kisilev, A., Reisfeld, R., Greenberg, E., Buch, A. and Ish-Shalom, M., Chem. Phys. Lett. 105, 405 (1984).
- 30. Bouderbala, M., Boulon, G., Reisfeld, R., Buch, A., Ish-Shalom, M. and Lejus, A. M., Chem. Phys. Lett. 121, 535 (1985).
- 31. Rudorff, W., Kandler, J. and Babel, D., Z. anorg. Chem. 317, 261 (1962).
- 32. Smith, D. W., J. Chem. Phys. 50, 2784 (1969).
- 33. Cramer, S. P. and Hodgson, K. O., Inorg. Chem. 25, 1 (1979).
- 34. Reisfeld, R. and /Jorgensen, C. K., Lasers and Excited States of Rare Earths, Springer-Verlag, Berlin (1977).
- 35. Nielson, C. W. and Koster, G. F., Spectroscopic Coefficients for the p<sup>n</sup>, d<sup>n</sup> and f<sup>n</sup> Configurations (MIT Press, Cambridge, 1964).
- 36. Weber, M. J., Proc. Int'l. Conf. on Lasers '82, New Orleans, Dec. 13-17 (1982).
- 37. Reisfeld, R. and Eyal, M., J. de Physique, Colloque 7, 349 (1985).
- 38. Stokowski, S. E. and Weber, M. J., Laser Glass Handbook M-95, Lawrence Livermore National Laboratory, California 1979.
- 39. Reisfeld, R., Kisilev, A. and Jørgensen, C. K., Chem. Phys. Lett. 111, 19 (1984).
- 40. Kisilev. A. and Reisfeld, R., Solar Energy 33, 163 (1985).
- 41. Bornstein, A. and Reisfeld, R., J. Noncryst. Solids 50, 23 (1982).
- 42. Blanzat, B., Boehm, L., Jørgensen, C. K., Reisfeld, R. and Spector, N., J. Solid State Chem. 32, 185, (1980).
- 43. Reisfeld, R., Eyal, M., Jørgensen, C. K., Jacoboni, C. and De Pape, R., Chem. Phys. Lett. (1986) submitted.

