

AD-A191 913

COMPARISON WITH OBLIQUE SOUNDER DATA OF HIGH-LATITUDE  
HF PROPAGATION PRED. (U) NAVAL OCEAN SYSTEMS CENTER SAN  
DIEGO CA N DAVE NOV 87


1/1

UNCLASSIFIED

F/O 12/5

ML



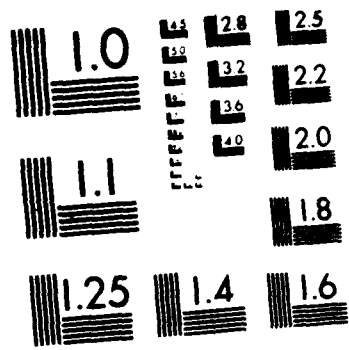

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS 1963-A

AD-A191 913

DTIC FILE COPY



UNCLAS  
SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT  <b>Approved for public release; distribution is unlimited.</b>	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE		4. PERFORMING ORGANIZATION REPORT NUMBER(S)	
4. PERFORMING ORGANIZATION REPORT NUMBER(S)		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION <b>Naval Ocean Systems Center</b>	6b. OFFICE SYMBOL (if applicable) <b>NOSC</b>	7a. NAME OF MONITORING ORGANIZATION <b>Naval Ocean Systems Center</b>	
6c. ADDRESS (City, State and ZIP Code) <b>San Diego, CA 92152-5000</b>		7b. ADDRESS (City, State and ZIP Code) <b>San Diego, CA 92152-5000</b>	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION <b>Space and Naval Warfare Systems Command</b>	8b. OFFICE SYMBOL (if applicable) <b>SPAWAR</b>	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State and ZIP Code) <b>Washington, DC 20363</b>		10. SOURCE OF FUNDING NUMBERS	
		PROGRAM ELEMENT NO. <b>OPN</b>	PROJECT NO. <b>CM21</b>
		TASK NO.	AGENCY ACCESSION NO. <b>DN587 609</b>
11. TITLE (include Security Classification) <b>A Comparison of High-latitude HF Propagation Predictions Using the RADAR C and AMBCOM Computer Programs</b>			
12. PERSONAL AUTHOR(S) <b>N. Dave'</b>			
13a. TYPE OF REPORT <b>Presentation/speech</b>	13b. TIME COVERED FROM <b>May 1987</b> TO <b>May 1987</b>	14. DATE OF REPORT (Year, Month, Day) <b>November 1987</b>	15. PAGE COUNT
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP	<b>HF propagation sunspot number ionospheric models</b>
19. ABSTRACT (Continue on reverse if necessary and identify by block number)  A study is done using two HF propagation prediction programs - "Radar C" and "AMBCOM" - to determine how well they predict median values of oblique sounder data of maximum observed frequencies (MOF) at high latitudes. The main differences between RADAR C and AMBCOM are the inclusion in the latter of high-latitude ionosphere and auroral absorption models, as well as a more sophisticated and accurate ray-tracing scheme. The data used for comparison are taken from Reference [1] for the Winnipeg-Resolute Bay path in the year 1959 (also discussed by Petrie and Warren [2] and from Folkestad [3] for the Andoya-Ft. Monmouth and Andoya-College paths in 1964. The data for the Winnipeg-Resolute Bay corresponds to high sunspot number, while the others correspond to low sunspot number. Hence, this study provides information on the performance of the two programs for various high-latitude paths at both high and low sunspot number.  AMBCOM was found to give generally better agreement with the above data than did RADAR C. Comparison of details of model predictions from the two computer programs for the above data-base is used to form an understanding of this improvement in prediction capability.			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION <b>UNCLASSIFIED</b>	
22a. NAME OF RESPONSIBLE INDIVIDUAL <b>N. Dave'</b>		22b. TELEPHONE (include Area Code) <b>(619)225-6822</b>	22c. OFFICE SYMBOL <b>Code 542</b>

DTIC  
SELECTED  
MAR 21 1988  
S a E

## **DISCLAIMER NOTICE**

**THIS DOCUMENT IS BEST QUALITY PRACTICABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.**

Final draft



Accession For  
NTIS GRA&I   
DTIC TAB  
Unannounced  
Justification

By \_\_\_\_\_  
Distribution/  
Availability C

Dist	Avail and Special
A-1	23

Direct here  
for all copies  
after the first  
  
On first page  
type title of  
report here  
  
Author  
Institution  
City, State

COMPARISON WITH OBLIQUE SOUNDER DATA OF HIGH-LATITUDE HF PROPAGATION PREDICTIONS FROM "RADAR C" AND "AMBCOM" COMPUTER PROGRAMS

Nikhil Dave  
Ocean and Atmospheric Sciences Division  
Naval Ocean Systems Center  
San Diego, CA 92152-5000

ABSTRACT

A study is done using two HF propagation prediction programs - "RADAR C" and "AMBCOM" - to determine how well they predict median values of oblique sounder data of maximum observed frequencies (MOF) at high latitudes. The main differences between RADAR C and AMBCOM are the inclusion in the latter of high-latitude ionosphere and auroral absorption models, as well as a more sophisticated and accurate ray-tracing scheme. The data used for comparison are taken from Reference [1] for the Winnipeg-Resolute Bay path in the year 1959 (also discussed by Petris and Warren [2]) and from Folkestad [3] for the Andoya-Ft. Monmouth and Andoya-College paths in 1964. The data for the Winnipeg-Resolute Bay corresponds to high sunspot number, while the others correspond to low sunspot number. Hence, this study provides information on the performance of the two programs for various high-latitude paths at both high and low sunspot number.

AMBCOM was found to give generally better agreement with the above data than did RADAR C. Comparison of details of model predictions from the two computer programs for the above data-base is used to form an understanding of this improvement in prediction capability.

INTRODUCTION

This paper begins with a summary of the differences between the basic ionospheric models and raytracing assumptions made in constructing the RADAR C and AMBCOM programs. User options selected for this study are discussed in Section 2. In Section 3, comparison of predictions from the two programs with available oblique sounder data is presented with appropriate explanation. In Section 4, the comparisons with data are discussed in terms of what they reveal about the significances of the differences between the two programs, and conclusions are formed regarding the apparent reasons for improved predictive capability of AMBCOM over RADAR C. In the final section, suggestions for directions in future work towards improving HF propagation prediction in high-latitude regions are made.

SECTION 1 - SOME BASIC ASSUMPTIONS USED IN THE DEVELOPMENT OF RADAR C AND AMBCOM COMPUTER PROGRAMS

The developmental histories of RADAR C and AMBCOM are different, and this fact accounts for some of the differences between the two programs. RADAR C was developed to predict performance of over-the-horizon radars (Headrick, et. al. [4], Lucas, et. al. [5]). Thus, RADAR C has only a coverage option, not a point-to-point or "homing" option. The propagation model is based on virtual geometry and is essentially the same as that of ITS -78 (Barghausen, et. al. [6]) and IONCAP (Teters, et. al. [7]). AMBCOM was derived from the NUCOM program developed at SRI International (under the sponsorship of the Defense Atomic Support Agency, DASA, and its successor, the Defense Nuclear Agency, DNA). The purpose of NUCOM is to predict the effects of a nuclear disturbance on ionospheric communication channels (Nielsen, et. al. [8]), and as a part of this objective, AMBCOM was developed to predict HF propagation in an undisturbed, or ambient, ionosphere. The raytracing scheme in NUCOM/AMBCOM was developed specifically to permit the treatment of a non-horizontally stratified ionosphere in the direction of propagation (i.e., it includes modelling of longitudinal, but not transverse, tilts, so that propagation is along the great circle path). AMBCOM has both coverage and point-to-point options.

Start here  
for all pages  
after the first

On first page  
type title of  
paper here

Author  
Affiliation  
City, State

Table 1, extracted from an AMBCOM user's manual prepared by SRI International [9], highlights some important differences between the two programs. Evidently, the two programs differ in several features relevant to prediction of MUF's, as discussed below.

TABLE 1 - SUMMARY OF SIGNIFICANT MODEL DIFFERENCES BETWEEN AMBCOM AND RADAR C		
MODELS	RADAR C	AMBCOM
<b>IONOSPHERIC REPRESENTATION</b>		
Deck (for coefficients)	ESSA/ESSA	ESSA/ESSA, WITH HIGH-LATITUDE MODIFICATIONS (Hatfield [10])
Radio models	YES	YES - including several ionospheric
Special representations	4 control	41 control
Real-time input	Ionogram at 4 locations	3 parabolic parameters at up to 41 locations
<b>PROPAGATION MODEL</b>		
Raytracing method	Martyn's theorem	Semi-analytic raytrace
Tilts, horizontal gradients	NO	YES
Topside reflections	NO	YES
Radar propagation	YES	YES
Point-to-point propagation	NO	YES

(1) Determination of ionospheric parameters is done using the so-called ESSA "blue deck" coefficients in AMBCOM with high-latitude modifications introduced by SRI International (Hatfield [10]). RADAR C uses the unmodified ESSA "red deck" coefficients.

(2) AMBCOM chooses up to 41 control points (depending on path length) to determine local ionospheric parameters such as critical frequencies, whereas RADAR C has a maximum of 4 control points available for the user to input.

(3) AMBCOM models the ionosphere with three parabolic layers of electron density as a function of height, and uses a semi-analytic, two-dimensional raytracing scheme based on a method due to Kift and Fooks (Nielsen [11]). The physical bases of this scheme are the geometric optics solution to the wave equation and Fermat's principle of minimum phase (Kelso [12]). RADAR C uses vertical ionograms computed from a similar ionospheric model as AMBCOM, and converts to oblique propagation using Martyn's theorem (Davies, [13]). The scheme used in AMBCOM permits consideration of continuous ionospheric gradients along the direction of propagation, whereas the RADAR C scheme assumes horizontal stratification of the ionosphere at each reflection point.

An added difference, not explicitly noted in Table 1, is the fact that AMBCOM is better capable than RADAR C of considering composite modes involving reflections from the E, F1, and F2 layers, including topside reflections off of the lower layers (M-modes), as well as chordal or perigee modes (i.e., rays which do not intersect the earth between layer reflections), as possible modes of propagation. This improved capability of AMBCOM is due to its more accurate raytrace method, (e. g., in AMBCOM it is not assumed that the angle of incidence to a layer equals the angle of reflection). Although RADAR C is also capable of considering composite modes, the assumption of horizontal stratification prevents the consideration of tilts and chordal modes by this program, as a result of which the majority of modes found by RADAR C turn out to be simple modes (all reflections being off of the same layer). In summary, the treatment of modes in AMBCOM is closer to physical reality than that in RADAR C.

It should be noted here that neither of the programs is designed expressly for predicting maximum usable frequency (MUF) for a given model ionosphere, so that the program output has to be interpreted to estimate a MUF. For this study, since RADAR C does not have a point-to-point option, its output for a given condition is scanned for the maximum frequency whose ground ranges (for some takeoff angle) bracket the receiver, this being interpreted as the MUF. In interpreting AMBCOM output, the point-to-point option is chosen, and it is assumed that all modes which reach the ground within 100 kilometers ground distance of the receiver, or all chordal modes which reach less than 90 kilometers height above the receiver are detectable modes. The

Start here —  
for all near:  
sites in list

On first page  
type title of  
paper here—

Author \_\_\_\_\_  
Affiliation \_\_\_\_\_  
City, State \_\_\_\_\_

ranges in these acceptance criteria are somewhat broader than normally used (20 km height being a more common limit for chordal modes, for example), but are believed to be representative of the range of distances from which modes can be detected, considering the accuracy of the ionospheric model and raytracing scheme, and broadening of the beam. The results of this study, judged by examining the output, are not highly sensitive to the choice of the above numbers.

## SECTION 2 - USER OPTIONS TAKEN IN PERFORMING THE STUDY

Some of the user options available in the two programs are of relevance to this study, hence are discussed below:

- (1) Four control points are used in this set of RADAR C runs, approximately uniformly spaced on the great circle path between transmitter and receiver.
- (2) Sporadic E modes are not considered in this study (IOPES = 0 in AMBCOM, MAXMOD = 1 in RADAR C).
- (3) 12 month running averages of monthly median sunspot number are used. Monthly median values of magnetic index  $K_p$  are used in AMBCOM. (RADAR C does not use  $K_p$ ).
- (4) In order to minimize the amount of computing time without a great sacrifice in accuracy, only integer values of frequencies in the range of 1 - 30 MHz are input for study in these programs. Thus the predicted maximum usable frequencies have up to 0.5 MHz systematic bias on the low side, since the actual MUF would be less than the lowest (integer) frequency for which no propagation is predicted by the raytrace scheme, but possibly higher than the highest one found supported.
- (5) The "high-ray" calculation option in AMBCOM is chosen (HIRAY(I) - 0.6), permitting identification of possible high-angle rays on a given path.
- (6) In AMBCOM, take-off angles from 0 to 45 degrees are considered, with one degree increments between angles. In RADAR C, two degree increments in takeoff angle were used, as it was merely necessary to bracket the range to the receive site.

A map showing the paths studied is given in Figure 1, and a summary of geographical, temporal, and solar parameters pertaining to the data is given in Table 2. We note that this study includes a short path for which most of the modes should be 1-hop, and two intermediate length paths for which composite mode propagation can be important. The short path data is at high sunspot number, while the longer path data is at low sunspot number. One of the longer paths can be considered a trans-auroral path while the other can be considered a trans-polar path (Folkestad [3]).

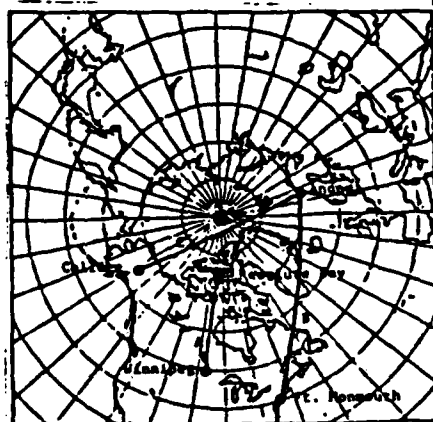


FIGURE 1 - WORLD POLAR PROJECTION SHOWING GREAT CIRCLE COURSES OF PATHS STUDIED

TABLE 2				
PATH ID	YEAR	ENDPOINT LAT (N+) LONG (W+)	GREAT CIRCLE DISTANCE (KM)	APPROX. NO. MOD SUBSPOT NUMBER
A	1959	+49.3,+97.1 +74.7,+94.9	2799	140
B	1964	+49.1,-15.4 +40.3,+74.1	5853	10-20
C	1964	+49.1,-15.4 +44.9,+148.	5060	"

Start here  
for all pages  
after the first

On first page  
type title of  
paper here

Author  
Affiliation  
City, State

In Figures 2a-12b are presented the MUF predictions deduced from the two programs for each path-month studied, along with an identification (below the universal time, or UT, axis) of the mode which determines the MUF, and its corresponding total path loss in dB, for every two hours of UT. The results for the two programs are arranged side-by-side, the figure numbered with "a" corresponding to RADAR C predictions, and that numbered with "b" corresponding to AMBCOM predictions. The notation for modes used is explained in Davies [13]. A minus sign indicates a chordal ray, and a "v" indicates topside reflection. Thus, "E-F2" indicates a 2-hop chordal (or perigee) ray which reflects off of the E layer, intersects the earth, then reflects off of the F2 layer, reaching the receive site at an altitude of not more than 90 km (c.f. Section 1). Likewise, "F2 vF1 F2" indicates a mode which reflects off of the F2 layer, then off of the top-side of the F1 layer, then again off the F2 layer. An "H" refers to a high-angle mode.

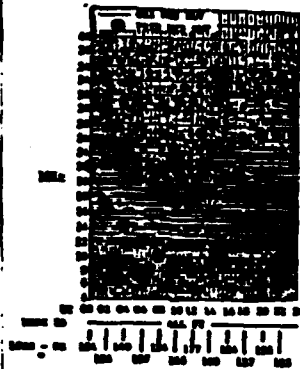


FIGURE 2a - RADAR C PREDICTION FOR  
PATH-MONTH 0001-0001, SEP., 1959

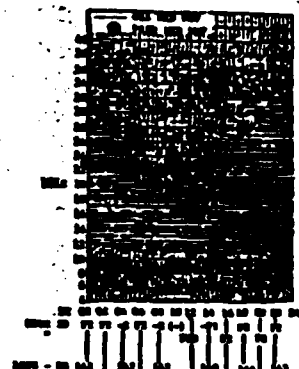


FIGURE 2b - AMBCOM PREDICTION FOR  
PATH-MONTH 0001-0001, SEP., 1959



FIGURE 3a - RADAR C PREDICTION FOR  
PATH-MONTH 0002-0002, SEP., 1959



FIGURE 3b - AMBCOM PREDICTION FOR  
PATH-MONTH 0002-0002, SEP., 1959



FIGURE 4a - RADAR C PREDICTION FOR  
PATH-MONTH 0003-0003, SEP., 1959

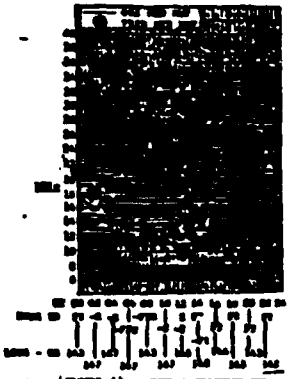


FIGURE 4b - AMBCOM PREDICTION FOR  
PATH-MONTH 0003-0003, SEP., 1959



SECTION 4 - DISCUSSION

The major features of the comparisons can be summarized as follows:

(1) For the Winnipeg-Resolute Bay path (Figures 2-4), both programs show the 1-hop F2 mode as the principal MUF mode. Both programs predict the large observed diurnal variation in the winter season at high sunspot number, although AMBCOM has a bias on the high side for the diurnal peak.

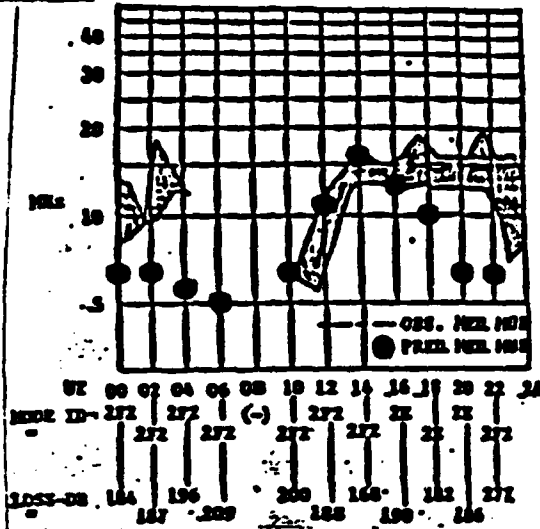


FIGURE 5a - RADAR C PREDICTION FOR ANDOYA-FT. MONMOUTH PATH, JANUARY, 1964

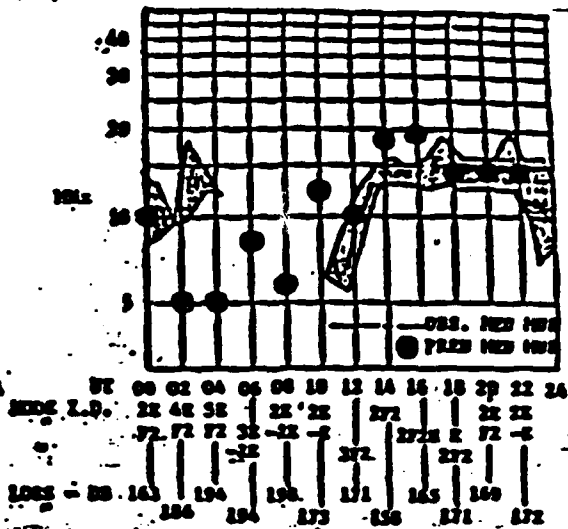


FIGURE 5b - AMBCOM PREDICTION FOR ANDOYA-FT. MONMOUTH PATH, JANUARY, 1964

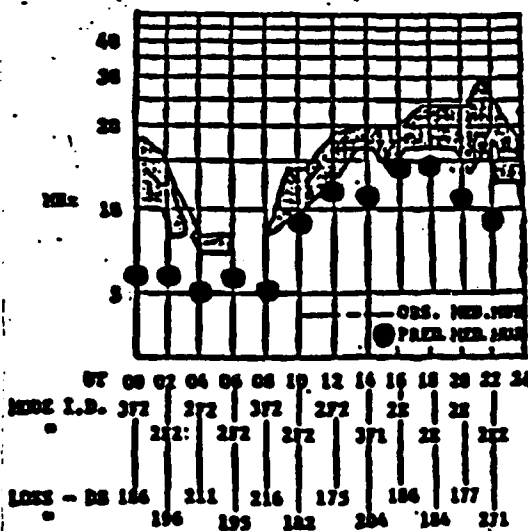


FIGURE 6a - RADAR C PREDICTION FOR ANDOYA-FT. MONMOUTH PATH, MARCH, 1964


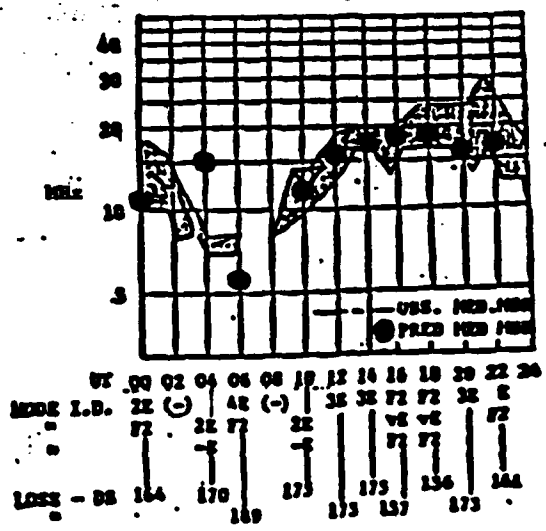



FIGURE 6b - AMBCOM PREDICTION FOR ANDOYA-FT. MONMOUTH PATH, MARCH, 1964

(2) For the Andoya-Ft. Monmouth path (Figures 5-8), AMBCOM predicts closer to the data than RADAR C, the latter having in general a low bias for the MUF. The modes found by AMBCOM for the MUF in this case involve several cases of composite modes, chordal modes, and high rays.

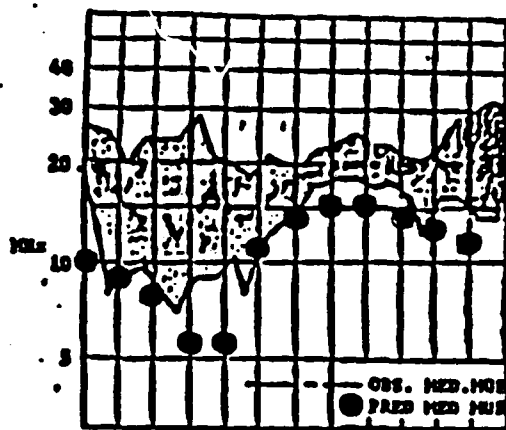


UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE	L.D.	2F2	2F2	4F2	2F2	2F1	2E	2F1	2E	2F1			
LOSS - DB	255	182	231	195	202	179							
		176	207	211	210	197	241						

FIGURE 7a - RADAR C PREDICTION FOR ANDOYA-FT. MENNOUthe PATH, MAY, 1964

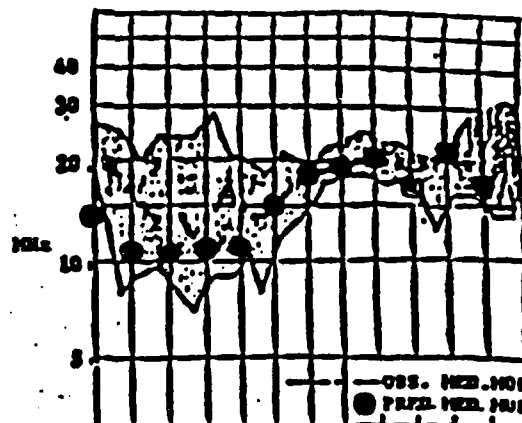


UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE	L.D.	2E	3E	2E	2E	2E	F2	E	F2	E	E		
LOSS - DB	167	178	177	174	157	158							
		176	180	181	159	167	178						

FIGURE 7b - AMBCOM PREDICTION FOR ANDOYA-FT. MENNOUthe PATH, MAY, 1964

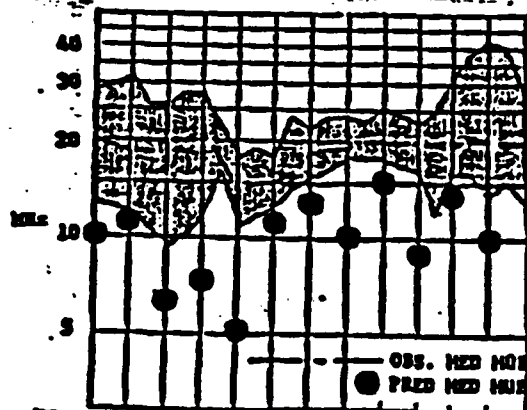

UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE	L.D.	2F2	2F2	4F2	2F2	2E	4E	4E	2F1	2E			
LOSS - DB	263	200	(*)	248	199	210							
		168	196	231	242	256	180						


FIGURE 8a - RADAR C PREDICTION FOR ANDOYA-FT. MENNOUthe PATH, JULY, 1964

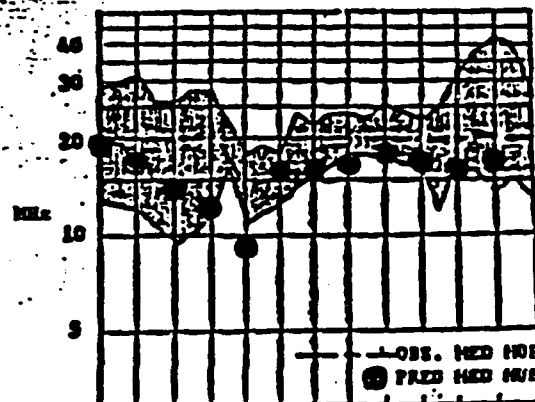

UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE	L.D.	E	E	F2	2E	3E	3E	F2E	F2E				
LOSS - DB	197	154	185	179	173	156							
		159	179	180	179	178	173						


FIGURE 8b - AMBCOM PREDICTION FOR ANDOYA-FT. MENNOUthe PATH, JULY, 1964

(3) On the Andoya-College path (Figures 9-12), AMBCOM shows a significant improvement in MUF prediction over RADAR C (which is generally 5-10 MHz too low), with composite and chordal modes playing an important part in determining the MUF. There are several cases in which 2- and 3-hop modes involving a combination of E and F2 layer reflections, as well as chordal modes, determine the MUF. Although AMBCOM is a significant improvement over RADAR C in this case, there is room for more improvement, as AMBCOM is still biased on the low side of observed median MUF's.

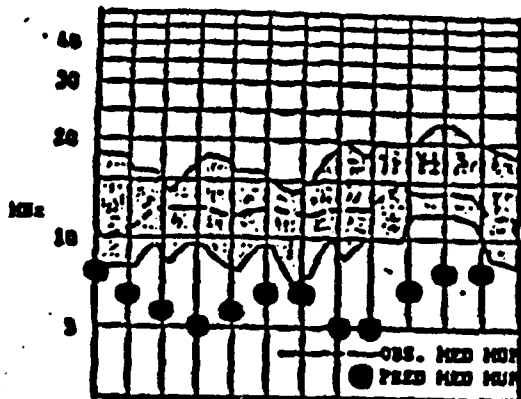


UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE L.D.	2F2	2F2	2F2	2F2	2F2	2F2	3F2	3F2	3F2	2F2	2F2	2F2	
LOSS - DB	172	190	198	198	193	211	180						
	174	190	191	214	180	187							

FIGURE 9a - RADAR C PREDICTION FOR ANDOYA-COLLEGE PATH, JANUARY, 1964

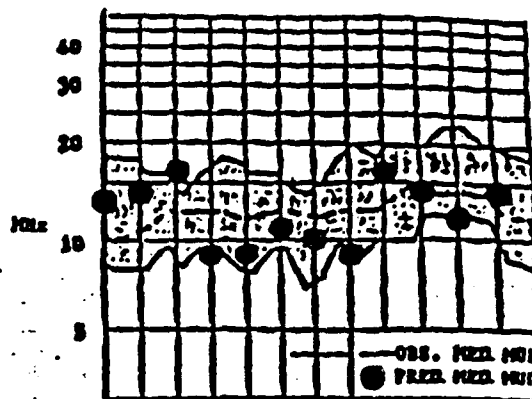


UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE L.D.	F2E	-2E E	-F2 E	E F2	-F2 F2	-F2 F2							
LOSS - DB	181	154	158	157	150	153							
	169	166	165	165	168	151							

FIGURE 9b - AMBCOM PREDICTION FOR ANDOYA-COLLEGE PATH, JANUARY, 1964

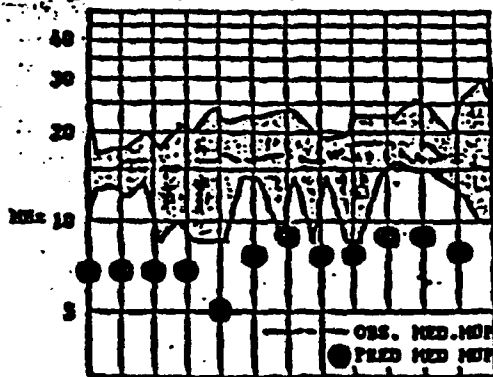

UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE L.D.	2E	2F2	3F2	2F2	2F2	2F2	2E						
LOSS - DB	186	177	220	179	186	179							
	200	173	182	179	181	183							

FIGURE 10a - RADAR C PREDICTION FOR ANDOYA-COLLEGE PATH, MARCH, 1964

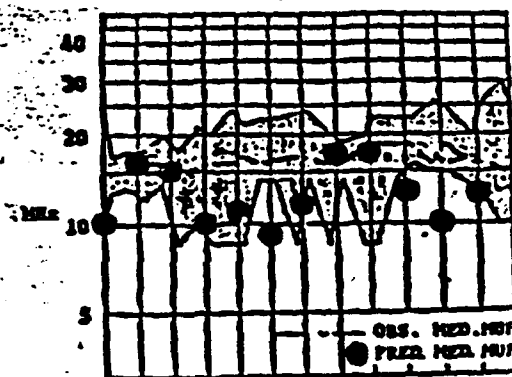

UT	00	02	04	06	08	10	12	14	16	18	20	22	24
MODE L.D.	2F2	-2E E	-F2 E	E	-2E	2F2							
LOSS - DB	166	191	172	163	172	168							
	133	168	183	163	161	164							

FIGURE 10b - AMBCOM PREDICTION FOR ANDOYA-COLLEGE PATH, MARCH, 1964

(4) As a by-product of the fact that AMBCOM generally finds higher MUF values (which are closer to the observed values) than RADAR C, AMBCOM also shows lower path losses for these higher frequencies, so that the required power on certain paths may be significantly lower than that predicted by RADAR C.

For added insight, a comparison of the calculated values of E- and F2-layer critical frequencies and heights of the layer maxima for the two programs on the Andoya-College path at 6 hour intervals is plotted in Figure 13. (E-layer maximum height is a constant 130 km in RADAR C and 115 km in AMBCOM). This figure shows that the ionospheric parameters on the Andoya-College path differ for the most part by only a few percent between the two programs so that one can conclude that the radical improvement in MUF predic-

tion of AMBCOM over RADAR C for this path is not due mainly to the values of ionospheric parameters used. Rather, based on the types of modes found to constitute the MUF in AMBCOM, it is to be concluded that the more accurate, and physically more realistic raytracing in AMBCOM, combined with many more control points than used in RADAR C, are the main causes for the significant improvement in MUF prediction in AMBCOM compared to RADAR C. These capabilities (c.f. the discussion, item (3) of Section 1) allow for more accurate treatment of tilts and composite and chordal modes, which is not possible in RADAR C, owing to the assumption of Martyn's theorem. This conclusion is consistent with the study by Paul [14] of the importance of horizontal gradients in electron density in the ionosphere even at mid-latitudes.

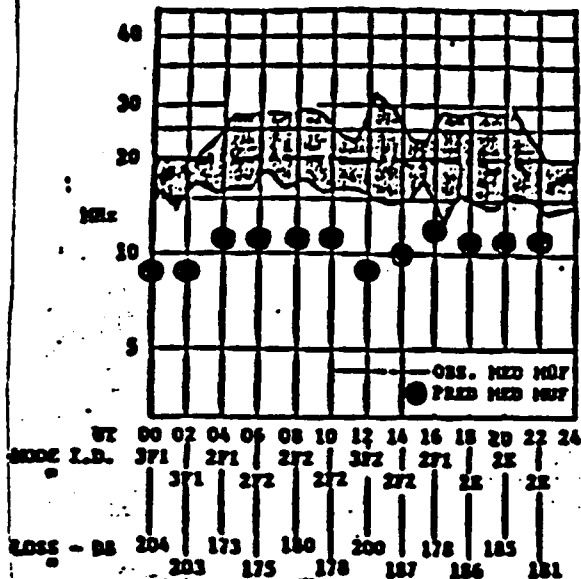


FIGURE 11a- RADAR C PREDICTION FOR ANDOYA-COLLEGE PATH, MAY, 1964

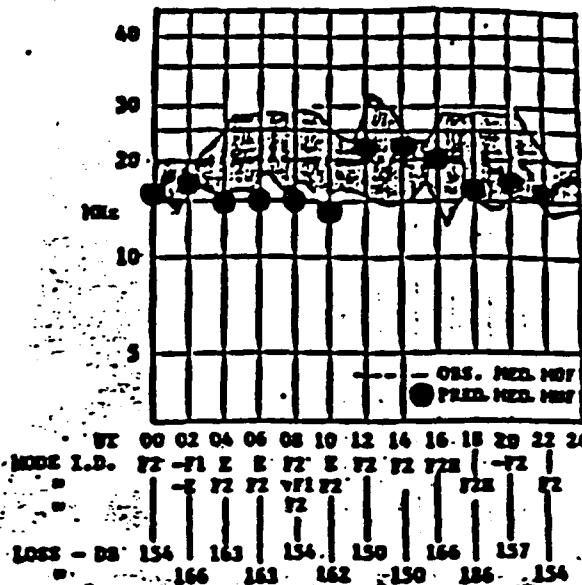


FIGURE 11b- AMBCOM PREDICTION FOR ANDOYA-COLLEGE PATH, MAY, 1964

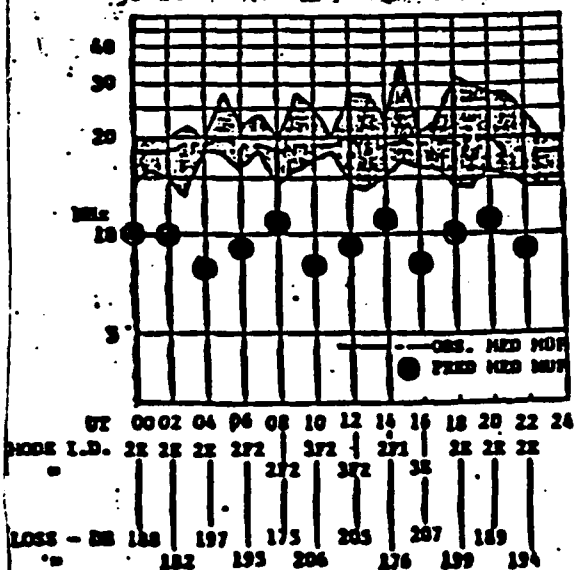


FIGURE 12a- RADAR C PREDICTION FOR ANDOYA-COLLEGE PATH, JULY, 1964

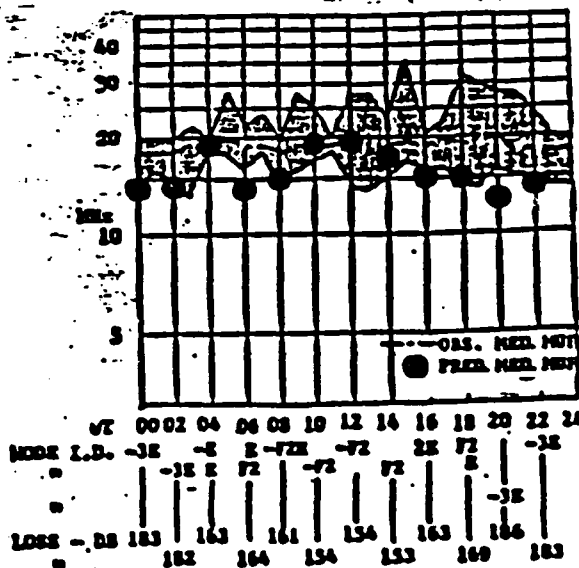


FIGURE 12b- AMBCOM PREDICTION FOR ANDOYA-COLLEGE PATH, JULY, 1964

A similar comparison of ionospheric parameters for the two programs for the trans-auroral path (Andoya-Ft. Monmouth) is shown in Figure 14. This figure supports the conclusion that for this path, in addition to the effects of improved raytracing, differences in ionospheric modelling (especially for the E-layer critical frequency), are also significant causes for the improved predictability of AMBCOM over RADAR C.

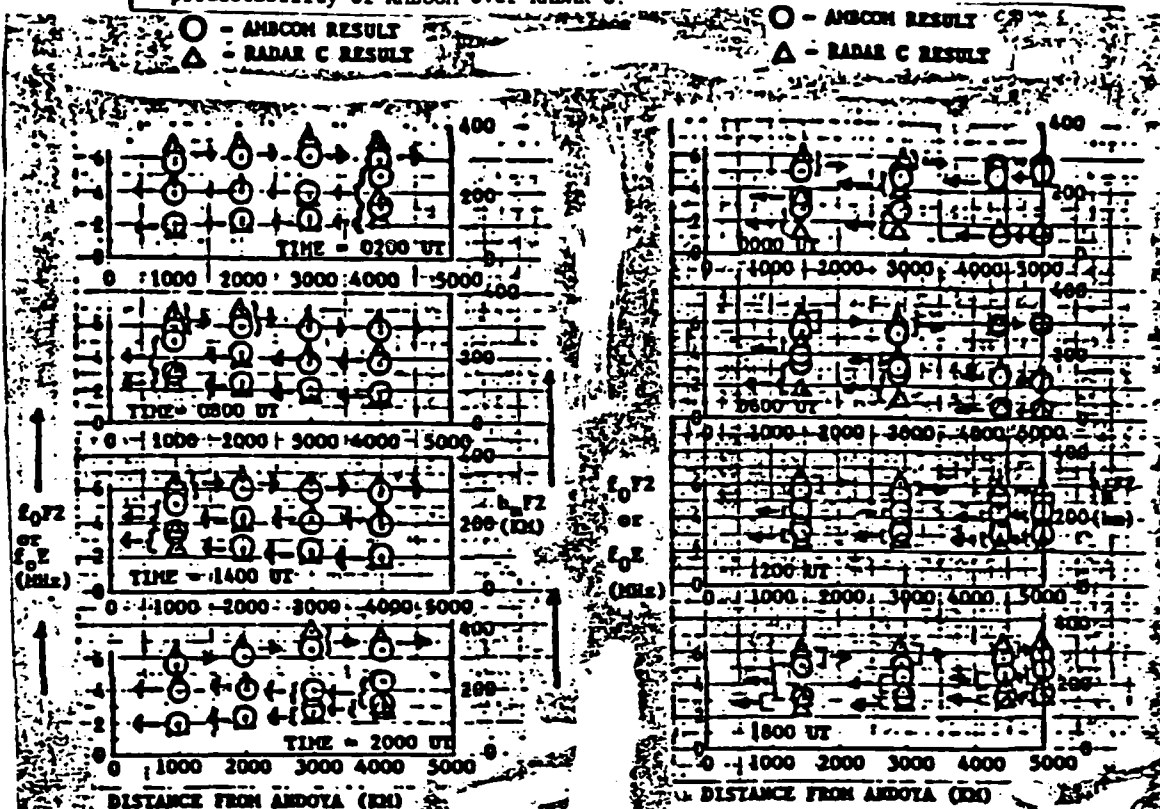


FIGURE 13 - COMPARISON OF  $f_oF_2$ ,  $f_oE$ , and  $h_pF_2$  CALCULATED BY RADAR C AND AMBCOM FOR ANDOY-COLLEGE PATH, JULY, 1964

FIGURE 14 - COMPARISON OF  $f_oF_2$ ,  $f_oE$ , and  $h_pF_2$  CALCULATED BY RADAR C AND AMBCOM FOR ANDOYA-FT. MONMOUTH PATH, JULY, 1964

SECTION 5 - CONCLUSIONS AND LINES FOR FURTHER RESEARCH

AMBCOM in general performs better as a MUF predictor than RADAR C on the high-latitude paths studied, the latter having a significant low bias for MUF on the trans-polar and trans-auroral paths studied, although AMBCOM has somewhat of a high bias on the Winnipeg-Resolute Bay path. Based on the discussion in Section 4, the improved performance of AMBCOM over RADAR C, at least on the trans-polar path between Andoya and College is primarily due to its more physically realistic raytracing scheme. On this path, composite and chordal modes often determine the MUF. Further improvement for the prediction of this high-latitude path and for the Andoya-Ft. Monmouth path is, however, needed.

For future research, a more complete test of AMBCOM is desirable, using a larger database with a wide variety of path-months. This will identify possible improvements which can be made to the raytrace scheme of AMBCOM. Since this study shows that accurate raytracing is important on the high-latitude paths studied, it is reasonable to hypothesize that incorporation of a three-dimensional ray-tracing routine (e.g., Jones [15]) into AMBCOM in place of the present one will reveal other, higher frequency modes of propagation not propagating on great circle paths, leading to further improvement in predictive capacity. The present version of AMBCOM does not include non-great circle (NGC) propagation, as was noted in Section 1. We note the discussion by Hunsucker and Bates [16] of the importance of NGC modes in high-latitude propagation, and the fact that this may also be of significance at lower latitudes.

under 4471 to DTIC does not permit fully legible reproduction

Start here  
int. codes  
orig. no. first

On this page  
type title of  
paper here

Author  
Affiliation  
City, State

Observationally, since few ionosondes have been operated in polar regions, it is to be expected that a program of vertical incidence ionospheric critical frequency measurements in the polar region will improve our capacity to model HF propagation in this important region of the world.

#### REFERENCES

- [1] Private communication by Margo Leftin (ITS, Boulder, CO) of Canadian oblique sounder data, collected by the Defense Research Telecommunications Establishment.
- [2] Patric, L.E., and E.S. Warren, "The Propagation of high frequency waves on the Winnipeg-Resolute Bay oblique sounder circuit," Ionospheric Radio Communications (proceedings of a NATO Institute on Ionospheric Radio Communications in the Arctic, Finse, Norway, April 13-19, 1967) pp. 242-259.
- [3] Folkestad, K., "Results from stepped frequency oblique soundings at high latitudes," Ionospheric Radio Communications, Finse, Norway, April, 1967, pp. 279-288.
- [4] Headrick, J.M., J.M. Thomason, D.L. Lucas, S.R. McCammon, R.A. Hanson, and J.L. Lloyd, "Virtual Path Tracing for HF Radar Including an Ionospheric Model," NRL Memo Report 2226, Naval Research Laboratory, Washington, D.C., (1971).
- [5] Lucas, D.L., J.L. Lloyd, J.M. Headrick, and J.F. Thomason, "Computer techniques for planning and management of OTH Radar," NRL Memo, Report 2500, Naval Research Laboratory, Washington, D.C., 1972.
- [6] Barghausen, A.F., J.W. Finney, L.L. Proctor, and L.D. Schultz, "Predicting long-term operational parameters of High-Frequency sky-wave telecommunication systems," ESSA Technical Report, ERL-110-ITS-78, Environmental Sciences Services Administration, Boulder, Co., (may, 1969); Addendum I, 1970).
- [7] Teters, L.R., J.L. Lloyd, G.W. Haydon, and D.L. Lucas, "Estimating the performance of telecommunication systems using the ionospheric transmission channel - ionospheric communications analysis and prediction program users' manual," U. S. Department of Commerce, NTIA Report 83-127, July 1983.
- [8] Nielson, D.L., J.B. Lomax, and H.A. Turner, "The prediction of nuclear effects on HF communications" DASA 2035, Final Report, Contract DA-49-146-XZ-436, Stanford Research Institute, Menlo Park, CA, November, 1967.
- [9] Smith, G. and V.E. Hatfield, "AMBCOM user's guide for engineers," SRI Contract F08606-85-C-0018, SRI International, 1987.
- [10] Hatfield, V.E., "HF communications predictions 1978 (An economical up-to-date computer code, AMBCOM)," Solar-terrestrial predictions proceedings, v. 4, ed. by R.F. Donnelly, Boulder, CO, March 1980.
- [11] Nielson, D.L., "Ray-path equations for an ionized layer with a horizontal gradient," Radio Science, v. 3, n. 1, January 1968, pp. 101-109.
- [12] Kelso, J.M., Radio ray propagation in the ionosphere, 1964, p. 189ff.
- [13] Davies, K., Ionospheric Radio Propagation, NBS Monograph 80, April, 1965, Chapter 4.
- [14] Paul, A.K., F-region tilts and ionogram analysis, Radio Science, v. 20, n. 4, 959-971, July-August, 1985.
- [15] Jones, R.M., A three-dimensional ray-tracing computer program, ESSA Tech. Report, IER-17/ITSA-17, 1966.
- [16] Hunsucker, R.D., and H.F. Bates, Survey of polar and auroral region effects on HF propagation, Radio Science, v. 4, n. 4, pp. 347-365, April, 1969.

END

DATE

FILMED

5-88

DTIC