OFFICE OF NAVAL RESEARCH Contract NO0014-85-0177 R & T Code 431a003-4

ITTE FILE COP)

Technical Report No. 9

GROWTH AND CHARACTERIZATION OF NICKEL-DOPED ZnS SINGLE CRYSTALS

by

P. Wu, R. Kershaw, K. Dwight and A. Wold

Prepared for Publication in

Materials Research Bulletin

September 26, 1988

Brown University Department of Chemistry Providence, RI 02912

Reproduction in whole or in part is permitted for any purpose of the United States Government

This document has been approved for public release and sale; its distribution is unlimited

# 88 9 29 039

AD-A199 78



	REPORT DOCU	MENTATION	PAGE		
a. REPORT SECURITY CLASSIFICATION	16. RESTRICTIVE MARKINGS				
Za. SECURITY CLASSIFICATION AUTHORITY		3 DISTRIBUTION / AVAILABILITY OF REPORT			
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE		APPROVED FOR PUBLIC RELEASE DISTRIBUTION UNLIMITED			
4 PERFORMING ORGANIZATION REPORT NUMBER(S)		5. MONITORING ORGANIZATION REPORT NUMBER(S)			
#9	N00014-85-0177				
6a. NAME OF PERFORMING ORGANIZATION BROWN UNIVERSITY	6b OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING OPGANIZATION OFFICE OF NAVAL RESEARCH DR. R. SCHWARTZ			
AARON WOLD 6c. ADDRESS (City, State, and ZIP Code)			ty, State, and ZIP	Code)	
DEPARTMENT OF CHEMISTRY PROVIDENCE, RI 02912		CODE 385 NAVAL WE	4 Apons centei	λ	
- 			KE, CA 9355		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (If applicable)	9. PROCUREMEN		ENTIFICATION	NUMBER
Bc. ADDRESS (City, State, and ZIP Code)	L.	10 SOURCE OF	FUNDING NUMBE	RS	
		PROGRAM ELEMENT NO	PROJECT NO	TASK NO.	WORK UNI NO
11. TITLE (Include Security Classification)		<u></u>	<u> </u>	<u>i</u>	
12. PERSONAL AUTHOR(S)         P. Wu, R. Kershaw, K. Dwig         13a. TYPE OF REPORT         Technical		14 DATE OF REPO September	DRI (Year, Month, 26 11988	Day) 15. PA	AGE COUNT
16. SUPPLEMENTARY NOTATION SUBMITTED TO MATERIALS RES	SEARCH BULLETIN				
17. COSATI CODES FIELD GROUP SUB-GROUP	18. SUBJECT TERMS	(Continue on rever	se if necessary an	d identify by	block number)
17. COSATI CODES FIELD GROUP SUB-GROUP	ny and identify by block	number)			
17. COSATI CODES FIELD GROUP SUB-GROUP	ry and identify by block containing up to using iodine as g-wavelength IR of small amount aterials may be	number) 3 atomic per the transport transmission s of nickel s useful for th	ccent of nic agent. It characteris significantl ne developme	kel were was foun tics as p y increas	grown by Id that the Dure ZnS. Sed the
<ul> <li>17. COSATI CODES</li> <li>FIELD GROUP SUB-GROUP</li> <li>19. ABSTRACT (Continue on reverse if necessal</li> <li>Crystals of zinc sulfide chemical vapor transport crystals had the same lon Furthermore, the addition hardness of ZnS. These m the 8-12 µm range. W</li> </ul>	ry and identify by block containing up to using iodine as g-wavelength IR of small amount aterials may be	number) 3 atomic per the transport transmission s of nickel s useful for th	ccent of nic agent. It characteris significantl ne developme	kel were was foun tics as p y increas nt of IR	grown by Id that the Dure ZnS. Sed the
17.       COSATI CODES         FIELD       GROUP       SUB-GROUP         19       ABSTRACT (Continue on reverse if necessal         Crystals of zinc sulfide       chemical vapor transport         crystals had the same lon       Furthermore, the addition         Furthermore, the addition       hardness of ZnS. These m         the 8-12 µm range.       N         20       DISTRIBUTION / AVAILABILITY OF ABSTRACE         UNCLASSIFIED/UNLIMITED       SAME A	ry and identify by block containing up to using iodine as g-wavelength IR of small amount aterials may be if PA Sell - A	number) 3 atomic per the transport transmission s of nickel s useful for th 21 ABSTRACT S	ccent of nic t agent. It characteris significantl ne developme	kel were was foun tics as p y increas nt of IR	grown by nd that the pure ZnS. sed the windows in
17.       COSATI CODES         FIELD       GROUP       SUB-GROUP         19.       ABSTRACT (Continue on reverse if necessar         Crystals of zinc sulfide       chemical vapor transport         crystals had the same lon       Furthermore, the addition         hardness of ZnS.       These m         the 8-12 µm range.       M         //       //         20       DISTRIBUTION / AVAILABILITY OF ABSTRACE	ry and identify by block containing up to using iodine as g-wavelength IR of small amount aterials may be if PARAL	number) 3 atomic per the transport transmission s of nickel s useful for th 21 ABSTRACT S 22b TELEPHONE	ccent of nic agent. It characteris significantl ne developme	kel were was foun tics as p y increas nt of IR	grown by nd that the pure ZnS. sed the windows in

Dr. J. A. Cox Honeywell Systems & Research Dept. WN 65-2600 3660 Technology Drive Minneapolis, MN 55418 optil amin of Dr. Will B. White Materials Research Laboratory Pennsylvania State University University Park, PA 16802 Burnes Contractory Lino A.Yro Naval Surface Wempons Ctr. Dahlgren, VA 22448 General Dymamics, Box 748 Fort Worth, TX 76101 Santa Barbara, CA 93160 Dr. W. Adler General Research Inc. P.O. Box 6770 Philadelphia, PA 19101 Dr. Dale Perry U.S. Army Missile Cmd. Redstone Arsenal Naval Research Lab Washington, DC 20375 Dr. S. Musikant General Electric Co. P.O. Box 8555 Mr. C. J. Pruszynski Advanced Sensors Huntsville, AL 35807 Redstone Arsenal Huntsville, AL 35898 Texas Instruments Dallas, TX 75266 P.O. Box 660246 Dr. D. N. Lewis Code 6360 Dr. C. Blackmon Code G23 Dr. W. Pittman AMSI-RD-AS-PM Dr. P. Klocek 5-46 . 618 Fa Dr. Peter E. D. Morgan Rockwell Int'l Sci. Center 1049 Camino Dos Rios, Box 1085 Thousand Oaks, CA 91360 Dr. Peter Meiling Ceramics and Glass Technology Battelle Columbus Laboratories Columbus, OH 43201 Raytheon Company. Research Div. Mat. Science Laboratory Pennsylvania State University University Park, PA 16802 Dr. Lisa C. Klein Ceramics Research Ctr. Coll. of Eug./Rutgers Univ. Box 909, Piscataway, NJ 08854 Pennsylvania State University Materials Research Laboratory University Park, PA 16802 Dr. Gary Messing Materials Research Department Pennsylvania State University University Park, PA 16802 Pennsylvania State University University Park, PA 16802 Dr. Carlo Pantano Materials Science Laboratory Chemistry Department University of California Berkeley, CA 94720 China Lake, CA 93555-6001 Dr. Rishi Raj Mat. Sci. & Eng. Dept. Cornell University Ithaca, NY 14853 Dr. Terrell A. Vauderah Code 3854 Naval Weapons Center 131 Spring St. Lexington, MA 02173 Dr. Angelica Stacy Dr. Randy Tustison Dr. Russ Messier Dr. Rustrum Roy Dr. Alan Harker Rockwell Int'l Science Center 1049 Camino Dos Rios, Box 1085 Thousand Oaks, CA 91360 Pennsylvania State University Structural Chemistry National Bureau of Standards Gaithersburg, MD 20899 ຮູ Mat. Sci. 7 Eng. Dept. University of California/LA Los Angeles, CA 90024 Naval Mcapons Center China Lake, CA 93555-60001 Optical Grp. Perkin-Elmer 100 Nooster Heights Road Danbury, CT 06810 University Park, PA 16802 Code 3854 Naval Neapons Center China Lake, CA 93555-6001 Naval Meapons Center China Lake, CA 93555-6001 ł Dr. Randolph A. Heinecke Std. Tele. Labs, Ltd. London Road, Harlow Dr. Mufit Akinc Mat. Sci. § Eng. Dept. Iowa State University Ames, IA 50011 Chemistry Department University of Chicago 5801 Ellis Avenue Dr. Jeremy K. Burdett Dr. Greg Geoffroy Chemistry Department George Gardopee Dr. Curt E. Johnson Dr. Hal E. Bennett Chicago, IL 60637 Dr. Dan C. Harris Dr. Stan Block Dr. Bruce Dunn Essex CV17 9MA Code 38101 Code 3854 ENGLAND F. Wr Force Off. of Sci. Res./NE Bldg. 410, Bolling AFB Washington, DC 20332 attn: Elec. 4 Mats. Sci. Dir. krmy Mat. & Mechan. Research Office of Naval Technology 800 N. Quincy St. Arlington, VA 22217 **Dffice of Naval Technology** 800 N. Quincy Street Arlington, VA 22217 Watertown, MA 02172 Attn: R. N. Katz Nttn: Code 0712 Attn: Code 0725 Center Defense Advanced Research Proj. Materials Scl. Office 1400 Wilson Blvd. Attn: B. Wilcox Arlington, VA 22209 ٠ Air Force Materials Laboratory Wright-Parterson AFB Dayton, OH 45433 Attn. N. Tallan Commandant of the Marine Corps Washington DC 20380 Defense Metals & Ceramic Info. Battelle Memorial Institute Naval Surface Neapons Center 10901 New Hampshire Avenue Center Attn: Metal, & Ceramics Prg. Naval Air Systems Command 1411 Jeff Davis Highway Code 931A (L. *Sloter*) Arlington, VA 22202 of Naval Research P.O. Box 12211 Triangle Park, NC 27709 Army Research Office P.O. Box 12211 Triangle Park, NC 27709 Silver Spring, MD 20910 Attn: Chemistry Prog. Naval Air Development Code 606 (I. Schafer) Warminster, PA 18974 Code K22 (N. Messick) Army Research Office Naval Meapons Center Code 3854 (Schwartz) China Lake, CA 93555 800 N. Quincy Street Code 1216 (R. Jones) Arlington, VA 22217 White Oak Laboratory Scientific Advisor Columbus, OH 43201 505 King Avenue Attn: Code AX Office (1) 7 11.00 ٠, OLNO Inline L ΞΞ

Distributin List

Dr. John C. Pulver Esstman Kodak Co. Dept. 144 Hawkeye Flant Apparatus Div. 901 Eimgrove Raad Rochester, NY 14050

Dr. W. Rhodes GTE Laboratories 40 Sylvan Road Maltham, MA 02254

Mr. D. Roy Coors Porcelain Co. Golden, CO 8C401

Dr. J. Savage Royal Signals & Radar Establish. St. Andresus Road Great Malvern, W.NCS, WR14 JPS England

Code R31 Maval Surface Neapons Ctr White Oak Laboratory Silver Spring, MD 20903 Dr. I. G. Talmy

Wr. W. Tropf Applied Physics Lab Johns Hopkins Road Laurel, MD 20810

Technind + Summy ١

befense Documentation Center Jameron Station Alexandria, VA 22314

office of Naval Research Code 1151 100 N. Quincy St. ', wrlington, VA 22217

see above: Att : ohanka (1) ishman mith ohanka

iffice of Naval Research ode 1113 (H. Guard) 00 M. Quincy St. rlington, VA 22217

## GROWTH AND CHARACTERIZATION OF NICKEL-DOPED ZnS SINGLE CRYSTALS

Ping Wu, Robert Kershaw, Kirby Dwight, Aaron Wold\* Department of Chemistry, Brown University Providence, RI 02912

\*Address all correspondence

#### ABSTRACT

Crystals of zinc sulfide containing up to 3 atomic percent of nickel were grown by chemical vapor transport using iodine as the transport agent. It was found that these crystals had the same long-wavelength IR transmission characteristics as pure 2nS. Furthermore, the addition of small amounts of nickel significantly increased the hardness of ZnS. These materials may be useful for the development of IR windows in the 8-12 µm range.

MATERIALS INDEX: Zinc sulfide, Nickel

#### Introduction

ZnS is used as an IR window material because of its wide transmission range in the infrared. However, ZnS is soft, which limits its suitability for some applications. It was anticipated in this study that the hardness of ZnS might be improved by the introduction of transition metals, such as nickel, into its structure.

Little work has been reported on the system  $Ni_XZn_{1-X}S$ , because  $Ni(II)(3d^8)$ prefers octahedral sites and is therefore difficult to introduce into the tetrahedral ZnS structure. Czamanske and Goff (1) reported that the solubility of NiS in ZnS at 755°C was only 1.16 mole percent. Some recent spectroscopic studies (2,3) have been carried out on zinc sulfide samples doped with Ni(II). However, there has been no report on the IR transmission, magnetic properties, hardness and stability of nickel doped zinc sulfide crystals. It is the purpose of this study to investigate the properties of such materials and compare the results with those obtained for pure ZnS.

## Experimental

[T]

1

A-1

Single Crystal Growth

Single crystals of ZnS and  $Ni_x Zn_{1-x}S$ , where x = 0.03, have been grown by chemical vapor transport using iodine as the transport agent. The zinc metal

(Gallard and Schlesinger 99.9995%) was prereduced in an  $Ar/H_2$  (85/15) atmosphere at 200°C for 3 hours. Nickel metal (Gallard and Schlesinger) was prereduced in a  $Ar/H_2$  atmosphere at 800°C for 12 hours. Sulfur (Gallard and Schlesinger 99.999%) was sublimed prior to use.

For ZnS crystals, stoichiometric weights of zinc and sulfur were introduced into silica tubes which were then evacuated to  $10^{-5}$  torr, and 5mg/cc of iodine were added. The tubes were sealed off and enclosed in a tightly wound Kanthal coil (to even out temperature gradients) and the whole assembly was placed in a three-zone furnace. The crystal growth temperature program consisted of setting the furnace to back transport mode for one day (growth zone at 1000°C amd charge zone at 800°C), equilibrating the furnace to the maximum reaction temperature for three hours, and finally, cooling the central zone at 1°C/hr to the growth temperature. Optimum crystal growth occurred when the charge zone was maintained at 950°C and the growth zone at 925°C. The transport process was carried out for a week, and the typical crystal size was 5x3x3mm. For the growth of nickel doped ZnS crystals, stoichiometric weights of metals and sulfur with various nickel to zinc ratios were introduced into a silica tube and evacuated. The growth of crystals was achieved by the above-described transport process. The real compositions of the crystals grown were determined by magnetic measurements.

#### Characterization

X-ray powder diffraction patterns of ground single crystals were obtained using a Philips diffractometer and monochromated high intensity  $CuK\alpha_1$  radiation  $(\lambda = 1.5405Å)$ . For qualitative phase identification, diffraction patterns were taken over the range  $12^\circ < 29 < 80^\circ$  with a scan rate of  $1^\circ 20/min$ , while cell parameters were determined from scans taken at  $0.25^\circ 20/min$ . Precise lattice parameters were obtained from these reflections using a least-squares refinement program which corrects for the systematic errors of the diffractometer.

Optical measurements on polished single-crystal slices were performed at room temperature on a Perkin-Elmer 580 single-beam scanning infrared spectrophotometer. The measurements were performed in the transmission mode over the range 2.5  $\mu$ m - 25  $\mu$ m. Transmission through the sample was normalized to the signal obtained in the absence of sample.

The microhardness measurements (Knoop indenter) were made on crystals using a Kentron microhardness tester. The results were obtained using a diamond indenter with 25 gram loads.

The stability of these compounds toward oxidation was determined by heating them in a flowing oxygen stream (60cc/min) and monitoring the change in weight during the heating period. The decomposition temperature was determined as the temperature where the weight of the sample began to change. The results are summarized in Table 1.

Magnetic susceptibilities were measured from liquid nitrogen temperature to 315 K using a Faraday balance at a field strength of 10.4 kOe. Honda-Owens (field dependency) plots were also made and all magnetic susceptibility data were corrected for diamagnetism (4).

TABLE 1
---------

## Properties of $Ni_{x}Zn_{1-x}S$

x	Phase	Cell Parameter	IR Transmission Range (um)	Knoop Hardness	Decomposition Temperature (°C)
0	Cub.2nS	a = 5.411	2.5 - 14	158 ± 9	520
0.03	Cub.ZnS	a = 5.409	3.5 - 14	251 ± 36	490

## Results and Discussion

Single crystals of ZnS and Ni<sub>0.03</sub>Zn<sub>0.97</sub>S have been grown by chemical vapor transport using iodine as the transport agent. The crystals averaged 5x3x3 mm in size. Pure zinc sulfide was colorless and nickel-doped zinc sulfide was dark red in color. The exact concentration of nickel in the crystals was determined by magnetic measurements. The properties of these compounds are summarized in Table 1.

Magnetic measurements were made as functions of both field and temperature. All samples, doped with nickel, showed identical paramagnetic behavior and had no field dependency at either room temperature or at liquid nitrogen temperature. The reciprocal magnetic susceptibility is plotted versus temperature in Fig. 1 and shows Curie-Weiss behavior with a Weiss constant of -78 K. The concentration of nickel can be calculated from the slope of the experimental line, by assuming a spin-only moment (2.83) of the Ni(II) ions. It was found that crystals grown from the charge containing nickel to zinc ratios of either 10/90 or 15/85 gave identical nickel contents of 5 atomic percent. This indicated that the maximum solubility at the growth conditions used had been reached.

The crystalline structures of these compounds were determined by x-ray powder diffraction analysis. Both pure ZnS crystals and ZnS crystals containing 3% nickel have the cubic stannite structure. Cell parameters obtained from a least-squares refinement showed that there was no significant charge in cell parameter when 3% nickel was substituted into zinc sulfide.

The IR transmission data summarized in Table 1 are plotted in Fig. 2. The results indicate that pure ZnS crystals transmit in the range of 2.5  $\mu$ m to 14  $\mu$ m. The crystals containing 3 atomic percent nickel gave the same IR transmission at the long wavelength end, but there appeared to be a cut off at 3.5  $\mu$ m.

Hardness (Knoop hardness number) of these compounds and their thermal stability towards oxidation are also given in Table 1. The hardness of pure zinc sulfide is 158, which is in agreement with the previous work (5), where a value of 185 was measured with a Vickers indenter. The samples doped with only 3% nickel are significantly harder than pure zinc sulfide and gave a Knoop hardness

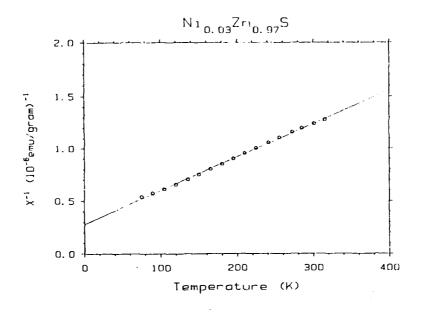


Fig. 1. Variation of magnetic susceptibility with temperature for a typical crystal of  $Ni_X Zn_{1-X}S$ . The composition  $Ni_{0.03}Zn_{0.97}S$  was calculated from the slope of the fitted line assuming the spin-only moment of 2.83 BM per Ni(II).

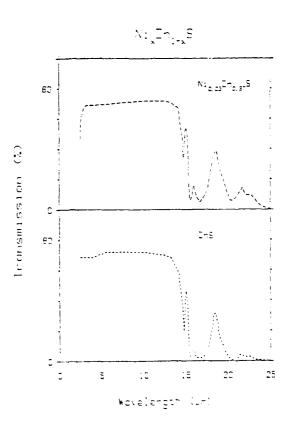


Fig. 2. The infrared spectrum of a crystal of Ni<sub>0.03</sub>Zn<sub>0.97</sub>S compared with that of pure ZnS.

O DECEMBER ADDRESS, REALINESS RECORDER OF MARKEN RECEIVED AND REALINE OF MARKEN OF MARKEN OF MARKEN OF MARKEN

13

number of 251. Pure ZnS begins to decompose in flowing oxygen at 520°C and the samples containing 3 atomic percent nickel begin to decompose at 490°C.

## Conclusions

It was found that, whereas ZnS doped with 3% nickel has a cut off at the short wavelength end of its IR spectrum, it provides the same IR transmission as pure ZnS at the long wavelength end. The hardness of ZnS is significantly increased by nickel doping. This should be helpful for its use as an IR window material in the range of 8 to 12  $\mu$ m.

## Acknowledgments

This research was supported in part by the Office of Naval Research and also by the Eastman Kodak Company, Rochester, NY.

## References

- 1. G. K. Czamanske and F. E. Goff, Econ. Geol., 68(2), 258 (1973).
- I. Broser, R. Broser, E. Birkicht and A. Hoffman, <u>J. Lumines.</u>, <u>31-52</u>, 424 (1984).
- 3. G. Roussos and H-J. Schulz, J. Lumines., 31-32, 427 (1984).

- 4. P. W. Selwood, "Magnetochemistry", Interscience, New York, 1956, p. 78.
- M. Nagabhooshanam and V. H. And, Cryst. Res. Technol., 20(10), 1399 (1985.)