

AD-A210 857

FOREIGN TECHNOLOGY DIVISION



TURBULENT STRUCTURE OF ROTATING STREAMS

by

B.P. Ustimenko, V.N. Zmeykov, M.A. Bakhman



DTIC
ELECTE
JUL 26 1989

S E D

Approved for public release;
distribution unlimited.



**Best
Available
Copy**

EDITED TRANSLATION

FTD-ID(RS)T-1710-83

3 February 1984

MICROFICHE NR: FTD-84-G-000126

TURBULENT STRUCTURE OF ROTATING STREAMS

By: B.P. Ustimenko, V.N. Zmeykov, M.A. Bukhman

English pages: 9

Source: Izvestiya Akademii Nauk Kazakhskoy SSR,
Seriya Fiziko-Matematicheskaya, Nr. 6,
1967, pp. 27-30

Country of origin: USSR

Translated by: Robert Allen Potts

Requester: FTD/IQTA

Approved for public release; distribution unlimited.

THIS TRANSLATION IS A REPRODUCTION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-afb, ONO.

FTD -ID(RS)T-1710-83

Date 3 Feb 19 84

U. S. BOARD ON GEOGRAPHIC NAMED TRANSLITERATION SYSTEM

Slavic	Italic	Transliteration	Block	Italic	Transliteration
а	A a	A, a	Р	Р р	R, r
б	B b	B, b	С	С с	S, s
в	V v	V, v	Т	Т т	T, t
г	G g	G, g	У	У у	U, u
д	D d	D, d	Ф	Ф ф	F, f
е	E e	Ye, ye; E, e*	Х	Х х	Kh, kh
ж	Ж ж	Zh, zh	Ц	Ц ц	Ch, ch
з	Z z	Z, z	Ч	Ч ч	Ch, ch
и	I i	I, i	Ш	Ш ш	Sh, sh
я	Я я	I, y	Щ	Щ щ	Shch, shch
к	K k	K, k	Ъ	Ъ ъ	"
л	L l	L, l	Ы	Ы ы	"
м	M m	M, m	Ь	Ь ь	"
н	N n	N, n	Э	Э э	E, e
о	O o	O, o	Ю	Ю ю	Yu, yu
п	P p	P, p	Я	Я я	Ya, ya

*je initially, after vowels, and after ъ, ы, э elsewhere.
When written as е in Russian, transliterate as ye or ë.

RUSSIAN AND ENGLISH TRIGONOMETRIC FUNCTIONS

Russian	English	Russian	English	Russian	English
sin	sin	sh	sink	arc sh	arc sin
cos	cos	ch	cosh	arc ch	arc cos
tg	tan	th	tann	arc th	arc tan
ctg	cot	cth	coth	arc cth	arc ctg
sec	sec	sch	sech	arc sch	arc sec
cscc	csc	csch	csch	arc csch	arc csc

Russian English

rot curl
lg log

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.



DOC = 1710

PAGE 1

TURBULENT STRUCTURE OF ROTATING STREAMS.

B. P. Ustimenko, V. N. Zmeykov, M. A. Bukhman.

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or Special
A-1	13

The investigation of turbulent structure is necessary for understanding the physical mechanism of transfer processes in rotating streams, their peculiarities and distinctions from rectilinear flows, for solution of questions of the intensification of carburetion, combustion etc.

For the purpose of revealing the main characteristic peculiarities of the effect of the field of centrifugal forces on the processes of turbulent transfer, research of the aerodynamics and heat exchange of circular flow in annular channels between rotating cylinders was conducted. In this case were examined two limiting cases of the relationship of angular velocities of rotation of external and internal cylinders, equal to zero (only the internal cylinder rotates) - unstable flow, and to infinity (external cylinder rotates) - stable flow. *(was examined primary translations, etc.)*

*

The distributions of tangential $(i_t = \sqrt{\overline{v_t^2}} / \bar{v})$, axial $(i_a = \sqrt{\overline{v_a^2}} / \bar{v})$ and radial $(i_r = \sqrt{\overline{v_r^2}} / \bar{v})$ components of relative intensity of fluctuations of velocity*, measured in channels with internal (a) and external (b) rotating cylinder, are presented in Figure 1.

FOOTNOTE * Measurement of fluctuation characteristics of flow was performed by ETAM-3A hot-wire anemometer with ESU-2 amplifier of system VEI [1]. ENDFOOTNOTE

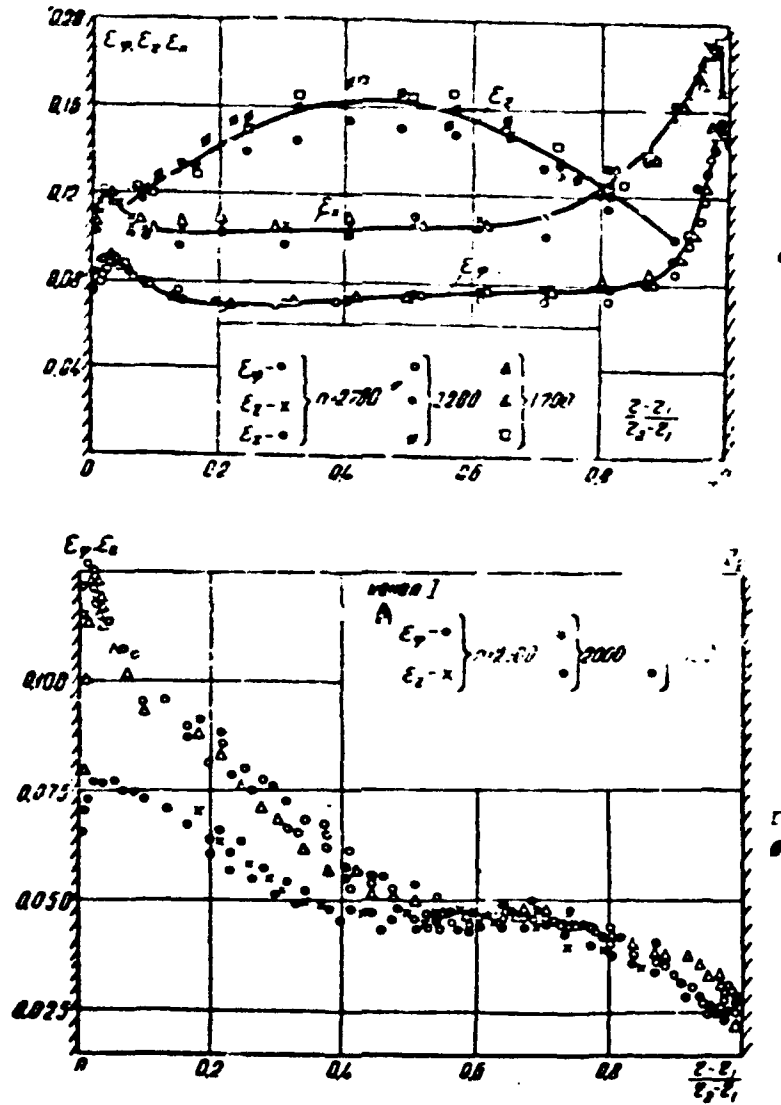


Fig. 1. Profiles of components of relative intensity of fluctuations of velocity in the channel with internal (a) and external (b)

cylinder.

Key: (A) channel.

In the channel with internal rotating cylinder, just as in rectilinear channels, components u_r and u_z take maximum value close to the walls, in the region of the greatest change of average velocity. The greatest value of radial component u_r is observed in the central part of the channel.

During rotation of the external cylinder u_r and u_z reach maximum value near the rotating wall, and minimum - near the stationary wall. The level of fluctuations in the channel with internal rotating cylinder is significantly higher (3-5 times) than during rotation of the external cylinder.

The substantial difference in the level of intensities of fluctuations of velocity in channels with external and internal rotating cylinder is connected with the different action of the field of centrifugal forces on the fluctuating motion in these cases. In the first case the field of centrifugal forces damps the turbulent fluctuations and stabilizes flow. This leads also to significant reduction (2-3 times) of the resistance and intensity of heat transfer. In the second case the reverse action of the field of

centrifugal forces is observed.

In contrast to flow in the channel with internal rotating cylinder, where turbulization of the stream sets in virtually simultaneously along the entire width of the channel, in channels with external rotating cylinder the turbulence appears first in a narrow band close to the rotating cylinder and in proportion to increase of the speed of rotation is gradually propagated through the entire width of the channel. In this case in a certain range of Reynolds numbers there exist regions of laminar and completely turbulent flow, separated by a region of the periodic appearance of fluctuations. The width of each region is changed with a change of Reynolds number.

The noted qualitative peculiarities of the effect of the field of centrifugal forces on the processes of turbulent transfer in circular flows are observed also in more complex cases of rotating flows, in particular, in cyclone chambers.

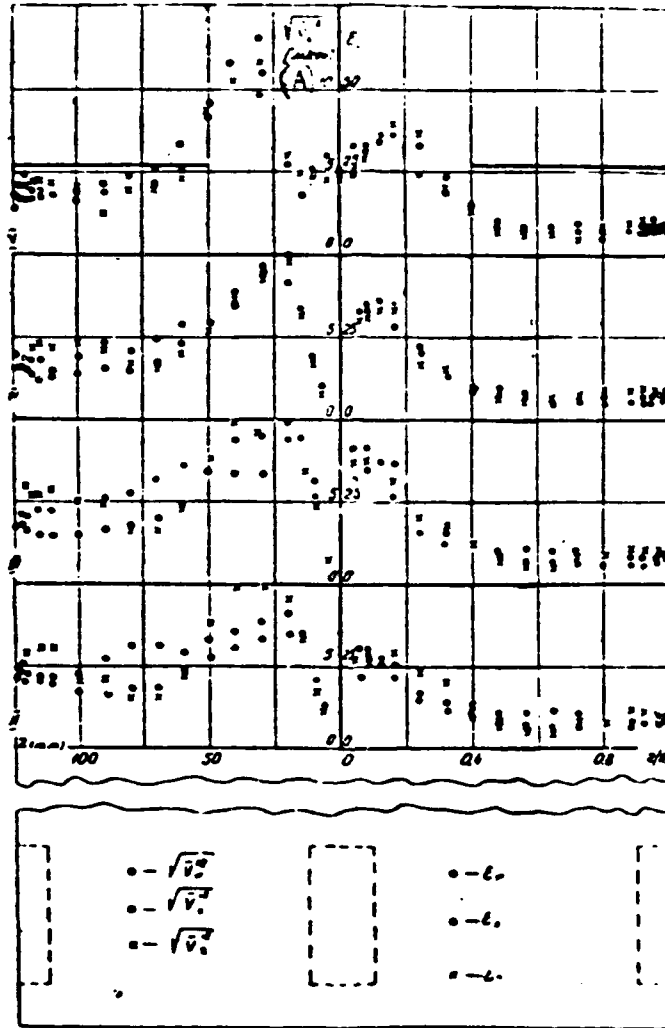


Fig. 2. Distribution of the relative intensity of turbulence ϵ and mean-square turbulent fluctuations of velocity $\sqrt{v_i^2}$ in a cyclone

chamber.

Key: (A) m/s.

Fig. 2 shows the distribution of tangential (ϵ_r), axial (ϵ_z) and radial (ϵ_r) components of relative intensity of velocity fluctuations in different cross sections of a cyclone chamber. As seen from the figure, all three components have qualitatively identical form: approximately constant value in the region of quasi-potential motion (3-10%) and increase in the region of quasi-solid (up to 40%). The coefficients of turbulent viscosity

found during the use of experimental profiles of averaged velocity and correlations $\overline{v_r'v_r'}$ and $\overline{v_z'v_z'}$, in the quasi-potential zone are hundreds and thousands of times, and in the quasi-solid are thousands and tens of thousands of times greater than the coefficient of molecular viscosity.

The high level of intensity of turbulent motion, larger values of coefficients of turbulent transfer determine the sharp intensification of the process of combustion in cyclone chambers.

Flow in the quasi-potential zone of the cyclone is qualitatively similar to flow in the channel with internal rotating cylinder. In the near-wall region of cyclone stream, where the tangential velocity

is decreased with increase of the radius, a zone of hydrodynamically unstable flow appears. Due to the action of centrifugal forces here occurs intensification of the fluctuating motion and processes of turbulent exchange. As in the case of flow in the channel with internal rotating cylinder, this leads to the appearance of so-called "quasi-potential" zone of flow, in which the moment of momentum of elements of liquid can be approximately considered as constant. Concerning flow in the quasi-solid zone of the cyclone, here, in contrast to flow in the channel with external rotating cylinder, where $v_z=0$, further rise of the level of fluctuating motion occurs. This, apparently, is connected with the circumstance that in this region is observed the greatest value of gradients of axial component of velocity (region of blending of forward and counter streams), i.e., are created conditions for intense turbulent exchange. Flow in this zone resembles flow in the stream region of the near-wall stream. However, flow in the quasi-potential zone in such analogy approximately corresponds to the nucleus of the near-wall turbulent stream.

All this confirms the stream diagram of flow in the cyclone chamber developed in work [3].

Article submitted 27 May 1967

REFERENCES

1. Чебышев П. В. Электротермометры. «Вестник электропромышленности», 1952, № 1.
2. Kruka V., Eskinazi S. The wall-jet in a moving stream ; Fluid Mech. Vol. 20, part. 4, 1964.
3. Вулис Л. А., Устименко Б. П. Аэродинамика циклонной топочной камеры. «Теплоэнергетика», 1954, № 9.