

FILE COPY


AD-A218 438

4

USAAVSCOM TR 89-D-22E



US ARMY
AVIATION
SYSTEMS COMMAND

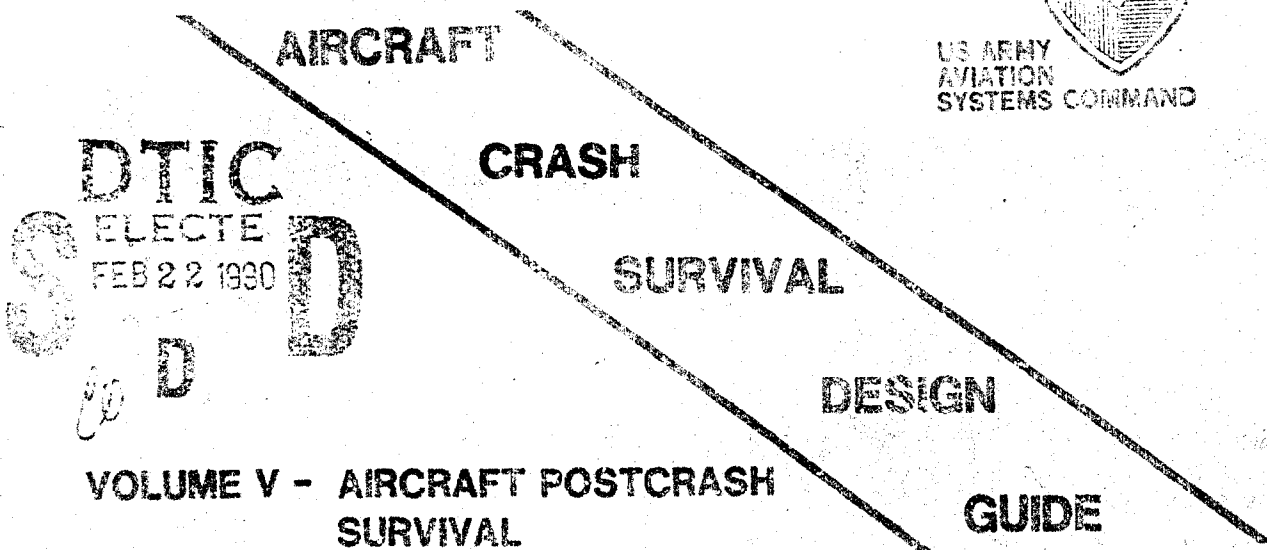

DTIC

ELECTE

FEB 22 1990

S

D


VOLUME V - AIRCRAFT POSTCRASH
SURVIVAL

GUIDE

SIMULA INC.
10016 SOUTH 51st STREET
PHOENIX, ARIZONA 85044

This Document Contains Page/s
Reproduced From
Best Available Copy

DECEMBER 1989

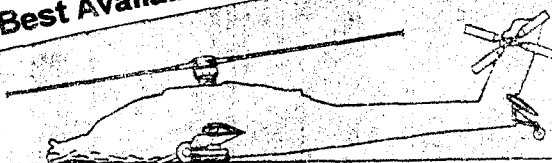

FINAL REPORT

Approved for public release; distribution is unlimited.

Prepared for

AVIATION APPLIED TECHNOLOGY DIRECTORATE
US ARMY AVIATION RESEARCH AND TECHNOLOGY ACTIVITY (AVSCOM)
FORT EUSTIS, VA 23604-5577

90 02 21 114

AVIATION APPLIED TECHNOLOGY DIRECTORATE POSITION STATEMENT

This revised edition of the Aircraft Crash Survival Design Guide (ACSDG) was prepared to assist those design engineers responsible for the incorporation of crashworthiness into the design of helicopters, light fixed-wing aircraft, and tilt rotor aircraft. Also, this guide may be used in the evaluation of the level of crashworthiness design available in the various types of aircraft.

This report documents the components and principles of crashworthiness and suggests specific design criteria. In general, a systems approach is presented for providing a reasonable level of aircrew and aircraft protection in a crash, which is considered the preferred approach. The original Crash Survival Design Guide was published in 1967 as USAAVLABS TR 67-22 and subsequent revisions published as USAAVLABS TR 70-22, USAAMRDL TR 71-22, and USARTL-TR-79-22A thru E. This edition consists of a consolidation of up-to-date design criteria, concepts, and analytical techniques developed through research programs sponsored by this Directorate and others over the past 27 years.

This document has been coordinated with other Government agencies and helicopter airframe manufacturers active in aircraft crashworthiness research and development, and is considered to offer sound design criteria and approaches to design for crashworthiness.

The technical monitors for this program were Messrs. LeRoy Burrows, Harold Holland, and Kent Smith of the Safety and Survivability Technical Area, Aeronautical Systems Division, Aviation Applied Technology Directorate.

NOTE: All previous editions of the Aircraft Crash Survival Design Guide are obsolete and should be destroyed.

**This Document Contains Page/s
Reproduced From
Best Available Copy**

DISCLAIMERS

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission, to manufacture, use, or sell any patented invention that may in any way be related thereto.

Trade names cited in this report do not constitute an official endorsement or approval of the use of such commercial hardware or software.

DISPOSITION INSTRUCTIONS

Destroy this report by any method which precludes reconstruction of the document. Do not return it to the originator.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE December 1989	3. REPORT TYPE AND DATES COVERED Final FROM 9/86 TO 8/89	
4. TITLE AND SUBTITLE Aircraft Crash Survival Design Guide Volume V - Aircraft Postcrash Survival			5. FUNDING NUMBERS DAAJ02-86-C-0028	
6. AUTHOR(S) N.B. Johnson, S.H. Robertson, D.S. Hall				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Simula Inc. Phoenix, Arizona 85044-5299			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Aviation Applied Technology Directorate U.S. Army Aviation Research & Technology Activity (AVSCOM) Fort Eustis, VA 23604-5577			10. SPONSORING / MONITORING AGENCY REPORT NUMBER USAAVSCOM TR 89-D-22E	
11. SUPPLEMENTARY NOTES Volume V of five-volume report				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This five-volume publication has been compiled to assist design engineers in understanding the design considerations associated with the development of crash-resistant U.S. Army aircraft. A collection of available information and data pertinent to aircraft crash resistance is presented, along with suggested design conditions and criteria. The five volumes of the <u>Aircraft Crash Survival Design Guide</u> cover the following topics: Volume I - Design Criteria and Checklists; Volume II - Aircraft Design Crash Impact Conditions and Human Tolerance; Volume III - Aircraft Structural Crash Resistance; Volume IV - Aircraft Seats, Restraints, Litters and Cockpit/Cabin Delethalization; and Volume V - Aircraft Postcrash Survival. This volume (Volume V) contains information on the aircraft postcrash environment and design techniques that can be used to reduce postcrash hazards. Topics include the postcrash fire environment, crash-worthy fuel systems, ignition source control, fire behavior of interior materials, ditching survival, emergency escape, and crash locator beacons. <i>Keywords:</i>				
14. SUBJECT TERMS Aircraft Design Guide Crashworthy Fuel Systems Ignition Source Control Emergency Escape			15. NUMBER OF PAGES 205	
16. PRICE CODE				
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT

PREFACE

This report was prepared for the Safety and Survivability Technical Area of the Aviation Applied Technology Directorate, U.S. Army Aviation Research and Technology Activity (AVSCOM), Fort Eustis, Virginia, by Simula Inc. under Contract DAAJ02-86-C-0028, initiated in September 1986. This guide is a revision of USARTL Technical Report 79-22, Aircraft Crash Survival Design Guide, published in 1980.

A major portion of the data contained herein was taken from U.S. Army-sponsored research in aircraft crash resistance conducted from 1960 to 1987. Acknowledgment is extended to the U.S. Air Force, Federal Aviation Administration, NASA, and U.S. Navy for their research in crash survival. Appreciation is extended to the following organizations for providing accident case histories leading to the establishment of the impact conditions in aircraft accidents:

- U.S. Army Safety Center, Fort Rucker, Alabama.
- U.S. Naval Safety Center, Norfolk, Virginia.
- U.S. Air Force Inspection and Safety Center, Norton Air Force Base, California.

Information was also provided by the Civil Aeronautics Board, which is no longer in existence.

Additional credit is due the many authors, individual companies, and organizations listed in the bibliographies for their contributions to the field. The contributions of the following authors to previous editions of the Aircraft Crash Survival Design Guide are most noteworthy:

D. F. Carroll, R. L. Cook, S. P. Desjardins, J. K. Drummond,
J. H. Haley, Jr., A. D. Harper, H. G. C. Henneberger,
N. B. Johnson, G. Kourouklis, D. H. Laananen, W. H. Reed,
S. H. Robertson, J. Shefrin, L. M. Shaw, G. T. Singley III,
A. E. Tanner, J. W. Turnbow, and L. W. T. Weinberg.

Volume V has been coauthored by N. B. Johnson, S. H. Robertson, and D. S. Hall. Appreciation is also extended to the staff members of Simula Inc. and the Crash Research Institute for their contributions.



Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

TABLE OF CONTENTS

	<u>Page</u>
PREFACE	111
LIST OF ILLUSTRATIONS	v111
LIST OF TABLES.	x111
INTRODUCTION.	1
1. BACKGROUND DISCUSSION	4
2. DEFINITIONS	6
2.1 GENERAL TERMS.	6
2.2 FUEL, OIL, AND HYDRAULIC SYSTEM TERMS.	7
2.3 IGNITION SOURCE CONTROL TERMS.	8
2.4 INTERIOR MATERIALS SELECTION TERMS	8
2.5 DITCHING AND EMERGENCY ESCAPE TERMS.	9
3. POSTCRASH FIRE.	11
3.1 INTRODUCTION	11
3.2 POSTCRASH FIRE CONDITIONS.	11
3.2.1 Heat	12
3.2.2 Smoke and Toxic Gases	15
3.2.3 Graphite Fiber Hazards.	20
3.3 HUMAN SURVIVAL AND ESCAPE.	21
3.3.1 Human Tolerance to Heat	21
3.3.2 Human Tolerance to Toxic Gases.	24
3.3.3 Human Tolerance to Miscellaneous Fire Factors	28
4. POSTCRASH FIRE PROTECTION	29
4.1 INTRODUCTION	29
4.2 FLAMMABLE FLUIDS	29
4.3 FUEL CONTAINMENT	30
4.3.1 Fuel Tanks.	31
4.3.2 Fuel Lines.	41
4.3.3 Supportive Components	49
4.3.4 Fuel System Full-Scale Crash Test	63
4.4 OIL AND HYDRAULIC FLUID CONTAINMENT.	64
4.5 FUEL MODIFICATION.	65
4.6 IGNITION SOURCE CONTROL.	66
4.6.1 Electrical Sources.	66
4.6.2 Engine.	69
4.6.3 Heaters	79
4.6.4 Sparks	79
4.6.5 Initiating Systems.	81
4.7 FOAMS, HONEYCOMBS, AND MISCELLANEOUS VOID FILLERS.	82

This document contains
blank pages that were
not filmed

This Document Contains Page/s
Reproduced From
Best Available Copy

TABLE OF CONTENTS (CONTD)

	<u>Page</u>
5. INTERIOR MATERIALS	84
5.1 INTRODUCTION	84
5.2 FIRE BEHAVIOR OF MATERIALS	85
5.2.1 Flammability	85
5.2.2 Smoke	89
5.2.3 Toxic Gases	92
5.3 MATERIAL TESTING	94
5.3.1 Laboratory Testing.	95
5.3.2 Large-Scale Testing	99
5.3.3 Mathematical Fire Modeling.	100
5.4 SELECTED MATERIAL PROPERTIES	100
5.4.1 Seat Cushion Foams	100
5.4.2 Upholstery and Other Fabrics.	105
5.4.3 Fire Blocking Materials for Seat Cushions	106
5.4.4 Structural Components	110
5.4.5 Aircraft Insulation	119
5.4.6 Windows	122
5.5 MATERIAL SELECTION CRITERIA.	123
5.5.1 General Considerations.	123
5.5.2 Flammability Test Criteria.	124
5.5.3 Smoke and Toxic Gas Test Criteria	125
5.5.4 Evaluation of Materials	125
6. DITCHING PROVISIONS.	140
6.1 INTRODUCTION	140
6.2 DITCHING CONDITIONS.	140
6.2.1 Aircraft Configuration and Survivability Characteristics	140
6.2.2 Underwater Escape	142
6.3 EMERGENCY EGRESS OPENINGS.	142
6.3.1 General Provisions.	142
6.3.2 Explosively Cut Exits	143
6.4 UNDERWATER EMERGENCY LIGHTING.	143
6.4.1 Underwater Visibility	143
6.4.2 Emergency Lighting Requirements	145
6.5 AIRCRAFT FLOTATION SYSTEMS	151
6.5.1 Sponsons.	152
6.5.2 Flotation Bags	152
6.6 DITCHING EQUIPMENT	153
7. EMERGENCY ESCAPE AND RESCUE PROVISIONS	155
7.1 INTRODUCTION	155
7.2 EMERGENCY EXITS.	155
7.2.1 Emergency Exit Requirements	155
7.2.2 Types of Exits.	156
7.2.3 Size of Exits	156
7.2.4 Number of Exits	157

TABLE OF CONTENTS (CONTD)

	<u>Page</u>
7.2.5 Location of Exits.	158
7.2.6 Exit Operation	159
7.2.7 Explosively Created Exits.	163
7.2.8 Access to Exits.	166
7.3 EMERGENCY LIGHTING	167
7.3.1 Interior Emergency Lighting.	167
7.3.2 Emergency Exit Lights.	168
7.3.3 Exterior Emergency Lighting.	171
7.3.4 Structural Considerations.	171
7.3.5 Emergency Lighting Power Source.	172
7.3.6 Actuation of Emergency Lighting Units.	172
7.4 MARKING OF EMERGENCY EXITS	172
7.4.1 Internal Identification of Exits	173
7.4.2 External Identification of Exits	174
7.4.3 External Identification of Secondary Openings.	174
7.4.4 Marking Instructions for Exit Operations	174
7.5 CREW CHIEF STATIONS.	175
8. CRASH LOCATOR BEACONS.	176
8.1 INTRODUCTION	176
8.2 SYSTEM OVERVIEW.	176
8.3 CURRENT SYSTEM DESIGN STATUS	176
8.3.1 Frequencies.	177
8.3.2 Components of Locator Beacons.	177
APPENDIX -Relation of Pain Threshold Time to Heat Source Temperature .	181
REFERENCES.	182
BIBLIOGRAPHY.	196

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	Average recorded ambient and radiant temperatures in large, crashed, burning, passenger/cargo-carrying, fixed-wing, aircraft.	12
2	Recorded ambient temperature range in the cabin areas of large, burning, passenger/cargo-carrying helicopters.	13
3	Aircraft skin melting time based on gross weight.	14
4	Changes in temperature, oxygen and smoke levels at flashover	16
5	Relation of smoke to temperature increase	17
6	Average recorded CO concentrations and calculated COHb levels in large, crashed, burning, passenger/cargo-carrying fixed-wing aircraft	18
7	Average recorded CO concentrations and calculated COHb levels in large, crashed, burning, passenger/cargo-carrying helicopters	19
8	Concentrations of toxic gases during a full-scale fuel fire test.	20
9	The hemisphere of radiant heat concept.	22
10	Pain threshold time as a function of temperature of radiant heat source	23
11	Human tolerance to ambient air temperatures	24
12	Physiological effects of various carboxyhemoglobin percentages.	25
13	Probable CO uptake in humans exposed to various air concentration of COHb.	26
14	Tank shapes	33
15	Resistance of materials to tearing.	35
16	Slit test for obtaining resistance to tear propagation.	36
17	Drop test fixture	37
18	Typical setup for dynamic testing of fuel bladder fitting pullout	38

LIST OF ILLUSTRATIONS (CONTD)

<u>Figure</u>		<u>Page</u>
19	Typical fuel tank fitting pullout following dynamic test. . .	38
20	High-strength fitting retention techniques.	39
21	Sample frangible attachment separation load calculation . . .	40
22	Specifically designed bulkhead (firewall)-to-line breakaway valve	45
23	Modified quick-disconnect line-to-line valve.	45
24	Typical breakaway load calculation for in-line breakaway valve	46
25	Standard hose fitting dimensions.	47
26	Self-sealing hose fitting dimensions.	48
27	Hose stabilizing with frangible structure	50
28	"One-shot" self-sealing valve	51
29	Cable-actuated quick-disconnect valve	51
30	Typical tank-to-tank self-sealing breakaway interconnect valve	52
31	Typical method of breakaway load calculation for fuel tank-to-line breakaway valve	53
32	Vent valve.	55
33	Frangible attachment of air-driven boost pump to airframe structure	56
34	Frangible filler neck installation.	57
35	Check valve installed in conjunction with frangible filler neck.	57
36	Frangible ring attachment for installing fuel tank fillers. .	58
37	Frangible fuel quantity sensor.	58
38	Design concepts for crash-resistant fuel drain cocks.	59
39	Fuel filter protective jacket	60

LIST OF ILLUSTRATIONS (CONTD)

<u>Figure</u>		<u>Page</u>
40	Spillage control valve assembly	61
41	Felt oil tank cover	65
42	Cable cutter de-energizing method	68
43	Rotating beacon installation.	69
44	JP-4 ignition delay versus surface temperature.	71
45	Hot surface inerting system	73
46	Flame-source inerting system.	74
47	Schematic diagram showing fuel shutoff and drain system in J57 engine crash-fire protection system	75
48	Fuel baffle and fire curtain concept.	76
49	External drip fence	77
50	Internal drip fence	78
51	Fuel flow diverters	78
52	Block diagram showing how initial switches are incorporated into a crash-fire-prevention system for twin-engined airplane.	82
53	Potential activating circuitry for single-engine aircraft . .	83
54	Influence of superimposed heating on minimum oxygen concen- tration for various polymer systems burning in the driven- rod configuration	87
55	Influence of superimposed heating on flame spread rates of various polymers.	88
56	Smoke production versus heat flux - polycarbonate and poly- sulfone sheets.	91
57	Effect of concentration of the reactive fire retardant O, O-Diethyl-N,N,-BIS (2-Hydroxyethyl) aminomethylphosphonate on light obscuration in rigid-urethane foams.	93
58	Effect of the nonreactive fire retardant tris, 2,3-dibromo- propylphosphate on light obscuration in rigid-urethane foams	93
59	Combined hazard index	98

LIST OF ILLUSTRATIONS (CONTD)

<u>Figure</u>		<u>Page</u>
60	Seat back temperatures during burn tests of coated and uncoated polyurethane foam seats.	101
61	Hydrogen cyanide concentrations from burn tests of coated and uncoated polyurethane foams	102
62	Effect of cushioning protection on calculated survival time under full-scale post-crash fire conditions	110
63	Effect of cushioning protection on calculated visibility through smoke under full-scale post-crash fire conditions	111
64	Sandwich panel configuration.	114
65	Thermal efficiency of experimental panels with various face sheet materials	114
66	Composition of composite panels for aircraft interiors.	115
67	Benefit of advanced composite panels in full-scale fire tests	116
68	Comparative temperature profiles of honeycomb panels with various face sheets during full-scale fire tests.	117
69	Comparative smoke profiles of honeycomb panels with various face sheets during full-scale fire tests.	118
70	Semirigid foam insulation test configuration.	120
71	Compartment ambient temperature versus time from fuel ignition during foam insulation tests	121
72	Upholstery fabric influence on fire blocking mechanism.	136
73	Comparison of luminance thresholds at two adapting levels in water and in air	144
74	Values of V in equation (3) for distances from light source to observer with various water attenuation coefficients (a).	146
75	Threshold sensitivity (s) levels for elapsed time after ditching for adaptation fields (AF) from 0.35 to 350 cd/m ²	147

LIST OF ILLUSTRATIONS (CONTD)

<u>Figure</u>		<u>Page</u>
76	Percentage of trials on which the subjects could not correctly identify the orientation of the three lighting configurations for various lights over the three distances in water of two turbidities. The chemical lights were not tested in configuration I at a turbidity of $\alpha \approx 0.9$	149
77	Mean threshold intensity (fL) of the configuration of EL panels at different distances in highly turbid water ($\alpha \approx 3.0$)	150
78	Typical HEEL installation	151
79	Tolerance time for different water temperatures while in life rafts	154
80	Schematic of ELSIE system	164
81	Relative brightness of internally illuminated aircraft exit signs at various distances from signs (average of 10 different signs)	169
82	Light transmittance of exit signs in clear air and in smoke at various distances from sign.	170
83	Vertical light illumination profile versus optical density.	171
84	Means of smoke density values at which seven sign sizes were identified when presented at three background luminance levels.	173
85	Typical exit release instructions incorporating symbols	175
86	Crash activation sensor response curve.	178

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1	Tolerance to selected combustion gases.	27
2	Required minimum individual loads for standard hose and hose-end fitting combinations	42
3	Required minimum individual loads for self-sealing hose and hose-end fitting combinations	43
4	Required minimum individual loads for self-sealing hose with flanged end fittings.	44
5	Summary of design velocities for rotary- and light fixed-wing aircraft	63
6	Minimum conditions under which certain abraded metal particles will ignite	80
7	Minimum autoignition temperatures (AIT) and hot plate ignition temperatures of sheet-type combustibles in air . . .	86
8	Toxic gases produced by burning aircraft interior materials	94
9	Results of large-scale air transport cabin fire tests using urethane or neoprene seat cushions.	103
10	Typical properties of standard and improved neoprene foam . .	104
11	Comparison of polyphosphazene, polyimide, and fire-retarded polyurethane foam properties.	104
12	Flammability properties of various fabric materials	105
13	Selection criteria for screening tests of seat materials. . .	107
14	Seat cushion configurations selected for evaluation	109
15	Preliminary properties of candidate compression molding materials	112
16	Preliminary properties of candidate thermoformed materials. .	113
17	Flammability appraisal of materials used in commercial aircraft.	126
18	Fire blocking fabric.	137
19	Survival rate versus helicopter flotation time.	141

LIST OF TABLES (CONTD)

<u>Table</u>		<u>Page</u>
20	Representative attenuation coefficients (a) for various water sources	145
21	Examples of values for minimum luminance (L) in cd/m^2 for escape hatch lights at distances to level of 350 cd/m^2	148

INTRODUCTION

For many years, emphasis in aircraft accident investigation was placed on finding the cause of the accident. Very little effort was expended in the crash survival aspects of aviation safety. However, it became apparent through detailed studies of accident investigation reports that large improvements in crash survival could be made if consideration were given in the initial aircraft design to the following general survivability factors:

1. Crash Resistance of Aircraft Structure - The ability of the aircraft structure to maintain living space for occupants throughout a crash.
2. Tiedown Strength - The strength of the linkage preventing occupant, cargo, or equipment from becoming missiles during a crash sequence.
3. Occupant Acceleration During Crash Impact - The intensity and duration of accelerations experienced by occupants (with tiedown assumed intact) during a crash.
4. Occupant Crash Impact Hazards - Barriers, projections, and loose equipment in the immediate vicinity of the occupant that may cause contact injuries.
5. Postcrash Hazards - The threat to occupant survival posed by fire, drowning, exposure, etc., following the impact sequence.

Early in 1960, the U.S. Army Transportation Research Command* initiated a long-range program to study all aspects of aircraft safety and survivability. Through a series of contracts with the Aviation Safety Engineering and Research Division (AVSER) of the Flight Safety Foundation, the problems associated with occupant survival in aircraft crashes were studied to determine specific relationships between crash forces, structural failures, crash fires, and injuries. A series of reports covering this effort was prepared and distributed by the U.S. Army, beginning in 1960. In October 1965, a special project initiated by the U.S. Army consolidated the design criteria presented in these reports into one technical document suitable for use as a designer's guide by aircraft design engineers and other interested personnel. The document was to be a summary of the current state of the art in crash survival design, using not only data generated under Army contracts but also information collected from other agencies and organizations. The Crash Survival Design Guide, TR 67-22, published in 1967, realized this goal.

Since its initial publication, the Design Guide has been revised and expanded four times to incorporate the results of continuing research in crash resistance technology. The third edition, TR 71-22, was the basis for the criteria contained in the original version of the Army's crash resistance military standard MIL-STD-1290, "Light Fixed- and Rotary-Wing Aircraft Crash

*Now the Aviation Applied Technology Directorate, Aviation Research and Technology Activity of the U.S. Army Aviation Systems Command (AVSCOM).

Resistance" (Reference 1). The fourth edition, published in 1980, entitled Aircraft Crash Survival Design Guide, TR 79-22A through E expanded the document to five volumes, which have been updated by the current edition to include information and changes developed from 1980 to 1987. This current edition, the fifth, contains the most comprehensive treatment of all aspects of aircraft crash survival now documented. It can be used as a general text to establish a basic understanding of the crash environment and the techniques that can be employed to improve changes for survival. It also contains design criteria and checklists on many aspects of crash survival and thus can be used as a source of design requirements.

The current edition of the Aircraft Crash Survival Design Guide is published in five volumes. Volume titles and general subjects included in each volume are as follows:

Volume I - Design Criteria and Checklists

Pertinent criteria extracted from Volumes II through V, presented in the same order in which they appear in those volumes.

Volume II - Aircraft Design Crash Impact Conditions and Human Tolerances

Crash impact conditions, human tolerance to impact, military anthropometric data, occupant environment, test dummies, accident information retrieval.

Volume III - Aircraft Structural Crash Resistance

Crash load estimation, structural response, fuselage and landing gear requirements, rotor requirements, ancillary equipment, cargo restraints, structural modeling.

Volume IV - Aircraft Seats, Restraints, Litters and Cockpit/Cabin Delethalization

Operational and crash impact conditions, energy attenuation, seat design, litter requirements, restraint system design, occupant/restraint system/seat modeling, delethalization of cockpit and cabin interiors.

Volume V - Aircraft Postcrash Survival

Postcrash fire, ditching, emergency escape, crash locator beacons.

This volume (Volume V) contains information on aircraft postcrash conditions and design techniques that can be used to reduce postcrash hazards. It contains a great deal of background information, including data from such sources as full-scale aircraft burn tests, laboratory materials testing, and research and development programs in aircraft fuel systems.

Chapter 1 presents a general discussion of designing for crash resistance. Chapter 2 contains definitions of terms pertinent to the volume. Chapter 3 describes postcrash fire conditions and relates those conditions to human tolerance data in the areas of heat, smoke, and toxic gases. Chapter 4 discusses methods of preventing postcrash fires by containing flammable fluids

in crash-resistant fuel, oil, and hydraulic systems, modifying fuel properties to reduce crash-induced fuel misting, and controlling potential ignition sources. Chapter 5 discusses the fire behavior of interior materials and presents data on material flammability tests and selected material properties. Chapter 6 describes ditching conditions and provisions that can be incorporated into the aircraft design to increase ditching survival. Chapter 7 presents design requirements for emergency escape exits and emergency lighting, and Chapter 8 discusses crash locator beacons.

The units of measurement shown in the Design Guide vary depending upon the units used in the referenced sources of information, but are mostly USA units. In some cases the corresponding metric units are shown in parentheses following the USA units. For the convenience of the reader a conversion table of some commonly used units follows.

<u>USA Unit</u>	<u>Abbr. or Symbol</u>	<u>Metric Equivalent</u>	<u>Abbr. or Symbol</u>
<u>Weight</u>			
Ounce	oz.	28.35 grams	g
Pound	lb or #	0.454 kilogram	kg
<u>Capacity (U.S. liquid)</u>			
Fluidounce	fl oz	29.57 milliliters	ml
Pint	pt	0.473 liter	l
Quart	qt	0.946 liter	l
Gallon	gal	3.785 liters	l
<u>Length</u>			
Inch	in.	2.54 centimeters	cm
Foot	ft	30.48 centimeters	cm
Yard	yd	0.9144 meter	m
Mile	mi	1.609 kilometers	km
<u>Area</u>			
Square Inch	sq in. or in. ²	6.452 square centimeters	sq cm or cm ²
Square Foot	sq ft or ft ²	0.093 square meter	sq m or m ²
<u>Volume</u>			
Cubic Inch	cu in. or in. ³	16.39 cubic centimeters	cu cm or cm ³
Cubic Foot	cu ft or ft ³	0.028 cubic meter	cu m or m ³
<u>Force</u>			
Pound	lb	4.448 newtons 4.448 x 10 ⁵ dynes	N

1. BACKGROUND DISCUSSION

This volume specifically addresses the hazards that exist in the postcrash phase of U.S. Army aircraft accidents and presents aircraft design criteria that will, if followed, eliminate or reduce the serious consequences of these hazards. Designing for postcrash safety is only a part of the larger effort of designing the entire aircraft for crash resistance.

The overall objective of designing for crash resistance is to eliminate unnecessary injuries and fatalities in survivable impacts. Results from analyses and research during the past several years have shown that the relatively small cost in dollars and weight of including crash-resistant features is an extremely wise investment. The outstanding success of the crash-resistant fuel systems in almost entirely eliminating thermal fatalities and injuries in U.S. Army helicopter accidents provides a concrete example of the benefits that can be obtained through crash-resistant design. Consequently, new generation aircraft are being procured to rather stringent crash-resistant requirements.

The original edition of this design guide dealt primarily with modifications that could be made to existing aircraft to increase their crash resistance. Now, two approaches to improving aircraft crash resistance are open. The first approach is to influence the design of new aircraft, and the second is to improve the crash resistance of existing aircraft. Obviously, much higher levels of crash resistance can be achieved in the design and development of new aircraft if crash resistance is considered from the beginning. This is being accomplished at the present time through the use of procurement packages that include pertinent specifications that require certain levels of crash resistance for various subsystems as well as for the entire aircraft. However, some of the available potential is still being lost due to the historical approach used in designing aircraft. That is, the basic aircraft is designed leaving space and providing attachment provisions for subsystems. Later, when the subsystems are designed, their designs are limited by the previously established, somewhat arbitrary, boundary conditions. The boundary conditions may unnecessarily limit the performance of the subsystems. The better approach is to design all systems and subsystems at the same time, at least preliminarily. This enables subsystem considerations to affect the larger systems. This systems approach will produce a more nearly optimum vehicle.

The same principles for improving crash resistance can be applied to the retrofit of existing aircraft; however, the "cast-in-concrete" status of existing production structure is a more costly and difficult obstacle to overcome. When crash-resistant features must be included through retrofit, the level that can be achieved is usually reduced. Even in retrofit situations, however, the overall objective can be met; i.e., occupant protection can be maximized to eliminate unnecessary injuries.

In earlier editions of the Design Guide, the requirements to provide occupant protection in crashes up to and including the severity of the 95th-percentile survivable crash pulse were expressed. With the deployment of aircraft designed for crash safety, the link to the 95th-percentile survivable crash

pulse has been dropped, and the recommended design conditions are simply presented as the design pulse. Obviously, the severity of a 95th-percentile survivable crash pulse will be much greater for the new aircraft than for aircraft having no crash-resistant requirements placed upon them during their development. The extent of the crash protection provided to the occupant cannot indefinitely continue to be linked to the survivability of the crash as improved crash resistance increases the severity of the survivable crash, producing a never-ending increase in the level of crash resistance at the expense of aircraft performance. The crash resistance levels recommended herein are felt to be a near optimum mix of requirements, including considerations of cost, weight, and performance. The crash impact conditions selected for design purposes in this volume are identical to the historical 95th-percentile survivable crash pulses, which were based primarily on single engine, skid gear, relatively low gross weight helicopters having both high and low inertia rotor systems.

2. DEFINITIONS

2.1 GENERAL TERMS

- The Term "G"

The ratio of a particular acceleration (a), a negative acceleration may be referred to as a deceleration, to the acceleration (g) due to gravitational attraction at sea level (32.2 ft/sec); $G = a/g$. With respect to the crash impact conditions, unless otherwise specified, all acceleration values (G) are those at a point approximately at the center of the floor of the fuselage. In accordance with common practice, this report will refer to accelerations measured in "G." To illustrate, it is customarily understood that 5 G represents an acceleration of 5×32.2 , or 161 ft/sec². As a result, crash forces can be thought of in terms of multiples of the weight of objects being accelerated. Therefore, in keeping with common practice, the term G is used in this document to define accelerations or forces.

- Static Strength

The maximum static load that can be sustained by a structure, often expressed in terms of acceleration (G) of a given mass or, in other words, a load factor.

- Load Factor

A factor that when multiplied by a weight produces a force used to establish static strength. Load factor is expressed in units of G.

- Forward Load

Loading in a direction toward the nose of the aircraft parallel to the aircraft longitudinal (roll) axis.

- Aftward Load

Loading in a direction toward the tail of the aircraft parallel to the aircraft longitudinal (roll) axis.

- Lateral Load

Loading in a direction parallel to the lateral (pitch) axis of the aircraft.

- Downward Load

Loading in a downward direction parallel to the vertical (yaw) axis of the aircraft.

- Upward Load

Loading in an upward direction parallel to the vertical (yaw) axis of the aircraft.

- Velocity Change (ΔV)

The decrease in velocity of the airframe during the major impact, expressed in feet per second. The major impact is the one in which the highest forces are incurred, not necessarily the initial impact.

2.2 FUEL, OIL, AND HYDRAULIC SYSTEM TERMS

- Crash-Resistant Fuel Tank

A tank which conforms to MIL-T-27422.

- Crash-Resistant Fuel System

A fuel system designed to conform to MIL-T-27422, MIL-STD-1290, ADSIIB, and other related specifications and standards.

- Frangible Attachment

An attachment possessing a part that is designed to fail at a predetermined location and/or load.

- Bladder Tank

A flexible fuel tank, usually contained or supported by other more rigid structures.

- Fuel Pump

A pump installed in the fuel system to move fuel. Usually located at one or more of the following places: the tank, the engine, or the interconnecting plumbing.

- Fuel Valve

Any valve, other than a self-sealing breakaway valve, contained in the fuel supply system, such as fuel shutoff valves, check valves, etc.

- Self-Sealing Breakaway Valve

A valve, for installation in fluid-carrying lines or hoses, that will separate at a predetermined load and seal at one or both halves to prevent dangerous flammable fluid spillage.

2.3 IGNITION SOURCE CONTROL TERMS

- Fire Curtain

A baffle made of fire-resistant material that is used to prevent spilled flammable fluids and/or flames from reaching ignition sources or occupiable areas.

- Fire-Resistant Material

Material able to resist flame penetration for 5 min when subjected to a 2,000 °F flame and still be able to meet its intended function.

- Firewall

A partition capable of withstanding a 2,000 °F flame over an area of 5 sq in. for a period of 15 min without flame penetration.

- Flammable Fluid

Any fluid that ignites readily in air, such as hydrocarbon fuels and lubricants.

- Flow Diverter

A physical barrier that interrupts or diverts the flow of a liquid.

- Ignition Temperature

The lowest temperature at which a flammable mixture will ignite when introduced into a specific set of circumstances.

- Inerting

The rendering of an aircraft system or the atmosphere surrounding the system incapable of supporting combustion.

2.4 INTERIOR MATERIALS SELECTION TERMS

- Autoignition Temperature

The lowest temperature at which a flammable substance will ignite without the application of an outside ignition source, such as flames or sparks.

- Flame-Resistant Material

Material that is self-extinguishing after removal of a flame.

- Flashover

The sudden spread of flame throughout an area due to ignition of combustible vapors that are heated to their flash point.

- Flash Point

The lowest temperature at which vapors above a combustible substance ignite in air when exposed to flame.

- Intumescent Paint

A paint that swells and chars when exposed to flames.

- Optical Density (D_s)

The optical density is defined by the relationship

$$D_s = \log \frac{100}{T}$$

where T is the percent of light transmission through a medium (e.g., air, smoke, etc.).

2.5 DITCHING AND EMERGENCY ESCAPE TERMS

- Brightness

The luminous flux emitted per unit of emissive area as projected on a plane normal to the line of sight. Measured in foot-lamberts.

- Candela (cd)

A unit of luminous intensity equal to 1/60 of the luminous intensity of one square centimeter of a blackbody surface at the solidification temperature of platinum. Also called candle or new candle.

- Class A Exit

A door, hatch, canopy, or other exit closure intended primarily for normal entry and exit.

- Class B Exit

A door, hatch, or other exit closure intended primarily for service or logistic purposes (e.g., cargo hatches and rear loading ramps or clamshell doors).

- Class C Exit

A window, door, hatch, or other exit closure intended primarily for emergency evacuation.

- Cockpit Enclosure

That portion of the airframe that encloses the pilot, copilot, or other flight crew members. An aircraft may have multiple cockpits, or the cockpit may be physically integrated with the troop/passenger section.

- Ditching

The landing of an aircraft on water with the intention of abandoning it.

- Emergency Lighting

Illumination required for emergency evacuation and rescue when normal illumination is not available.

- Exit Closure

A window, door, hatch, canopy, or other device used to close, fill, or occupy an exit opening.

- Exit Opening

An opening provided in aircraft structure to facilitate either normal or emergency exit and entry.

- Exit Release Handle

The primary handle, lever, or latch used to open or jettison the exit closure from the fuselage to permit emergency evacuation.

- Foot-candle (fc)

A unit of illuminance on a surface that is everywhere one foot from a uniform point source of light of one candela.

- Foot-lambert (fL)

A unit of photometric brightness or luminous intensity per unit emissive area of a surface in a given direction. One foot-lambert is equal to $1/\pi$ candela per square foot.

- Illumination

The luminous flux per unit area on an intercepting surface at any given point. Measured in foot-candles.

3. POSTCRASH FIRE

3.1 INTRODUCTION

Historically, studies of accident records have indicated that a high percentage of fatalities occur in accidents involving postcrash fire. During the past 15 years, however, the pattern has changed dramatically. The accident records now indicate two distinct patterns. For aircraft not equipped with crash-resistant fuel systems, the statistical records remain essentially unchanged. For aircraft containing crash-resistant fuel systems, the fire death and injury rates have been reduced to nearly zero (Reference 2).

The postcrash fire conditions associated with aircraft not containing a crash-resistant fuel system consist of a combination of many interacting hazards. The total fire threat to the occupant depends upon the magnitude of these hazards combined with the human tolerance limits to each hazard. This chapter describes postcrash fire conditions and discusses human tolerance to heat, toxic gases, and other hazards that greatly affect human survival in a postcrash fire.

3.2 POSTCRASH FIRE CONDITIONS

Postcrash fire conditions have been extensively studied in test programs as well as in actual crashes by various research organizations including NACA (prior to becoming NASA), NASA, FAA, AvSER, the Department of Transportation, and the various military services. During some of the test programs, aircraft were crashed and allowed to burn, with data being accumulated during the entire sequence. In other test programs, previously crashed aircraft were instrumented and burned. In addition to full-scale tests, many studies have been performed with various components and mock-ups, computer simulations, and mathematical models. Researchers also have studied actual aircraft crashes in which occupants were exposed to postcrash fire conditions. From these overall studies, the most significant factors influencing survivability in postcrash fires have emerged.

Briefly, it has been observed that many variables can influence the magnitude and threat of a postcrash fire. Some of the more pertinent ones include the relative wind, the type of terrain onto which the flammable fluid has drained, the fuel distribution, the location of the fluid spillage within the aircraft, the number of structural openings (designed or crash produced) that meter the inflowing air available for an internal fire, and the amount of fuel available to spill (Reference 3).

It was noted that using fuels of lower volatility (i.e., Jet A rather than Jet B) makes little difference in the overall fire threat once a postcrash fire has started (Reference 4). However, if the fuel is spilled in liquid form and kept in that state, rather than being formed into a mist, the likelihood of the less volatile fuel catching on fire is measurably reduced. In other words, if the aircraft crashes and comes to a stop with no fire, the chances of a fire then starting are generally less with fuels of lower volatility.

However, the factors that best describe the postcrash fire situation in terms of human survival are the heat, toxic gases, and smoke existing in or near the occupiable area.

3.2.1 Heat

A typical ambient and radiant temperature curve for large cargo/passenger-carrying aircraft tested by NACA is presented in Figure 1. As can be seen on the chart, little temperature increase occurred until 80 sec after impact. One of the main reasons for the delay in temperature rise was the protective shield afforded by the fuselage. Skin burn-through averaged about 80 sec, although some burn-through times occurred before 40 sec and some occurred later. Calculated escape time based on human tolerance to heat varied from 53 to 220 sec, with the average escape time equal to 135 sec (see Section 3.3.1 for a discussion of the effect of heat on escape time.)

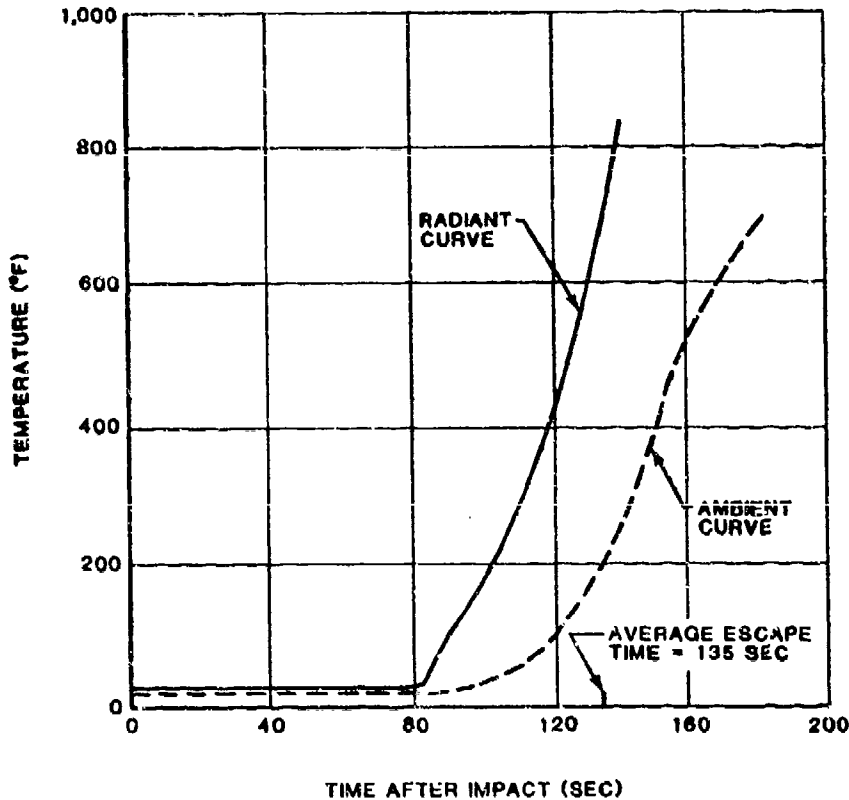


FIGURE 1. AVERAGE RECORDED AMBIENT AND RADIANT TEMPERATURES IN LARGE, CRASHED, BURNING, PASSENGER/CARGO-CARRYING, FIXED-WING AIRCRAFT.

An ambient temperature range typical for the burning, passenger/cargo-carrying helicopters tested by AvSER and the U.S. Army Aeromedical Research Laboratory is presented in Figure 2. This chart shows that the temperature started to increase almost immediately after the crash. The early temperature rise was due mainly to two factors. One was that extensive structural breakup occurred upon impact, causing openings that allowed air to be drawn in, providing oxygen for internal fires. The second factor was that, in the normal configuration, the fuselage and the fuel were located in close proximity to one another. As a result, the fire and the occupiable area were nearly superimposed from the start. Reference to Figure 2 shows that the average escape time for these helicopters was in the range of 7 to 16 sec.

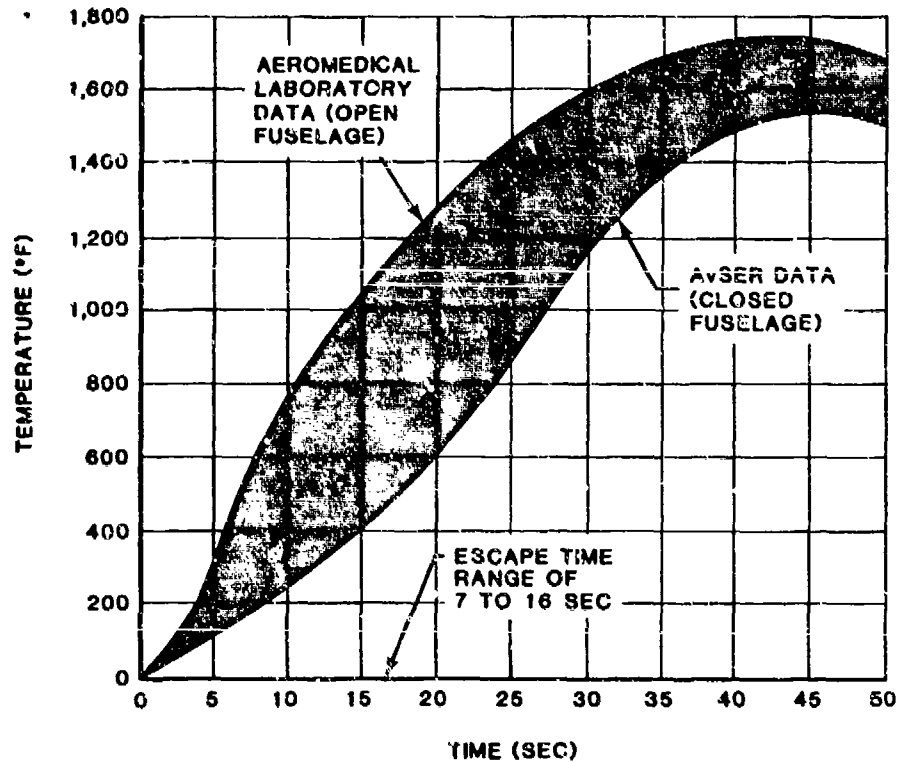


FIGURE 2. RECORDED AMBIENT TEMPERATURE RANGE IN THE CABIN AREAS OF LARGE, BURNING, PASSENGER/CARGO-CARRYING HELICOPTERS.

Full-scale fire tests on standard aluminum aircraft skin panels show that, for a fuel fire of maximum severity and minimum skin thickness, burn-through may occur in as little as 10 sec. Larger aircraft, which possess thicker skin panels, have burned through in 30 to 40 sec. Figure 3 shows minimum skin melting times based on aircraft gross weight. Escape time is obviously shorter for faster burn-through time. Thus, the very short escape time in

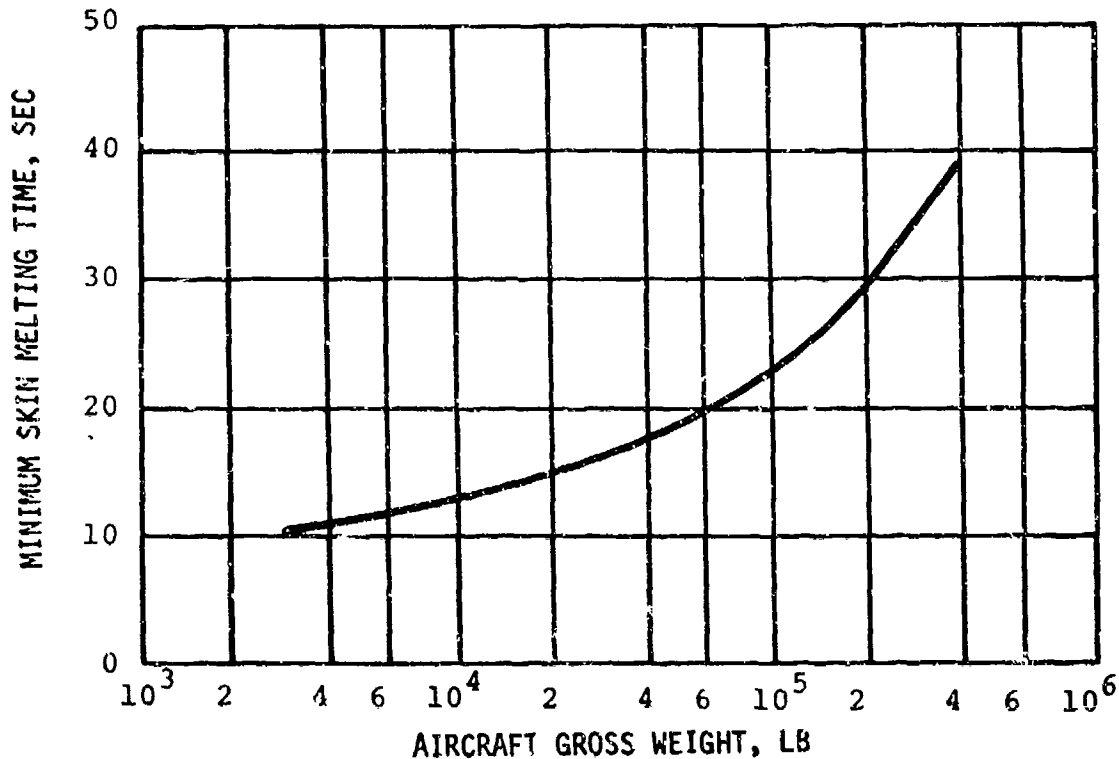


FIGURE 3. AIRCRAFT SKIN MELTING TIME BASED ON GROSS WEIGHT.

light aircraft is due not only to the proximity of the fuel to the occupant but also to the faster burn-through time of the thinner fuselage skins.

More recent full-scale fire tests using segments from a DC-10 aircraft and an exterior pooled fuel fire also illustrated the dependence of burn-through time on skin thickness. In these tests, the aluminum skin above the windows, which was 0.090 in. thick, reached the melting temperature within 64 to 82 sec, while the belt area around the window, which incorporated a doubler and was a total of 0.350 in. thick, did not reach melting temperatures until 150 to 198 sec. after the initiation of the fire (Reference 5). These tests also showed that the aluminum skin below the windows, which was the same thickness as that above the windows, did not reach the melting temperature until some 30 to 60 sec after the skin above the windows. This was attributed to the difference in temperatures in the flame plume at various levels above the fuel's surface.

This series of tests was done to evaluate improved flame-resistant aircraft window systems. During these tests it was found that the standard acrylic windows, in general, would burn through before the belt system did and sometimes before the skin below the windows burned through. The data also indicated that an improvement of fire resistivity was obtained by the improved window system (see Section 5.4.6 for details on the improved windows).

Another factor that can influence burn-through time is insulation. When an aircraft skin is heated externally by a fire, the metal skin attempts to radiate heat internally. When this radiation is prevented or retarded by insulation, skin burn-through occurs more rapidly. One study, Reference 6, supported in part by References 7, 8, and 9, documents various skin burn-through times as a function of skin thickness, insulation characteristics, and temperature of the heat source. It was reported that in the case of the aluminum fuselage, the removal of skin due to melting exposes the insulation to additional distorting effects produced by the high turbulence within the liquid fuel fire. The turbulence hastens the destruction of the insulative barrier, thereby further reducing the survival time.

In a postcrash fire, if the fuselage stays intact and the fire enters the fuselage through a rupture or burn-through of the aircraft skin, it can ignite any combustibles, such as aircraft seat cushions, which are near the opening. The burning of interior materials in a situation such as this can lead to the phenomenon of a flashover. Flashover is the transition from a localized fire to a general conflagration within the compartment when all combustible surfaces become involved in flames. This can also be accompanied by the sudden propagation of flames through unburned gases and vapor collected under the ceiling.

During a compartment fire, heat builds up in the upper level of the compartment because of the vertical flames above the fire, the hot surfaces in the upper part of the enclosure, and hot combustion products trapped under the ceiling. As the fire progresses, the heat layer descends from the ceiling and becomes lower. When enough heat is radiated to lower levels to ignite materials at the lower level, the phenomenon of a flashover occurs.

The occurrence of flashover indicates that conditions throughout the cabin become nonsurvivable within a matter of seconds. The temperature and smoke levels increase dramatically at flashover, and the oxygen level decreases. Figure 4 shows data obtained during a full-scale fuel fire test conducted with a C-133 test article and employing commonly used interior aircraft materials (Reference 10). Movie film taken of the test demonstrated that for approximately 2 min. the cabin fire was limited to the area in the immediate vicinity of the fuselage opening adjacent to the fuel fire. Figure 4 documents the rapid increase in temperature and smoke and the decrease in oxygen at and beyond flashover.

3.2.2 Smoke and Toxic Gases

Aircraft crash fires generate large quantities of dense smoke consisting of unburned carbon particles, ashes, and gaseous combustion products. The hazards of smoke may be both physical (blocking vision) and physiological (irritation of eyes and respiratory tract, toxicity).

Recent studies address the problem of smoke generation and dispersion inside a fuselage during a postcrash fire (References 6, 7, 8, 11, and 12). If there is only one opening in the fuselage and it happens to be near a fire, smoke can enter into the fuselage. The amount allowed to enter is directly related to the location and orientation of the opening and the relative wind. If there is a second fuselage opening and it is in an area where there

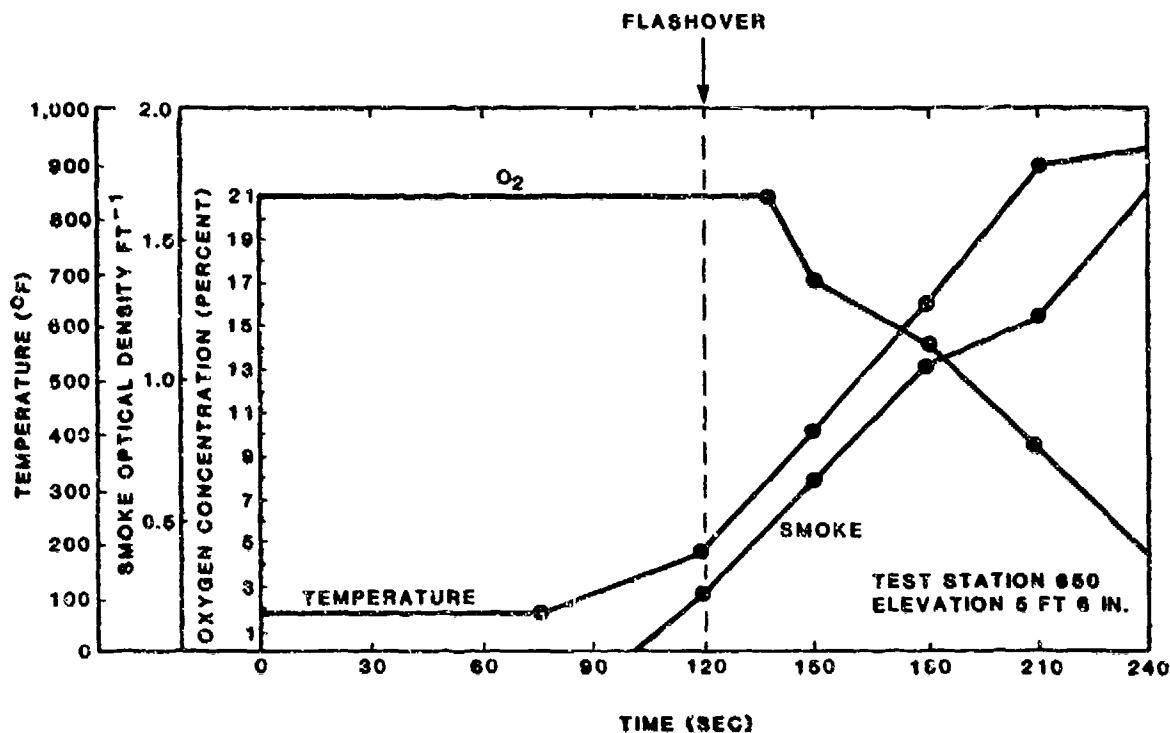


FIGURE 4. CHANGES IN TEMPERATURE, OXYGEN, AND SMOKE LEVELS AT FLASHOVER.

is no fire, the airflow inside the fuselage can be from the fire area to the smoke-free opening, filling the fuselage with smoke. If the airflow inside the fuselage is from the smoke-free opening to the opening near the fire, it could provide "clean" air for the occupants. If there is fire at each opening, and a chimney effect is created, smoke-filled air from one of the fires will flow toward the opening which is in the area of the lower relative air pressure.

Airflow through a large airliner fuselage with openings at each end, being subjected to a crash fire, has been measured in excess of 35 mph. The flow was turbulent in nature due to the vortex-generating effects of the seats and occupants. This high-speed airflow through the fuselage is not present in inflight fires or accidents where there is only one opening present. It takes multiple openings, separated by considerable distance, to allow the chimney effect to occur, and it takes vortex generators, such as seats, to generate turbulence and mix the smoke and air.

The rapid obscuration of vision by smoke has been reported by many survivors of aircraft postcrash fires. In addition, many test programs have documented the generation of large quantities of smoke during burn tests of transport fuselages and cabin mock-ups used to evaluate aircraft interior materials.

During a program to examine interior emergency lighting in a postcrash fire environment, several tests conducted in a wide body aircraft test fuselage (a converted C-133 fuselage) furnished quantitative information on smoke levels during aircraft fires (Reference 13). A series of tests were conducted with the interior devoid of combustible materials and an external fuel spill fire adjacent to an opening in an otherwise intact fuselage. A second series of tests were conducted to compare results of the fuel fire smoke to the smoke environment created by interior materials ignited from an outside postcrash fire. Data from the tests indicated that the relationship between cabin smoke and heat appeared to be comparable for exterior fuel fires and interior materials fires. Increasing cabin smoke density was accompanied by a corresponding increase in temperature. Figure 5 illustrates the relationship between the smoke density and temperature increase.

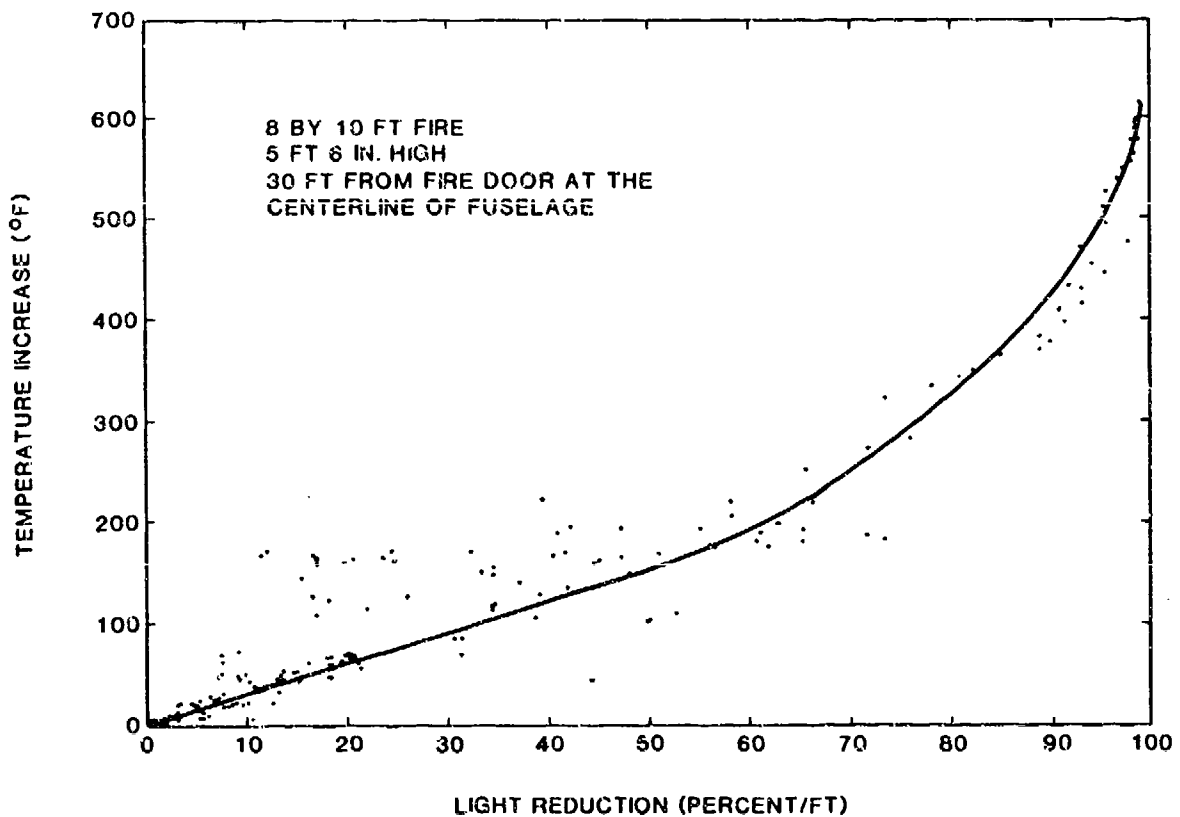


FIGURE 5. RELATION OF SMOKE TO TEMPERATURE INCREASE.

Quantitative crash test data are also available for carbon monoxide (CO), the predominant toxic gas generated during crash fires. The history of carbon monoxide levels typical of NACA's passenger-carrying aircraft experiments is

presented in Figure 6. It can be observed that the CO concentrations remained below the 0.8 percent level for about 250 sec, at which time they rapidly increased to 4 percent. This slow-to-develop situation was due to the distribution of the fuel spillage and the protective shield afforded the occupants by the fuselage. Also plotted in Figure 6 is the cumulative carboxyhemoglobin (COHb) level that would be present in an individual exposed to this atmosphere. The escape-limiting 35 percent COHb would be reached in approximately 6 min. (See Section 3.3.2 for a discussion of the effect of carbon monoxide on escape time.)

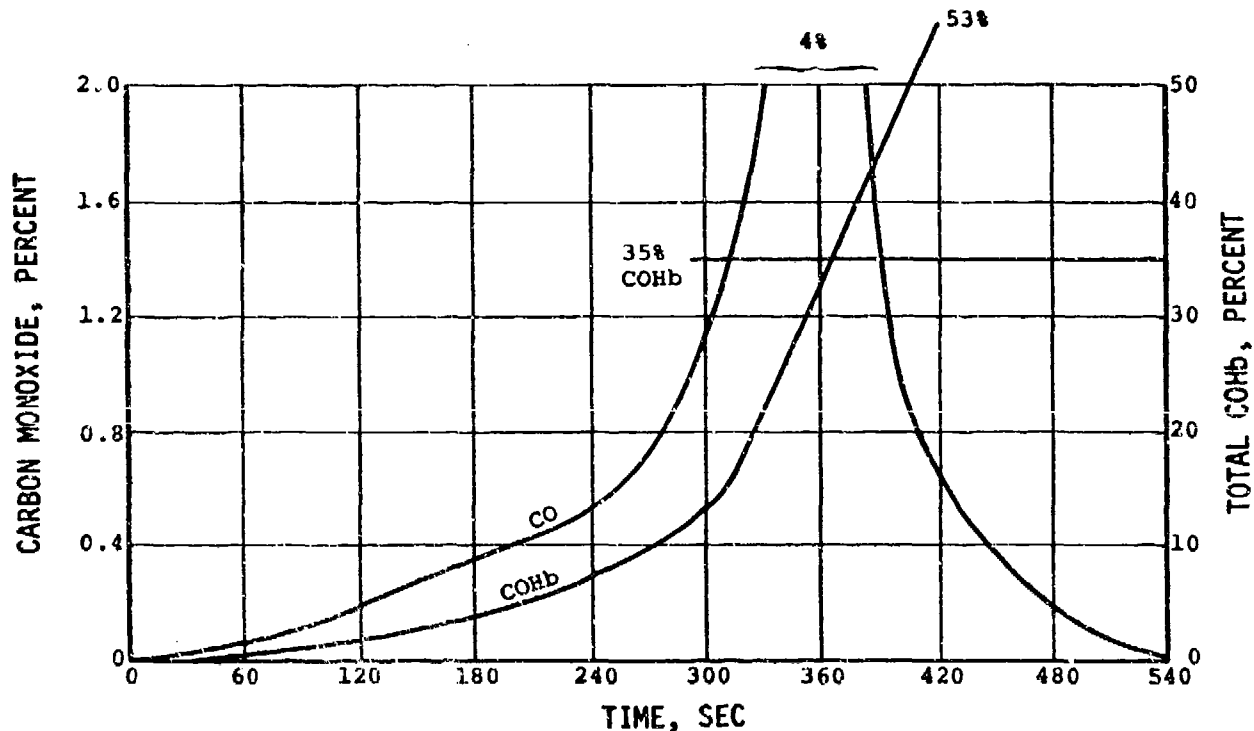


FIGURE 5. AVERAGE RECORDED CO CONCENTRATIONS AND CALCULATED COHb LEVELS IN LARGE, CRASHED, BURNING, PASSENGER/CARGO-CARRYING FIXED-WING AIRCRAFT.

The CO levels typical of burning, large, passenger/cargo-carrying helicopters are presented in Figure 7. It can be seen that measurable CO levels started at about 20 sec and within 45 sec the levels had increased to 3 percent. As with the temperatures, the rapid increase of CO was due to the fuel distribution and the structural breakup. The CO concentration dissipated after 45 sec due to two factors. First, the helicopter fuselages were nearly consumed by fire in 45 sec; thus, they could no longer act as shells to hold the gases in the area. Second, only small quantities (28 gal. and 56 gal.) of fuel were used during the tests. The rapid dissipation of the CO would preclude the buildup of dangerous COHb levels in an individual exposed to these conditions.

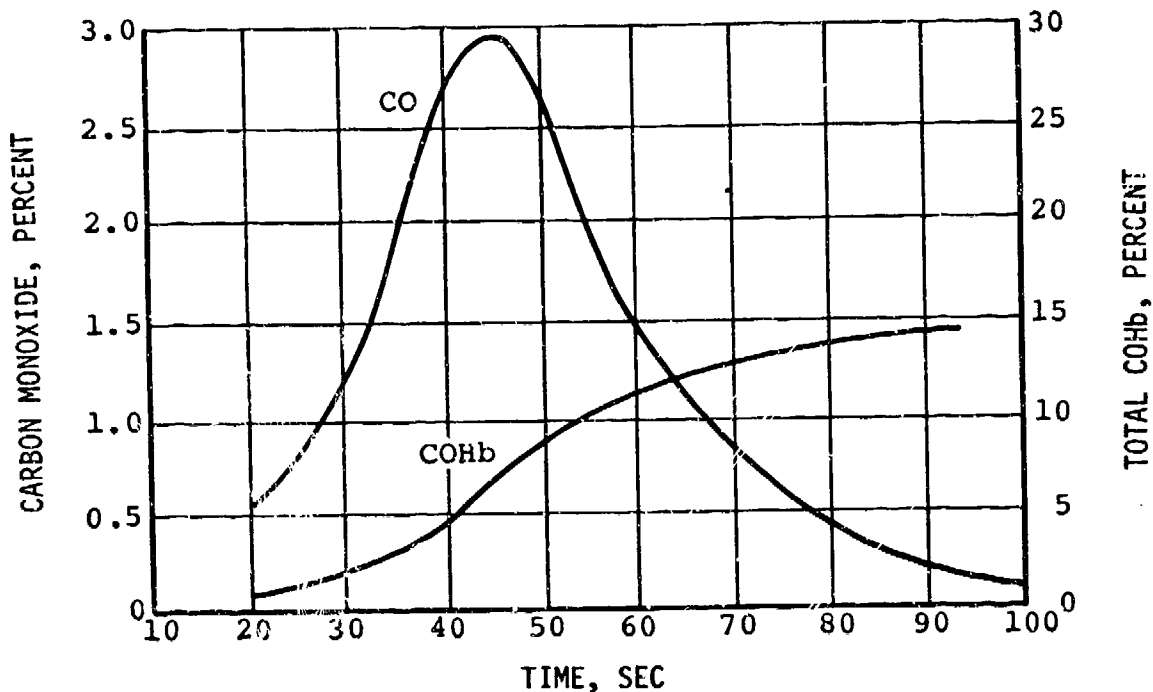


FIGURE 7. AVERAGE RECORDED CO CONCENTRATIONS AND CALCULATED COHb LEVELS IN LARGE, CRASHED, BURNING, PASSENGER/CARGO-CARRYING HELICOPTERS.

Although carbon monoxide is produced in larger amounts than any other toxic gas, large-scale burn tests show that many other gases also are generated, including significant amounts of hydrogen chloride (HCl) and hydrogen cyanide (HCN) (References 14 and 15). In fact, the recognition that HCN was a combustion product of many aircraft materials prompted Civil Aeromedical Institute (CAMI) scientists to determine the HCN levels in blood specimens from victims of aircraft accidents involving postcrash fire (Reference 16). It was determined that HCN was present at levels greater than normal in the blood of several victims.

There is a rapid rise in toxic gases at flashover, as shown in Figure 8 (from Reference 10). Comparing Figures 8 and 4 shows that the acid gases, HF and HCl, accumulated in the cabin at least 1 min. before any of the remaining hazards, including the increase in temperature. Elevated temperature, smoke, and HCN were the remaining hazards detected before the onset of flashover.

Early concentrations of the acid gases are considered to be significant and might contribute to some level of impairment. These acid gases were generated by the burning of honeycomb composite panels comprising the ceiling, storage bins, and hat rack.

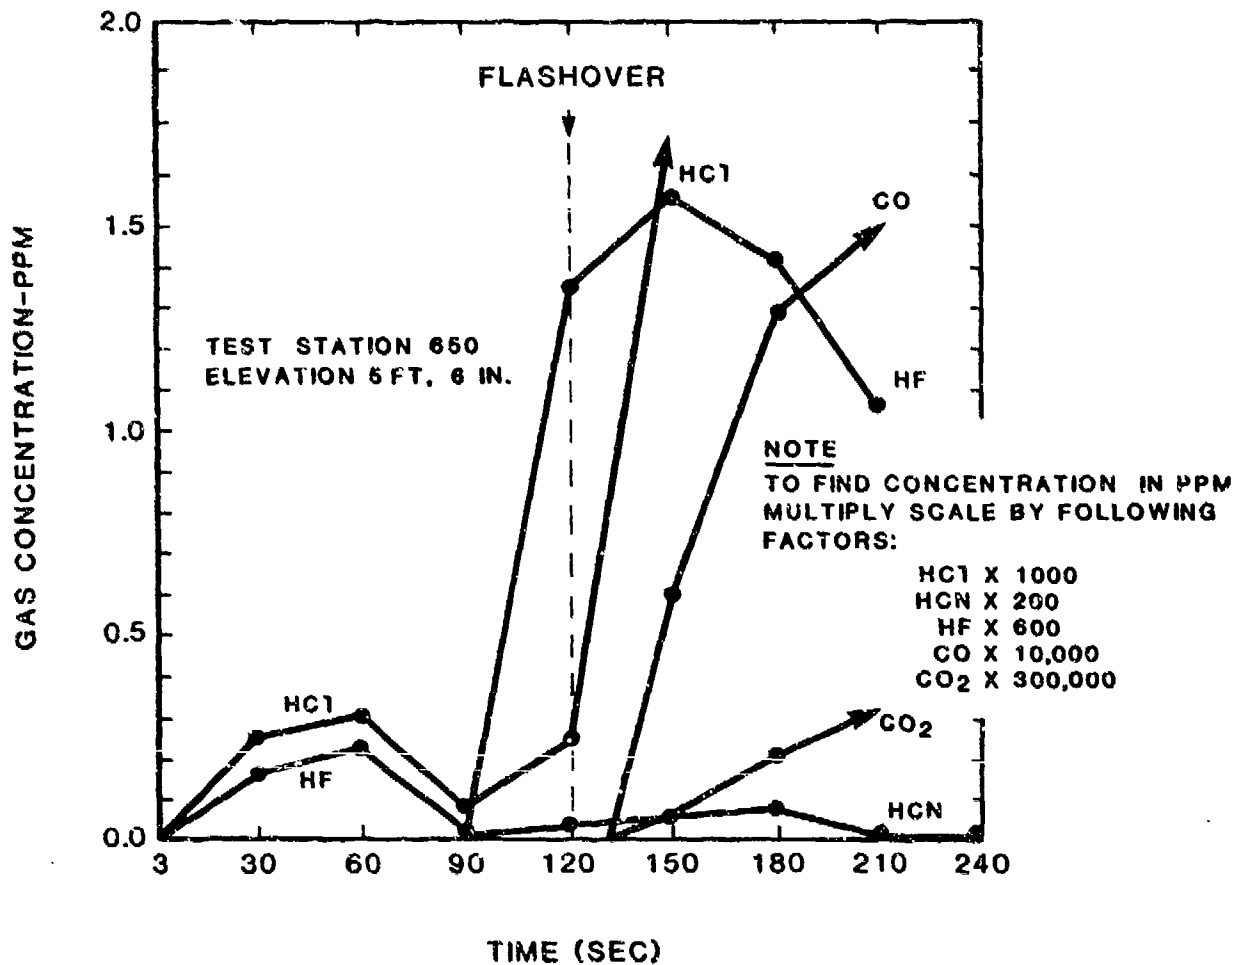


FIGURE 8. CONCENTRATIONS OF TOXIC GASES DURING A FULL-SCALE FUEL FIRE TEST.

3.2.3 Graphite Fiber Hazards

3.2.3.1 Materials. The use of composite materials in aircraft structures is increasing. Some of these composites are made with fibers of electrically conductive materials such as graphite (carbon). In most cases, these fibers are held in a matrix of epoxy materials and are capable of being formed into high-strength and low-weight aircraft components. The percentage of composite components is increasing rapidly in new helicopter designs, and "all-composite" aircraft are projected for the future. Reference 17 concludes that no special criteria are necessary when composites are substituted for metal in aircraft structures.

3.2.3.2 Postcrash Fire Release. If these materials are involved in a fire, the epoxy matrix is pyrolyzed, and the fiber can be released into the atmosphere as part of the smoke plume. These free fibers of electrically conductive materials create the risk of electrical short circuits across a variety of electrical and electronic equipment. Testing has shown that the percentage of fiber released is very low in a relatively static fire but, if combined with impact or explosions, large quantities can be released. In addition, postcrash cleanup can disturb loose fibers and disperse them into the atmosphere. Risk analysis studies have shown that the average expected risks of these events is low (Reference 18).

3.2.3.3 Methods of Control. Clearly the ideal control is in reducing the incidence of postcrash fire as discussed in this volume. Once a carbon-composite material is burned, minimizing the probability of explosive disbursement of fibers is desirable. Reducing the probability of inflight fires releasing fibers while airborne is also desirable. However, since other valid reasons exist for reducing inflight fire and postcrash explosions, carbon composites do not constitute a significant increase in the problem.

Postcrash cleanup procedures of carbon-composite debris should include the use of sprayed-on binders prior to moving the residue. Information on the use of composite materials and recommended postcrash fire precautions should be included in the appropriate aircraft service publication. Some studies have been conducted to evaluate the personnel hazards resulting from helicopter composite structures exposed to fires and/or explosions (Reference 17).

3.3 HUMAN SURVIVAL AND ESCAPE

One's ability to perform a self-initiated escape from a burning aircraft becomes hampered when one is unable to think and act as a normal human being. The point at which the incapacitating effect occurs is called the escape limit. An occupant's escape limit is governed by what the person feels (temperature), breathes (toxic gases), and sees, or in case of smoke, does not see (escape routes, blocked exits, etc.). Human tolerance limits define human body reaction to these factors.

3.3.1 Human Tolerance to Heat

The literature dealing with the subject of human tolerance to heat exposure is rather extensive, but somewhat confusing and misleading. (For the purpose of this discussion, human tolerance to heat is considered for short-term exposures, up to 15 min, rather than heat prostration-type injuries that require a considerably longer exposure time.) Although heat tolerance has been reliably investigated by many researchers, their reports are not always clear, especially in regard to protective measures taken during exposures to extreme heat. The reports by Johnson and Pesman are considered to be the best application of scientific knowledge to the subject of human thermal tolerance during the aircraft crash-fire environment (References 3 and 19). Therefore, most of the material in this section has been based upon those reports.

Thermal injuries occurring in aircraft crash fires can be divided into two general types: skin injury and respiratory injury.

3.3.1.1 Skin Injury. When exposed to heat, two main factors govern a person's survivability. They are tolerance to pain and the thermal level at which the exposed skin will experience second-degree burning. References 20 and 21 state that the pain threshold is exceeded when the human skin is heated to a temperature between 108 °F and 113 °F, with normal human beings experiencing unbearable pain at skin temperatures of 124 °F. Moreover, when the skin surface temperature is raised above 111 °F, the rate of cellular destruction is more rapid than cellular repair; consequently, an accumulative injury occurs. Obviously, the extent of the injury is dependent on the heat transferred during the exposure time.

Since the temperature values required to produce pain and skin injury are similar, pain is a good indication that injury will occur if the application of heat continues. Therefore, approximate escape limits can be based on extreme pain and, thus, the occurrence of radiative second-degree burns.

To approximate the occupant escape limit as fixed by radiant temperature, one additional factor must be considered; i.e., the radiating surface visible to the exposed area. A hemisphere is considered to be the maximum possible radiating space angle (Figure 9). Figure 10 shows pain threshold time as determined by temperature of the radiative source for several angles of radiation. If, for example, the entire hemispheric surface were at an elevated temperature, Curve A ($F = 1.00$) would apply. If only 50 percent of the hemispheric surface were at such temperature, Curve B ($F = 0.50$) would apply. The escape limit is independent of the distance between the individual and the radiant heat source. As an example of radiant curve usage, assume that an individual is sitting in a crashed aircraft that is engulfed in a fireball. For all practical purposes, the imaginary hemisphere would be 100 percent heated; thus, Curve A would apply. Figure 10 shows that a 20-sec escape time will be reached when the interior aircraft walls reach radiant temperature of only 550 °F.

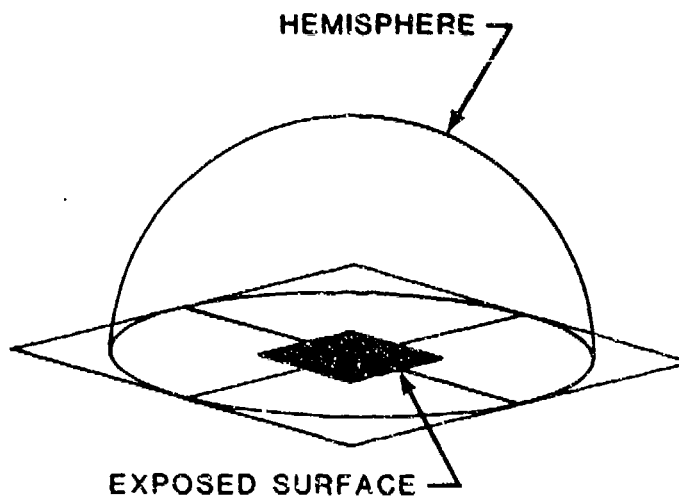


FIGURE 9. THE HEMISPHERE OF RADIANT HEAT CONCEPT.

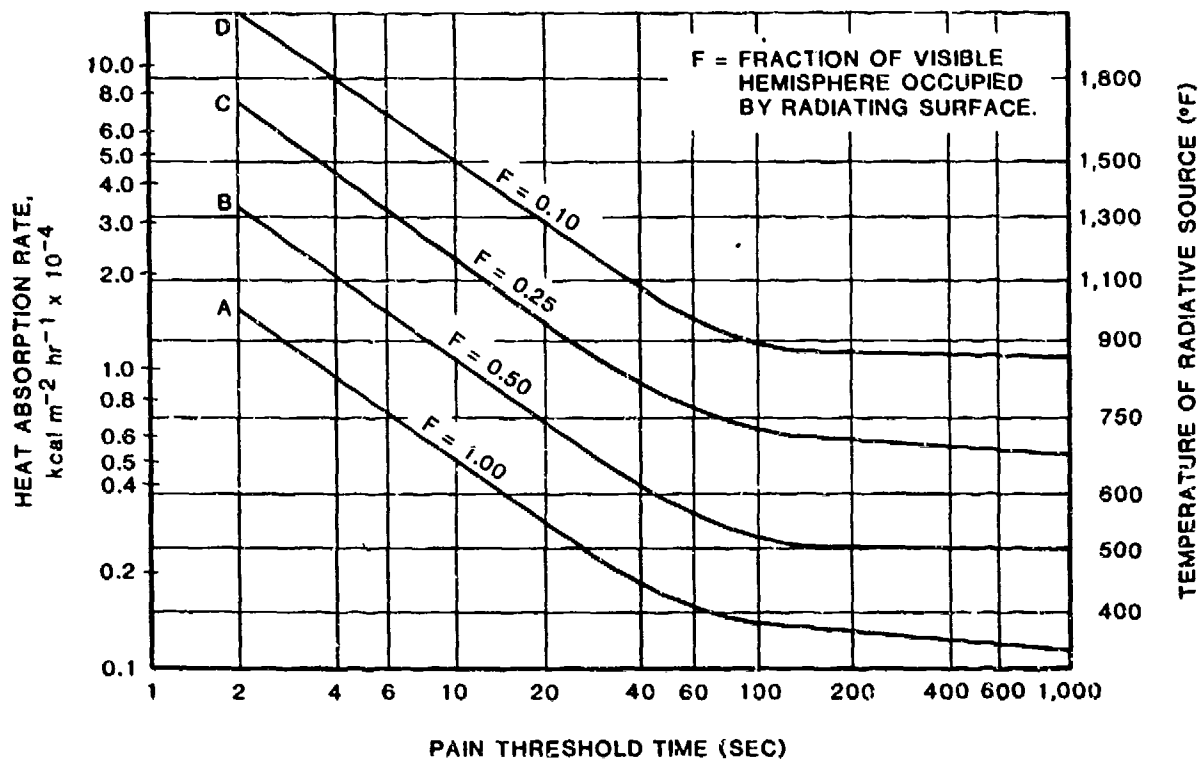


FIGURE 10. PAIN THRESHOLD TIME AS A FUNCTION OF TEMPERATURE OF RADIANT HEAT SOURCE. (METHOD OF DERIVING CURVES IS CONTAINED IN THE APPENDIX.)

Experimental data on human body tolerance to convective heat (from hot ambient air) are much more limited than data on tolerance to radiant heat. Convective heat is the primary source of caloric uptake at low temperatures, and severe physiological disturbances may occur at temperatures below those required for second-degree burning of the skin. Thus, extreme pain alone is not sufficient to determine tolerance time to heated ambient air, and the radiative burn curves in Figure 10 cannot be used with ambient air temperatures.

Figure 11 (Reference 22) is a composite of the experimental work conducted to date on human tolerance to heated ambient air. This curve shows that the available escape time at 400 °F would be about 20 sec. This temperature is comparable to the respiratory level temperature of 390 °F selected by NACA as discussed in the following section.

3.3.1.2 Respiratory Injury. Since occupants of burning aircraft may inhale hot gases that can inflict respiratory system injuries, a tolerance criterion is needed. However, a thorough knowledge of rapid incapacitation from respiratory system injury is lacking. In fact, the general knowledge concerning this aspect of human tolerance is so limited that, for all practical purposes, there are not enough data available to establish an escape limit threshold.

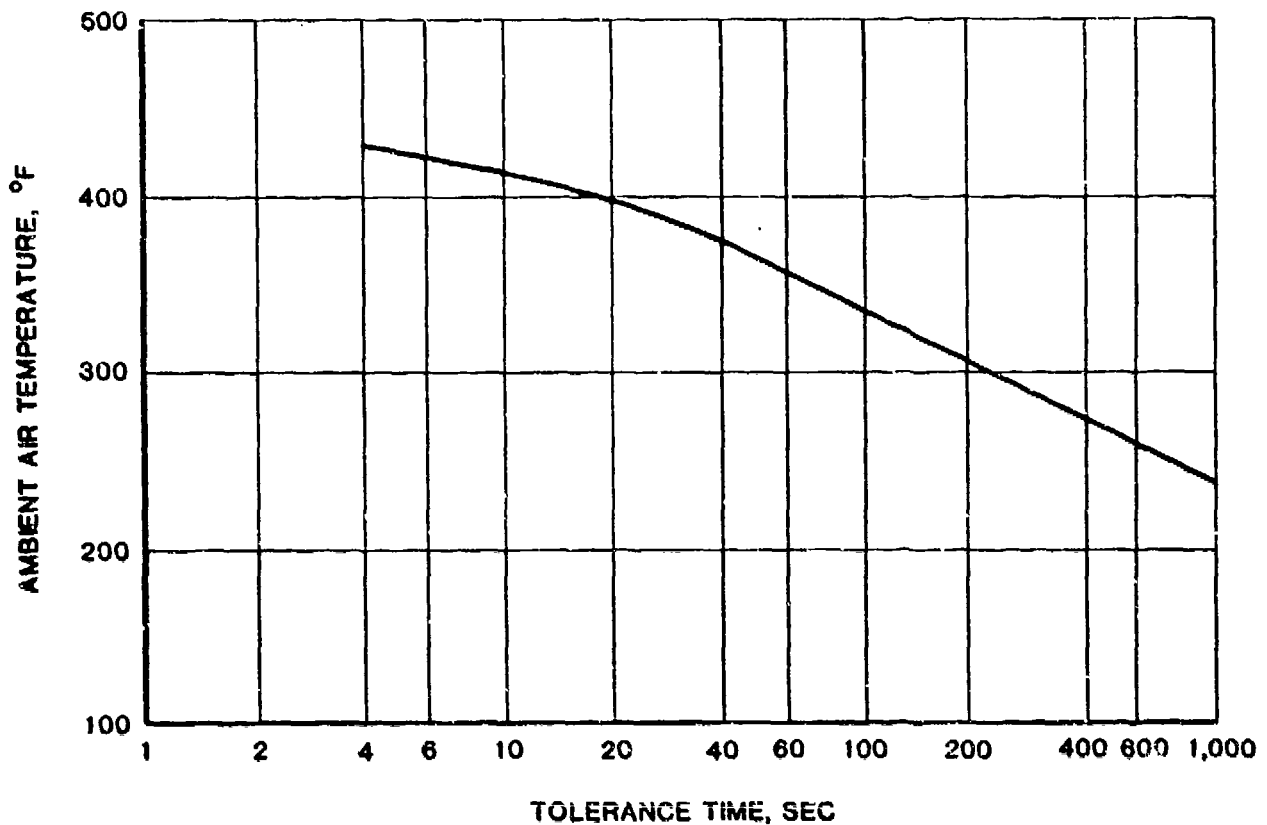


FIGURE 11. HUMAN TOLERANCE TO AMBIENT AIR TEMPERATURES (FROM REFERENCE 22).

A temperature of 390 °F was chosen by NACA as a threshold value to permit a gross comparison of the relative hazards of respiratory and skin injury levels (Reference 19). The 390 °F was chosen since it is the highest known temperature to which a human respiratory system has been exposed without damage.

3.3.2 Human Tolerance to Toxic Gases

The ability to escape successfully from a burning aircraft also depends on a person's tolerance to the many toxic gases present during a crash fire. Of these, carbon monoxide (CO) is generally the most prevalent.

The physiological effects of various carboxyhemoglobin (COHb) levels are shown in Figure 12. During a detailed study, NACA established that when an aircraft occupant breathes enough CO to cause a COHb level (the percent of CO saturation in the blood) of 35 percent, the individual's judgment becomes impaired (Reference 23). Consequently, when a COHb level of 35 percent is reached, the occupant's self-initiated escape capability becomes limited.

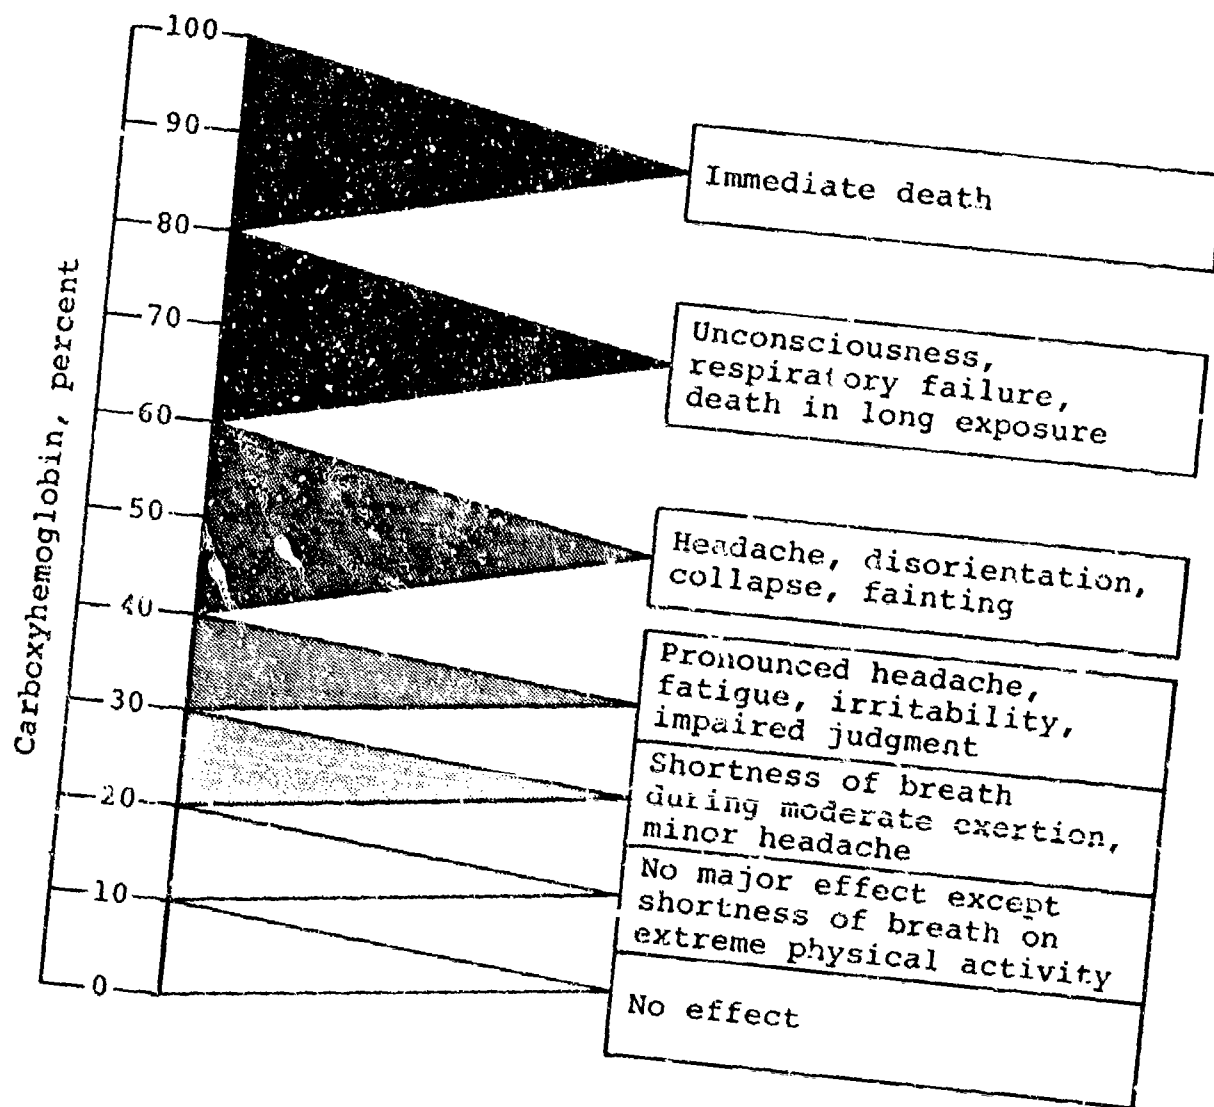


FIGURE 12. PHYSIOLOGICAL EFFECTS OF VARIOUS CARBOXYHEMOGLOBIN PERCENTAGES.

The rate of CO uptake in humans exposed to various CO concentrations in the air is shown in Figure 13. These curves were derived by using the following equation from Reference 22:

$$\text{COHb} = K \times \text{CO} \times t \quad (1)$$

where COHb = percentage of carboxyhemoglobin formed
 CO = percentage of CO in the air
 t = exposure time, minutes
 K = absorption constant.

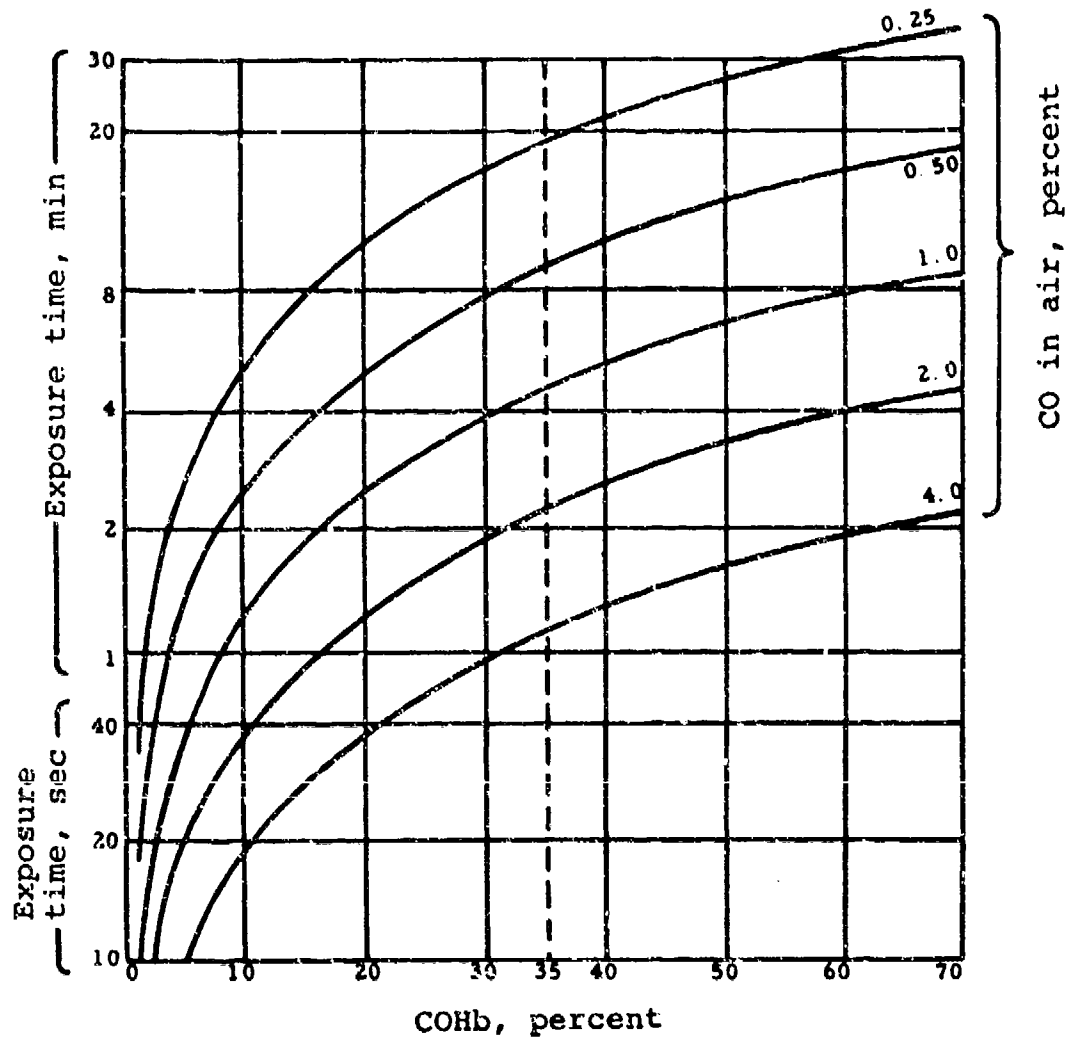


FIGURE 13. PROBABLE CO UPTAKE IN HUMANS EXPOSED TO VARIOUS AIR CONCENTRATIONS OF COHb.

The absorption constant, K , depends upon the ventilation rate (volume of air inhaled per minute) of the exposed person. Since the ventilation rate depends upon the type of work being done, the constant K is equal to 3 for persons at rest, 5 for light activity, 8 for light work, and 11 for heavy work. NACA has chosen a ventilation rate equal to that of persons engaged in light work as approximately that which would be encountered in persons attempting to escape from a burning aircraft (Reference 19). Therefore, a value of 8 was used for the absorption constant in deriving the curves. Figure 13 shows that the escape-limiting 35 percent COHb level is reached when the individual breathes 3.0 percent CO for 90 sec.

Although the escape time as limited by CO inhalation is generally longer than that limited by thermal skin injury, CO cannot be disregarded as a serious hazard. The relationship between ambient temperature and CO concentration will be dependent upon the type of crash, position of the occupant in the aircraft, slope of the impacted terrain, direction of the wind, and availability of fire-fighting equipment. It is entirely possible, especially in larger aircraft, that an individual's escape time could be limited by the CO concentration in the air rather than by thermal injuries.

The escape time based on CO inhalation must be considered to be the maximum escape time, since some of the other toxic gases present in the crash-fire environment are much more toxic than CO. In addition, the synergistic effects of combined gases and heat on toxicity are not well defined, although it has been established that heated gases or combinations of gases can be more lethal to the human than a single cool gas. Until these synergistic effects are studied in more detail, the lethal effects of each gas in a combination must be considered to be additive to the lethal effects of the other gases.

Other gases that may limit escape time from burning aircraft include hydrogen cyanide (HCN), hydrogen chloride (HCl), nitrogen dioxide (NO₂), and many others. Approximate human tolerance limits to the most commonly expected aircraft fire gases are given in parts per million (ppm) in Table 1 (Reference 24).

TABLE 1. TOLERANCE TO SELECTED COMBUSTION GASES

Combustion Gas	Hazardous Levels (ppm) for Times Indicated			
	Minutes	1/2 hr	1-2 hr	8 hr
Carbon dioxide	50,000	40,000	35,000	32,000
Carbon monoxide	3,000	1,600	800	100
Sulphur dioxide	400	150	50	8
Nitrogen dioxide	240	100	50	30
Hydrogen chloride	1,000	1,000	40	7
Hydrogen cyanide	200	100	50	2

Although there is considerable variation among researchers as to what level of a particular gas does constitute a life hazard, the limits given in Table 1 are typical of the ranges found. Perhaps more importantly, these

data illustrate the relative lethality of the various gases. Animal experiments have confirmed that the toxicity rankings of three of the most common gases are, in decreasing order, HCN, NO₂, and HCl (Reference 25).

The results of studies on the irritant gases, acrolein and HCl, showed that these gases did not incapacitate rats or baboons without causing severe respiratory tract damage and possible lethality (Reference 26). In fact, the threshold concentration for incapacitation by these gases was very near or even within the lethal range. The results of these studies indicated that humans may be able to tolerate acrolein and HCl at considerably higher concentrations than anticipated without being prevented from escaping a post-crash aircraft fire.

The FAA has developed nomographs for the safe discharge of Halon fire extinguishing agents in ventilated compartments. These nomographs were based on OSHA limitations which state the acceptable dosages of Halon 1211 and Halon 1301 are 4 percent-minutes and 10 percent-minutes, respectively. The FAA also estimated that the acceptable dosage of carbon dioxide under these conditions would be 25 percent-minutes (Reference 27).

3.3.3 Human Tolerance to Miscellaneous Fire Factors

Discussions with survivors of actual aircraft accidents have indicated that there are many other factors associated with the crash-fire situation that can affect one's ability to escape. Included are visual obstructions, eye and throat irritant, fire-blocked exits, panic, and the heat factor associated with blowing hot air.

Once openings appear in the fuselage shell surrounding the occupants during a crash fire, rapid airflow through the occupiable area can begin. (It was noted during some of the full-scale aircraft burn tests conducted by AvSER that airflow through the fuselage reached speeds as high as 35 mph.) This airflow is usually hot, turbulent, and laden with toxic gases and debris. It can create a high startle factor in the occupants, because it affects their breathing and causes them to lose sight of the surrounding area. Particulate matter in the smoke either blocks their vision or gets into their eyes, causing the individual to close them. Further, the smoke enters the respiratory tract, causing severe coughing and choking. Panic often results.

In view of the above hazards, the question of whether it is safer to stand up or crawl out of the aircraft is often asked. As long as the aircraft fuselage remains intact and has only one open exit, it is probably safer to crawl toward the aircraft opening to escape the elevated temperature and toxic gas region near the ceiling. However, in smaller aircraft with openings in the fuselage shell and in large aircraft with multiple open doors and exits, there is no safe location. The turbulence in the airflow due to seats, occupant, and other vortex generators is so great that no safe zone exists. Low-flammability clothing, a sound knowledge of evacuation procedures, and the ability and knowledge to hold one's breath while exiting the aircraft are the occupant's primary assets for survival. Once a fire has started, the only aircraft-related evacuation advantages an occupant can have are properly designed and located exits and slides, escape aisles, and emergency lighting.

4. POSTCRASH FIRE PROTECTION

4.1 INTRODUCTION

Postcrash fire research and accident experience with the crash-resistant fuel systems have shown that: (1) improvements in ground fire-fighting systems will provide little improvement for chances of survival in accidents where a postcrash fire is present, (2) a reduction of fuel spillage and ignition sources during and following a crash will reduce the probability of postcrash fire, and (3) greater emphasis on "built-in" postcrash fire protection during the aircraft design stage will improve overall postcrash fire resistance. The primary function of a crash-resistant fuel system is to prevent a massive postcrash fire long enough to allow for occupant escape.

This chapter presents basic design guidelines for Army aircraft systems that will inherently resist flammable fluid spillage and ignition during survivable accidents. It briefly discusses some of the hazardous characteristics of the flammable fluids used in aircraft systems. It then discusses the fuel containment approach, followed by a brief summary of fuel modification. Ignition source control, also presented, is applicable with all forms of spillage. However, it has not, by itself, proved to be a practical solution to the postcrash fire problem.

When designing aircraft fuel, hydraulic, electrical, structural, and other systems, two basic requirements must be met: (1) each system must be highly functional from the standpoint of operational and maintenance needs, and (2) the combined system must resist causing a crash fire. These requirements can be achieved only through a design based on careful integration of the various systems, with full consideration being given to operational and crash-resistant requirements.

The mating of the systems that offer a fire reduction potential as well as the required operational capabilities may increase the cost and weight of the aircraft; however, the integration of a crash-resistant fuel system design philosophy and hardware does not necessarily imply an overall weight or cost increase. Simplicity in the fuel system, which is desirable from the standpoint of requiring minimum attention from the crew, may well lead to a more crash-resistant system. By following the design suggestions contained herein and by thoroughly understanding the fire problem as discussed in Chapter 3, crash-resistant systems that will be practical from the standpoint of both weight and cost can be designed.

4.2 FLAMMABLE FLUIDS

Nearly all fluids used in aircraft systems are flammable to one degree or another. Many research efforts have been conducted to determine the relative fire hazard of one fluid over another. References 28 through 33 are recent typical examples.

A variety of factors can influence the actual fire hazard; however, probably the single most important issue is whether or not the fluid is in a liquid or mist state. Most of the data contained in the standard reference manuals

concerning ignition of flammable fluids discusses their ignitibility differences when measured in a motionless pool or state. Unfortunately, this is not the usual situation during an aircraft accident.

Careful study of the behavior of these fluids during crash impacts clearly shows that, once released from their respective systems, they are readily converted into a mist state. The actual particle size of the mist will vary, depending on the relative airflow into which the fluid is being expelled, the pressure behind the exiting fluid as it spills out of its containment system, its viscosity, temperature, thixotropic characteristics, and other physical units of measurements. (See Section 4.6.2.2, Hot Surfaces, for a more detailed discussion of the ignition of spilled fluids.)

Once these flammable fluids are converted into a mist state, the measurable differences become quite small. The increase in fire safety associated with fluids having low volatility characteristics are essentially eliminated once the fluid is in the mist state. In fact, tests measuring flame propagation through different misted aircraft flammable fluids have shown that there is essentially no significant difference in ease of ignition or flame propagation speed, even when measuring such fluids as gasoline and kerosene. From a crash-resistant designers point of view, it is suggested that the following philosophy be adopted concerning flammable fluids.

Assume that the prevention of hazardous spillage is the paramount issue, then follow these guidelines:

1. Prevent spillage - but if some does occur, design to:
2. Prevent ignition - but if some does get ignited, design to:
3. Isolate.

4.3 FUEL CONTAINMENT

The design philosophy for crash-resistant fuel systems in aircraft is based upon the need to control postcrash fire in otherwise survivable accidents. In examining the basic elements contributing to postcrash fire, three factors emerge: an oxidizer, a combustible agent, and an ignition source.

Since it is not feasible to completely control the supply of oxygen immediately surrounding the aircraft, control is best exercised over the remaining two elements: the fuel and the ignition source.

The ideal fuel system is one that completely contains its flammable fluid both during and after the accident. To accomplish this, all components of the system must resist rupture regardless of the degree of failure of the surrounding structure. Success of such a system depends on proper selection of materials and design techniques in each of the following areas:

- Fuel tanks
- Fuel lines
- Supportive components and subsystems.

There is no single, universally adaptable fuel system for aircraft. Each aircraft manufacturer must design his own crash-resistant system based on the criteria presented in the following sections. A rating method which can help the designer select a crash-resistant fuel system design for his particular aircraft has been developed and used on a variety of U.S. Army aircraft (Reference 34). Although the criteria given below are specifically applicable to new aircraft design, it also is possible to modify existing aircraft to include most of the crash-resistant fuel system principles and components.

4.3.1 Fuel Tanks

4.3.1.1 Tank Location. The location of the flammable fluid-carrying tank in an aircraft is of considerable importance in minimizing the postcrash fire hazard from a tank installation. The location must be considered with respect to occupants, ignition sources, and probable impact areas.

Greater distance between occupants and fuel supply tends to increase escape time in the event of a fire because it reduces the likelihood of fuel entering the occupied area. Also, the tank should be kept away from probable ignition sources. While this is not always feasible, tanks should not be installed in or over the engine compartment, the battery, or other primary ignition sources. Another important consideration is the location of tanks with respect to probable impact damage. Accident histories show repeated tank ruptures and consequent fires as a result of landing gear failures, indicating the tank's high degree of vulnerability to damage from surrounding structures.

Locating fuel tanks under a helicopter floor poses a serious threat because of the propensity toward accidents in near-level flight attitude at high sinking speeds. It is obvious that fuel tanks mounted low on the fuselage will contact the ground early in the crash sequence and will be exposed to possible penetrations from rocks, stumps, and other ground irregularities. Thus, a good design technique is to locate fuel tanks higher in the structure. As much aircraft structure as possible should be allowed to crush before the tanks themselves are exposed to direct contact with obstructions.

Fuel tanks in the wings should be located behind the forward spar, as far outboard as possible, but not at the tips. Accident investigations have shown that placing the tanks outboard of the engine nacelles in multiengine aircraft is preferred to locating them inboard of the engines. Placing the tanks in the wing tips should be avoided because these areas are anticipated impact points. If fuel must be carried at the wing tips, consideration should be given to using breakaway or jettisonable tip tanks.

Reduction of fuel tank volume must also be considered. If the fuel tank is nearly full and located in an area where considerable structural collapse occurs, the tank may be subjected to pressures that exceed its design limit. It also may be exposed to puncture by torn and jagged metal. Therefore, if it can be predicted that the structure surrounding the tank may collapse due to compressive loads during a crash, expansion areas into which the tank and its contents may displace should be provided.

Another factor that can govern whether or not a fuel tank will survive a given impact is the method of failure experienced by the aircraft structure surrounding the tank. Care should be taken to ensure that when structural failure occurs in the area of the tank, sharp cutting surfaces, penetrating spars and longerons, and other injurious structures are avoided or controlled. Nonmetallic fuel tank liners, i.e., backing board, should be considered for use as a shield against the above injurious mechanisms.


The strength of the structure surrounding the tank also must be considered, especially if bladders are used. Crash-resistant fuel tanks, as defined by MIL-T-27422, have demonstrated their ability to safely contain fuel when placed in aircraft structures typical of the general-aviation-size aircraft. When MIL-T-27422 was written, it was based upon the results of a twelve-year crash test program which used aircraft of various sizes and shapes ranging from the small LOH helicopters to medium-sized aircraft. Whether or not the data gained from the test program can be safely applied to aircraft of the C-141 or C-5 size still remains to be seen. Extreme caution must be taken when considering locating MIL-T-27422 fuel tanks in airliner structures which are designed to carry loads far greater than those which currently surround the fuel bladders in use. These structures have the strength and weight to readily rupture MIL-T-27422 tanks, especially if the fuel tanks are not installed in accordance with the guidelines presented in this manual.

4.3.1.2 Tank Shape. The ability of the tank to displace easily and without snagging is largely dependent on its shape. Cylindrical or rectangular shapes appear to be best, whereas tanks with protuberances or tanks composed of several interconnecting tanks (see Figure 14) are more vulnerable to rupture. Where tanks deviate greatly from the regular cylindrical or parallelepiped shapes, consideration should be given to the use of separate tanks with interconnecting, stretchable hoses, or self-sealing fittings. To minimize snagging and excessive concentration of stresses, inside angles should be avoided if at all possible, especially in the lower portions of the tank. All outside angles should have a radius of at least 1 in. If possible, the tank should be oriented so that the side with the greatest surface area is facing the direction of probable impact.

4.3.1.3 Tank Materials. The concept of fluid containment requires materials and fabrication techniques that will maximize the energy-absorbing ability of the fuel system. Tanks constructed in accordance with earlier military specifications for crash resistance lacked such qualities and, therefore, failed under minimal severity crash conditions. Crash-resistant fuel system research has shown, however, that fuel tanks constructed of materials possessing a high degree of cut and tear resistance, as well as a moderate degree of elongation, can accommodate very high impact levels without loss of fuel. These research programs resulted in Revision B to MIL-T-27422 for crash-resistant fuel tanks (Reference 35).

Tanks made to the revised specifications of MIL-T-27422 have demonstrated an ability to hold their contents safely during the upper-limit survivable crash. However, these demonstrations have been conducted with fuel tanks containing liquids of 1000 gal. or less or installed in small-to-medium-sized airplanes and helicopters. Additional research in all aspects of fuel tank crash resistance should be conducted before tanks with capacities exceeding 1000 gal. are used, or before such tanks are installed in thicker-skinned airliner-sized aircraft.

**PREFERRED SMOOTH SHAPES
AND FLATWISE ORIENTATION**

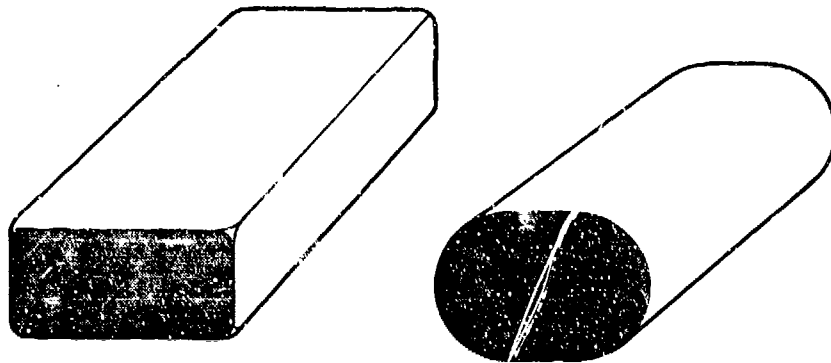

**AVOID IRREGULAR SHAPES
AND INSIDE ANGLES**

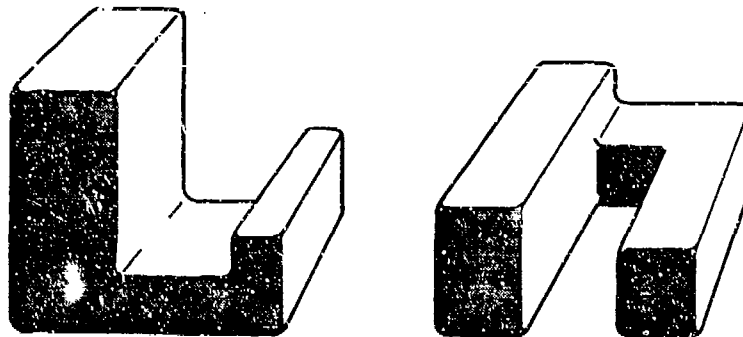


FIGURE 14. TANK SHAPES.

In order to provide the reader with a better understanding of the properties of crash-resistant fuel tank materials, the following general discussion is presented.

Elongation can be obtained by tank deformation or material stretch. The amount of elongation actually required is unknown. It is known, however, that fuel tanks lacking the ability to elongate are either fairly strong (heavy) or brittle. Both types are easily ruptured in moderate crashes. On the other hand, crash-resistant fuel tank studies have shown that light-weight tanks that can readily rearrange their shape (deform/elongate), at the same time exhibiting a high degree of cut and tear resistance, can hold their contents during upper-limit survivable crashes.

The amount of tensile strength a fuel tank material should possess also is debatable. Early attempts to define a fuel tank material property in terms of tensile strength proved unsuccessful. In fact, crash-resistant fuel system studies showed that tanks with lower tensile strengths were more difficult to rupture than ones with higher tensile values, providing, of course, that the tanks still exhibited a high degree of cut and tear resistance (Reference 36).

At the time of this writing, the only reason known for a minimum tensile strength requirement is to provide enough load-carrying capability between the tank wall and the tank fitting to cause the fitting to pull free of the airframe structure rather than out of the tank. This usually requires the breaking of some sort of frangible fastener between the tank fitting and the airframe.

What, then, defines whether or not a tank is crash-resistant? The overall results of extensive U. S. Army-funded crash-resistant fuel system studies indicated that cut, tear, and impact resistance were the key issues. However, tank shape, flexural modulus of the material, reinforcement orientation, and loading rate sensitivity were all involved. The B revision of MIL-T-27422 was prepared as a result of the U. S. Army tests and is the best source to date to define fuel tank crash resistance.

The cut- and tear-resistance tests, defined in MIL-T-27422, are self-explanatory. The values specified have proven to be effective in actual crashes.

The importance of a material's tear resistance is illustrated in Figure 15. These load-deflection curves were obtained from tear tests of 3 x 7-in. specimens containing an initial 3-in.-long slit (see Figure 16). Figure 15 shows the load required to propagate the initial slit as a function of the displacement of the pull jaws of the test device. The area under the curve is a measure of the energy required to completely fail the specimen. The energy required to fail the MIL-T-27422B material is almost six times that required for the 0.063-in. aluminum, although the nylon/rubber composite is lighter in weight than the aluminum. The MIL-T-27422B composite material, though somewhat heavier than MIL-T-27422A material, far surpasses MIL-T-27422A material, both in the load necessary to propagate the tear and in the energy required to completely fail the material. Further data on these materials are available in References 36 and 37.

In order to assure that proposed tank designs have seam continuity, proper fitting installation and placement, and other overall crash impact resistance, a drop test requirement was included in the MIL-T-27422B revision.

Preproduction tanks in both the standard 30-in. cubes and the look-alike configurations, with all openings suitably closed, are filled with water to normal capacity (air removed) and mounted on a platform of the design shown in Figure 17. Lightweight cord is used to maintain the tank in normal flight attitude. The platform is raised to a height of 65 ft, released, and allowed to drop freely onto a nondeforming surface with the platform horizontal (± 10 degrees) at impact for rotary-wing aircraft and at an angle of 20 ± 10 degrees with the horizontal for fixed-wing aircraft. No liquid leakage is allowable following the test.


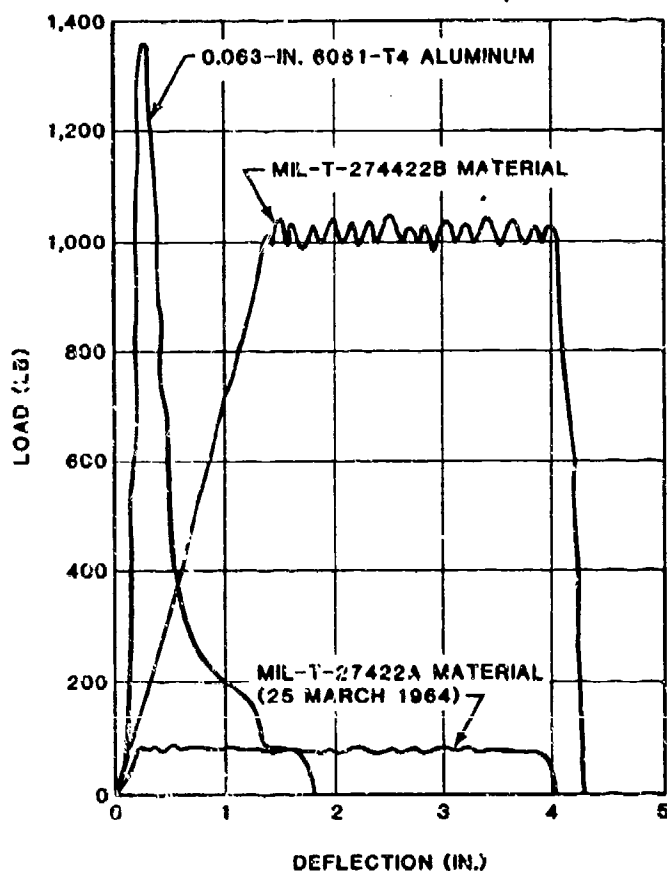


FIGURE 15. RESISTANCE OF MATERIALS TO TEARING.

The 65-ft drop height results in a severe impact test of the fuel tank. However, it must be remembered that the drop test does not, in any way, evaluate puncture or tear resistance. The 65-ft drop height provides a safety margin should an aircraft crash with a significant horizontal component or after a crash into rough terrain (e.g., rocks and stumps), thereby placing localized loads on the tank. Furthermore, aircraft structures surrounding the fuel tank sometimes fail in a manner that creates additional hazards to the tank. This factor also is considered in the safety margin provided by the 65-ft drop test.

Review of recent crash data indicates that fuel tanks that have been designed to the existing criteria, including the 65-ft drop test, are sometimes failing and releasing their contents, with fires resulting, in accidents at, and slightly above, the human survival range. This suggests that the design criterion is at the appropriate level. If aircraft impact velocities are expected to be higher, the tank material criteria may need to be increased accordingly. Lower anticipated impact speeds may allow a corresponding materials criteria reduction; however, such reduction should not be allowed without first conducting a major, long-term test program to measure and define the requirements necessary to maintain crash-resistant fuel tank integrity.

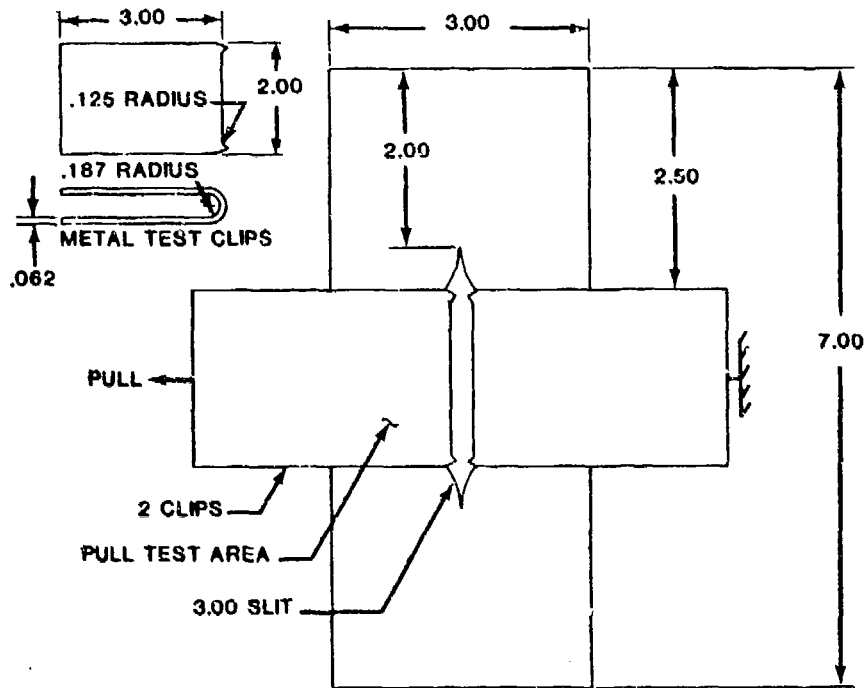


NOTE: DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
TOLERANCES: $\pm .032$

FIGURE 16. SLIT TEST FOR OBTAINING RESISTANCE TO TEAR PROPAGATION.

The other criteria discussed in the following sections apply regardless of the anticipated impact speeds.

4.3.1.4 Tank Fittings. A fuel tank failure often is caused by physical displacement of the aircraft structure in relation to the fuel tank. This places stress concentrations at tank attachment points such as filler necks/caps, tank outlets, boost pumps, and drains. The tank fitting can be pulled from the fuel tank, tearing the tank wall. Often, if the energy levels are sufficiently high, this tear will circumscribe the entire tank. Until MIL-T-27422B became effective, fuel tank fittings could be torn from standard .30-caliber self-sealing fuel tanks at loads corresponding to about one-third the strength of the tank wall. The new specification requires high-strength fitting-retention methods in keeping with the high strength of the new fuel tank materials.

MIL-T-27422B specifies that all fuel tank fittings shall have a pullout strength of at least 80 percent of the fuel tank wall strength. The strength of the tank material is determined by measuring the force required to drive the end of a 4-in.-diameter rod through a 13-5/8-in. diaphragm specimen of the tank material that is supported around the perimeter. The rod has a 1/8-in. radius which forces the end into the sides. The rod is driven at a rate of 20 in./min.

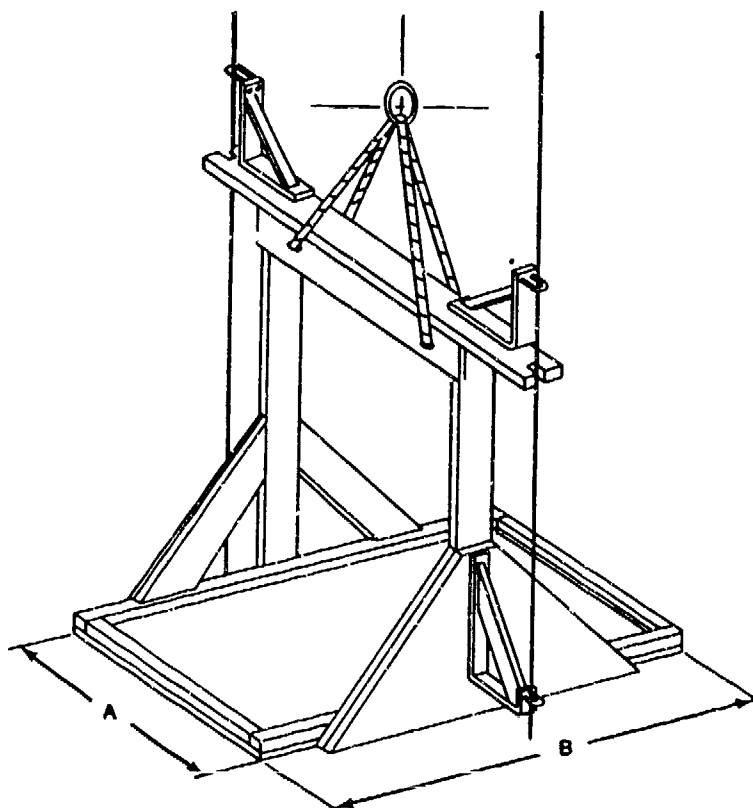

NOTE: DIMENSIONS A AND B SHALL NOT EXCEED TANK DIMENSIONS (WHEN THE LOADED TANK IS IN PLACE FOR TEST) BY MORE THAN 12 IN. IN EITHER DIRECTION.

FIGURE 17. DROP TEST FIXTURE.

A typical method for measuring the fitting pullout strength is shown in Figures 18 and 19. A test sample, containing a 4-in.-outside-diameter fitting, is fabricated of the tank material using the same fitting material and attaching methods used on full-size production tanks. A 225 ± 5 -lb weight is attached to the fitting as shown in Figure 18. A force transducer is located between the fitting and the weight, as close to the fitting as possible. The test sample is attached to a rigid drop cage, dropped from a height of 20 ft, and decelerated in a distance of 9 in. or less. There must be sufficient distance between the bottom of the weight and the cage to prevent bottoming prior to fitting pullout. The peak reading from the force transducer is the fitting pullout strength, which must be in excess of 80 percent of the failure load of the tank material but need not exceed 30,000 lb.

It is desirable, as a goal, for the fuel tank fitting to have a pullout strength equal to that of the tank wall. However, tank manufacturers have experienced great difficulty in meeting the 80-percent retention requirement currently specified in MIL-T-27422B. Consequently, the 80-percent value is an obvious compromise.

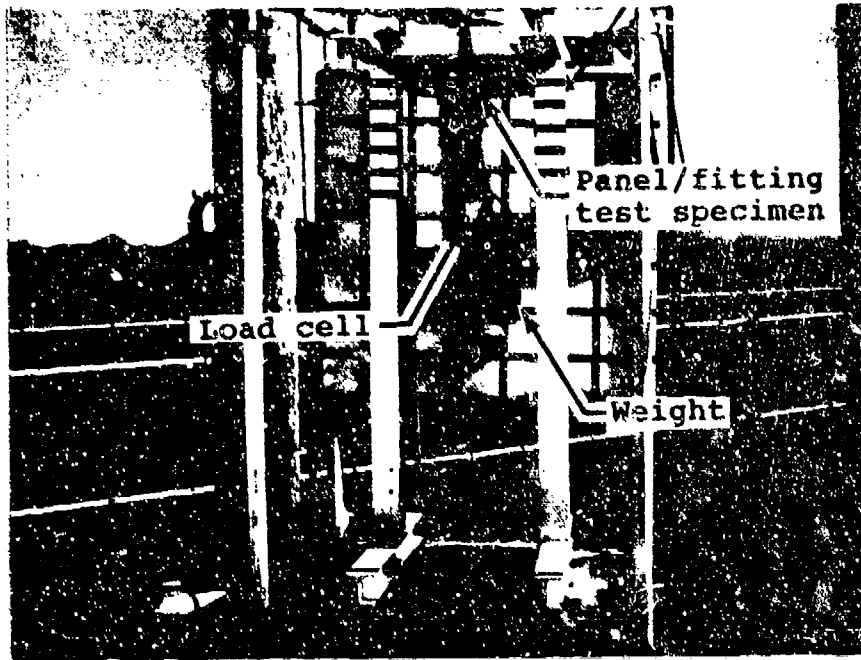


FIGURE 16. TYPICAL SETUP FOR DYNAMIC TESTING OF FUEL TANK FITTING PULLOUT.

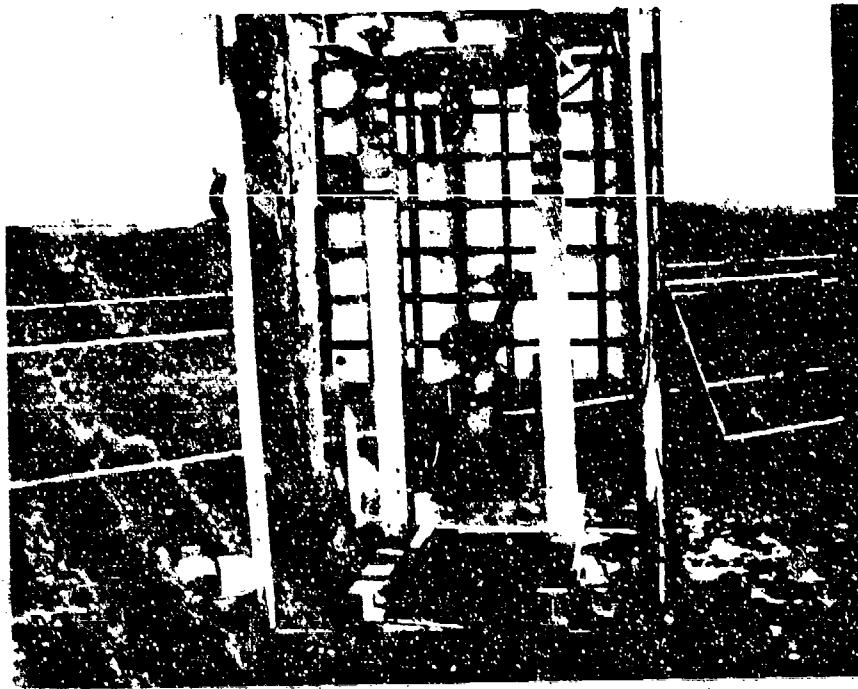


FIGURE 19. TYPICAL FUEL TANK FITTING PULLOUT FOLLOWING DYNAMIC TEST.

Two high-strength fitting designs that have met the 80-percent retention requirement are shown in Figure 20. Proprietary designs exhibiting strengths close to or even slightly in excess of the fuel tank wall strength have been demonstrated recently. Thus, it may be feasible to delete this compromise in the future.


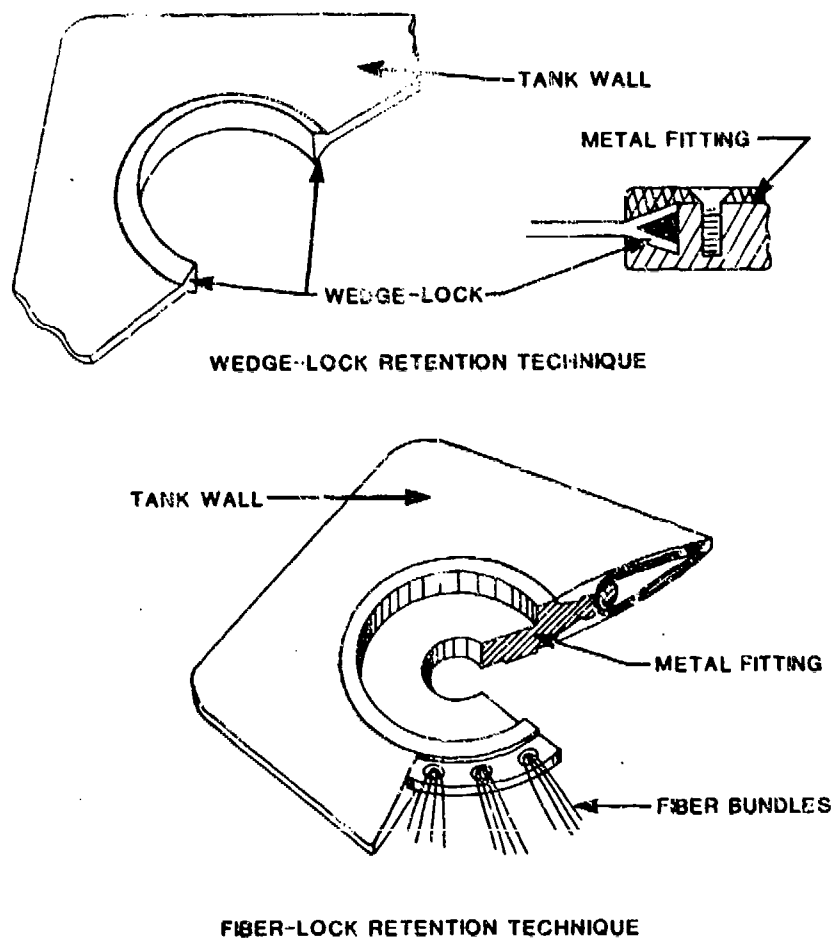


FIGURE 20. HIGH-STRENGTH FITTING RETENTION TECHNIQUES.

4.3.1.5 Tank Attachments. To be crash-resistant, the fuel tank must be secured to the airframe and connecting plumbing in a way that allows the tank to pull free of the attachments without rupturing when structural displacement occurs in a crash. Frangible brackets or bolts can be incorporated in the attachment technique to ensure their separation at specified loads. Frangible attachments may be designed to fail either the material itself (e.g., thin-walled hollow bolts that will fail during crash impact) or some facet of the design (e.g., protruding flanges that bend on exposure to crash

forces). Several concepts, along with their applications, are illustrated in Section 4.3.3. The frangible attachment must be strong enough to meet all operational and service loads of the aircraft within a reasonable margin,* but should fail at 25 to 50 percent of the minimum load required to fail the attached system or component. This requires careful analysis of the various components in the fuel system for probable failure loads, load paths, and degrees of deformation. A sample breakaway load calculation is shown in Figure 21.

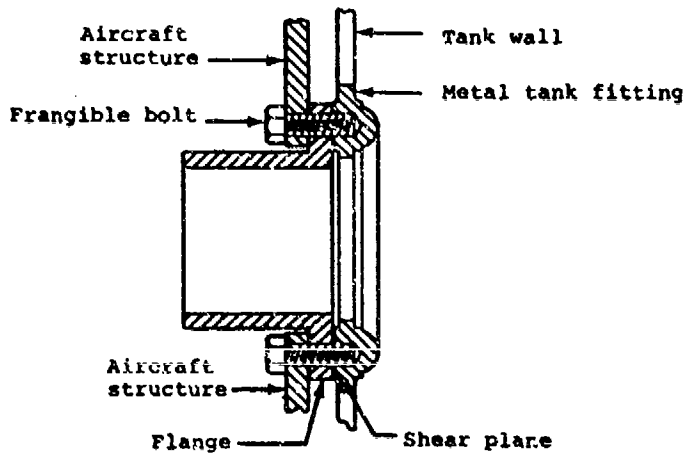

ITEM	LOWEST FAILURE LOAD (LB)*	FAILURE MODE
Aircraft structure	4000	Shear
Tank fitting	3000	Pull out of tank
Flange	5000	Shear
Frangible bolt	Not more than $\frac{3000}{2} = 1500$ Not less than $\frac{3000}{4} = 750$	Break (tension-shear)

*Loads may or may not be representative; values are for explanatory purposes only.

FIGURE 21. SAMPLE FRANGIBLE ATTACHMENT SEPARATION LOAD CALCULATION.

*A factor of 10 is a desirable goal to ensure that inadvertent actuation under normal operation is impossible. It is realized that this goal may not always be compatible with the 50-percent-attachment failure load criterion; however, the service load margin should be as high as possible.

The frangible attachments should be designed to separate efficiently in the direction of force most likely to occur during crash impact. Crash loads, whether tension, shear, compression, or combinations thereof, must be determined for each attachment by analyzing the surrounding aircraft structure and probable impact forces and directions.

4.3.2 Fuel Lines

4.3.2.1 Line Construction. Damaged fuel lines frequently cause spillage in aircraft accidents. Lines often are cut by surrounding structure or worn through by chaffing rough surfaces. The use of flexible rubber hose armored with a steel-braided harness is strongly suggested in areas of anticipated dragging or structural impingement. In systems where breakaway valves are not provided, these stretchable hoses should be 20 to 30 percent longer, before stretching, than the minimum required hose lengths. This will allow the hose to shift and displace with collapsing structure rather than be forced to carry high tensile loads. For this reason, it is equally important that couplings and fittings be used sparingly because of their propensity to snag and restrict the natural ability of the hose to shift.







All fittings used in the fuel system should meet the strength requirements of Tables 2, 3, or 4 when tested in the modes shown. The loads are always applied through the hose with freedom allowed for the hose to form the bend radius. Thus, the effective moment arm for the bending tests changes primarily with the line size and secondarily as the applied load produces changes in the bend radius. This test procedure is much easier to mechanize than one requiring a constant moment arm and is typical of what happens in an actual accident.

All fuel lines should be secured with breakaway (frangible) attachment clips in areas where structural deformation is anticipated. When fuel lines pass through areas where extensive displacement or complete separation is anticipated, self-sealing breakaway valves should be used. The valves may be specifically designed for this purpose (Figure 22), or quick-disconnect valves may be modified for use (Figure 23). (See Section 4.3.3.1 for a more complete discussion of self-sealing breakaway valves.) These valves must meet all operational and service loads of the aircraft within a reasonable margin, but they should separate at between 25 and 50 percent of the minimum failure load for the weakest component in the fluid-carrying system. A sample breakaway load calculation is shown in Figure 24.

In designing a system using line-to-line breakaway valves, one should consider potential hazards to cross-axis shear loading on the valve halves. While omnidirectional separation is not an absolute requisite for most line-to-line valves, it is highly desirable, and every attempt should be made to procure omnidirectional valves if there is any possibility of cross-axis shear loading.

Figures 25 and 26 will assist the designer in determining the lever arms and bending moments imposed on frangible valves or other attaching hardware of a crash-resistant fuel system. The dimensions given are for standard hose fittings. When using nonstandard fittings, consult the appropriate drawings.







TABLE 2. REQUIRED MINIMUM INDIVIDUAL LOADS FOR STANDARD HOSE AND HOSE-END FITTING COMBINATIONS

Hose End Fitting Type	Fitting Size*	Minimum Tensile Load (lb)	Minimum Bending Load (lb)
STRAIGHT Tension =  Bending = 	-4	575	450
	-6	600	450
	-8	900	700
	-10	1250	950
	-12	1900	1050
	-16	1950	1450
	-20	2300	1600
	-24	2350	2750
	-32	3500	4000
	90° ELBOW Tension =  Bending = 	-4**	575
-6**		600	850
-8**		900	1250
-10		1250	575
-12		1900	675
-16		1950	1200
-20		2300	1250
-24		2350	2025
-32		3500	3500
45° ELBOW Tension =  Bending = 		-4**	575
	-6**	600	425
	-8**	900	425
	-10	1250	425
	-12	1900	600
	-16	1950	1000
	-20	2300	1600
	-24	2350	2400
	-32	3500	3700

*Fitting size given in 1/16-in. units, i.e., -4 = 4/16 or 1/4 in.

**Elbow material is steel.

TABLE 3. REQUIRED MINIMUM INDIVIDUAL LOADS FOR SELF-SEALING HOSE AND HOSE-END FITTING COMBINATIONS

Hose End Fitting Type	Fitting Size*	Minimum Tensile Load (lb)	Minimum Bending Load (lb)
STRAIGHT Tension = 	-10	2000	-
	-12	3120	1050
	-16	2850	1650
	-20	2650	1700
	-24	3850	2500
	-32	2700	-
Bending = 			
90° ELBOW Tension = 	-10	1950	700
	-12	3400	3700
	-16	3100	4300
	-20	2500	2500
	-24	3800	2500
Bending = 			
45° ELBOW Tension = 	-10	1200	450
	-12	3000	800
	-16	3200	1800
	-20	2900	1700
	-24	3850	2500
Bending = 			

*Fitting size given in 1/16-in. units, i.e., -10 = 10/16 or 5/8 in.

TABLE 4. REQUIRED MINIMUM INDIVIDUAL LOADS FOR SELF-SEALING HOSE WITH FLANGED END FITTINGS

Hose End Fitting Type	Fitting Size*	Minimum Tensile Load (lb)	Minimum Bending Load (lb)
STRAIGHT			
Tension =	-12	2700	3600
	-16	2500	1650
	-24	2800	2500
Bending =			
90° ELBOW			
Tension =	-12	2400	2950
	-16	2700	1050
	-24	3900	2500
Bending =			
45° ELBOW			
Tension =	-12	3100	1000
	-16	2100	1350
	-24	3450	2500
Bending =			

*Fitting size given in 1/16-in. units, i.e., -12 = 12/16 or 3/4 in.

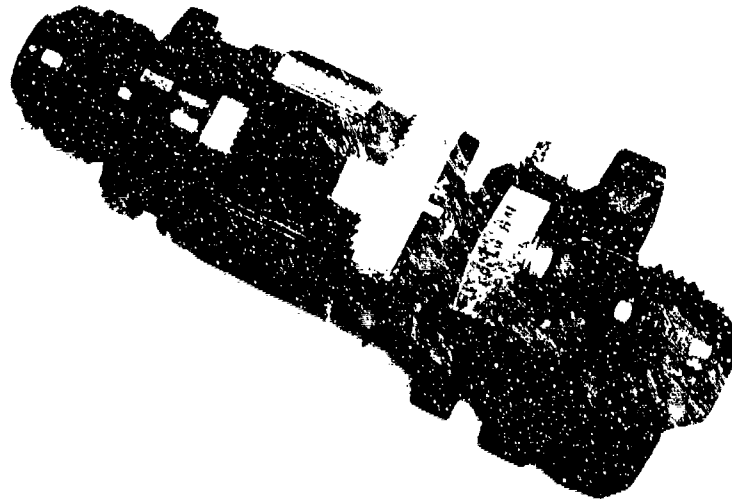


FIGURE 22. SPECIFICALLY DESIGNED BULKHEAD (FIREWALL)-TO-LINE BREAKAWAY VALVE. (TENSION ON ATTACHING HOSE CAUSES VALVE SEPARATION)


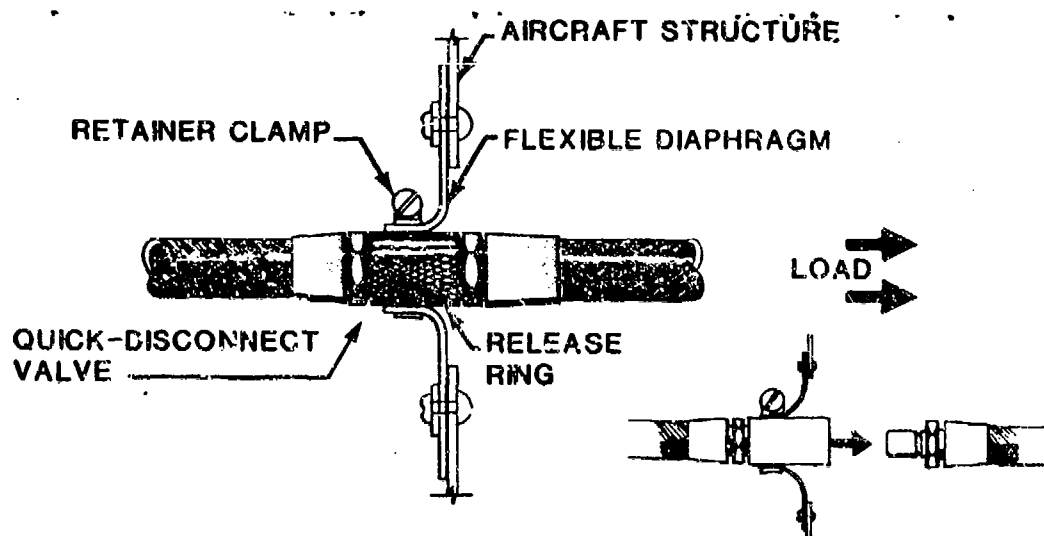


FIGURE 23. MODIFIED QUICK-DISCONNECT LINE-TO-LINE VALVE. (PULL OF DESIGNATED HOSE WILL CAUSE VALVE SEPARATION.)

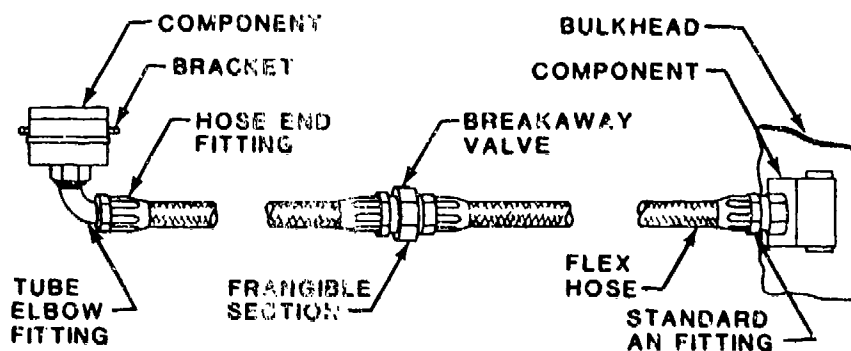


ITEM	LOWEST FAILURE LOAD (LB)	FAILURE MODE
Flex Hose	3,000	Tensile breakage
Flex Hose	1,500	Pull out of end fitting
Hose end fitting	1,650	Break (bending)
Standard AN fitting	1,700	Break (bending)
Tube elbow fitting	1,200	Break (bending)
Component structural attachments	4,500	Pull out of structure
Breakaway valve	Not more than $\frac{1,200}{2} = 600$	Break at frangible section
	Not less than $\frac{1,200}{4} = 300$	

*Loads may or may not be representative; values are for explanatory purposes only.


FIGURE 24. TYPICAL BREAKAWAY LOAD CALCULATION FOR IN-LINE BREAKAWAY VALVE.

When applying these dimensions, one hose diameter (nominal) should be added to dimension A or B, whichever is used. One hose diameter is added because it approximately equals the offset of the load line adjacent to the hose socket as the hose collapses when pulled in the bending mode. Dimension A plus the nominal hose size is to be used in lever arm determinations when standard fittings as shown are used. Dimension B plus the nominal hose size is to be used in determining the lever arm when other than standard elbows are used.


For example, the lever arm of a -16 size standard 90-degree hose fitting for self-sealing hose, from Figure 26, is 4.10 in. plus one hose diameter, or 1 in. Therefore, the lever arm length equals $4.10 + 1 = 5.10$ in.



Hose Size	A Maximum (in.)	B Maximum (in.)
-4	1.33	1.16
-5	1.38	1.18
-6	1.51	1.29
-8	1.79	1.48
-10	1.94	1.60
-12	2.01	1.70
-16	2.36	1.94
-20	2.64	2.13
-24	2.79	2.18
-32	3.16	2.45

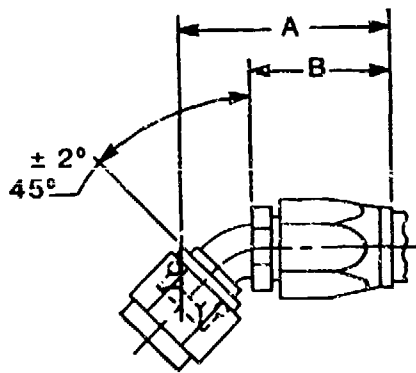


Hose Size	A Maximum (in.)	B Maximum (in.)
-4	1.72	1.16
-5	1.83	1.18
-6	2.00	1.29
-8	2.17	1.48
-10	2.42	1.50
-12	2.79	1.70
-16	3.06	1.94
-20	3.45	2.13
-24	3.65	2.18
-32	4.26	2.45

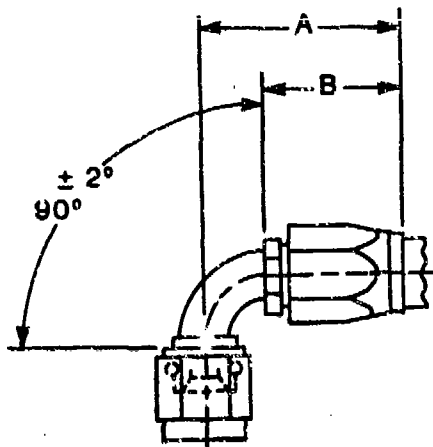


Hose Size	A Maximum (in.)	B Maximum (in.)
-4	1.59	1.16
-5	1.68	1.18
-6	1.85	1.29
-8	2.01	1.48
-10	2.25	1.60
-12	2.66	1.70
-16	2.97	1.94
-20	3.38	2.13
-24	3.59	2.18
-32	4.22	2.45


FIGURE 25. STANDARD HOSE FITTING DIMENSIONS.

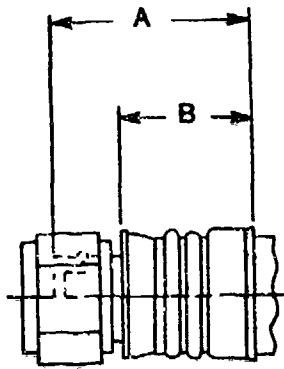

Hose Size	A Maximum (in.)	B Maximum (in.)
-10	3.66	3.16
-12	3.54	3.06
-16	3.62	3.06
-20	3.77	3.16
-24	3.76	3.06

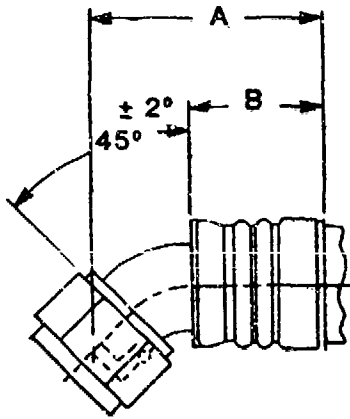

Hose Size	A Maximum (in.)	B Maximum (in.)
-10	3.99	3.16
-12	4.07	3.06
-16	4.19	3.06
-20	4.50	3.16
-24	4.53	3.06

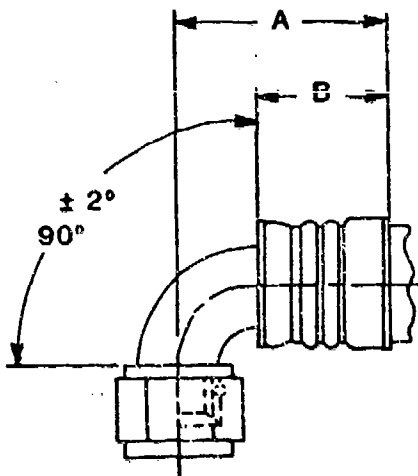

Hose Size	A Maximum (in.)	B Maximum (in.)
-10	3.52	3.16
-12	3.94	3.06
-16	4.10	3.06
-20	4.38	3.16
-24	4.47	3.06

FIGURE 26. SELF-SEALING HOSE FITTING DIMENSIONS.

The lever arm of a -10 size standard straight hose fitting for self-sealing hose, from the same figure, is 3.66 in. plus one hose diameter, or .63 in. Therefore, the lever arm length equals $3.66 + .63 = 4.29$ in.

For a nonstandard fitting using -10 size self-sealing hose, the lever arm would be 3.16 in. plus one hose diameter, .63 in., plus the length contributed by the nonstandard component. Therefore, the lever arm length equals $3.16 + .63 + \text{component length}$ (in inches).

Fuel lines are often used as the means of applying the loads necessary to cause self-sealing breakaway valves to separate. While much discussion here and in other parts of this section highlights the hose and end fitting strengths, it must be remembered that, in order for a valve to be pulled apart at a predetermined load value, the structure supporting the opposite end of the hose-to-valve connection also must be capable of carrying the load. This includes bulkhead fittings and fittings terminating in components such as carburetors, filters, pumps, etc. Failure to recognize and design around these often overlooked weak links in the plumbing system can negate the overall crash-resistant design effort.

4.3.2.2 Line Routing. Routing of hoses should be carefully considered during the design stage. Fuel lines should be routed along the heavier structural members, since those members are less likely to deform or separate in an accident. Avoid placing wet fuel lines in areas of anticipated impact damage, such as adjacent to the lower external skin and forward of the wing span. Evacuated fuel lines can be considered as possible exceptions to this rule. Also, it is important that hoses have a space into which they can deform when necessary. For example, when hoses pass through large flat-plate areas, such as bulkheads or firewalls, the hole allowing line passage should be considerably larger than the outside diameter of the line. Hose stabilization as well as liquid-tight, fire-tight seals still can be maintained if a frangible structure, such as shown in Figure 27, is used.

If design requirements limit the use of the protective measures discussed above, full use should be made of self-sealing breakaway couplings located in areas of anticipated failures and structural displacements. Crossover connections, drains, and outlet lines present a special problem since they are usually located in the lower regions of the tank, where they are vulnerable to impact damage. Space and flexibility should be provided at the connections to allow room for the lines to shift with collapsing structure. Utmost consideration should be given to using self-sealing breakaway fittings at each line-to-tank attachment point.

4.3.3 Supportive Components

Supportive components play a vital role in crash-resistant fuel systems. Aside from providing a solution to specific problems, e.g., a strainer to help clean fuel, they also must be capable of preventing spillage in accidents with resulting forces equal to or better than the tank strength. They must not be the weak link in the system. Care must be taken during the design and testing phase to ensure that the supportive items, some of which are discussed below, will not fail during the crash sequence and allow spillage.

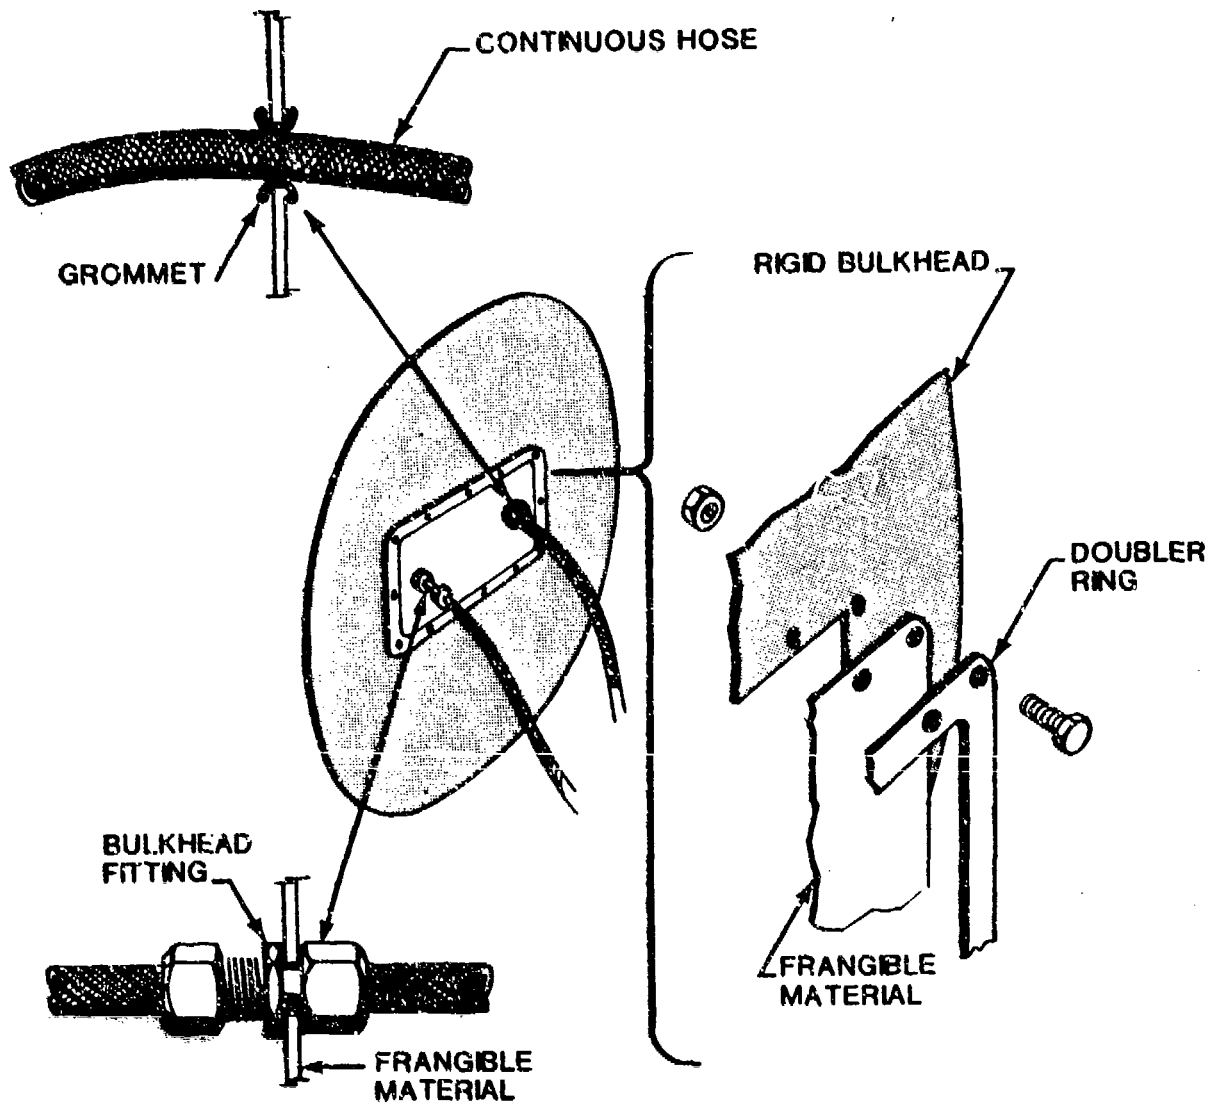


FIGURE 27. HOSE STABILIZING WITH FRANGIBLE STRUCTURE.

4.3.3.1 Self-Sealing Breakaway Valves. Self-sealing breakaway valves are valves designed to separate into two or more sections and seal the open ends of designated fluid-carrying passages. The openings may be in fuel/oil lines, tanks, pumps, fittings, etc. The valves fall into two general categories: the "one-shot" type, which usually incorporates a frangible portion that breaks upon valve operation (Figure 28), and the quick-disconnect type, which is installed so that it will be triggered (released) during the crash sequence (Figures 23 and 29). Some valves in use today have both these features incorporated into their design. Each specific fuel system design will dictate which of the two types of valves can or should be used. In either case, the valves must be installed in a manner that precludes inadvertent operation.

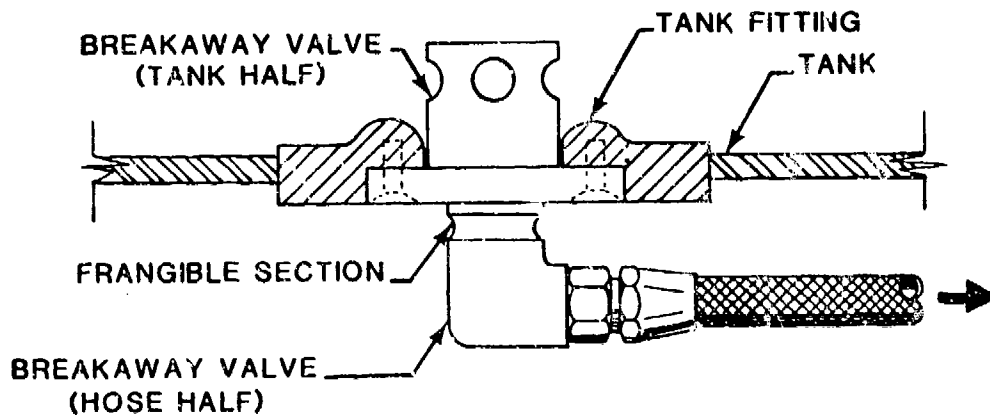


FIGURE 28. "ONE-SHOT" SELF-SEALING VALVE. (LOAD ON HOSE OR LOWER VALVE BODY CAUSES SEPARATION AT FRANGIBLE SECTION.)

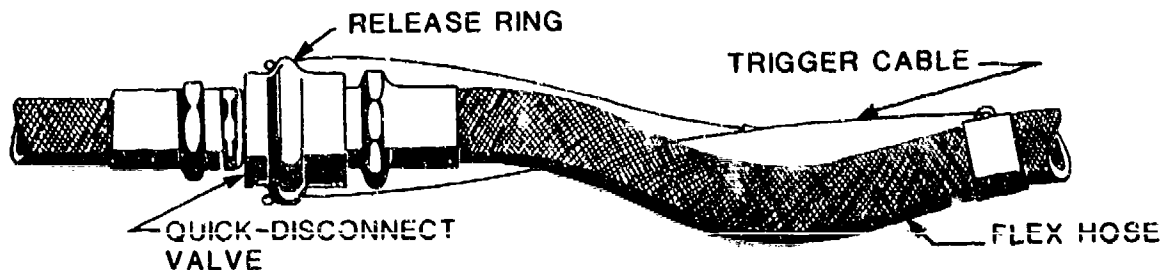


FIGURE 29. CABLE-ACTUATED QUICK-DISCONNECT VALVE. (IF A TRIGGERED CABLE SYSTEM IS USED, ITS LOCATION MUST BE CAREFULLY SELECTED TO PREVENT INADVERTENT VALVE ACTUATION DURING NORMAL AIRCRAFT OPERATION AND MAINTENANCE.)

The forces which are usually applied to self-sealing breakaway valves to cause separation are transmitted by a pulling movement of the flexible fluid-carrying hose. As the hose stretches, a force is transmitted to the valve. If the force is great enough, something finally fails. Hopefully, it is the valve. Unfortunately, however, sometimes it is the other end of the hose or a hose end fitting. Care should be taken to ensure that the weak link in each load-producing system is the frangible section of the self-sealing breakaway valves. Techniques for determining the weak links are discussed in this section.

There are design situations where, for one reason or another, a load path other than the hose must be used. Cable lanyards are an acceptable alternative load path technique, and they are used today in some aircraft installations. If lanyards are used to transmit the force to cause a valve to fracture and separate (the "one-shot" type), they must be capable of carrying at least twice the amount of load it takes to fracture the valve. If they are used to move a release ring, such as on a quick-disconnect valve, they need to be at least twice as strong as the force required to move the ring. As a general rule, the force required to move a quick-disconnect release ring is considerably less than the force required to fracture the frangible section of a self-sealing breakaway valve, consequently a lighter-weight overall system can result.

Self-sealing breakaway valves should be located at each fuel-carrying tank outlet and at locations within the fuel line network where extensive displacement is foreseeable, such as wing roots or engine compartments. The purpose of these valves is to prevent rupture of the tank, hoses, or fitting components by placing a "safety fuse" in the load path.

A self-sealing breakaway valve should be used to connect two fuel tanks in a direct side-by-side arrangement if there is a reasonable probability that structure failure or displacement will occur in the immediate area of the tanks. Figure 30 shows a breakaway valve mounted in such a tank-to-tank installation.


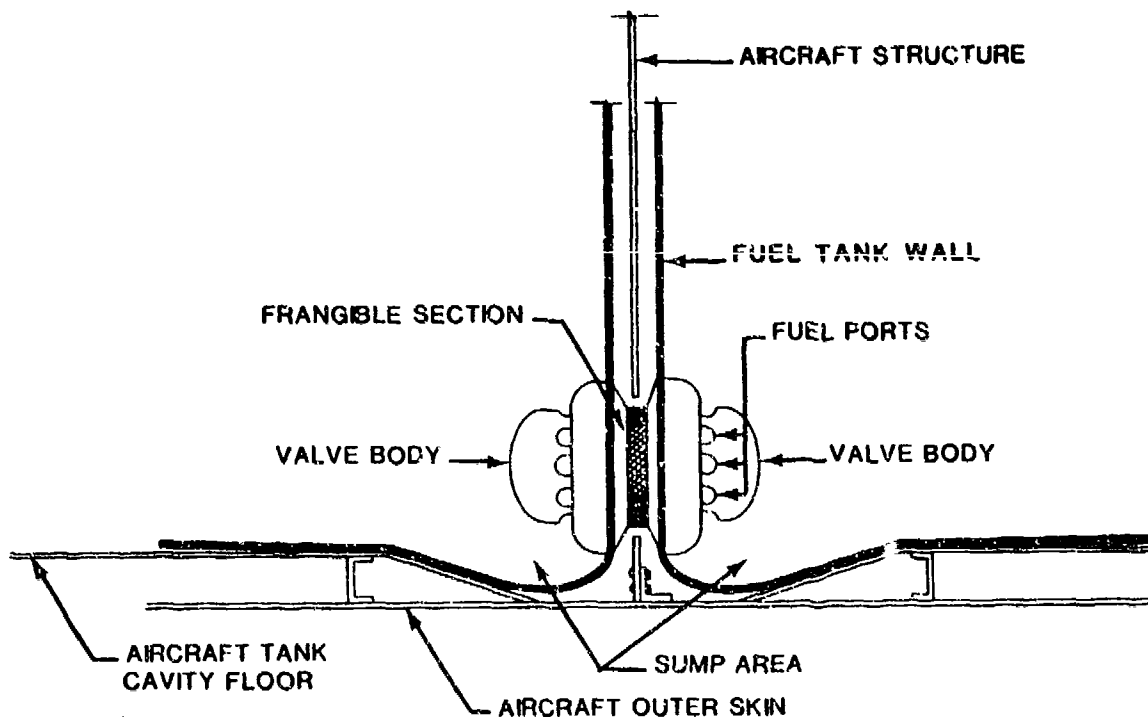


FIGURE 30. TYPICAL TANK-TO-TANK SELF-SEALING BREAKAWAY INTERCONNECT VALVE.

Tank-to-line interconnect valves should be recessed sufficiently into the tank so that the tank half is flush with the tank wall or protrudes only a minimal distance beyond the tank wall after separation. This feature reduces the tendency of the valve to snag on adjacent structures during the crash sequence.

The frangible interconnecting member of each of these valves should be sufficiently strong to meet all operational and service loads of the aircraft within a reasonable margin but should separate at 25 to 50 percent of the minimum failure load for the weakest component in the fluid-carrying line. Figure 31 illustrates a sample breakaway load calculation.

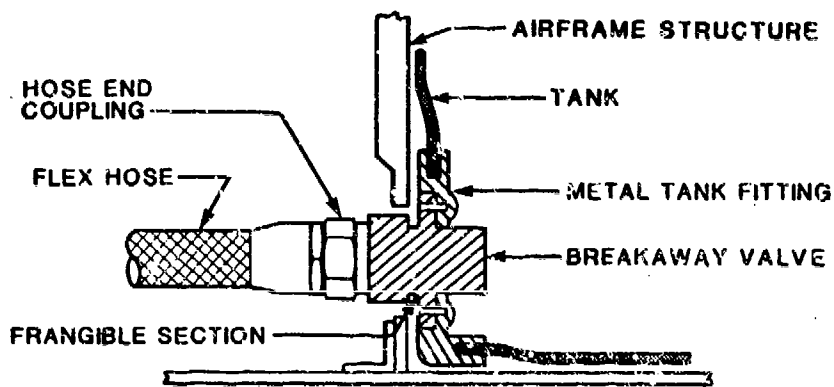

Item	Lowest Failure Load (lb)*	Failure Mode
Flex hose	3000	Tensile breakage
Flex hose	1500	Pull out of end fitting
Tank fitting	7500	Pull out of tank
Hose end coupling	1650	Break (bending)
Breakaway valve	2500	Pull out of tank fitting
Breakaway valve	Not more than $\frac{1500}{2} = 750$	Break at frangible section
	Not less than $\frac{1500}{4} = 375$	

*Loads may or may not be representative; values are for explanatory purposes only.

FIGURE 31. TYPICAL METHOD OF BREAKAWAY LOAD CALCULATION FOR FUEL TANK-TO-LINE BREAKAWAY VALVE.

Each valve application should be analyzed to assure that the probable separation load will be exerted in a direction and manner to which the valve is best suited. These loads, whether tension, shear, compression, or combinations thereof, are obtained by analyzing the aircraft for probable impact force and direction and by determining the consequent structural deformation around the valve.

Self-sealing breakaway valve designs should not allow dangerous spillage during or after valve separation. The valve should permit no external leakage when partially separated. For this reason, valves with a very short triggering stroke are superior to those with a long stroke.

Operational pressures are dependent on specific applications, but the valve designs can take advantage of the available line pressure to assist in keeping the self-sealing mechanism closed. As in all valve designs, light weight and minimal pressure drop are major design objectives, but the resistance of the valve to direct impact or to high compressive loads should not be sacrificed for the sake of weight reduction.

4.3.3.2 Vents. Vent systems become involved in the crash fire episode when the aircraft remains upright and the fuel tank is compressed, the aircraft rolls far enough to one side to allow fuel to drain out of the systems, and/or when the vent lines fail.

Vent line failure often occurs at the point of exit from the tank. Failure at this point can be reduced by using short, high-strength fittings between the metal insert in the tank and the vent line. The vent line should be made of wire-covered flexible hose and should be routed in such a manner that it will not obviously become snagged in a displacing structure and torn from the tank. Self-sealing breakaway valves also can be placed at the tank-to-line attachment area. This approach becomes mandatory if there is danger of the tank being torn free of the supporting structure.

Vent lines should be routed inside the fuel tank in such a manner that, if rollover occurs, spillage cannot continue. This can be accomplished with siphon breaks and/or U-shaped traps in the line routing.

Many fuel systems are ideally suited for the integration of rollover float/vent valves inside the fuel tank. These valves are designed to operate in any attitude and to allow a free flow of air while prohibiting the flow of fuel. They are particularly advantageous during rollover accidents, and can be used in lieu of flexible lines, breakaway valves, and all other alternate considerations. One current type of vent valve is illustrated in Figure 32. Caution must be exercised when using this type of device, as they do not, by themselves, provide thermal relief protection for expanding fuel or bypass protection when stuck closed.

If the fuel system is to be pressure refueled, it should be noted that a large bypass system for tank overpressurization will have to be used. This capability can be built into the vent valve or can be incorporated in a separate unit. Large spring-loaded pressure relief valves are in current use today. Rollover protection is provided by the spring valve, but tank overpressurization due to tank compression causes fuel to be expelled at the next vent outlet. In either case, however, care must be taken to ensure that spillage resulting from overpressurization due to tank compression during a crash is released away from aircraft occupants and ignition sources.

4.3.3.3 Boost Pumps. Fuel boost pumps fall into two general categories. There are the tank- or line-mounted types, which pressurize the fuel lines, and the line- or engine-mounted types, which suck fuel from the tank and lines, creating a slight negative pressure in the fuel lines. Suction fuel systems pose a much lower threat in regard to crash fires; however, both

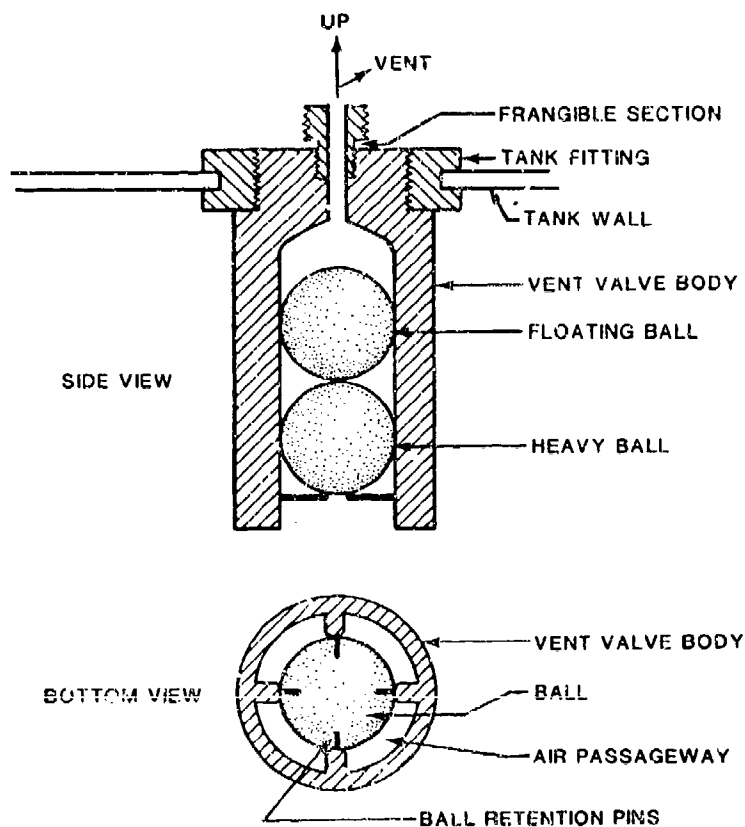


FIGURE 32. VENT VALVE.

systems can pose potential problems. Some boost pumps in use today are installed in the fuel tank and are rigidly bolted to the aircraft structure. Crash damage to the pump can cause fuel spillage and also supply electrical sparks for ignition of fuel.

The state of the art in fuel system design has shown that most electrically driven boost pumps can be eliminated. Air-driven boost pumps and engine-mounted suction-type boost pumps now in operation are a less hazardous alternative to electrically-driven boost pumps. When fuel pressure is required for engine start, or other reasons (i.e., APV), electrically-driven pumps may be considered. If electrical pumps are used for this purpose, they should be deenergized as soon as they are no longer needed.

If design requirements dictate that a boost pump be installed in the fuel tank, it is suggested that the pump be air driven and that it be rigidly bolted to the fuel tank only. If the pump must be supported or attached to the aircraft structure, a frangible attachment should be used, as shown in Figure 33. If an electrical pump must be used for engine start, it should be turned off once the starting sequence is completed.

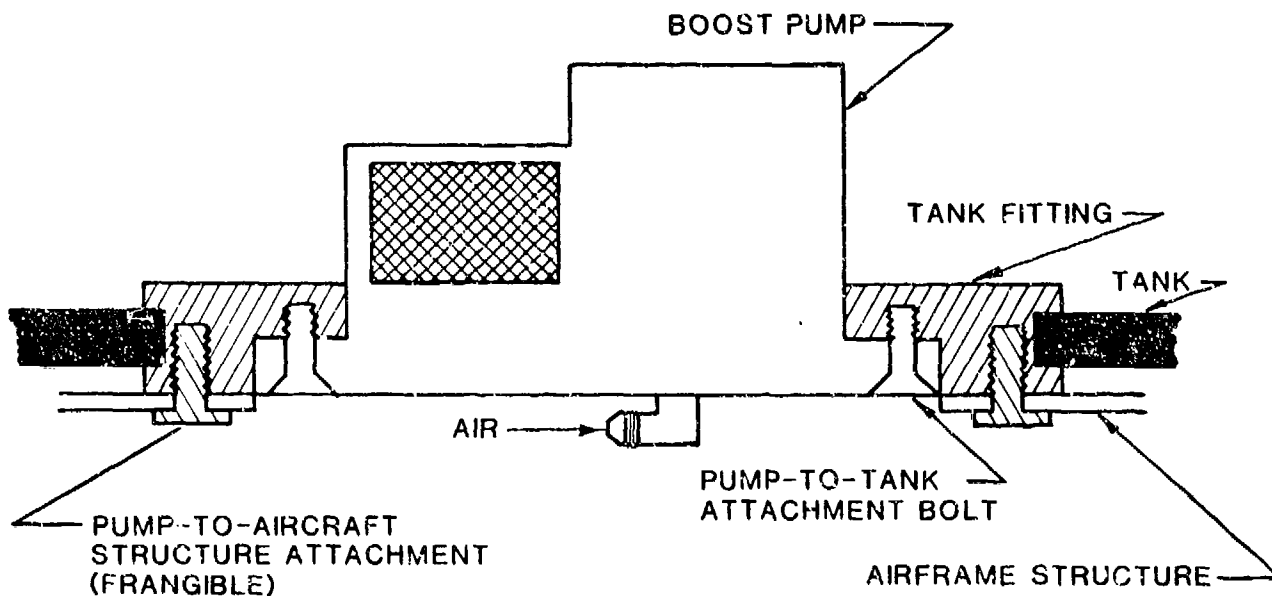


FIGURE 33. FRANGIBLE ATTACHMENT OF AIR-DRIVEN BOOST PUMP TO AIRFRAME STRUCTURE.

4.3.3.4 Filler Necks. The filler necks commonly used on present-day aircraft can, and frequently do, cause fuel tank failure. Typical filler neck installations place the cap at one end of the filler tube and the tank at the other end. During periods of structural displacement, the neck can be pulled and torn from the tank, leaving an opening in the tank wall. To prevent fuel spillage, it is imperative that the filler cap remain with the tank. To do so, it should be mounted at, or slightly below, the tank wall surface.

Although the use of filler necks is not recommended, certain aircraft configurations require their use. It is suggested that a frangible type be devised, as shown in Figure 34. Alternatively, a check valve can be placed in the tank filler opening as shown in Figure 35. Another suggestion for filler attachments is the frangible ring concept presented in Figure 36.

4.3.3.5 Quantity Sensors. Accident investigations have shown that quantity sensors cause two types of tank failures. The first type of failure, which is common to most quantity sensor installations, involves the rigid attachment between the sensor entry into the tank and the aircraft structure. This rigid coupling cannot accommodate much structural displacement without inducing a tearing failure in the fuel tank. It is necessary, therefore, that a frangible structure be used for this type of tank attachment (see Figure 37). An alternate approach is to make the probe mounting attachment frangible.

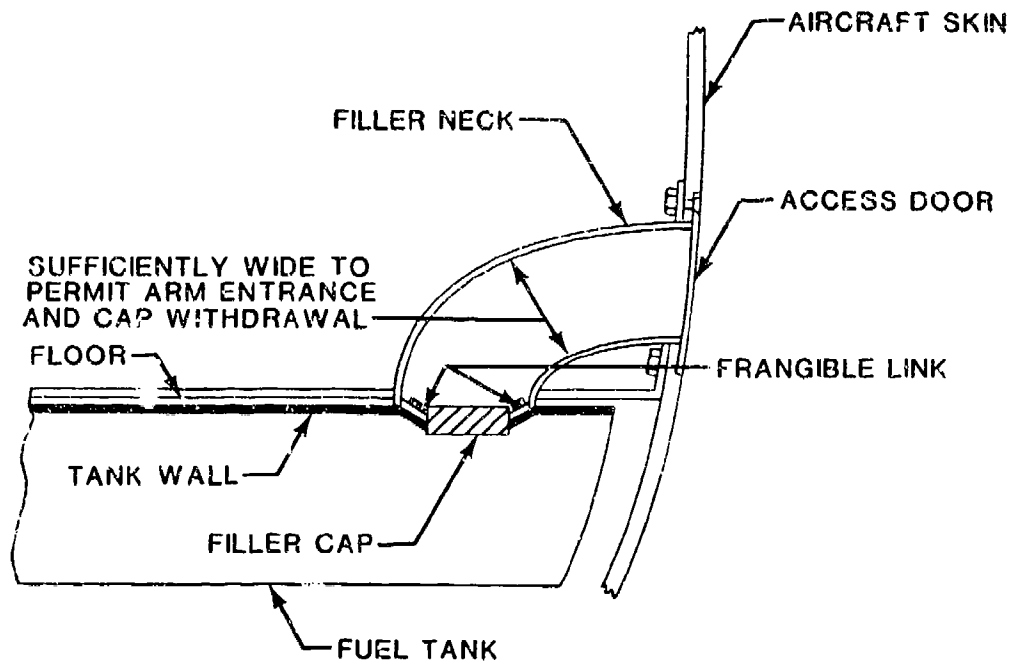


FIGURE 34. FRANGIBLE FILLER NECK INSTALLATION.

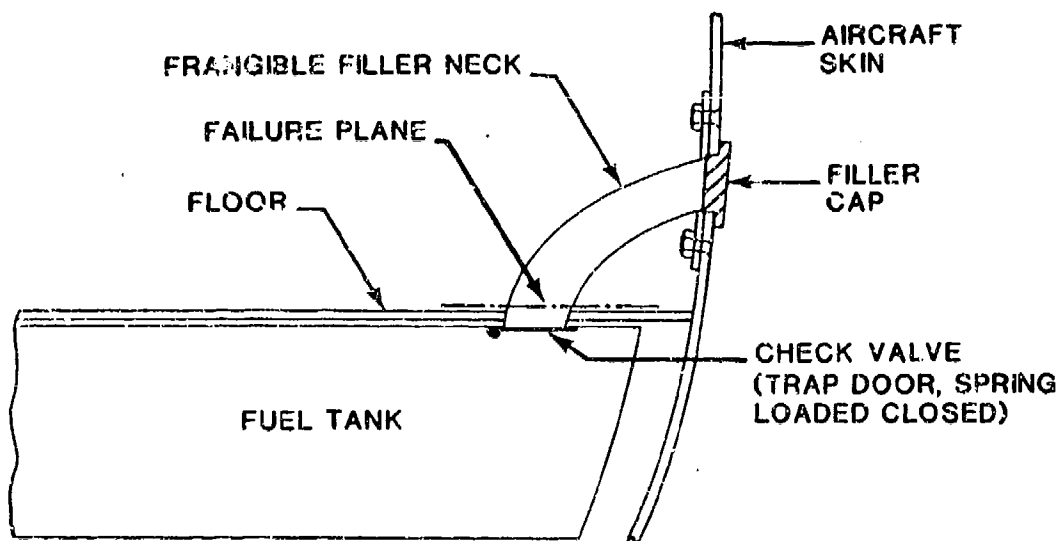


FIGURE 35. CHECK VALVE INSTALLED IN CONJUNCTION WITH FRANGIBLE FILLER NECK.

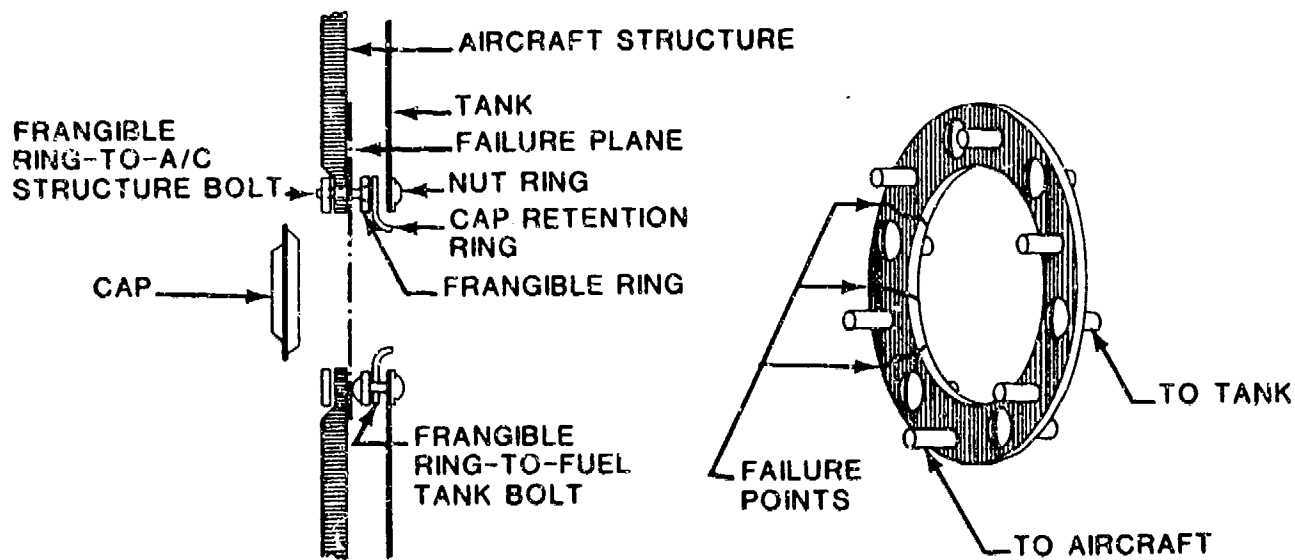


FIGURE 36. FRANGIBLE RING ATTACHMENT FOR INSTALLING FUEL TANK FILLERS.

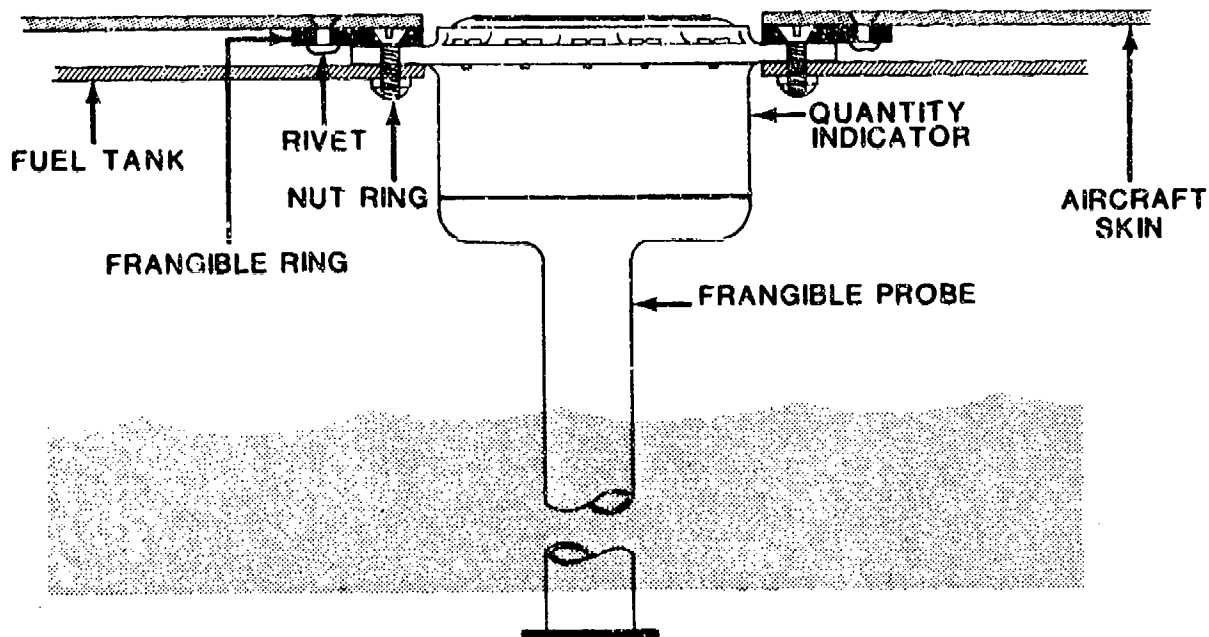


FIGURE 37. FRANGIBLE FUEL QUANTITY SENSOR.

The second type of sensor-induced tank failure is the puncturing of the tank by the long, rigid, tubular sensing probes in use in many aircraft. Corrective approaches to this problem include mounting the probe at a less hazardous angle or using curved, frangible, low-flexural-rigidity probes or probes equipped with load-spreading shoes, fuel counters, and float-and-arm type sensors. While the new crash-resistant tanks have greatly reduced this problem, it still poses a hazard that should be remedied in the larger tanks.

4.3.3.6 Sump Drains. Sump drains are a frequent source of fuel spillage because their design dictates that they be located at the lowest point in the tank, in close proximity to the most probable impact area. Figure 38 illustrates some design concepts that permit maximum drainage without the drain protruding beyond the face of the tank.

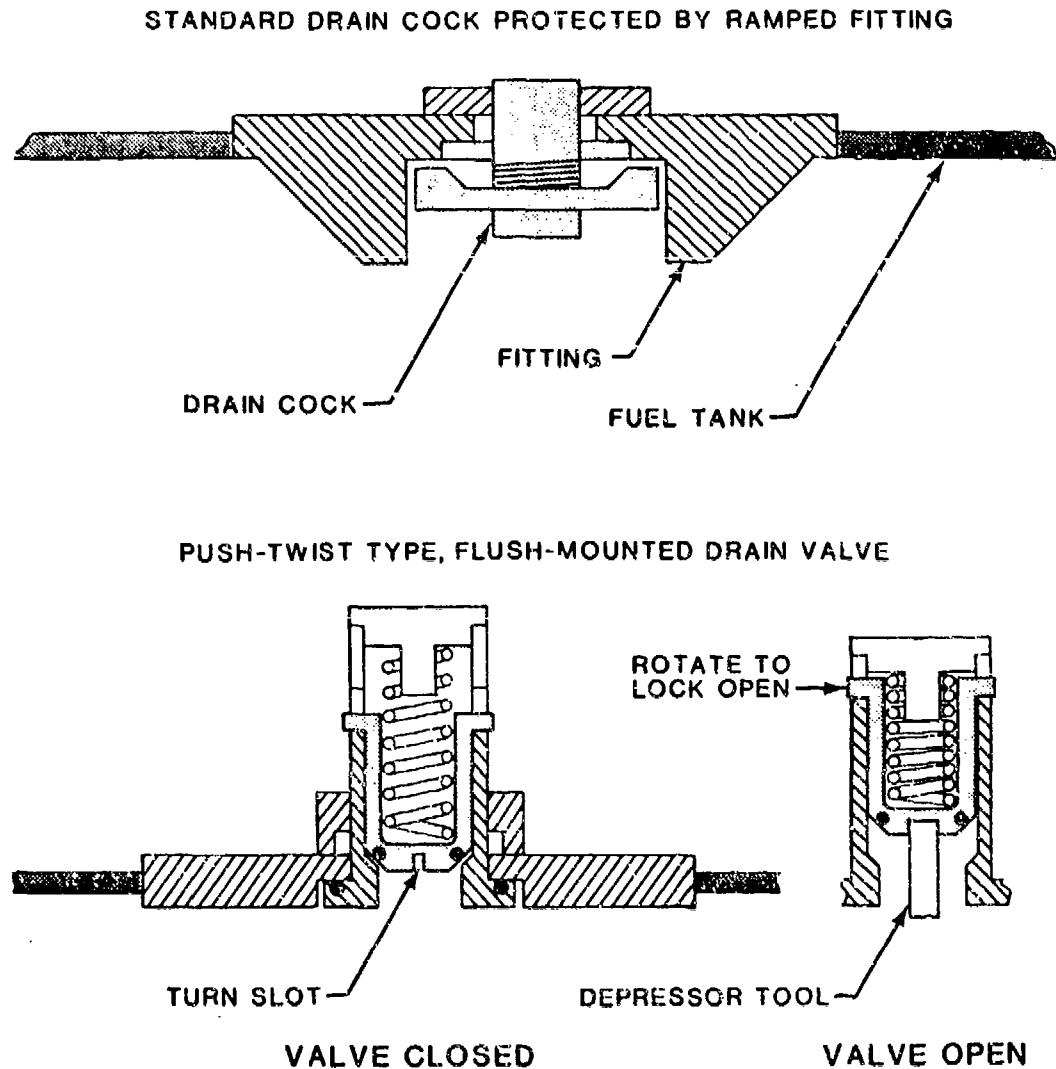


FIGURE 38. DESIGN CONCEPTS FOR CRASH-RESISTANT FUEL DRAIN COCKS.

4.3.3.7 Fuel Strainers and Filters. In-line fuel strainers should not be located in the engine compartment if such a practice can be avoided. Engines are sometimes torn loose during crash impact, and the strainers located in the compartment are susceptible to damage from the displaced engine. Mounting the strainers directly on the engine is not desirable.

The engine location might afford some protection during a crash, but its proximity to the hot engine surfaces creates an additional hazard from ballistic hits. Strainers should have a structural attachment capable of withstanding a 30 G load applied in any direction to minimize the possibility of their being torn loose during crash impact. Self-sealing breakaway couplings should be used to attach fuel lines to the fuel strainers if there is a probability of line damage at this point. Care should be taken to assure that the valve, not the strainer or filter, is the weak link in the system. One recent program installed a protective jacket over the removable canister portion of the airframe-mounted fuel strainer (Reference 38). The jacket, made of ballistic nylon felt and surface coated to provide a liquid seal, is retained by nylon straps with Velcro fasteners. The jacket, shown in Figure 39, inhibits penetration of the canister by sharp edges of surrounding structure in the event of structure deformation during a crash. In the event that the fuel strainer canister does become jarred from the fuel strainer head during a crash, the jacket functions as a wick to absorb the fuel contained within the strainer canister, preventing uncontrolled discharge of fuel.

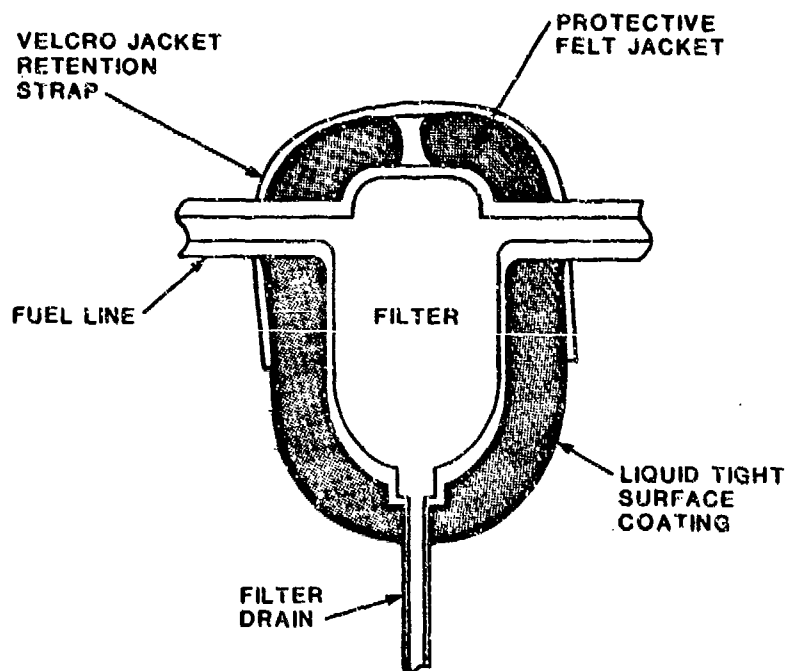


FIGURE 39. FUEL FILTER PROTECTIVE JACKET.

4.3.3.8 Caps and Access Covers. These items play a major role in crash-resistant fuel containment. Since they function as seals for tank openings, their failure could be catastrophic. Caps having a minimum rating of 75 psi

or greater should be used. Access covers should not be the weak link in the fuel tank. They should be capable of carrying loads equal to or greater than those which the tank can withstand.

4.3.3.9 Spillage Control Valves. During the 1980's two valves were designed, developed, tested, and FAA certified for use on light aircraft (Reference 39). These valves, installed in the main engine fuel line before it enters the engine compartment, are designed to stop the flow of fuel to the engine area when the engine is not running, as in a crash. Normally, when a fuel or oil line is broken, fluid will drain out. If this drainage is in the engine area, ignition by the hot surfaces or other sources is likely. The use of breakaway self-sealing valves of either the frangible, one-shot type or the quick-disconnect-coupling configuration can stop the spillage flow, but they require displacement and resistive forces to be triggered or operated. In many small aircraft the structure is simply not strong enough to allow the creation of forces great enough to operate the breakaway valves. The structure can be locally beefed up, cable lanyards could be used, or both if necessary; however, the following approach uses neither.

The spillage control valve assembly (Figure 40) consists of a valve body assembly, pilot-pressure operated check valve components, a manual by-pass plunger, a manual by-pass control cable assembly, and associated seals and O-rings. The valve body is a four-piece aluminum unit with integral mounting, pilot-pressure, and inlet and outlet bosses. The pilot-pressure operated check valve components consist of a stainless steel poppet and guide bushing, an aluminum piston, and a valve seat integral to one of the portions of the valve body. The manual by-pass plunger is a double-sealed stainless steel unit and retains the cable of the manual by-pass control cable assembly by means of a setscrew.

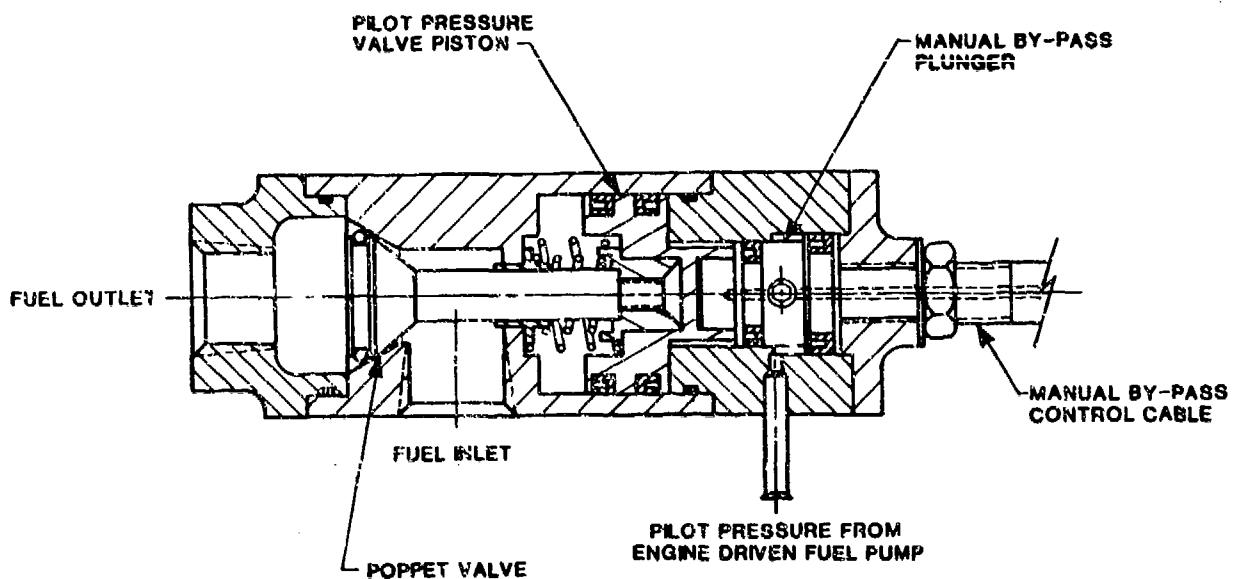


FIGURE 40. SPILLAGE CONTROL VALVE ASSEMBLY.

The manual by-pass control cable assembly is a simple push-pull cable assembly with a solid stainless steel wire core and nonmetallic outer housing. Operation of the manual by-pass is by means of a lever-type actuator assembly.

When the aircraft engine is operating under normal conditions, fuel is drawn from the fuel tanks through fuel lines to the fuel reservoir tanks and fuel selector valve located in the area below the cabin floor. From the selector valve, the fuel then passes through a line to the spillage control valve. Fuel enters the spillage control valve assembly through a port located on the side of the valve body assembly, passes through the internal valve components and exits via a boss located on the end of the valve body. The fuel then passes through the engine start boost pump to the airframe-mounted fuel strainer and on to the engine-driven fuel pump.

The valve, previously mentioned as being integral to the spillage control valve assembly, is more accurately described as a pilot-pressure-operated check valve. When the aircraft engine is operating under normal conditions, the check valve is held open by the stem of a piston that is in contact with the valve poppet. The force exerted by the piston stem on the check valve poppet overcomes the poppet's spring-biased closing force to keep the valve opened. The piston force is developed by means of restricted flow unmetered fuel pressure (pilot pressure) from the engine-driven fuel pump applied to the face of the piston opposite the stem. At all engine operating speeds there is sufficient unmetered fuel pressure to provide sufficient opening.

Statically, when the aircraft engine is not operating and the engine start fuel boost pump is off, fuel is prevented from flowing past the engine firewall by the spillage control valve assembly. In the static condition, no unmetered fuel pressure (pilot pressure) is available to the modified fuel system's spillage control valve assembly. The piston of the pilot-pressure-operated check valve, located within the spillage control valve assembly, can develop no subsequent piston force to overcome the spring-biased closing force on the check valve poppet, and the valve remains closed.

It should be noted that in the certified system design the maximum head pressure produced by the fully filled wing tanks against the poppet of the pilot-pressure-operated check valve is approximately one-half of the pressure required to open the poppet.

Under conditions in which sudden engine stoppage is encountered (i.e., propeller strike, fuel system line failure, or foreign object ingestion), the spillage control valve assembly reacts to the loss of unmetered fuel pressure and prevents fuel flow past the engine firewall. The condition of sudden engine stoppage would be identical to the static condition of the system.

Normal starting and aircraft engine operation on aircraft equipped with the modified fuel system is in accordance with the normal aircraft procedure, with the exception that the manual bypass lever of the spillage control valve must be actuated prior to actuation of the start fuel boost pump. Subsequent to starting of the engine, the manual bypass lever should be returned to the "Normal" position.

In-flight restart of the aircraft engine on aircraft equipped with the spillage control valve is also in accordance with the recommended normal aircraft procedure, with the exception of actuation of the manual bypass lever prior to actuation of the start fuel boost pump. Subsequent to a successful engine restart, the manual bypass lever is to be returned to the "Normal" position.

The valve is designed so that failure of pilot fuel pressure to reach the valve, i.e., pilot pressure line breakage, will not cause engine stoppage. The engine-driven fuel pump can pull enough fuel through the spillage control valve to obtain the maximum, as well as idle, engine power. Operating with the valve in this mode is similar to operating in the bypass mode of a filter or similar type component. Should the pilot pressure fuel line break (rupture), the resulting spillage can be prevented or held to a minimum by incorporating a self-sealing breakaway valve, a flow restricting orifice, or both.

4.3.4 Fuel System Full-Scale Crash Test

Consideration should be given to conducting a crash test with the complete crash-resistant fuel system in enough of the airframe to create a realistic situation. Alternatively, if a complete airframe, including landing gear, fuel tanks, occupants (dummies), etc., is to be drop-tested to demonstrate crash resistance, it is recommended that the complete fuel system be installed and filled with colored water to demonstrate prevention of fuel spillage. Since the subject aircraft can crash in a variety of attitudes and speeds, the attitude and impact velocity for the fuel system test should be representative of the attitudes and velocities used in the crash-resistant design of the overall aircraft. The recommended design velocity changes are listed in Table 5. The reader is referred to Volume II for a complete discussion of crash design conditions.

TABLE 5. SUMMARY OF DESIGN VELOCITIES
FOR ROTARY- AND LIGHT FIXED-
WING AIRCRAFT

<u>Impact Direction</u>	<u>Velocity Change (ft/sec)</u>
Longitudinal	50
Vertical	42
Lateral*	25
Lateral**	30

*Light fixed-wing aircraft, attack
and cargo helicopters.

**Other helicopters.

4.4 OIL AND HYDRAULIC FLUID CONTAINMENT


Oil and hydraulic fluid spillage often occurs in aircraft accidents. Fortunately, these fluids are carried in much smaller quantities than fuel. However, they are easily ignited; oil is usually carried hot, which makes ignition easier; they are pressurized in places, which converts them into mists when they are released, making ignition easier; and they are often carried near the hot engine, which can readily provide ignition. When oil or hydraulic fluids are ignited, they, by themselves, constitute a low threat to aircraft occupants. But, unfortunately, they function as ignition sources for other combustibles, especially spilled fuel. Further, they migrate throughout the wreckage, carrying with them flames that otherwise would not be present. Oil and hydraulic fluid spillage, therefore, should be prevented at all reasonable cost.

Most of the crash-resistant design criteria presented for the fuel tanks, lines, and supportive components also apply to these fluid systems. Because of their relatively small capacities, properly protected metal tanks may be used. It should be recognized, however, that metal tanks are punctured easily and are not tear resistant. If tank puncture is likely, several alternatives are available: a crash-resistant tank, like the fuel tank, can be used; the tank can be relocated to a safer area; or the tank can be shielded.

Experiments have been performed to determine the practicality of shielding a metal oil tank with a 1/2-inch-thick felt cover made of ballistic nylon, as shown in Figure 41 (Reference 39). As an added degree of spillage protection, the outside surface of the felt was coated with a thin layer of polyurethane resin to make it leakproof. Since preliminary experiments proved satisfactory, a similar system was crash-tested in a U. S. Army UH-1 helicopter. The tank sustained severe impact damage, rupturing a tank seam. The spillage leaked out into the felt cover, but did not escape from the felt due to the polyurethane coating. This system is simple, light in weight, easy to install, and relatively low in cost. A similar felt or multi-ply cloth tank cover is now being used, with a high degree of success, to surround the crash-resistant fuel bladders carried in all Indianapolis-type racing cars.

When metal lines must be used in these systems, they should be designed to incorporate a coil or two of extra line length so that the line can stretch to accommodate some structural distortion. Also, the lines should be attached to the airframe with clamps that will fail and release the fluid lines before the line itself fails, thereby allowing the line to change its routing to help accommodate structural distortion.

Hydraulic fluids that inherently resist burning should be used whenever possible (Reference 40). Most of these fluids, however, have operational and maintenance problems associated with their use. Therefore, designers may wish to consider the trade-off of using conventional hydraulic fluids, as compared with using fire-resistant fluids. It should be noted that, even though the new fluids are fire resistant, most of them will still burn at higher temperatures, especially when in a mist state. The characteristics of each fluid must be studied before the final trade-off decision is made.

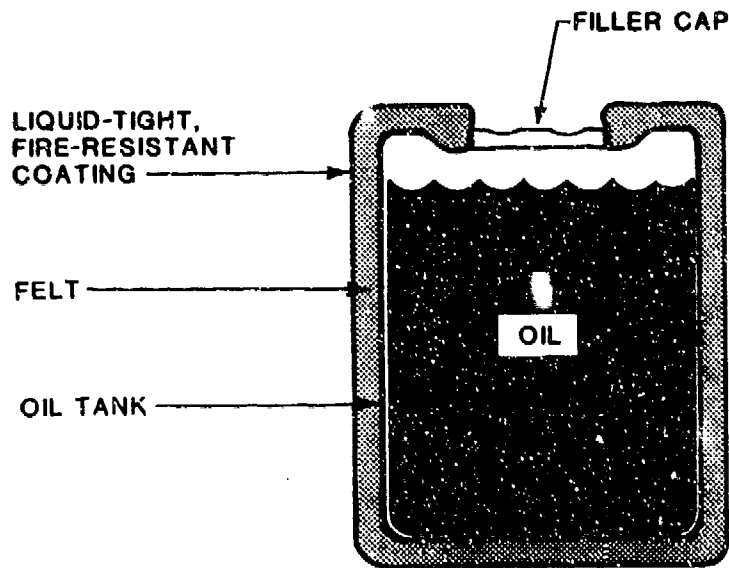

NOTE: THE FELT IS NOT BONDED TO THE OIL TANK.

FIGURE 41. FELT OIL TANK COVER.

4.5 FUEL MODIFICATION

One method for decreasing the postcrash fire potential is to decrease the susceptibility of aircraft fuels to dispersion and atomization, reducing the formation of combustible fuel/air mixtures. This can be done through the use of fuel modification additives. These modifying agents have been classified as either antimist, emulsification, or gelling additives. The blending of these additives into standard aviation fuels provides fuel properties that decrease the tendency to disperse, atomize, and form fuel mists following crash-induced fuel system failures. As a result, retardation of fuel mist fireballing and fire propagation can be achieved.

Studies have been conducted to determine the feasibility of providing post-crash fire protection through the use of antimist fuels, emulsified fuels, and gelled fuels including full-scale crash tests, such as the jointly sponsored NASA/FAA Boeing 720B crash impact demonstrations (References 41 through 47).

This approach has been somewhat successful when used with low volatility fuels such as JP-5, JP-8, and Jet A. However, modification of highly volatile fuels, such as JP-4 and aviation gasoline, has not been effective. Emulsified and gelled fuels have received little attention recently due to their inherent system compatibility problems. Further, consideration of modified fuels has declined since the development and use of crash-resistant fuel systems in rotary-wing aircraft. However, the possible use of antimist fuels in fixed-wing aircraft where crash-resistant fuel tanks are less feasible has generated recent interest.

Although turbine engine performance is not adversely affected by use of anti-mist fuel blends, it has been found that these fuels must be degraded before starting and restarting a turbine engine with a standard fuel system. During startup, the characteristics of the anti-mist fuel suppress the atomization of the fuel through the fuel nozzle, thus starving the initial ignition. To alleviate these problems, processes are being investigated that will reverse the anti-mist fuel blend so that the fuel can return to its near normal state prior to introduction into the aircraft fuel feed system.

4.6 IGNITION SOURCE CONTROL

Flammable fluids will ignite throughout a wide range of temperature, pressure, atmospheric composition, and ignition source conditions. Generally, ignition of spilled combustibles during the crash occurs from one or more of the following: electrical sources, flames, hot surfaces, and friction sparks. Components most usually involved in the ignition process include the engine, exhaust system, heater, battery, wiring system, and various light bulbs. References 48, 29 and 32 discuss the fuel spillage and ignition situation as it applies to aircraft. The discussion under Section 4.2, Flammable Fluids, in this volume can also help the designer to understand the nature of the fuel spillage problem.

4.6.1 Electrical Sources

The aircraft electrical system is a potential crash-fire ignition source, because it is distributed extensively throughout the aircraft and because electrical discharges are able to concentrate a high amount of energy into a small volume.

Disruption of a current-carrying electrical circuit can result in fuel ignition by electrical sparks and arcs that are released when exposed wires contact grounded surfaces. Ignition also can be provided by wires that have been heated either by short circuiting or by normal means, as in an incandescent light filament. The common incandescent filament in a landing light is hot enough to ignite fuel 0.75 to 1.50 sec after bulb breakage.

Perhaps the most important aspect of an electrical discharge ignition source is the great amount of energy present compared with the small amount actually required to produce fire ignition under ideal conditions. Approximately 0.15 millijoule (0.11×10^{-3} ft-lb) is the minimum energy for spark ignition under ideal temperature, pressure, and mixture conditions.

The ignition potential of the aircraft's electrical system may be reduced by aircraft modification at the system level and at the component level. The system level approach is concerned with de-energizing electrical generation or storage systems, whereas the component level approach is concerned with component location and environment.

4.6.1.1 System Level Approach. Reduction of crash-fire ignition by the electrical system can be achieved by removing from the electrical circuit all electrical generation or storage systems before or during the early phases of the crash sequence. The de-energizing can be accomplished by opening the electrical circuit at the output terminals of each energy-producing component.

The time required for this de-energizing operation is of utmost importance. Crash-fire data previously reported by NACA, using both aviation-grade gasoline and low-volatility fuel, indicate a minimum time of 0.7 sec between impact and fire ignition with the electrical system as the source. During helicopter crash tests by AvSER, it was observed that fire started to propagate approximately 0.58 sec after ground impact. During tests with simulated fuels, massive fuel spillage was in progress as early as 0.20 sec after impact. Therefore, each de-energizing device must be capable of activation within a maximum time of 0.20 sec.

The primary items to be considered for de-energizing are the batteries, generators, and inverters. Several precautions must be taken. Since the battery can remain a potential ignition source for hours after a crash, ends of wires severed from batteries must be prevented from contacting the structure and thereby providing a new ignition source. The generators and inverters cannot be satisfactorily de-energized by simply opening field circuits. There is a considerable time lag (0.385 sec for a rotating inverter) between DC input cutoff and AC output termination (Reference 49). Therefore, for complete safety, these components must be disconnected from buses on their output sides. NACA also recommended that consideration be given to grounding the armatures of main electrical components close to those components (Reference 50).

Magnetos and igniters are of special interest, since they are high-energy sources of ignition. If these components were de-energized, the fuel in the engine during the crash event would not be ignited. However, raw fuel then would be pumped into the hot exhaust manifold, resulting in a fire. Crash-fire research has demonstrated that it is better to turn the fuel off and to leave the ignition system on throughout the crash sequence (Reference 49).

Relays can be used to de-energize components and to activate other inerting elements. In the case of batteries, only nonessential buses should be disconnected initially. Power must be provided to other elements of the crash-fire prevention system until these elements have completed their design functions. A time-delay unit can be used to cut off power to inerting elements and to ground the disconnected buses. An alternative to a relay contact is the explosive cable cutter shown in Figure 42. The electrical system inverters must, in any case, be capable of resetting components in the event of inadvertent operation.

4.6.1.2 Component Level Approach. The ignition hazard associated with the electrical system can be reduced at the component level by controlling component location and environment. The following guidelines are applicable to batteries, inverters, generators, alternators, magnetos, igniters, radar, antennas, and lights.

Components should be located above and away from flammable fluid sources. Leaking flammable fluid should not come in contact with electrical equipment or wiring as a result of gravity, airflow, or battle damage. The electrical system components should be located, and suitably mounted, in areas where anticipated impacts will be minimal and where maximum anticipated structural deformation will not result in structural impingement on either components or wiring. Wires should have 6-in.-diameter loops near their component connections to accommodate any wire tensioning resulting from structural deformation. All wire connections should be made on a component's least-vulnerable

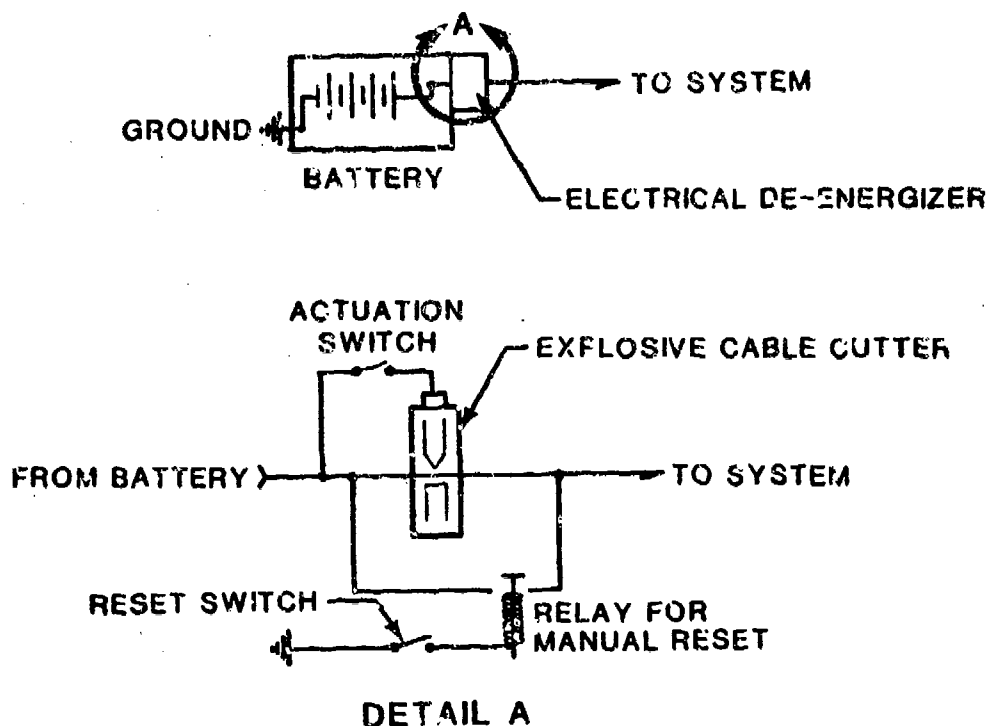


FIGURE 42. CABLE CUTTER DE-ENERGIZING METHOD.

side. Batteries, inverters, and generators should be mounted in compartments lined with tough, nonconductive shields. The shields will prevent sparking between terminals or severed wires and the aircraft structure. The components should be mounted to the aircraft with structural attachments capable of withstanding 30 G loads in any direction.

Electrical wires should be routed along the strongest structural members and should not, in general, traverse areas of anticipated severe structural deformation, e.g., in leading edges of wings or in the lower regions of the fuselage. Wires that must pass through areas of anticipated structural deformation should be approximately 20 to 30 percent longer than necessary. The extra length should be accumulated in the form of loops or S-shaped patterns and located at the areas of anticipated structural deformation. When wires pass through structural openings or bulkhead holes, the openings should be 8 to 12 times larger than the wire diameter and appropriate grommets should be provided. The wires should be attached to the aircraft structure with clamps or ties that will fail before breaking the wire. Nonconductive shields should surround all areas where wire abrading or cutting may occur. Wire bundles have been wrapped with 1/4-in.-thick ballistic nylon felt, successfully preventing the wires from being cut during crash tests of aircraft. Wires should not be routed near flammable fluid sources.

The mounts for antennas and lights should be attached to the aircraft with frangible structures. The wires should incorporate a shielded covering and/or a breakaway capability. A suggested installation technique for a rotating beacon is illustrated in Figure 43. This approach should also be used

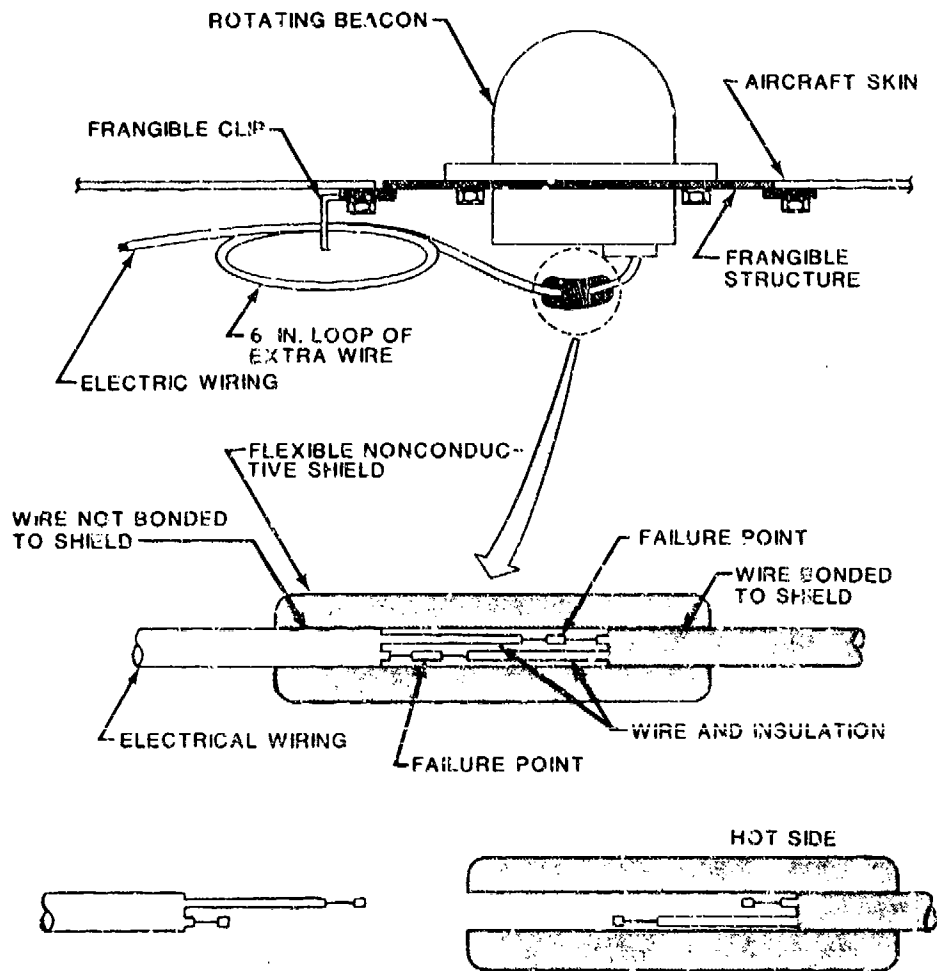


FIGURE 43. ROTATING BEACON INSTALLATION.

wherever bayonet-type connectors can be used, such as fuel transfer or primer pumps. Structural impingement upon the component will be difficult because the frangible mounting structure will allow the beacon to displace. The extra wire contained in the loop can allow for considerable beacon movement without failing; if massive displacement is anticipated, shielded failure points can be used. These same techniques apply for all similar types of components.

4.6.2 Engine

The two principal engine ignition sources are (1) intake, combustor, and exhaust flames and (2) hot metal surfaces. The differences between these two relate to the time that these sources persist after a crash, the manner in which ignition occurs, and the mode of propagation of the resulting fire out of the engine.

4.6.2.1 Flames. Heaters and engine inlet and exhaust flames are responsible for the ignition of many crash fires. During the crash sequence, flames often appear when heaters are torn open or their exhaust systems are separated. Flames also appear at the engine inlet and exhaust due to engine breakup or rapid changes in engine loading, as can occur when a drive shaft is severed or a propeller is sheared.

Flames also appear at these locations when engines ingest spilled fuel. Turbine engines are highly susceptible to fuel ingestion because of the relatively long period of time required for the turbine to coast to a stop. The ingested fuel-air mixture enters the downstream end of the combustor, where flames may persist for up to 18 sec after fuel cutoff. The ingested mixture then burns in the tailpipe downstream of the turbine (Reference 51). Also, under the proper conditions, the combustor flame may propagate upstream through the ingested mixture and exit at the engine inlet.

The occurrence of engine inlet and exhaust flames and the resulting ignition hazard can be reduced by stopping the fuel flow, by inerting the flame source, and by providing shielding to prevent fuel spillage from entering anticipated flame areas. The engine fuel valves should be closed, but the ignition system should be left on to permit normal burning of ingested fuel in order to prevent undesirable exhaust or inlet flames.

4.6.2.2 Hot Surfaces. The probability of flammable fluid ignition due to contact with a heated surface during a crash is high and can remain so for several minutes after a crash. The circumstances leading to ignition are somewhat involved; however, generally, they are dependent upon the type of flammable fluid involved, temperature of the fluid, composition of the heated surface, temperature of the heated surface, geometry of the heated surface, ratio of the fuel to air, and the degree of fuel atomization.

Ignition temperatures vary widely. As a general rule, hydraulic and lubricating oils ignite at lower flat-plate temperatures than aviation gasoline. JP-4 also has a lower flat-plate ignition temperature than aviation gasoline. The lower grades of gasoline have lower ignition temperatures than the higher grades. Kerosene has a lower ignition temperature than JP-4.

The ignition temperature of a flammable fluid is directly related to the initial fluid temperature. While the fuel temperature can vary considerably, depending on temperature at altitude, on the ramp, and at the storage facility, the temperature of the oils is of more concern. As mentioned, oils can ignite at a temperature lower than most fuels, and since they are carried in the heated state, low hot-surface temperatures and exposure times will provide ignition. Oil fires can, in turn, act as ignition sources for the fuel.

The time between fuel contact with the heated surface and fuel ignition is directly related to the temperature of the heated surface. As shown in Figure 44, the hotter the surface, the faster ignition can occur. Also, it can be seen that ignition can occur at a much lower surface temperature if the exposure, or residence time, is longer.

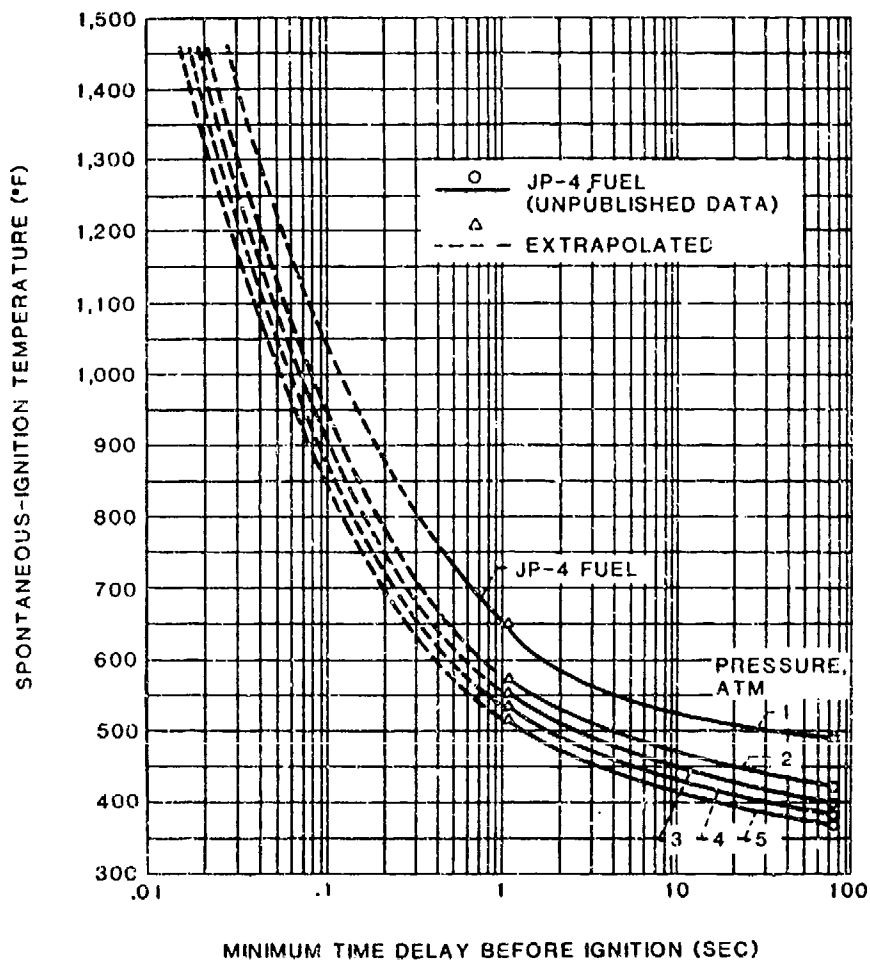


FIGURE 44. JP-4 IGNITION DELAY VERSUS SURFACE TEMPERATURE (TAKEN FROM REFERENCE 50).

The ratio of fuel to air also governs the probability of ignition. The designer must assume that the proper ratio does exist somewhere within the spillage area.

The potential hot surface ignition sources on aircraft with reciprocating engines are the intake systems, the exhaust gas disposal systems, heaters, and the higher temperature regions of the cylinders. Ignition sources on turbojet engines include the internal areas downstream of the compressor, externally from the compressor area aft, including the tailcone and tailpipe, and, in some designs, the bleed air system. The gas flow through a turbojet engine may be too rapid to permit the ignition of ingested combustibles on hot metal in contact with the main gas stream. However, a portion of the engine airflow is diverted to hot surfaces not in the main gas stream where ignition may occur.

The hot surface ignition hazard can be reduced by methods analogous to those used with the inlet and exhaust flame hazards. An inerting system can be used to reduce the temperatures of hot surfaces to predetermined acceptable levels and to surround the hot surfaces with an inert atmosphere to prevent ignition from occurring should flammable fluids be spilled on these surfaces. In previous studies, hot surfaces have been cooled to temperatures ranging from 400 °F to 760 °F with satisfactory results (References 49 and 52). The temperatures to which hot surfaces must be cooled to prevent ignition must be determined as a function of the fuel and the engine configuration to be used; however, 400 °F should be used as the upper limit for safe hot surface temperatures.

Shielding also can be used to prevent spilled flammable fluids from reaching the hot surfaces.

4.6.2.3 Inerting Systems. The function of inerting systems is to render ignition sources harmless and, therefore, to prevent fire or explosion. Inerting systems can be designed to surround hot surfaces with an inert atmosphere or to place an inert atmosphere in an area where an ignition source is likely to appear. With an inerting system, there is not sufficient oxygen to support combustion when flammable fluids contact the ignition sources. These systems also can be designed to perform the additional function of cooling hot surfaces to temperatures below the ignition temperatures of flammable fluids. References 53 through 58 discuss various inerting concepts, including the onboard inert gas generator system (OBIGGS) and Halon, which are being used with some success today. Knowledge of temperature gradients and cooling rate characteristics for each particular hot surface is required in order to design an adequate cooling and inerting system.

Inerting systems which also cool must be capable of providing a high-discharge-rate liquid spray for rapid cooling, a lower-discharge-rate liquid spray over the more massive hot surfaces for a longer period of cooling and inerting, and a follow-up inerting spray. Water is a preferred coolant because of its high latent heat of vaporization, its availability, and its low cost. Additives to the water can be used to protect against freezing and corrosion of the piping system. Nitrogen and carbon dioxide are among other inerting agents that have been used successfully as follow-up sprays.

Several successful hot-surface and/or flame inerting systems have been designed, tested, and incorporated into current military aircraft. A schematic diagram of a hot-surface inerting system used on a reciprocating engine is shown in Figure 45 (Reference 49). Systems such as this have been installed on aircraft and crash tested. They successfully inerted the engine and exhaust systems, thus preventing crash fires.

Testing of a pyrotechnic gas-generator-type extinguisher system indicates that it offers performance improvements over the pressurized nitrogen-type system (Reference 59). The pyrotechnic system was more effective at low temperatures and with less volatile extinguishing agents, and it eliminated problems associated with the mixing of the nitrogen and the liquid agent.

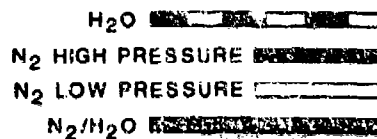
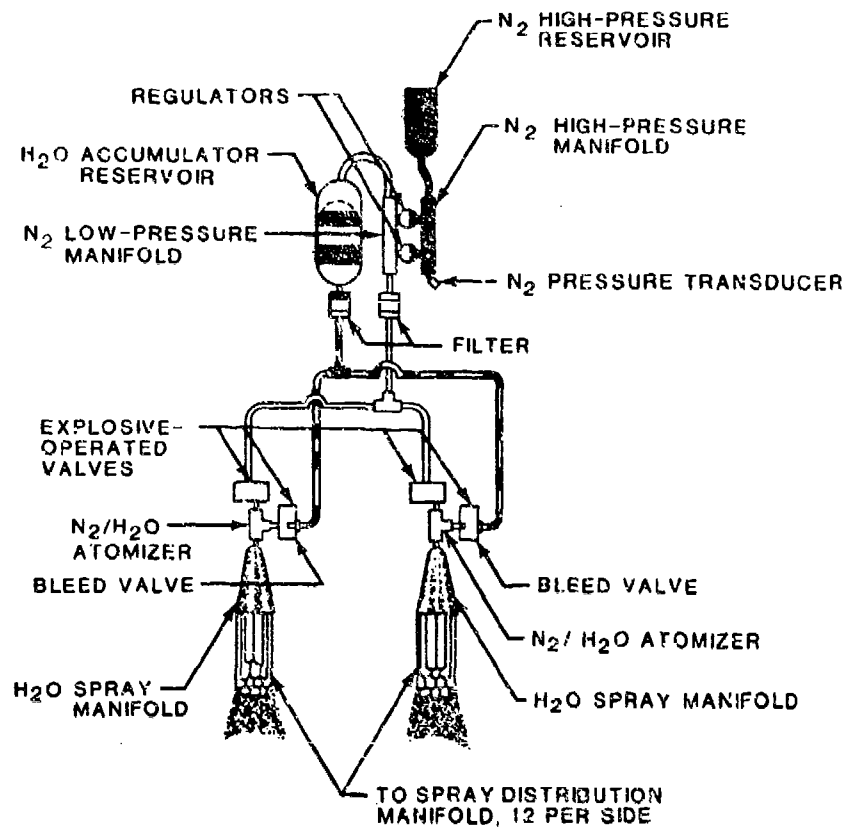


FIGURE 45. HOT SURFACE INERTING SYSTEM.

Flame-source inerting systems are designed to extinguish combustor flames, which linger long after the fuel has been cut off. The flames are a result of the ignition of fuel that remains in the fuel manifold and continues to drip into the combustor. A schematic diagram of a flame-source inerting system used on a reciprocating engine is shown in figure 46. Upon actuation by either a manual or a crash-actuated switch, high-pressure CO₂, or a comparable inert gas, is released into the engine air intake. Concurrently, the high-pressure gas is used to activate linkages that close the fuel inlet valve, the oil inlet valve, and the air intake opening. The large volume of inert gas released into the engine interior quickly dilutes the incoming air to the point of nonflammability, thereby eliminating the flames. As the engine continues to coast to a stop, the inert mixture is pumped through the engine and expelled at the exhaust outlet.

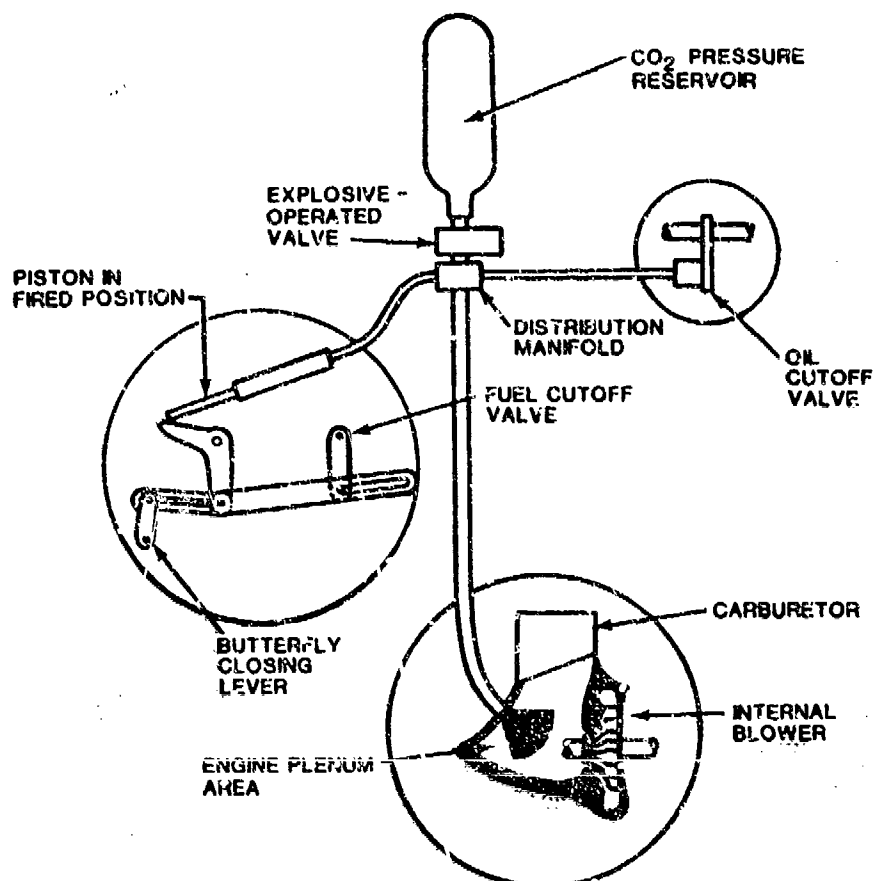


FIGURE 46. FLAME-SOURCE INERTING SYSTEM.

In a turbojet application, the combustor flames were eliminated by providing for rapid fuel shutoff and draining of the fuel manifold. The system is shown in Figure 47 (Reference 51). The fuel was shut off by a pneumatically operated valve installed in the fuel line between the engine fuel-control unit and a modified pressurizing and dump valve. Simultaneously, the manifold drain valves and the modified pressurizing and dump valve opened and vented the fuel manifold overboard. The combustor air pressure, available at the instant the fuel shutoff valve closed, then reversed the fuel flow in the nozzles and manifold through the overboard fuel drains. The combustor flame was extinguished in 0.23 sec by this method.

As is the case with electrical system de-energizing devices, the inerting systems should be operable within 0.20 sec of the sensing of a crash.

Another approach available to the designer for preventing the ignition of flammable vapors, materials, and other items is to keep the areas where these items are located surrounded in an inert atmosphere. References 53 through 58 discuss in considerable detail these new approaches. They include expelling various Halon gases into the surrounding captive atmosphere to render it incapable of supporting combustion. Halon systems can be used in occupiable

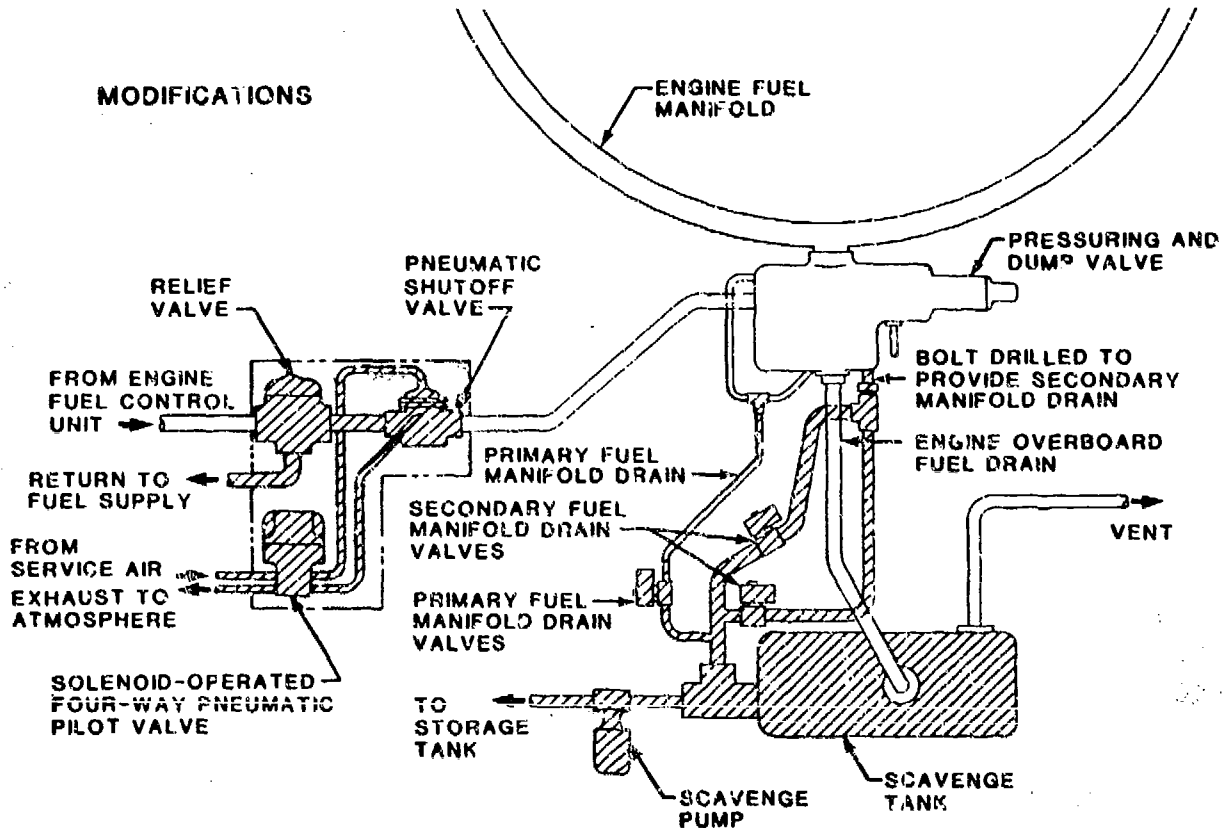


FIGURE 47. SCHEMATIC DIAGRAM SHOWING FUEL SHUTOFF AND DRAIN SYSTEM IN J57 ENGINE CRASH-FIRE PROTECTION SYSTEM.

areas as well as in the ullage space inside fuel tanks. Nitrogen is also used as the inert gas, and recent research has resulted in the development of the OBIGGS which processes engine bleed air into an oxygen-depleted product. The inert gas, consisting of 91 to 95 percent nitrogen, keeps the fuel tank ullage inert and thus eliminates the threat of fire or explosion due to combat-induced damage or natural ignition sources such as lightning. Care should be taken to keep the tank overpressure at a minimum to prevent excessive leakage and/or misting of fuel if tank puncture or tearing occurs.

The performance of the OBIGGS overcomes many of the concerns and logistic problems associated with the state-of-the-art liquid nitrogen (LN₂) systems. A life-cycle cost analysis indicates the IGG will cost 60 percent less than the LN₂ system. In an LN₂ system, the primary factor affecting the cost is the need to replenish the LN₂ after every two flights. The OBIGGS, a self-contained independent system, provides the logistic independence required to meet the requirements of various military operational scenarios.

4.6.2.4 Shielding. Shielding is an effective method of preventing flammable fluids from reaching potential ignition sources. Shielding can take many forms; however, there are three general methods in use, with a fourth now in the development stage.

The first method of shielding uses baffles. Metal or other rigid paneling will not satisfy the shielding requirement because of its inability to maintain an effective seal in areas of large structural displacement. Sealed curtains or baffles made of fire-resistant cloth or similar material can perform satisfactorily. The only requirement is that they must seal all openings through which flammable fluids could travel to an ignition source. To accommodate the anticipated structural displacement, it is suggested that all curtains and shields be at least 30 to 40 percent larger than the minimum size required to protect a given area. Figure 48 illustrates how the flexible curtain concept was used to keep fuel from entering the occupiable areas on an experimental test helicopter.

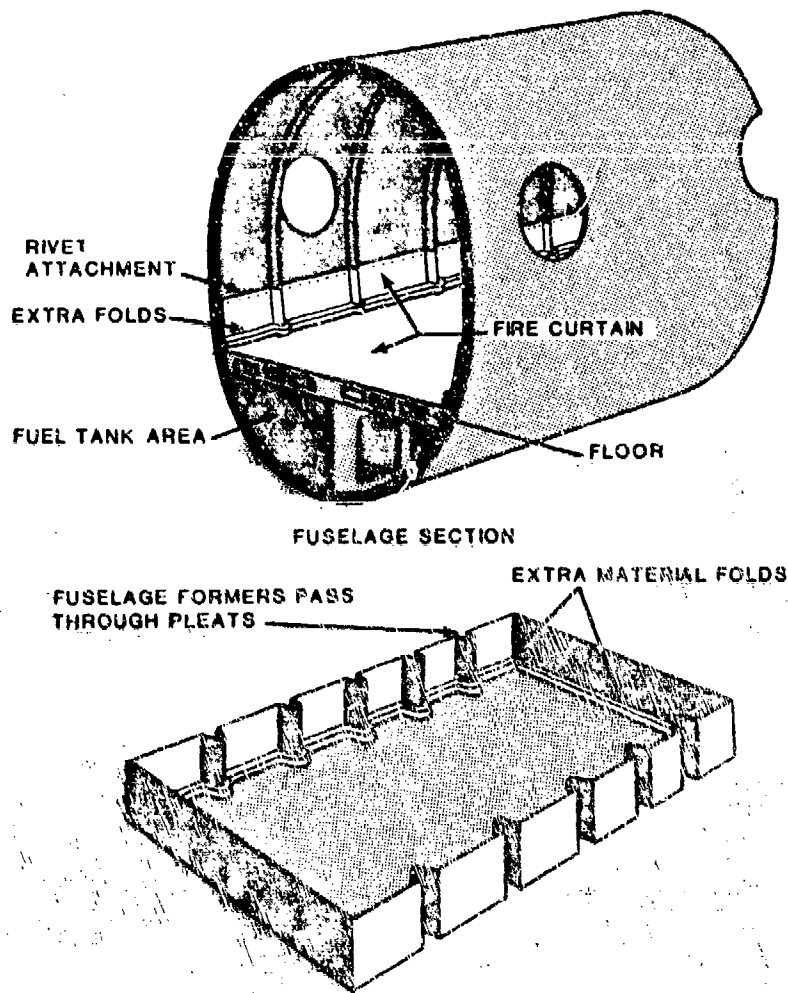


FIGURE 48. FUEL Baffle AND FIRE CURTAIN CONCEPT.

The second method of shielding uses spillage flow diverters or drip fences. Once liquid has settled onto a sloping surface, it flows to the lowest point. It can flow on top of a surface, or it can cling to the underside. In either case, it can travel a considerable distance to an ignition source. Chordwise drip fences should be located on the wing on each side of wing-mounted engines. Drainage holes should be strategically located within the aircraft structure to drain internal spillage. All areas containing electrical components should be surrounded with a spillage gutter, or drainage trough, to prevent flowing spillage from entering those areas.

Each engine and exhaust system mount should incorporate a drip fence. Figures 49 through 51 illustrate several types of drip fence fuel-flow diverters.

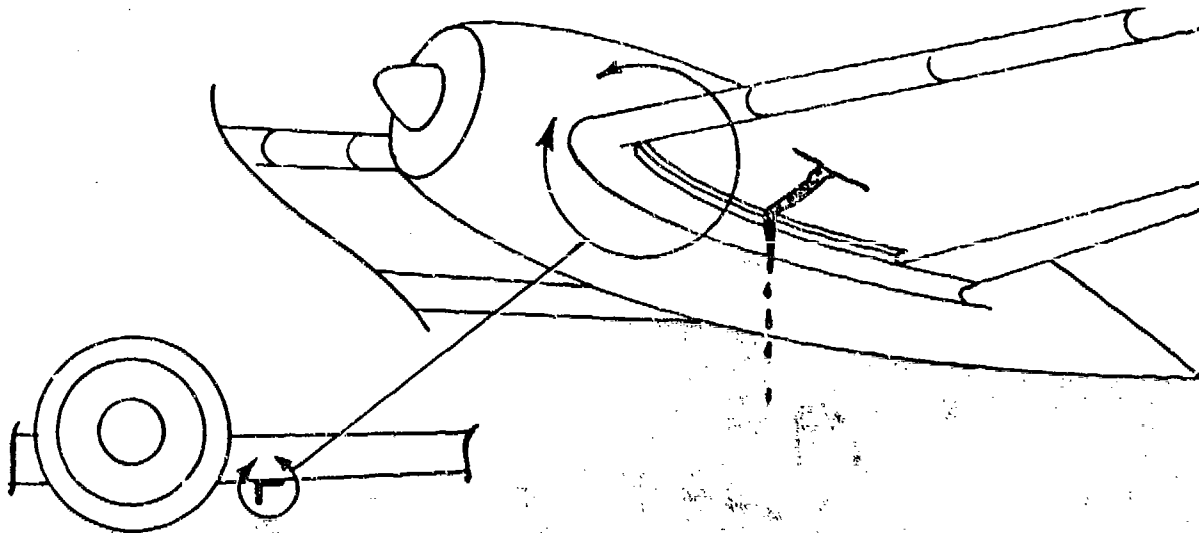


FIGURE 49. EXTERNAL DRIP FENCE.

The third method of shielding uses nonconductive flexible paneling. This type of paneling should be used as a liner for electrical compartments and other regions where electrical components are installed. It should surround areas of electrical wire groupings such as terminal strips and power control areas. Nonconductive flexible shielding also can be used for shrouding or enveloping electrical wiring. The shielding should be used in all places where structural shift or collapse could cause an impingement on electrical wiring or related components.

The fourth method of shielding uses protective coatings or surfaces. Studies have produced materials that, when heated or exposed to other environments, expand to insulate and protect the surface to which they have been applied. Intumescent paints are an example of this form of shielding. Studies continue to show that the skins of aircraft fuselages burn through quicker when

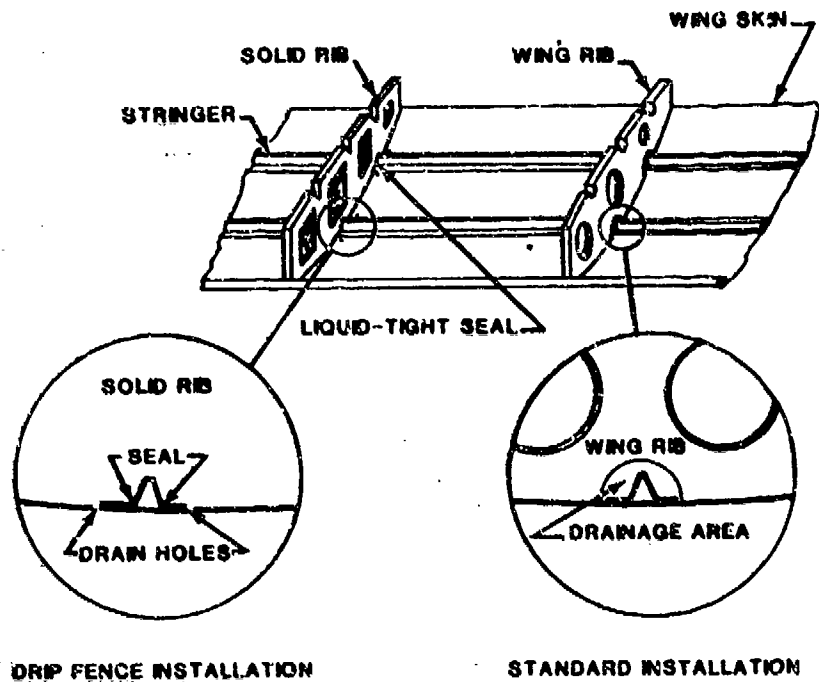


FIGURE 50. INTERNAL DRIP FENCE.

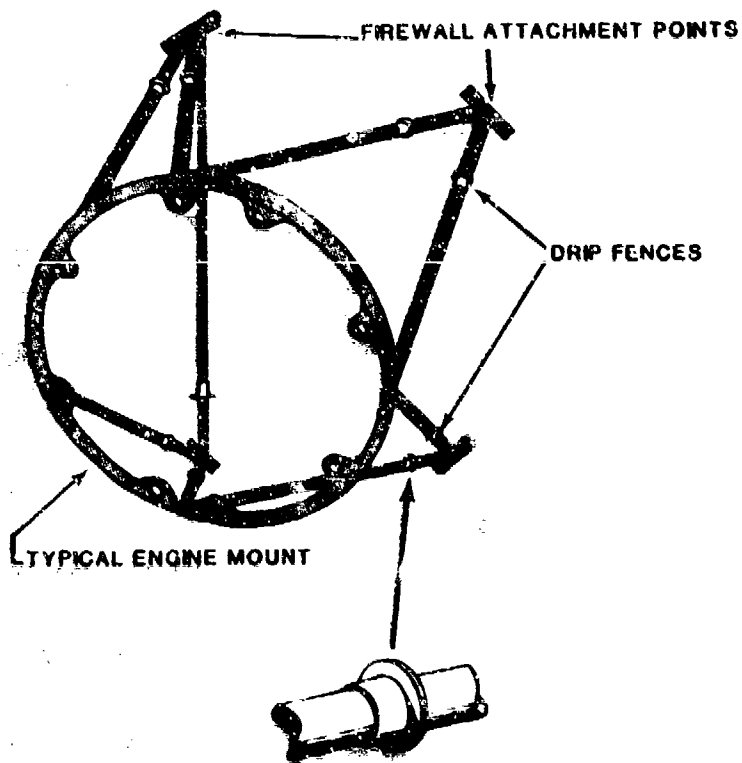


FIGURE 51. FUEL FLOW DIVERTERS.

subjected to external fires if the fuselage interior is insulated. Unfortunately, from the standpoint of delaying the burn-through time, the insulation is on the wrong side of the skin. Coating the outside of a fuselage with intumescent paint is one way to delay burn-through; however, when determining the location for intumescent paint applications, it should be considered whether or not the specific paint used has a toxic out gas problem.

4.6.3 Heaters

Heating units often are provided in aircraft cockpits and passenger compartments. These units, which also supply deicing air, may be either combustion or engine bleed-air types.

Bleed-air heaters normally use air from the compressor section of the engine. Hot-surface ignition sources on turbojet engines are downstream of the compressor section, and if the temperature is below 400 °F, the piping system that carries the bleed air to a mixing chamber should not be an ignition source. If a temperature survey indicates that the system produces temperatures above 400 °F, suitable inerting and/or shielding should be provided.

Combustion heaters will produce hot metal surfaces that should be treated as potential ignition sources. The surfaces of the heater that become hot enough during normal operation to cause ignition of crash-released flammable fluids must be determined, and a cooling-and-inerting system must be designed. The coolant must not be an irritant to aircraft occupants. A water-detergent solution was used in the cooling-and-inerting system described in Reference 60.

4.6.4 Sparks

Two types of sparks should be considered potential ignition sources: friction sparks and electrostatic sparks. The friction spark is a particle abraded from a parent material through contact with a moving surface. Initially, the particle is heated by friction. If the friction is great enough, the particle can burn, thus increasing its temperature. Electrostatic sparks result from the discharge of an electrostatic charge accumulated on parts during normal operation. The discharge is triggered during the crash when the parts are separated due to crash forces.

4.6.4.1 Friction Sparks. Friction sparks become possible ignition sources when portions of aircraft structure are scraped along the ground. While all common metals can be abraded, not all spark sufficiently to ignite spilled fluids. Ignition occurrence depends on the thermal energy of the spark. The thermal energy is a function of the bearing pressure with which the metal is abraded, the slide speed of the metal structure, the hardness of the metal, and the temperatures at which the metal particles will burn.

NACA has conducted research on the friction spark ignition hazard relative to crashed aircraft (References 52 and 61). Some results of this research are listed in Table 6. These studies indicated that aluminum was the safest of the metals tested, since it produced no visible sparks and did not ignite combustible mists at the highest bearing pressure and greatest slide speeds tested. Of all the metals tested, titanium ignited the combustible mist most readily; however, stainless steel, chrome-molybdenum steel, and magnesium all ignited the mist at slide speeds and bearing pressures less than those expected during a crash.

TABLE 6. MINIMUM CONDITIONS UNDER WHICH CERTAIN
ABRADED METAL PARTICLES WILL IGNITE

Material	Minimum Bearing Pressure (lb/in. ²)	Drag Speed (mph)
Titanium	21-23	Less than 5
Chrome-molybdenum steel	30	10
Magnesium	37	10-20
Stainless steel	50	20
Aluminum	1,455*	40

*Ignition was not obtained with aluminum.

The spark hazards of composite materials are the subject of current study. Tests such as those mentioned above are being conducted with these materials to determine their friction spark ignition potentials.

There are two practical methods of reducing the friction spark hazard. One is to use shielding to prevent the fuel from reaching the spark-producing area, and the other is to build the probable contacting surface out of materials having little or no spark-producing tendencies.

As stated above, aluminum was the least likely metal to ignite spilled flammable fluids. Building all aircraft structures likely to come in sliding contact with the ground out of aluminum can reduce the spark hazard; however, it must be pointed out that aluminum also is easily abraded. It can tear when sliding, thereby exposing other metals that might spark and ignite the spilled fuel. Therefore, the areas most apt to come in sliding contact with the ground should be reinforced so that longer contact times are possible without skin failure due to abrasion. Particular attention should be given to attachment points for hoists, landing gears, and other components located in anticipated impact areas. Also, particular attention should be given to the location of steel bolts, nuts, and washers. All too often an otherwise spark-free area is contaminated by locating a spark-producing bolt or nut within it.

4.6.4.2 Electrostatic Sparks. During the course of the NACA research, it was noted that electrostatic discharge from a wheel strut caused ignition of a fuel mist and, ultimately, the destruction of the test aircraft (Reference 52). This ignition source was produced by a combination of environmental conditions that would occur infrequently. It may be possible to reduce electrostatic charge buildup by applying coatings to those parts of the aircraft likely to be separated in a crash. Additional research is required to develop methods of eliminating this hazard.

4.6.5 Initiating Systems

A crash-fire prevention system should include an initiating system that senses the existence of crash-fire conditions and causes action to be taken to suppress the ignition sources. The initiating system should meet the following design requirements:

- The system should not be capable of accidental operation as the result of malfunctioning sensors or short circuits.
- The system should be designed to operate automatically upon receipt of coincident signals from redundant sensors.
- The pilot should be capable of operating the system manually and of overriding the automatic signals.
- The system should be designed for positive airborne and ground check-out, with reset capability provided.

Sensors and the discriminating circuitry used to derive the automatic signals must be carefully selected and developed. References 62 and 63 discuss this area in detail. The skill and knowledge of the designers also are important in determining the location and installation of the sensors. A discussion of sensors and criteria for aircraft application are contained in Chapter 8 of this volume (Crash Locator Beacons).

The activating circuitry should be designed to avoid inadvertent operation of the crash-fire protection system. Crash signal redundancy is the key element in any such fail-safe system. This design philosophy is illustrated by the activating circuitry shown schematically in Figure 52. This circuitry was developed for reciprocating, multiengine aircraft by NACA (Reference 64). A signal from any one of three switches will result in the inerting of one of the engines. A fuel tank penetration switch indicates when the wing has been penetrated and will result in de-energizing the electrical circuits within the wing. Either the inerting of an engine or the de-energizing of a wing's electrical circuits will cause a signal to be sent to an arming control box. This signal must be combined with signals from two ground contact switches to actuate the entire inerting system. This requirement for simultaneous signals from different types of initiating switches reduces the possibility of the entire inerting system operating while the aircraft is still in the air.

A schematic of activating circuitry that could be applied to rotary- and fixed-wing single-engine aircraft is shown in Figure 53 (Reference 65). The average reading of four proximity switches is compared with the aircraft's normal landing height. If the average is less than the normal landing height for a period of time that exceeds a preset minimum duration, an arming signal is initiated. A second, independent arming signal provided by a hazard switch is required before automatic operation of the ignition-source suppression system. This hazard switch may be any of the sensors previously discussed. Provisions also are included for pilot input to the arming signal and for pilot override of the entire system.

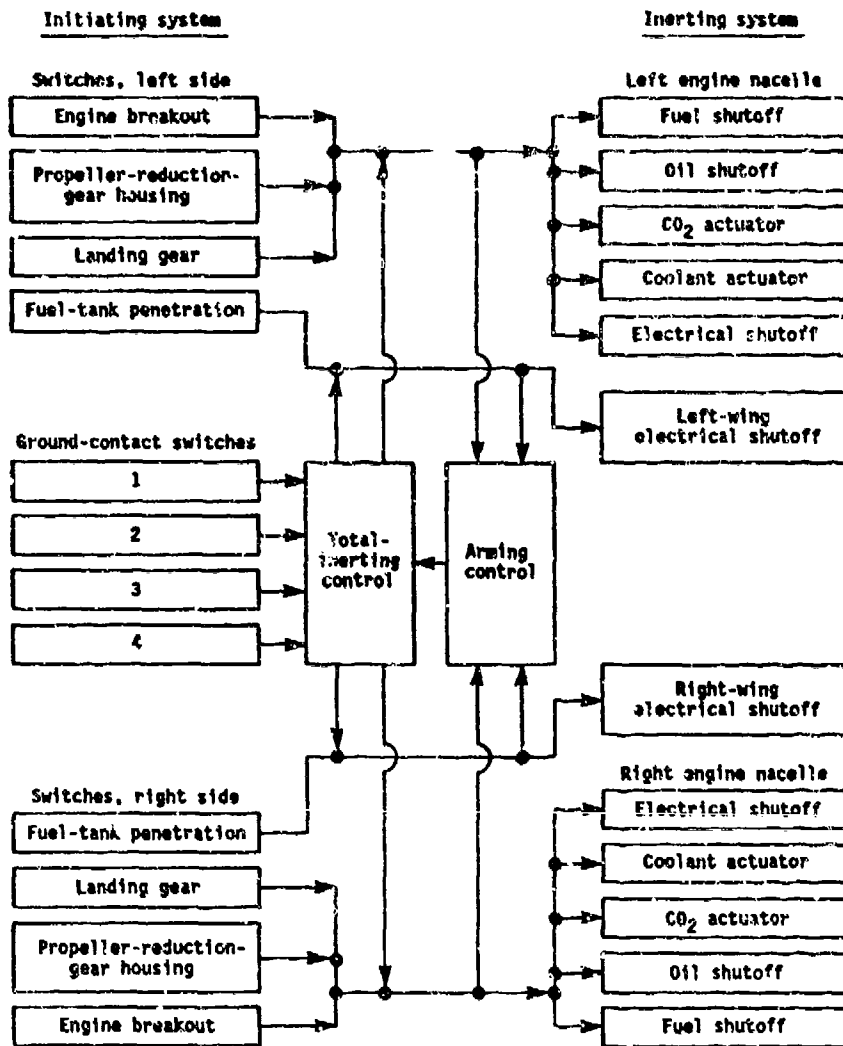


FIGURE 52. BLOCK DIAGRAM SHOWING HOW INITIAL SWITCHES ARE INCORPORATED INTO A CRASH-FIRE-PREVENTION SYSTEM FOR TWIN-ENGINE AIRPLANE.

4.7 FOAMS, HONEYCOMBS, AND MISCELLANEOUS VOID FILLERS

When designing a fuel system to reduce or eliminate the likelihood of flammable fluid vapor ignition due to static electricity, lightning or ballistic impacts, matrix structures have been placed inside the tank. In some applications, such structures have also been located on the outside walls of the tank cavity. Such matrix structures include, but are not limited to, the following:

- Expanded aluminum foil
- Reticulated sponge foam
- Closed pore sponge foam
- Open pore sponge foam
- Rigid plastic foam

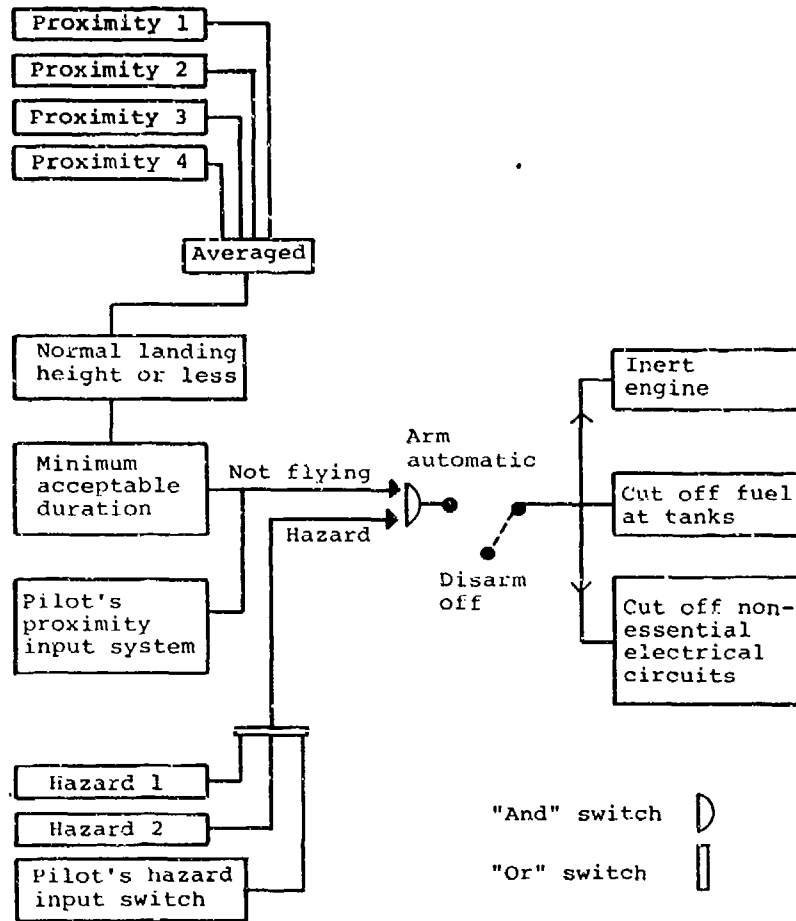


FIGURE 53. POTENTIAL ACTIVATING CIRCUITRY FOR SINGLE-ENGINE AIRCRAFT.

While these structures offer various degrees of protection from the above hazards, they can also become a hazard themselves during a crash. The matrix structures tend, to various degrees, to inhibit fluid movement. They do so by providing a system of infinite baffles or flow interrupters. Unfortunately, if tank openings occur during a crash and fluid is ejected out the openings, the fluid passes through the matrix structure. This tends to atomize the spillage, thereby aiding the ignition process.

If foams and/or expanded metal honeycombs are to be used for noncrash ignition prevention, consider the consequences of spillage during a crash. In areas where spillage from a damaged tank is likely, it is suggested that some form of compartmentation or shielding be employed to isolate the spillage from both the usual ignition sources and the occupants.

5. INTERIOR MATERIALS

5.1 INTRODUCTION

While every effort should be made to prevent a major postcrash fire by containing the fuel, as much protection as possible should be provided for the occupants in case a fire does start at any time. Careful selection of interior materials can slow the spread of smaller fires and give occupants time to evacuate the aircraft safely or to be rescued by other personnel. The protection afforded against in-flight fires is as important as postcrash fire protection. Often, fire-hardening of the aircraft interior can result in a controllable in-flight fire incident rather than a catastrophic fire accident.

It would be desirable to present the designer with a concise list of materials that should be used in aircraft interiors. Unfortunately, this is not possible at the present time for two major reasons. First, the selection of interior materials is dependent on several varied and sometimes conflicting design criteria. For instance, seat cushion materials must possess compressive modulus and rebound characteristics necessary for crash resistance, restraint webbing must meet definite elongation criteria, and seat upholstery must possess a minimum wear resistance. At the same time, these materials should provide maximum fire resistance. Many materials currently available cannot meet all of the criteria simultaneously; thus, priorities must be established and trade-offs must be made. One factor compounding this problem is that, at the time this volume is being written, there is no one place where all material properties, including flammability data, are available. This situation should be rectified shortly when the Urban Mass Transportation Administration data bank is fully operational (see Section 5.5.4).

The second major reason that precludes a listing of recommended materials is that a great deal of activity has been directed toward the development of materials and testing methods in the last few years. This field is still very active and new materials and tests are being developed constantly. The designer should be aware of this and select the best possible materials for the aircraft interior. Many improved materials only now are becoming available or will become available before the Design Guide is revised again.

Because the aircraft designer must choose the materials for the aircraft interior, considering all the necessary criteria that these materials should meet, it is essential that the designer have the knowledge upon which to base intelligent selections and trade-offs. Therefore, the following sections present in some detail the various aspects of material flammability hazards, current testing methods, and flammability properties of some currently used and newly developed materials. Guidelines for making trade-offs between conflicting criteria also are presented. This background information should assist the designer in evaluating and selecting interior materials that will provide maximum fire protection while still meeting necessary design requirements.

5.2 FIRE BEHAVIOR OF MATERIALS

Interior materials can contribute to the overall fire hazard not only by their flammability but also by their release of smoke and toxic gases during combustion. Although the three factors of flammability, smoke, and toxic gases are discussed separately in the following sections, all three must be considered together when evaluating any material for its fire safety.

5.2.1 Flammability

The principal factors to be considered in evaluating the flammability of a material are:

- Ease of ignition
- Flame spread rate
- Heat release rate
- Flash fire potential

5.2.1.1 Ease of Ignition. Ease of ignition can be defined as the ease with which a material can be ignited under given conditions of temperature, pressure, and oxygen concentration. Almost any material can be made to ignite with enough heat, oxygen, and time. Ease of ignition can, therefore, be measured by the amount of heat required under fixed conditions of oxygen and time, by the amount of oxygen required under fixed conditions of heat and time, or by the amount of time required under fixed conditions of heat and oxygen.

Ease of ignition can be inferred from minimum radiation intensities required to ignite the material, from the auto-ignition temperature of the material, or from the minimum amount of oxygen that permits steady burning of the material. These parameters are highly dependent on the conditions under which they are determined. Test parameters such as sample configuration and size, ventilation, type of ignition source, superimposed heat input (heat flux), and heat losses can profoundly affect the test results. Thus, the relative flammability ranking of materials may vary with the combustion test used, since a material may perform well in one test and poorly in another.

Generally, the ignition temperature of a material is lower when the material and the ambient atmosphere are uniformly heated, as compared to situations in which only the material is heated. This is illustrated in Table 7, which lists the minimum autoignition temperatures (AIT) obtained in a closed vessel and the hot plate ignition temperatures in which only the samples were heated (Reference 66).

The time required to ignite a material with a pilot flame is dependent on the intensity of any superimposed radiant heat flux. For instance, under identical test conditions, the time from flame exposure to burning for particle board varies from approximately 1.7 min at a radiant heat flux of 0.9 Btu/sec/ft² to 0.5 min at a heat flux of 2.5 Btu/sec/ft² (Reference 67). The minimum oxygen concentration required for combustion also is dependent on the heat flux seen by the test sample, as shown in Figure 54 (Reference 68).

TABLE 7. MINIMUM AUTOIGNITION TEMPERATURES (AIT) AND HOT PLATE IGNITION TEMPERATURES OF SHEET-TYPE COMBUSTIBLES IN AIR (FROM REFERENCE 65)

Material	Ignition Temperature, °F	
	AIT	Hot plate
Cotton sheeting	725	870
Conductive rubber sheeting	735	895
Paper drapes	750	880
Plexiglas sheeting	840	1105
Nomex fabric	960	>1110
Blanket wool	1005	>1110
Cellulose acetate sheeting	1020	>1110
Polyvinyl chloride sheeting	1040	>1110

The relative flammability hazards of different materials can be determined for any specific set of test conditions. For instance, the radiation intensity required for ignition during tests using a heat flux of 49.7 Btu/sec/ft² was about 50 Btu/sec/ft² for cotton sheeting and between 90 and 120 for wood and paper sheeting (Reference 66). In comparison, neoprene, nylon, and polyvinyl chloride sheeting appeared to be nonignitable in air with the same radiation source.

Whenever comparisons are made between materials, however, one must remember that those relative rankings are valid only for the set of conditions imposed by the test, and may or may not be valid for other test conditions. The data presented in Figure 54 clearly show the changes in relative rankings that can occur under varying test conditions.

5.2.1.2 Flame Spread Rate. Surface flame spread can be defined as the rate a flame front travels across a material under given conditions of burning. This characteristic provides a measure of fire hazard in that surface flame spread can transmit fire to more flammable materials in the vicinity, thus enlarging the overall fire, although the transmitting material itself may contribute little fuel to the fire.

Flame spread rates are markedly influenced by such factors as the presence of a superimposed radiant heat flux, oxygen concentration of the atmosphere, density of the material, and orientation of the material. Generally, flame

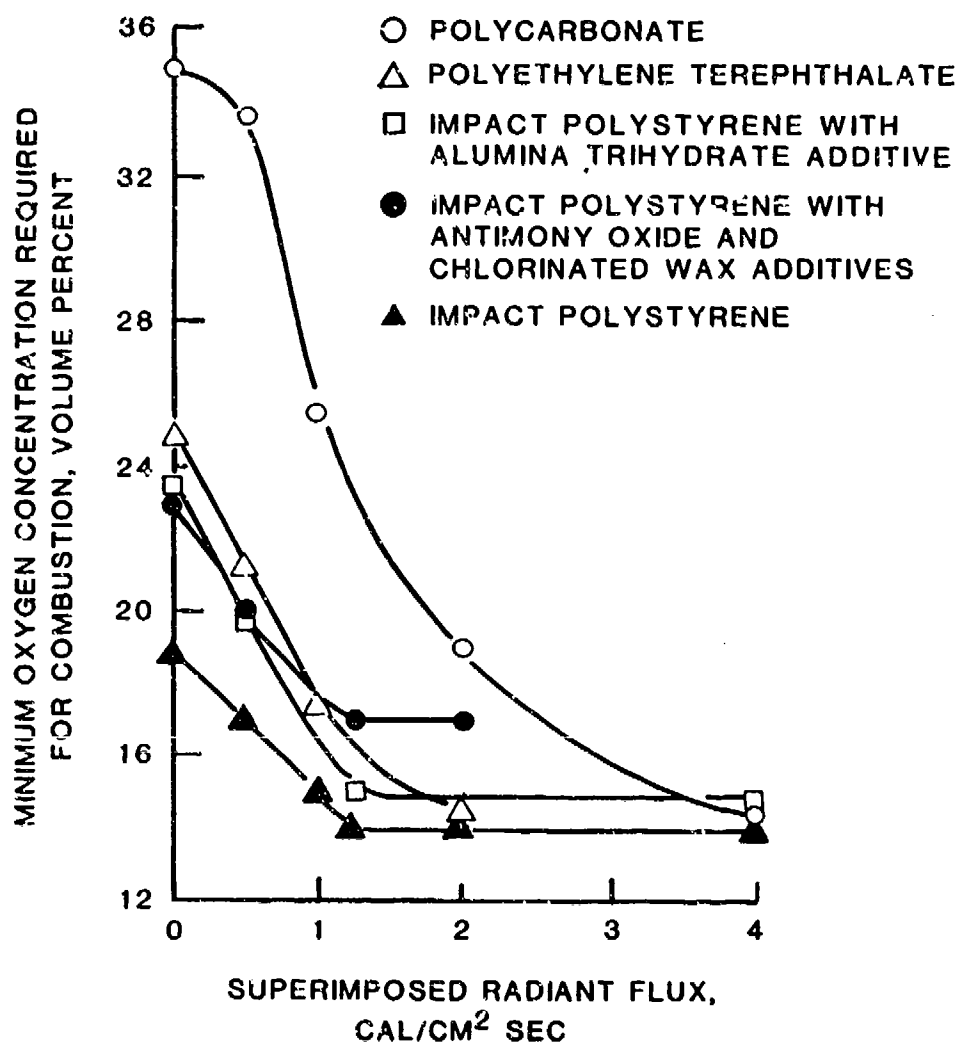


FIGURE 54. INFLUENCE OF SUPERIMPOSED HEATING ON MINIMUM OXYGEN CONCENTRATION FOR VARIOUS POLYMER SYSTEMS BURNING IN THE DRIVEN-ROD CONFIGURATION.

spread rates increase with increasing radiant heat exposure, as illustrated in Figure 55 (Reference 68). The magnitude of the change in flame spread rates can be startling and, at times, misleading if more than one test condition is not considered. For instance, Smith found that a rigid polyurethane foam that was self-extinguishing up to a heat flux of 0.5 Btu/sec/ft² changed to a combustible material with a high flame travel rate at a heat flux between 0.5 and 1.0 Btu/sec/ft² (Reference 67).

The orientation of the test sample also can markedly influence flame spread rates. Upward burning of a vertical sample will generate a higher flame spread rate than will the burning of a horizontal sample under the same conditions. Also, it has been observed that the flame spread rate of cotton

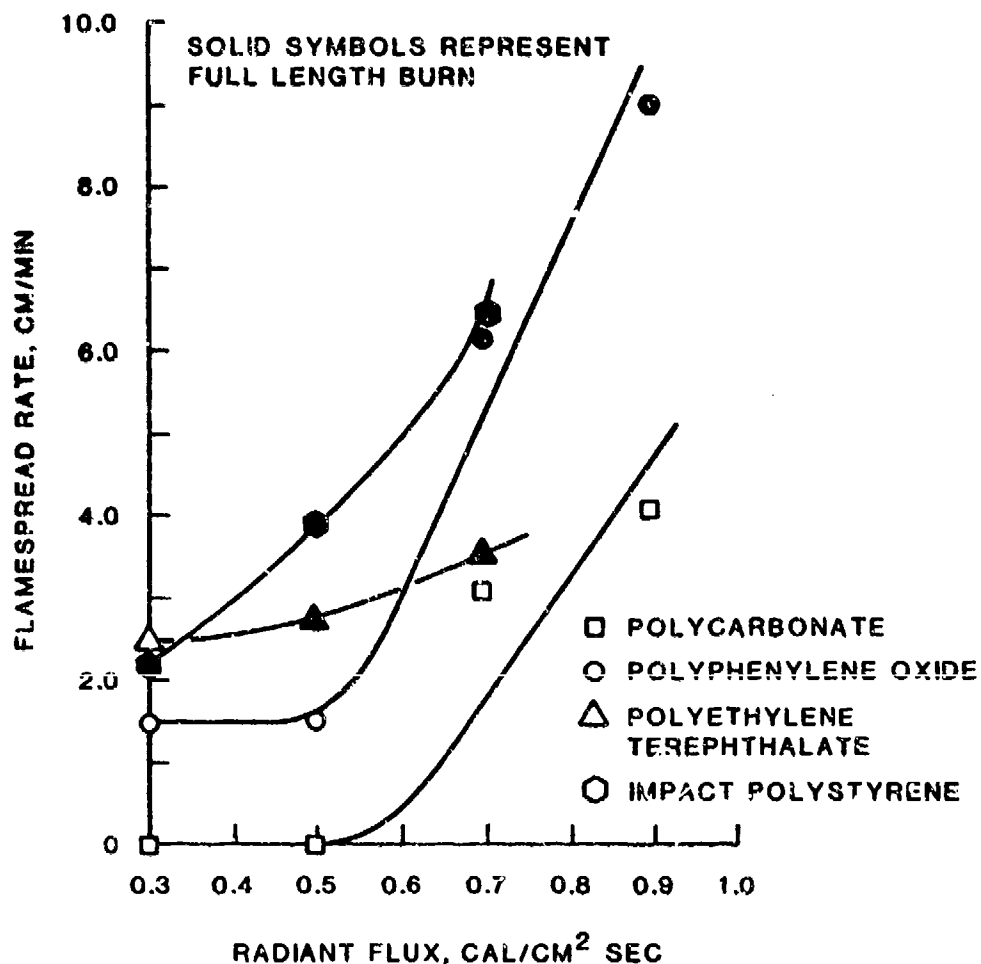


FIGURE 55. INFLUENCE OF SUPERIMPOSED HEATING ON FLAME SPREAD RATES OF VARIOUS POLYMERS.

sheeting is about 40 times greater with upward burning than with downward burning for specimens in a vertical position (Reference 66).

5.2.1.3 Heat Release Rate. Heat release can be defined as the heat produced by the burning of a given weight or volume of material. This characteristic provides a measure of fire hazard; i.e., a material that burns with the evolution of little heat per unit quantity burned will contribute less to a fire than a material that generates large amounts of heat.

Of more importance in relation to the spread of a fire, and thus, the available escape time, is the rate of heat release. Heat release rates can give a comparative measure of the contributions of various materials to a developing

fire. However, heat release rate values by themselves cannot adequately describe the contribution of a material in a real fire. In order to accurately assess the fire hazard of a material, the heat release rate must be determined as a function of time.

As with the other parameters used to assess a material's flammability, heat release rates are a function of exposure. In order to predict performance in a fire, heat release data must be obtained over a range of heat flux levels. Most cellulosic materials exhibit a uniform change in ignitability, flame travel rate, and maximum rate of heat release with change in exposure (Reference 67). However, different materials do not necessarily respond to changes in exposure in the same manner. For instance, certain "self-extinguishing" fire-retarded polymers that do not support combustion at low exposure levels will change to highly combustible materials when exposed to a higher heat flux. This type of behavior can result in two materials, examined and rated at one set of conditions, having their ratings reversed at another set of conditions. Wool and nylon carpet, as well as some of the polymers, go through such rating reversals. At low heat flux levels, nylon is less combustible, while wool is less combustible at higher heat fluxes (Reference 67).

5.2.1.4 Flash Fire Potential. A flash fire is a flame front that propagates through a fuel-air mixture as a result of the energy released from the combustion of the fuel vapor. These fires occur when combustible vapors evolve from burning materials and accumulate elsewhere as substantial volumes of flammable fuel-air mixtures, which then come in contact with an ignition source.

Screening tests for the flash-fire propensity of materials have been proposed based on the concentration of the flammable gases evolved when the materials are pyrolyzed (Reference 69). The gases analyzed during the tests were the hydrocarbons methane, ethylene, and ethane and carbon monoxide. Test results showed that those materials with the highest propensity for flash fires, such as polyethylene and polyurethane, had significantly higher hydrocarbon concentrations in their pyrolysis products than did wood, which appeared to have the least propensity for flash fires. Also, materials that melted, such as polyethylene and polyurethane foam, had larger concentrations of the more flammable hydrocarbons (ethylene and ethane) than materials that intumesced, such as bisphenol A polycarbonate, or charred, such as wood.

5.2.2 Smoke

Combustion of organic materials yields gaseous products in which small solid particles of carbon and ash, as well as liquid droplets, are frequently dispersed. This mixture of gases, solids, and liquids can be defined as smoke. In general practice, however, smoke is often defined as the combination of solid and liquid particles that lead to vision obscuration, while the gaseous products are treated separately.

The primary hazard of smoke (excluding toxic gases) is the reduction of visibility. The degree of light or sight obscuration due to smoke is generally expressed in terms of optical density, defined as $D = \log 100/T$ (where T = percent light transmission).

The amount of smoke generated by a burning material depends on the surface area involved, and the degree of obscuration depends on the available volume and light path length for any given amount of smoke. A quantitative measure, the specific optical density, has been defined to allow comparisons of smoke generation between different materials (Reference 70). The specific optical density is defined as:

$$D_s = \frac{V}{AL} \log \frac{100}{T} \quad (2)$$

where	D_s = specific optical density	} all in consistent units
	V = chamber volume	
	A = area of sample exposed to burning	
	L = path length of light	
	T = percent light transmission	

Ideally, the change in D_s with time and the maximum D_s (sometimes designated D_M) would depend only on the thickness of the material specimen, its chemical and physical properties, and the test exposure conditions. The visibility in any size compartment could then be calculated from the D_s obtained during the laboratory testing.

It is difficult to precisely extrapolate specific optical densities to human visibility in burning aircraft compartments. This is because a number of major assumptions must be made in the extrapolation: the smoke generated is uniformly distributed and is independent of the amount of excess air available; for any given smoke, the optical density is linearly related to concentration; and human and photometric vision through smoke, expressed in terms of optical density, are similar. However, the specific optical density does offer a valid means of comparing smoke generated by various materials and can be used to screen out those materials generating the greatest amount of smoke.

Smoke levels generated by burning materials are dependent on both physical and chemical parameters of the material involved and on the burning conditions. In an extensive series of tests on aircraft interior materials, Gross found that the maximum smoke level depended on the thickness and density of the specimen and could be expected to increase with thickness, but not always in direct proportion (Reference 70). He also found that, although most materials produced more smoke during the flaming exposure test, some materials produced significantly more smoke in the absence of open flaming (smoldering).

Another important variable on which smoke production depends is the heat flux received by the material. An extensive series of tests at different heat flux levels (Reference 71) showed that, for most of the materials tested, smoke production increased with increasing heat flux provided the sample did not ignite. When ignition of the materials occurred smoke production would decrease for most of the samples. Polycarbonate and polysulfone sheets exhibited the most significant differences in smoke production between higher and lower heat fluxes, as shown in Figure 56. Wool carpet and a vinyl/ABS flooring produced considerably more smoke at higher heat flux levels. However, the smoke production of foams and fabrics did not change appreciably over the range of heat fluxes tested. Some materials, such as polycarbonate plastic, may seem favorable when compared with other materials at a lower heat flux; however, their data can become increasingly worse with increasing heat flux until they are among the lowest rated materials tested, as illustrated in Figure 56.

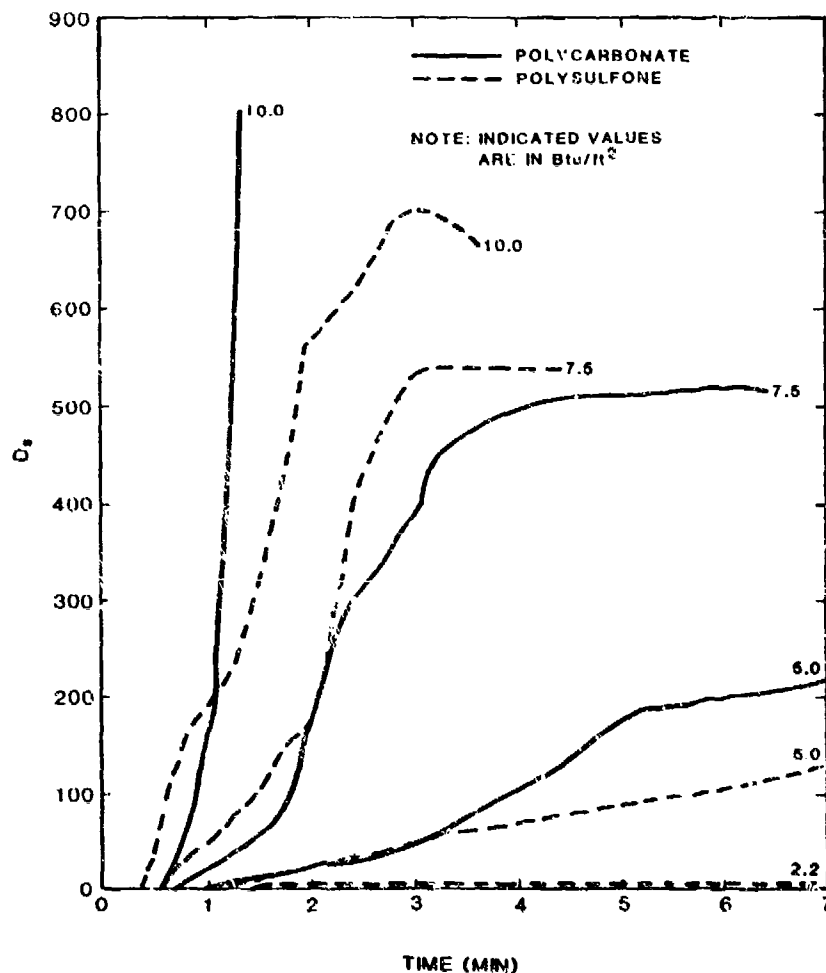


FIGURE 56. SMOKE PRODUCTION VERSUS HEAT FLUX - POLYCARBONATE AND POLYSULFONE SHEETS.

Although the addition of flame retardants has significantly reduced the flammability of many polymeric materials, these chemical additives often have resulted in increased smoke emissions during fire exposure. Figures 57 and 58 illustrate the effect of concentrations of reactive and nonreactive flame retardants on the light obscuration times in rigid urethane foams (Reference 72). It should be noted that the reactive fire retardant, which imparts the greatest degree of protection, produces more rapid light obscuration. The addition of flame retardant to a flexible urethane foam tested by Gross not only resulted in an increase in overall smoke levels but also led to a reversal of the relative smoke concentrations from smoldering versus open flaming.

5.2.3 Toxic Gases

The most common gases generated during the combustion of any organic material are carbon monoxide and carbon dioxide. Several other toxic gases also may be produced, depending on the chemical composition of the involved material. The results of the extensive series of burn tests on aircraft interior materials conducted by Gross showed that carbon monoxide (CO) was produced by almost all the samples in varying amounts depending on the type of material (Reference 70). In addition, most materials produced significant amounts of other toxic gases in addition to CO. Table 8 summarizes those results. The addition of flame retardants can contribute to the generation of toxic gases, as noted in Table 8, when comparing urethanes identical in all respects except for the presence of a flame retardant.

Of course, the amount of toxic gas generated will depend on the amount of material burned. However, Gross found that the amount of a given gas produced and its rate of generation are strongly temperature dependent. This was confirmed during additional testing by Spurgeon, et al., who also found that varying oxygen concentrations will affect the yield of combustion gases (Reference 73). No generalizations could be made, however, since the observed effects seemed to depend on the composition of the test material. The same is true when comparing the yields of gases during flaming or nonflaming conditions. Most of the materials tested by Gross yielded higher concentrations of gases under flaming conditions. There was little difference for some materials, however, while others generated more gases during nonflaming conditions.

Although approximate human toxicological data are available for many of the individual gases given off by burning materials, little is known of the synergistic effects of two or more gases inhaled at the same time. Since the majority of materials give off more than one gas, and since many interior components are actually combinations of materials, relative toxicities of different components must be determined in a manner that assesses the total effect of the toxic gases given off. This can be accomplished by using small animal toxicity tests. In an attempt to correlate analytical test methods with small animal toxicity tests, the FAA tested a number of aircraft materials using both methods (Reference 74). Although most nitrogen-containing materials indicated a correlation between HCN concentration and time to animal incapacitation, one material (76 percent wool, 24 percent PVC) showed a much higher than expected toxicity. This toxicity could not be explained on the basis of HCN concentrations or a simple synergistic response due to

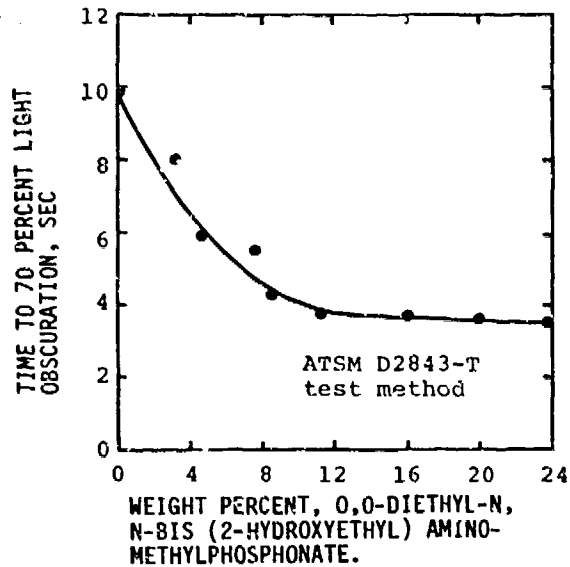


FIGURE 57. EFFECT OF CONCENTRATION OF THE REACTIVE FIRE RETARDANT O,O-DIETHYL-N,N,-BIS (2-HYDROXYETHYL) AMINOMETHYLPHOSPHONATE ON LIGHT OBSCURATION IN RIGID-URETHANE FOAMS.

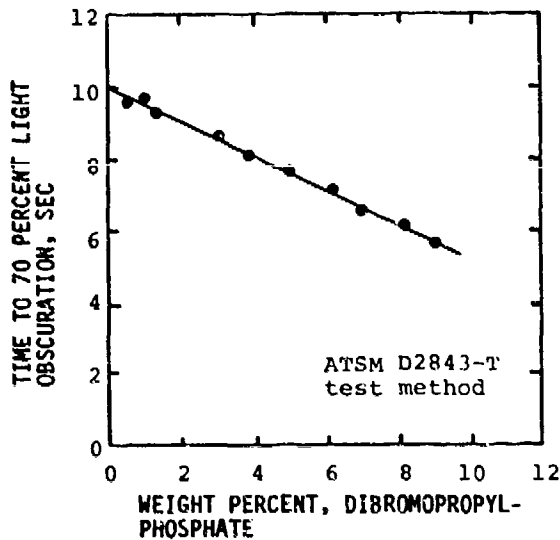


FIGURE 58. EFFECT OF NONREACTIVE FIRE RETARDANT TRIS, 2,3-DIBROMOPROPYLPHOSPHATE ON LIGHT OBSCURATION IN RIGID-URETHANE FOAMS.

TABLE 8. TOXIC GASES PRODUCED BY BURNING
AIRCRAFT INTERIOR MATERIALS

Material	CO	HCl	HCN	Other
Nylon	X	-	-	-
Wool	X	-	X	-
Polyvinyl chloride (PVC)	X	X	-	-
Modacrylic	X	X	X	-
Polyamid (aromatic)	X	-	X	NO ₂
Polyvinyl fluoride (PVF)	X	-	-	HF
Urethane	X	-	X	-
Urethane (flame retarded)	X	X	X	-
Acrylonitrile/butadiene/ styrene (ABS)	X	-	X	-
Poly sulfone	X	-	-	SO ₂
Rubber	X	-	-	SO ₂
Propylene	X	-	-	-
Polycarbonate	X	-	-	-

the combination of PVC and wool. One possible explanation for the observed toxicity is the zirconium fluoride flame-retardant treatment that the material had received. Whatever the cause, the unexpected toxicity illustrates the value of animal tests in assigning relative toxicities to interior materials.

5.3 MATERIAL TESTING

The number of material tests has increased in direct proportion to the increasing importance placed on fire safety over the last few years. Unfortunately, the proliferation of tests has not generated any degree of consensus in selecting the "best" test(s) for material screening and selection. There is a great deal of controversy among those working in this field as to the validity of the various tests in predicting a material's performance in a real fire. Thus, there are no generally accepted test methods or criteria for material performance at the present time. The different types of tests are briefly reviewed in the following sections so that the designer can understand the various performance ratings assigned to materials by the use of different tests. Those tests recommended for materials in U.S. Army aircraft are discussed in Section 5.5.

5.3.1 Laboratory Testing

5.3.1.1 Flammability Tests. There are several different types of tests for material flammability, with each type testing a specific aspect of flammability, such as ease of ignition, flame spread, heat release, and fire endurance. In addition, there are several different test methods for each type of test. A review of these numerous tests has been compiled by Hilado (Reference 75).

The simplest tests for ease of ignition provide fixed conditions of heat, oxygen, and time, and the sample either ignites or does not ignite under those conditions. A somewhat more sophisticated test is the ASTM D 1929 (Setchkin) ignition test in which a specimen is exposed to heated air at successively higher temperatures until ignition occurs. The lowest temperature of air that evolves combustible gases in a sufficient amount to be ignited by a small pilot flame is defined as the flash-ignition temperature of the material. The self-ignition temperature is the lowest air temperature at which the material ignites by itself, in the absence of any external ignition source.

A different type of ignition test, one being used increasingly for aircraft interior materials, is the ASTM D 2863 oxygen index test. In this test, a vertical specimen is ignited at its upper end by a flame that is then withdrawn; then the atmosphere (mixture of oxygen and nitrogen) that just permits steady burning is determined. The limiting oxygen index (LOI) is the minimum concentration of oxygen in the oxygen-nitrogen mixture that will just permit the sample to burn. The higher the LOI, the less flammable the material is.

In addition to the above two widely used tests, Hilado lists eight other tests for ease of ignition. He points out that many tests that measure flame spread are actually tests for ease of ignition because failure to ignite or to sustain ignition is the most desirable response. Hilado lists 10 tests in this category, including the FAR 25.853 vertical test (Reference 76).

The latter test is currently required by the FAA for compartment interior materials in transport category airplanes. In this test, the lower edge of a vertically mounted sample is exposed to a burner flame for either 60 or 12 sec, depending on the type and application of the material. The flame is then removed and flame time, burn length, and flaming time of drippings are recorded. All materials must be self-extinguishing; i.e., average flame time after removal of the flame source must not exceed 15 sec. In addition, the average burn length must not exceed 6 or 8 in., again depending on the type and application of materials.

There are even more tests for surface flame spread rates; Hilado lists 35 tests in this category, including the FAR 25.853 vertical test. The standard FAA 2 gal/hr burner test also falls in this category. This test consists of exposing a test sample to a standardized burner producing a heat flux of 10 BTU/sec/ft² and having a burner cone with an opening 6 in. high and 11 in. wide. This test method has been adopted by the FAA for seat cushion testing after it was shown that the burner test was a suitable device to measure aircraft seat blocking layer effectiveness and that, of all the laboratory devices, the 2 gal/hr burner most resembled the full-scale crash fire tests (Reference 77).

There are several tests for heat release but currently the one most widely used for aircraft materials is the Ohio State University (OSU) Heat Release Rate Apparatus. This apparatus is being proposed for FAA testing of interior ceiling and wall panels of passenger aircraft (Reference 78). Extensive testing by the FAA (References 77 and 79) has shown that the OSU rate of heat release test is appropriate for aircraft interior panels and seat cushions and correlates well with full-scale fire tests.

Briefly, the specimen to be tested is placed in an environmental chamber through which a constant flow of air passes. The specimen is exposed to a radiant heat source adjusted to produce the desired total heat flux on the specimen. The specimen may be tested so that the exposed surface is horizontal or vertical. Combustion may be initiated by nonpiloted ignition, piloted ignition of evolved gases, or by point ignition of the surface. The changes in temperature and optical density of the gas leaving the chamber are monitored, from which data the release rates of heat and visible smoke are calculated. Reference 80 contains details of the test apparatus, test method, and calculations.

Fire endurance tests measure the resistance offered by a material to the passage of fire normal to the exposed surface. The fire resistance can be measured by the burn-through time or by the relative difference in temperature between the flame side and the back face of the specimen. There are several tests for fire endurance. The NASA Ames T-3 test (Reference 81) seems to be the most widely used endurance test for aircraft materials and is well-suited for testing components containing several different materials, such as interior fuselage wall panels.

5.3.1.2 Smoke Evolution Tests. One of the earliest procedures for measuring smoke density was the ASTM D 2843 test. This test measures the light obscuration over a 1-ft optical path inside an enclosed chamber containing the burning sample (Reference 72). Smoke evolution also can be measured during flammability testing using the ASTM E 162 radiant panel test and the heat release rate test developed at Ohio State University. The most widely used test for aircraft materials, however, is the National Bureau of Standards (NBS) smoke density test first developed by Gross, et al. (Reference 70).

The NBS test, conducted in a completely closed cabinet, exposes a vertical sample to 2.5 W/cm^2 (2.2 Btu/sec/ft^2) thermal radiation from an electric heater. Light absorption is measured by a photometer over a vertical light path 3 ft long. Tests are performed under both flaming and nonflaming (smoldering) conditions. (A small pilot flame applied to the bottom of the specimen induces open flaming.) Smoke measurements are expressed in terms of specific optical density, D_s (refer to Section 5.2.2). A modified NBS smoke chamber was later developed to better simulate cabin fire environments by providing for a range of heat flux levels to provide more data on material behavior. The modifications made to the chamber consisted of adding a variable radiant heat flux furnace capable of reaching 10 BTU/sec/ft^2 and a load cell for continuous weight loss measurement of the test material (Reference 71). Although a more recent study showed that the complex dependence of smoke production on many parameters acting in fire growth limited the correlation between laboratory and full-scale crash fire experiments (Reference 82), the modified NBS smoke chamber is a valuable tool for preliminary screening of candidate interior materials.

5.3.1.3 Toxic Gas Tests. Concentrations of potentially toxic gases can be determined by chemical analysis of the combustion products. However, the results of this analysis depend on the accuracy of the analytical method employed, the effectiveness of the sampling technique used, and the number of different gases analyzed. Even though the previous factors might be optimized, the problem of relating the chemical results to physiological hazards still remains. Synergistic toxicological effects of various gas combinations are not amenable to analysis. The possibility also exists that some toxic components will not be anticipated and, therefore, will not be considered in the analysis. This latter situation arose during FAA tests comparing chemical analysis versus animal toxicity tests in assigning relative toxicity hazards to aircraft materials (Reference 74).

Both the FAA and the University of San Francisco, under NASA sponsorship, have done extensive animal toxicity testing of aircraft materials (References 83 and 84). Both laboratories expose rodents (the FAA uses rats, USF uses mice) to the pyrolysis products of materials that are thermally degraded in a tube furnace. The exposure conditions vary, however, since the FAA tests maintain a nearly normal concentration of oxygen in the exposure chamber, while the USF tests do not. The FAA conducts its tests with sufficient ventilation in the pyrolysis furnace to assure near normal oxygen concentrations, while USF runs its tests with or without airflow through the furnace. Both laboratories report time to incapacitation and time to death.

The National Bureau of Standards is developing a small-scale test method to assess the acute inhalation toxicity of combustion products (Reference 85). The NBS test method is designed for research and preliminary screening purposes in developing and evaluating materials. The test apparatus is comprised of a closed system in which oxygen and temperature levels are kept near normal and rats are exposed to the toxic fumes generated during combustion of the materials. The material sample can be combusted in either a flaming or a nonflaming mode. A concentration response curve is generated by exposing different sets of six animals to different mass loadings of a material and measuring the percentage of the animals responding.

Although the above tests cannot duplicate the gas concentrations found in a real fire, the tests do reflect the relative toxicities of different materials to rodents under the specific test conditions. Thus, the animal toxicity tests are useful in screening out the most hazardous materials. The FAA also found that dose-response relationships for the systemic toxins (CO, HCN) are very similar for rodents and humans (Reference 83).

5.3.1.4 Combined Hazard Index. A laboratory-scale method for testing and ranking aircraft cabin material for its collective combustion hazards was developed by Douglas Aircraft Company under a program sponsored by the FAA (Reference 86). This approach determines occupant escape time as a common denominator for the critical hazards encountered in the fire and is called the Combined Hazard Index (CHI). The program attempts to consider flammability, smoke, and toxicity simultaneously in rating a material. It was also desired that the rating be related in some manner to the response of the material in an actual cabin fire.

The CHI is expressed as the number of seconds of crash fire burn time available for passengers to escape from a cabin in which an interior material is involved in the fire. Escape time thus becomes the common denominator relating the quantities of smoke, toxic gases, and heat accumulating within a cabin prior to passenger incapacitation. The method involves obtaining data on the release rate measurements of heat, smoke, and toxic gases for the materials using modified OSU heat release rate apparatus. Using data input from the laboratory test, a mathematical model of the growth in fire hazards calculates the cabin hazard concentrations versus time, the fractional effective dose histories of each hazard, and the burn time at which the summed fractional doses equals 1. The latter is defined as the CHI for the material. Figure 59 illustrates this concept.

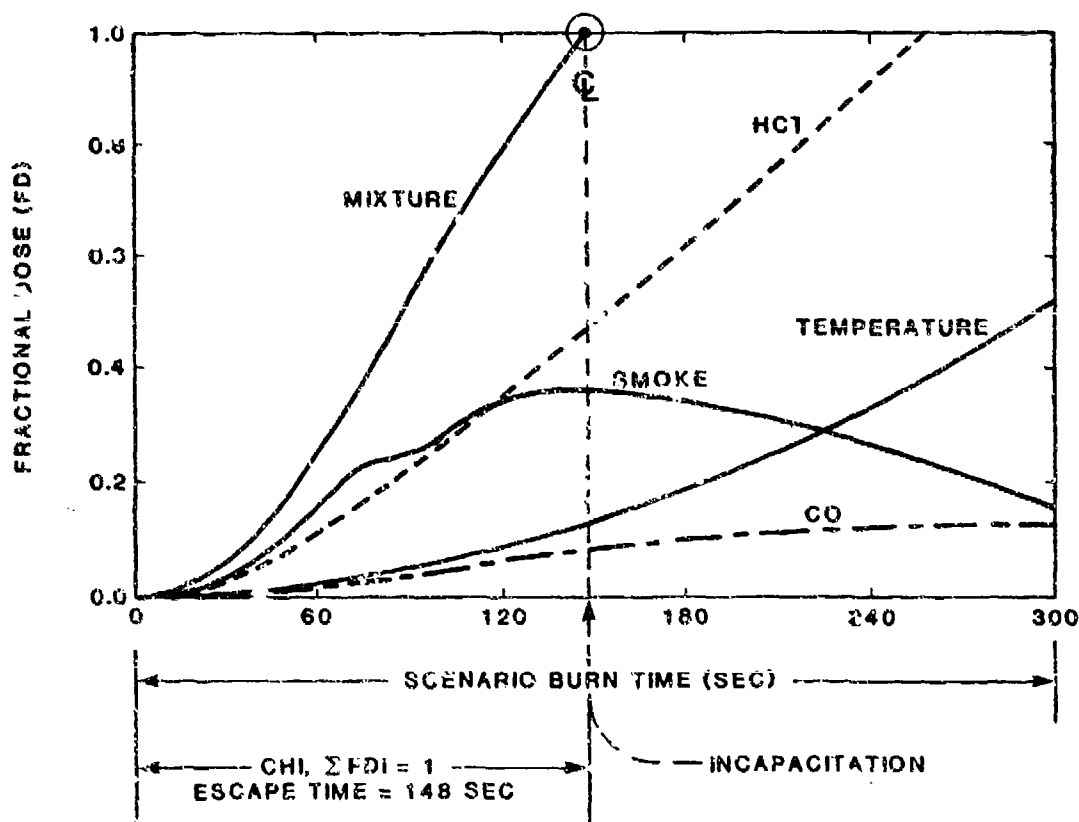


FIGURE 59. COMBINED HAZARD INDEX.

The validity of the CHI calculation is dependent on the validity of the test methodology, human survival model, and mathematical fire model. Laboratory testing as well as full-scale fire tests were conducted on four different cabin panels to validate the test methodology and computer program. It was found that the test methodology developed during the study provided extensive and repeatable information related to the heat, smoke, and toxic gas hazards

of a single aircraft material under a range of fire conditions. The fire model predictions in large-scale test measurements were found to be reasonable for temperature and smoke but not for toxic gases. It must be realized that the survival model is a simplified model, and the true relationship between the derived model and the true escape potential of humans in a fire environment has not been established.

5.3.2 Large-Scale Testing

Because the validity of laboratory tests as a means of predicting material behavior in a real fire has been of increasing concern, large-scale testing is being used more and more as a final test for system performance in a fire. Part of the problem with the predictability of the laboratory tests lies in the fact that a system of materials, not just one material, is involved in actual fires. The types of materials, amounts of each material, and the locations of the different materials all affect the development of a fire in an aircraft fuselage. The behavior of one material will affect that of another, possibly altering its behavior markedly from that demonstrated in laboratory tests.

Large-scale tests of bus and rail car interior assembly mockups illustrate the total effect of all the materials comprising a system (Reference 87). The assemblies consisted of one or two seat assemblies, wall paneling, and glazing, as would be found in the actual vehicle. Effects of various seat cushions, seat backs, and glazing materials were studied during fire tests started by igniting newspapers on the seat. The tests showed that with urethane seat cushions the system failed at approximately 6 min (flashover occurred) irrespective of the glazing or wall-covering material. Replacing the urethane with less flammable neoprene cushions resulted in increasing the importance of other materials in the system performance. For example, acrylic glazing panels led to system failure (total involvement near flashover conditions) at 7 min, even with the presence of the neoprene seats. However, the fire was confined to the seat of origin in tests using neoprene seat cushions and polycarbonate glazing.

McDonnell Douglas Corporation has developed a Cabin Fire Simulator (CFS) for use in testing commercial aircraft interiors (Reference 88). The CFS is a double-walled steel cylinder 12 ft in diameter and 40 ft long, equipped with a ventilation system, exhaust scrubber, and nitrogen-extinguishing system. Several hundred individual fire tests have been conducted in the CFS. These tests have been valuable not only in assessing material interactions but also in evaluating design changes. For instance, in a full cabin lavatory fire test, the lavatory module failed to contain the fire, and the fire erupted into the cabin area. Analysis showed that the failure to contain the fire was primarily due to a utility panel falling from the ceiling, resulting in the escape of combustible gases into the cabin. Covering the panel considerably improved system performance.

The FAA has also done extensive full-scale fire tests in their test article, which is a C-133 aircraft modified to resemble a wide-body cabin. Although the cross-sectional area is slightly smaller than a wide-body cabin, the interior volume is representative of a wide-body jet. Combustible materials installed in the original aircraft were removed, and new floor, sidewall, and ceiling surfaces are composed of noncombustible materials. A CO₂ total

flooding system allows for the selective termination of a test. These protective measures have resulted in a durable test article which has withstood hundreds of tests with only minor damage. Tests conducted with the test article have included postcrash fire tests, in which external fires were provided, ramp fire tests, and in-flight fire tests (Reference 10).

Efforts are underway to formulate mathematical models which could calculate escape time and predict aircraft cabin fire development. However, such models are a few years away, and full-scale tests still must be relied upon to provide needed information. Reduced-scale models have been investigated to reduce the full-scale test to manageable size where wind velocities could be controlled and many tests could be economically run. Reduced-scale tests may be used to predict what will happen in full-scale tests and to provide an experimental basis for developing and checking out analytical models. Reference 89 presents a discussion of previous reduced-scale modeling of compartment fires and presents some recommendations in regard to physical modeling of aircraft postcrash fires.

5.3.3 Mathematical Fire Modeling

A great deal of effort has been expended in the last 15 years on the modeling of fire growth in compartments. Most of these efforts have concentrated on modeling room fires. However, the FAA has been involved in a continuous program of mathematical modeling of aircraft fires for some years. Most of their efforts, especially recently, have been involved in modeling postcrash fires, including modeling the thermal impact at openings, the effect of wind on fire plumes from external pool fires, and the burning of interior materials. Detailed descriptions of these efforts and the models involved are well beyond the scope of this publication. The interested reader is referred to References 90, 91, and 92 for more details on aircraft postcrash fire modeling.

5.4 SELECTED MATERIAL PROPERTIES

Until recently, most efforts to reduce the flammability of materials were centered on flame-retardant treatments of polymers with halogens or phosphorous. This led to materials such as Fluorel, Refset, and Durette, as well as flame-retarded polyurethanes and cottons, wools, and other fabrics. Many recent efforts, however, have been centered on developing thermally stable char-forming polymers such as polyimide, polyphosphazene, and polybenzimidazole (PBI). Interest in the thermally stable polymers has increased with the finding that most flame-retarded materials produce significantly greater amounts of smoke and toxic gases than do the thermally stable polymers.

Although the listing of flammability properties for the numerous materials already being used or being developed for use in transportation vehicle interiors is beyond the scope of this volume, a brief overview of some current and newly developed materials for aircraft interiors follows.

5.4.1 Seat Cushion Foams

Polyurethane foam is the most common seat cushioning material currently used for aircraft seats. Studies conducted in the late 1960's showed that fire-retarded polyurethane foam was considerably less flammable than nontreated

foam (Reference 93). Since that time, considerable efforts have been expended in trying to improve the flame resistance of polyurethane. Einhorn concluded, after his studies, that major improvements could be accomplished in the flammability characteristics of rigid polyurethane foams by modifying the chemical structure and formulation (Reference 94). However, the flexible foam system did not possess the necessary chemical structure to permit the formulation of truly flame-resistant systems.

Einhorn's conclusions seem to be validated by the results of NASA tests that exposed fire-retardant-treated, Fluorel-coated, and untreated, uncoated polyurethane foam seats to a large flaming ignition source located 12 in. below the seat cushion (Reference 95). These test results indicated that the improved state-of-the-art polyurethane foams without the added fire retardant and coating treatments were not significantly better than untreated, older, less fire-resistant foams. However, by treating and coating the state-of-the-art foams, production of toxic gases was delayed, and destruction of the foam was limited. It should be noted that relatively high levels of hydrogen cyanide were detected in each test, indicating that polyurethane foam may be the major contributor to similar high levels found in large-scale tests. Figures 60 and 61 show the temperatures of the top portions of the seat backs and the hydrogen cyanide concentrations during the tests.

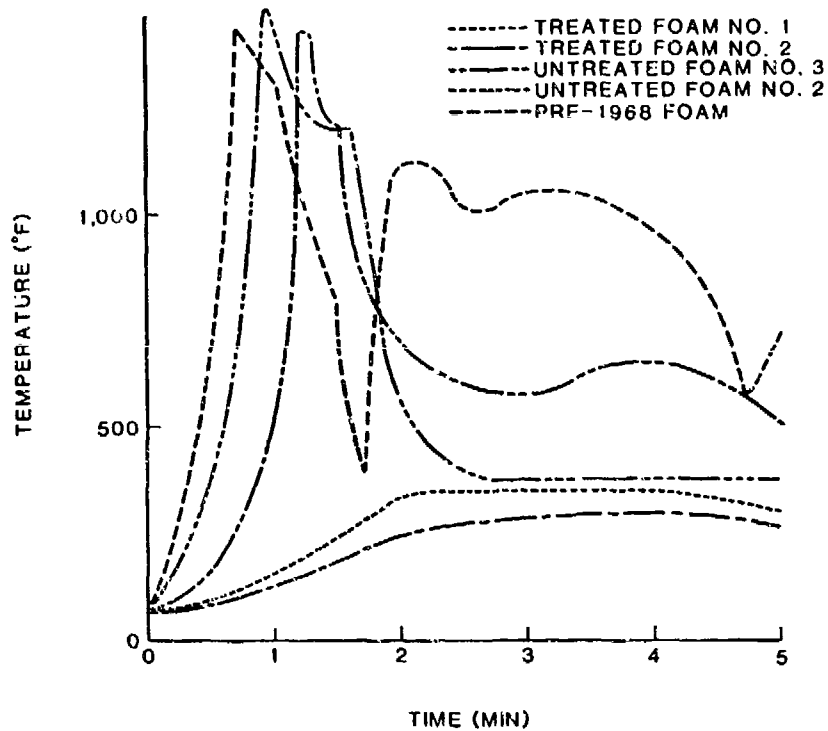


FIGURE 60. SEAT BACK TEMPERATURES DURING BURN TESTS OF COATED AND UNCOATED POLYURETHANE FOAM SEATS.

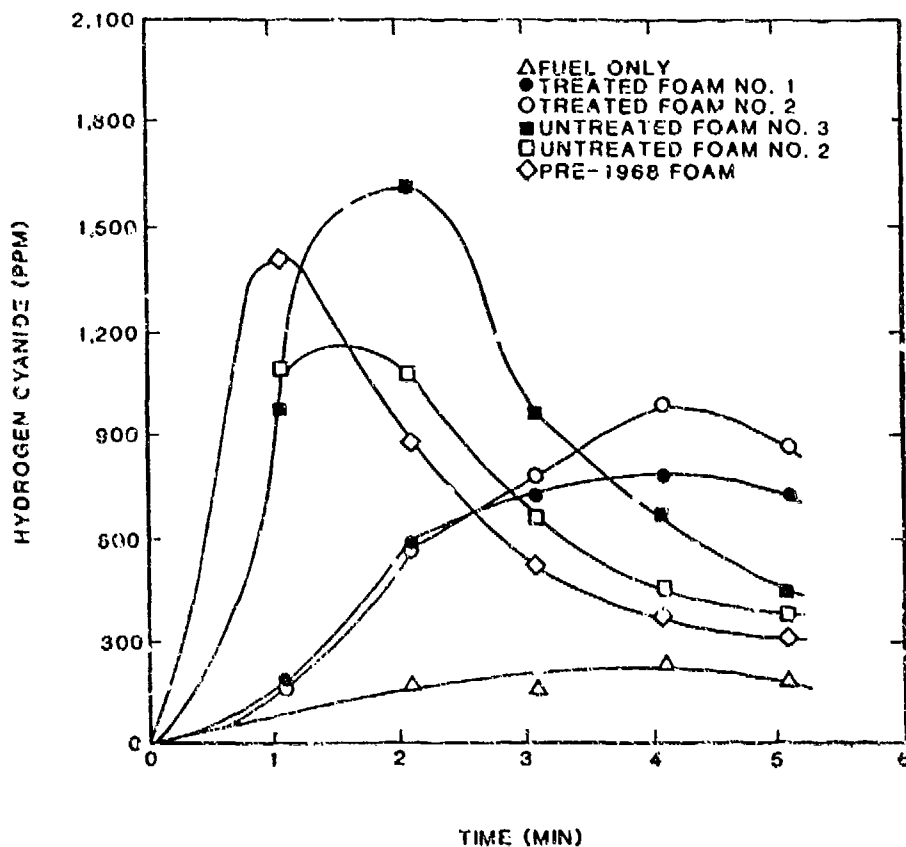


FIGURE 61. HYDROGEN CYANIDE CONCENTRATIONS FROM BURN TESTS OF COATED AND UNCOATED POLYURETHANE FOAMS.

Neoprene foam, used extensively in mattresses, has been advocated for seat cushions and is currently being used for that purpose in some mass transit vehicles. Its flammability characteristics are superior even to flame-retarded polyurethane foam. One of the earliest large-scale tests comparing neoprene foam with other seat cushioning materials was conducted by the FAA using a simulated airplane cabin. The test data comparing urethane and neoprene foam seat cushions are summarized in Table 9 (Reference 96). These tests were some of the earliest studies to document the now well-known flashover phenomenon encountered with unretarded urethane foam. Although the flame-retarded urethane foam was effective in reducing fire temperatures, neoprene was more effective. The smoke levels in these tests showed that neoprene provided significantly longer time to 50 percent smoke obscuration, a result repeated in large-scale bus and rail car tests (Reference 87).

The smoke results in the large-scale tests of neoprene foam contrast markedly with NBS smoke chamber data that indicate neoprene releases more smoke than urethane. This anomaly illustrates many of the problems in trying to extrapolate laboratory data to real fire situations. Under actual fire conditions, neoprene decomposes at a slower rate than it does in the NBS laboratory test, thus producing smoke at a lower rate. University of San Francisco tests also

TABLE 9. RESULTS OF LARGE-SCALE AIR TRANSPORT CABIN FIRE TESTS USING URETHANE OR NEOPRENE SEAT CUSHIONS (FROM REFERENCE 96)

Property	Test Number			
	4	11	22A	22B
Seat cushion material	Urethane foam	F.R. urethane foam	Neoprene foam	Neoprene foam
Maximum ceiling temperature, °F	1,420	560	230	100
Time to 50 percent smoke obscuration, min	1.9	1.7	3.4	12.4
Minimum oxygen concentration, percent	2.5	20.0	18.3	29.5
Maximum CO concentration, percent	1.5+	0.6	0.21	0.05
Time to flashover, min	2.3	(4 min)		

have shown that the neoprene foam produces less toxic smoke than does the polyurethane foam (Reference 97). Efforts now are under way to develop improved neoprene foam formulations that have superior smoke evolution properties. Table 10 summarizes comparative data on the standard and improved neoprene foams.

Advanced state-of-the-art materials developed for seat cushions include polyphosphazene and polyimide foams (References 98 and 99). Both of these foams have superior flammability and smoke properties compared to typical fire-retarded urethane foams, as can be seen in Table 11.

In addition to the improved fire resistance and lower smoke production of the neoprene and polyimide foams, they have also been shown to be much less toxic than the polyurethane foam (Reference 100). Laboratory testing was conducted on vinyl-nylon upholstery fabric covering polyurethane foam versus 90 percent wool and 10 percent nylon upholstery fabric covering either LS-200 neoprene foam or polyimide foam. Animal exposure data from the tests showed no measured toxicity time for the LS-200 or the polyimide, but showed a minimum time for the baseline polyurethane of 232 sec to incapacitation and 463 sec to death. Based on observation of animal arrhythmias and bradycardia, the LS-200 foam was judged superior to the polyimide.

TABLE 10. TYPICAL PROPERTIES OF STANDARD AND IMPROVED NEOPRENE FOAM (FROM REFERENCE 96)

Property	Standard Foam	Improved Foam
Density, lb/ft ³	4	7
Tensile strength, lb/in. ²	9	7
Elongation, percent	120	100
Compression set (50 percent deflection, 22 hr @ 212 °F)	7.5	7.5
ASTM E-162-75 flame spread rating	6	4
NBS smoke chamber results		
D _s , 90 sec	280	93
C _s , 4 min	380	195
D _s , maximum	380	250
Time to maximum D _s , min	4	7

TABLE 11. COMPARISON OF POLYPHOSPHAZENE, POLYIMIDE, AND FIRE-RETARDED POLYURETHANE FOAM PROPERTIES

Property	Typical Polyphosphazene Foam	Typical Polyimide Foam	Typical F.R. Urethane Foam
Density, lb/ft ³	4.0 - 9.0	1.3 - 1.4	4.5 - 8.5
Tensile strength, psi	20 - 80	10 - 13	40
Elongation, percent	80 - 125	20 - 23	100
Flame spread index	14	-	30
Limiting oxygen index	43 - 45	44 - 54	20
Maximum smoke density, D _s			
Flaming	40 - 150	0 - 0.5	250
Nonflaming	-	0 - 1	-

Another recent approach to improving the fire resistance of aircraft seats is the use of an interliner or fire-blocking barrier between the upholstery fabric and the seat cushion foam. This approach is described in detail in Section 5.4.3.

5.4.2 Upholstery and Other Fabrics

Current seat upholstery and other fabrics can be divided into two classes: uncoated and coated. Typical uncoated fabrics include wool, cotton, nylon, rayon, polyester, modacrylic, or combinations of these fibers. Marcy found that the majority of these fabrics, even when treated with flame retardants, had unacceptable burn rates during both the FAA vertical flammability test and the ASTM radiant panel test (Reference 93). Modacrylic fabrics were the only self-extinguishing fabrics. However, animal toxicity tests revealed that modacrylic fabrics were the most toxic of 75 different interior materials that were tested (Reference 83).

The coated fabrics, on the other hand, were all self-extinguishing during the vertical burn tests. These materials consisted, in large part, of vinyl- and acrylic-coated glass fabrics. Toxicity tests of cotton, nylon, and polyester fabrics coated with polyvinyl chloride (PVC) showed that these coated fabrics were much less toxic than their uncoated counterparts.

Advanced state-of-the-art fabrics include Nomex, Kynol, polybenzimidazole (PBI), and polyimide (e.g., Kapton) fabrics. These fabrics exhibit superior flammability characteristics, as shown in table 12 (from Reference 101). Kynol and PBI fabrics emit very little smoke and essentially no toxic gases during burning.

TABLE 12. FLAMMABILITY PROPERTIES OF VARIOUS FABRIC MATERIALS (FROM REFERENCE 101)

Property	Cotton	Polyester	Nomex	Kynol	PBI
Ignition in air Calrod temperature, °C	<550	-	871	788	927
Time, sec	Inst.	-	1	-	6
Flame impingement heat flux protection	NIL	(Melt)	Good	Good	Good
Char yield characteristics	Low	(Melt)	High, friable	High, strong	High, strong
Smoke	Moderate	Low	Moderate	Low	Low
Off gases (toxicity)	-	-	Toxic	CO ₂ /H ₂ O Predom.	CO ₂ /H ₂ O Predom.
Thermal stability temperature degradation, °C	-	-	437	-	590 - 680
Percent approximate weight loss at 900 °C	-	-	60	40	30
Limiting oxygen index (percent O ₂)	16 - 18	20 - 21	27 - 29	29 - 30	38 - 43

5.4.3 Fire Blocking Materials for Seat Cushions

Polyurethane foam has been identified as a major contributor to flashover conditions. Flammable vapors given off by the burning polyurethane are trapped near the ceiling of the cabin and can suddenly ignite, propagating the fire across the whole upper interior of the aircraft. As noted in Section 5.4.1, there are foams available which do not support this type of phenomenon. However, polyurethane does offer significant advantages over those foams for seat cushion use. These advantages include desirable mechanical aspects, such as low weight, excellent comfort, resiliency, and durability, and low cost compared to other seat cushion foams.

Both NASA and the FAA became actively involved in developing fire-blocking materials for polyurethane cushions when it was shown that a Vonar-3 blocking layer over a conventional urethane cushion appeared equivalent in fire protective performance to a cushion of neoprene during full-scale fire tests at the FAA Technical Center. These efforts have led to fire-blocked polyurethane seat cushions which offer a significant reduction in the flashover potential and, thus, provide a longer egress time for aircraft passengers.

5.4.3.1 Basic Principles of Fire Blocking. In simplest terms, fire blocking consists of inserting a layer between the polyurethane foam cushion and the fabric covering of the cushion to reduce the production rate of flammable vapors from the core cushion and prevent the injection of such flammable gases into the passenger compartment. There are various fire blocking mechanisms thought to occur with existing materials:

- Transpirational cooling via emission of water vapor to cool the heated zone.
- Reradiative materials with high char yields which act as insulators.
- A highly reflective continuous surface which distributes the radiant energy and reduces local heat loads.
- The initiation of vapor phase cracking of the combustible vapor species generated by the low temperature pyrolysis of the polyurethane substrate.

Examination of the heat conduction and thermal radiation properties of seat cushion materials led to the development of a simple cushion model based on the following six identifiable layers (Reference 102).

1. A decorative fabric layer
2. A reradiative char layer (formed from the heat blocking layer by thermal degradation of a suitable fabric or foam)
3. A transpiration layer (allowing vapor exchange)
4. An air gap layer

5. A reflective layer (to assist in controlling radiant energy)
6. The cushioning foam (the primary component which requires thermal protection)

In some cases, these layers may be combined in a single material. It should be noted that when ablative (sacrificial) protection is provided, venting of the seat cushion is necessary to prevent the sudden release of combustible gases.

5.4.3.2 Seat Materials and Their Properties. There are three basic layers to the standard aircraft seat:

1. Fabric covering
2. The fire blocking layer
3. The cushion

Many candidate materials for each of these three layers have been screened based on flammability test data as well as on other criteria, such as raw material availability and manufacturing limitations. Some of the earliest screening tests used the selection criteria given in Table 13 as initial criteria for the materials (Reference 103). (Reference 103 contains all of the test results as well as physical parameters for the numerous materials tested). All of the materials were tested individually and not as composite seat cushions. The baseline fabric was a wool/nylon blend fabric currently used in aircraft passenger seating. The baseline foam material was a fire-retarded polyurethane foam.

TABLE 13. SELECTION CRITERIA FOR SCREENING TESTS OF SEAT MATERIALS

Seat Component	Mandatory Requirement	Recommended Candidate Material
Decorative Fabric Cover	Colorfastness, color availability, resistance to ignition, low flame spread, wear ability, low toxicity, low smoke generation	1. Airgard treated nylon 2. Kernel 47%/Wool 53% blend
Fire-Blocking Layer	Burn resistance, low smoke generation, low heat, release, low flame spread, low toxicity, low thermal conductivity, high char yield	1. Kynol needle punch batting 2. Vonar No. 3 neoprene foam interliner 3. Nomex III nomex fabric 4. Durette duck
Cushioning Layer	Low total heat release, low toxicity, low smoke generation, low weight loss, resistance to mechanical breakdown	1. HL Neoprene foam 2. Glass fiber block 3. Silicone foam

Subsequent release rate calorimetry testing of multilayered materials for aircraft seats showed that, with the fire-blocking materials used (Kynol, Vonar, and Durette), any variations in the heat release rate and smoke release rates were indicative of the type and quantity of adhesive utilized in the bonding of the assembly (Reference 104). A silicone elastomeric layer contributed significantly to the total heat release values. Multilayered assemblies using neoprene, polyimide and fiberglass cushion materials contributed the minimum amount of smoke. Again, multilayered assemblies which contained silicone cushion materials produced high amounts of smoke. The high heat release rate and smoke generation values for silicone materials resulted in their being dropped as candidate materials for aircraft seats.

Subsequent testing focused on the use of polyurethane foam seat cushions as opposed to neoprene or polyimide foams, because the physical properties of the neoprene and polyimide foams were not as desirable as the polyurethane. For instance, although the polyimide foams provide a high char yield on pyrolysis and do not release flammable vapors into the environment, the cross-link density and aromaticity required to achieve that level of char yield was inconsistent with the comfort factors, resiliency, and durability of the seat. Thus, these materials were eliminated from further consideration (Reference 102).

The seat cushion configurations selected for evaluation under this series of tests are shown in Table 14. (All of the materials for the fire-blocking layer were commercially available.) The goal of the program was to obtain an equivalent or better fire-blocking performance than that of the Vonar-3 with no increase in contemporary seat weight or price. (The Vonar-3-blocking layer resulted in an estimated weight penalty of 4 lb per seat.) The details of the testing program, the test results, and physical data for the materials listed in Table 13 are given in Reference 102. The main conclusions of the study were:

- There was essentially no difference in protection capabilities with the fire-blocking layers whether the urethane foam was fire retarded or not. In fact, the fire-retardant foam was actually inferior in performance to the non-fire-retardant foam when used in conjunction with some of the fire-blocking materials. In addition, the non-fire-retardant foam had distinct beneficial weight savings.
- Based on small scale tests, Norfab 11HT-26-AL, which is an aluminized fabric, provided equivalent, if not better, thermal protection than the Vonar-3 and improved the weight penalty aspects by more than fourfold.
- Vent holes may be required on the underside of the seat cushions to permit venting of the pyrolysis gases produced from the urethane foam.

Good correlations have been obtained between full-scale fire tests and various laboratory-scale fire tests run on the seat-blocking-layer materials.

TABLE 14. SEAT CUSHION CONFIGURATIONS SELECTED FOR EVALUATION

Configuration	Foam	Fire-Blocking Layer (FBL)	FBL Weight	
			kg/m ²	oz/yd ²
1	FR urethane*	None		
2	FR urethane*	Vonar-3, 0.48 cm (3/16 in.)	0.91	27.07
3	FR urethane*	Vonar-2, 0.32 cm (2/16 in.)	0.67	19.87
4	FR urethane*	LS-200 neoprene 0.95 cm (3.8 in.)	3.0	84
5	FR urethane*	Preox 1100-4 aluminized Preox fabric, plain weave, neoprene C/D, P/N 1299013	0.39	11.53
6	FR urethane*	Norfab 11HT-26-A1 aluminized on one side, 25% Nomex, 70% Kevlar 5% Kynol, weave structure 1 x 1 plain	0.40	11.8
7	FR urethane*	181 E-Glass, Satin Weave	0.30	9.2
8	NF urethane*	Vonar-3, 0.48 cm (3/16 in.)	0.92	27.07
9	NF urethane*	Norfab 11HT-26-A1	0.40	11.8
10	LS-200 Neoprene	None		
11	Polyimide	None		
12	NF urethane light	Norfab 11HT-26-A1	0.40	11.8

All decorative upholstery is a wool/nylon-blend fabric.

*These polyurethane foams were covered by a cotton/muslin fire-retarded scrim cloth, weighing 0.08 kg/m² (2.6 oz/yd²).

The Ohio State University rate of heat release apparatus was found to be a suitable device to measure the aircraft seat-blocking-layer effectiveness. Several test measurement rankings for the OSU apparatus operated at a 5.0 W/cm² heat flux level showed comparability with larger-scale CFS weight

loss and percent weight loss rankings (Reference 77). Results from the laboratory studies confirmed the effectiveness of the aircraft seat-blocking-layer concept.

The results of full-scale crash fire simulator tests showed that the use of a Vonar fire-blocking layer on the seat cushions increased survival time during the postcrash fire test to 3 min and 40 sec (60 sec greater than that for the standard seats). The use of Norfab for the same test conditions gave a survival time 40 sec greater than that for the standard seat, but 20 sec less than that for the Vonar-protected seats. The use of noncombustible cushions produced an 18-sec improvement over that for the Vonar-protected urethane. These results are summarized in Figures 62 and 63 (Reference 10).

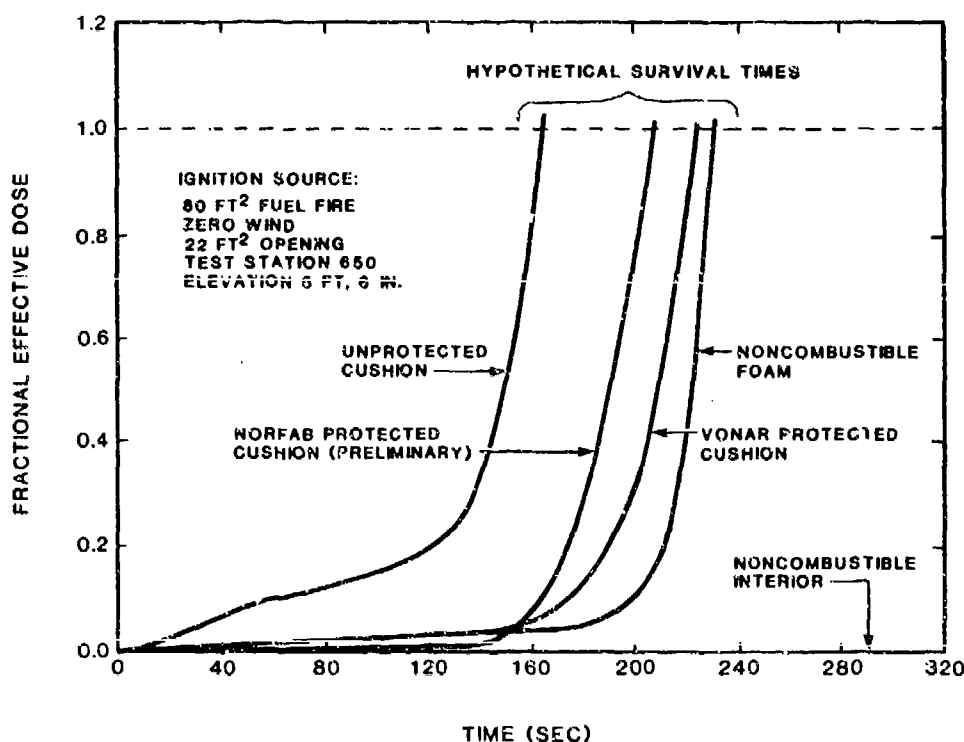


FIGURE 62. EFFECT OF CUSHIONING PROTECTION ON CALCULATED SURVIVAL TIME UNDER FULL-SCALE POST-CRASH FIRE CONDITIONS.

5.4.4 Structural Components

All major transport aircraft manufacturers and NASA are engaged in efforts to increase the fire safety of interior structural components, such as sidewall, floor, and ceiling panels. These efforts encompass the selection of single candidate materials and the fabrication of multimaterial assemblies.

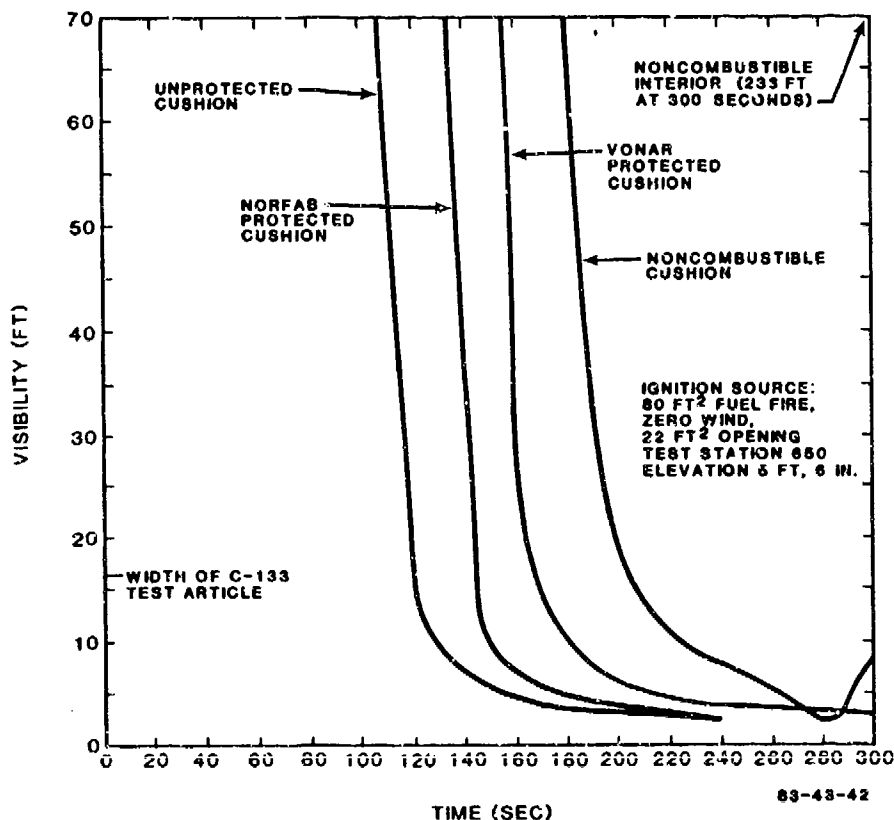


FIGURE 63. EFFECT OF CUSHIONING PROTECTION ON CALCULATED VISIBILITY THROUGH SMOKE UNDER FULL-SCALE POST-CRASH FIRE CONDITIONS.

Candidates for improved thermoplastic materials are listed in Tables 15 and 16, along with their physical and chemical properties (Reference 105). All of these materials exhibit greater fire resistance and lower smoke and toxicity than the majority of aircraft interior materials currently in use. Other promising materials include the char-forming polyisocyanurate and PBI foams (Reference 106). Fire-hardening of honeycomb panels has been accomplished by filling the honeycomb core with PBI or isocyanurate foam, as well as with phenolic-impregnated fiberglass batting (References 88 and 107). Further improvements can be made by replacing flammable adhesives (e.g., acrylate adhesive) with more fire-resistant compounds such as fire-retarded epoxy adhesives or polyamide adhesives (Reference 106).

NASA and the FAA have both been developing new interior panels for commercial aircraft over the last few years. Generally, these interior panels are composite structures composed of a honeycomb core, resin impregnated cloth facings, and a decorative laminate. A typical example of an aircraft panel construction is shown in Figure 64.

Parker and Kourtides found that the simple and single value of the char yield could readily be used to rank the fire involvement characteristics of individual polymer candidates for the fabrication of interior system components

TABLE 15. PRELIMINARY PROPERTIES OF CANDIDATE COMPRESSION MOLDING MATERIALS

Property	Polyether Sulfone	Polyphenylene Sulfide	Polysulfone	Mod-Polycarbonate
Tensile strength, psi	11,000	9,500	10,000	8,500
Elongation, percent	-	1.5	40	50
Flexural strength, psi	16,000	13,000	15,000	12,000
Heat deflection temperature, °F, at 264 psi	390	275	330	270
Specific gravity	1.37	1.3	1.25	1.20 to 1.26
Impact strength (notched izod) ft-lb/in. of notch	1.6	1.5	1.3	9.0
Mod of elasticity, psi	350,000	500,000	340,000	300,000
Compressive strength, psi	12,000	15,000	13,500	12,000
Smoke density flaming, D_s (6 min.)	20	100	80	130
Limiting oxygen index (LOI)	37	44	30	23

(Reference 108). The ablation efficiency in the fuel fire environment of the bulk polymers increases with increasing char yield from about 23 percent to about 50 percent, after which it decreases abruptly. Although most of the flammability properties continue to decrease at char yields greater than 50 percent, it was found that materials with char yield between 45 percent and 60 percent gave the best combination of fire containment and fire involvement properties.


Figure 65 shows the results of testing done on experimental aircraft panels in which the face sheets have been modified by choosing high-char-yield resins (Reference 108). The panels were exposed to a combined radiant and convective heat source which had been found to correlate well with full-scale fire tests. In Figure 65, the backface temperature has been plotted as a function of the exposure time in seconds. It can be seen from this figure that the low-char-yield epoxies (char yield of 23 percent) and the highest-char-yield conventional polyimide (char yield 70 percent) gave the shortest time (about 140 sec) to reach backface temperature of 200 °C. The bismaleimides and phenolics, with char yields of the order of 45 to 60 percent, gave the best performance, taking about 380 sec and 180 sec, respectively, to reach a backface temperature of 200 °C.

TABLE 16. PRELIMINARY PROPERTIES OF CANDIDATE THERMOFORMED MATERIALS

Property	Mod- polycarbonate	Mod- polysulfone	Chlorinated- PVC	Mineral-filled polyethylene
Tensile strength, psi	8,500	8,000	5,400	2,300
Elongation, percent	70		40	200 Takes permanent set
Flexural strength, psi	12,000	12,500	10,000	3,800
Heat deflection temperature, °F, @ 264 psi	220	-	200	160
Specific gravity	1.26	1.26	1.57	1.7
Impact strength (notched izod) ft-lb/in. of notch	10.0	9.0	6.6	12.0
Mod of elasticity, psi	300,000	320,000	300,000	450,000
Smoke density flaming, D _s (6 min)	130	105	140	20
Limiting oxygen index (LOI)	23	30	42	36

NASA subsequently developed an advanced interior panel design. This design is shown in Figure 66 (Reference 109). The in-service or standard panel was an epoxy fiberglass-based panel of the design employed in the earliest wide body jet interiors. The advanced design used polyimide for the facing resin and core coating because of its higher degradation temperature and greater anaerobic char yield compared to epoxy resin. Polyetheretherketone (PEEK) was selected as the decorative film to eliminate the hydrogen fluoride produced during thermal decomposition of the polyvinyl fluoride film commonly used in contemporary panels.

Small-scale laboratory tests showed that the advanced panel was better than the in-service panel for all test measurements related to flammability and gave no visible smoke. The panels were then subjected to an exterior fuel fire adjacent to a fuselage opening in a full-scale test article. This scenario simulated a severe fire condition because a seat was centered in the rupture and exposed to high levels of radiant heat. When that seat started to burn it caused additional radiant heat to impinge upon the other interior

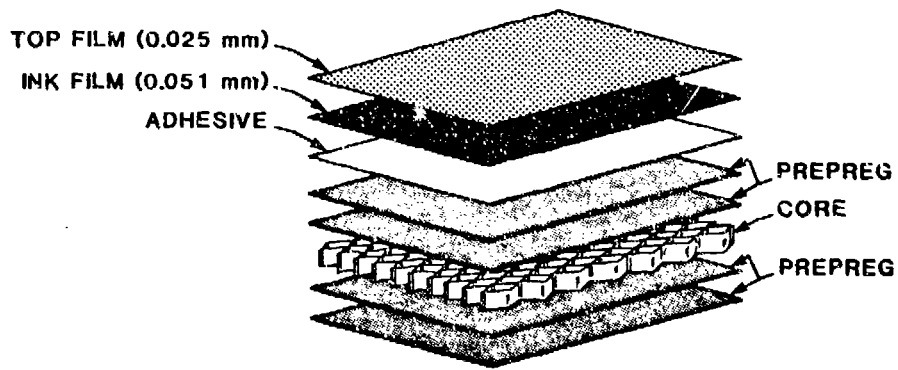

● CANDIDATE RESIN SYSTEMS FOR PREPREG

- EASELINE EPOXY
- BISMALEIMIDE
- PHENOLIC
- POLYIMIDE

● TESTING MATRIX

- FLAMMABILITY, SMOKE, AND TOXICITY
- MECHANICALS AND AESTHETICS

FIGURE 64. SANDWICH PANEL CONFIGURATION (FROM REFERENCE 108).

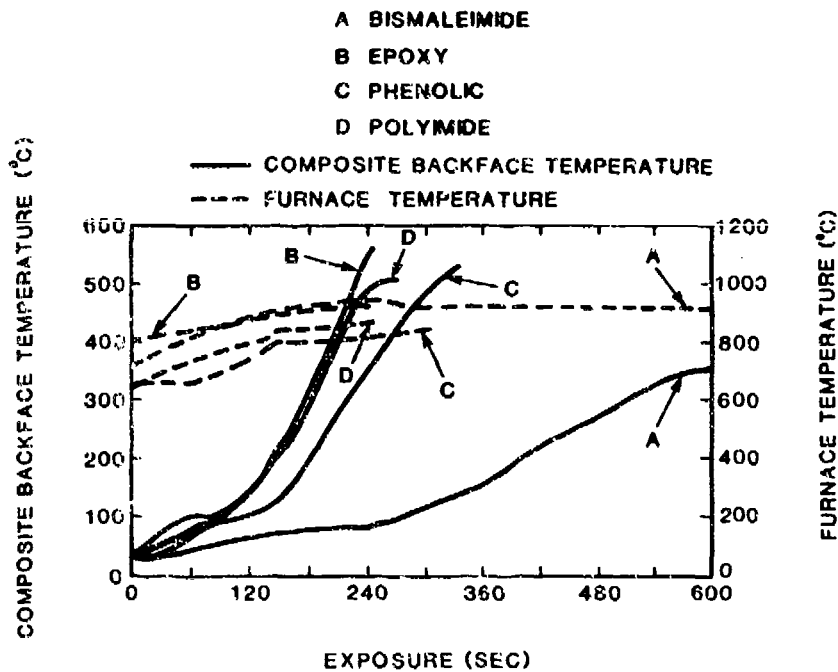


FIGURE 65. THERMAL EFFICIENCY OF EXPERIMENTAL PANELS WITH VARIOUS FACE SHEET MATERIALS.


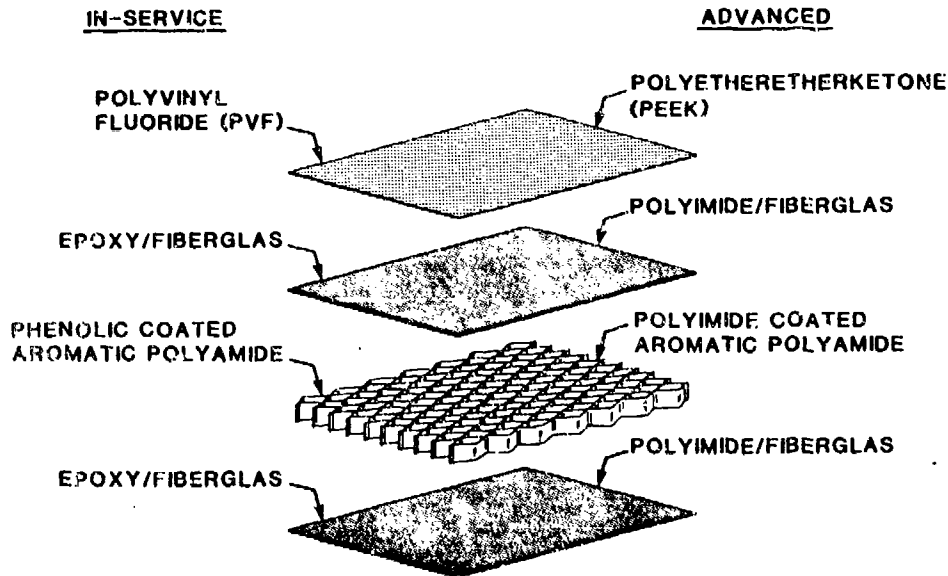


FIGURE 66. COMPOSITION OF COMPOSITE PANELS FOR AIRCRAFT INTERIORS.


materials. A flashover, that is, a sudden and rapid uncontrolled growth of the fire from the area in the immediate vicinity of the fire to the remaining materials, occurred with both types of panels. However, the time to flashover was much earlier with the inservice panels than with the advanced panels, as shown in Figure 67a. The difference in flashover time, measured by a thermocouple mounted 12 in. below the ceiling, was approximately 140 sec. Flashover in a postcrash cabin fire creates nonsurvivable conditions, so the 140-sec delay in flashover when using the advanced panels provides 140 sec of additional time for occupant evacuation and possible survival.

The superior fire performance of the advanced panels was even more evident with the fuel fire/open door scenario (Figure 67b). Flashover occurred in approximately 2-1/2 min. with the inservice panels; however, with the advanced panels, flashover did not occur at all over the 7-min. test duration. The cabin environment was clearly survivable in both tests before the flashover occurred. However, within 30 sec. after flashover occurred with the standard panels, the levels of smoke, carbon monoxide and hydrogen fluoride all increased dramatically. These gases were not detected at all in the test with the advanced panel because the flashover was prevented.

Similar results have been attained during full-scale fire tests on panels developed by the FAA (reference 79). Five honeycomb panels with various face sheets were tested. The face sheets were composed of a fabric impregnated with a resin. The fabrics tested included fiberglass, Kevlar, and graphite, while the resins included epoxy and phenolic. These various components are

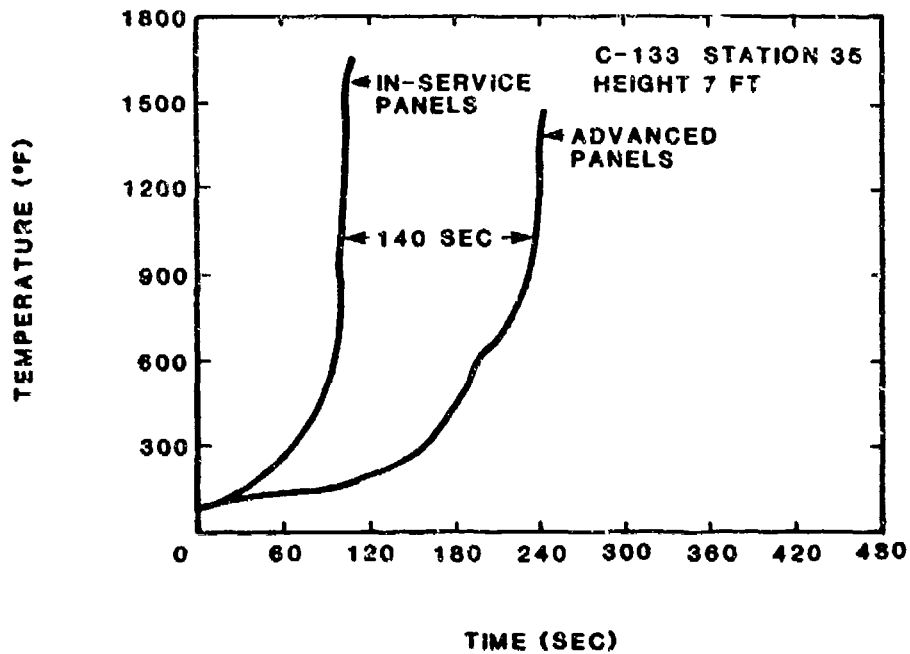

a. EXTERNAL FUEL FIRE/FUSELAGE RUPTURE SCENARIO.

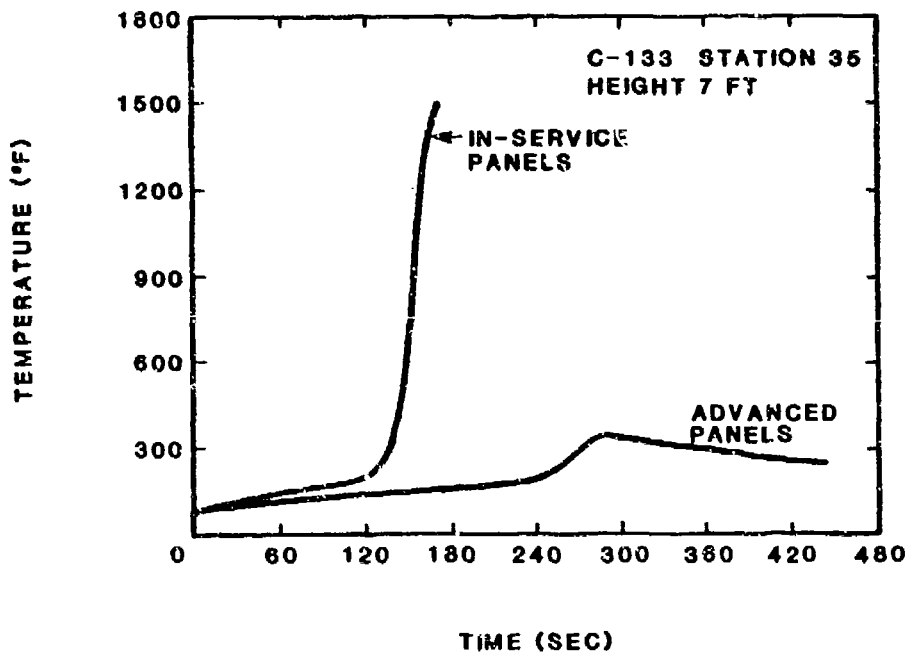

b. EXTERNAL FUEL FIRE/OPEN DOOR SCENARIO.

FIGURE 67. BENEFIT OF ADVANCED COMPOSITE PANELS IN FULL-SCALE FIRE TESTS.

representative of the components used in state-of-the-art aircraft interiors. The advanced polyimide panel, consisting of a polyimide-dipped Nomex core, a polyimide resin on the fiberglass face sheets, and a PEEK decorative surface, was used as a standard. The test results indicated that the temperature increase inside the test article closely tracked the smoke and toxic gas concentration measurements. The results of the tests are shown in Figures 68 and 69. Although the advanced PEEK/polyimide panel represents an ultimate benefit attainable, these panels are currently beyond the state of the art in processing for large scale use in aircraft. However, the phenolic/fiberglass panel tested well under virtually all test conditions and would significantly improve survivability in postcrash fires. In fact, this panel was used as a benchmark to select the recommended performance criteria for the OSU heat release rate testing of aircraft materials.

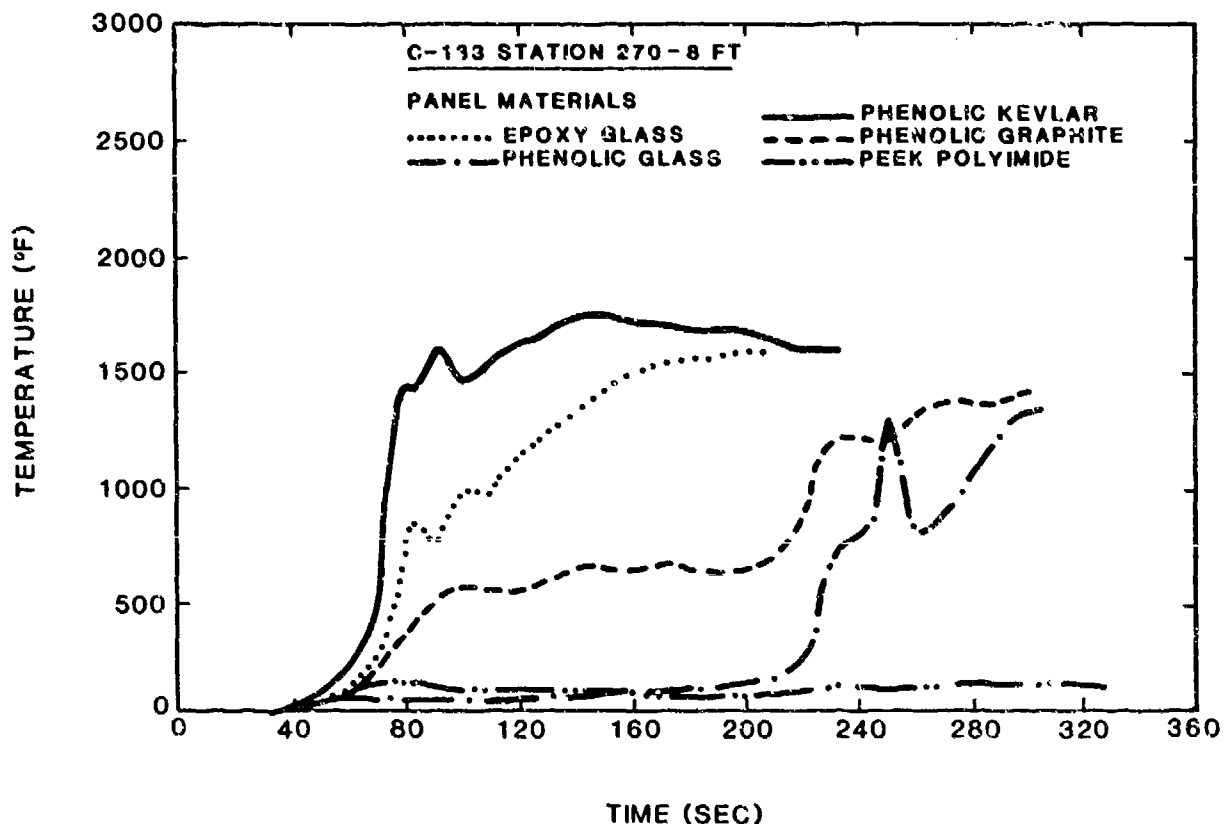


FIGURE 68. COMPARATIVE TEMPERATURE PROFILES OF HONEYCOMB PANELS WITH VARIOUS FACE SHEETS DURING FULL-SCALE FIRE TESTS.

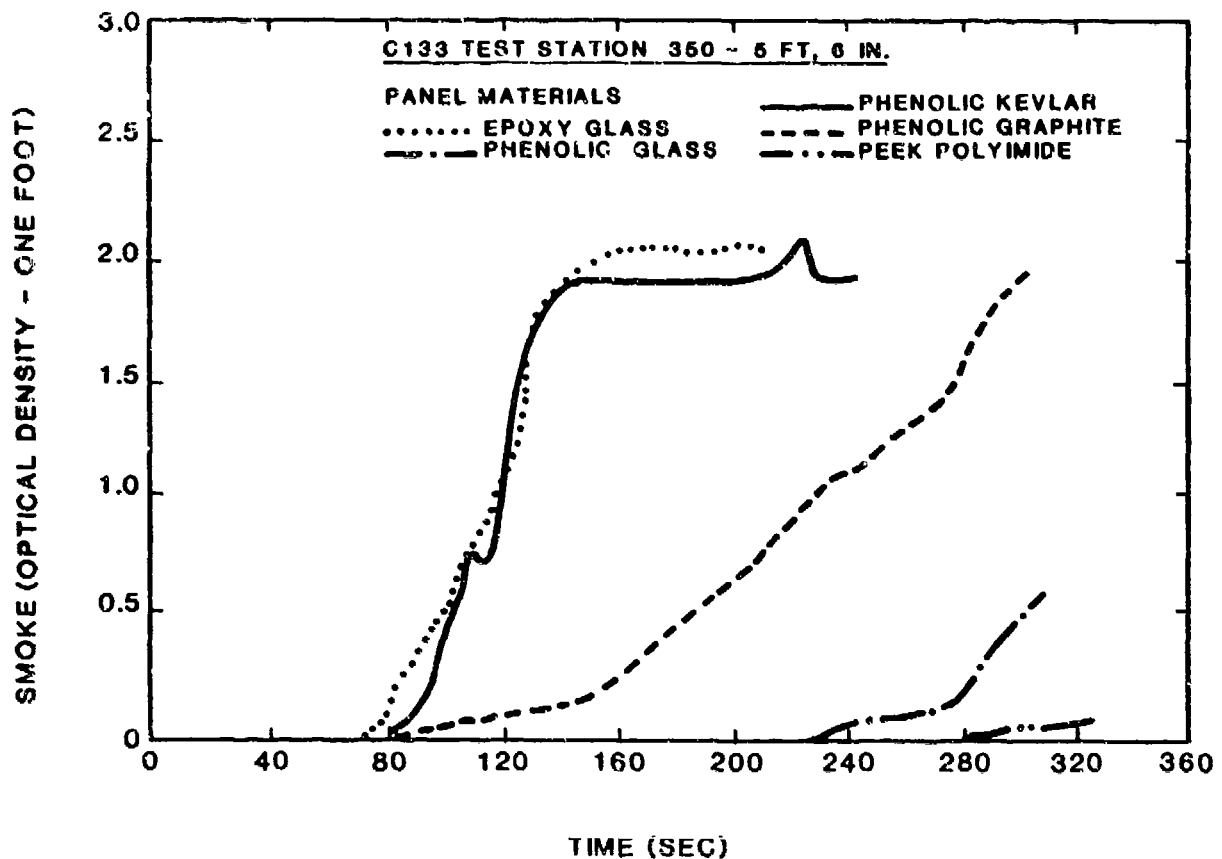


FIGURE 69. COMPARATIVE SMOKE PROFILES OF HONEYCOMB PANELS WITH VARIOUS FACE SHEETS DURING FULL-SCALE FIRE TESTS.

A number of decorative films for aircraft interior sandwich panels were investigated by Kourtides (Reference 110). These films were investigated as replacements for the polyvinyl fluoride (PVF) film currently used in aircraft interiors. Candidate films were studied for flammability, smoke emission, toxic gas emission, flame spread, and suitability as a printing surface for the decorative acrylic ink system. The films were evaluated as pure films only, films silk-screened with acrylic ink, and films adhered to a phenolic fiberglass substrate. Kourtides found that the propensity to burn and the toxic gas emission, especially hydrogen fluoride (HF), of the panels can be significantly lowered by using polyetherketone as a substrate film suitable for screen printing ink. However, potential problems, such as clarity, gelation spots in the film, and suitable width, will have to be resolved before this film can be developed to its full potential. An aramid polyamide film had good fire-resistant properties but had low elongation and was UV-unstable. All of the fluorinated films (baseline PVF, FM (flame modified) PVF, and polyvinylidene fluoride) exhibit very high HF evolution.

Simulated full-scale fire tests done on cargo compartment ceiling liners for Class D cargo compartments showed that fiberglass liners performed much better than Nomex liners (Reference 111). The Nomex liner burned through in

each case. Although the polyester resin used with the fiberglass ceiling liner was partially burned away, the glass cloth remained intact for all tests and proved that the fiberglass liner could contain baggage fires. This project also revealed that the test method specified in FAR 25.855 and FAR 25.853 does not reflect the burn-through resistance of Class D cargo liners subjected to realistic fires.

The effectiveness of different materials in containing a fire was also shown in a program directed at improving the flame resistance of aircraft window systems (Reference 5). Full-scale fire tests were performed in a 20-ft long section of a salvage DC-10 aircraft fuselage in which the window configurations were exposed to flame impingement from an adjacent external JP-4 fuel fire. During this program two tests were conducted using different types of panels adjacent to the windows. These comparative tests showed that an aluminum interior decorative panel reached the incipient melting temperature of aluminum in 164 sec after fuel ignition while a honeycomb panel required 231 sec before reaching the same temperature. This difference of 67 sec represents significant delay in the temperature rise between the two interior panel configurations. Since the temperature rise of the interior honeycomb panel was significantly slower, this panel would delay flame intrusion into the cabin interior.

5.4.5 Aircraft Insulation

Suitable insulation installed in the interior walls of crew and passenger compartments can help protect occupants from heat generated from an exterior postcrash fire as long as the fuselage remains intact. However, not all types of insulation are suitable, and some insulations, such as glass wool or fiberglass, may worsen, rather than lessen, the postcrash fire hazard.

Tests conducted under the sponsorship of the NASA/Ames Research Center provided evidence of the effectiveness of a modified polyisocyanurate semirigid foam. A C-47 aircraft fuselage was separated into two zones: one a reference zone with no modification, and the other a zone provided with the foam insulation, as shown in Figure 70. Fuel-fed ground fires were lighted next to the aircraft fuselage and allowed to burn for approximately 10 min. Temperatures recorded inside the aircraft fuselage are shown in Figure 71. Little smoke or gas was evolved. Occupant survival time inside the reference section would have been no more than 1-1/2 min, while an occupant in the insulated section could have survived for approximately 9 to 10 min. (See Section 3.3.1 for a detailed discussion of human tolerance to heat.)

The application of similar technology to rotary-wing aircraft has not been as successful. Fire tests of a CH-47 and a UH-1D helicopter showed that only limited protection could be attained for occupants for the first few minutes following the onset of a postcrash fire (Reference 112). Two main factors accounted for the limited protection attained. These were (1) the unreliability of the protective wall materials because of problems in suitably applying the materials to the helicopter wall structures, and (2) the poor fire resistance of currently used Plexiglas helicopter windows.

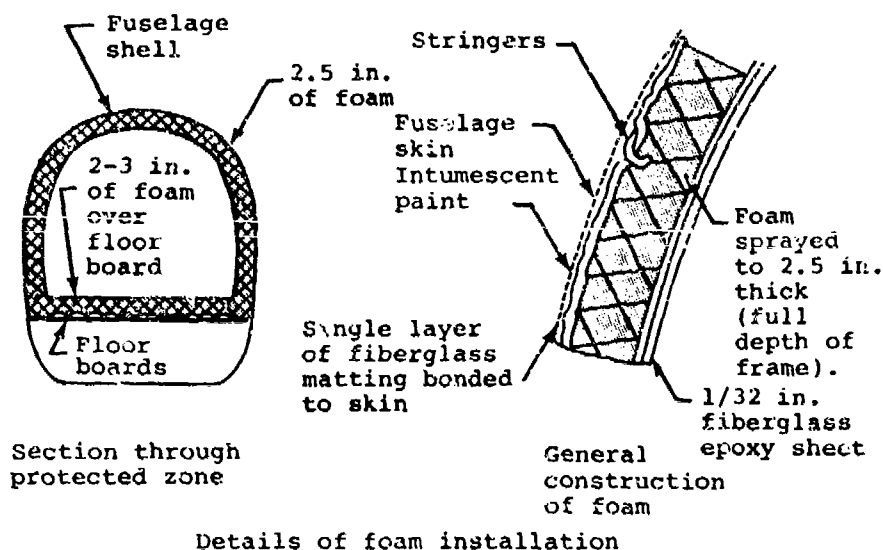
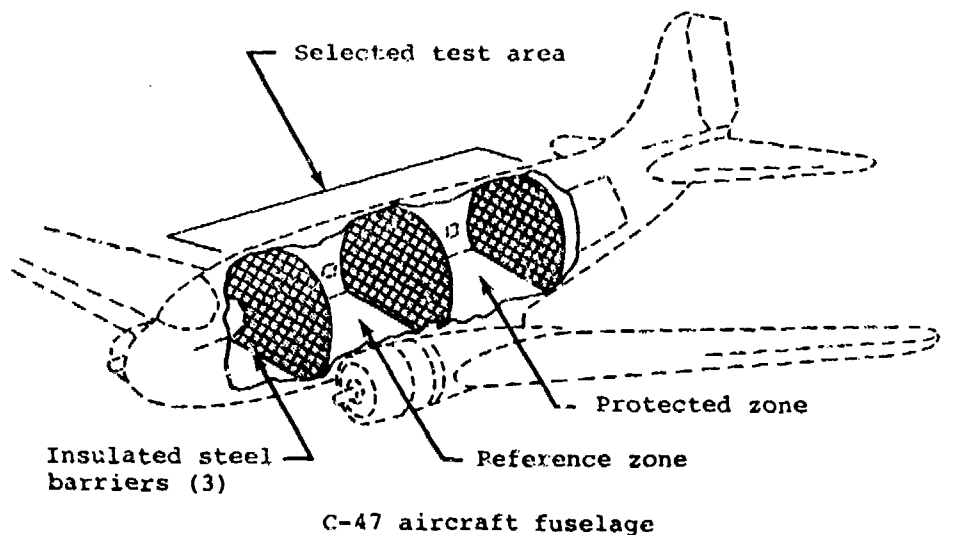


FIGURE 70. SEMIRIGID FOAM INSULATION TEST CONFIGURATION.

The walls of the two helicopters posed different insulation problems because of their different structures. Fire penetrations in the CH-47 walls occurred where the isocyanurate foam could not be applied because of the presence of wiring, air ducts, and hydraulic oil tubes. The UH-1D walls did not lend themselves to foaming because of the absence of ribs and formers. The sodium silicate hydrate panels used to protect the interior walls partially collapsed because of the absence of structural support.

Although the postcrash fire protection was limited, in-flight simulation tests conducted during the same program indicated that it should be possible to protect the habitable compartment against a fire occurring in an adjacent compartment. Sodium silicate hydrate panels lining the fire compartment successfully contained the fire and kept temperatures in the adjacent cabin far below human tolerance levels.

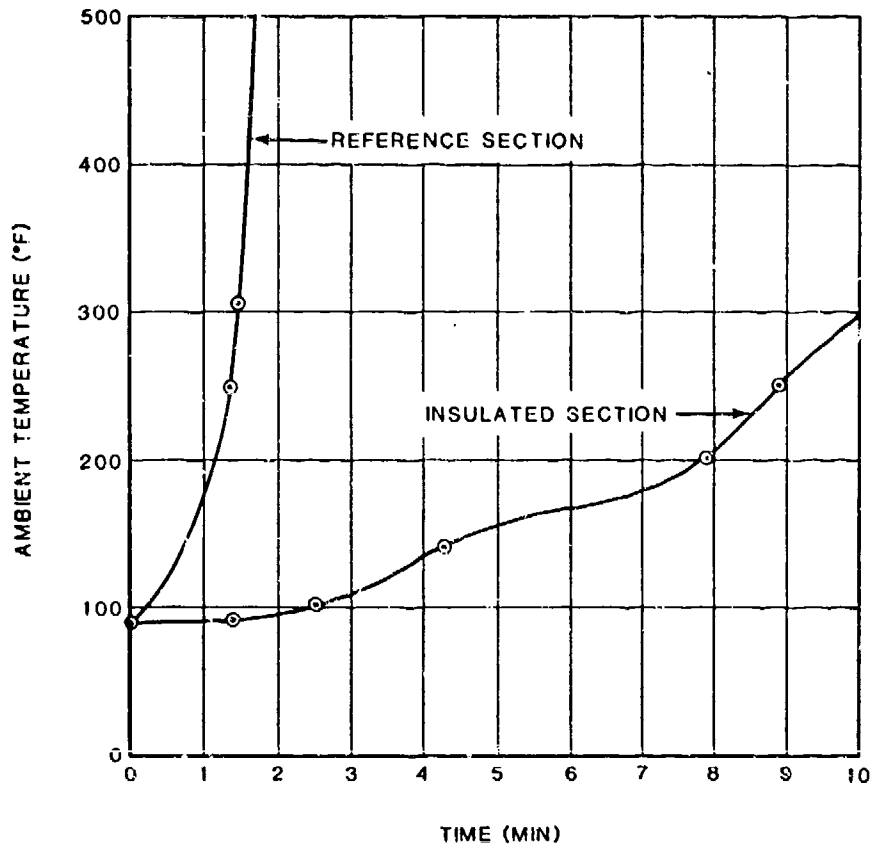


FIGURE 71. COMPARTMENT AMBIENT TEMPERATURE VERSUS TIME FROM FUEL IGNITION DURING FOAM INSULATION TESTS.

Intumescent paints and coatings provide another method of thermal insulation. These fire-retardant materials react to the heat of a fire by swelling and forming a thick, low-density, polymeric coating or char layer, thus protecting the coated surface from the full effects of the fire. An intumescent paint was sprayed on the interior fuselage wall in the CH-47 foam test described above to provide a void fill between the frame-foam interface to prevent burn-through at that point.

More research must be done in this area, however, before these materials can provide postcrash fire protection by themselves. Furnace test results for eight commercially available intumescent paints and coatings indicated that none of them could provide the desired fire protection (Reference 112). Although these materials intumesced readily, the fire gases eroded the char very quickly when the coatings were exposed directly to the fire. The coatings were not effective on the nonfire side of the aluminum panel, because the char could not support itself once the panel burned away. Furthermore, most of them produced noxious fumes, and therefore should not be applied in habitable compartments. These materials did show promise, however, as linings for potential fire compartments to protect occupants against

in-flight fires resulting from fuel or hydraulic line leakage. Flight-critical components next to a fire zone can also receive partial protection from these paints.

5.4.6 Windows

The documented early failure time of cabin windows in aircraft accidents involving postcrash fire led the FAA to investigate thermally improved aircraft window systems to prevent flame penetration into the passenger cabin during the evacuation of the occupants (Reference 5). A typical commercial aircraft cabin passenger window assembly is composed of a dual pressure pane configuration and an acoustic dust shield or scratch pane. The pressure window system consists of an outer or structural pane and an inner or fail-safe pane, both fabricated from stretched acrylic (polymethylacrylate). The FAA tested these standard window assemblies along with an improved window assembly in which the inner acrylic fail-safe pane was replaced by one fabricated of a new polymeric material identified as EX 112. This material is a high-char yield transparency made from trimethoxy boroxine modified epoxy resin. The two panes in both window systems were held in position by an elastomeric (silicone) gasket and clipped to the window frame.

Full-scale fire tests were conducted on the standard and thermally improved window systems using a 20-ft-long section comprising portions of the skin, doubler, and belt salvaged from a DC-10 and cut into segments containing two adjacent window openings, thereby providing a means of evaluating the standard and thermally improved windows systems under identical fire conditions. The two adjacent windows were separated internally by means of a vertical steel sheet. The fire pan could be filled with variable quantities of aviation fuel to provide the required burning time.

Test 1 was conducted using Kaowool insulation on the inside of the fuselage skin. The results of this test indicated that the thermally improved window configuration provided an overall improvement in flame resistivity over the standard acrylic window system of at least 79 sec. During this experiment, the silicone rubber window gasket around the improved window system provided adequate thermal and mechanical stability to prevent flame intrusion into the cabin for 225 sec, the duration of fire exposure. A similar silicone rubber gasket mounting the stretched acrylic panes in the standard window configuration became fused to the edges of the panes, which melted, shrank, burned, and fell into the fire pool in approximately 146 sec. The researchers noted that the thermal resistivity demonstrated by the gasket under severe fire exposure was noteworthy, and its survival was attributable in part to the thermal resistance of the EX 112 fail-safe pane.

In Tests 2, 3, and 4 the average failure time of the standard acrylic and thermally improved (EX 112) fail-safe window panes, using standard glass fiber insulation, was 198 and 249 sec, respectively, after fuel ignition. These data indicate that, on average, an improvement of fire resistivity of 51 sec was obtained by the improved window configuration over the standard window system. Thus the flame resistance provided by the thermally improved EX 112 window pane was significantly longer than that provided by the standard stretched acrylic type.

5.5 MATERIAL SELECTION CRITERIA

5.5.1 General Considerations

As stated in the introduction to this chapter, the selection of interior materials is governed by several varied, and sometimes conflicting, requirements. All interior materials must effectively meet their original intended uses. For instance, seat cushions must provide a certain degree of comfort, must possess specific crash-resistant characteristics of compressive modulus and rebound, and must meet minimum durability criteria. The additional requirements of low flammability and low smoke and toxic gas emissions can create a problem in finding materials that meet all of the criteria, and trade-offs must sometimes be made. The following guidelines should be considered in establishing priorities for trade-offs.

In aircraft that are equipped with crash-resistant fuel systems the importance of material flammability is reduced, but should always be considered in order to minimize the hazards of in-flight fires. The importance of material flammability characteristics increases as the amount of flammable materials increases. Those materials most prevalent in the aircraft, such as noise insulation and interior structural components, should possess as low a flammability rating as possible. Low flammability characteristics for restraint systems, on the other hand, are not as critical because of the small amount of material used. Seat cushions and upholstery, depending on the quantity used, might fall somewhere in between in regard to the importance of their flammability characteristics. This should not be construed as deleting flammability requirements for those materials used in lesser quantities. Every effort should be made to select the least flammable material available for each end use.

Those items involved directly in crash-resistance, such as seat cushions and restraint systems, must satisfy all crash-resistant requirements as a first priority. If there is no material available that can satisfy both the crash and postcrash (flammability) requirements, some reduction in optimum flammability characteristics might have to be tolerated. However, the designer should first consider protecting the more flammable material with a less flammable one. The effectiveness of the latter approach must be confirmed by flammability tests of the candidate system to ensure that the system performs as anticipated.

If materials that cannot fulfill all of the flammability requirements contained in the following section must be selected, materials that present the least amount of fire hazard should be chosen. The material should not ignite easily and should have as low a flame spread rate as possible. Care must be taken to avoid selecting a material with high flashover potential, such as a nonfire-retarded polyurethane foam, unless it is protected by a fire-blocking layer.

Smoke and toxic gas emissions also should be held to minimum possible levels. Those materials known to emit significant amounts of toxic gases, such as modacrylics, should not be used.

5.5.2 Flammability Test Criteria

At the present time, the FAA flammability requirements specified in FAR 25.853 (Reference 113) are the only specific mandatory requirements for aircraft interior materials. The FAA amended the requirements in 1984 to add additional flammability tests for seat cushions (except for flight crewmember seats) and is adding the OSU rate of heat release test procedure for interior ceiling and wall panels, partitions, etc.

Although many of the other flammability tests can and should be used for screening materials during the selection process, interior materials in all U.S. Army aircraft should meet the requirements of FAR 25.853 as a minimum. Seat cushion requirements should be met for all seats, including those of flight crewmembers.

FAR 25.853 flammability requirements are summarized below.

Materials used in each compartment occupied by the crew or passengers must meet the following test criteria as applicable:

Ceiling panels, wall panels, partitions, structural flooring, etc. Must be self-extinguishing when tested vertically by applying a 1550 °F flame to the lower edge of the specimen for 60 sec. Average burn length not to exceed 6 in. Average flame time after removal of test flame not to exceed 15 sec. Drippings may not continue to flame more than an average of 3 sec. In addition, materials must meet the OSU heat release rate in a vertical position exposed to a total heat flux on the specimen of 3.5 watts per square centimeter (W/cm^2). The average total heat release must not exceed 65 kilowatt-minutes per square meter, and the average peak heat release rate must not exceed 65 kilowatts per square meter.

Floor coverings, textiles (including upholstery), seat cushions, padding, insulations (except electrical insulation) etc. Must be self-extinguishing when tested vertically by applying a 1550 °F flame to the lower edge of the specimen for 12 sec. Average burn length not to exceed 8 in.; average flame time after removal of test flame not to exceed 15 sec. Drippings may not continue to flame more than an average of 5 sec. In addition, seat cushions must meet an oil burner test. This test exposes the side of the seat cushion to a specified oil burner for 2 min. During the next 5 min the burn length must not reach the side of the cushion opposite the burner and must not exceed 17 in. Also, the average percentage weight loss must not exceed 10 percent.

Acrylic windows, signs, restraint systems, etc. may not have an average burn rate greater than 2.5 in./min when tested horizontally by applying a 1550 °F flame to the specimen edge for 15 sec.

The reader is referred to References 114 and 78 for the complete text of the regulations and test requirements.

If fire-retardant coatings are used for fabric and trim materials, the effects, if any, of routine maintenance and cleaning procedures must be assessed. If the coatings can be removed by routine cleaning procedures, the

flammability test should be repeated after a representative number of cleaning cycles.

5.5.3 Smoke and Toxic Gas Test Criteria

The FAA has not adopted criteria for smoke or toxic gas emissions from interior materials because the full-scale fire tests have demonstrated a correlation between flammability and smoke emission characteristics of the materials tests. Also, the full-scale tests showed that there was a significant correlation between flammability and toxic emissions and that severe hazard from toxic emissions does not occur until a flashover occurs. In addition, there has not been good correlation shown between any of the laboratory tests for smoke and toxic gases and full-scale fire tests. It should be emphasized, however, that these generalizations are true only for the materials that have so far been tested in the full-scale tests and only for the full-scale tests simulating a fuel fire outside of the fuselage. It is possible that, in the future, after more work has been done on the laboratory tests, some criteria might be adopted.

In the meantime, screening tests should certainly be conducted on candidate materials and systems to enable the designer to select those materials with the lowest smoke and toxicity emissions and to preclude using materials which might generate high levels of smoke and toxic gases. It is recommended that materials be screened for smoke emissions using either the test procedure for the OSU release rate apparatus specified by NFPA 263 (Reference 80) or the modified NBS smoke chamber as outlined in Reference 71.

The screening method to distinguish materials producing more toxic combustion products than those from other materials should be performed using the NBS toxicity test method (Reference 82). In this test, one material is considered significantly more toxic than another material if the toxic concentrations generated differ by an order of magnitude.

5.5.4 Evaluation of Materials

The flammability properties of polymeric materials currently used in commercial aircraft have been qualitatively assessed by the Committee on Fire Safety Aspects of Polymeric Materials of the National Materials Advisory Board (Reference 114). This information is presented in Table 17 to assist the designer in evaluating materials. Table 17 should not be construed as a list of acceptable materials, since the assessment is based on flammability properties only. Specific application to U.S. Army aircraft, which necessarily have different functional requirements than do commercial aircraft, must be considered in final material selection.

Also, a great deal of effort is being expended in the development of newer, less flammable, less toxic interior materials. The flammability properties of these materials are scattered throughout the literature. Fortunately for the designer, the Urban Mass Transportation Administration maintains a computerized materials information bank that will be continually updated as new materials and testing methods are evaluated. The data bank contains flammability, smoke, and toxicity properties obtained by a variety of standard testing procedures for candidate materials. These data are supplemented with available physical and mechanical properties, as well as durability and maintainability data. The data in the bank can be accessed from the Transportation

TABLE 17. FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development					
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish
1. Acoustical thermal insulation	a. Fiberglass insulation with paper backing	+	+	+	+	+	-	-	-	-	-	-	+	+	+	+	+	+
	b. Glass wool	0	+	+	+	+	-	-	-	-	-	-	-	-	-	-	-	-
2. Adhesives	a. Polyimides	0	0	0	+	0	0	0	0	0	0	0	0	0	0	0	0	0
	a. Epoxides	0	0	0	-	*	0	0	0	-	*	0	0	0	0	0	*	0
	b. Neoprenes	0	0	0	-	-	0	0	0	-	-	0	0	0	0	-	-	0
	c. Buna N phenolics	0	0	0	*	*	0	0	0	*	*	0	0	0	0	*	*	0
3. Air duct	d. Acrylics	-	-	-	*	*	-	-	-	*	*	-	-	-	-	*	*	-
	Urethane foam	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4. Regysage	a. Phenolic/glass laminate	0	0	0	0	0	*	*	*	*	*	*	*	*	*	*	*	*
	a. PVC-coated veneer honeycomb	0	0	0	0	0	*	*	*	*	*	*	*	*	*	*	*	*
	b. PVF on phenolic/glass honeycomb	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development						
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	
5. Blankets	a. Aramid	0	0	0	*	*	a. Wool	-	0	-	0	-	0	+	+	+	*	+	
	b. Aramid/phenolic	0	+	0	0	*	b. FR wool/rayon 85/15	0	0	0	-	0	0	+	+	+	*	+	
		0	0	0	0	*	c. FR wool	0	0	0	-	0	0	0	+	+	+	*	+
							d. Wool/PVC	+	+	0	-	+	+	+	+	+	+	+	
							e. Wool/modacrylic	-	0	0	-	0	-	0	+	+	+	*	+
							f. FR cotton	0	0	0	-	*	+	+	+	+	+	*	+
							g. PVC/PVCH	0	0	0	-	0	-	0	+	+	+	*	+
							h. FR modacrylic/Kynel	0	0	0	*	*	0	0	+	+	+	*	+
							i. FR rayon	0	0	0	-	-	+	+	+	+	+	*	+
	6. Cabinet							a. FR polyethylene skins on epoxy/glass, aramid/phenolic core	0	0	0	0	-	*	+	+	+	*	+
							b. PVF covering on epoxy/glass, aramid/phenolic core	*	0	0	*	-	*	+	+	+	*	+	

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development																						
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish																	
7. Cargo liners	Polyimide resin/glass	+	+	+	*	+	a. Rigid polyurethane sheet on aramid honeycomb	0	0	-	-	-	+	+	+	+	+	+																	
							b. Polyester resin laminates	*	*	0	-	*	*	*	*	*	*	*	+	+	+	+	+												
							c. Polyurethane resin laminates	*	*	0	-	*	*	*	*	*	*	*	+	+	+	+	+	+											
8. Carpets (FR latex FR backing)	a. Aramid	*	*	*	*	*	a. Modacrylic	*	*	-	-	0	*	*	*	*	*	*																	
							b. FR wool	*	*	-	-	0	*	*	*	*	*	*	*	*	*														
							c. Wool/nylon	0	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*												
							d. Wool	0	-	-	-	*	*	*	*	*	*	*	*	*	*	*	*												
9. Ceiling panels and covering	a. Vinyl-coated epoxy/glass laminate honeycomb	0	0	0	-	-	+	+	+	+	+	+	+	+	+	+	+	+																	
																			b. PVC-coated cotton	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
																			c. PVF-epoxy/phenolic over glass-filled aramid honeycomb	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development							
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish		
10. Curtains and draperies	a. Aramid	0	0	0	*	0	a. Wool	-	-	-	-	0	a. Polybenzimidazole	+	+	+	*	+		
	b. Fiberglass	*	+	+	+	*	b. Modacrylic	0	0	0	-	0	b. FR aramid	+	+	+	*	+		
	c. Novoloid	0	0	0	+	0	c. FR wool	0	0	0	-	0	c. FR aramid/novoloid	+	+	+	*	+		
	d. Aramid/novoloid	0	0	0	-	*	d. FR cotton	0	0	0	-	*	-							
							e. Cotton/rayon	-	-	-	*	-								
							f. PVOH/PVC	0	0	0	-	*	0							
							g. Modacrylic/phenolic	0	0	0	-	*	0							
11. Emergency slides							Neoprene-coated nylon	-	-	*	-	-	-	See No. 17 (life vests)						
12. Floor coverings							a. PVC laminates	0	0	0	0	-	0	FR epoxy coating	0	0	0	*	*	+
							b. Vinyl/ABS	0	-	-	-	-	-							
13. Floors	a. Metal-faced balsa	+	+	0	*	+	a. Epoxy/fiberglass aramid	0	+	0	-	*	0	a. Polyimide/fiberglass-faced aramid honeycomb	+	+	0	*	*	+
	b. Metal-faced aramid honeycomb	+	+	0	*	*	b. Phenolic-faced Styrofoam	0	*	*	-	*	*	b. Phenolic/fiberglass-faced aramid honeycomb	+	+	0	*	*	+
							c. Furan/fiberglass-faced honeycomb							c. Furan/fiberglass-faced honeycomb	+	+	0	*	*	+

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development													
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish								
14. Hoses	Silicone	0	0	*	0	*	a. Neoprene b. Buna N c. Viton	0	0	*	-	-	0	0	*	-	-	-	a. Phosphazenes	+	+	+	*	*	+	
15. Lavatory paper							Paper and tissues	-	-	-	0	0	-	-	-	+	+	+	FR paper: improved dispensing and discard	+	+	+	*	*	+	
16. Life rafts							a. Urethane-coated nylon fabric b. Neoprene-coated nylon fabric	-	-	-	-	-	-	-	-	-	-	-	See No. 17 (life vests)	-	-	-	-	-	-	
17. Life vests							a. Neoprene-coated nylon fabric b. Urethane-coated nylon fabric	-	-	*	-	-	-	-	-	+	+	+	a. FR neoprene-coated nylon fabric b. FR neoprene-coated aramid fabric c. Fluoroelastomer on aramid d. Phosphazene-coated aramid	+	+	+	*	*	-	+

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development							
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish		
18. Movie film	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
19. Paints (must be considered with substrate)	a. Polyester	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	a. Nitrocellulose, tung oil lacquers	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
	b. Alkyds and urethane	-	*	0	-	*	*	-	*	0	-	*	*	-	*	0	-	*		
	c. Epoxy and polyester primes	-	-	0	-	-	-	-	0	0	-	-	-	-	0	0	-	-		
	d. Fire-retardant paints	0	0	0	-	*	0	0	0	0	-	*	0	0	0	0	-	*		
e. Intumescent paints	0	0	0	-	*	0	0	0	0	-	*	0	0	0	0	-	*			
20. Partitions, clothes, closet, and side walls	a. PVC or PVF on phenolic/fiberglass honeycomb	*	0	0	*	-	*	0	0	*	-	*	a. FR epoxy coating, furan/glass face, phenolic honeycomb	0	0	0	*	*	*	
	b. PVC laminate over veneer-faced honeycomb	*	*	*	-	-	*	*	*	*	-	*	b. FR epoxy coating phenolic/glass face phenolic/glass honeycomb	0	0	0	*	*	*	
	c. PVC laminate over epoxy/glass-faced honeycomb	*	*	*	-	-	*	*	*	*	-	*	c. Same as "a" with aramid honeycomb	0	0	0	*	*	*	
	d. FR epoxy, aramid/phenolic core, PVF film	0	0	*	*	*	*	*	0	0	*	*	*	*	d. Same as "b" with aramid honeycomb	0	0	0	*	*

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development											
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish						
21. Pillows	Cover//fill						Cover//fill						Cover//fill											
	a. Aramid//aramid						0	0	0	-	*	0	a. Cotton//PET						-	-	-	-	-	-
	b. FR cotton//aramid						0	0	0	-	*	0	b. Cotton//polyurethane						-	-	-	-	-	-
	c. Aramid//FR cotton						0	0	0	-	*	0	c. FR paper//PET						-	-	-	-	-	-
22. Sealants	d. Novoloid/aramid//aramid/novoloid						0	0	0	-	*	0	d. FR cotton//FR cotton						0	0	*	-	-	0
	e. FR paper//PVC/PVQH						0	0	*	-	-	0	e. FR paper//PVC/PVQH						0	0	*	-	-	0
	a. Polysulfide						-	-	*	*	0	-	a. Polysulfide						-	-	*	*	0	-
23. Seat belts	b. Fluorosilicone						0	0	*	0	-	0	b. Fluorosilicone						0	0	*	0	-	0
	c. Viton						0	0	*	*	-	0	c. Viton						0	0	*	*	-	0
	a. Nylon						0	0	0	0	*	0	a. Nylon/rayon						-	-	*	*	*	-
b. Aramid						0	0	0	-	*	0	b. Aramid						0	0	0	-	*	0	
												Polybenzimidazole						+	+	+	+	+	+	

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development					
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish
24. Seat cushions (foam)																		
25. Seat upholstery																		
26. Seat trim																		

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD). FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development					
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguish
27. Thermo-plastic parts	a. FR polycarbonate	+	*	0	*	*	a. Bispheno A polycarbonate	0	*	*	*	*	0	*	*	*	*	*
	b. FR PPO blends	0	0	0	0	*	b. PPO blends c. FR-ABS	0	-	-	-	-	0	0	0	-	-	-
28. Trash can liner							Polyethylene	-	-	-	0	0	-	-	-	-	-	-
29. Wall covering							PVF over PVC film	0	0	0	-	-	0	0	0	-	-	0
30. Windows (transparent aircraft enclosures)							a. Acrylates	-	-	-	-	*	*	*	*	*	*	*
							b. Bispheno A polycarbonates	0	*	*	*	*	*	*	*	*	*	*
							c. Polyarylsulfone	+	+	+	+	+	+	+	+	+	+	+

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

TABLE 17 (CONTD): FLAMMABILITY APPRAISAL OF MATERIALS USED IN COMMERCIAL AIRCRAFT

Presently Used and Available

Use	Generally Acceptable						Needs Improvement						Possible Future Development					
	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguishing	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguishing	1. Ease of Ignition	2. Flame Spread	3. Heat Release	4. Smoke	5. Toxicity	6. Ease of Extinguishing
31. Window shade assembly	0	0	*	*	*	0	0	*	*	*	0	*	*	*	*	*	*	*
	a. FR bisphenol A polycarbonate																	
32. Wire insulation	0	0	*	*	*	0	*	*	*	*	*	*	*	*	*	*	*	*
	b. Polysulfone																	
32. Wire insulation	*	*	+	+	+	+	*	*	*	*	*	*	*	*	*	*	*	*
	a. Polyimide with Fluoro-carbon outer jacket																	
	b. Silicone-covered fiberglass sleeve																	
32. Wire insulation	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
	c. Polytetrafluoroethylene																	
	c. Polychlorotrifluoroethylene (as conduit)																	
32. Wire insulation	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
	a. PVC with fiberglass and nylon jacket																	
32. Wire insulation	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
	b. Fluoroelastomer with fiberglass sleeving																	
32. Wire insulation	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+
	c. Furan/glass laminate, FR coating																	

KEY: (-) = unsatisfactory, (+) = good, (*) = further study needed, and (0) = satisfactory.

Systems Center, located in Cambridge, Massachusetts. The data will be made available to designers, transit authorities, and other Government agencies.

Fire blocking of polyurethane seat cushions with slipcover liners of composite fabrics is taking place now in response to FAA requirements for fire blocking of aircraft seat cushions in airline passenger cabins. Performance of a fire-blocking fabric is greatly influenced by the specific polyurethane foam being protected and the decorative upholstery covering installed over the assembly. Upholstery covering fabrics may be grouped into five major categories. The chart in Figure 72 illustrates the order of merit of these fabrics in assisting the fire blocking mechanisms or requiring greater fire blocking capabilities underneath them (Reference 115).

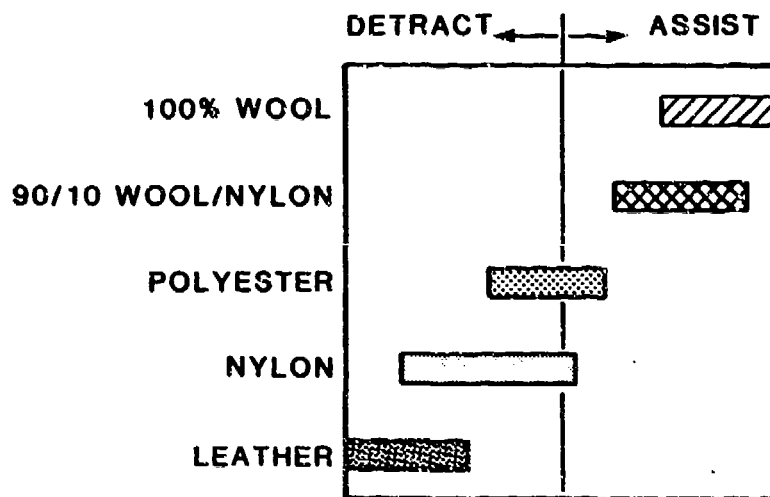


FIGURE 72. UPHOLSTERY FABRIC INFLUENCE ON FIRE BLOCKING MECHANISM.

At this time no single fire-blocking fabric dominates the field. Table 18 shows the range of fabrics currently in use or available. Among the factors to be considered in selection of a fabric are:

- Thermal performance
- Cost
- Weight
- Durability
- Comfort
- Maintainability
- Producibility

TABLE 18. FIRE BLOCKING FABRIC

Fiber(s)	Manufacturer	Designation	Construction	Comments	Weight	
					kg/m ²	oz/yd ²
Kevlar®/Nomex® Glass	Amatex Corp. RM Industrial Products Co., Inc.	Nor-Fab® 11HT26	Herringbone Weave	Also offered a laminized	0.373	11.0
		Flextra Coth 42A060 Weave Set	Plain Weave	Also offered Neoprene coated	0.356	10.5
Kevlar®/Nomex®	DuPont	E89-4190	non-woven	4 layer quilt (5 layer version also)	0.258	7.6
		Merge 17250	3 layer non-woven 1 layer woven	2 Kevlar® & Nomex®, 1 Kevlar® Nomex®, quilt	0.261	7.7
		Merge 17251	3 layer non-woven 1 layer woven	Kevlar®, quilt Nomex®	0.261	7.7
		5450 PC	4 layer non-woven 1 layer woven	Kevlar®, quilt Nomex®	0.312	9.2
PBI®/Kevlar®	Amatex Corp. Amatex Corp. Amatex Corp. Amatex Corp. Tex-Tech. Ind., Inc. Tex-Tech. Ind., Inc.	Nor-Fab® 11	Plain Weave	Can be auminized	0.237	7.0
		Nor-Fab® 7TT-112	Twill Weave	Can be auminized	0.237	7.0
		Nor-Fab® 8PT-140	Plain Weave	Can be auminized	0.271	8.0
		Nor-Fab® 10TT-101	Twill Weave	Can be auminized	0.339	10.0
		XD-192:62R	Felt		0.264	7.8
		XT-48417R	Felt		0.186	5.5
PBI®	Tex-Tech Inc., Inc.	XD-192:19R	Felt		0.339	10.0

TABLE 18 (CONTD). FIRE BLICKING FABRIC

Fiber(s)	Manufacturer	Designation	Construction	Comments	Weight kg/m ² oz/yd ²
Kevlar®/Glass	Amatex Corp.	8PT-135	Plain Weave		0.271 8.0
Kevlar®/Carbon	Teikoku-Sen-i-Co., Ltd.	PKF842	Felt; (Needle Punched)	Imported by C. Itoh & Co.	0.214 6.3
	Teikoku-Sen-i-Co., Ltd.	PK2001-1FY-P	Coated Weave	Imported by C. Itoh & Co.	0.214 6.4
Carbon/Kevlar®/ Conex	Teijin Shoji Kaisha, Ltd.	COP 210	Felt;		0.214 6.3
	Teijin Shoji Kaisha, Ltd.	COP 280	Felt;		0.234 6.9
	Teijin Shoji Kaisha, Ltd.	COP 300	Felt;		0.319 9.4

Major factors affecting the thermal performance of the fire blocking fabric are:

- Fiber material/fiber material combination
- Weight -- increased mass improves capability
- Tightness of weave/construction -- decreasing porosity improves capability
- Airspaces -- trapped air increases capability
- Coatings -- increased capability by decreasing porosity or adding a layer which is thermally reactive (aluminized or organically coated).

For a particular application, a small screening program will probably have to be run with an initial array of fabrics. Reference 115 provides additional data which would help a designer in selecting upholstery fabric and fire-blocking fabrics.

Specialty foams have been developed which provide an alternative to the composite fabric for fire-blocking. The LS-200 neoprene is used in institutional and ground transportation applications as a covering in bonded moderately thick sections. Although the airline companies find the neoprene foam unacceptable for passenger seating applications because of the weight penalty, this type of foam should be considered for smaller aircraft with fewer seats where the weight penalty would not be prohibitive. Vonar is also used in layered construction but has been considered unacceptable because of its weight. It also should be considered for those aircraft with fewer seats.

6. DITCHING PROVISIONS

6.1 INTRODUCTION

Since U. S. Army aircraft are frequently flown over water, unplanned water landings are not uncommon. The crash parameters, survival envelope criteria, and human tolerance limits presented in Volume II of this design guide are equally applicable to water and land impacts. However, the water environment during the postcrash phase presents additional unique problems that do not occur on land. This chapter addresses those problems and offers general design concepts and guidelines to increase occupant survival in ditching situations.

6.2 DITCHING CONDITIONS

An aircraft ditching is a forced landing of an aircraft in the water. It is not to be confused with an uncontrollable crash into a water environment. Ditching is a premeditated maneuver deliberately executed by the pilot with the specific intention of abandoning the aircraft. In general, it is an act that offers reasonable hope of escape and survival. In fact, premeditated ditchings should have an equal or greater number of survivors than forced landings on land if adequate postcrash survival provisions are present. Analysis of ditching conditions shows survival can be enhanced by adequate (large, numerous) egress openings, highly visible lighting around escape openings, and, especially for passenger-carrying helicopters, truly effective aircraft flotation devices.

6.2.1 Aircraft Configuration and Survivability Characteristics

The majority of fatalities in light fixed-wing and rotary-wing aircraft ditchings are due to drowning. However, the behavior of the aircraft and consequent egress difficulties vary somewhat between the two different aircraft configurations. Injury patterns associated with water impacts and ditchings have been studied and are discussed in Reference 116.

6.2.1.1 Fixed-Wing Aircraft. Fixed-wing aircraft generally will remain afloat for a sufficient length of time to permit occupant evacuation. In a study of 306 light aircraft ditchings, Snyder and Gibbons found that, although actual flotation time was not clear in many cases, the known data indicated 90 to 95 percent of the aircraft stayed afloat long enough for safe egress (Reference 117). This finding is reflected in the relatively high survival rates determined from the study: 88.5 percent survival for both pilots and passengers. The authors also concluded that at least 50 percent of the resulting fatalities were caused by drowning after a successful egress. Thus, fatalities were related more often to lack of emergency personnel flotation devices than to impact trauma or egressing difficulties.

Aircraft configuration seems to be a factor in ditching incident survival. This same study determined that fixed-gear aircraft, whether high- or low-wing, are less successfully ditched than retractable-gear configurations. Occupants of high-wing, multiengine aircraft seem to have significantly less chance of surviving a ditching than do occupants of other types of fixed-wing aircraft.

6.2.1.2 Rotary-Wing Aircraft. Unplanned landings on water are difficult for rotary-wing aircraft because their high center-of-gravity configurations are for the most part unstable in this environment. The rotors cannot be relied upon to help keep the aircraft upright since the ditching may be due to loss of engine power, or waves may induce an early rolling tendency, causing the rotor blades to strike the water. Also, compressor blades very often become salt-incrusted and stall shortly after touchdown. In addition, a significant number of helicopter ditchings involve autorotation onto the water. Flaig, in a study of U. S. Navy helicopter ditchings from 1960 through 1974, found that 24 percent of controlled, unplanned water landings involved autorotation (Reference 118).

As with fixed-wing aircraft, most fatalities in helicopter ditchings are due to drowning. During a study of 78 Navy helicopters involved in water accidents resulting in the loss of 63 lives over a 4-year period, it was found that only 10 deaths were due to injuries (Reference 119). Twenty-five deaths were attributed to drownings and the remaining 28 were lost at sea. Twenty-one, or 40 percent, of those recovered drowned or lost at sea were last seen still in the aircraft. The overall survival rate seemed to correlate with the helicopter flotation time, as shown in Table 19.

TABLE 19. SURVIVAL RATE VERSUS HELICOPTER FLOTATION TIME (FROM REFERENCE 118)

<u>Flotation time</u>	<u>Survivors</u>	<u>Fatalities</u>	<u>Percent Fatalities</u>
<1 min	165	26	13.6
1-5 min	42	4	8.7
>5 min	83	5	5.7

In correlating fatality rates with specific helicopter models, however, Flaig found that the helicopter flotation capability did not correlate with the fatality rate of occupants who survived the impact but perished because the helicopter did not stay afloat long enough (Reference 118). This seeming inconsistency results from the finding that, in larger helicopters (more than four crew members), safety decreases faster with the number of people than it increases with relatively good flotation. Another finding, which bears on the issue of helicopter size versus flotation, is that passengers were much more likely to be fatalities than regular crew members. Of particular significance is the fact that 76 percent of the crew fatalities and 92 percent of the passenger fatalities were due to drowning. It is a matter of record that underwater escape training of U.S. Navy crewmembers has a large part to play in saving their lives.

6.2.2 Underwater Escape

Since the majority of ditched helicopters roll inverted and sink in only a few minutes, intrushing water might be expected to hinder emergency egress. Interviews of helicopter ditching survivors have confirmed this supposition, with intrushing water reported as a deterrent to escape far more frequently than any other problem (Reference 119). Intrushing water was the only egress problem encountered by 42 survivors. However, in addition, it was reported in conjunction with several other egress problems, as shown below:

<u>Egress Problem</u>	<u>Number of Survivors</u>
Inrushing water only	43
Inrushing water plus:	
Reaching hatch	34
Confusion/disorientation	26
Releasing hatch	16
Darkness	12
Fire/smoke/fuel	11
Releasing restraints	9

To determine the effectiveness of escape hatch illumination on ease of egress from submerged, inverted helicopters, simulation tests were conducted by the Naval Submarine Medical Research Laboratory utilizing trained divers (Reference 120). Tests were conducted using three different window escape hatches under day and night, light and no-light conditions. The only two variables that showed statistically significant effects were the window used for egress and the presence or absence of window lighting. (The lighting consisted of high intensity electroluminescent lights at the tops and sides of the windows.)

The one window emergency exit showing significantly longer egress time required the occupant to remove a seat back support tube from across the window and to exit from the window without striking a sponson support strut just outside the window.

More rapid egress occurred when the windows were illuminated than when they were not. There was no significant difference between the speed of night and day egress under either the light or no-light conditions. Even with the use of trained divers and controlled conditions, there were 16 recorded instances when subjects became disoriented, lost, and/or entangled within the helicopter. Fifteen of these instances occurred in the absence of illumination, and one occurred with the lights on.

6.3 EMERGENCY EGRESS OPENINGS

6.3.1 General Provisions

Emergency escape provisions are discussed in detail in Chapter 7. Although the provisions in Chapter 7 apply to all aircraft, the unique problems encountered in escaping a ditched aircraft, especially rotary-wing aircraft, dictate special consideration for egress openings. Maximum egress time prior to helicopter rollover into an inverted position and submergence can vary from a few

seconds to a few minutes. Therefore, occupant survival is highly dependent on egressing from the aircraft in a timely manner. If immersion suit usage is contemplated, the suits should be included in the demonstration test required in Section 7.2.1.

Since the ditching survival rate is dependent on the number of occupants in rotary-wing aircraft, more and larger emergency exits should be provided in passenger-carrying helicopters than might normally be provided. The configuration of each aircraft model dictates the potential available escape routes. Consideration should be given to providing additional escape hatches, which can be opened if necessary, in the overhead, deck, and tail sections to facilitate escape, especially if the aircraft sinks on its side.

6.3.2 Explosively Cut Exits

Explosive cutting charges can be used to provide quick-opening emergency exits in downed aircraft. These systems definitely should be considered for use in passenger-carrying helicopters operating over water. Their rapid initiation time (less than 0.1 second) and immunity to the crash conditions would provide the rapidity of opening and accessibility required of emergency exits in unplanned water landings.

Linear shaped charges should be placed around and extend beyond existing windows and hatches to preclude the problem of jammed or stuck exits. Strategically placed shaped charges in the overhead, deck, and empty bullhead spaces could provide the additional emergency exits required under the ditching conditions. Since Reference 121 indicates that the use of explosives underwater is hazardous to personnel, the system must be tested underwater for pressure signature prior to permitting underwater use.

Each exit should be capable of being actuated manually and independently from the rest so that only desired exits are opened, since opening of submerged exits may result in more rapid sinking. However, automatic actuation by water pressure could be used after all exits are submerged.

A detailed discussion of explosively created exit systems may be found in Section 7.2.7.

6.4 UNDERWATER EMERGENCY LIGHTING

Adequate emergency exit lighting is essential for rapid evacuation of any aircraft under conditions of reduced visibility. It is critical in ditching situations because of the disorientation of aircraft occupants and the limits of underwater visibility, even during daylight conditions. The following sections discuss the particular problems of underwater visibility and the criteria necessary for adequate emergency exit lighting under water. Emergency lighting in general is discussed in Section 7.3.

6.4.1 Underwater Visibility

The ability of an observer to detect an object depends not only on the intensity of illumination but also on the visual threshold of the observer's eye. Smith, et al., found that luminance* thresholds in water are higher than those in ambient air by about 1.5 log units (Reference 122). A principal reason for this is the loss of the unprotected eye's focusing power in the

water. This loss produces severe hyperopia; that is, the focal length of the eye is increased, and the viewed target cannot be brought into focus within the plane of the retina. In water one does not see a sharply defined target light, but rather a diffuse blur whose apparent size is much larger than it would be if viewed in the air. The increase in size has the effect of spreading the light intensity over too large an area to be compensated for by spatial summation in the retina, thus resulting in an increase in the luminance* required for detection.

The initial adaptation level of the eye also influences the luminance threshold. When an observer looks from a brighter field to a dimmer field, his eyes must adapt to the change in light intensity. Thus, increased target brightness or longer viewing times are required to compensate for the temporarily lower threshold sensitivity experienced when changing from higher to lower adaptation levels. The rate of adaptation in water parallels that in air, as illustrated in Figure 73 (Reference 122). Thus, the difference in visibility thresholds between air and water mediums is approximately 1.5 log units at all adaptation levels.

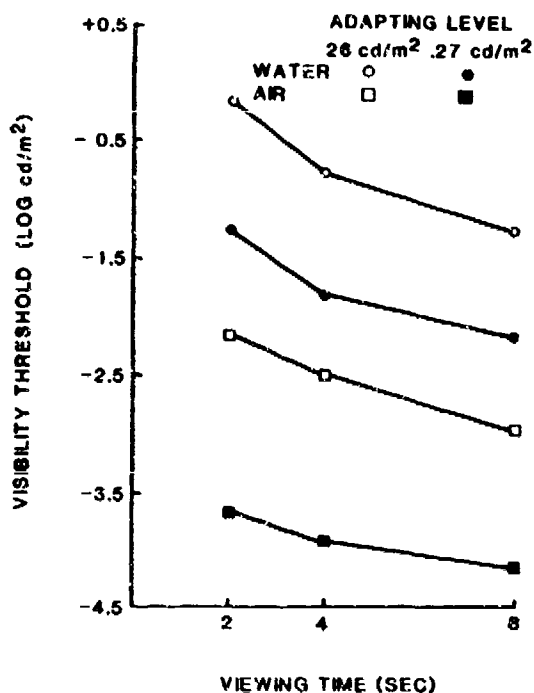


FIGURE 73. COMPARISON OF LUMINANCE THRESHOLDS AT TWO ADAPTING LEVELS IN WATER AND IN AIR.

*Luminance is the photometric brightness or luminous intensity of a surface in a given direction per unit of projected area. It is measured quantitatively in foot-lamberts (fL) or candelas per square meter (cd/m²). One foot-lambert = 3,426 cd/m².

6.4.2 Emergency Lighting Requirements

Since the curves for threshold luminance in air can be used to predict the sensitivity of the eye in water if the curves are shifted downward by 1.5 log units, Smith, et al., have proposed the following method for determining light levels necessary for helicopter escape (Reference 122).

Bouguer's exponential law of absorption may be used to obtain the luminance (L) required of a light source to be just visible at a distance (d) by an individual whose threshold sensitivity is (S) in water with attenuation coefficient (a):

$$L = SV \quad (3)$$

where $V = e^{ad}$.

The attenuation coefficient varies with climatic and water conditions. Representative values of the coefficient (a) are shown in Table 20. In open water, the coefficient (a) generally varies from 0.08 to 0.125. Values in harbors, bays, and gulfs may vary from 0.167 to 0.7, while estuaries and coastal waters tend to be much more turbid. Conditions within ditched helicopters may be such that the coefficient depends more on debris or oil rather than the water in which it is ditched, but this factor has not been evaluated.

TABLE 20. REPRESENTATIVE ATTENUATION COEFFICIENTS
(a) FOR VARIOUS WATER SOURCES

<u>Water Source</u>	<u>a</u>	<u>Year of Determination</u>
Pacific Countercurrent	0.083	1951
Pacific North Equatorial Current	0.083	1951
Gulf of Mexico (Panama City)	0.100	1967
Pacific South Equatorial Current	0.111	1951
Caribbean Sea	0.125	1951
Caribbean Sea (Roosevelt Roads)	0.300	1969
Long Island Sound	0.700	1967
Thames River (Connecticut)	3.500	1969

Viewing distance (d) will vary with seating arrangements and escape hatch placement.

Sensitivity (S) will vary among the aircraft crew and flight conditions. Occupants not looking outside the aircraft may be exposed to adapting fields of 15 to 50 cd/m^2 . Pilots and crew members who must look outside the aircraft will be exposed to much higher levels. For example, a pilot flying in a hazy sky can experience 25,000 to 35,000 cd/m^2 . During ditching, pilots will be looking at the water, which is generally less bright than the sky, and adaptation levels will be reduced to approximately 350 cd/m^2 .

The minimum output levels (L) for escape hatch lights may be determined by substituting appropriate values of V and S in Equation (3). The value of V can be found from Figure 74, which gives values of V for various attenuation

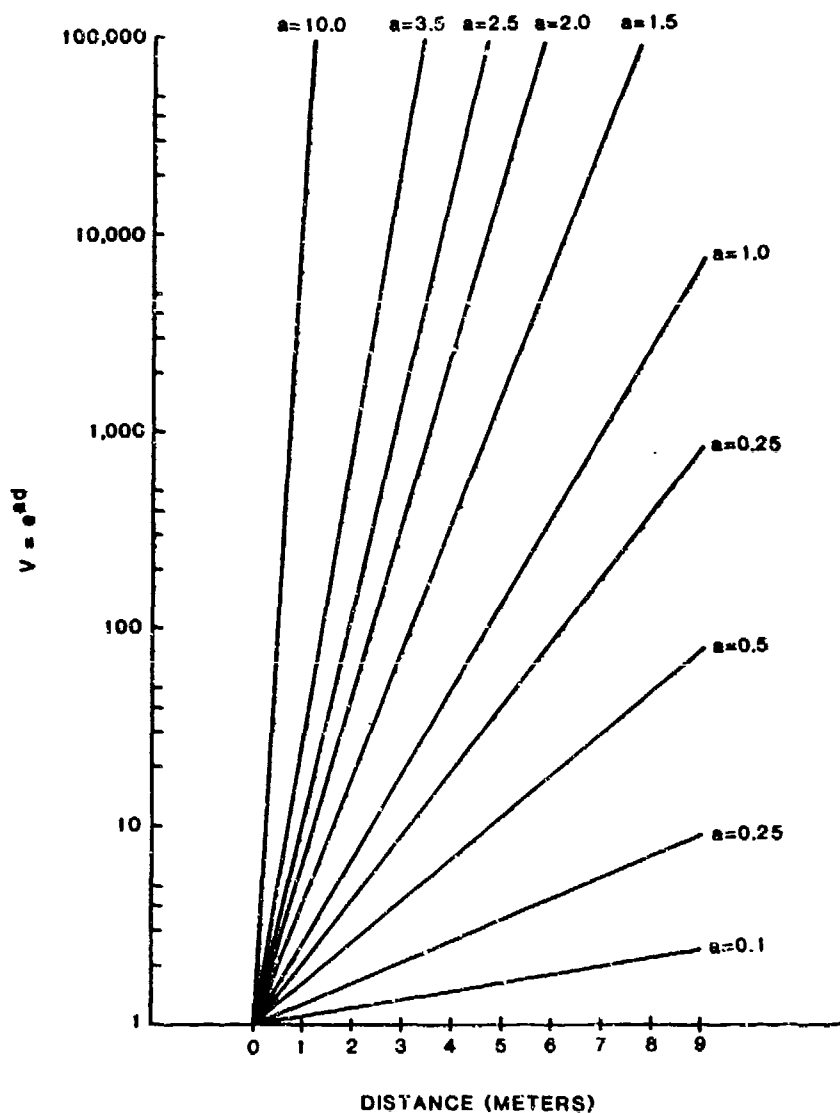


FIGURE 74. VALUES OF V IN EQUATION (3) FOR DISTANCES FROM LIGHT SOURCE TO OBSERVER WITH VARIOUS WATER ATTENUATION COEFFICIENTS (a). (FROM REFERENCE 122)

coefficients and the distance from the light to the observer. Figure 75 provides threshold sensitivity levels for elapsed times following extinction of an adapting field with luminances from 0.35 to 350 cd/m^2 .

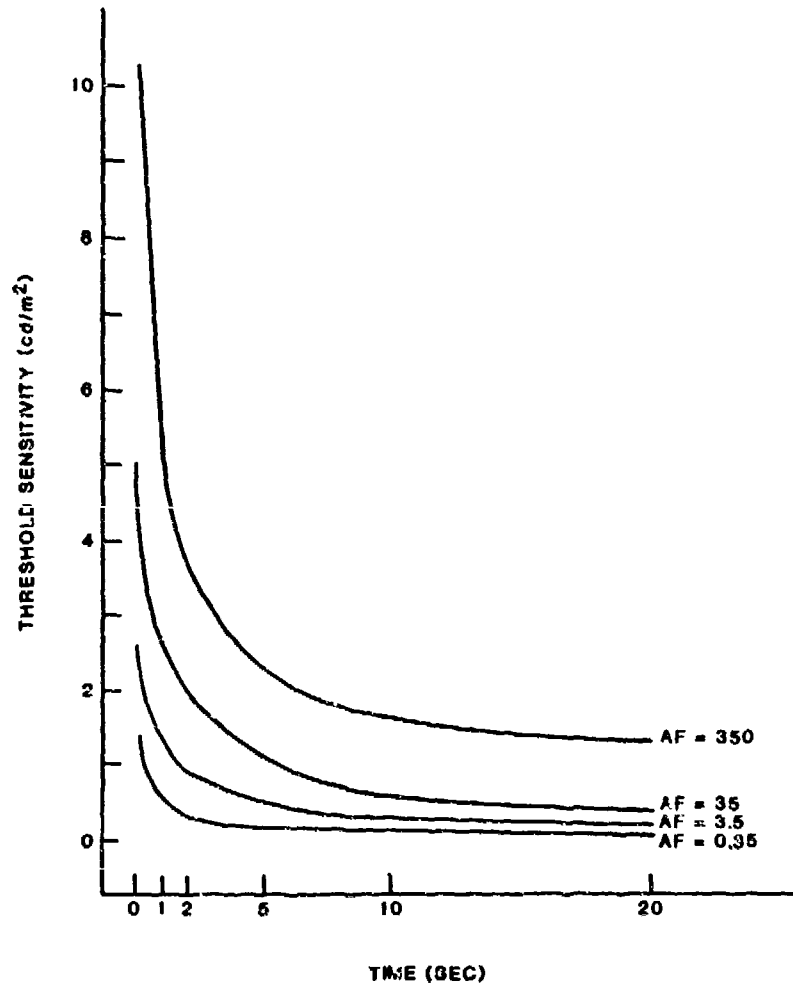


FIGURE 75. THRESHOLD SENSITIVITY (S) LEVELS FOR ELAPSED TIME AFTER DITCHING FOR ADAPTATION FIELDS (AF) FROM 0.35 TO 350 cd/m^2 . (FROM REFERENCE 122)

A degree of latitude is available in selecting the sensitivity level. Several seconds are required during a ditching for conditions to stabilize enough to permit escape. During this time, ambient light levels are dropping, thus lowering the adaptation levels. Requiring the lights to be visible 2 sec after ditching, rather than immediately, significantly lowers the threshold sensitivity (S), as may be seen in Figure 75. Consequently, the lower value of S will reduce the required brightness of the exit lights.

Table 21 lists the values of L obtained from Equation (3) when the adapting level is 350 cd/m², and the light must be visible immediately upon ditching. The effect of increasing turbidity (higher attenuation coefficient) on light level requirement is apparent. The calculated luminance (L) is the minimum value at which the light is just barely visible. The higher the value that L is above the threshold level, the greater the probability of detection. Therefore, the highest brightness level of light permitted by other design conditions should be employed for the escape lighting system.

TABLE 21. EXAMPLES OF VALUES FOR MINIMUM LUMINANCE (L) IN cd/m² FOR ESCAPE HATCH LIGHTS AT DISTANCES TO LEVEL OF 350 cd/m²

Distance (meters)	Attenuation Coefficients		
	2.5	1.0	0.5
0.5	34	17	14
1.0	127	27	17
1.5	439	45	21
2.0	1,538	75	27
2.5	5,331	127	34
3.0	18,610	206	45
3.5	64,950	339	58
4.0	*	562	75
5.0	-	1,528	127
6.0	-	4,152	206
7.0	-	11,289	339
8.0	-	30,680	562
9.0	-	83,399	925

*Values below here become very large and are perhaps prohibitive.

The Naval Research and Development Command carried out a series of tests on several different types of lights to determine the most desirable characteristics of helicopter escape hatch lighting for underwater escape (Reference 123). Three arrangements of lights around the hatch were tested to determine which configuration allowed the subjects to judge most quickly which side of the hatch was the top and if the three configurations of lights showed any visibility differences. Also investigated were two types of lights--electroluminescent (EL) panels and chemical lights. Maximum and minimum intensities and viewing angles were also investigated.

Figure 76 presents the results of the tests on the different types of lights and the configuration of the lights around the hatch. Figure 76 shows that Configuration II produced the lowest number of errors when the subject had to judge the orientation of the nearest hatch. Figure 76 also shows that the chemical lights were more legible than the EL panels. The researchers concluded that the chemical lights were more legible because they are round and not subject to viewing angle effects.

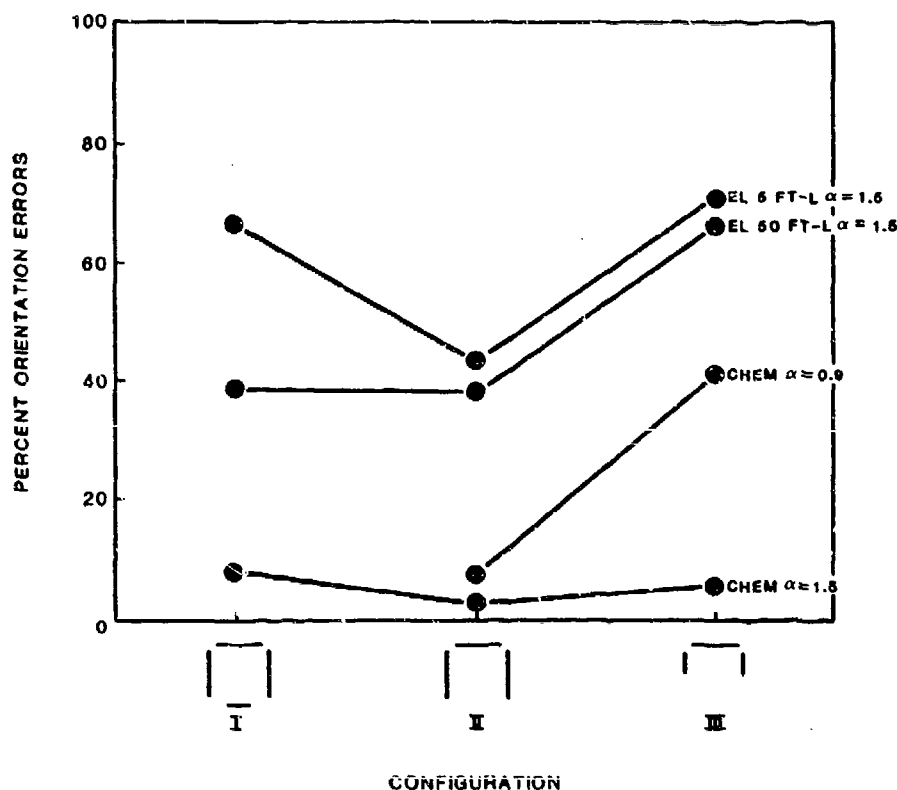


FIGURE 76. PERCENTAGE OF TRIALS ON WHICH THE SUBJECTS COULD NOT CORRECTLY IDENTIFY THE ORIENTATION OF THE THREE LIGHTING CONFIGURATIONS FOR VARIOUS LIGHTS OVER THE THREE DISTANCES IN WATER OF TWO TURBIDITIES. THE CHEMICAL LIGHTS WERE NOT TESTED IN CONFIGURATION I AT A TURBIDITY OF $\alpha \approx 0.9$.

The intensity range for the EL lights in the hatch configuration was also investigated. The mean threshold intensities from these tests are shown in Figure 77. At the near distance of 8 ft a mean intensity of only 2 fL was required despite an increased turbidity. This increased to 20 fL at 14 ft. Since an exceptionally bright light could produce a large cloud of light in turbid water which could make it difficult to localize the light, several high level intensities were also investigated. It was found that although there were localization errors when the intensity of the source was 1500 fL or greater, there were no large location errors when the intensity was dropped to 200 fL.

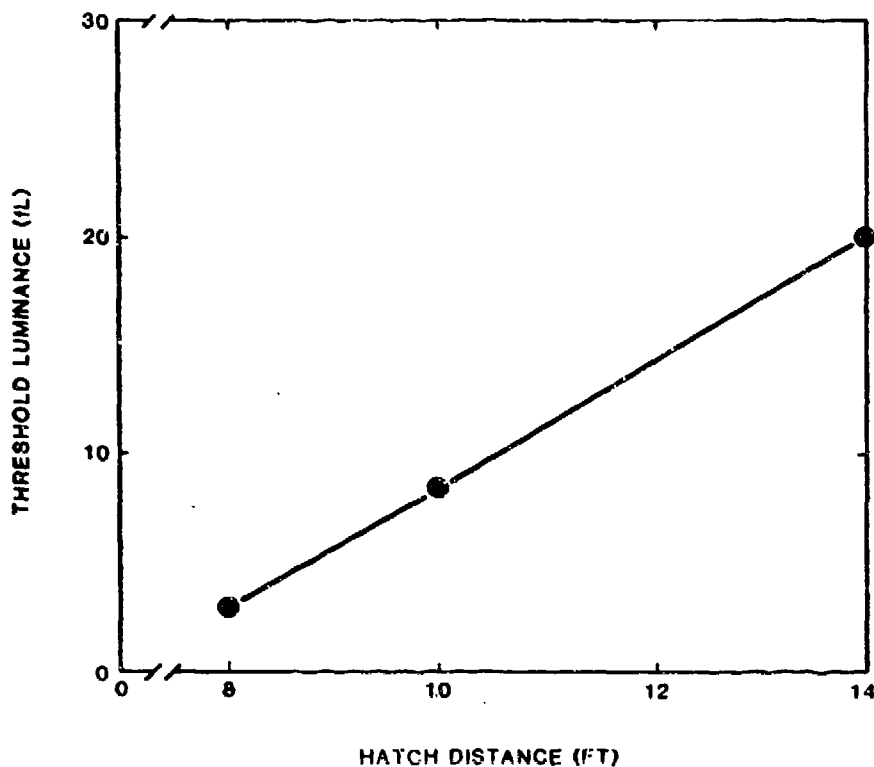


FIGURE 77. MEAN THRESHOLD INTENSITY (fL) OF THE CONFIGURATION OF EL PANELS AT DIFFERENT DISTANCES IN HIGHLY TURBID WATER ($\alpha \approx 3.0$).

The previous work was an important element in formulating a specification for the Helicopter Emergency Egress Lighting (HEEL) system developed by the Naval Air Development Center in conjunction with commercial manufacturers. The HEEL system provides illumination of emergency exits to helicopter occupants in an emergency landing or ditching.

A typical HEEL installation is shown in Figure 78 (Reference 124). Elements of the system include a light tube configured in an inverted U around each hatch and a control box which interfaces with the aircraft wiring. The control box also contains a rechargeable battery pack to provide power to lighting units at sufficient intensity levels for the required duration (10-min minimum). It also contains an enable/disable switch to disable the light for an exit if an operational requirement dictates that the light not be used. The light tube itself is a flexible tube containing a linear series of light emitting diodes.

The system is armed after engine start with rotor blades turning and is normally disarmed before rotor blades are stopped during shutdown. If the rotor blade speed drops below 25 rpm while the system is armed, the lights will automatically illuminate. The system senses the helicopter permanent magnet generation (PMG) signal. The loss of this signal actuates the lights. The

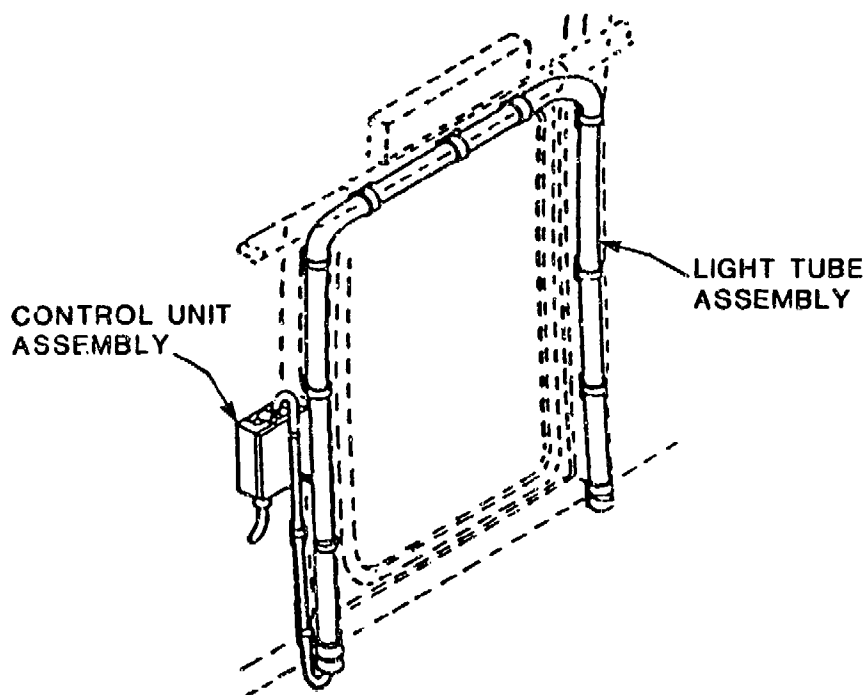


FIGURE 78. TYPICAL HEEL INSTALLATION.

PMG signal was selected because it reflects the loss of main rotor rotation, which is a true indication of an aircraft emergency. The aircraft interfacing hardware contains an on/off switch located in the cockpit, circuitry to obtain and rectify the PMG output and provide a 28 VDC signal, and the required electrical wiring to the connector at each escape exit. This system is now commercially available.

6.5 AIRCRAFT FLOTATION SYSTEMS

Several methods currently being used in attempts to provide ditched helicopters with flotation capabilities include inflatable bags, large sponsons, sealed hulls, and combinations thereof. Some of these methods have not been particularly successful in preventing postcrash fatalities, since they were unable to provide adequate flotation times for the escape of all occupants from larger helicopters. For instance, although one type of Navy helicopter has floated upright for more than 2 min in 70 percent of its ditchings, it has a high fatality rate (Reference 118).

If large numbers of people are to be carried, the flotation provisions must be very effective to lower the fatality rate. As might be expected, the number of inadequate flotation incidents will decrease as more flotation provisions are incorporated in any given helicopter. Thus, consideration should be given to using a combination of flotation methods, such as sponsons in conjunction with flotation bags, sealed hulls, etc.

6.5.1 Sponsons

Although sponsons are not usually intended to permit extended periods of operation on water, they can help stabilize the aircraft in water landing to pick up rescuers. However, to be of any value in providing flotation, the sponsons must be quite large to counteract the inherent instability due to a helicopter's high center of gravity, even with the rotors stopped.

The sponson buoyancy required to stabilize an aircraft for small angles of rotation may be estimated by using the following equation (Reference 125):

$$\tan \theta = \frac{F_s e}{dW} \quad (4)$$

where θ = heeling angle, deg

F_s = maximum single sponson buoyancy, lb

e = horizontal distance from aircraft centerline to the center of buoyancy of the sponson, ft

d = vertical distance of the aircraft center of buoyancy to the aircraft center of gravity, ft

W = normal gross weight of the aircraft, lb

The heeling angle calculated for Equation (4) should be verified by data from tests performed on the aircraft or on a scale model thereof.

6.5.2 Flotation Bags

Inflatable gas bag flotation systems have been developed and are currently being used on several aircraft. Their success to date, however, has been limited. Reliability problems have yet to be solved satisfactorily (Reference 118). In addition, buoyancy requirements of truly effective flotation bags pose design problems relative to the size and location of the deployed bags.

The flotation bag buoyancy required to stabilize a helicopter to any desired heeling angle may be estimated from the following equation (Reference 125):

$$\tan \theta = \frac{F_s e_s + F_b e_b}{dW} \quad (5)$$

where θ = heeling angle, deg

F_s = maximum single sponson buoyancy, lb

- e_s = horizontal distance from aircraft centerline to center of buoyancy of the sponson, ft
- F_b = buoyancy of inflated bag, lb
- e_b = horizontal distance from aircraft centerline to center of bag, ft
- d = vertical distance of aircraft center of buoyancy to aircraft center of gravity, ft
- W = normal gross weight of aircraft, lb

As may be seen, the maximum heeling angle determined from Equation (5) is dependent on the buoyant force of the bag (bag size) and the distance of the bag from the aircraft.

To achieve maximum effectiveness, the bags should be compartmented with inflation sources for pairs of compartments, one on each side. They should be inflated simultaneously, just prior to or at low-speed water contact to prevent separations at impact. Reliability considerations of the flotation system are of prime importance. The failure of both bags to inflate, or the separation of both bags from the aircraft upon water contact, will destroy any effectiveness the system might have. Moreover, the loss of buoyancy on one side could cause the aircraft to list and possibly sink faster than it would without the system.

6.6 DITCHING EQUIPMENT

Suitable tiedown or stowage facilities should be provided for life rafts, life preservers, survival kits, and miscellaneous ditching equipment. Restraint devices and supporting structures for equipment should be designed to restrain the equipment to static loads of 50 G downward, 10 G upward, 35 G forward, 15 G aftward, and 25 G sideward. All survival equipment should be readily available and easily released from their restraining devices by the occupants after ditching. More details on the design requirements for containing emergency equipment may be found in Volume III of this design guide under Ancillary Equipment or Retention.

Provisions for carrying life rafts should be included in all aircraft whose mission requires frequent flight over water, especially if the aircraft mission also includes troop transport. Research has shown that individuals are not able to tolerate exposure in 32 °F (0 °C) water for more than 90 min or 50 °F (10 °C) water for more than 18 hr (Reference 126). Figure 79 shows that a life raft between the sea and the individual provides a significant buffer that extends the tolerance time for a period of days. A raft with an effective spray canopy can make the difference in survival of aircraft occupants in the sea.

The design and location of life raft mountings or restraining devices should be such that rafts can be removed from their mounts or enclosures and deployed outside the aircraft within 30 sec from the time that release or removal action is initiated by the operator.

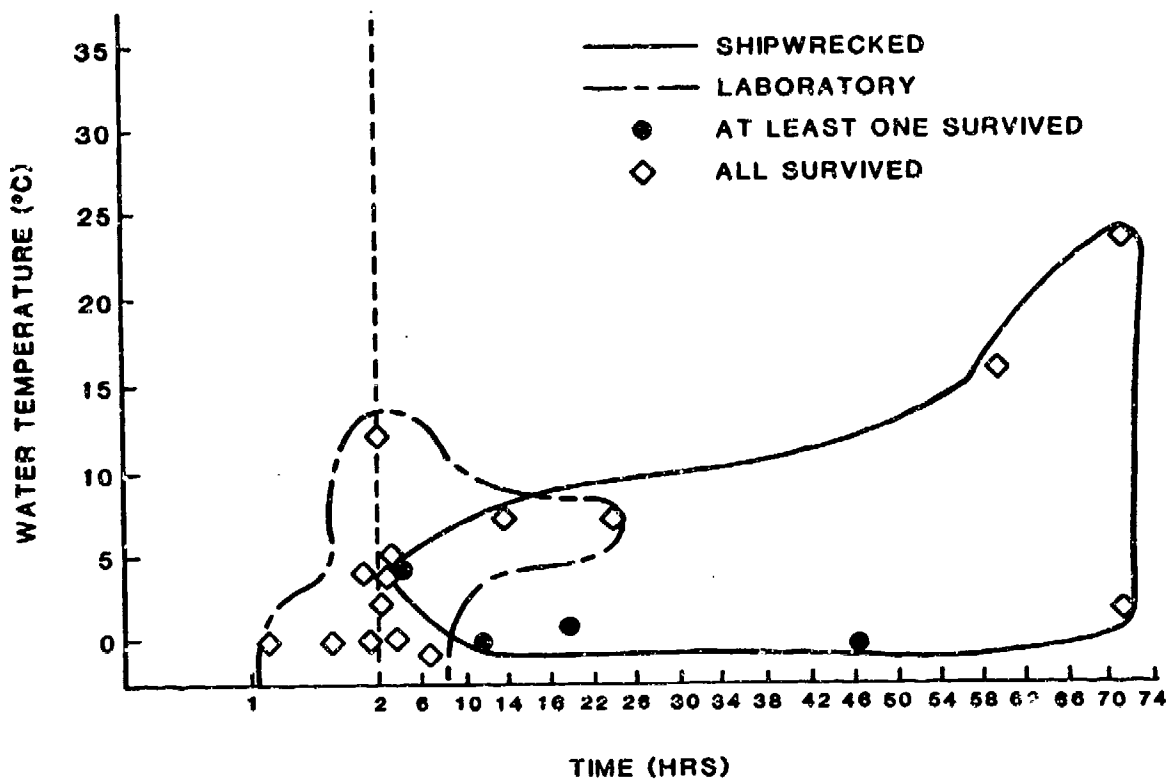


FIGURE 79. TOLERANCE TIME FOR DIFFERENT WATER TEMPERATURES WHILE IN LIFE RAFTS.

When exterior installations for life rafts or other survival equipment are provided, the mountings, retention devices, or enclosures should be designed to preclude inadvertent actuation or damage in flight or when ditching. Such equipment should be recoverable by occupants from an exit intended for use in ditching. Release mechanisms should minimize the possibility of jamming due to structural deformation that might be incurred upon ditching.

7. EMERGENCY ESCAPE AND RESCUE PROVISIONS

7.1 INTRODUCTION

Even though an occupant has survived a crash, the problem of surviving the postcrash environment still remains. Severe postcrash conditions occur in a relatively small percentage of accidents, but they account for a disproportionately large number of injuries and fatalities. The key to postcrash survival is the time between the initial crash sequence and the onset of nontolerable conditions. The primary postcrash hazards are fire and water. The occurrence of either can reduce the available escape time to seconds. Therefore, effective emergency escape provisions are essential as integral portions of the aircraft design.

7.2 EMERGENCY EXITS

7.2.1 Emergency Exit Requirements

Two factors that largely determine emergency exit requirements are (1) the amount of available time before the postcrash conditions exceed human tolerance limits and (2) the attitude and condition of the aircraft structure after it comes to rest.

Research has shown that the available escape time from helicopters involved in postcrash fires is only 7 to 16 sec (see Chapter 3). Thus, all occupants must be able to evacuate the aircraft within 10 sec if they are to survive. However, the allowable evacuation time can be extended to 30 sec if a crash-resistant fuel system is installed in the aircraft. The emergency exit criteria presented in this chapter are predicated on the installation of such a fuel system and should allow all occupants of an aircraft to evacuate within 30 sec.

Providing sufficient exits for 30-sec evacuation of the maximum number of personnel to be carried would seem to meet the emergency requirements. However, it is not unusual for several exits to be blocked following a crash. For instance, if a rotary-wing aircraft comes to rest on its side, all exits on that side will be unusable. Also, exits can be blocked by outside objects, such as trees, or by deformation of the aircraft structure. Therefore, emergency escape provisions should allow the maximum number of aircraft personnel to evacuate in 30 sec with only one-half of the aircraft exits available for egress.

Evacuation times should be demonstrated by actual tests using personnel approximating 95th-percentile troops with full combat equipment for passengers and 95th-percentile aviators with arctic flight gear and body armor for crew members. (Anthropometric data for U.S. Army aviators can be found in Volume II of this design guide.) The following sections present emergency exit design criteria to assist the designer in meeting the above requirements.

7.2.2 Types of Exits

Aircraft exits are provided to facilitate either normal or emergency exit and entry. Generally, these exits are classified as follows:

- Class A Exit: A door, hatch, canopy, or other exit intended primarily for normal entry and exit.
- Class B Exit: A door, hatch, or other exit intended primarily for service or logistic purposes (e.g., cargo hatches and rear loading ramps or clamshell doors).
- Class C Exit: A window, door, hatch, or other exit intended primarily for emergency evacuation. Exit closures for Class C exits must be capable of being removed from the exit opening within 5 sec from both inside and outside the aircraft regardless of the aircraft's attitude.

A Class C exit constitutes the minimum requirement for an emergency exit. A Class A exit with emergency jettison provisions is normally considered superior to a Class C exit because of its large size, and, in most cases, it can be used in lieu of a Class C exit. Despite its superiority, however, each Class A exit with emergency jettison provisions can replace only one Class C exit. Class B exits also may be used in lieu of Class C exits if adequate emergency release provisions are installed; however, the functional design of Class B exits usually makes their use less desirable for emergency exit. In order for Class A and B exits to qualify for use in lieu of Class C exits, the exit closures must be capable of being removed from the exit opening within 5 sec from both inside and outside the aircraft regardless of the aircraft's attitude.

7.2.3 Size of Exits

All exits, including Class C exits, must be large enough to accommodate 95th-percentile troops and aviators as specified in Section 7.2.1. Furthermore, the exits must be large enough to allow these personnel to evacuate the aircraft rapidly.

Class C exits should be at least 22 in. square with 6-in.-radius corners, or 22 in. in diameter. This exit size is an Air Force requirement and is considered to be minimum for the evacuation of troops at the rate of 1.5 sec per person (Reference 127). This size must be considered an absolute minimum since the anthropometric data given in Volume II of this design guide lists the shoulder breadth of a 95th-percentile U.S. Army aviator as 20.3 in. Therefore, it is strongly recommended that all Class C exits be larger than the minimum 22 in. Other shapes may be used also, providing the minimum dimensions are met or exceeded. In any case, all exits must be sufficient in size and shape to allow 95th-percentile troops and aviators, equipped as specified in Section 7.2.1, to pass through the exit at a rate of 1.5 sec per person or less.

7.2.4 Number of Exits

7.2.4.1 Crew Compartment (Cockpit). Each flight crew member must have access to at least one usable emergency exit regardless of aircraft attitude after impact. Thus, if a single cockpit enclosure is used for a single crew position, two Class C exits on opposite sides of the cockpit should be provided. This arrangement assures an alternate means of escape if the aircraft rolls on its side, blocking one exit. One Class A exit with an emergency release provision may be substituted for each Class C exit if desired. The Class A exit may be the normal entry/exit door with an emergency jettison capability.

The minimum emergency escape exit requirement for cockpit enclosures with side-by-side crew positions is also two Class C exits. One exit should be installed on each side of the fuselage. Although two Class C exits are required, any combination of Class C and Class A exits may be substituted, provided the Class A exits have an emergency jettison feature.

Cockpit enclosures with tandem crew positions should be provided with two Class C exits and one Class A exit with an emergency release provision. This requirement assumes that the two crew positions are mutually accessible. Mutual accessibility means that a 95th-percentile crew member dressed in arctic flight gear and body armor could, without undue difficulty, climb from one crew position to the other in order to exit the aircraft in an emergency. If the exits in such a cockpit are not mutually accessible to the crew members because of intervening structure or installed equipment, each crew member should be provided with a Class C exit and a Class A exit with an emergency release provision. When sliding or clamshell canopies are used, Class C exits or other suitable means should be provided for crew escape when the aircraft is inverted or otherwise malpositioned on the ground and the canopy cannot be jettisoned. Accident records for aircraft with canopy-type cockpit enclosures indicate crew members are often trapped in the cockpit when the aircraft flips over on its back and the canopy cannot be jettisoned. Some helicopters are equipped with pyrotechnic devices to shatter the side windows in the canopy to facilitate escape, since experience with such accidents indicates that knives, axes, or other tools carried in the cockpit for chopping through the Plexiglas canopy are not adequate solutions for emergency exit when postcrash fire or occupant injury is present. When the primary means of escape is blocked, an alternative means is clearly necessary.

7.2.4.2 Passenger or Troop Compartments. The minimum emergency escape exit requirement for troop/passenger sections, exclusive of exits provided in cockpit sections, is two Class C exits. One exit should be installed on each side of the fuselage. If one of the two exits becomes blocked for any reason, the other exit will serve as the primary means of escape. Normally, a Class A exit is required for passenger/troop compartments. If normal passenger or troop entry and exit in a particular aircraft is through the troop/passenger compartments, a Class A exit with emergency release provisions and a Class C exit will be more realistic and satisfy the emergency exit requirements.

In addition to the minimum number of exits, additional exits may be required depending on the maximum number of personnel carried in the passenger/troop cabin. Class C exits at a ratio of at least one exit for every 10 persons expected to occupy the section should be provided. An additional exit in

excess of the 1-to-10 ratio should be provided when the specified capacity of the section is not evenly divisible by 10 (e.g., if the capacity is 21, three exits are required). The requirement for the passenger/exit ratio of 1-to-10 is based upon the possibility that at least 50 percent of the exits may be blocked if the aircraft comes to rest on its side. This would then leave a 20-to-1 ratio, assuming that both sides of the aircraft have an equal number of exits. A 20-to-1 ratio is, from a theoretical point of view, considered adequate to evacuate all occupants within 30 sec at the exit rate of 1.5 sec per person (assuming no troop debilitation and all exits open). However, at least two exits must be provided even if the number of occupants is less than 10.

The exit requirements cited above also are applicable to cargo compartments if the compartments have a dual capability for troop transport.

7.2.5 Location of Exits

7.2.5.1 Side Exits. Exits intended for emergency use should be equally divided on each side of the aircraft and, if feasible, should not be directly opposite each other. The primary reason for dividing emergency exits equally on both sides of the fuselage is that an alternate means of escape is provided if, for any reason, the exits on one side become blocked. Exits should not be located directly opposite each other because of the probability of crowding in one particular area when both sides of the aircraft may be used for evacuation. By staggering the exits, the tendency to crowd up is diminished.

Exits should not be located high up on the sidewall for ease of egress and to minimize the drop height after egress. However, since any aircraft may be operated over water, at least one emergency exit on each side of the fuselage should be well above the anticipated waterline under the most adverse conditions expected immediately after a ditching.

7.2.5.2 Other Exits. In aircraft where the width of the crew and troop compartments is too great to permit easy access to fuselage up-side exits if the aircraft comes to rest on its side following an accident, Class Coverhead exits should be provided at a ratio of one exit for every 20 occupants. Where the capacity of the compartment is less than 20, at least one Class C exit should be present. These overhead exits are in addition to the normal requirements for Class C exits.

When an aircraft comes to rest on its side, blocking the exits on that side, the exits on the other side of the aircraft could be the only means of evacuation. These exits, now on the topside of the rolled aircraft, may be useless if the width of the fuselage is such that they cannot be reached easily. In an aircraft resting on its side, overhead exits would be more accessible than the normal up-side exits. A fuselage width of 5 ft or more between side exits is considered too great to permit easy access to up-side exits by troops with minor debilitating injuries following a crash.

In helicopters with engines, transmissions, major controls, etc., located over personnel compartments, bottom or fore and/or aft exits may be substituted for the overhead exits. For example, in aircraft with rear loading, an emergency exit window may be installed in the closure doors. Alternatively, side exits may be located where interior aircraft components, such as

seats and consoles, can be used as steps to gain access to the up-side exits. If this type of arrangement is used, the designer must ensure that these components will maintain their structural integrity and attachment to the aircraft during a survivable crash. Such component-steps must be able to support a 300-lb occupant to accommodate fully equipped 95th-percentile crew members and troops.

If the aircraft has a high-wing arrangement, overhead exits should be provided to facilitate escape following ditching. These overhead exits will be in addition to the normal requirements for emergency exits. Overhead exits constitute the only practical means of escape in a rapidly sinking aircraft of this type because the occupiable portion of the fuselage in high-wing aircraft sinks below the surface of the water rapidly following a ditching. The opening of side exits causes flooding of the interior at a high rate, decreasing escape time.

7.2.5.3 Exit Location Relative to Fuselage Distortion. To provide maximum accessibility to aircraft occupants following a crash, emergency exits should be located in areas least vulnerable to distortion. Insofar as it is feasible, exits should not be located in close proximity to the main landing gear because of the possibility of the gears being driven upward and/or inward against the aircraft, causing a blocked or jammed exit. Exits should not be located under heavy components mounted on the top of the fuselage, such as engines and transmissions, because of the possibility of fuselage distortion in crashes where high vertical forces are present. In high-wing aircraft, a crash landing is likely to cause structural deformation below the wing; therefore, exits located under the wing should be avoided as much as possible.

7.2.5.4 Exit Location Relative to Obstructions. Class C exits should be located where it will not be necessary to move equipment, cargo, or furnishings to gain access to them. Insofar as it is feasible, all exits that might be used in emergencies should be located where external components such as propellers, turbine engine inlets, turrets, armament, and tail surfaces will not interfere with occupant escape.

7.2.5.5 Exit Locations Relative to Ignition Sources. Exits should be located as far as possible from fuel spillage areas and from major ignition sources (e.g., exhaust stacks, hot engine parts). Where the occupiable portion of the aircraft is mainly aft of the power units and fuel tanks, it is desirable to locate at least one Class A or B exit with an emergency jettison feature as far aft as possible. In the case of rear-mounted engines, an A- or B-type exit should be as far forward as possible. Such an arrangement may increase escape time in the event of a postcrash fire.

7.2.6 Exit Operation

7.2.6.1 Exit Operational Design. The method of emergency exit operation should be simple, obvious, and natural to all personnel expected to be aboard the aircraft. Exit operation also should be as rapid as possible. Therefore, exits intended for emergency use should be designed so that no secondary operation such as moving or unlocking locks, catches, stops, bolts, or bars is necessary. (Such a requirement does not preclude the use of easily removable protective covers intended to prevent inadvertent actuation of exit release handles.) Emergency exit operations by rescue personnel from outside should meet the same requirements even when wearing thick, heavy gloves.

If aircraft security requires that all doors and exits be locked, it is acceptable that emergency releases may also be locked by the same mechanisms so long as the aircraft is flown with them unlocked.

An emergency exit should be capable of being completely opened within 5 sec. The time requirement of 5 sec to remove the exit closure (window, door, hatch, etc.) from its opening is based upon the need for all possible haste in evacuating burning aircraft and a realistic estimate of the time-motion requirements for actuating a simple, continuous-motion release mechanism without secondary operations. The measurement of time should begin when the operator places his hand on the release handle and end when the exit closure is free and clear of the exit opening.

Only the single operation of pulling or pushing the exit closure into the clear should be necessary, once the release handle has been actuated. Unless the aircraft is pressurized, all emergency exit closures should be arranged to fall free when the emergency release mechanism is actuated. To remove the exit closure inward would add to the congestion and impede escape. In a pressurized aircraft, exit closures must be removed inwardly, but, if at all possible, the closure should then be canted at an angle and pushed out the exit opening in order to avoid congestion inside the aircraft.

Emergency exits should be designed to permit removal of the exit closure when seal vulcanization occurs, when the fuselage is covered with ice accumulated in flight, and when minor fuselage deformation occurs. A peripheral clearance of at least 0.20 in. provided between the exit closure and its frame will help accomplish this goal.

The 0.20 in. specified should be considered the minimum clearance between the exit closure and its frame. It is probable that some aircraft with relatively light fuselage construction could use more than 0.20-in. clearance in this area, since greater fuselage distortion in such aircraft is likely when a crash occurs. With a 0.20-in. peripheral clearance, the exit frame could theoretically deform inward for 0.40 in. on any one of its four sides before binding occurs.

Consideration also should be given to designs that cause the exit closure to eject itself from its frame when large structural deformation due to impact occurs. This type of design is particularly appropriate for the simple Class C type of exit that contains no release mechanism but needs only to be pushed out of its mountings to open.

The use of Class A and B exits that slide to open is probably unavoidable on certain types of aircraft. Careful design is required on these types of exits intended for emergency evacuation. Fuselage distortion, which may cause the exit to bind on the tracks attached to the fuselage, should not prevent jettisoning of the door or the window within it. Also, consideration should be given to making the entire exit jettisonable outward without any sliding.

7.2.6.2 Release Mechanism Design. The exit release mechanism is the primary handle, lever, or latch used to open the emergency exit closure. Handles may be of the T- or L-shaped design that turns, the D-ring type that pulls, or the lever type that slides fore and aft. However, the number of different types of handles in the aircraft should be held to a minimum. It

is recognized that some types of emergency exits will not use exit release handles. One common type of exit uses a release method whereby a panel held by a flexible mounting is simply pushed out. All quick-release mechanisms, regardless of their design, should be inherently jam-proof and extremely corrosion resistant.

The method of operation of the exit release mechanism should be simple, obvious, and natural to the operator. In order to facilitate rapid emergency egress, exit release mechanisms should be designed to permit release handle actuation and exit opening by one person using one hand. The Air Force specifies an actuation/operating force of 10 to 30 lb to meet this requirement (Reference 127). Release and opening mechanisms also should allow all exits to be removed successfully in an emergency when the aircraft is in other than an upright position.

The shape and direction of operation of exit release handles should conform to the "form follows function" rule, where the releasing action is most natural to the position of the operator initiating the action. According to McFadden and Swearingen, "In general, the best position for applying force to a handle is one in which a subject can use his legs and lift. The next best is in pushing down and using body weight. The least effective method is the employment of an over or under motion. The under motion is slightly superior." (Reference 128).

Specific considerations for different types of handles are as follows:

- T- or L-Shaped Emergency Release Handles: Internal emergency release handles with a T- or an L-shaped design should be capable of actuating the release mechanism in both clockwise and counterclockwise directions. The arc of rotation in this case should not exceed 90 degrees. If only one direction of handle rotation is permitted, rotation should be counterclockwise and the arc of rotation should not exceed 180 degrees. Stops that prevent rotation in the wrong direction should be provided. Marking to show rotation direction and distance should be incorporated if possible.
- D-Ring Type Emergency Release Handles: If the release handle is a D-ring type that requires pulling for release action, the grip of the D-shaped handle should be parallel to the aircraft's vertical axis for side exits and parallel to the aircraft's longitudinal axis for overhead exits. The direction of pull should be toward the operator in the same straight line as the natural position of the extended forearm holding the handle prior to release action.
- Lever-Type Emergency Release Handles: Internal emergency release handles incorporating a lever or bar that slides fore and aft along the x axis of the aircraft should be capable of opening the exit in both directions.

Exit release mechanisms should be designed so that the entire operation of the release handle is a continuous motion from start to finish without sharp changes in direction except for external installations where the release handle must be pulled from countersunk recesses before actuation. In any type of release handle, the final motion of the handle should contribute to the opening of the exit.

Release handle shapes and dimensions should be designed for normal hand grip limitations and incorporate handle-to-hand contact areas that ensure adequate load applications to the handle. Release handles on external installations should provide clearance to allow gripping of the handle with gloved hands, since rescue crews normally wear heavy gloves to protect hands from jagged and hot metal surfaces. Standard fire fighter's asbestos gloves should be used for testing. The release handle should be mounted on the exit closure itself or immediately adjacent to the exit opening so that it is readily accessible to any occupant attempting to use that exit. If the external release handle is not on the closure but adjacent to it, then a separate handle should be provided for removal of the enclosure by the rescuer. Remote exit release mechanisms should be avoided. The release handles on the exit closure or on the adjacent airframe should not be located in a position that would allow the handle to snag clothing or impede escape through the exit opening even if the exit is, for some reason, limited to partial opening. Similarly, the exit actuating mechanism should be designed so that the final position of the release handle upon opening will not obstruct the removal of the exit closure.

Emergency exit release handles in cockpits and troop compartments should be located where it is not necessary for crew members to unlock their shoulder harnesses in order to operate the handles. This is very important in cockpits and at crew-chief or special crew stations, primarily because it is sometimes desirable to release emergency exits just prior to crash impacts. This is especially true for ditching. If a shoulder harness has to be unlocked to release the exit, there may be insufficient time available to relock it before impact. This requirement also is applicable to those emergency exits that are adjacent to certain seats in the passenger/troop compartment since these exits could be difficult to open if the aircraft rolls on its side. This, however, should not be construed as a recommendation to remove exits prior to crash impact in every case. The openings of such exits can sometimes critically reduce the time otherwise available for occupants to escape, since fire can develop on the outside, causing flash fires within the compartment. As a general rule, the chances of surviving a crash involving fire are less if doors and exits are open prior to impact.

Exit release mechanism mechanical strength from handle to latch or pin should be 1.5 times greater than the maximum force that can be exerted by the 95th-percentile male in the operating directions (opened and closed). If binding of the latch occurs it should not be possible to break the internal or external mechanical elements by handle input forces.

A detailed task analysis of the individual steps in emergency egress should be performed for both the 95th-percentile combat equipped passenger and the 5th-percentile female passenger, to insure that no task requires excessive forces or too restrictive a working area (Reference 128).

Accidental release of exits in flight can be extremely dangerous in rotary-wing aircraft. Exits that have been released in flight have been known to fly into the main or tail rotor system, causing disintegration of the system and subsequent loss of the aircraft and crew. An unguarded or unshielded exit release handle can make a convenient hand-hold for inexperienced troops. Therefore, release mechanisms should be designed so that improper or incomplete closing of the exit will be obvious. On both external and internal

installations, a locked-position indicator, such as a detent to indicate positive locking, should be provided.

In the event that crash victims become trapped in the aircraft or become otherwise unable to escape without help, it is essential that all emergency exits be capable of being opened by rescue personnel from the outside of the aircraft. The actuation of an internal release handle must not preclude the simultaneous actuation of an external release handle. If "push out" type Class C exits are provided, they should be as easy to open from the outside as from the inside. It is strongly recommended that rescuers have the capability of opening exits without having to pivot the exits on hinges, such as with outwardly opening doors. Outwardly swinging exits become useless if, for some reason, obstruction (such as the ground) prevent them from opening far enough to allow egress. Being able to remove the hinge pins with an externally mounted handle is one way of satisfying this requirement. Means to prevent icing of the outside release and handle mountings should be provided to ensure positive operation under adverse weather conditions.

If the cockpit enclosure consists of a canopy that slides back and forth or opens on hinges in a clamshell fashion, an emergency jettison feature can provide rapid egress for the crew. The jettison mechanism should allow complete removal of the enclosure from its mounting within 5 sec from the time that mechanical action is initiated. In addition to the internal jettison release, external canopy jettison controls should be provided on both sides of the fuselage. The canopy jettison feature does not eliminate the necessity for additional emergency exits since the postcrash aircraft attitude might preclude successful jettisoning of the canopy.

7.2.7 Explosively Created Exits

Explosive systems have been developed and successfully used to provide quick-opening emergency exits in military aircraft. These systems can cut emergency exits through existing doors and windows and through fuselage structures. The systems provide the advantages of extremely rapid release times, simplicity of operation, and immunity to jamming by structural deformation, ice, or seal vulcanization. The following sections discuss factors that must be considered during the design of an effective and operationally safe explosive exit system.

7.2.7.1 Overall System Design. An explosively operated exit system contains four basic components or subsystems: (1) an arming/firing system, (2) primer and/or detonating cord, (3) a linear shaped cutting charge, and (4) an actuation mechanism. The relationship of these components to each other can best be illustrated by considering the design of an actual system--in this case, the Emergency Lifesaving Instant Exit (ELSIE) System developed for the U.S. Air Force (Reference 129).

The ELSIE system is composed of an electromechanical safe/arm mechanism, dual-shielded mild detonating cord lines, a flexible linear-shaped cutting charge, and interior and exterior initiation handles attached to firing lanyards. The relationship of the components is shown schematically in Figure 80. The safe/arm mechanism requires only momentary application of power to arm or disarm. The system remains armed or disarmed, even if power is lost, since the mechanism is mechanically locked in position. Once the

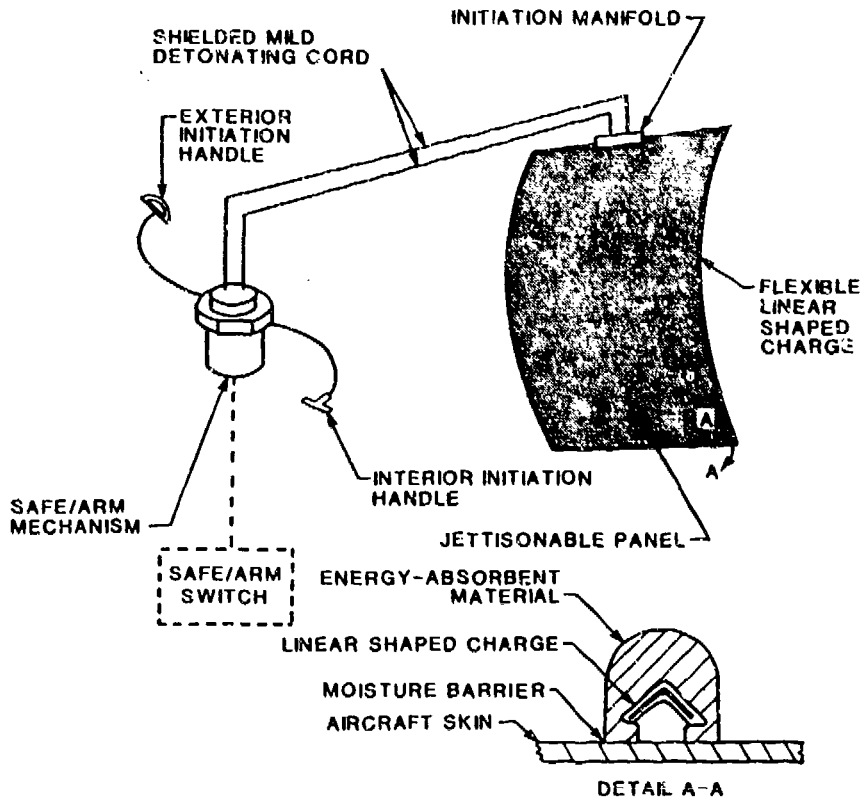


FIGURE 80. SCHEMATIC OF ELSIE SYSTEM.

system has been armed, it can be actuated either from inside or outside the aircraft by pulling the handle in either location. The handles operate a mechanical striker that fires the dual detonating cord lines. These redundant lines, in turn, initiate the shaped charge that cuts the egress opening in the aircraft and ejects the cut panel outward. Tests on the ELSIE system show that the elapsed time from pulling the initiation handle until the egress opening is available for use is less than 0.027 sec.

7.2.7.2 Arming/Firing System. The arming/firing system should be designed for simple and rapid actuation of the explosive system and yet provide maximum safety against inadvertent actuation. Operational safety should be assured by preventing inadvertent actuation due to environmental conditions, system component failures, or human error.

To provide maximum operational safety, arming and firing should be accomplished in two separate and deliberate actions. The arming function always should be under the control of the flight crew. Thus, the arming mechanism should be located only in the cockpit and at the crew chief's station. If cockpit enclosures with tandem crew positions are used, each crew member should be provided with an arming mechanism unless the two positions are mutually accessible. System status indicators should be provided at all pertinent flight crew stations.

Once armed, the system should be capable of being fired by any of the aircraft occupants. Each exit should be capable of being actuated independently from the rest since it is not always desirable to open all available emergency exits, especially in case of a postcrash fire or a ditching. A firing mechanism should, therefore, be located immediately adjacent to each exit for actuation of that particular exit only. This means the arming and firing mechanisms will, of necessity, be physically separated from each other. An exception to this practice might be acceptable when the exits are located quite near each other, as in tandem cockpit configurations. Then the adjacent exits could be fired simultaneously from one firing mechanism, although a firing mechanism should still be available to each crew member.

Once the system is armed, it should stay armed until it is disarmed by a crew member or rescuer. The reverse also is true; once the arming mechanism is in a disarm, or safe, position, it should remain that way until a deliberate arming action is initiated. Any type of system or component failure must not change the position of the safe/arm mechanism. For instance, if arming is accomplished by electrical power, loss of power should not allow the mechanism to switch from arm to safe or vice versa. The mechanism also should be immune to any environmental or crash load input. Disarming capability should be provided to permit safing the system even though normal safing modes are inoperable following a crash.

In order to provide the highest degree of both operational and crash safety, the firing mechanism should be independent of any external energy source, such as the aircraft electrical system. This requirement dictates that the firing mechanism be manually operated. The design considerations for emergency exit release mechanisms discussed in Section 7.2.6.2 also apply to the firing handles used in explosive exit systems. In addition to those considerations, the external release handle should be designed to allow rescue personnel sufficient separation from the aircraft before actuation to prevent their being struck by debris when the exit is opened. It is also strongly recommended that all arming mechanisms and firing handles be completely separated from each other, even in those cases where it might seem feasible to combine them (e.g., pilot's crew station). If the arming and firing mechanisms are combined into one package, it is essential that the operations of arming and firing be distinctly separate from each other, such as turning the handle to arm and pulling the handle to fire.

7.2.7.3 Explosive System. All explosives used in the exit system should possess as high a thermal limit as possible, not only to ensure that the system is safe in high-temperature operating environments but also to provide as much safety as possible in case of a postcrash fire. The system should be able to function when exposed to temperatures up to the limits of human tolerance to heat (approximately 400 °F, based on ambient air temperature), yet not function inadvertently during brief exposure (30-60 sec) to postcrash fires. The latter requirement is necessary to prevent flames coming through

an unintentionally opened exit of an occupied aircraft. The thermal limits of the explosives used in the ELSIE system, which meet the above requirements, are below.

<u>Explosive</u>	<u>Thermal Limit (°F)</u>
HNS (22', 44', 66' hexanitrostilbene)	618
Lead azide	635
M-426 primer	425

The linear-shaped charge should be held securely in position against the aircraft structure it is to cut. The size of the exit opening should conform to Class C requirements given in Section 7.2.3. The jettisonable section should be ejected outward to preclude its obstructing the exit opening. Energy-absorbing backup material should be placed behind the shaped charge to control the backblast of the explosive and prevent fragments from entering the cockpit or cabin (refer to Figure 80).

The explosive system should be designed to minimize the possibility of system actuation igniting any fuel that might be spilled during a crash. The amount and duration of any exposed flame should be minimal. The ELSIE system successfully functioned during a series of fuel spray tests without igniting the fuel because the explosive charge was designed to penetrate only 90 percent of the aircraft skin thickness. The remaining 10 percent was severed by the pressure created by the detonation of the shaped charge and the momentum already imparted to the jettisonable section. This design allowed the combustion products around the periphery of the cut to cool significantly before the metal skin was completely severed. Because of this, the only flames exterior to the aircraft skin were at the initiation points of the shaped charge and lasted less than 10 msec for most of the tests.

7.2.8 Access to Exits

7.2.8.1 Exit Obstructions. Access from aisles to all exits should be provided so that the exits will not be obstructed by troop seat components, seat back webbing and webbing support bars, litter installations, or other protrusions to an extent that would reduce the effectiveness of the exit.

A common problem with troop-carrying aircraft is that, in order to carry the maximum number of troops, some emergency exits are blocked by the installation of troop seat back webbing and webbing support bars. These components are normally designed to be pulled away from the emergency exit in order to provide access. It is desirable, of course, to avoid obstructing exits, but if it is necessary to do so, seat backs or other potential obstructions should be readily collapsible or movable to provide access to exits during an emergency evacuation.

7.2.8.2 Aisle Widths. The width of aisles at any point between seat rows should be sufficient to allow unobstructed movement of 95th-percentile troops with full combat equipment. Current criteria suggest a minimum width of 17 in. In aircraft where it is necessary to pass through seat rows to gain access to exits during an emergency, longitudinal spacing between seat rows should be sufficient to permit these troops to move at a rate consistent with the capacity of the exit (1.5 sec per person or less).

7.2.8.3 Compartment Doors. Doors on hatches separating various interior compartments should be located and have a direction of opening so as not to impede or block passage to other exits or interfere with the use of emergency equipment such as axes and fire extinguishers.

The doors or hatches should be large enough to permit crew and troop movement from one compartment to another during emergency evacuation. The openings should have no protrusions that would impede movement through them. Provisions should be made for securing compartment doors in the open position during takeoff and landing. Such doors should be capable of remaining open and latched when exposed to crash forces of survivable magnitude.

Compartment doors should have release handles designed so that the method of operation is a single, obvious, and natural motion in a single plane. Round or spherical handles or knobs should unlatch when gripped and turned in either direction. The handles should not snag on clothing or equipment.

7.3 EMERGENCY LIGHTING

Emergency lighting provides the illumination required for emergency evacuation and rescue when the normal aircraft lighting is not available. There are three basic types of emergency lighting: (1) interior lighting for personnel orientation following aircraft accidents at night, (2) lighting for the purpose of reading exit operating instructions and releasing the exits, and (3) exterior lighting to illuminate exits and paths of escape.

7.3.1 Interior Emergency Lighting

When an aircraft crashes at night or is filled with dust or smoke, disorientation of embarked crew and troops is likely to occur. Since escape time is critical, interior emergency lighting units should be installed in sufficient number and possess adequate brightness to permit personnel orientation in all compartments during emergency evacuation situations. The emergency lighting should provide sufficient illumination throughout the cockpit and cabin areas to permit occupants to locate emergency exits and survival equipment, perceive escape paths, and avoid obstacles while moving toward the exits. This criteria may not be necessary for some aircraft using overhead canopies.

Interior lighting fixtures may be mounted as aisle, ceiling, or cornice lights. Regardless of where the lights are mounted, they must furnish adequate illumination near floor level to allow occupants to see exit paths and avoid any obstructions. The emergency lighting requirement for both civil and military aircraft is a minimum average illumination in clear air of 0.05 foot-candle (fc) measured 20 in. above the floor (or at armrest height) along passageways leading to each exit (References 130, 131, and 132). The lighting requirement in front of each exit is also 0.05 fc at 20 in. above the floor for civil helicopters and military aircraft. For transport category civil aircraft, the requirements are that the passageway in front of the emergency exit must be provided with illumination that is not less than 0.02 fc measured along a line that is within 6 in. of and parallel to the floor and is centered on the passenger evacuation path (Reference 132).

The mounting of the interior lighting systems at a level below the ceiling level is desirable. A series of human subject evacuation tests was conducted to compare evacuation rates with two different emergency lighting systems in an aircraft cabin filled with nontoxic white smoke (Reference 133). These tests found that cabin emergency lighting and exit signs mounted near the ceiling were almost completely obscured by the smoke, which layered most heavily in the upper one-half of the cabin. During the evacuation trials, the subjects tended to crouch down or stoop over to avoid the smoke and were looking for the exit from just above seat back height. It was found that armrest-mounted aisle lights led to less disorientation and reduced evacuation time as compared to the ceiling lights.

Full-scale fire tests conducted by the FAA showed that smoke entering a transport cabin from an external fuel fire or generated by burning interior materials will rapidly obscure ceiling-mounted lights and signs and significantly decrease cabin illumination when cabin temperatures are still at a survivable level (Reference 13). This study also found that lowering exit or cabin illumination sources below the 61-1/2-in. level significantly increased their effectiveness in the smoke environment and that, under most smoke conditions, increasing the luminance of the lights or signs did not substantially increase the time they remained visible. A test of new or prototype lighting systems showed that lights located in the aisle-side armrest of passenger seats provided passenger awareness, exit information, and cabin illumination for a period of time substantially longer than any of the ceiling- or bulkhead-mounted lights. These tests also showed that floor-mounted electro-luminescent lights provided the maximum visibility in smoke for passenger awareness. Self-powered Beta lights provided aisle outline identification when viewed from below the horizontal smoke layer and in a darkened environment.

7.3.2 Emergency Exit Lights

Supplementary emergency lighting units should be provided at or near each emergency exit with adequate brightness to permit untrained personnel to identify exits, to read exit operating instructions, and to actuate the exit mechanism without difficulty during periods of reduced visibility. The identity and location of each emergency exit should be recognizable under limited visibility (darkness, smoke, etc.) from a distance equal to the width of the cabin.

Exit light requirements must take into account the fact that the illumination at any distance from a light source is inversely proportional to the square of the distance from the source. Thus, at a distance of 5 ft, the brightness of a light will theoretically diminish to only 4 percent of the brightness measured 1 ft from the source. The same rapid decrease has been measured in the brightness of internally illuminated aircraft exit signs during an FAA program to evaluate current exit signs and markers (Reference 134). The decrease in average exit sign brightness with increasing distance from the signs is shown graphically in Figure 81.

Exit light effectiveness also is reduced by the presence of smoke. Measured light output for all units tested by the FAA diminished proportionately in a 90 percent smoke environment, as shown in Figure 81.

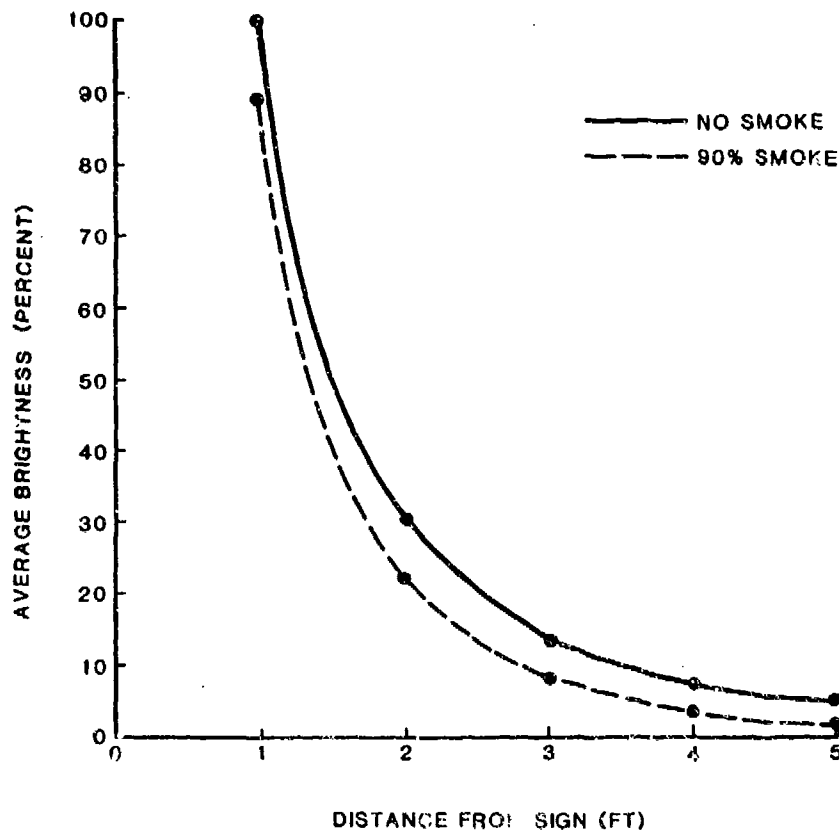


FIGURE 81. RELATIVE BRIGHTNESS OF INTERNALLY ILLUMINATED AIRCRAFT EXIT SIGNS AT VARIOUS DISTANCES FROM SIGNS (AVERAGE OF 10 DIFFERENT SIGNS).

Current FAA requirements for large transport-category airplane emergency lighting include internally or self-illuminated signs at each exit with a minimum luminance (brightness) of at least 25 fL (Reference 132). Small (9 seats or less) transport airplanes and transport-category rotorcraft need only have exit signs with a brightness of 160 microlamberts (0.15 fL) (References 130 and 132). Although the above requirements might be sufficient in clear air, the rapid drop in brightness due to the presence of smoke makes the sufficiency of even the brighter (25 fL) requirement questionable.

Most current transport airplane exit lights exceed the 25 fL requirement, but lights far brighter than those currently used are available. Figure 82 presents the results for two of the 10 exit lights tested by the FAA (Reference 134). This figure shows that, under all conditions, the experimental light was approximately 10 times brighter than the typical currently used exit light. This is most important during smoke conditions and at some distance away from the exit sign. For instance, at a 6-ft distance under 90 percent smoke, the current sign transmitted only 0.017 fc of light while the experimental sign transmitted 0.13 fc. It is noteworthy that the experimental aircraft sign is currently used in building installations and uses less battery power than some current aircraft signs. Other newly developed lights, which are much brighter than current lights, also are available.

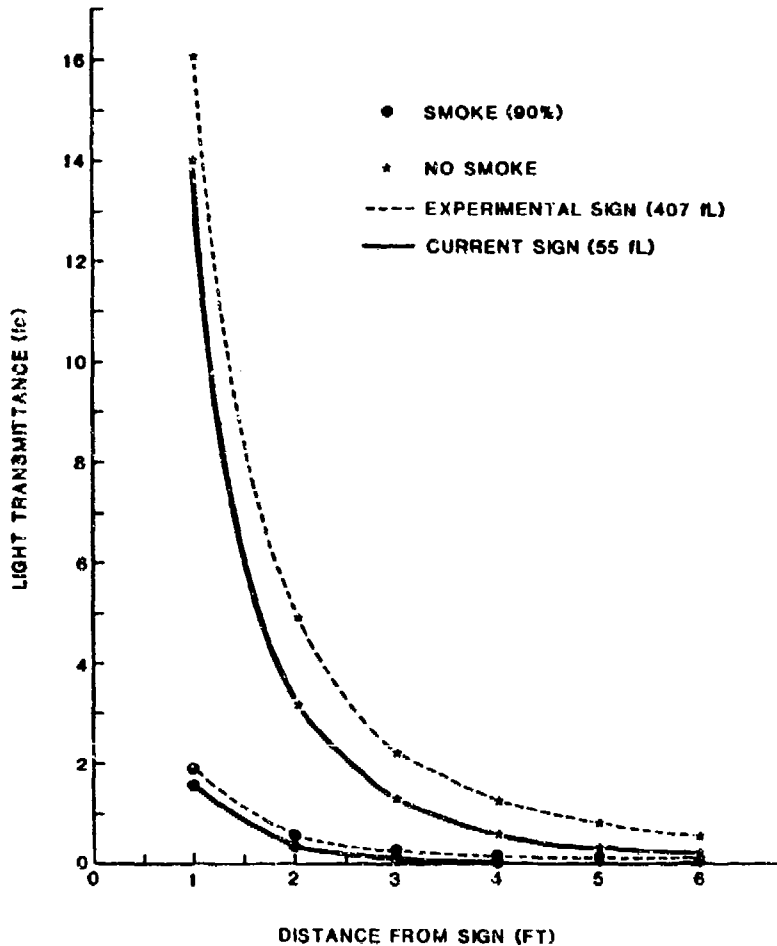


FIGURE 82. LIGHT TRANSMITTANCE OF EXIT SIGNS IN CLEAR AIR AND IN SMOKE AT VARIOUS DISTANCES FROM SIGN.

Based on the results of the FAA tests, all passenger- or troop-carrying aircraft should contain internally illuminated exit signs with a minimum average brightness of at least 25 fL. However, it is strongly recommended that the exit signs be even brighter.

Exit lights should be mounted in the lower part of the cabin to the extent possible. Tests have shown the effectiveness of lowering the light in full-scale fire tests to get the light down below the upper layering of smoke (Reference 13). Figure 83 presents data from those tests showing the increase in obscuration time at various levels in the aircraft.

The diminishing of exit light effectiveness when the aircraft is submerged has already been discussed in Chapter 6. Any aircraft whose mission requirements include troop transport over water should contain exit sign lighting meeting the requirements specified in Chapter 6.

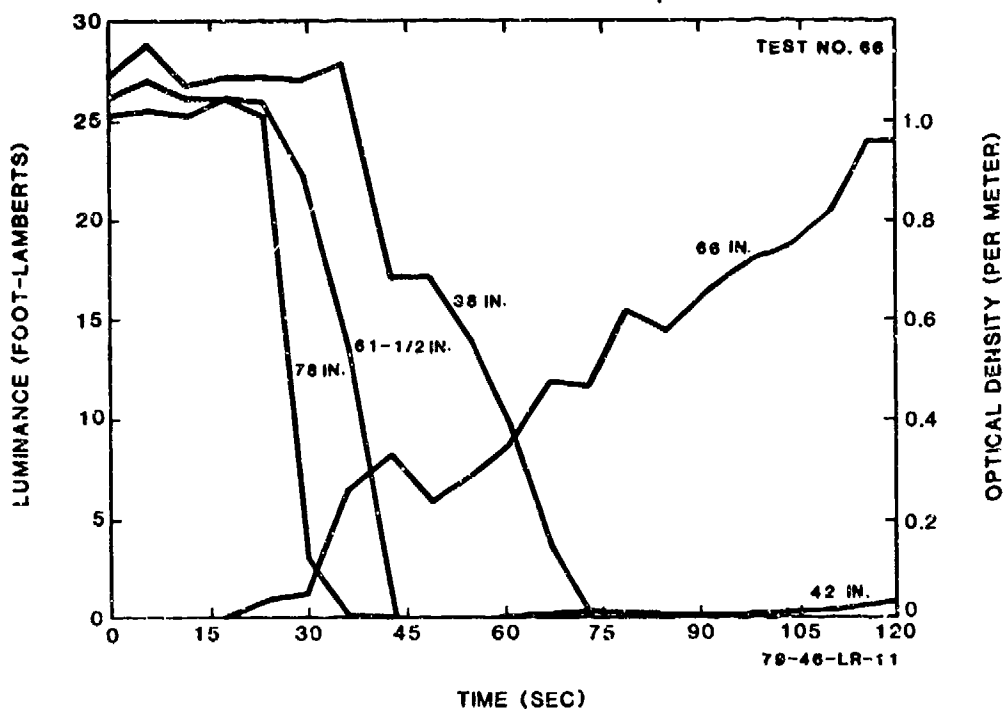


FIGURE 83. VERTICAL LIGHT ILLUMINATION PROFILE VERSUS OPTICAL DENSITY.

7.3.3 Exterior Emergency Lighting

For noncombat missions, exterior emergency lighting should be considered at each exit to illuminate the ground near the exit and areas where escape and survival equipment will be deployed. MIL-L-6503 specifies that the light intensity on the ground below normal and emergency exits should be 0.02 fc minimum (Reference 131).

7.3.4 Structural Considerations

All emergency lighting units should be self-contained, explosion-proof, operable under water, and accessible for periodic maintenance. All units should be capable of operating independently of the main aircraft lighting system.

The emergency lighting system should be designed, installed, and located so as to minimize damage to or loss of any portion of the emergency illumination as a result of ditching or emergency landing. To ensure structural integrity and continued operation after a crash, the lighting system, including all components necessary to provide the required illumination, should be capable of withstanding the following crash loads: 50 G downward, 10 G upward, 35 G forward, 15 G aftward, 25 G lateral. Breakup of the fuselage should not render any portion of the emergency illumination inoperative except for those lights directly destroyed by the break.

7.3.5 Emergency Lighting Power Source

Emergency lighting power sources should be independent of the main electrical power source for the aircraft and should contain power sufficient to ensure effective illumination for a minimum of 15 min.

It is believed that a power source strong enough to provide at least 15 min of effective illumination following a crash at night is adequate. If a postcrash fire does not occur within 15 min, it is likely that one will not occur at all. Personnel who are stunned or otherwise unable to evacuate the aircraft during the 15 min of emergency lighting could, in all probability, evacuate in the darkness if they were physically able.

7.3.6 Actuation of Emergency Lighting Units

Emergency lighting units should be designed to actuate both automatically and manually. If inadvertent actuation occurs, the unit should be capable of being reset manually.

7.3.6.1 Manual Actuation. There are circumstances where it would be desirable to manually turn on the emergency lighting. One such instance would be when a crash was imminent, but some time was available prior to the crash. By turning on the emergency lights manually, the aircraft occupants would have time for their eyes to adjust from normal lighting or darkness to emergency lighting. This also would permit all normal aircraft lighting to be turned off in order to reduce potential postcrash fire ignition sources. Therefore, a manual actuating switch should be placed in the cockpit, and another should be placed in the passenger/troop compartment close to the crew chief's station.

7.3.6.2 Automatic Actuation. The emergency lighting units should be automatically actuated in as many survivable accidents as possible. This can be accomplished by using inertia sensors responsive to the crash pulse parameters typical of lower-severity accidents. The sensor criteria should be identical to those specified for crash locator beacons (see Chapter 8). The crash sensors may be contained in each lighting unit, or the units may be actuated from one or more common sensors located remotely from the lights. The circuits for the lights should be such that they will be energized if the circuits between the lights and the sensors are broken.

There may be circumstances, such as forced or crash landings in enemy territory, where it would not be desirable to automatically actuate the emergency lighting. A circuit breaker or other device to nullify the automatic feature therefore is desirable. Such a device could be utilized by the crew upon entering enemy territory.

7.4 MARKING OF EMERGENCY EXITS

Emergency exits should be clearly marked both inside and outside the aircraft so that occupants and rescuers can find them rapidly. The markings should be distinctive to set them apart from the numerous other markings found on the aircraft. In addition to identifying the exits, instructions for releasing the exit closures should be clearly marked beside the exit release mechanism. The time required to determine how to release the exit closure could well mean the difference between survival or nonsurvival.

Army requirements for letter size dictate that, preferably, letters should be 2 in. high, but letters not less than 1 in. high are allowed. It is strongly recommended that the letters be 2 in. high. Tests conducted by the FAA on the readability of self-illuminated signs obscured by black fuel fire smoke showed that there is a considerable difference in the recognition of signs with letter sizes of 2 in. as compared to 1 in. (Reference 135). In fact, Figure 84, summarizing these data, shows that the visibility of the signs depended more on the size of the letters than it did on the luminance levels of the signs used.

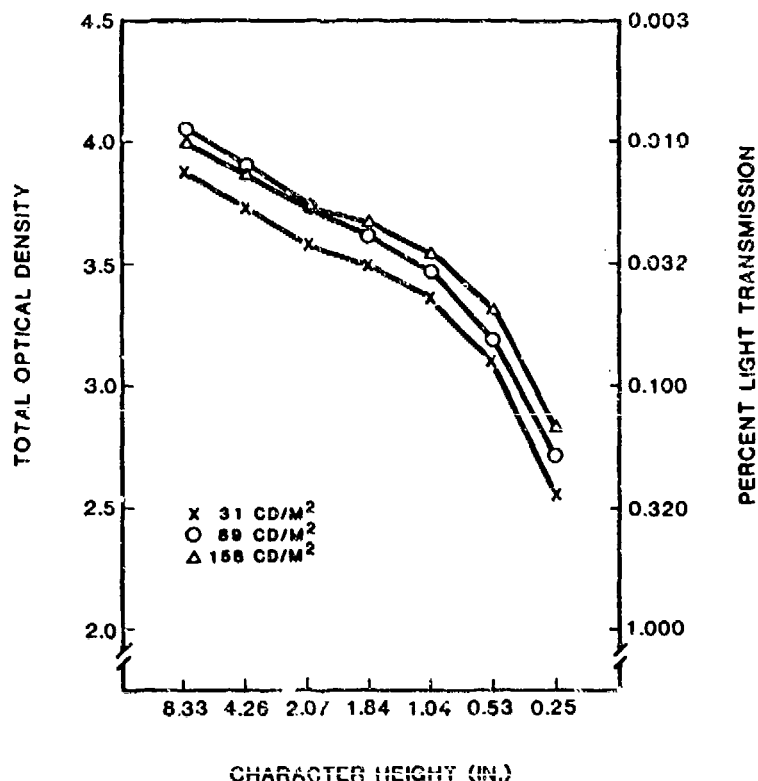


FIGURE 84. MEANS OF SMOKE DENSITY AT WHICH SEVEN SIGN SIZES WERE IDENTIFIED WHEN PRESENTED AT THREE BACKGROUND LUMINANCE LEVELS.

All U.S. Army aircraft must be painted and marked according to the requirements in TB 746-93-2 (Reference 136). The requirements contained therein for marking of emergency exits are summarized in the following sections. The reader is referred to TB 746-93-2 for complete details.

7.4.1 Internal Identification of Exits

An orange-yellow band should mark the complete periphery of the escape exit on olive drab backgrounds. A gloss black band is used on light backgrounds. The band must be between 1 and 2 in. wide and divided equally, if possible and practicable, between the mounting of the exit and the exit itself.

If soundproofing (or lining) covers the identification band on the inside of the aircraft, it also must be appropriately marked.

The words EMERGENCY EXIT, in orange-yellow, should be marked or stenciled on the escape hatch, door, or exit in the most readily visible location. Preferably, letters should be 2 in. high, but they cannot be less than 1 in. high.

7.4.2 External Identification of Exits

Markings identifying escape hatches, doors, and exits on the outside of aircraft should be marked gloss yellow on dark surfaces and gloss black on light surfaces. On olive drab and camouflaged colored aircraft, emergency exit markings are painted with lusterless black lacquer. It is recommended that all exits to be used for rescue be marked with rescue arrows like those used by the Navy and U.S. Coast Guard. In peacetime, yellow arrows with black letters are recommended.

7.4.3 External Identification of Secondary Openings

Secondary openings, such as auxiliary exits and windows, are usually smaller than primary openings, making entrance or exit more difficult. On noncamouflaged aircraft, the corners of the emergency exits and rescue exit areas are outlined with right-angle corner areas 1 in. wide and 3 in. long for each leg in gloss black on light background. On camouflaged aircraft, the corners of emergency exits and rescue exit areas are outlined with right-angle corner bands 1 in. wide and 3 in. long at each leg. The corner markings are painted with lusterless black lacquer.

7.4.4 Marking Instructions for Exit Operations

7.4.4.1 Internal Markings. Small handles or levers used to actuate doors or hatches should be identified by alternate 1/8-inch-wide orange-yellow and black stripes, painted on the background of the exit. Background striping should be applied at a 15-degree angle from the vertical, rotated clockwise. The striping should not interfere with other types of markings or codings. Large levers or exit controls should be marked with alternate orange-yellow and black stripes, 1/8 to 1/4 inch wide, directly on the lever or control.

7.4.4.2 External Markings. All external releases for operation of emergency exits should be marked EXIT RELEASE on the outside of the aircraft to facilitate quick identification. Letters preferably should be 2 in. high and should not be less than 1 in. high.

7.4.4.3 Operating Instructions Markings. Operating instructions to identify and explain the emergency release operation should be marked on the exit door, or hatch, or aircraft structure whichever is nearer the release. Minimum lettering heights specified are 1/2 in. internally and 1 in. externally. Preferably, the descriptive wording should be 1 in. high on the inside of the aircraft and 2 in. high on the outside. The 1/2-in. minimum specified in TB 746-93-2 for internal wording is not sufficient for easy reading under reduced visibility conditions, such as darkness or the presence of smoke.

The instructions should be as simple and concise as possible consistent with clarity of meaning. Standard English terminology, such as PULL, PUSH, TURN, or SLIDE, should be used.

The painting and marking schemes for in-service aircraft contained in TB 746-93-2 show liberal use of nonverbal symbols in exit operating instructions. Symbols are particularly useful in delineating directions of motion for handles, levers, etc. The use of symbols in conjunction with words will often lead to quicker understanding of the operation to be performed. Symbols are invaluable when the wording cannot be deciphered, as might be the case under reduced visibility conditions, or when viewed by non-English-speaking personnel. Thus, although not stated as a specific requirement in TB 746-93-2, symbols should be used in exit operating instructions whenever possible. Some symbols in current use are shown in Figure 85.

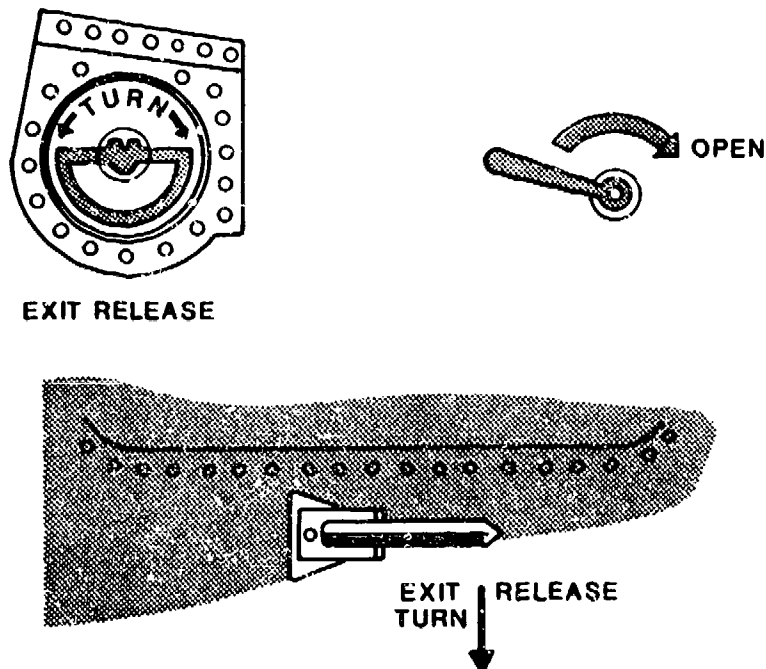


FIGURE 85. TYPICAL EXIT RELEASE INSTRUCTIONS INCORPORATING SYMBOLS.

7.5 CREW CHIEF STATIONS

There is a great need for experienced crew chief personnel to provide the necessary leadership and guidance for embarked troops during emergency evacuation. Accident records indicate that on many occasions crew chiefs have been responsible for successful emergency evacuations of large numbers of troops from aircraft under severe conditions.

At least one crew chief station should be located in each troop compartment. The location of the crew chief's station should provide as complete surveillance of the troop compartment as is practicable. The station should be located as near the main or emergency exits as possible. For aircraft requiring two crew chiefs, their respective stations should be as far apart as practicable; e.g., one in the forward end of the compartment and one in the aft end.

8. CRASH LOCATOR BEACONS

8.1 INTRODUCTION

After a survivable crash has occurred, rescue time becomes paramount in determining the ultimate survival chances of the occupants. Air Force records indicate that the life expectancy of injured survivors decreases as much as 80 percent during the first 24 hours following an accident, and the chances of survival of uninjured occupants rapidly diminishes after the first three days (Reference 137). Therefore, the installation of a crash locator beacon in the aircraft can greatly enhance the occupant's survival chances by reducing the amount of time between crash and rescue. However, 97 percent of all searches for crash locator beacons are for false alarms and an unacceptably high percentage of units do not function after a crash, so system design is critical. The following sections present criteria that should be followed to ensure the satisfactory operation of a crash locator beacon installed in an aircraft.

8.2 SYSTEM OVERVIEW

The search and rescue system includes both the aircraft-mounted components and the ground and satellite based detection and localization systems. The Search and Rescue Satellite Aided Tracking (SARSAT) system is the primary detection and tracking device for ELT transmissions. U.S. satellites receive and retransmit to ground stations all signals received on 121.5 and 243.0 MHz. It is necessary that line of sight exist between the ELT and the satellite as well as between the satellite and ground station. For this reason, worldwide coverage does not exist and detection waiting time varies with accident location and number of operational satellites. The USSR COSPAS satellites also assist on 121.5 but not 243.0. In addition, both satellites monitor 406.025 MHz and record and process this signal onboard for relay to the ground, giving worldwide coverage for ELT's operating in this mode.

The satellite motion is used to provide a doppler effect for position location, so that the output of the ground station gives one or more position estimates of transmitter location, reducing the time necessary to localize the signal source. In addition, some available ELT units have the capability of transmitting their last known position (from onboard navigation systems) as part of the emergency signal. Ground and aircraft monitoring of the emergency frequencies also detect some transmissions and supplement the spaceborne system.

8.3 CURRENT SYSTEM DESIGN STATUS

The Radio Technical Commission for Aeronautics (RTCA) has published current civil minimum requirements for ELT systems in Reference 138. Units produced under earlier FAA requirements (TSC C91) have had severe false alarm problems, which should be corrected in units produced under these later requirements and FAA approved under TSO C91a (Reference 139).

Procuring activities should examine the FAA requirements under TSO C91a (or later version) and evaluate the areas of compromise which were necessary for civil acceptability to determine if higher standards would be appropriate for

their program. Areas such as battery life at low temperature, crash survivability, multiple sensors, environmental tests, etc., may be appropriate areas for increased requirements in military units. In no case should units produced under earlier requirements be considered, due to their poor record of false alarms and crash survivability.

8.3.1 Frequencies

Civil locator beacons operate on civil emergency frequency 121.5 MHz and military UHF guard channel 243.0 MHz. Ground and airborne homing units are readily available to search for and localize these signals. Newly developed digital systems are also being designed to operate on 406.025 MHz for worldwide satellite tracking, but local homing on these signals is not readily achieved. Some military systems have been designed for other frequencies.

8.3.2 Components of Locator Beacons

All aircraft-installed crash locator beacons contain the same basic components: a crash sensor, transmitter, antenna(s), power supply, activating switch, and associated electrical circuitry.

8.3.2.1 Crash Sensing.

8.3.2.1.1 Crash Impact Conditions. Detailed analysis of accident records and test crashes has resulted in the definition of crash pulses for light fixed-wing and rotary-wing aircraft. The sensor specification which has been established for inertial crash sensors (Reference 138) is based on data on normal aircraft vibration conditions. The goal was to sense as low a crash pulse as possible while avoiding vibration-induced activation. Figure 86 (from Reference 138) applies to a sensor which responds to both acceleration threshold and velocity change, such as a gas-damped spring mass switch, a rolamite design, a damped pendulum, or similar devices which are currently available on the market. Additional test criteria, such as cross-axis loading, are included in the RTCA specification.

In fixed-wing aircraft, these sensors should be aligned with the longitudinal axis of the aircraft to detect the majority of injury-producing impacts. For rotary-wing aircraft, several options are available. The sensor can be mounted 30-40 degrees nose down, or an additional sensor can be mounted in the vertical axis with a higher activation level based on skid or gear impact absorbing capability. A damped pendulum switch is sensitive in 360 degrees around its long axis, and could be installed horizontally at a right angle to the aircraft longitudinal axis, thereby detecting impact up and down as well as fore and aft (Reference 140).

ELT's currently available for use in fixed-wing aircraft are unidirectional within a $\pm 30^\circ$ cone at 6 ± 1 G for 11 to 16 milliseconds.

New generation ELT's are essentially omnidirectional, activate at 9 ± 2 G for 25 to 45 milliseconds and have an integral antenna and encapsulated electronics.

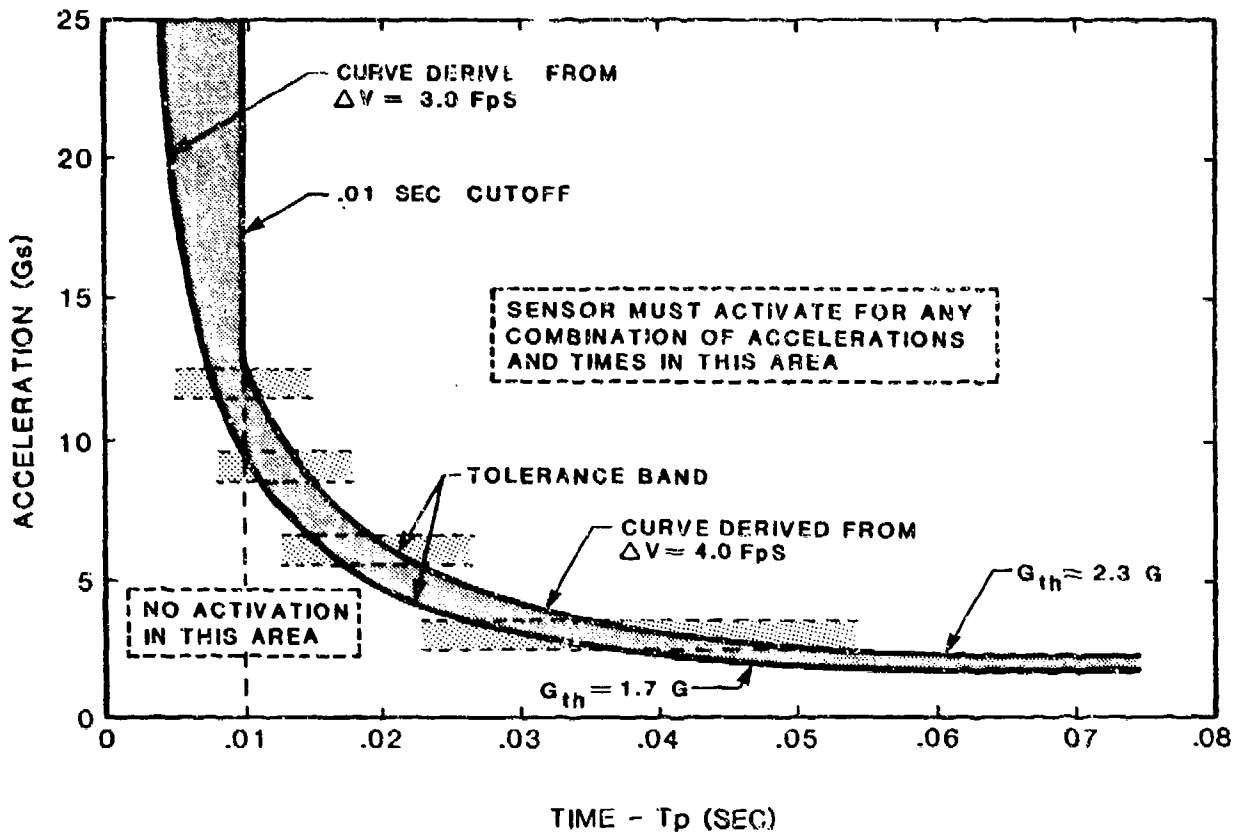


FIGURE 86. CRASH ACTIVATION SENSOR RESPONSE CURVE.

Other types of sensors have been evaluated, and some have seen operational use. These are:

1. Frangible switch. These switches break to either open or close an electrical circuit when aircraft damage occurs. They are expensive, maintenance sensitive, and require multiple-switch installations for acceptable probability of crash sensing.
2. Acceleration only. These switches were used with timing circuits to measure the duration over a specified acceleration level. Tests and experience have shown that they tend to bounce open and close during a crash event and do not reliably sense even severe crashes.
3. A crash sensor specifically for rotary-wing use was developed in connection with the IBAHRS system (Volume IV). It includes self-test circuitry (Reference 141).

References 142 and 143 discuss other options which may be available in crash sensing. The sensor system must survive the crash long enough to accomplish activation, so in general it should be tested to the same survival criteria as the transmitter and antenna systems.

8.3.2.1.2 Sensor Mounting. Reference 143 is an in-depth discussion of installation and mounting criteria. The inertia sensor criteria recommended in the preceding section are based on crash forces present in survivable crashes. These are the forces seen at the aircraft floor and, thus, are typical of the forces transmitted to the occupant compartment. Therefore, the crash sensor must be located in an area that will experience crash forces representative of those that will be seen in the occupant compartment. Ideally, this is within the cockpit. Of course, the sensor must be protected from any impact damage that could render it useless before it is able to activate the transmitter.

8.3.2.2 Transmitter. This unit includes both the transmitter electronics and the signal generation device. Its minimum power level and signal characteristics are specified in the appropriate RTCA and SRSAT specifications. The 406-MHz system is designed with a digital message that includes aircraft identification and time since activation. The characteristic swept tone of the 121.5/243.0 systems may also be modified with Morse, digital or voice identification as permitted by the system specifications. An optimal system would include 406 MHz for detection by satellite and a second frequency for short-range homing.

8.3.2.2.1 Survival. The system is of no value if it is destroyed in the crash. The transmitter and antenna must be hardened and protected as well as feasible. Minimum requirements of the RTCA documents for shock, crush and penetration are readily achieved, and can be exceeded if desired. Automatically deployable systems are available from some vendors.

8.3.2.2.2 Mounting. In general, a more aft location will provide increased protection from crash forces and airframe destruction. Expected fire patterns should also be considered. Mounting strength should meet or exceed the static attachment strength specified for auxiliary equipment, and nearby structure should be examined for potential damage sources. Detailed mounting suggestions are contained in Reference 144.

8.3.2.2.3 Activation. The transmitter should be capable of being either manually or automatically activated. An arming switch that will allow the automatic activation capability to be selected or not, as desired, should be provided. Manual activation should always be available in case the sensor malfunctions or unusually low-level accelerations fail to trigger the sensor. The cockpit should be provided with a warning light or sound that could alert the crew to inadvertent transmitter activation. A manual override switch should be provided so that the transmitter can be turned off whenever desired. Interconnect wiring should not have a failure mode that activates when not desired, or disables an activated transmitter.

8.3.2.3 Power Supply. The crash locator beacon should have its own independent power supply so that it is not dependent on aircraft power for its operation. The power supply should be capable of providing necessary power for optimum transmitter operation over a specified time period and under specified environmental conditions. These conditions should be specified by the procuring activity dependent on particular mission requirements.

The FAA, in following the RTCA requirements, has specified that the power support must be able to provide continuous operation for at least 50 hours at 50 MW output power, or 100 hours at 25 MW output. Other options are available to a manufacturer, and the chosen rating must be marked on the unit. The temperature range of -20°C to 55°C is specified, but certification at -40°C and low power is also available. High output power, low temperature, and long duration combined require large batteries, or special system designs, but may be appropriate for some military applications. References 145 and 146 are studies of batteries in ELT use and should be referred to when procuring units for military use.

The power supply, if not integral with the transmitter, must be mounted to the aircraft so that it will not be torn loose or damaged during impact. It should be mounted in a location away from anticipated impact areas and should have an attachment strength equal to that specified for the transmitter.

8.3.2.4 Antenna. Antennas, except for those used in portable and automatic deployable equipment, are usually mounted outside the aircraft to ensure the proper radiated signal strength and shape. Since survival of the antenna is critical to the successful operation of the crash beacon, care must be taken in deciding its location. It should be kept out of primary impact zones, such as the front or bottom of the aircraft, and it also should be kept out of secondary impact zones. These zones include wing and tail surfaces likely to impact trees, etc., and those portions of helicopters apt to experience rotor blade strikes during impact. The strength of the antenna attachment also should be sufficient to withstand decelerative impact forces. Low profile antennas have been developed for these applications.

The coaxial cable between the antenna and transmitter should not cross any production break in the fuselage structure. It should have locking connectors on each end and have sufficient slack to allow for expected fuselage deformations.

8.3.2.5 Electrical Wiring. Electrical wiring between components of the system should be protected from impact damage unless the components are packaged together or the failure modes are fail operational. Protection can be accomplished by routing the wire along the strongest structural members of the aircraft and away from anticipated areas of structural deformation. The wires should be attached to the aircraft structure with clamps or items that will fail before the wires break. Twenty to thirty percent extra length in the wires, in the form of loops or S shaped patterns, will allow the wires to move with deforming structure rather than be pulled apart. Nonconductive shields should surround the wires in all areas where structural crushing could occur.

APPENDIX

RELATION OF PAIN THRESHOLD TIME TO HEAT SOURCE TEMPERATURE

The pain threshold curves in Figure 10 (Section 3.3.1.1), which apply to visible or exposed areas of the skin, were generated from data in References 147 through 153. The curves that account for variable radiating surfaces (F) were determined in the following manner.

The most significant variables that determine the rate of heat absorption by heat radiation are: (1) temperature of radioactive source, (2) fraction of visible hemisphere at elevated temperature (F), and (3) emissivity of radiative source. Taking these factors into consideration, the rate of radiative heat absorption is:

$$q_R = a \cdot e \cdot \alpha \cdot F \cdot T^4 \quad (A-1)$$

Where a = absorptivity of skin surface

e = emissivity of radiative source

α = Stephan-Boltzmann constant

$$= 4.88 \times 10^8 \text{ kcal m}^{-2} \text{ hr}^{-1} (\text{°K})^{-4}$$

F = fraction of visible hemisphere occupied by radiating surface

T = temperature of radiative surface, °K

Assuming that skin absorptivity and source emissivity are both equal to 0.85, Equation (A-1) becomes

$$q_R = 3.50 F \left(\frac{T}{100} \right)^4 \left[\text{kcal m}^{-2} \text{ hr}^{-1} \right] \quad (A-2)$$

or

$$\left(\frac{T}{100} \right) = 0.73 \left(\frac{1}{F} \right)^{1/4} (q_R)^{1/4} \left[\text{°K} \right] \quad (A-3)$$

Equation (A-3) relates the temperature of the emitting source to the rate of heat absorption per unit area by the skin. (The emitter occupies fraction F of the visible hemisphere.)

Equation (A-3) was used to plot the radiative burn curves for four cases ($F = 1.0, 0.5, 0.25,$ and 0.10) in Figure 10.

REFERENCES

1. Military Standard, MIL-STD-1290A(AV), LIGHT FIXED- AND ROTARY-WING AIRCRAFT CRASH RESISTANCE, Department of Defense, Washington, DC 20301, 26 September 1988.
2. Knapp, Stanley C., Ailemond, Pierre, and Karney, David H., HELICOPTER CRASHWORTHY FUEL SYSTEMS AND THEIR EFFECTIVENESS IN PREVENTING THERMAL INJURY, U.S. Army Aeromedical Research Laboratory, Fort Rucker, Alabama, July 1981, AD A102198.
3. Johnson, N. B., et al., AN APPRAISAL OF THE POSTCRASH FIRE ENVIRONMENT, Dynamic Science (The AvSER Facility); USANLABS Technical Report 70-22-CE, U. S. Army Natick Laboratories, Natick, Massachusetts, September 1963, AD 699826.
4. CRC-Aviation Fuel Safety Report Task Force, AVIATION FUEL SAFETY - 1975, CRC Project No. CA-52-74, Coordinating Research Council, Inc., New York, November 1975.
5. Geyer, G. B., and Urban, C. H., EVALUATION OF AN IMPROVED FLAME RESISTANT AIRCRAFT WINDOW SYSTEM, Federal Aviation Administration; DOT/FAA/CT-8310, U. S. Department of Transportation, Atlantic City Airport, New Jersey, May 1984, ADA143263.
6. Miniszewski, K. R., and Waterman, T. E., FIRE MANAGEMENT/SUPPRESSION SYSTEMS/CONCEPTS RELATING TO AIRCRAFT CABIN FIRE SAFETY, DOT/FAA/CT-82/134, Federal Aviation Administration, Atlantic City Airport, New Jersey, October 1983.
7. Quintiere, James G., and Tanaka, Takeyoshi, AN ASSESSMENT OF CORRELATIONS BETWEEN LABORATORY AND FULL-SCALE EXPERIMENTS FOR THE FAA AIRCRAFT FIRE SAFETY PROGRAM, PART FIVE: SOME ANALYSIS OF THE POST CRASH, NBSIR 82-2537, Federal Aviation Administration, Atlantic City Airport, New Jersey, July 1982.
8. Bankson, C. P., Back, L. H., Cho, Y. I., and Shakkottai, P., POOL FIGURES IN A SIMULATED AIRCRAFT CABIN INTERIOR WITH VENTILATION. Journal of Aircraft, Volume 24, Number 7, July 1987.
9. Middleton, V. E., A COMPUTER SIMULATION OF AIRCRAFT EVACUATION WITH FIRE, Contract NAS2-11134, Ames Research Center, Moffett Field, California, April 1983.
10. Hill, R. G., et al., AIRCRAFT SEAT FIRE BLOCKING LAYERS; EFFECTIVENESS AND BENEFITS UNDER VARIOUS FIRE SCENARIOS, Federal Aviation Administration. DOT/FAA/CT-83/29, U.S. Department of Transportation, Atlantic City Airport, New Jersey, June 1983, AD/A-131666.
11. Eklund, Thor I., and Wright Joseph, A., FUEL FIRE HAZARD PENETRATION INTO A MODEL FUSELAGE AS A FUNCTION OF CIRCUMFERENTIAL DOOR LOCATION AND FUEL BED HEIGHT, FAA-NA-80-9, Springfield, Virginia, National Technical Information Service, May 1980.

REFERENCES (CONTD)

12. Eklund, Thor I., POOL FIRE RADIATION THROUGH A DOOR IN A SIMULATED AIRCRAFT FUSELAGE, FAA-RD-78-135, Federal Aviation Administration, Washington, DC, December 1978.
13. Demaree, J., EXAMINATION OF AIRCRAFT INTERIOR EMERGENCY LIGHTING IN A POSTCRASH FIRE ENVIRONMENT, Federal Aviation Administration, DOT/FAA/CT-82/55, Department of Transportation, Atlantic City Airport, New Jersey, June 1982, AD-A117629.
14. Marcy, J. F., A STUDY OF AIR TRANSPORT PASSENGER CABIN FIRES AND MATERIALS, Federal Aviation Agency, Technical Report FAA-ADS-44, National Aviation Agency, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, December 1965, AD 654542.
15. Heine, D., and Brenneman, J., THE FIRE TEST RESULTS, The Airline Pilot, Vol. 35, No. 10, October 1966, pp. 8-11, 18-19.
16. Mohler, S. R., AIR CRASH SURVIVAL: INJURIES AND EVACUATION TOXIC HAZARDS, Aviation, Space, and Environmental Medicine, January 1975, pp. 86-88.
17. Shiltz, Jr., R. J., INVESTIGATION OF THE STRUCTURAL DEGRADATION AND PERSONNEL HAZARDS RESULTING FROM HELICOPTER COMPOSITE STRUCTURES EXPOSED TO FIRES AND/OR EXPLOSIONS, Bell Helicopter Textron, USAAVRADCOM-TR-81-D-16, Applied Technology Laboratory, U.S. Army Research and Technology Laboratories, Fort Eustis, Virginia, August 1981, AD A104757.
18. NASA Special Publication, SP-448, RISK TO THE PUBLIC FROM CARBON FIBERS RELEASED IN CIVIL AIRCRAFT ACCIDENTS, 1980.
19. Pesman, G. J., APPRAISAL OF HAZARDS TO HUMAN SURVIVAL IN AIRPLANE CRASH FIRES, NACA Technical Note 2996, Lewis Flight Propulsion Laboratory, National Advisory Committee for Aeronautics, Cleveland, Ohio, September 1953.
20. Buettner, K., Ph.D., EFFECTS OF EXTREME HEAT ON MAN, Journal of the American Medical Association, Vol. 144, October 1950, pp. 732-740.
21. Moritz, A. R., M.D., et al., AN EXPLORATION OF THE CASUALTY PRODUCING ATTRIBUTES OF CONFLAGRATIONS: LOCAL AND SYSTEMIC EFFECTS OF GENERAL CUTANEOUS EXPOSURE TO EXCESSIVE HEAT OF VARYING DURATION AND INTENSITY, Archives of Pathology, Vol. 43, 1947, pp. 466-502.
22. Pryer, A. J., and Yuill, C. H., MASS FIRE LIFE HAZARD, Southwest Research Institute, San Antonio, Texas, September 1966.
23. Forbes, W. H., Sargent, F., and Roughton, F. J. W., THE RATE OF CARBON MONOXIDE UPTAKE BY NORMAL MEN, American Journal of Physiology, Vol. 143, April 1945.

REFERENCES (CONTD)

24. FIRE SAFETY ASPECTS OF POLYMERIC MATERIALS, VOLUME 6 -AIRCRAFT: CIVIL AND MILITARY, Publication NMAB 3186, National Materials Advisory Board, National Academy of Sciences, Washington, D. C., 1977, p. 184.
25. Higgins, E. A., Ph.D., et al., THE ACUTE TOXICITY OF BRIEF EXPOSURES TO HF, HCl, NO₂ AND HCN SINGLY AND IN COMBINATION WITH CO, FAA Civil Aeromedical Institute; Report No. FAA-AM-71-41, Department of Transportation, Federal Aviation Administration, Office of Aviation Medicine, Washington, D. C., November 1971, AD 735160.
26. Kaplan, H. L., et al., A RESEARCH STUDY OF THE ASSESSMENT OF ESCAPE IMPAIRMENT BY IRRITANT COMBUSTION GASES IN POSTCRASH AIRCRAFT FIRES, Southwest Research Institute, DOT/FAA/CT-84/16, U.S. Department of transportation, Atlantic City Airport, New Jersey, September 1984, AD-A146484.
27. Eklund, T. I., ANALYSIS OF DISSIPATION OF GASEOUS EXTINGUISHER AGENTS IN VENTILATED COMPARTMENTS, Federal Aviation Administration, DOT/FAA/CT-83/1, Federal Aviation Administration, Atlantic City Airport, New Jersey, May 1983, ADA128760.
28. Snyder, Carl E., and Krawetz, Arthur A., DETERMINATION OF THE FLAMMABILITY CHARACTERISTICS OF AEROSPACE HYDRAULIC FLUIDS, Journal of the American Society of Lubrication Engineers, Volume 37, 12, 705-714, 1980.
29. Skifstad, J. G., IGNITION OF FUEL SPRAYS BY HOT SURFACES AND STABILIZATION OF AIRCRAFT FIRES, AFOSR-77-3446, Purdue University, School of Mechanical Engineering, West Lafayette, Indiana, 1978.
30. Loftus, Joseph J., Juarez, Nilsa, Maldonado, Adalberto, and Simenauer, Jeffrey A., FLAMMABILITY MEASUREMENTS ON FOURTEEN DIFFERENT HYDRAULIC FLUIDS USING A TEMPERATURE-PRESSURE SPRAY IGNITION TEST, NBSIR 81-2247, U.S. Bureau of Mines, Pittsburgh, Pennsylvania, March 1981.
31. AVIATION FUEL SAFETY - 1975, CRC Report Number 482, Coordinating Research Council, Inc., New York, New York, November 1975.
32. FINAL REPORT OF THE SPECIAL AVIATION FIRE AND EXPLOSION REDUCTION (SAFER) ADVISORY COMMITTEE, Volume 1, June 26, 1978 - June 26, 1980.
33. Churchill, A. V., AVIATION FUELS-FUTURE OUTLOOK AND IMPACT ON AIRCRAFT FIRE THREAT, AGARD, AGARD-LS-123, North Atlantic Treaty Organization, 1982.
34. Robertson, S. H. and Turnbow, J. W., A METHOD FOR SELECTING A CRASH-WORTHY FUEL SYSTEM DESIGN, AGARD, Agard-CP-255, North Atlantic Treaty Organization, 1978.
35. Military Specification, MIL-T-27422B, TANK, FUEL, CRASH-RESISTANT, AIRCRAFT, Department of Defense, Washington, D. C., 24 February 1970.

REFERENCE (CONTD)

36. Robertson, S. H., and Turnbow, J. W., AIRCRAFT FUEL TANK DESIGN CRITERIA, Aviation Safety Engineering and Research of Flight Safety Foundation; USAAVLABS Technical Report 66-24, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, March 1966, AD 631610.
37. Cook, R. L., et al., IMPROVED CRASH-RESISTANT FUEL CELL MATERIAL, Good-year Aerospace; USAAVLABS Technical Report 67-6, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, April 1967, AD 813165L.
38. Robertson, S. H., and Macaracy, P., A PROGRAM TO REDUCE THE POSTCRASH FIRE POTENTIAL OF THE CESSNA 185 AND 206 AIRCRAFT, Robertson Aviation, Inc., Tempe, Arizona, May 1985.
39. Robertson, S. H., DEVELOPMENT OF A CRASH-RESISTANT FLAMMABLE FLUIDS SYSTEM FOR THE UH-1A HELICOPTER, Dynamic Science; USAAVLABS Technical Report 68-82, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, January 1969, AD 688165.
40. Military Specification, MIL-H-63282, HYDRAULIC FLUID, FIRE RESISTANT SYNTHETIC HYDROCARBON BASE, AIRCRAFT, Department of Defense, Washington, D. C., 22 February 1974.
41. Weatherford, W. D. Jr., and Wright, B. R., STATUS OF RESEARCH OF ANTI-MIST AIRCRAFT TURBINE ENGINE FUELS IN THE UNITED STATES, in Aircraft Fire Safety, AGARD Conference Proceedings No. 166, North Atlantic Treaty Organization, Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine, France, October 1975, pp. 2.1-2.12, AD A018180.
42. San Miguel, A., ANTIMISTING FUEL KINEMATICS RELATED TO AIRCRAFT CRASH LANDINGS, Journal of Aircraft, Vol. 15, No. 3, March 1978, pp. 137-142.
43. Shaw, L. M., SAFETY EVALUATION OF EMULSIFIED FUELS, Dynamic Science; USAAMRDL Technical Report 71-29, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, June 1971, AD 729330.
44. Shaw, L. M., SAFETY EVALUATION OF ANTIMIST FUELS, Dynamic Science; Report 9130-73-112, U. S. Army Mobility Equipment Research and Development Center, Aberdeen Proving Ground, Maryland, November 1973, AD 773035.
45. Fasanella, Edwin, L., and Alfaro-Bou, Emilio, IMPACT DATA FROM A TRANSPORT AIRCRAFT DURING A CONTROLLED IMPACT DEMONSTRATION, NASA Technical Paper 2589, Langley Research Center, Hampton, Virginia, April, 1985.
46. Hayduk, Robert J., FULL-SCALE TRANSPORT CONTROLLED IMPACT DEMONSTRATION, NASA Conference Publication 2395, Langley Research Center, Hampton, Virginia, April, 1985.

REFERENCES (CONTD)

47. Yaffe, Michael L., ANTI-MISTING FUEL RESEARCH AND DEVELOPMENT FOR COMMERCIAL AIRCRAFT - FINAL SUMMARY REPORT, DOT/FAA Technical Center, Report No. DOT/FAA/CT-86/7, April 1986.
48. Kuchta, Joseph M., and Clodfelter, Robert G., AIRCRAFT MISHAP FIRE PATTERN INVESTIGATIONS, AFWAL-TR-85-2057, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, August 1985.
49. Robertson, S. H., et al., THEORY, DEVELOPMENT, AND TEST OF A CRASH-FIRE-INERTING SYSTEM FOR RECIPROCATING ENGINE HELICOPTERS, Aviation Safety Engineering and Research of Flight Safety Foundation; TRECOM Technical Report 63-49, U.S. Army Transportation Research Command, Fort Eustis, Virginia, December 1963.
50. Pinkel, I. I., et al., ORIGIN AND PREVENTION OF CRASH FIRES IN TURBOJET AIRCRAFT, NACA Report 1019, Lewis Flight Propulsion Laboratory, National Advisory Committee for Aeronautics, Cleveland, Ohio, 1958.
51. Black, D. O., CRASH-FIRE PROTECTION SYSTEM FOR A J57 TURBOJET ENGINE USING WATER AS A COOLING AND INERTING AGENT, NASA Technical Note D-274, National Aeronautics and Space Administration, Washington, D.C., February 1969.
52. Pinkel, I. I., et al., MECHANISM OF START AND DEVELOPMENT OF AIRCRAFT CRASH FIRES, NACA Technical Note 2996, Lewis Flight Propulsion Laboratory, National Advisory Committee for Aeronautics, Cleveland, Ohio, 1953.
53. Johnson, Richard L., and Gillerman, Joseph B., AIRCRAFT FUEL TANK INERTING SYSTEM, AFWAL-TR-82-2115, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, July 1983.
54. Grenich, A. F., VULNERABILITY METHODOLOGY AND PROTECTIVE MEASURES FOR AIRCRAFT FIRE AND EXPLOSION HAZARDS, AFWAL-TR-85-2060, Volume 1, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, January 1986.
55. Johnson, A. M., and Grenich, A. F., VULNERABILITY METHODOLOGY AND PROTECTIVE MEASURES FOR AIRCRAFT FIGURES AND EXPLOSION HAZARDS, AFWAL-TR-85-2060, Volume 2, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, January, 1986.
56. Grenich, A. F., and Tolle, F. F., ELECTROSTATIC SAFETY WITH EXPLOSION SUPPRESSANT FOAMS, AFWAL-TR-83-2015, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, March 1983.
57. INTEGRATED AIRCRAFT FUEL TANK INERTING AND COMPARTMENT FIRE SUPPRESSION SYSTEM, AFWAL-TR-83-2021, Vol II, Aero Propulsion Laboratory, Wright-Patterson AFB, Ohio, April 1983.

REFERENCES (CONTD).

58. Klein, J. K., THE F-16 HALON TANK INERTING SYSTEM, AIAA-81-1638, AIAA Aircraft Systems and Technology Conference, Dayton, Ohio, August 1981.
59. Klueg, E. P., et al., AN INVESTIGATION OF IN-FLIGHT FIRE PROTECTION WITH A TURBOFAN POWERPLANT INSTALLATION, Report No. NA-69-26, Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, April 1969, AD 686045.
60. Jones, R. B., et al., AN ENGINEERING STUDY OF AIRCRAFT CRASH FIRE PREVENTION, Walter Kidde and Company, Inc.; Technical Report 57370, Wright Aeronautical Development Center, Ohio, June 1958, AD 155846.
61. Campbell, J. A., APPRAISAL OF THE HAZARDS OF FRICTION SPARK IGNITION OF AIRCRAFT CRASH FIRES, NACA Technical Note 4024, Lewis Flight Propulsion Laboratory, National Advisory Committee for Aeronautics, Cleveland, Ohio, May 1957.
62. Diller, R. W., DESIGN, DEVELOPMENT, AND FABRICATION OF A CRASH SENSOR FOR MILITARY HELICOPTERS. NADC-81310-60, Naval Air Systems Command, Washington, DC, November 1981.
63. Hall, D. S., SYSTEMS ANALYSIS OF THE INSTALLATION, MOUNTING, AND ACTIVATION OF EMERGENCY LOCATOR TRANSMITTERS IN GENERAL AVIATION AIRCRAFT, NAS5-25444, NASA/Goddard Space Flight Center, Greenbelt, Maryland, January 1980.
64. Moser, J. D., and Black D. O., PROPOSED INITIATING SYSTEM FOR CRASH-FIRE PREVENTION SYSTEMS, NACA Technical Note 3774, National Advisory Committee for Aeronautics, Cleveland, Ohio, December 1956.
65. Drummond, J. K., STUDY TO DETERMINE THE APPLICATION OF AIRCRAFT IGNITION-SOURCE CONTROL SYSTEMS TO FUTURE ARMY AIRCRAFT, Dynamic Science; USAAMRDL Technical Report 71-35, Eustis Directorate, U.S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, June 1971, AD 729870.
66. Kuchta, J. M., FIRE AND EXPLOSION MANUAL FOR AIRCRAFT ACCIDENT INVESTIGATORS, Pittsburg Mining and Safety Research Center, Bureau of Mines, AFAPL Technical Report 73-74, Air Force Aero Propulsion Laboratory, Wright-Patterson Air Force Base, Ohio, August 1973, AD 771191.
67. Smith, E. E., PRODUCT FIRE HAZARD EVALUATION, Journal of Fire & Flammability/Consumer Product Flammability, Vol. 2, March 1975, pp. 58-69.
68. Brauman, S. K., EFFECT OF SAMPLE TEMPERATURE ON COMBUSTION PERFORMANCE OF POLYMERS, Journal of Fire & Flammability, Vol. 8, April 1977, pp. 210-224.

REFERENCES (CONTD)

69. Hilado, C. J., and Cumming, H. J., HYDROCARBON CONCENTRATIONS IN FIRE TOXICITY TESTS AS AN INDICATION OF FLASH FIRE PROPENSITY, Journal of Fire & Flammability, Vol. 8, April 1977, pp. 235-240.
70. Gross, D., et al., SMOKE AND GASES PRODUCED BY BURNING AIRCRAFT INTERIOR MATERIALS, Building Science Series 18, U. S. Department of Commerce, National Bureau of Standards, Washington, DC, February 1969.
71. Brown, L. J., Jr., SMOKE EMISSIONS FROM AIRCRAFT INTERIOR MATERIALS AT ELEVATED HEAT FLUX LEVELS USING MODIFIED NBS SMOKE CHAMBER, Federal Aviation Administration; FAA-RD-79-26, U. S. Department of Transportation, Washington, D.C., July 1979, AD-A115256.
72. Einhorn, I. N., PHYSIO-CHEMICAL STUDY OF SMOKE EMISSION BY AIRCRAFT INTERIOR MATERIALS, PART I: PHYSIOLOGICAL AND TOXICOLOGICAL ASPECTS OF SMOKE DURING FIRE EXPOSURE, University of Utah; Report No. FAA-RD-73-50-1, Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, July 1973, AD 763602.
73. Spurgeon, J. C., Speivel, L. C., and Feher, R. E., OXIDATIVE PYROLYSIS OF AIRCRAFT INTERIOR MATERIALS, Journal of Fire & Flammability, Vol. 8, July 1977, pp. 349-363.
74. Spurgeon, J. C., A PRELIMINARY COMPARISON OF LABORATORY METHODS FOR ASSIGNING A RELATIVE TOXICITY RANKING TO AIRCRAFT INTERIOR MATERIALS, Report No. FAA-RD-75-37, Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, October 1975, AD A018148.
75. Hilado, C. J., FLAMMABILITY TESTS, 1975: A REVIEW, Fire Technology, Vol. 11, No. 4, November 1975, pp. 282-295.
76. Federal Aviation Regulations, AIRWORTHINESS STANDARDS: TRANSPORT CATEGORY AIRPLANES, Part 25, Section 25.853.
77. Brown, L. J., Jr., and Johnson, R. M., CORRELATION OF LABORATORY-SCALE FIRE TEST METHODS FOR SEAT BLOCKING LAYER MATERIALS WITH LARGE-SCALE TEST RESULTS, Federal Aviation Administration; DOT/FAA/CT-83/29, Federal Aviation Administration, Atlantic City Airport, New Jersey, June 1983, AD/A-131666.
78. IMPROVED FLAMMABILITY STANDARDS FOR MATERIALS USED IN THE INTERIORS OF TRANSPORT CATEGORY AIRPLANE CABINS, Federal Register, Vol. 51, No. 139, July 1986.
79. Hill, R. G., Eklund, T. I., and Sarkos, C. P., AIRCRAFT INTERIOR PANEL TEST CRITERIA DERIVED FROM FULL-SCALE FIRE TESTS, Federal Aviation Administration; DOT/FAA/CT-85/23, U.S. Department of Transportation, Atlantic City Airport, New Jersey, February 1984, AD-A149791.

REFERENCES (CONTD)

80. HEAT AND VISIBLE SMOKE RELEASE RATES FOR MATERIALS AND PRODUCTS 1986, National Fire Protection Association, NFPA 253, Quincy, Massachusetts, December 1985.
81. Fish, R. H., AMES T-3 FIRE TEST FACILITY - AIRCRAFT CRASH FIRE SIMULATION, Journal of Fire & Flammability, Vol. 7, October 1976, pp. 470-481.
82. Quintiere, J. G., AN ASSESSMENT OF CORRELATIONS BETWEEN LABORATORY AND FULL-SCALE EXPERIMENTS FOR THE FAA AIRCRAFT FIRE SAFETY PROGRAM, PART 1: SMOKE, National Bureau of Standards; DOT/FAA/CT-82/100, Federal Aviation Administration, Atlantic City Airport, New Jersey, July 1982, NBSIR 82-2508.
83. Crane, C. R., Ph.D., et al., INHALATION TOXICOLOGY: I. DESIGN OF A SMALL-ANIMAL TEST SYSTEM: II. DETERMINATION OF THE RELATIVE TOXIC HAZARDS OF 75 AIRCRAFT CABIN MATERIALS, FAA Civil Aeromedical Institute; Report No. FAA-AM-77-9, Department of Transportation, Federal Aviation Administration, Office of Aviation Medicine, Washington, DC, March 1977, AD A043646.
84. Hilado, C. J., FIRE RESPONSE CHARACTERISTICS OF NONMETALLIC MATERIALS: A REVIEW OF RECENT PAPERS AND REPORTS, Journal of Fire & Flammability, Vol. 7, October 1976, pp. 539-558.
85. Levin, B. C., THE NATIONAL BUREAU OF STANDARDS TOXICITY TEST METHOD, Fire Technology International Quarterly, Vol. 21, No. 2, The National Fire Protection Association, Quincy, Massachusetts, May 1985.
86. Spieth, H. H., et al., A COMBINED HAZARD INDEX FIRE TEST METHODOLOGY FOR AIRCRAFT CABIN MATERIALS, Vol. I, Douglas Aircraft Company; DOT/FAA/CT-82/236-1, Federal Aviation Administration, Atlantic City Airport, New Jersey, April 1982, AD-A117448.
87. Nelson, G. L., et al., MATERIAL PERFORMANCE IN TRANSPORTATION VEHICLE INTERIORS, Journal of Fire & Flammability, Vol. 8, July 1977, pp. 262-278.
88. Dusken, F. E., FIRE TESTING OF AIRCRAFT CABINS, Journal of Fire & Flammability, Vol. 8, April 1977, pp. 193-201.
89. Parket, W. J., AN ASSESSMENT OF CORRELATIONS BETWEEN LABORATORY AND FULL-SCALE EXPERIMENTS FOR THE FAA AIRCRAFT FIRE SAFETY PROGRAM, PART 6: REDUCED-SCALE MODELING OF COMPARTMENTS AT ATMOSPHERIC PRESSURE, National Bureau of Standards; DOT/FAA/CT-82-160, U.S. Department of Transportation, Atlantic City Airport, New Jersey, October 1982.
90. Drysdale, D., An Introduction to Fire Dynamics, John Wiley and Sons, New York, 1985.

REFERENCES (CONTD)

91. Foa, O., editor, WORKSHOP ON MATHEMATICAL FIRE MODELING, March 24 - 27, 1981, Federal Aviation Administration, Atlantic City Airport, New Jersey, August 1981.
92. Emmons, H. W. and Mitler, H. E., COMPUTER MODELING OF AIRCRAFT CABIN FIRES, Harvard University; NBS-GCR-83-431, U.S. Department of Transportation, Harvard University and Federal Aviation Administration, Washington, DC, June 1983, PB84-10015 3.
93. Marcy, J. F., and Johnson, R., FLAMING AND SELF-EXTINGUISHING CHARACTERISTICS OF AIRCRAFT CABIN INTERIOR MATERIALS, Report No. NA-68-30 [DS-68-13], Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, July 1968, AD 673084.
94. Einhorn, I. M., Kanakia, M. D., and Seader, J. D., PHYSIO-CHEMICAL STUDY OF SMOKE EMISSION BY AIRCRAFT INTERIOR MATERIALS, Part II: RIGID- AND FLEXIBLE-URETHANE FOAMS, University of Utah; Report No. FAA-RD-73-50, II, Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, July 1973, AD 763935.
95. Fewell, L. L., et al., eds., CONFERENCE ON THE DEVELOPMENT OF FIRE-RESISTANT AIRCRAFT PASSENGER SEATS, NASA Technical Memorandum X-73144, Ames Research Center, National Aeronautics and Space Administration, Washington, DC, August 1976, pp. 115-125.
96. Morford, R. H., THE FLAMMABILITY OF NEOPRENE CUSHIONING FOAM, Journal of Fire & Flammability, Vol. 8, July 1977, pp. 279-299.
97. Hilado, C. J., THE CORRELATION OF LABORATORY TEST RESULTS WITH BEHAVIOR IN REAL FIRES, Journal of Fire & Flammability, Vol. 8, April 1977, pp. 202-209.
98. Parker, J. A., Ph.D., POLYPHOSPHAZENE SEAT CUSHION APPLICATIONS, American Research Center; in Conference on the Development of Fire-Resistant Aircraft Passenger Seats, eds. Fewell, L. L., et al., NASA Technical Memorandum X-73144, National Aeronautics and Space Administration, Washington, DC, August 1976.
99. Gagliani, J., FIRE RESISTANT RESILIENT FOAMS - FINAL REPORT, Solar Division, International Harvester; Report No. N76-18278, National Aeronautics and Space Administration, Lyndon B. Johnson Space Center, Houston, Texas, February 1976.
100. Williamson, R. B., and Fisher, F. L., FIRE TESTS AND CRITERIA FOR MASS TRANSPORTATION SEATS, paper presented at International Congress and Exposition, Society of Automotive Engineers, Detroit, Michigan, February 1981.

REFERENCES (CONTD)

101. Tesoro, G. C., Ph.D., STATE OF THE ART MATERIALS USED IN AIRCRAFT PASSENGER SEATS, Massachusetts Institute of Technology; in Conference on the Development of Fire-Resistant Aircraft Passenger Seats, eds. Fewell, L. L., et al., NASA Technical Memorandum X-73144, National Aeronautics and Space Administration, Washington, DC, August 1976.
102. Kourtides, D. A., et al., OPTIMIZATION OF AIRCRAFT SEAT CUSHION FIRE BLOCKING LAYERS, National Aeronautics and Space Administration,; DOT/FAA/CT-82-132, U.S. Department of Transportation, Atlantic City Airport, New Jersey, March 1983, AD/A130144.
103. Fewell, L. L., Trabold, Ed., and Spieth, H., FIRE RESISTIVITY AND TOXICITY STUDIES OF CANDIDATE AIRCRAFT PASSENGER SEAT MATERIALS, NASA Ames Research Center; NASA TM-78468, National Aeronautics and Space Administration, Washington, DC, March 1978, N/8-21214.
104. Fewell, L. L., et al., RELEASE-RATE CALORIMETRY OF MULTILAYERED MATERIALS FOR AIRCRAFT SEATS, NASA Ames Research Center; NASA TM-78594.
105. Silverman, B., AIRCRAFT INTERIOR THERMOPLASTIC MATERIALS, Lockheed Missiles and Space Company; in Conference on the Development of Fire-Resistant Aircraft Passenger Seats, eds. Fewell, L. L., et al., NASA Technical Memorandum X-73144, National Aeronautics and Space Administration, Washington, DC, August 1976.
106. Parker, J. A., Ph.D., et al., FIRE DYNAMICS OF MODERN AIRCRAFT FROM A MATERIALS POINT OF VIEW, in Aircraft Fire Safety, AGARD Conference Proceedings No. 166, North Atlantic Treaty Organization, Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine, France, October 1975, pp. 10.1-10.11, AD A018180.
107. Anderson, R. A., et al., EVALUATION OF MATERIALS AND CONCEPTS FOR AIRCRAFT FIRE PROTECTION, Boeing Commercial Airplane Company; Report No. NASA CR-137838, National Aeronautics and Space Administration, Ames Research Center, Moffett Field, California, April 1976.
108. Parker, J. A., and Kourtides, D. A., FIREWORTHINESS OF TRANSPORT AIRCRAFT INTERIOR SYSTEMS, paper presented at AIAA 16th Thermophysics Conference, NASA Ames Research Center, Palo Alto, California, June 1981.
109. Sarkos, C. P., and Hill, R. G., EVALUATION OF AIRCRAFT INTERIOR PANELS UNDER FULL-SCALE CABIN FIRE TEST CONDITIONS, paper presented at AIAA 23rd Aerospace Sciences Meeting, FAA Technical Center, Reno, Nevada, January 1985.
110. Kourtides, D. A., FIRE RESISTANT FILMS FOR AIRCRAFT APPLICATIONS, NASA TM-84337, NASA National Aeronautics and Space Administration, Moffett Field, California, March 1983.

REFERENCES (CONTD)

111. Blake, D. R. and Hill, R. G., FIRE CONTAINMENT CHARACTERISTICS OF AIRCRAFT CLASS D CARGO COMPARTMENTS, Federal Aviation Administration; FAA/DOT/CT-82/156, U.S. Department of Transportation, Atlantic City Airport, New Jersey, June 1983, AD-A131047.
112. Atallah, S., and Buccigross, H., INVESTIGATION AND EVALUATION OF NON-FLAMMABLE, FIRE-RETARDANT MATERIALS, Arthur D. Little, Inc.; USAAMRDL Technical Report 72-52, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, November 1972, AD 906699L.
113. Federal Aviation Regulations, AIRWORTHINESS STANDARDS: TRANSPORT CATEGORY AIRPLANES, Part 25, Section 25.853.
114. FIRE SAFETY ASPECTS OF POLYMERIC MATERIALS, VOLUME 6 - AIRCRAFT: CIVIL AND MILITARY, National Materials Advisory Board, National Academy of Sciences, Washington, DC, 1977, p. 11
115. Downey, Jr., W. P., COMPOSITE FABRICS IN A THERMAL PROTECTION APPLICATION, paper presented at 17th National SAMPE Technical Conference, Fairchild Burns Company, Winston-Salem, North Carolina, October 1985.
116. Coltman, J. W., and Arndt, S. M., THE NAVAL AIRCRAFT CRASH ENVIRONMENT: AIRCREW SURVIVABILITY AND AIRCRAFT STRUCTURAL RESPONSE, TR-88490, Simula Inc., Phoenix, Arizona; NADC 88106-60, Naval Air Development Center, Warminster, Pennsylvania, September 1988.
117. Saczalski, K., et al., eds. AIRCRAFT CRASHWORTHINESS, Charlottesville, Virginia, University Press of Virginia, 1975, pp. 121-139.
118. Flaig, J. W., HELICOPTER FLOTATION AND PERSONNEL SAFETY IN UNPLANNED WATER LANDING FROM FY 1960 THROUGH FY 1974, Letter Report 75-61, Naval Air Systems Command, Washington, DC, June 1975.
119. Rice, E. V., and Greear, J. F. III, UNDERWATER ESCAPE FROM HELICOPTERS, Naval Safety Center, Norfolk, Virginia; paper presented at the 11th Annual Symposium of the Survival and Flight Equipment Association, Phoenix, Arizona, October 7-11, 1973.
120. Ryack, B. L., et al., THE EFFECTIVENESS OF ESCAPE HATCH ILLUMINATION AS AN AID TO EGRESS FROM A SUBMERGED HELICOPTER, Report No. 856, Naval Submarine Medical Research Laboratory, Groton, Connecticut, November 1977.
121. Davidson, A. F., THE PRINCIPLES OF UNDERWATER ESCAPE FROM AIRCRAFT, AGARD; AGARDograph NO. 230, AG-A048817.
122. Smith, P. F., Luria, S. M., and Ryack, B. L., LUMINANCE-THRESHOLDS OF THE WATER-IMMERSED EYE, Report No. 857, Naval Submarine Medical Research Laboratory, Groton, Connecticut, March 1978.

REFERENCES (CONTD)

123. Luria, S. M., Ryack, B. L., and Neri, D. F., DESIRABLE CHARACTERISTICS OF UNDERWATER LIGHTS FOR HELICOPTER ESCAPE HATCHES, Naval Submarine Medical Research Laboratory, Warminster, Pennsylvania, September 1982, AD-A120331.
124. Tyburski, J. J., HELICOPTER CRASH SURVIVABILITY AND EMERGENCY ESCAPE, Safe Journal, Vol. 14, No. 2, 1984, pages 22 through 32.
125. Saczalski, K., et al., eds., AIRCRAFT CRASHWORTHINESS, Charlottesville, Virginia, University Press of Virginia, 1975, pp. 645-667.
126. Veghte, J. D., COLD SEA SURVIVAL, Aerospace Medicine, Vol. 43, No. 5, May 1972.
127. Air Force Systems Command, DESIGN NOTE 3Q6; in AFSC: DH 1-6, System Safety, 4th Edition, Wright-Patterson Air Force Base, Ohio, July 1974.
128. McFadden and Swearingen, FORCES THAT MAY BE EXERTED BY MAN IN THE OPERATION OF AIRCRAFT DOOR HANDLES, Journal of the Human Factors Society of America, Vol. 1, No. 1, September 1958.
129. Nicholson, D. E., and Burkdoll, F. B., AN EMERGENCY LIFE-SAVING INSTANT EXIT SYSTEM FOR CARGO, CARGO-TRANSPORT AND PASSENGER AIRCRAFT, Explosive Technology; ASD Technical Report 71-41, Aeronautical Systems Division, Air Force Systems Command, Wright-Patterson Air Force Base, Ohio, June 1971, AD 736056.
130. Federal Aviation Regulations, AIRWORTHINESS STANDARDS: TRANSPORT CATEGORY ROTORCRAFT, Part 29, Section 29.811
131. Military Specification, MIL-L-6503, LIGHTING EQUIPMENT, AIRCRAFT, GENERAL SPECIFICATION FOR INSTALLATION OF, Department of Defense, Washington, DC, 2 April 1975.
132. Federal Aviation Regulations, AIRWORTHINESS STANDARDS: TRANSPORT CATEGORY AIRPLANES, Part 25, Section 25.812.
133. Chesterfield, B. P., Rasmussen, P. G., and Dillon, R. D., EMERGENCY CABIN LIGHTING INSTALLATIONS: AN ANALYSIS OF CEILING VERSUS LOWER CABIN-MOUNTED LIGHTING DURING EVACUATION TRIALS, FAA Civil Aeromedical Institute; FAA-AM-81, Office of Aviation Medicine, Washington, DC, February 1981, AD-A103191.
134. Garner, J. D., and Lowrey, D. L., EXIT SIGN COMPARISONS IN CLEAR AIR AND SMOKE, unpublished paper presented at an A-20 meeting, Society of Automotive Engineers, New York, December 1976.
135. Rasmussen, P. G., Chesterfield, B. P., and Lowrey, D. L., READABILITY OF SELF-ILLUMINATED SIGNS OBSCURED BY BLACK FUEL-FIRE SMOKE, FAA Civil Aeromedical Institute; FAA-AM-80-13, Office of Aviation Medicine,, Washington, DC, July 1980, AD-A092529.

REFERENCES (CONTD)

136. Technical Bulletin 746-93-2, PAINTING AND MARKING OF ARMY AIRCRAFT, Department of the Army, Washington, DC, January 1971.
137. EMERGENCY LOCATOR TRANSMITTERS: AN OVERVIEW, Report No. NTSB-AAS-78-1, National Transportation Safety Board, Washington, DC, 26 January 1978.
138. MINIMUM OPERATIONAL PERFORMANCE STANDARDS FOR EMERGENCY LOCATOR TRANSMITTERS, AUTOMATIC FIXED - ELT (AF), AUTOMATIC PORTABLE - ELT (AP), AUTOMATIC DEPLOYABLE - ELT (AD), SURVIVAL - ELT (S), OPERATING ON 121.5 AND 243.0 MEGAHERTZ, Document No. RTCA/DO-183, Radio Technical Commission for Aeronautics, May 1983.
139. Federal Aviation Technical Order, EMERGENCY LOCATOR TRANSMITTERS, (TSO) C91a.
140. Carden, H. D., EVALUATION OF EMERGENCY LOCATOR-TRANSMITTER PERFORMANCE IN REAL AND SIMULATED CRASH TESTS, NASA Technical Memorandum 81960, NASA, April 1981.
141. Diller, R. W., DESIGN, DEVELOPMENT, AND FABRICATION OF A CRASH SENSOR FOR MILITARY HELICOPTERS, Technar, Inc. and Aircraft and Crew Systems Technology Directorate; Report No. NADC-81310-60, Naval Air Systems Command, Washington, DC, November 1981, AD-A123422.
142. Hall, D. S., and Jackson, D., AIRCRAFT CRASH SENSING STATE OF THE ART SENSOR STUDY, Crash Research Institute; CRI Report 7846-15, National Aeronautics and Space Administration, Greenbelt, Maryland, April 1980.
143. Hall, D. S., SYSTEM DESIGN FOR IMPROVED CRASH SENSOR FOR EMERGENCY LOCATOR TRANSMITTERS, Crash Research Institute; CRI Report 7917, National Aeronautics and Space Administration, Greenbelt, Maryland, June 1982.
144. EMERGENCY LOCATOR TRANSMITTER (ELT) EQUIPMENT INSTALLATION AND PERFORMANCE, Document No. RTCA/DO-182, Radio Technical Commission for Aeronautics, November 1982.
145. EMERGENCY LOCATOR TRANSMITTER (ELT) BATTERIES GUIDANCE AND RECOMMENDATION, Document No. TRCA/DO-188, Radio Technical Commission for Aeronautics, November 1984.
146. Haynes, G. A., et al., PERFORMANCE OF ALKALINE BATTERY CELLS USED IN EMERGENCY LOCATOR TRANSMITTERS, NASA Technical Paper 2277, NASA, March 1984.
147. Pesman, G. J., APPRAISAL OF HAZARDS TO HUMAN SURVIVAL IN AIRPLANE CRASH FIRES, NACA Technical Note 2996, Lewis Flight Propulsion Laboratory, National Advisory Committee for Aeronautics, Cleveland, Ohio, September 1953.

REFERENCES (CONTD)

148. Moritz, A. R., M.D., et al., AN EXPLORATION OF THE CASUALTY PRODUCING ATTRIBUTES OF CONFLAGRATIONS: LOCAL AND SYSTEMIC EFFECTS OF GENERAL CUTANEOUS EXPOSURE TO EXCESSIVE HEAT OF VARYING DURATION AND INTENSITY, Archives of Pathology, Vol. 43, 1947, pp. 466-502.
149. Bieberdorf, F. W., and Yuill, C. H., AN INVESTIGATION OF THE HAZARDS OF COMBUSTION PRODUCTS IN BUILDING FIRES, Southwest Research Institute, San Antonio, Texas, 14 October 1963.
150. Buettner, K., Ph.D., EFFECTS OF EXTREME HEAT ON MAN, Journal of the American Medical Association, Vol. 144, October 1950, pp. 732-740.
151. Henriques, F. C., Jr., Ph.D., THE PREDICTABILITY AND THE SIGNIFICANCE OF THERMALLY INDUCED RATE PROCESSES LEADING TO IRREVERSIBLE EPIDERMAL INJURY, Archives of Pathology, Vol. 43, 1947, pp. 489-502.
152. Moritz, A. R., M.D., et al., THE EFFECTS OF INHALED HEAT ON THE AIR PASSAGES AND LUNGS, American Journal of Pathology, Vol. 21, March 1945, pp. 311-331.
153. Moritz, A. R., M.D., et al., THE RELATIVE IMPORTANCE OF TIME AND SURFACE TEMPERATURES IN CAUSATION OF CUTANEOUS BURNS, American Journal of Pathology, Vol. 23, 1947, pp. 695-720.

BIBLIOGRAPHY

Aerospace Recommended Practice, AIRCRAFT EVACUATION SIGNAL SYSTEM, ARP 1178, Society of Automotive Engineers, Inc., New York, July 1971.

Aerospace Recommended Practice, COMBINATION EVACUATION SLIDE/LIFE RAFT, ARP 1262, Society of Automotive Engineers, Inc., New York, July 1970.

Aerospace Recommended Practice, EMERGENCY EVACUATION ILLUMINATION, ARP 503B, Society of Automotive Engineers, Inc., New York, Revised August 1970.

Aerospace Recommended Practice, EMERGENCY PLACARDING - INTERNAL AND EXTERNAL, ARP 577A, Society of Automotive Engineers, Inc., New York, Revised October 1962.

Aerospace Recommended Practice, ESCAPE PROVISIONS, FLIGHT DECK, ARP 808A, Society of Automotive Engineers, Inc. New York, Revised December 1970.

Aerospace Recommended Practice, EXITS AND THEIR OPERATION - AIR TRANSPORT CABIN EMERGENCY, ARP 488B, Society of Automotive Engineers, Inc., New York, Revised October 1973.

Aerospace Recommended Practice, PASSENGER CABIN EMERGENCY EQUIPMENT STOWAGE, ARP 997, Society of Automotive Engineers, Inc. New York, August 1967.

Aerospace Recommended Practice, STOWAGE OF FLIGHT CREW'S SURVIVAL EMERGENCY AND MISCELLANEOUS EQUIPMENT, ARP 917, Society of Automotive Engineers, Inc., New York, March 1966.

Aerospace Recommended Practice, SURVIVAL KIT -- LIFE RAFTS AND SLIDE RAFTS, ARP 1282, Society of Automotive Engineers, Inc., New York, July 1973.

A REPORT OF OBSERVED EFFECTS ON ELECTRICAL SYSTEMS OF AIRBORNE CARBON-GRAPHITE FIBERS, NASA Technical Memorandum 78652, January 1978.

AIRCRAFT FIRE SAFETY, AGARD-LS-123, Advisory Group for Aerospace Research and Development, Neuilly sur Seine, France, May 1982, AD-A116 380.

Allan, J. R., and Ward, F. R. C., EMERGENCY EXITS FOR UNDERWATER ESCAPE FROM ROTORCRAFT, Aircrew Equipment Group Report No. 528, Royal Air Force Institute of Aviation Medicine, January 1986.

Anderson, M. C., and Burkdoil, F. B., AN EMERGENCY LIFE-SAVING, INSTANT EXIT SYSTEM FOR CARGO, CARGO-TRANSPORT AND PASSENGER AIRCRAFT, VOLUME II, Explosive Technology; ASD Technical Report 71-41, Aeronautical Systems Division, Air Force Systems Command, Wright-Patterson Air Force Base, Ohio, February 1974, AD 778824.

Anson, B., EVALUATION OF SELF-SEALING BREAKAWAY VALVES FOR CRASHWORTHY AIRCRAFT FUEL SYSTEMS, Dynamic Science Engineering Operations; USAAMRDL Technical Report 71-65, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, November 1971, AD 738204.

BIBLIOGRAPHY (CONTD)

Arnold, D. B., Burnside, J. V., and Hajari, J. V., DEVELOPMENT OF LIGHTWEIGHT FIRE-RETARDANT, LOW-SMOKE HIGH-STRENGTH, THERMALLY STABLE AIRCRAFT FLOOR PANELING, Boeing Commercial Airplane Company; Technical Report NASA-CR-147750, National Aeronautics and Space Administration, Houston, Texas, April 1976.

Asher, W. J., CONCEPTUAL DESIGN STUDY OF DEMULSIFICATION OF FUEL EMULSIONS BY A COALESCENCE PROCESS, Esso Research and Engineering Co.; USAAVLABS Technical Report 69-16, U.S. Army Aviation Material Laboratories, Fort Eustis, Virginia, April 1969, AD 688973.

Bement, L. J., and Schimmel, M.L., ADVANCED EMERGENCY OPENINGS FOR COMMERCIAL AIRCRAFT, NASA Technical Memorandum 87580, NASA Scientific and Technical Information Branch, 1985.

Benner, L., Jr., et al., STUDY OF GENERAL AVIATION FIRE ACCIDENTS (1974-1983), DOT-FAA Technical Center, Report No. DOT/FAA/CT-86/24, February 1987.

Berry, V. L., Cronkhite, J. D., and Haas, T. J., YAH-63 HELICOPTER CRASH-WORTHINESS SIMULATION AND ANALYSIS, USAVRADCOM-TR-82-D-34, U.S. Army Research and Technology Laboratories (AVRADCOM), Fort Eustis, Virginia, February 1983.

Blake, N. A., CONTROLLED IMPACT DEMONSTRATION REVIEW. SAE Technical Paper Series, Aerospace Technology Conference and Exposition, Long Beach, California, October 1985.

Bridgman, A.L., and Nelson, G.L., HEAT RELEASE RATE CALORIMETRY OF ENGINEERING PLASTICS, Journal of Fire and Flammability, Volume 13, April 1982, pp. 114.

Brooks, C. J., and Rowe, K. W., WATER SURVIVAL - 20 YEARS CANADIAN FORCES AIRCREW EXPERIENCE, Defence and Civil Institute of Environmental Medicine; DCIF Report No. 82-R-61, Department of National Defence - Canada, Ontario, Canada, November 1982.

Bruggink, G., EMERGENCY LANDING AND DITCHING TECHNIQUES IN HELICOPTERS, U. S. Army Board for Aviation Accident Research, Fort Rucker, Alabama, January 1968.

Byerley, D. L., EVALUATION OF VARIOUS SIZES AND CONFIGURATIONS OF FUEL TANKS, Firestone Tire & Rubber Co.; USAAMRDL Technical Report 73-74, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratories, Fort Eustis, Virginia, December 1973, AD 777801.

Cagliostro, D. E., A USER-OPERATED MODEL TO STUDY STRATEGY IN AIRCRAFT EVACUATION. J. Aircraft, Volume 21, No. 12, December 1984.

CARBON FIBER RISK ANALYSIS, Industry/Government Briefing held at Langley Research Center, Hampton, Virginia, October 31 - November 1, 1978.

BIBLIOGRAPHY (CONTD)

Carden, H. D., CORRELATION AND ASSESSMENT OF STRUCTURAL AIRPLANE CRASH DATA WITH FLIGHT PARAMETERS AT IMPACT, NASA Technical Paper 2083, Langley Research Center, Hampton, Virginia, November 1982.

Carhart, H. W., Pinkel, I. I., Warren, J. H., AIRCRAFT KEROSENE VERSUS WIDE-CUT FUEL-SAFETY CONSIDERATIONS, paper presented at Air Transportation Meeting at New York City, Society of Automotive Engineers, New York, May 1976.

Catiller, J. B., Major, USAF, ed., AIRCRAFT FIRE SAFETY, AGARD Conference Proceedings No. 166, North Atlantic Treaty Organization, Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine, France. October 1975, AD A038180.

Coltman, J. W., Domzalski, L., and Arndt, S. M., EVALUATION OF THE CRASH ENVIRONMENT FOR U.S. NAVY HELICOPTERS... THE HAZARDS AND NAVY RESPONSE, presented at Crashworthy Design of Rotorcraft, American Helicopter Society, Georgia Institute of Technology, Atlanta, Georgia, April 1986.

Cominsky, A., STUDY OF AIRCRAFT CRASHWORTHINESS FOR FIRE PROTECTION, Contract NAS2-10583, Ames Research Center, Moffett Field, California, January 1981.

Cook, R. L., et al., EVALUATION OF THE UH-1D/H HELICOPTER CRASHWORTHY FUEL SYSTEM IN A CRASH ENVIRONMENT, Dynamic Science Engineering Operations, Phoenix, Arizona, November 1971.

Federal Aviation Administration, AIR CARRIER CABIN SAFETY - A SURVEY, Department of Transportation, Federal Aviation Administration, Washington, D.C., December 1976, AD A037906.

Field Manual 20-151, AIRCRAFT EMERGENCY PROCEDURES OVER WATER, Department of the Army, Washington, DC, November 1968.

FIRE SAFETY ASPECTS OF POLYMERIC MATERIALS, VOLUME 6 - AIRCRAFT: CIVIL AND MILITARY, Publication NMAB 318-6, National Materials Advisory Board, National Academy of Sciences, Washington, D.C., 1977.

Geyer, G. B., EFFECT OF GROUND CRASH FIRE ON AIRCRAFT FUSELAGE INTEGRITY, Report No. NA-69-37, Department of Transportation, Federal Aviation Administration, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, December 1969, AD 698806.

Gilewicz, A. E., ASSESSMENT OF THE BENEFITS OF AIRCRAFT CRASHWORTHINESS, USAFAVS System Safety Newsletter, U. S. Army Agency for Aviation Safety, Vol. 5, No. 3, 1976.

Grand, A. F., and Valys, A. J., ASSESSMENT OF BURNING CHARACTERISTICS OF AIRCRAFT INTERIOR MATERIALS, Southwest Research Institute; 156390, NASA, Ames Research Center, Moffett Field, California, April 1982.

Hall, D. S., A DESCRIPTION OF THE GENERAL AVIATION FIXED WING ACCIDENT, SAFE Journal, Volume 11, No. 1.

BIBLIOGRAPHY (CONTD)

Hall, D. S., ENGINEERING AND SUPPORT STUDY FOR THE FIELD TEST AND EVALUATION OF THE 406 MHz ELT TEST UNIT, NASA/Goddard Space Flight Center, Greenbelt, Maryland, March 1985.

Hall, D. S., FIELD STUDY OF EMERGENCY LOCATOR TRANSMITTERS INSTALLED IN GENERAL AVIATION AIRCRAFT, Goddard Space Flight Center, Greenbelt, Maryland, November 1980.

Hall, J. F., PREDICTION OF TOLERANCE IN COLD WATER AND LIFE RAFT EXPOSURES, Aerospace Medicine, Vol. 43, No. 3, March 1972.

Hall, J. R., Jr., and Stiefel, S. W., DECISION ANALYSIS MODEL FOR PASSENGER AIRCRAFT FIRE SAFETY WITH APPLICATION TO FIRE-BLOCKING OF SEATS, Center for Fire Research; DOT/FAA/CT-84/8, U.S. Department of Transportation, Atlantic City Airport, New Jersey, March 1984, AD-A142 477.

Harris, J. C., and Steinmetz, E. A., OPTIMIZATION OF JP-4 FUEL EMULSIONS AND DEVELOPMENT OF DESIGN CONCEPTS FOR THEIR DEMULSIFICATION, USAAVLABS Technical Report 68-79, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, November 1968, AD 583597.

Harvey, E. A., and Jensen, D. L., PRECISION SURVIVOR LOCATOR FOR SEARCH AND RESCUE APPLICATIONS, paper presented at 29th Annual National Forum of the American Helicopter Society in Washington, D.C., American Helicopter Society, New York, May 1973.

Harvey, T., and Monarch, J., ENVIRONMENTAL TESTING OF A GAS TURBINE ENGINE UTILIZING EF4-101 EMULSIFIED JP-4 FUEL, USAAVLABS Technical Report 68-55, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, August 1968, AD 674205.

Hibbard, R. P., and Hacker, P. T., AN EVALUATION OF THE RELATIVE FIRE HAZARDS OF JET A AND JET B FOR COMMERCIAL FLIGHT, NASA Technical Memorandum X-71437, Lewis Research Center, National Aeronautics and Space Administration, Washington, D.C., October 1973.

Hilado, C. J., SMOKE FROM CELLULAR POLYMERS, Fire Technology, May 1969, p. 130.

INSTALLATION OF PLASTIC FOAM AND METALLIC MESH IN FUEL TANKS OF HELICOPTERS AND SMALL AIRPLANES, Advisory Circular, 20.XX, Federal Aviation Administration, April 1984.

Institute for Research, Inc., DEVELOPMENT OF A PROTECTIVE, DECORATIVE, FIRE-RESISTANT, LOW-SMOKE EMITTING, THERMALLY STABLE COATING MATERIAL, Report No. N 76-18234, Houston, Texas, January 1976.

Johnson, N. B., CRASHWORTHY FUEL SYSTEM DESIGN CRITERIA AND ANALYSIS, Dynamic Science; USAAVLABS Technical Report 71-8, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratories, Fort Eustis, Virginia, March 1971, AD 723988.

BIBLIOGRAPHY (CONTD)

Johnson, R. A., STUDY ON TRANSPORT AIRPLANE UNPLANNED WATER CONTACT, DOT/FAA/CT-84/3, Federal Aviation Administration Technical Center, Atlantic City Airport, New Jersey, February 1984.

Kirsch, P. A., and Jahnle, H. A., ENERGY ABSORPTION OF GLASS POLYESTER STRUCTURES, SAE Technical Paper 810233, Society of Automotive Engineers, Inc., Warrendale, Pennsylvania, February 1981.

Kosvic, T. C., Holgeson, N. L., and Breen, B. P., FLIGHT VIBRATION AND ENVIRONMENTAL EFFECTS ON FORMATION OF COMBUSTIBLE MIXTURES WITHIN AIRCRAFT FUEL TANKS, Dynamic Science; USAAVLABS Technical Report 70-43, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, September 1970, AD 875901.

Kourtides, D. A., and Parker, J. A., Inventors, LOW DENSITY BISMALIMIDE-CARBON MICROBALLOON COMPOSITES, NASA Case No. ARC-11040-1, NASA-Ames Research Center, National Aeronautics and Space Administration, Washington, D.C., filed March 16, 1977.

Kourtides, D. A., and Parker, J. A., THE RELATIVE FIRE RESISTANCE OF SELECT THERMOPLASTIC MATERIALS, Plastics Design & Processing, April 1978.

Kuhn, R. L., Potts, W. J., and Waterman, T. E., A STUDY OF THE INHALATION TOXICITY OF SMOKE PRODUCED UPON PYROLYSIS AND COMBUSTION OF POLYETHYLENE FOAMS, Fire Retardants: Proceedings of 1978 Conference on Flammability and Fire Retardants, Westport, Connecticut, Technomic Publishing Co., 1978.

Madgwick, T., AIRCRAFT POSTCRASH FIRE REDUCTION/SURVIVABILITY ENHANCEMENT FROM A MANUFACTURER'S VIEWPOINT, AGARD, AGARD-LS-123, North Atlantic Treaty Organization, 1982.

MalMBERG, Q. C., and Wiggins, E. W., ADVANCED FLAME ARRESTOR MATERIALS AND TECHNIQUES FOR FUEL TANK PROTECTION, McDonnell Douglas Corp.; Technical Report 72-12, Air Force Aero Propulsion Laboratory, Wright-Patterson Air Force Base, Ohio, March 1972, AD 743016.

MalMBERG, Q. C., INTEGRATED AIRCRAFT FUEL TANK FIRE AND EXPLOSION PROTECTION SYSTEMS-PHASE I AND II, McDonnell Douglas Corp., St. Louis, Missouri, AD A020589.

Mason, R. V., SMOKE AND TOXICITY HAZARDS IN AIRCRAFT CABIN FURNISHINGS, Annual of Occupational Hygiene, Vol. 17, 1974, pp. 159-165.

McDonald, W. C., NEW ENERGY-ABSORBING MATERIALS FOR CRASH-RESISTANT FUEL TANKS, Goodyear Aerospace Corporation; presented at National Business Aircraft Meeting, Wichita, Kansas, Society of Automotive Engineers, New York, April 1968.

McFadden, E. B., FLOTATION AND SURVIVAL EQUIPMENT STUDIES, FAA Civil Aeromedical Institute; FAA-AM-78-1, Office of Aviation Medicine, Washington, D.C., January 1978.

BIBLIOGRAPHY (CONTD)

Miller, R. E., and Wilford, S. P., THE DEVELOPMENT OF AN AIRCRAFT SAFETY FUEL, Royal Aircraft Establishment, England; Report No. A76-14419, American Institute of Aeronautics and Astronautics, New York, April 1975.

Nagata, J. I., Voss, J. S., and Williams, R. A., PRELIMINARY AIRWORTHINESS EVALUATION AH-1S (MC) HELICOPTER WITH EXTERNAL FUEL TANKS INSTALLED, USAAEFA 84-09, U.S. Army Aviation Engineering Flight Activity, Edwards Air Force Base, California, July 1984.

Nissley, P. M., Held, T. L., STRUCTURAL DESIGN FOR FUEL CONTAINMENT UNDER SURVIVABLE CRASH CONDITIONS, General Dynamics/Convair; FAA Technical Report ADS-19, Department of Transportation, Federal Aviation Administration, Washington, DC, August 1964.

PIPER NAVAJO FUEL TANKS FAA CRASH RESISTANT MODIFICATIONS TANKS AND TESTING, Final Report FC-1641-77, Contract DOT-FA75NA-2122, Project Number 5-75-1017, Uniroyal, Inc., Engineered Systems Department, Mishawaka, Indiana, March 1977.

PIPER NAVAJO FUEL TANKS FAA CRASH RESISTANT MODIFICATIONS TANKS AND TESTING, Final Report FC-1641-77, Contract DOT-FA75NA-2122, Project Number 5-75-1017, Uniroyal, Inc., Engineered Systems Department, Mishawaka, Indiana, March 1977.

Pedriani, C. M., A STUDY OF THE FUEL/AIR VAPOR CHARACTERISTICS IN THE ULLAGE OF AIRCRAFT FUEL TANKS, USSAVLABS Technical Note 3, U. S. Army Aviation Materiel Laboratories, Fort Eustis, Virginia, June 1970.

Pedriani, C. M., DESIGN CRITERIA FOR PREVENTION OF FIRES FROM API IMPACTS IN VOIDS ADJACENT TO HELICOPTER FUEL TANKS, USAAMRDL Technical Note 20, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, August 1975, AD B006677L.

Pedriani, C. M., EXPERIMENTAL DETERMINATION OF THE IGNITION LIMITS OF JP-4 FUEL WHEN EXPOSED TO CALIBER .30 INCENDIARY PROJECTILES, USAAMRDL Technical Report 71-48, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, July 1971, AD 730343.

Pedriani, C. M., INCENDIARY GUNFIRE EVALUATION OF A CONDENSATE-FORMED FUEL FOG INERTING SYSTEM, USAAMRDL Technical Note 15, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, May 1974, AD 780837.

Perrolla, W. N., Jr., TESTS OF CRASH RESISTANT FUEL SYSTEM FOR GENERAL AVIATION AIRCRAFT, Department of Transportation, Federal Aviation Administration, Washington, D.C., March 1978.

Quintiere, J. G., AN ASSESSMENT OF CORRELATIONS BETWEEN LABORATORY AND FULL-SCALE EXPERIMENTS FOR THE FAA AIRCRAFT FIRE SAFETY PROGRAM, PART 2: RATE OF ENERGY RELEASE IN FIRE, National Bureau of Standards; DOT/FAA/CT82/108, Federal Aviation Administration, Atlantic City, New Jersey, July 1982, PB83-113530.

BIBLIOGRAPHY (CONTD)

Quintiere, J. G., Babrauskas, V., Cooper, L., Harkleroad, M., and Steckler, K., THE ROLE OF AIRCRAFT PANEL MATERIALS IN CABIN FIRES AND THEIR PROPERTIES, National Bureau of Standards; DOT/FAA/CT-84/30, U.S. Department of Transportation, Atlantic City Airport, New Jersey, June 1985, AD-A168 251.

Rasmussen, P. G., Garner, J. D., Blethrow, J. G., and Lowrey, D. L., READABILITY OF SELF-ILLUMINATED SIGNS IN A SMOKE-OBSCURED ENVIRONMENT, FAA Civil Aeromedical Institute; FAA-ARD-79-108, Office of Aviation Medicine, Washington, D.C., November 1979, AD-A081 260.

Reed, T. O., EFFECTS OF POLYURETHANE FOAM ON FUEL SYSTEM CONTAMINATION, Technical Memorandum ENJI-70-10, Fluid Systems Branch, Directorate of Propulsion and Power Subsystems Engineering, Wright-Patterson Air Force Base, Ohio, November 1970.

Ritter, L. C., APPLICATION OF FIBER-REINFORCED THERMOPLASTIC MATERIALS TO ARMY AIRCRAFT STRUCTURES, Boeing Vertol Company; USAAVRADCOM-TR-83-D-30, Applied Technology Laboratory, U.S. Army Research and Technology Laboratories, Fort Eustis, Virginia, August 1982

Robertson, S. H., and Turnbow, J. W., A METHOD FOR SELECTING A CRASHWORTHY FUEL SYSTEM DESIGN, AGARD, Agard-CP-255, North Atlantic Treaty Organization, 1978.

Roebuck, J. A., Jr., NEW CONCEPTS FOR EMERGENCY EVACUATION OF TRANSPORT AIRCRAFT FOLLOWING SURVIVABLE ACCIDENTS, North American Rockwell Corporation; Report No. ADS-68-2, Department of Transportation, Federal Aviation Administration, Washington, DC, January 1968, AD 665329.

Ross, J. H., RECENT DEVELOPMENTS IN COMMERCIAL FIRE-RESISTANT FIBROUS MATERIALS, Safe Engineering, 4th Quarter-Midwinter, 1972-73, pp 16-21.

Ryack, Bernard L., Luria, S. M., and Smith, P. F., SURVIVING HELICOPTER CRASHES AT SEA: A REVIEW OF STUDIES OF UNDERWATER EGRESS FROM HELICOPTERS, NAVAL SUBMARINE MEDICAL RESEARCH LABORATORY REPORT NUMBER 1054, Submarine Base, Groton, Connecticut, June 1986.

SAFETY STUDY--AIR CARRIER OVERWATER EMERGENCY EQUIPMENT AND PROCEDURES, NTSB/SS-85/02, National Transportation Safety Board, Washington, D.C., June 1985.

Saczalski, K., et al., eds., AIRCRAFT CRASHWORTHINESS, Charlottesville, Virginia, University Press of Virginia, 1975.

Salmon, R. F., STUDY OF TURBINE ENGINE OPERATION WITH GELLED FUELS, Report No. FAA-DS-70-6, Department of Transportation, Federal Aviation Administration, Washington, DC, May 1970, AD 711765.

San Miguel, A., and Williams, M. D., ANTIMISTING FUEL SPILLAGE/AIR SHEAR TESTS AT NAVAL WEAPONS CENTER, Report No. FAA-RD-78-50, Department of Transportation, Federal Aviation Administration, Washington, D.C., March 1978, AD A056113.

BIBLIOGRAPHY (CONTD)

Sarkos, C. P., and Hill, R. G., EFFECTIVENESS OF SEAT CUSHION BLOCKING LAYER MATERIALS AGAINST CABIN FIRES, paper presented at the Aerospace Congress & Exposition, Society of Automotive Engineers, Inc., Anaheim, California, October 25-28, 1982.

Scheuerman, H. P., CRASH RESISTANT FUEL SYSTEMS DEMONSTRATIONS AND EVALUATION, Report No. FAA-RD-71-27, National Aviation Facilities Experimental Center, Atlantic City, New Jersey, August 1971.

Scull, W. D., RELATION BETWEEN INFLAMMABLES AND IGNITION SOURCES IN AIRCRAFT ENVIRONMENTS, Lewis Flight Propulsion Laboratory; NACA Report 1019, National Advisory Committee for Aeronautics, Cleveland, Ohio, 1951.

Smith, H. D., CRASH-RESISTANT FUEL TANKS FOR HELICOPTERS AND GENERAL AVIATION AIRCRAFT, presented at National Business Aircraft Meeting, Wichita, Kansas, Society of Automotive Engineers, New York, April 1974.

Smith, K. F., FULL SCALE CRASH TEST (T-41) OF THE YAH-63 ATTACK HELICOPTER, USAAVSCOM TR-86-D-2, U.S. Army Aviation Research and Technology Activity (AVSCOM), Fort Eustis, Virginia, April 1986.

Smith, K. F., and Furgurson, R. G., IMPLICATIONS OF A SUCTION FUEL SYSTEM ON THE CONTAMINATION TOLERANCE OF ARMY HELICOPTERS, USARTL-TN-33, Applied Technology Laboratory, U.S. Army Research and Technology Laboratories (AVRADCOM) Fort Eustis, Virginia, April 1979.

Snow, Clyde C., et al., SURVIVAL IN EMERGENCY ESCAPE FROM PASSENGER AIRCRAFT, Civil Aeromedical Institute; Report No. AM 70-16, Department of Transportation, Federal Aviation Administration, Washington, D.C., October 1970, AD 735388.

Snyder, R. G., ADVANCED TECHNIQUES IN CRASH IMPACT PROTECTION AND EMERGENCY EGRESS FROM AIR TRANSPORT AIRCRAFT, University of Michigan; AGARDOGRAPH No. 221, North Atlantic Treaty Organization, Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine, France, June 1976, AD A029375.

Snyder, R. G., CRASHWORTHINESS INVESTIGATION OF GENERAL AVIATION ACCIDENTS, University of Michigan; presented at National Business Aircraft Meeting, Wichita, Kansas, Society of Automotive Engineers, New York, April 1975.

Snyder, R. G., et al., EMERGENCY DITCHING OF GENERAL AVIATION AIRCRAFT, Proceedings of the 12th Annual Survival and Flight Equipment Symposium, September 1974.

Snyder, R. G., U. S. EXPERIENCE IN WATER DITCHING OF CIVIL AIRCRAFT, presented at International Congress of Aviation and Space Medicine, Beirut, Lebanon, October 1974.

Sollis, S., Caiafa, C., and Wittlin, G., FAA STRUCTURAL CRASH DYNAMICS PROGRAM UPDATE - TRANSPORT CATEGORY AIRCRAFT, SAE Technical Paper 851887, SAE, Warrendale, Pennsylvania, October 1985.

BIBLIOGRAPHY (CONTD)

Sommers, J., Jr., Clark, J. H., THE DEVELOPMENT OF AIRCRAFT CRASH-RESISTANT FUEL CELLS, SAFETY VALVES, AND BREAKWAY ACCESSORIES, Federal Aviation Agency; presented at National Aeronautics Meeting, Society of Automotive Engineers, Inc., New York, April 1962.

SPECIAL STUDY: PASSENGER SURVIVAL IN TURBOJET DITCHINGS (A CRITICAL CASE REVIEW), NTSB-AAS-72-2, National Transportation Safety Board, Washington, D.C., April, 1972.

Spencer, L. E., Captain, USA, BREAKWAY FUEL CELL CONCEPT, Aviation Crash Injury Research of Flight Safety Foundation; TRECOM Technical Report 62-37, U.S. Army Transportation Research Command, Fort Eustis, Virginia, May 1962.

Spezia, E., U.S. ARMY HELICOPTER ACCIDENTS INVOLVING FIRE, Report 1-64, U.S. Army Board of Aviation Accident Research, Fort Rucker, Alabama, 1963.

Stern, B. A. and Visser, T., HYBRIDIZED POLYMER MATRIX COMPOSITES, Composites Horizons, Inc.; N82-12139, NASA-Lewis Research Center, Cleveland, Ohio, September 1981.

Supkis, D. E., REFURBISHMENT OF NASA AIRCRAFT WITH FIRE-RETARDANT MATERIALS, Lyndon B. Johnson Space Center; Technical Memorandum X-58165, National Aeronautics and Space Administration, Washington, DC, October 1975.

Tanner, A. E., CRASHWORTHINESS DESIGN PARAMETER SENSITIVITY ANALYSIS, USAAVRADCOR-TR-80-D-31, U.S. Army Research and Technology Laboratories (AVRADCOR), Fort Eustis, Virginia, February 1981.

Teal, M., IMPROVED INTERIOR EMERGENCY LIGHTING STUDY, McDonnell Douglas Corporation; DOT/FAA/CT-83/31, U.S. Department of Transportation, Atlantic City Airport, New Jersey, September 1983, AD-A134 525.

Tesoro, G. C., Ph.D., FABRICS FOR FIRE RESISTANT PASSENGER SEATS IN AIRCRAFT, Massachusetts Institute of Technology; in Conference on Fire Resistant Materials (Firemen), ed., Kourtidis, D. A., NASA Technical Memorandum 78523, National Aeronautics and Space Administration, Ames Research Center, Moffett Field, California, October 1978.

Thompson, R. G. and Goetz, R. C., NASA/FAA GENERAL AVIATION CRASH DYNAMICS PROGRAM - A STATUS REPORT, AIAA Paper No. 79-0780, NASA Langley Research Center, Hampton, Virginia, April 1979.

Thompson, R. G., Carden, H. D., and Hayduk, R. J., SURVEY OF NASA RESEARCH AND CRASH DYNAMICS, NASA Technical Paper 2298, Langley Research Center, Hampton, Virginia, April 1984.

Tyburski, J. J., HELICOPTER CRASH SURVIVABILITY AND EMERGENCY ESCAPE, SAFE JOURNAL, Summer Quarter - 1984, Volume 14, No. 2.

U. S. AIR CARRIER ACCIDENTS INVOLVING FIRE, 1965 THROUGH 1974, AND FACTORS AFFECTING THE STATISTICS, Report No. NTSB-AAS-771-1, National Transportation Safety Board, Washington, D.C., February 1977.

BIBLIOGRAPHY (CONTD)

Villemain, H. F., DESIGN AND EVALUATION OF CRASHWORTHY, BALLISTICALLY TOLERANT FUEL TANK MATERIAL, The Goodyear Tire & Rubber Company; USAAMRDL Technical Report 74-103, Eustis Directorate, U. S. Army Air Mobility Research and Development Laboratory, Fort Eustis, Virginia, January 1975, AD B002702.

Watters, D. M., UNITED STATES NAVY - CANADIAN FORCES SOLID STATE FLIGHT DATA RECORDER/CRASH POSITION LOCATOR EXPERIMENT ON THE B-720 CONTROLLED IMPACT DEMONSTRATION, TM-85-76 SY, Technical Memorandum, Naval Air Test Center, Patuxent River, Maryland, November 1985.

Wittlin, G., Gamon, M., and Shycoff, D., TRANSPORT AIRCRAFT CRASH DYNAMICS, DOT/FAA/CT-82/69, NASA Contractor Report 165851, Lockheed-California Company, Burbank, California, March 1982.

Wyeth, H. W. G., FUEL SYSTEM PROTECTION METHODS, AGARD-LS-123, North Atlantic Treaty Organization, 1982.

Zapp, J. A., Jr., THE TOXICOLOGY OF FIRE, Medical Division Special Report No. 4, Army Chemical Center, Maryland, April 1951.

Zinn, S. U., Jr., CRASH FIRE HAZARD EVALUATION OF JET FUELS, Federal Aviation Administration; Paper No. 720324, presented at National Business Aircraft Meeting at Wichita, Kansas, Society of Automotive Engineers, Inc., New York, March 1972.