

2

AD-A234 660

MEMORANDUM REPORT BRL-MR-3907

**BRL**

AERODYNAMICS OF A 0.60 CALIBER  
ELECTROMAGNETIC PROJECTILE

JAMES M. GARNER

APRIL 1991

DTIC  
ELECTE  
MAY 02 1991  
S B D

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

**BEST  
AVAILABLE COPY**

U.S. ARMY LABORATORY COMMAND

BALLISTIC RESEARCH LABORATORY  
ABERDEEN PROVING GROUND, MARYLAND

COPY

91 5 01 015

## NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Fort Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

# UNCLASSIFIED

<b>REPORT DOCUMENTATION PAGE</b>			Form Approved OMB No 0704-0188
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.			
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE <b>April 1991</b>	3. REPORT TYPE AND DATES COVERED <b>Final, Jun-Oct 90</b>	
4. TITLE AND SUBTITLE <b>Aerodynamics of a 0.60 Caliber Electromagnetic Projectile</b>		5. FUNDING NUMBERS  <b>1L162618AH80</b>	
6. AUTHOR(S)  <b>James M. Garner</b>			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)  <b>Ballistic Research Laboratory ATTN: SLCBR-DD-T Aberdeen Proving Ground, MD 21005-5066</b>		10. SPONSORING / MONITORING AGENCY REPORT NUMBER  <b>BRL-MR-3907</b>	
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION / AVAILABILITY STATEMENT  <b>Approved for public release; distribution is unlimited.</b>		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  <b>Spark photography range tests of a 0.60 caliber electromagnetic projectile were conducted to determine the aerodynamic characteristics at supersonic velocities. The design demonstrated adequate stability and typical drag characteristics. The effect of an asymmetric base geometry on the location of the aerodynamic center of pressure is also shown.</b>			
14. SUBJECT TERMS  <b>Rail Guns Armatures</b>		15. NUMBER OF PAGES <b>20</b>	16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT <b>UNCLASSIFIED</b>	18. SECURITY CLASSIFICATION OF THIS PAGE <b>UNCLASSIFIED</b>	19. SECURITY CLASSIFICATION OF ABSTRACT <b>UNCLASSIFIED</b>	20. LIMITATION OF ABSTRACT <b>SAR</b>

INTENTIONALLY LEFT BLANK.

## Acknowledgements

This work is supported by the Close Combat Armament Center, Armament Research Development and Engineering Center, Dover, NJ through the Joint Services Small Arms Program. Thanks are extended to Mr. Michael Nusca, of BRL, for assistance in computing the aerodynamic center of pressure locations for different projectile orientations, and to David Hepner, also of BRL, for graphics help. Consultation with James Bradley, of BRL, concerning aeroballistic coefficient determination is also appreciated.

Accession For

NO. GRAPE	<input checked="" type="checkbox"/>
RESEARCH	<input type="checkbox"/>
TRAINING	<input type="checkbox"/>
OPERATIONS	<input type="checkbox"/>
GENERAL	<input type="checkbox"/>
ADDITIONAL INFORMATION	
A-1	

INTENTIONALLY LEFT BLANK.

# Table of Contents

	<u>Page</u>
ACKNOWLEDGEMENTS . . . . .	iii
LIST OF FIGURES . . . . .	vii
LIST OF TABLES . . . . .	ix
INTRODUCTION . . . . .	1
BACKGROUND . . . . .	1
TEST RESULTS . . . . .	1
Drag Coefficient . . . . .	2
Lift Coefficient . . . . .	2
Static Moment Coefficient . . . . .	2
Center of Pressure of Normal Force . . . . .	3
Pitch Damping Coefficient . . . . .	3
Modal Damping Rates . . . . .	3
Electromagnetic Considerations . . . . .	4
CONCLUSIONS . . . . .	4
LIST OF SYMBOLS . . . . .	13
DISTRIBUTION LIST . . . . .	15

INTENTIONALLY LEFT BLANK.



## List of Figures

<u>Figure</u>		<u>Page</u>
1	Projectile Configuration. . . . .	5
2	Zero Yaw Drag Coefficient versus Mach Number. . . . .	6
3	Zero Yaw Lift Coefficient versus Mach Number. . . . .	7
4	Zero Yaw Static Moment Coefficient versus Mach Number. . . . .	8
5	Center of Pressure versus Mach Number. . . . .	9
6	Zero Yaw Pitch Damping Moment Coefficient versus Mach Number. . . . .	10
7	Damping Rate Exponents versus Mach Number. . . . .	11

INTENTIONALLY LEFT BLANK.

## List of Tables

<u>Table</u>		<u>Page</u>
1	Projectile Physical Characteristics . . . . .	12
2	Aerodynamic Coefficients . . . . .	12

INTENTIONALLY LEFT BLANK.

## INTRODUCTION

In December 1989 a meeting between Armament Research Development and Engineering Center and Ballistic Research Laboratory (BRL) personnel reviewed the progress of the 0.60 caliber electromagnetic (EM) projectile. The conclusion of the meeting was that a spark range test should precede EM firings to be conducted at the University of Texas (UT) in June of 1990. Since the modest small caliber range facilities bordered the machine shop area at UT, it was considered important to determine the behavior of the projectile beforehand. This report details the aeroballistic behavior of the EM projectile as determined from the spark range test at the BRL Aerodynamics Range.<sup>1</sup>

## BACKGROUND

A sketch of the 0.60 caliber projectile tested is shown in Figure 1. The tungsten nose of the projectile is a Sears-Haack shape. This nose section threads into the aluminum afterbody. The afterbody, flare, and armature are one piece and form the remainder of the projectile. The exterior grooves, shown near the nose afterbody joint, allow the afterbody to support a torlon bore-rider (not shown). Small fins, dubbed "finlets", are shown on the armature portion of the projectile. The finlets are roughly an eighth of a centimeter high and two and one half centimeters long. Their purpose is to add pitch-plane stability. A slot extending from the rear of the projectile to the rear of the flare is also shown. The slot's purpose is electromagnetic in nature. Finally, the rear view shows a noncircular base that attempts to maximize the conductivity to armature weight ratio.

## TEST RESULTS

Table 1 contains salient projectile physical characteristics. The two transverse moments ( $I_{yy}$  and  $I_{zz}$  in the pitch and yaw planes respectively) and axial moment of inertia differ widely due to the projectile's mass distribution. The ratios of the transverse moments to the axial are roughly five times larger than a typical round. The following table, Table 2, is a tabulation of the aeroballistic coefficient values obtained from the test.

Interior ballistic modelling indicated that the projectile survived acceleration loads greater than 100,000 g's. This information indicated UT's standard safety measures would be appropriate when testing.

A tricyclic reduction was employed in determining the projectile characteristics.<sup>2</sup> The tricyclic reduction is normally used when a projectile asymmetry exists. For the reduction a third, constant magnitude, modal arm,  $K_3$ , is assumed in addition to the two modal arms of the epicyclic motion. The size of this arm depends on the reduction data, but it

<sup>1</sup> Braun, W.F. "The Free Flight Aerodynamics Range," U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD. BRL Report No. 1048, August 1958. (AD 202249)

<sup>2</sup> Murphy, C.H., "Free Flight Motion of Symmetric Missiles" U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD. BRL Report No. 1216 July 1963. (AD 442757)

is typically smaller than the other two epicyclic modal arms.

Some criteria and general engineering rules-of-thumb are applied when examining the data in the reduction process. Firstly, the data from the rounds with the fewest number of range stations are examined closely. Another standard is that the  $K_j$  arm must be greater than 3 times the fitting error.<sup>3</sup> The  $C_{M_{\alpha_0}} + C_{M_{\alpha_0}}$  value in Table 7 for Round 19457 did not pass this criterion, and is therefore absent. Absolute errors as a percentage of the coefficient values are listed in the reduction printout.

## Drag Coefficient

The drag coefficient for the 0.60 caliber projectile is assumed to be of the form:

$$C_D = C_{D_0} + C_{D_{\delta^2}} \delta^2 + \dots \quad (1)$$

where  $C_D$  is the range value of the drag coefficient,  $C_{D_0}$  the zero yaw drag coefficient,  $C_{D_{\delta^2}}$  the quartic yaw drag coefficient, and  $\delta^2$ , the yaw squared.<sup>4</sup> The zero yaw drag coefficient data, fit by a least squares curve, displayed in Figure 2, show a typical supersonic decline with increasing Mach (M) number (the quartic yaw drag contribution is small compared to  $C_{D_0}$ ). The curve fit is done for rounds with similar values of  $C_{D_{\delta^2}}$  and excludes rounds 19452 and 19453

The 0.60 caliber EM projectile drag coefficient is roughly 10% smaller in comparison to INTERACT predictions for a projectile with a full flare and circular base at  $M = 4$  to 5.<sup>5</sup> The effect of the finlets on the drag coefficient is probably on the order of 5-10%.<sup>6</sup>

## Lift Coefficient

Similarly the lift coefficient for zero yaw,  $C_{L_{\alpha_0}}$ , as a function of Mach number is shown in Figure 3. The graph illustrates a small variation from approximately  $M=2$  to 5.

## Static Moment Coefficient

The variation in static moment coefficient for zero yaw,  $C_{M_{\alpha_0}}$ , with respect to Mach number is shown in Figure 4. This graph indicates that the projectile has adequate stability in the Mach range depicted.

<sup>3</sup> Ibid

<sup>4</sup> Murphy, C.H., "Data Reduction for the Free Flight Spark Ranges," U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, BRL Report No. 900 February 1954. (AD 035833)

<sup>5</sup> Nusca, M. J. "Supersonic/Hypersonic Aerodynamics and Heat Transfer for Projectile Design using Viscous-Inviscid Interaction" BRL-TR-3119, June 1990. (ADA 224354)

<sup>6</sup> Celmins, I. "Drag and Stability Tradeoffs for Flare-Stabilized Projectiles," U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, Paper presented at the 28th Aerospace Sciences meeting, Reno, NV, AIAA Report 90-0065, January 1990.

## Center of Pressure of Normal Force

The INTERACT code was also used to assess the effect of the noncircular base. INTERACT predictions and range data for the location of the aerodynamic center of pressure of normal force (CPN) are shown in Figure 5. The CPN is given in calibers measured from the nose. Projectile orientation 1 is where the flat edges are in the yaw plane, while orientation 2 places the projectile's flat edges in the pitch-plane. Range photographs and reductions indicate that a small amount of spin (from 5 to 15 Hz) was produced by the beveled leading edge of the finlet. Since the projectile has some spin, it is assumed that the average of the two predictions models the CPN in flight. Small spin rates (less than 50 Hz) are desirable to reduce the effect of any production asymmetries. The agreement between this average value of CPN and the range data is quite good. The largest difference between the average and the range data curve is less than 10%. The code does not account for the finlets or the slot at the projectile base. Incorporation of these details into the computational model would require significantly more analysis time. For this model, above  $M=4$ , the code predicts shock wave detachment at the flare. INTERACT's predictive ability decreases greatly for this condition.

## Pitch Damping Moment Coefficient

The pitch damping moment coefficients for zero yaw versus Mach number are shown in Figure 6. The data indicate a strong dependence on Mach number. A weak dependence on yaw exists.

## Modal Damping Rates

The complex yaw equation is:

$$\xi = \xi_g + K_1 e^{i\phi_1} + K_2 e^{i\phi_2} \quad (2)$$

where  $\xi_g$  is the yaw of repose and

$$K_j = K_{j0} + e^{\lambda_j s}, \text{ for } j = 1, 2 \quad (3)$$

Negative  $\lambda$ 's indicate a decay of the modal arm magnitudes. Figure 7 indicates the trend of  $\lambda$  in the Mach number range examined. Both modes seem to have similar damping rate trends. Two of the rounds used an epicyclic reduction only, Round 19453 and 19457, and achieved results similar in their magnitude and trend to the tricyclic reduction. These rounds' small yawing motion were not fit well using a tricyclic reduction.

## Electromagnetic Considerations

Many of the projectile attributes are driven by EM factors. These factors must be addressed if a successful design is to be achieved. They are:

1. The armature must make good electrical contact with the rails and conduct the required current.
2. The projectile should eliminate or at least minimize arcing.
3. The projectile support mechanism must not interfere with current path.


Other considerations such as transient launch stresses due to rapid current rise times are important. This may be primary in the material selection for future afterbody sections. It is hoped a two jointed projectile design, with a tungsten nose and a high strength, light weight afterbody material, may permit higher launch acceleration, further improve stability, and enhance terminal ballistic effects.

## CONCLUSIONS

The aerodynamic characteristics of the 0.60 caliber EM round are well behaved in the Mach number range from 1.2 to 5. In addition the projectile survived accelerations in excess of 100,000 g's, and is suitable for testing at the University of Texas range.

The noncircular base has lessened the drag without sacrificing projectile stability. The projectile design represents an efficient combination of aerodynamics and armature requirements.



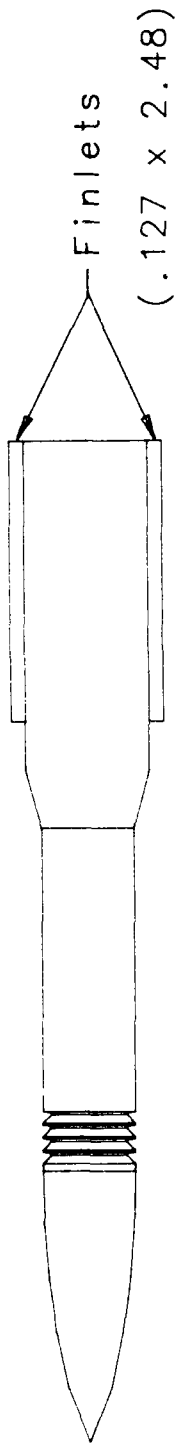

All dimensions in centimeters

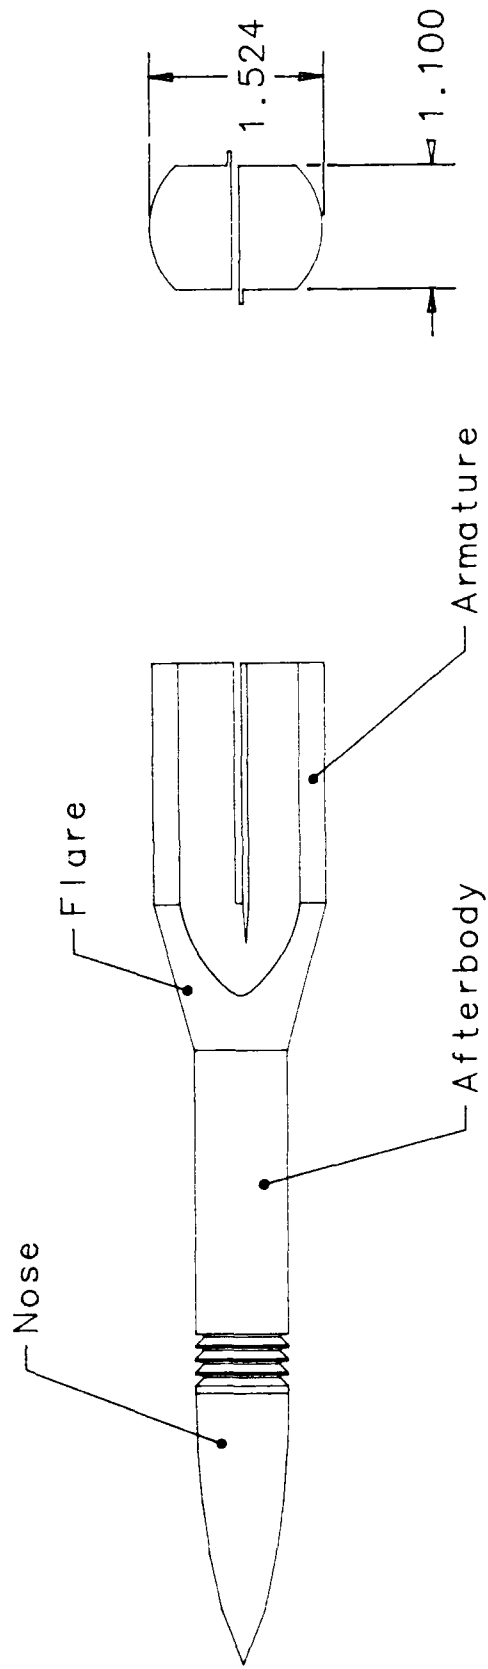


Figure 1. Projectile Configuration.

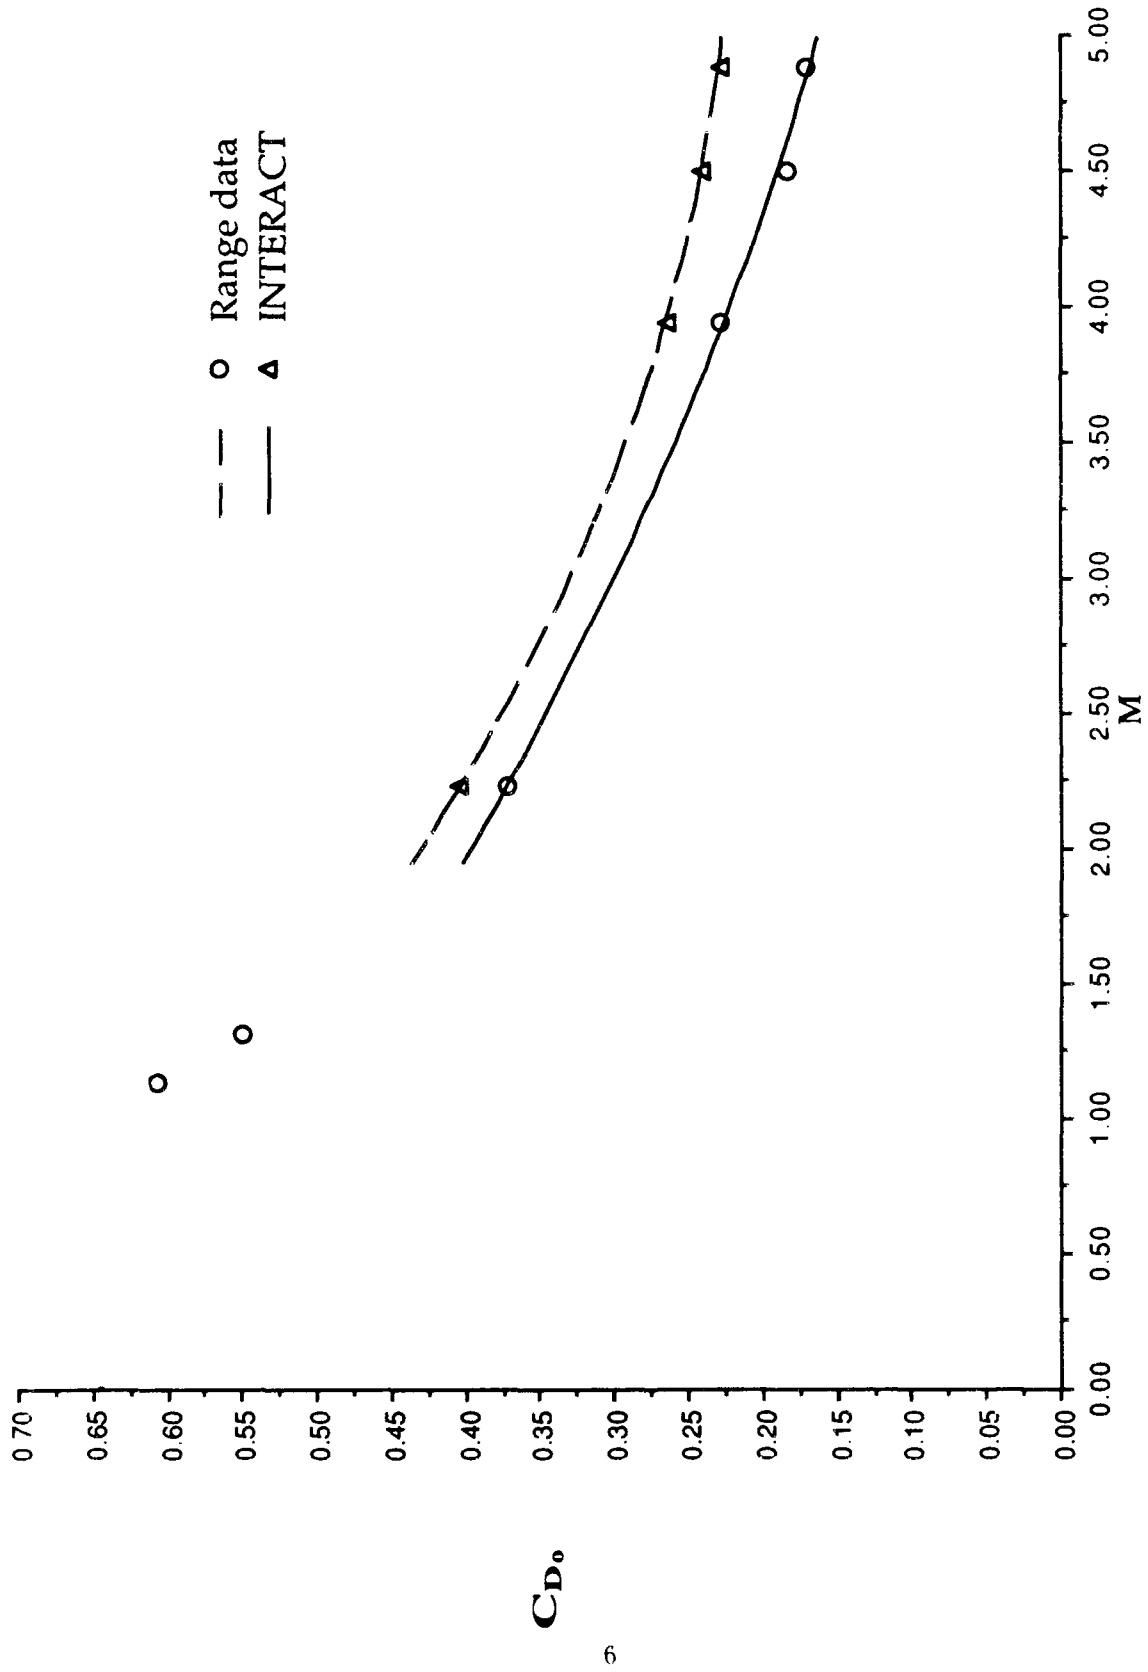


Figure 2. Zero Yaw Drag Coefficient versus Mach Number.

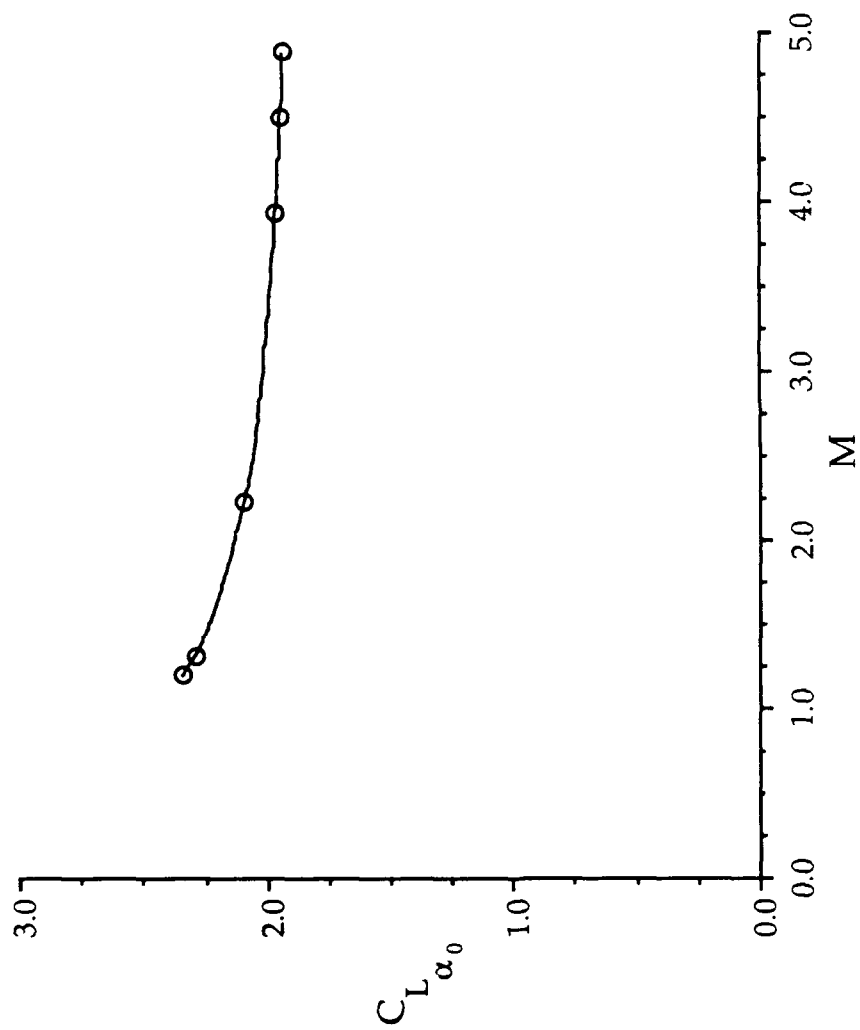
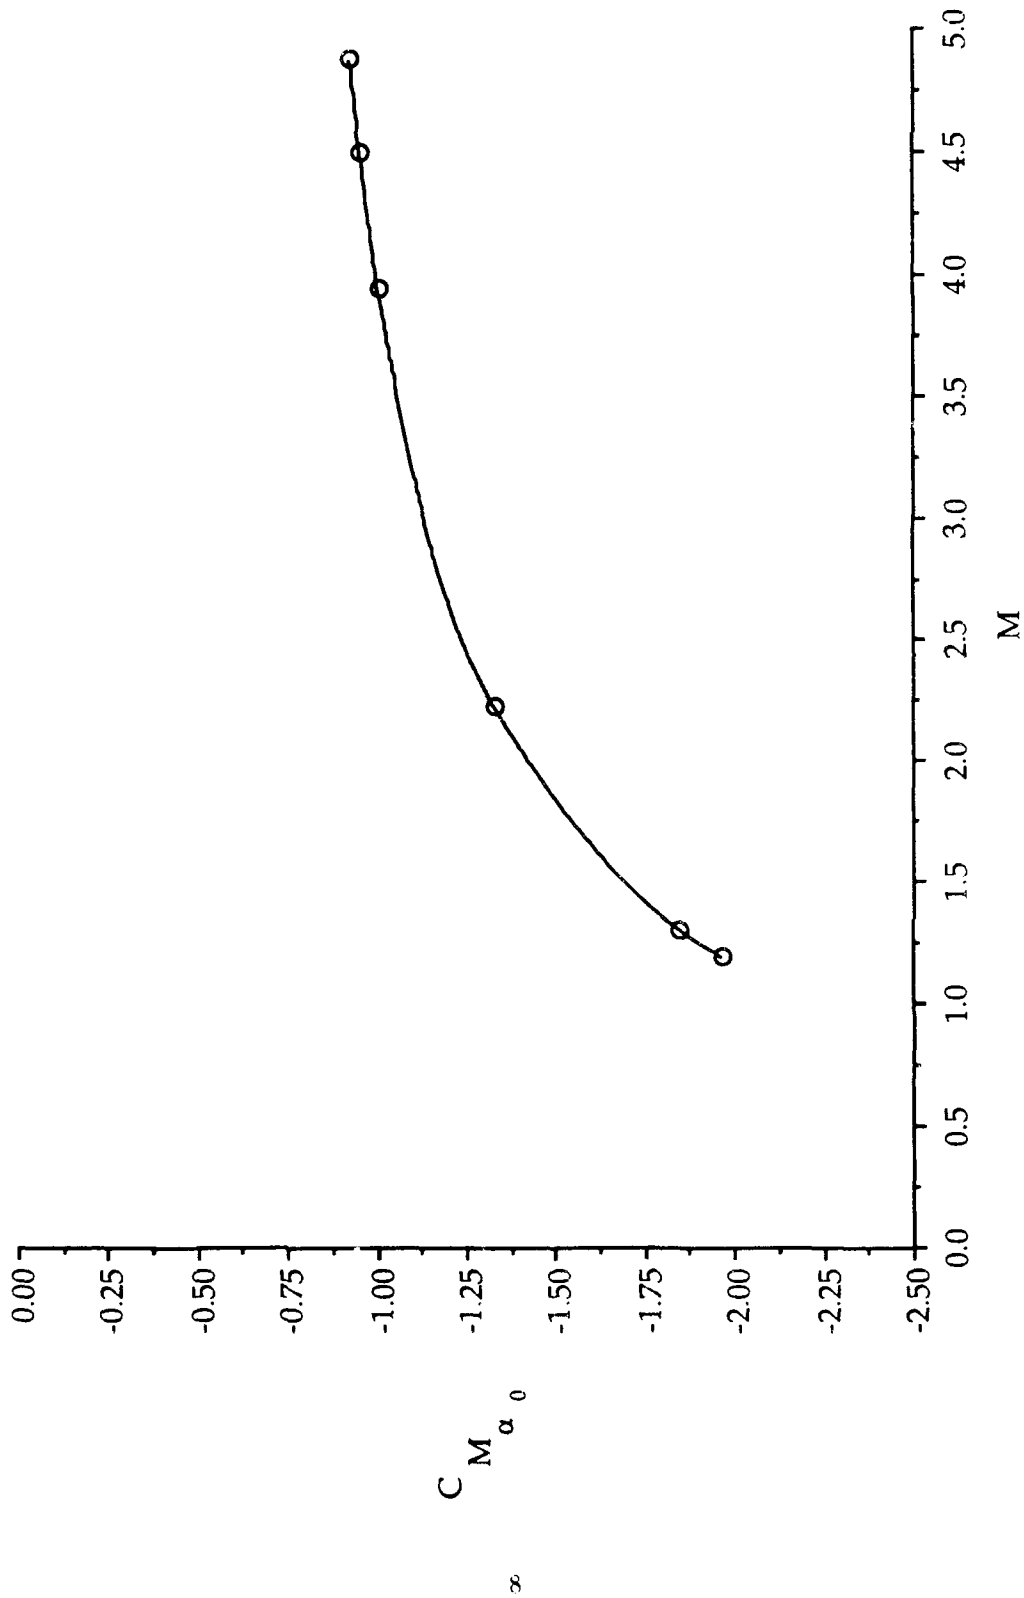


Figure 3. Zero Yaw Lift Coefficient versus Mach Number.



**Figure 4. Zero Yaw Static Moment Coefficient versus Mach Number.**

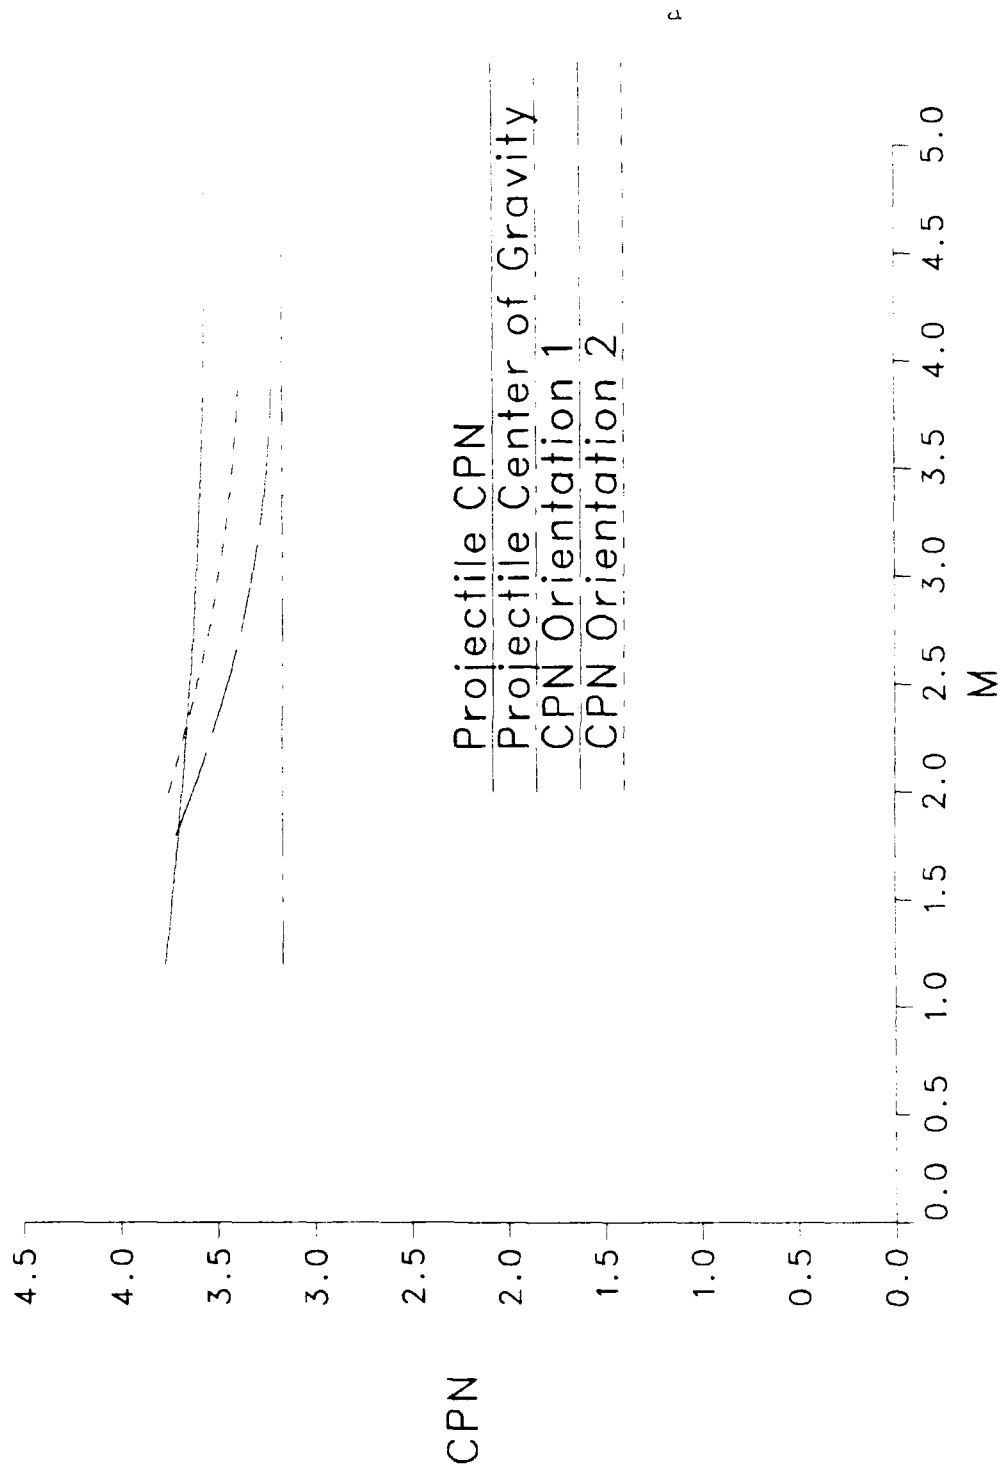


Figure 5. Center of Pressure versus Mach Number.

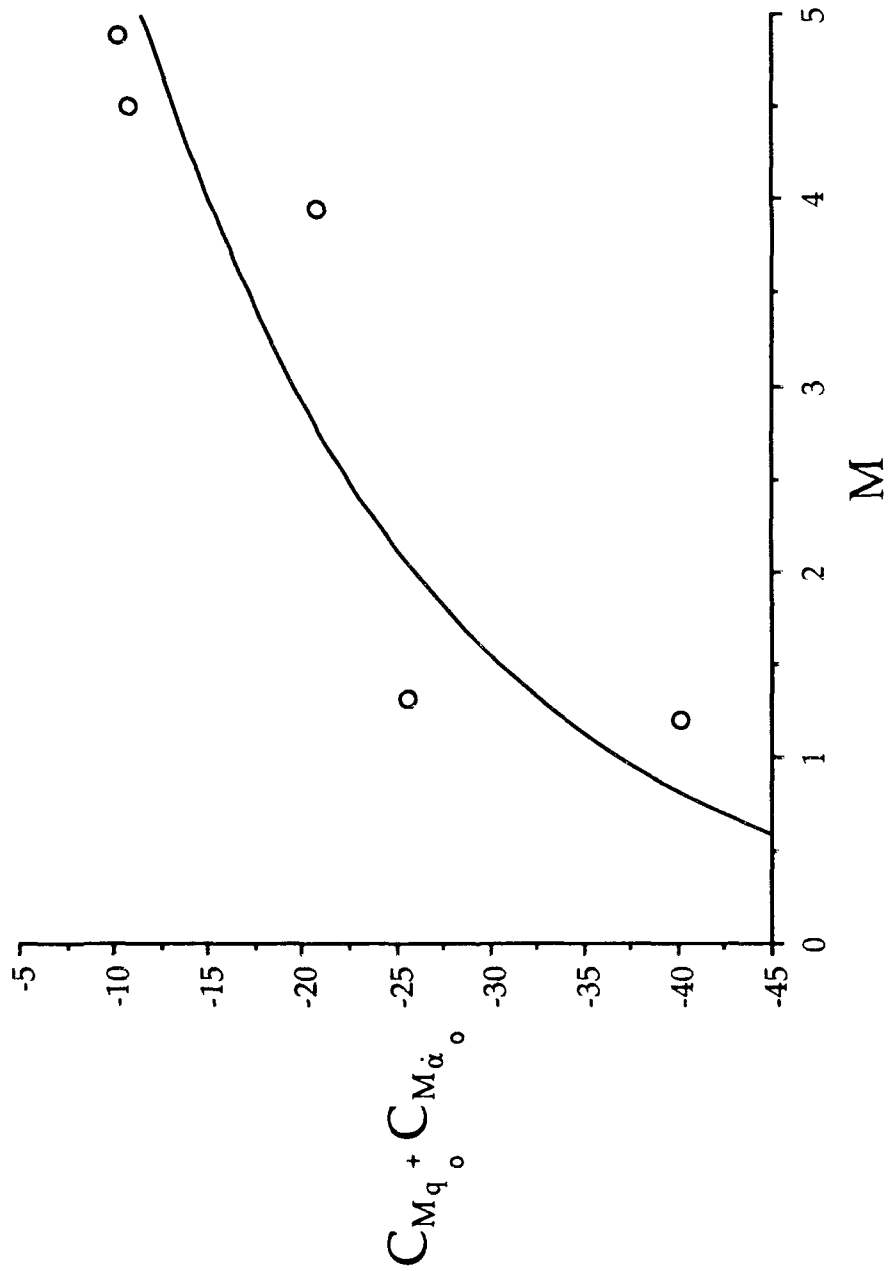


Figure 6. Zero Yaw Pitch Damping Moment Coefficient versus Mach Number.

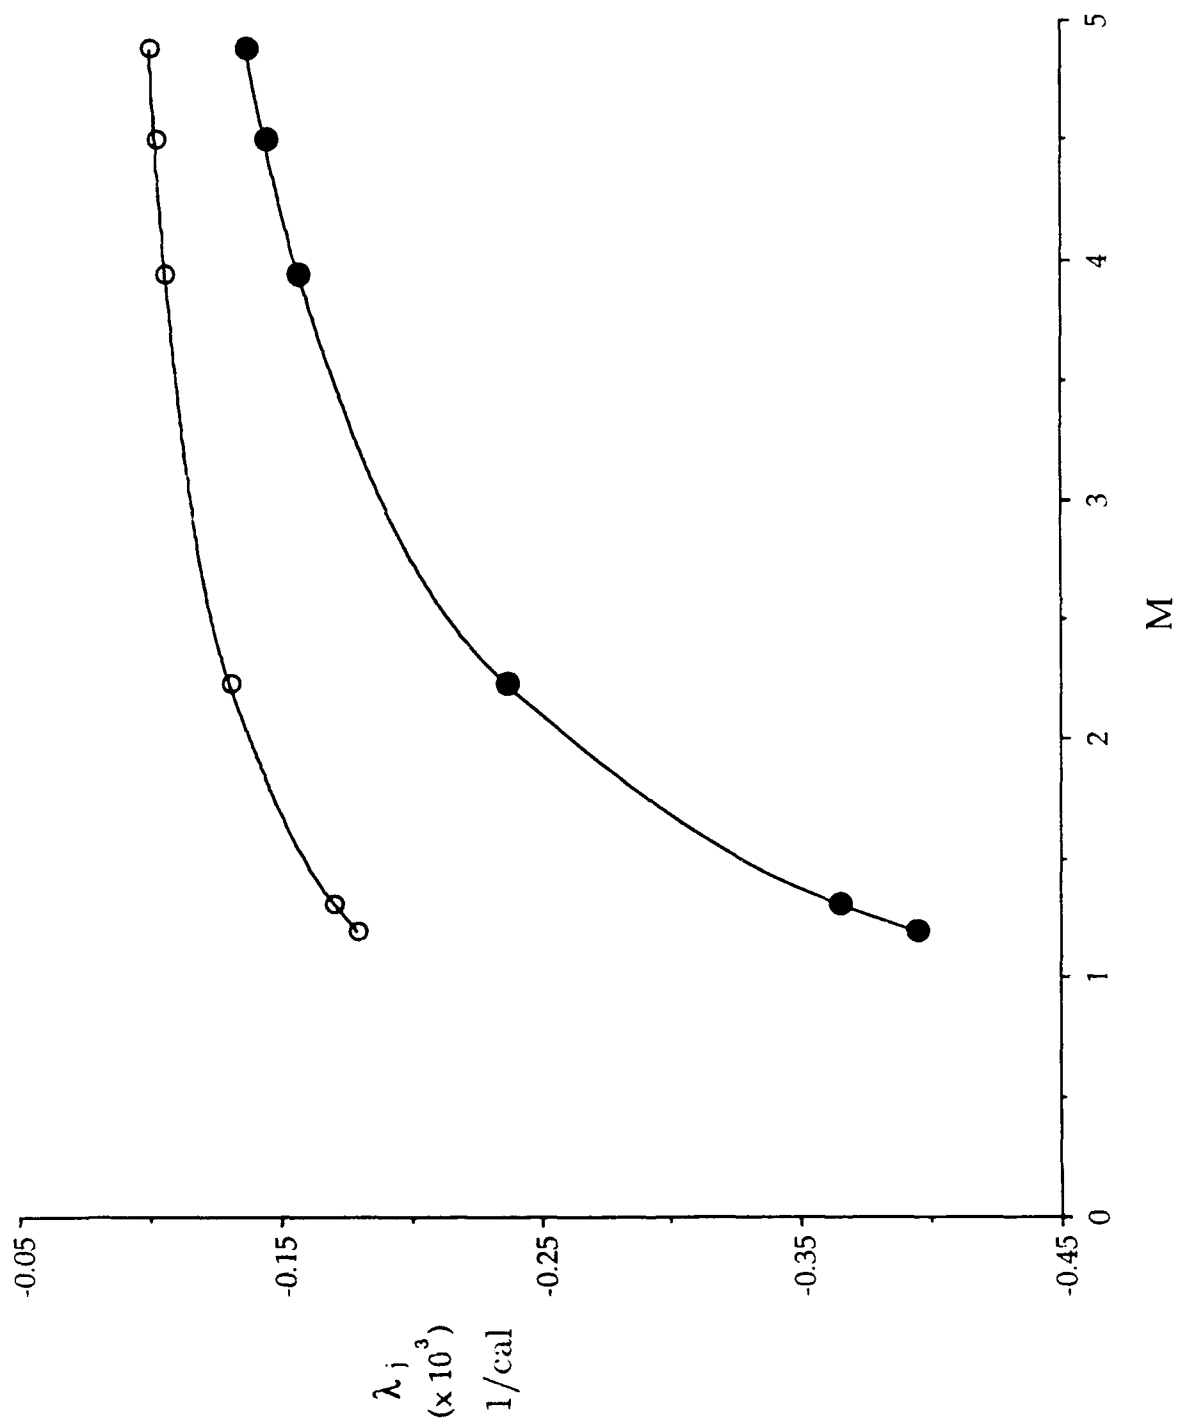


Figure 7. Damping Rate Exponents versus Mach Number.

**Table 1.** Projectile Physical Characteristics

Reference Diameter	1.524 cm
Center of Gravity	4.318 cm
Length Overall	8.880 cm
Nose Length	2.408 cm
Slot Width	.068 cm
Weight	31.48 grams
Pitch Plane Moment of Inertia	238.46 gram-cm <sup>2</sup>
Yaw Plane Moment of Inertia	237.72 gram-cm <sup>2</sup>
Axial Moment of Inertia	4.58 gram-cm <sup>2</sup>

**Table 2.** Aerodynamic Coefficients

Round	Mach No.	$C_{D_0}$	$C_{L_{\alpha_0}}$	$C_{M_{\alpha_0}}$	$C_{M_{\alpha_0}} + C_{M_{\alpha_0}}$	$\lambda_1 r 10^3$	$\lambda_2 r 10^3$
19452	1.196	.617	2.34	-1.97	-40.2	-.180	-.395
19453	1.312	.521	2.29	-1.85	-25.7	-.171	-.365
19454	2.237	.395	2.09	-1.33	-20.8	-.131	-.237
19457	3.942	.270	1.96	-1.01	--	-.107	-.158
19458	4.500	.215	1.94	-0.96	-10.8	-.103	-.145
19459	4.884	.197	1.93	-0.93	-10.2	-.101	-.138



## LIST OF SYMBOLS

$C_D$	Drag coefficient
$C_{L_\alpha}$	Lift coefficient
$C_{M_\alpha}$	Static moment coefficient
$C_{M_1} + C_{M_2}$	Pitch damping moment coefficient
CPN	Center of pressure of normal force in calibers from the nose
g	Earth's gravitational acceleration
Hz	Hertz (cycles/second)
$K_j$	Modal arm amplitude
M	Mach number
$\xi$	Complex yaw
$\lambda_j$	Exponential damping values
$\delta$	Projectile yaw

INTENTIONALLY LEFT BLANK.

<u>No of Copies</u>	<u>Organization</u>	<u>No of Copies</u>	<u>Organization</u>
2	Administrator Defense Technical Info Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145	1	Commander U.S. Army Missile Command ATTN: AMSMI-RD-CS-R (DOC) Redstone Arsenal, AL 35898-5010
1	HQDA (SARD-TR) WASH DC 20310-0001	1	Commander U.S. Army Tank-Automotive Command ATTN: ASQNC-TAC-DIT (Technical Information Center) Warren, MI 48397-5000
1	Commander U.S. Army Materiel Command ATTN: AMCDRA-ST 5001 Eisenhower Avenue Alexandria, VA 22333-0001	1	Director U.S. Army TRADOC Analysis Command ATTN: ATRC-WSR White Sands Missile Range, NM 88002-5502
1	Commander U.S. Army Laboratory Command ATTN: AMSLC-DL 2800 Powder Mill Road Adelphi, MD 20783-1145	(Class. only)]	Commandant U.S. Army Infantry School ATTN: ATSH-CD (Security Mgr.) Fort Benning, GA 31905-5660
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-IMI-I Picatinny Arsenal, NJ 07806-5000	(Unclass. only)]	Commandant U.S. Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905-5660
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-TDC Picatinny Arsenal, NJ 07806-5000	1	Air Force Armament Laboratory ATTN: AFATL/DLODL Eglin AFB, FL 32542-5000  <u>Aberdeen Proving Ground</u>
1	Director Benet Weapons Laboratory U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCB-TL Watervliet, NY 12189-4050	2	Dir, USAMSAA ATTN: AMXSY-D AMXSY-MP, H. Cohen
1	Commander U.S. Army Armament, Munitions and Chemical Command ATTN: SMCAR-ESP-L Rock Island, IL 61299-5000	1	Cdr, USATECOM ATTN: AMSTE-TD
1	Director U.S. Army Aviation Research and Technology Activity ATTN: SAVRT-R (Library) M/S 219-3 Ames Research Center Moffett Field, CA 94035-1000	3	Cdr, CRDEC, AMCCOM ATTN: SMCCR-RSP-A SMCCR-MU SMCCR-MSI
		1	Dir, VLAMO ATTN: AMSLC-VL-D
		10	Dir, BRL ATTN: SLCBR-DD-T

<u>No. of Copies</u>	<u>Organization</u>
1	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-AEE-B Picatinny Arsenal, NJ 07806-5000
1	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCL-FA, Henry Kahn Picatinny Arsenal, NJ 07806-5000
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCL-F Lucian Sadowski Harry Moore Picatinny Arsenal, NJ 07806-5000
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-FSA-E Dr. T. Gora John Bennett Picatinny Arsenal, NJ 07806-5000
1	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-FSC Mr. Ferdinand (EAPO) Picatinny Arsenal, NJ 07806-5000
1	LTV Aerospace and Defense Company ATTN: MS TH-83, Dr. Michael Tower P.O. Box 650003 Dallas, TX 75265-0003
1	Science Applications International Corporation ATTN: Dr. Keith A. Jamison 1247-B North Eglin Parkway Shalimar, FL 32579

USER EVALUATION SHEET/CHANGE OF ADDRESS

This laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers below will aid us in our efforts.

1. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) \_\_\_\_\_

2. How, specifically, is the report being used? (Information source, design data, procedure, source of ideas, etc.) \_\_\_\_\_

3. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. \_\_\_\_\_

4. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) \_\_\_\_\_

BRL Report Number BRL-MR-3907 Division Symbol \_\_\_\_\_

Check here if desire to be removed from distribution list. \_\_\_\_\_

Check here for address change. \_\_\_\_\_

Current address: Organization \_\_\_\_\_  
Address \_\_\_\_\_

**DEPARTMENT OF THE ARMY**  
Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T  
Aberdeen Proving Ground, MD 21005-5066



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

OFFICIAL BUSINESS

**BUSINESS REPLY MAIL**  
FIRST CLASS PERMIT No 0001, APG, MD

Postage will be paid by addressee

Director  
U.S. Army Ballistic Research Laboratory  
ATTN: SLCBR-DD-T  
Aberdeen Proving Ground, MD 21005-5066

