

UNCLASSIFIED

AD-A247 035

2

SECURITY CLASSIFICATION OF THIS PAGE



REPO

1a. REPORT SECURITY CLASSIFICATION Unclassified		10. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY DTIC ELECTED		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release Distribution is unlimited	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE SCHEDULE MAR 04 1992		5. MONITORING ORGANIZATION REPORT NUMBER(S) AFOSR-TR- 02 0154	
4. PERFORMING ORGANIZATION REPORT NUMBER(S) NA		7a. NAME OF MONITORING ORGANIZATION AFOSR/NA	
6a. NAME OF PERFORMING ORGANIZATION University of Texas	6b. OFFICE SYMBOL (if applicable)	7b. ADDRESS (City, State, and ZIP Code) AFOSR/NA Bolling AFB DC 20332-6448	
6c. ADDRESS (City, State, and ZIP Code) Aerospace Engineering Dept. University of Texas, Austin, TX 78712		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER AFOSR-86-0112	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION AFOSR	8b. OFFICE SYMBOL (if applicable) NA	10. SOURCE OF FUNDING NUMBERS	
8c. ADDRESS (City, State, and ZIP Code) Building 410 Bolling AFB, DC 20332-6448		PROGRAM ELEMENT NO. 61102F	TASK NO. 2307
11. TITLE (Include Security Classification) Effects of Sweep on the Physics of Unsteady Shock-Induced Turbulent Separated Flows			
12. PERSONAL AUTHOR(S) Dolling, David S.			
13a. TYPE OF REPORT FINAL	13b. TIME COVERED FROM 3/1/89--6/30/91	14. DATE OF REPORT (Year, Month, Day) Jan. 10, 1992	15. PAGE COUNT 43
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	Shock Wave Boundary Layer Interaction	
		Unsteady Flow	
		Separated Turbulent Boundary Layers	
19. ABSTRACT (Continue on reverse if necessary and identify by block number)			
<p>To examine the effects of sweepback on the unsteady separation in Mach 5 compression ramp interactions, fluctuating wall pressure measurements have been made upstream of the corner line in interactions generated by unswept, and 10, 20, 25, 30, 40, and 50 deg. swept models. The streamwise ramp angle was 28 deg. in all cases. The data were analyzed using standard time series analysis techniques and conditional sampling algorithms. The results show that: (i) In highly swept interactions (i.e., corner line sweeps greater than 25 deg.), the rms distributions of pressure fluctuations as well as the mean distributions are quasi-conically symmetric. Rms levels decrease globally with increasing sweep as does the maximum rms generated by the translating separation shock. (ii) The length of the</p>			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input type="checkbox"/> UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL Leonidas Sakell		22b. TELEPHONE (Include Area Code) 202-767-4935	22c. OFFICE SYMBOL AFOSR/NA

intermittent region, over which the separation shock foot translates, decreases with increasing sweep. In a given interaction, the length of the intermittent region grows spanwise. (iii) Dominant separation shock frequencies, observed in both surface pressure fluctuations and separation shock foot histories, increase from about 0.3-0.5 kHz for unswept flow to about 2-7 kHz in highly swept flows. In a given interaction, shock frequencies decrease spanwise. (iv) Separation shock dynamics defined in terms of the shock foot history and its statistics are essentially the same in all interactions. The separation shock foot position is normally distributed, and the mean shock velocities are essentially equal. The only difference is in the length of the region in which the separation shock moves. Higher frequencies are a direct result of the decrease in the length scale of the separation shock motion.

## Abstract

To examine the effects of sweepback on the unsteady separation in Mach 5 compression ramp interactions, fluctuating wall pressure measurements have been made upstream of the corner line in interactions generated by unswept, and 10, 20, 25, 30, 40, and 50 deg. swept models. The streamwise ramp angle was 28 deg. in all cases. The data were analyzed using standard time series analysis techniques and conditional sampling algorithms. The results show that: (i) In highly swept interactions (i.e., corner line sweeps greater than 25 deg.), the rms distributions of pressure fluctuations as well as the mean distributions are quasi-conically symmetric. Rms levels decrease globally with increasing sweep as does the maximum rms generated by the translating separation shock. (ii) The length of the intermittent region, over which the separation shock foot translates, decreases with increasing sweep. In a given interaction, the length of the intermittent region grows spanwise. (iii) Dominant separation shock frequencies, observed in both surface pressure fluctuations and separation shock foot histories, increase from about 0.3-0.5 kHz for unswept flow to about 2-7 kHz in highly swept flows. In a given interaction, shock frequencies decrease spanwise. (iv) Separation shock dynamics defined in terms of the shock foot history and its statistics are essentially the same in all interactions. The separation shock foot position is normally distributed, and the mean shock velocities are essentially equal. The only difference is in the length of the region in which the separation shock moves. Higher frequencies are a direct result of the decrease in the length scale of the separation shock motion.

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Availability/ or Special
<b>A-1</b>	



**92-05478**



## TABLE OF CONTENTS

Title	Page
Abstract	ii
TABLE OF CONTENTS	iii
1.0 INTRODUCTION	1
1.1 Background	1
1.2 Objectives of Current Work	2
2.0 EXPERIMENTAL PROGRAM	4
2.1 Wind Tunnel and Flow Conditions	4
2.2 Models and Instrumentation Plug	5
2.3 Instrumentation and Data Acquisition System	5
2.4 Test Program	6
3.0 ANALYSIS TECHNIQUES	8
3.1 Boxcar Conversion Technique	8
3.2 Separation Shock Foot Position History	8
4.0 DISCUSSION OF RESULTS	10
4.1 Surface Flow Patterns	10
4.2 Mean and Standard Deviation Distributions	11
4.3 Variation of Maximum Standard Deviation with Sweepback	12
4.4 Wall Pressure Signal Characteristics	13
4.5 Power Spectra in the Intermittent Region	13
4.6 Intermittent Region Length	14
4.7 Separation Shock Dynamics	15
4.8 Spanwise Variations in Separation Shock Dynamics	17
5.0 CONCLUSIONS	19
6.0 REFERENCES	20
7.0 FIGURES	22

## 1.0 INTRODUCTION

### 1.1 Background

The unsteadiness of shock wave/turbulent boundary layer interactions, SWTBLI, has become an increasingly active area in high speed aerodynamics research. This unsteadiness generates large amplitude fluctuating pressure loads which unfortunately also usually occur in regions of high heating rates. Fluctuating pressure loads and high heating rates can lead to poor aerodynamic performance and early fatigue of structures. It is, therefore, important that the locations of these loads as well as their severity be known at the design stage. Thus, detailed quantitative data on the unsteadiness of these interactions are needed to understand the flowfield physics better and to develop correlations useful for engineering design.

Although experimental evidence from as early as the 1950's has shown that the boundary layer separation and reattachment processes in SWTBLI can be unsteady,<sup>1</sup> the phenomenon has only been studied extensively in the last decade. Most of the investigations have focussed on nominally 2-D problems such as interactions generated by unswept compression corners,<sup>2-4</sup> or the flowfield along the line of symmetry upstream of the leading edge in 3-D interactions generated by cylinders,<sup>5</sup> or blunt fins.<sup>6</sup> These studies have shown that the unsteadiness is characterized by large amplitude, low frequency pressure fluctuations generated by the separation shock foot in random motion. More recent investigations have uncovered many important features of the unsteadiness such as the dynamics of the separation and reattachment processes,<sup>7</sup> the structure of separation shock system,<sup>8</sup> and the spanwise rippling motion of the separation shock.<sup>9</sup> In brief, it has been shown that the flow immediately downstream of the instantaneous location of the separation shock foot is separated. Hence, the intermittent region (i.e., the region in which the separation shock foot translates) is in fact a region of intermittent separation. The dominant motion of the separation and reattachment locations is best described as expansion and contraction of the separation bubble. Similar results have been reported by Kussoy et al<sup>10</sup> in a Mach 3 interaction generated by a tilted 30 deg. half-angle cone attached to a circular cylinder.

In contrast, relatively little is known about the unsteadiness of separation in swept interactions since most of the investigations of such flows have focussed on the mean properties. Such techniques as surface flow visualization have been used extensively in sharp fin and compression ramp flows to study the evolution of the interaction footprint as the flow is progressively swept. A recent review of such flows can be found in Ref. 11. In

swept compression ramp interactions, which have been studied quite extensively, mean measurements have shown that two flow regimes, cylindrical and quasi-conical, exist.<sup>12</sup> In cylindrically symmetric interactions, the upstream influence line, UI, the separation line, S, and the corner line, C, are parallel to each other, whereas in quasi-conical interactions these lines belong to a family of rays which emanate from a common point called the virtual conical origin, VCO. In both cases, there is an inception zone between the ramp apex and the region in which symmetry is reached. For a given streamwise ramp angle,  $\alpha$ , the interaction footprint is cylindrically symmetric for moderately swept flows, and becomes quasi-conical as the sweepback angle,  $\lambda_C$  is increased.

To the authors' knowledge Tran,<sup>13</sup> Tan et al,<sup>14</sup> and Tran et al<sup>15</sup> were the first to study the unsteadiness of swept interactions using sharp fins at angle of attack in Mach 3 flow in the mid 1980's. In addition, Tran<sup>13</sup> made limited measurements in highly swept interactions generated by a 24 deg. compression corner with sweepback angle of 60 deg., and a semi-cone with half-angle of 25 degrees. The measurements revealed large amplitude, low frequency pressure fluctuations attributable to an unsteady separation shock foot. Schmisser and Dolling<sup>16</sup> have also studied sharp fin-induced interactions in Mach 5 flow, at higher angles of attack and in a thicker boundary layer. Their results also showed the emergence of pressure fluctuations characteristic of the unsteady separation shock as the fin angle of attack is increased.

Recently, Dolling et al<sup>17</sup> completed the first phase of a systematic investigation at Mach 5 in which the effects of sweepback on the separation shock dynamics in compression ramp interactions is being examined. Detailed measurements of surface pressure fluctuations were made near the separation line, S, at three different spanwise positions in interactions generated by 28 deg. compression ramp models with sweepback angles,  $\lambda_C$ , of 10 and 20 deg., respectively. Their results showed that the separation shock dynamics and local flow structure were qualitatively similar to those in unswept interactions. Quantitatively, however, the results showed a decrease in intermittent region length scale and maximum rms, and an increase in separation shock frequencies.

## 1.2 Objectives of Current Work

The current study is the second phase of this systematic investigation, in which four additional models with constant streamwise angles of 28 deg. and sweepback angles of 25, 30, 40, and 50 deg. have been used. Results from both studies have been compiled together and presented in this paper. The objectives of this study are twofold:

(i) to determine qualitatively and quantitatively the effects of sweepback on the dynamics of unsteady separation in compression ramp interactions and

(ii) to determine the variations, if any, in the dynamics of unsteady separation in the spanwise direction.

## 2.0 EXPERIMENTAL PROGRAM

### 2.1 Wind Tunnel and Flow Conditions

Experiments were conducted in the high Reynolds number, Mach 5 blowdown wind tunnel at Balcones Research Center of the University of Texas at Austin. The rectangular test section of this tunnel is 6 in. wide, 7 in. high, and 12 in. long. Up to 140 ft<sup>3</sup> of compressed air stored at about 2500 psia provides run times of up to one minute for the current stagnation conditions. Two banks of 420 kW nichrome wire resistive heaters are used to heat the incoming air and can provide stagnation temperatures of up to 759 deg. R in the settling chamber.

All tests were conducted at a stagnation pressure of 330 psia and a stagnation temperature of 647 deg. R, which generate a freestream unit Reynolds number of  $15.2 \times 10^6$  ft<sup>-1</sup>. The freestream Mach number and velocity in the test section were 4.95 and 2543 ft/s, respectively. The incoming turbulent boundary layer underwent natural transition and developed under approximately adiabatic wall temperature conditions. Boundary layer parameters were determined from pitot surveys made with a probe having a tip orifice 0.008 in. high and 0.015 in. wide. Total temperature surveys were also made. In the data reduction, the static pressure through the boundary layer was assumed constant and equal to the freestream value. A good fit to law of the wall / law of the wake was obtained for the mean velocity profile. Boundary layer parameters are listed in Table 1.<sup>18</sup>

Parameter	
$\delta_o$ (in.)	0.59
$\delta^*$ (in.)	0.26
$\theta (\times 10^2)$ (in.)	2.60
$\Pi$	0.78
$H \equiv \delta^* / \theta$	10.20
$Re_\theta (\times 10^{-4})$	3.16
$C_f (\times 10^4)$	7.74

Table 1 Boundary Layer Parameters



## 2.2 Models and Instrumentation Plug

Four swept and one unswept compression ramp models were tested. The unswept 28 deg. model was made of aluminum and was 5 in. wide and 1.5 in. high. All four of the swept models, made of brass, had a constant streamwise angle,  $\alpha$ , of 28 deg. and sweepback angles,  $\lambda_C$ , of 25, 30, 40, and 50 deg. They were 4.25 in. wide and 2 in. high. Two aluminum aerodynamic fences with sharpened leading edges were attached to the sides of the unswept ramp to prevent spillage and isolate the interaction from the sidewall boundary layers. Only one stainless steel aerodynamic fence with sharpened leading edge was attached to the apex side of the swept models to prevent spillage and isolate the interaction from the sidewall boundary layer. The fence leading edge extended at least 2.5 in. ( $\approx 4 \delta_o$ ) upstream of the apex. All models could be moved in the streamwise direction with infinite resolution. A sketch of a swept compression ramp model, instrumentation plug, and the coordinate system are shown in Fig. 1.

The transducers could be mounted flush along four different rows in a 3.375 in. diameter brass plug centered 3.95 in. downstream of the nozzle exit plane. The four rows of transducer ports could be aligned at any angle to the freestream. The first row is along the plug centerline and has 26 transducer ports. The second (8 ports), third (13 ports), and fourth (12 ports) rows are parallel to the center row, and are spaced 0.115 in., 0.500 in., and 1.000 in. from the latter, respectively. An additional row of transducer ports was also machined in the tunnel floor to allow measurements further outboard. This row has 9 transducer ports and it is at a fixed angle of 30 deg. to the undisturbed freestream. In any given row, the spacing between two adjacent ports,  $\zeta$ , is 0.115 in. Customized dummy brass plugs were mounted flush in the unused transducer ports.

## 2.3 Instrumentation and Data Acquisition System

Up to eight miniature, Kulite, high frequency response pressure transducers were used. These were either XCW-062-15A, 0-15 psia, or XCQ-062-50A, 0-50 psia, absolute pressure transducers, and all have outer diameters of 0.0625 in. and 0.028 in. diameter pressure sensitive diaphragms. As quoted by the manufacturer, the natural frequency response of the diaphragm was 250 kHz (for 0-15 psia models) and 500 kHz (for 0-50 psia models). However, perforated screens protecting the transducers from dust particles limit the effective frequency response of both types of transducers to about 50 kHz. All transducers were calibrated statically using a Heise digital pressure gauge (Model 710A)

accurate to within 0.001 psia.

Output from the pressure transducers was first amplified by either Dynamics (Model 7525), Measurements Group (Model 2311), or PARC (Model 113) amplifiers, and then low-pass filtered using Ithaco (Model 4113 or Model 4213) analog filters. Amplifier gains were adjusted for maximum resolution and varied depending on the transducer type and the position of the transducer in the interaction. Filter cut-off frequencies were set at 50 kHz for sampling rates of 100 kHz or more, and were reduced to at most one-half the sampling frequency for tests in which the sampling rates were lower than 100 kHz.

Filtered signals were then digitized by two LeCroy Model 6810 Waveform Recorders equipped with 12-bit A/D converters each of which has 2 Megawords of memory, and can sample up to 4 channels of data simultaneously, at rates up to 1 MHz per channel. Both A/D's were triggered using the same clock, thus 8 channels can be sampled simultaneously at rates up to 1 MHz per channel. A maximum of 4096 records (1 record = 1024 datapoints) of data can be obtained. Further, each channel can be adjusted individually allowing the user to optimize each channel for different input signal ranges.

Data were then downloaded to an HP 9000 Model 370 mini-computer and stored on tape for later analysis. All analyses were either performed on the primary computer (Model 370) or on one of the two HP 9000 Model 340 workstations connected to the primary computer.

## 2.4 Test Program

In high speed flows, surface tracer techniques, such as kerosene-lampblack-diesel method, are widely used to locate separation lines. In this case, the mixture is painted on the tunnel floor and compression ramp face before tunnel start-up, and after shut-down the pattern is lifted off the surface on large sheets of transparent tape. Since the mixture responds to surface shear stress,  $\tau_w$ , the surface flow directions and hence features such as the separation and attachment lines can easily be deduced. These surface patterns were used to align the transducer rows at the desired orientation. However, this method has essentially zero frequency response, and the resulting pattern is that generated by the mean wall shear stress field.

Fluctuating wall pressure measurements were made perpendicular to the local separation line along three different spanwise rows. Two runs were made along each row. In

the second run, the model was moved by about one-half the minimum transducer spacing in the streamwise direction to improve the spatial resolution. It should be noted that the motion of the ramp changes the spanwise location of the row slightly, however, the change is negligible. Two additional runs were made to acquire data from the transducers in the tunnel floor for the 30, 40, and 50 deg. swept interactions. To investigate the spanwise evolution of the pressure fluctuations, measurements were also made along the corner line at the compression ramp test surface junction. Measurements were also made along spanwise lines immediately upstream of the separation line in 30, 40, and 50 deg. swept interactions.

Almost all data were sampled at 200 kHz/channel and filtered at 50 kHz. To improve the frequency resolution, some experiments were repeated and sampled at 50 kHz, in which case the filter cut-off frequency was set at 25 kHz. Typically 250 records (1 record = 1024 datapoints) of data were taken per channel. The earlier data obtained in moderately swept interactions by Boitnott<sup>19</sup> were also reanalyzed and some of the results will be presented in this paper. Available data thus span a wide range of sweepback angles (0, 10, 20, 25, 30, 40, and 50 degrees).

### 3.0 ANALYSIS TECHNIQUES

Standard time-series analyses and conditional sampling algorithms have been used to analyze the data. A detailed description of the conditional sampling algorithm, the two threshold method box-car conversion technique, can be found in Ref. 6. For completeness, a very brief description is given below. In addition, a new analysis technique utilizing the box-car functions is described in some detail.

#### 3.1 Box-car Conversion Technique

This technique is applied to signals measured under the unsteady separation shock and extracts shock passages from the pressure fluctuations using a two threshold method. The thresholds are set at  $T_1 = \bar{P}_{w0} + 3\sigma_{P_{w0}}$  and  $T_2 = \bar{P}_{w0} + 6\sigma_{P_{w0}}$ , where  $\bar{P}_{w0}$  is the undisturbed turbulent boundary layer mean pressure level and  $\sigma_{P_{w0}}$  is the rms of the turbulent boundary layer pressure fluctuations. These threshold settings were recommended following a sensitivity analysis of the effects of  $T_1$  and  $T_2$ .<sup>6</sup> It should be noted here that another sensitivity analysis was performed to determine if these threshold settings were also appropriate for the analysis of data from swept compression ramp interactions. Since no unusual features were detected, the same threshold settings were used. In the two threshold method, the boxcar is generated when  $P_w(t) > T_2$  and is terminated when  $P_w(t) < T_1$ . Thus, when the box-car assumes a value of 1, this signifies a shock passage in the unstream direction, and is called the rise-time. Similarly, when it assumes a value of 0, this signifies a shock passage in the downstream direction, and is called the fall-time. Once a shock passage is detected using  $T_1$  and  $T_2$ , and an initial fall-time assigned, a counter is then used to march backwards in time until the instantaneous value  $P_w(t)$  is found which is just below  $T_2$ . The fall-time is then reassigned to this new value. The requirement that the rise- and fall-times be determined by the same threshold level, (i.e.,  $T_2$ ), ensures that the separation shock foot is at the same position at both rise- and fall-times. Further, these times are the only pertinent information in the generation of the separation shock foot history which is explained in some detail in the following section.

#### 3.2 Separation Shock Foot Position History

Separation shock dynamics have so far been deduced and interpreted from surface pressure fluctuations since to date there have been no direct measurements of separation shock foot histories,  $X_s(t)$ . Naturally, it would be preferable to discuss and compare separation shock dynamics literally, i.e., in terms of  $X_s(t)$ . To the best of authors'

knowledge,  $X_s(t)$  has not been and probably cannot be measured. However, simultaneous measurements of multichannel pressure fluctuations coupled with conditional algorithms allows  $X_s(t)$  to be deduced in a piecewise continuous form. Even though it is necessarily approximate, this technique provides a means through which the separation shock dynamics in one interaction can be compared directly with the shock dynamics in a different interaction.

Separation shock foot position history is generated from nested boxcar sequences such as those shown in Fig. 2 which are deduced from simultaneous measurements of surface pressure fluctuations made in the intermittent region. The example shown is for the unswept interaction. The schematic in Fig. 2a shows the position of transducers upstream of the separation line and the corresponding bin numbers. Nested boxcar functions from actual data are shown for channels 2 through 6 in Fig. 2b. The rise- and fall-times in the nested boxcar sequence and the channel on which they occur define the time and position coordinates of the separation shock foot, respectively. Linear interpolation of these coordinates yields a piecewise smooth function for  $X_s(t)$  as depicted in Fig. 2c. In this conversion, the only assumptions are that the shock moves in unidirectional motion and at constant speed in moving from one bin to the other. In the case of a shock turn-around, it is further assumed that the shock moves to the middle of the bin, changes its direction of motion and moves back at the same speed. It should be noted that these assumptions are not new and have always been implicit in conditional analysis techniques employed previously. Furthermore, the separation shock velocity,  $V_s(t)$ , can be calculated by taking the derivative of  $X_s(t)$ . The authors are aware of the problems involved in differentiating the experimental data, however, in this case  $V_s(t)$ , can only be calculated by dividing the distance between two adjacent transducers by the time it takes for the shock to cross both transducers. Note that this is equivalent to differentiating  $X_s(t)$ . The corresponding velocity history is shown in Fig. 2d.

Once the conversion to  $X_s(t)$  is completed, the raw data for calculating the separation shock dynamics are defined for that particular interaction and can be analyzed using standard time-series analysis techniques, and compared directly with the separation shock dynamics from a different interaction.

## 4.0 DISCUSSION OF RESULTS

To recap, surface pressure fluctuations have been measured near separation lines in interactions generated by swept compression ramp models with constant streamwise angle,  $\alpha = 28$  deg., and sweepback angles,  $\lambda_C = 25, 30, 40,$  and  $50$  degrees. Measurements were made along three spanwise rows aligned perpendicular to the local separation line. Similar measurements made by Boitnott<sup>19</sup> using  $28$  deg. compression ramp models with moderate sweepback angles of  $10$  and  $20$  deg. were also analyzed. Results from all swept interactions as well as those from the unswept interaction are presented below.

### 4.1 Surface Flow Patterns

Surface flow patterns are shown in Figs. 3a through 3f for sweepback angles,  $\lambda_C$ , of  $10, 20, 25, 30, 40,$  and  $50$  degrees, respectively. It should be noted that Fig. 3 has been reduced to  $75\%$  of the original size. The apex side of each model is indicated by a solid line and the compression corner is delineated by a black and white line. Separation lines, corner lines, and attachment lines are indicated by S, C, and A, respectively. To provide a measure of the physical scale, the incoming boundary layer thickness,  $\delta_o$ , is also shown in each figure.

Clearly, the  $10$  deg. case is cylindrically symmetric, however, the portion of the  $20$  deg. interaction captured by the flow visualization appears to be in the inception zone, and based on the arguments of Dolling et al,<sup>17</sup> it will probably develop cylindrically. As the flow is swept back from  $20$  to  $25$  deg., the separation region length scale upstream of the corner decreases noticeably. For  $\lambda_C \geq 25$  deg., the interactions all appear to be quasi-conical, based on their surface flow patterns. The location of the virtual conical origin, VCO, was determined by finding the intersection point of straight lines drawn through the separation line, S, the corner line, C, and the attachment line, A. The distance to the VCO,  $R_{VCO}$ , which is given in Table 2, is the radial distance from the apex of the model. The sweepback angle of the separation line,  $\lambda_S$ , and that of the attachment line,  $\lambda_A$ , are also given in Table 2 along with the radial distances to the end of the inception zone,  $R_{I/Z}$ , and each of the transducer rows  $R_M$ ,  $R_{O1}$ ,  $R_{O2}$ , and  $R_F$ . The subscripts M, O1, O2, and F correspond to the middle row, two outer rows, and the tunnel floor row, respectively. Note that all but the tunnel floor row, F, are shown in Fig. 3e.

$\lambda_C$ (deg.)	25	30	40	50
$R_{VCO}$ (in.)	1.65	1.07	0.82	0.42
$\lambda_S$ (deg.)	16.0	19.5	28.5	36.5
$\lambda_A$ (deg.)	30.0	37.0	49.0	65.0
$R_{IZ}$ (in.)	3.65	2.45	2.00	1.26
$R_M$ (in.)	3.60	3.07	3.00	2.76
$R_{O1}$ (in.)	4.10	3.57	3.50	3.26
$R_{O2}$ (in.)	4.60	4.07	4.00	3.76
$R_F$ (in.)	-	4.82	4.85	4.93

Table 2 Mean flow features and locations of the transducer rows

#### 4.2 Mean and Standard Deviation Distributions

Distributions of mean wall pressures,  $\bar{P}_w$ , are plotted in conical coordinates,  $(x+x_o)/(z+z_o)$ , in Figs. 4a through 4d for  $\lambda_C = 25, 30, 40,$  and  $50$  deg., respectively. In this coordinate system,  $(x+x_o)/(z+z_o)$ , is the tangent of the sweepback angle of a conical ray emanating from the VCO. Thus,  $x_o$  and  $z_o$  are the streamwise and spanwise components of  $R_{VCO}$  which is given in Table 2. The legend for Fig. 4 is given in Fig. 4a, and the separation and corner lines are indicated by S and C in all figures. The scatter in the data in Figs. 4a-d is indicative of the difficulties involved in measuring such low pressures using 0-50 psia transducers. Nevertheless, the general trends are captured, and agree with results from earlier investigations (Ref. 20).  $\bar{P}_w$  increases from the undisturbed boundary layer pressure and asymptotes towards a plateau level in the separated region upstream of the corner. Also evident in these figures is the extremely rapid rise in  $\bar{P}_w$  immediately upstream of the corner, which agrees with earlier experimental results at Mach 3.<sup>20</sup> These data are generated from measurements made along the corner line as indicated in the legend in Fig. 4a.

Distributions of standard deviation,  $\sigma_{P_w}$ , are plotted in conical coordinates,  $(x+x_o)/(z+z_o)$ , in Figs. 5a through 5d for  $\lambda_C = 25, 30, 40,$  and  $50$  deg., respectively. Again, the legend is given in Fig. 5a, and the separation and corner lines are indicated by S and C in all figures. The good collapse of data, particularly in the region of rapid rise upstream of S, shows quite clearly that the rms distributions are also quasi-conically

symmetric. The scatter in maximum rms in the vicinity of  $S$  is probably due to spatial resolution problems, since the diameter of the transducer is, in some cases, comparable to the distance over which the rise to the maximum rms occurs. The intermittent region grows quasi-conically and thus the maximum rms levels are higher along the outer rows since the spatial resolution is better. Even though the absolute values of the maximum rms may be underestimated along the inner rows, the trends with increasing sweepback are certainly quite clear, and meaningful comparisons can be made.

The results in Fig. 5 show that the rms levels throughout the interaction upstream of the corner decrease with increasing sweep. Furthermore, the rms peak in the intermittent region, which is indicative of a translating separation shock foot, decreases. This suggests that the intensity of the unsteadiness diminishes with increasing sweep. An interesting feature in the rms distributions (as in the mean distributions) is the presence of very steep gradients immediately upstream of the corner, which may be due to a small secondary vortex developing along the corner line within the primary vortex. There may be a second, and perhaps a larger, peak in rms along the corner line than in the intermittent region. However, that issue cannot be resolved with available data. More measurements with much better spatial resolution are required both upstream and downstream of the corner line.

To examine this issue further, the rms values along the corner line are plotted versus the normalized radial distance,  $r / \delta_o$ , in Fig. 6. Almost all measurements were made in regions of quasi-conical symmetry, and yet the rms values immediately upstream of the corner line increase radially. Even though the transducers were aligned along the corner line, with increasing radial distance the center of each consecutive transducer falls on a different ray progressively approaching the ray which passes through the corner. Normally, such small variations would not be important but in this region the gradients are very steep and very small angular changes result in large changes in both  $\bar{P}_w$  and  $\sigma_{P_w}$ . These very steep gradients in rms and mean pressure near the corner line support the existence of a small secondary vortex along the corner line. It appears that, with the exception of the 25 deg. interaction, the rms values generated by the secondary vortex are lower with increasing sweepback.

#### 4.3 Variation of Maximum Standard Deviation with Sweepback

The maximum standard deviation,  $(\sigma_{P_w})_{\max}$ , in the intermittent region from each row is plotted vs. the local sweepback angle of the separation line,  $\lambda_S$  in Fig. 7. It should be noted that  $\lambda_S$  was chosen for convenience, and that the authors do not intend to suggest that



maximum rms is solely a function of the local sweepback angle of the separation line. Nevertheless, results clearly show that maximum standard deviation decreases with increasing  $\lambda_S$ ; the decrease is more than a factor of 2 as the separation line is swept back from 0 to 36.5 degrees. Again, small differences in the maximum rms levels at the same  $\lambda_S$  in highly swept interactions are probably due to spatial resolution problems as discussed earlier.

#### 4.4 Wall Pressure Signal Characteristics

Before the effects of sweepback on the unsteady separation are discussed in more detail, it is probably useful to describe qualitatively the changes in wall pressure fluctuations which occur since it is from them that the separation shock dynamics are deduced. Figures 8a through 8c show typical fluctuating pressure signals and their corresponding amplitude probability density functions, PDF, measured upstream of the separation line in unswept, 20 and 40 deg. swept interactions, respectively. Pressure signals from the unswept and moderately swept ( $\lambda_C = 20$  deg.) interactions are qualitatively similar in that they both have high amplitude, low frequency pressure fluctuations superimposed on the low amplitude, high frequency pressure fluctuations characteristic of the undisturbed turbulent boundary layer. Two distinct pressure levels, i.e., that of the undisturbed turbulent boundary layer and a higher level downstream of the separation shock/compression system, are clearly evident either through visual inspection of the pressure histories or from the corresponding bimodal probability density functions. The pressure signal from the highly swept interaction ( $\lambda_C = 40$  deg.), on the other hand, is quite different: the secondary peak in the corresponding PDF is no longer present. Furthermore, the signal in Fig. 8c has lower amplitude fluctuations at much higher frequencies. However, it should be noted that this signal is also intermittent, and that it can be analyzed using the two threshold method conditional sampling techniques.

In brief, the amplitude of the wall pressure fluctuations decrease while their frequencies increase with increasing sweep. This change is gradual with increasing sweep for small sweepback angles ( $\lambda_C \leq 20$  deg.), but becomes more rapid as the sweepback increases ( $\lambda_C \geq 25$  deg.).

#### 4.5 Power Spectra in the Intermittent Region

Signals sampled at 200 kHz were used to calculate the power spectra in the unswept, and 25, 30, 40, and 50 deg. swept interactions. At this sampling rate the frequency resolution

is about 195 Hz. Those data from Ref. 19 (i.e.,  $\lambda_C = 10$  and 20 deg.) were sampled at 110 kHz resulting in a frequency resolution of about 107 Hz. For a fixed  $\lambda_C$ , the frequency content of pressure signals near the separation line was independent of position in the intermittent region along a given row. For this reason, only those power spectra at maximum rms are shown in the normalized form in Fig. 9 for row O2. Results from all seven interactions are plotted and identified in the legend.

Dominant frequencies, which in this region are due to the separation shock motion, increase from about 0.3-0.5 kHz in the unswept interaction to about 3-10 kHz in the 50 deg. swept interaction. This increase in dominant frequencies is initially small as the interaction is swept from  $\lambda_C = 0$  to 20 deg. but becomes more rapid with increasing sweep ( $\lambda_C \geq 25$  deg.). Since the dominant pressure fluctuations are a result of the separation shock motion, these figures clearly demonstrate that the separation shock crossings occur at much higher frequencies in swept interactions than they do in the unswept case, for a fixed incoming turbulent boundary layer. Separation shock dynamics per se will be discussed in more detail in the following sections.

#### 4.6 Intermittent Region Length

All results presented so far have been obtained using standard time series analysis techniques. Questions regarding the separation shock dynamics, however, can best be addressed using conditional sampling algorithms, some of which have been discussed in the Analysis Techniques section of this paper. Most of the results discussed below have been obtained using such algorithms.

The intermittent region is the region in which the separation shock foot translates. Intermittency,  $\gamma$ , at a point in the intermittent region is the fraction of total time that the separation shock foot is upstream of that point. Whether it is upstream or downstream has been determined using the two-threshold boxcar conversion technique developed by Dolling and Brusniak,<sup>6</sup> and was briefly explained earlier. By definition, the intermittent region length,  $L_i$ , extends from  $\gamma \approx 0.0$  to  $\gamma \approx 1.0$  and is determined from the intermittency distribution. In the unswept interaction, this is a fairly straightforward task. In swept interactions, however, there are two complicating factors. First is the spatial resolution problem which arises due to the shrinking of the intermittent region. Second the evolution of the surface pressure fluctuations with sweep is such that there is a blurring of the distinction between disturbed and undisturbed levels in the pressure histories. This is directly attributable to the fact that the shock motion is at higher frequency and occurs over a shorter

distance. These two factors in combination make it difficult to calculate the intermittency at stations which have large values. The net result is that the downstream end of the intermittent region is undetectable directly. In fact, the maximum detectable intermittency decreases as the interaction is progressively sweptback. The distance from  $\gamma \approx 0.02$  to  $\gamma \approx 0.98$  is taken as the length of the intermittent region. For those cases, in which the downstream end of the intermittent region could not be detected, the distance from  $\gamma \approx 0.02$  to  $\gamma \approx 0.50$  was measured and then doubled. This procedure is justified since the separation shock foot position within the intermittent region is randomly distributed (as will be shown later).

Figure 10 shows the normalized length of the intermittent region,  $L_i / \delta_o$ , along the outermost row of each interaction as a horizontal line. In this representation, each line forms a scale ranging from  $\gamma \approx 0.98$  to  $\gamma \approx 0.02$ . The relative position of the separation line is indicated by a marker on each of these lines. The decreasing length of these horizontal lines shows quite clearly the shrinking of the intermittent region as the interaction is progressively swept back. Furthermore, the changing position of the marker indicating the location of the separation line shows that the separation location from surface flow visualization moves upstream in the intermittent region towards lower and lower values of intermittency. A plausible explanation of why this forward motion of the separation line occurs was given by Dolling et al.<sup>17</sup> In brief, the line of coalescence in surface flow patterns, i.e., the separation line, occurs at a location where the time-averaged wall shear stress is zero. In the unswept interaction the wall shear stress in the downstream direction,  $(\tau_w)_d$ , is much greater than the wall shear stress in the upstream direction,  $(\tau_w)_u$ , such that the coalescence of surface streaklines occurs at the downstream end of the intermittent region. Whereas in the swept interactions, the upstream component of the wall shear stress increases appreciably, hence changing the relative position in the intermittent region where the time-averaged wall shear stress becomes zero. As a result, the line of coalescence of surface streaklines shifts progressively upstream in the intermittent region.

#### 4.7 Separation Shock Dynamics

Standard time-series analysis techniques have been used to examine the separation shock foot position history,  $X_s(t)$ , and separation shock foot velocity history,  $V_s(t)$ , the derivations of which were explained in the Analysis Techniques section.

Figures 11a and 11b show the probability density functions of the separation shock foot position along row M of the unswept and along row F of the 30 deg. swept interaction,

respectively. The probability is given by  $N_i / (N_T * W)$  where  $N_i$  is the number of points in bin  $i$ ,  $N_T$  the total number of points and  $W$  the width of the window. Results are plotted together with the Gaussian distribution (indicated by the solid line). Clearly, the separation shock foot is normally distributed in the intermittent region, independent of the interaction in which it is generated. It should be noted that similar results were obtained along all rows in all the interactions studied.

Normalized power spectral densities of  $X_s(t)$  in the unswept interaction, and along the outermost row of all swept interactions are plotted in Fig. 12. Each curve is identified by a marker which is described in the legend. In this representation, the area under the curve over a given range of frequencies is the contribution to the variance from that frequency range in separation shock foot position history. In other words, normalized power spectral densities show dominant frequencies in separation shock motion. Clearly, all frequencies in separation shock motion are lower than about 15 kHz. Also, dominant frequencies in separation shock motion increase as the interaction is progressively swept back. It should be noted that the same trends were observed along other rows of all swept interactions.

Probability density functions of  $V_s(t)$  have also been calculated for upstream and downstream motions of the separation shock foot. Typical probability density functions of velocity for upstream and downstream motions are plotted in Fig. 13a and 13b, respectively. Again, the probability is given by  $N_i / (N_T * W)$  where  $N_i$  is the number of points in bin  $i$ ,  $N_T$  the total number of points and  $W$  the width of the window. Clearly, separation shock velocities are highly skewed and the most probable velocities are about one half of the mean shock velocity. Mean shock velocities measured along the outermost rows in each interaction are tabulated in Table 3 for upstream,  $(\bar{V}_s)_u$ , and downstream,  $(\bar{V}_s)_d$ , motions of the separation shock. It appears that mean shock velocities in either direction are not measurably different. Furthermore, mean shock velocities in each interaction seem to be fairly constant and equal to about 3% of the freestream velocity. It appears that there is a slight increase in the mean shock velocities with increasing sweep. It should be noted that mean velocities from  $V_s(t)$  are calculated from all the data as the shock moves throughout the entire intermittent region. This is advantageous in comparing separation shock velocities in different interactions since the entire motion of the separation shock is given by a single value.

$\lambda_C$ (deg.)	Row	$(\bar{V}_s)_u$ (ft/s)	$(\bar{V}_s)_d$ (ft/s)
0	M	-70.7	72.2
10	O2	-68.1	70.1
20	O2	-71.4	68.4
25	O2	-79.9	79.3
30	F	-87.1	89.3
40	F	-85.5	87.4
50	F	-78.2	78.9

Table 3 Mean shock velocities

To summarize, the results from conditional sampling algorithms have shown that the separation shock dynamics defined in terms of the separation shock foot history and its statistics are essentially the same in all interactions, regardless of the sweepback. The separation shock foot position in the intermittent region is normally distributed, and its velocity in either direction does not change with increasing sweep. The primary effect of sweepback on the separation shock dynamics is the decreasing of the length of its intermittent region in which the separation shock travels. Although the dominant separation shock frequencies increase with increasing sweepback, this can be attributed directly to the decrease in the length of the intermittent region. This suggests that the physical mechanisms responsible for the separation shock unsteadiness in swept compression ramp interactions are the same as in the unswept one.

#### 4.8 Spanwise Variations in Separation Shock Dynamics

To determine spanwise variations in the separation shock dynamics, measurements along rows M, O2, and F in the 30 deg. interaction were analyzed, and compared. Normalized power spectral densities of  $P_w(t)$  and  $X_s(t)$  measured along rows M, O2, and F in the 30 deg. interaction are plotted in Figs. 14a and 14b. Each curve is identified by a marker which is described in the legend. The same trends are apparent in both figures. The dominant frequencies of the separation shock motion decrease in the spanwise direction in a given interaction. Given that all three of these rows are in the region of quasi-conical symmetry, and that shock velocities along each of these rows are roughly constant and equal; the only possible explanation for the decrease in the dominant frequencies of the separation

shock motion is the increase in the intermittent region length scale.

This is an important result because, by simple extrapolation, it suggests that the low frequency, large amplitude pressure fluctuations -- comparable to or more intense than those in the unswept interaction -- may occur at spanwise distances where the intermittent length scales become comparable. This can neither be proved or disproved with current data, however, if the near field trends provide any indication at all, then the fluctuating loads in the far field of highly swept compression ramp interactions may actually be more intense and severe than in unswept ones.

## 5.0 CONCLUSIONS

To examine the effects of sweepback on the unsteady separation in Mach 5 compression ramp interactions, measurements of wall pressure fluctuations have been made in interactions generated by unswept, and 10, 20, 25, 30, 40, and 50 deg. interactions. The streamwise ramp angle was 28 deg. in all cases. The data were analyzed using standard time series analysis techniques and conditional sampling algorithms. The following conclusions were drawn:

- (i) The 10 deg. interaction is cylindrically symmetric, whereas the entire span of the 20 deg. interaction is within the inception zone. All highly swept interactions (i.e.,  $\lambda_C \geq 25$  deg.) are quasi-conically symmetric.
- (ii) In highly swept interactions, the rms distributions of pressure fluctuations as well as the mean pressure distributions are quasi-conically symmetric. Rms levels decrease globally with increasing sweep as does the maximum rms generated by the translating separation shock. Steep gradients immediately upstream of the corner line in both mean and rms distributions suggest the existence of a secondary vortical structure within the primary vortex, although this is not readily visible in surface flow patterns.
- (iii) The length of the intermittent region, over which the separation shock foot translates, decreases with increasing sweep. In a given interaction, the length of the intermittent region grows spanwise.
- (iv) Dominant separation shock frequencies, observed in both surface pressure fluctuations and separation shock foot histories, increase from about 0.3-0.5 kHz for unswept flow to about 2-7 kHz in highly swept flows. In a given interaction, shock frequencies decrease spanwise.
- (v) Separation shock dynamics defined in terms of the shock foot history and its statistics are essentially the same in all interactions. The separation shock foot position is normally distributed, and the mean shock velocities are essentially equal. The only difference is in the length of the region in which the separation shock moves. Higher frequencies are a direct result of the decrease in the length scale of the separation shock motion.

## 6.0 REFERENCES

- 1 Bogdonoff, S. M., "Some Experimental Studies of the Separation of Supersonic Turbulent Boundary Layers," Rept. 336, Aero. Eng. Dept., Princeton Univ., June 1955.
- 2 Dolling, D. S. and Murphy, M. T., "Unsteadiness of the Separation Shock Wave Structure in a Supersonic Compression Ramp Flowfield," *AIAA Journal*, Vol. 21, No. 12, 1983, pp. 1628-1634.
- 3 Dolling, D. S. and Or, C. T., "Unsteadiness of the Shock Wave Structure in Attached and Separated Compression Ramp Flowfields," *Experiments in Fluids*, Vol. 3, 1985, pp. 24-32.
- 4 McClure, W. B. and Dolling, D. S., "Exploratory Study of Effects of Suction near Reattachment on the Unsteadiness of a Mach 5 Compression Ramp Interaction," AIAA Paper 91-1767, June 1991.
- 5 Dolling, D. S. and Brusniak, L., "Correlation of Separation Shock Motion in a Cylinder-Induced Interaction with Pressure Fluctuations under the Separated Region," AIAA Paper 91-0650, Jan. 1991.
- 6 Dolling, D. S. and Brusniak, L., "Separation Shock Motion in Fin, Cylinder, and Compression Ramp-Induced Turbulent Interactions," *AIAA Journal*, Vol. 27, No. 6, 1989, pp. 734-742.
- 7 Gramann, R. A. and Dolling, D. S., "Dynamics of Separation and Reattachment in a Mach 5 Unswept Compression Ramp Flow," AIAA Paper 90-0380, Jan. 1990.
- 8 Erenkil, M. E. and Dolling, D. S., "Unsteady Wave Structure near Separation in a Mach 5 Compression Ramp Interaction," *AIAA Journal*, Vol. 29, No. 5, 1991, pp. 728-735.
- 9 Marshall, T. A. and Dolling, D. S., "Spanwise Properties of the Unsteady Separation Shock in a Mach 5 Unswept Compression Ramp Interaction," AIAA Paper 90-0377, Jan. 1990.
- 10 Kussoy, M. I., Brown, J. D., Brown, J. L., Lockman, W. K., and Hortsman, C. C., "Fluctuations and Massive Separation in Three-Dimensional Shock-Wave/Boundary-Layer Interactions," 2nd International Symposium on Transport Phenomena in "Turbulent Flows", Univ. of Tokyo, Tokyo, Japan, Oct. 1987.
- 11 Settles, G. S. and Dolling, D. S., "Swept Shock/Boundary-Layer Interactions - Tutorial and Update," AIAA Paper 90-0375, Jan. 1990.
- 12 Settles, G. S. and Dolling, D. S., "Swept Shock Wave Boundary Layer Interactions," in *AIAA Progress in Astronautics and Aeronautics: Tactical Missile Aerodynamics*,



- edited by M. Hemsch and J. Nielsen, Vol. 104, AIAA, New York, 1986, pp. 297-379.
- 13 Tran, T. T., "An Experimental Investigation of Unsteadiness in Swept Shock Wave/Turbulent Boundary Layer Interactions," Ph.D. Thesis, Mechanical and Aerospace Eng. Dept., Princeton Univ., March 1987.
  - 14 Tan, D. K. M., Tran, T. T., and Bogdonoff, S. M., "Surface Pressure Fluctuations in a Three Dimensional Shock Wave Turbulent Boundary Layer Interaction," AIAA Paper 85-0125, Jan. 1985.
  - 15 Tran, T. T., Tan, D. K. M., and Bogdonoff, S. M., "Surface Pressure Fluctuations in a Three Dimensional Shock Wave Turbulent Boundary Layer Interaction at Various Shock Strengths," AIAA Paper 85-1562, July 1985.
  - 16 Schmisser, J. D. and Dolling, D. S., "Unsteady Separation in Sharp Fin-Induced Shock Wave / Turbulent Boundary Layer Interaction at Mach 5," AIAA Paper 92-0748, Jan. 1992.
  - 17 Dolling, D. S., Boitnott, T., and Erenkil, M. E., "Effects of Moderate Sweepback on the Separation Shock Wave Dynamics in a Mach 5 Compression Ramp Interaction," AIAA Paper, 91-0254, Jan. 1991.
  - 18 McClure, W. B., Private Communication, Oct. 1991.
  - 19 Boitnott, T., "An Experimental Study of the Dynamics of Moderately Swept Compression Ramp-Induced Separation at Mach 5," M.S. Thesis, Dept. of Aero. Eng. and Eng. Mech., The Univ. of Texas at Austin, Aug. 1990.
  - 20 Settles, G. S. and Kimmel, R. L., "Similarity of Quasi-Conical Shock Wave Turbulent Boundary Layer Interactions," *AIAA Journal*, Vol. 24, No. 1, pp. 47-53, 1986.

## 7.0 FIGURES

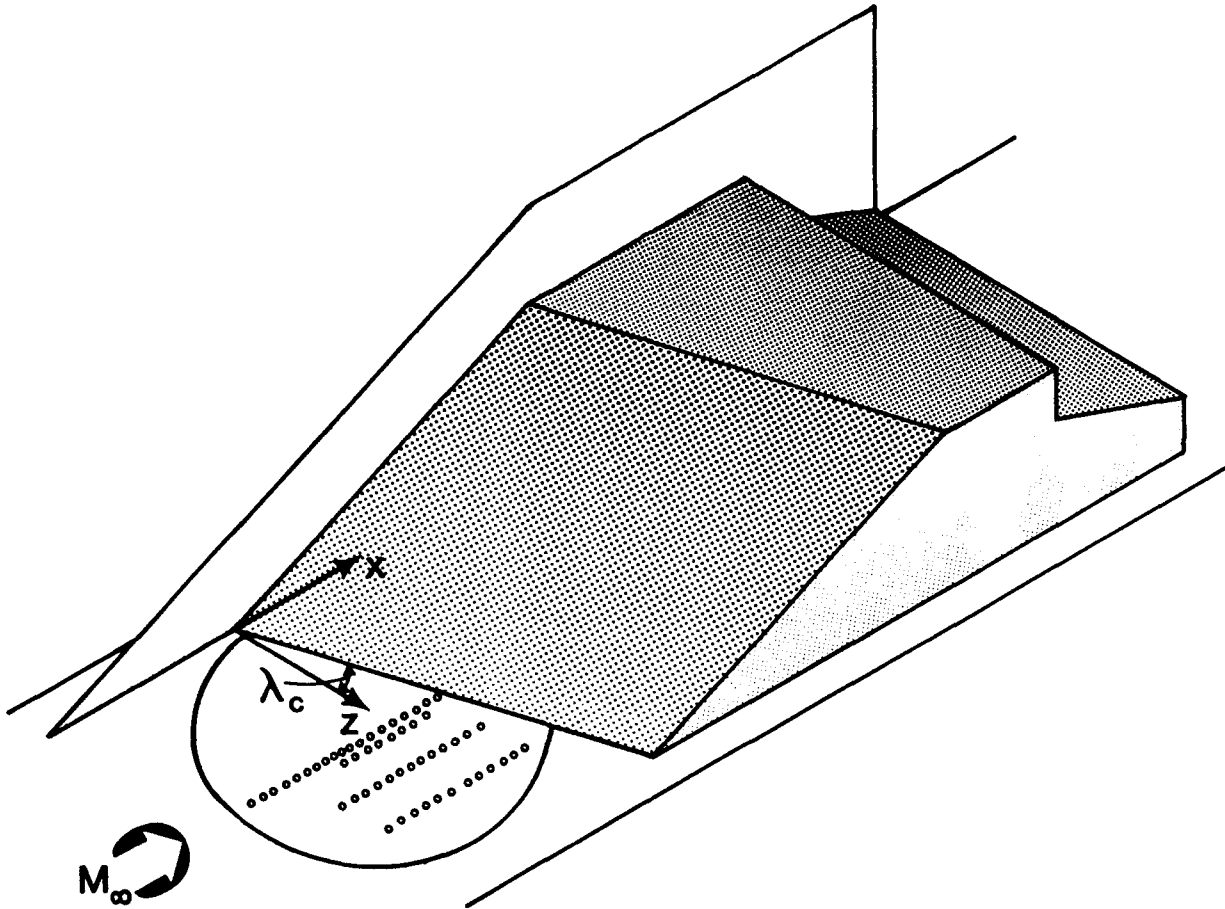


Fig. 1 Isometric sketch of the model and the transducer plug.

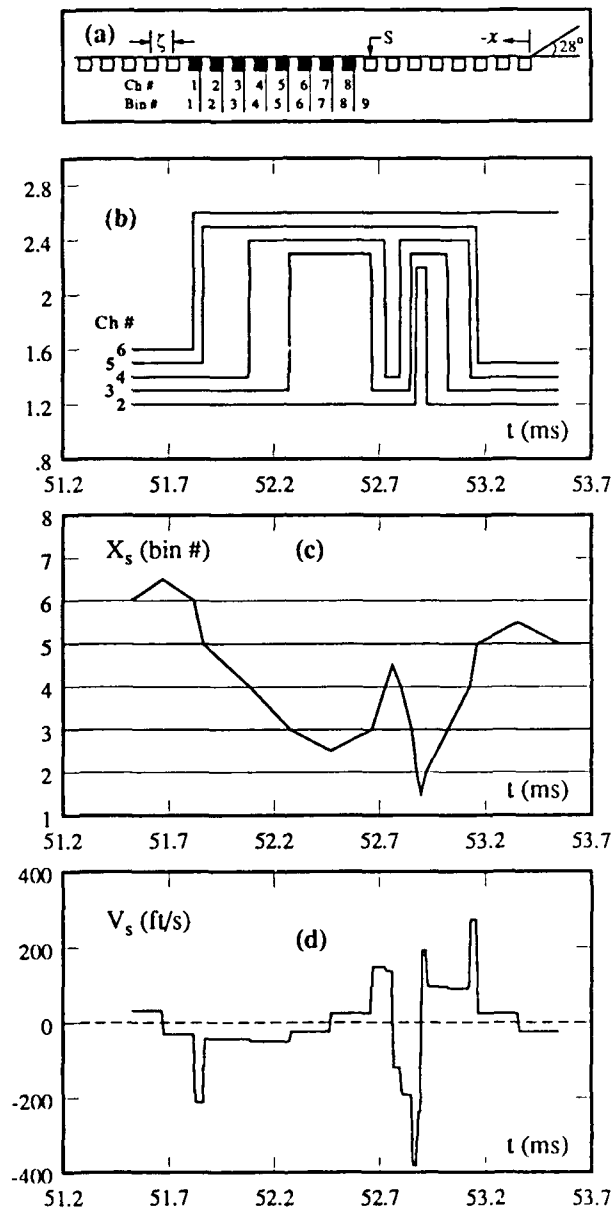


Fig. 2 Conversion technique for the separation shock foot position history.

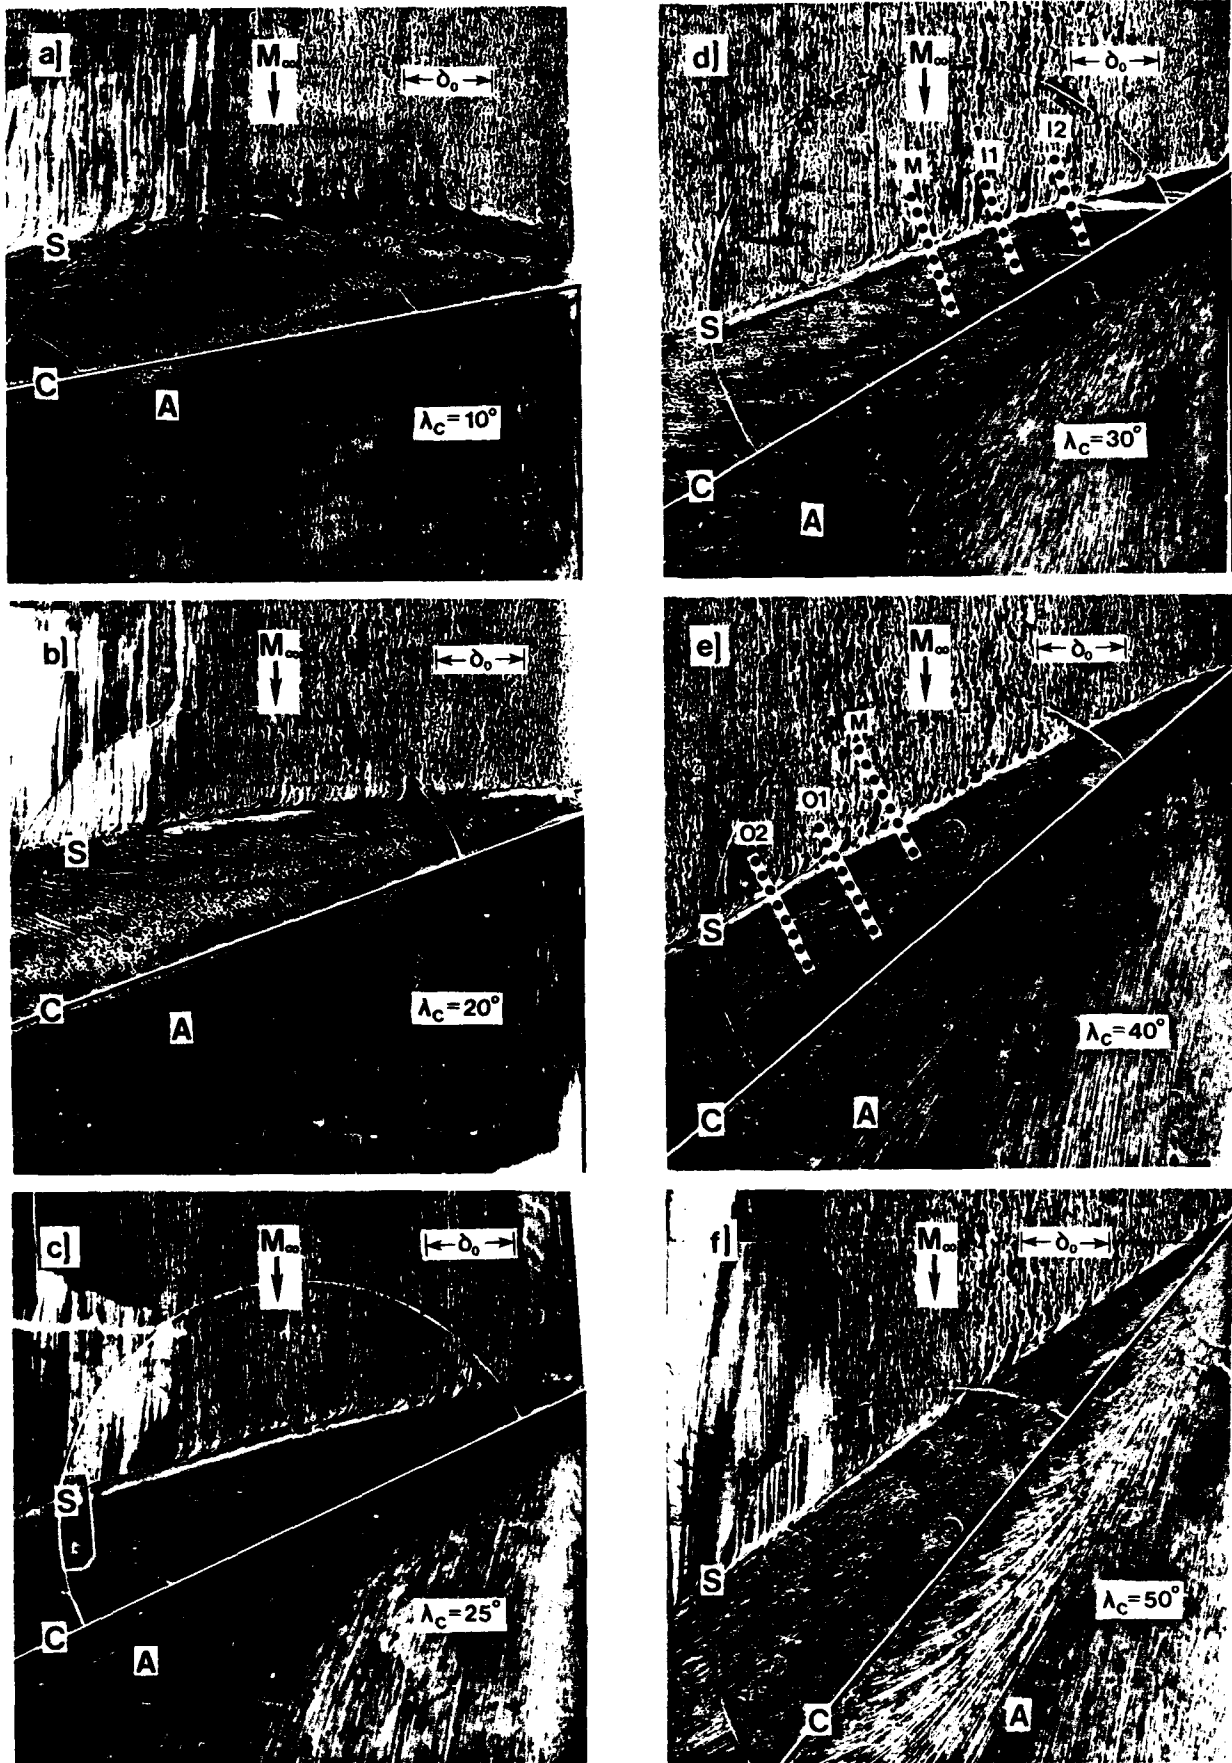


Fig. 3 Surface flow patterns for swept compression ramp interactions.

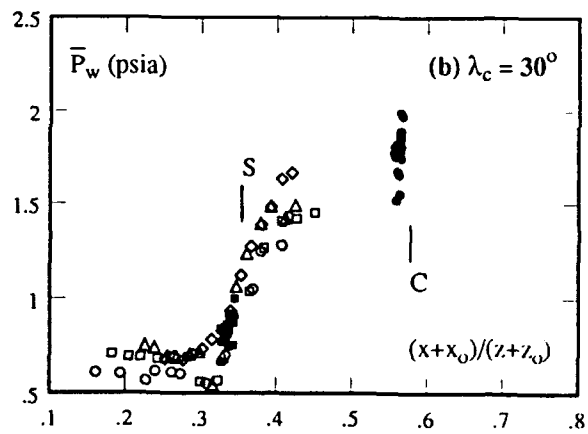
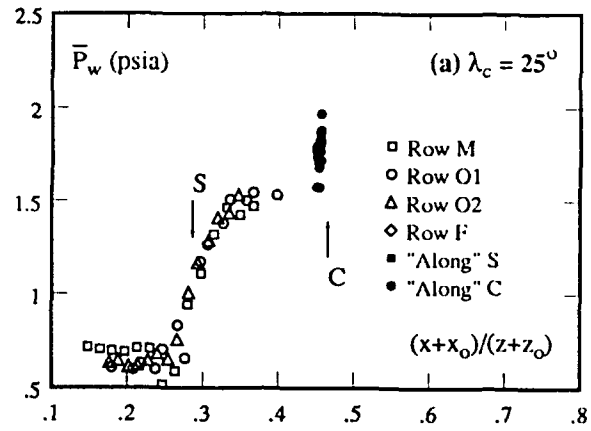


Fig. 4 Distributions of  $\bar{P}_w$  in conical coordinates (parts (a) and (b)).

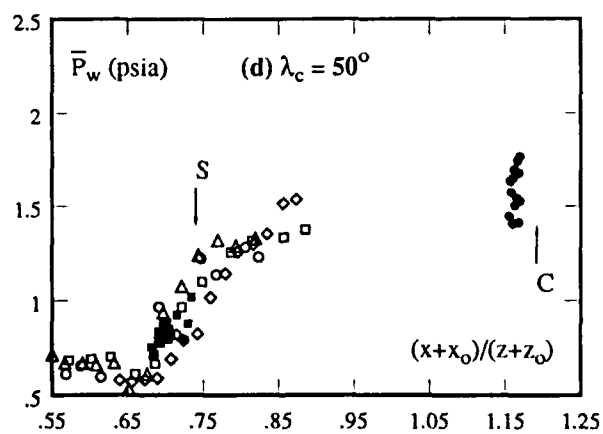
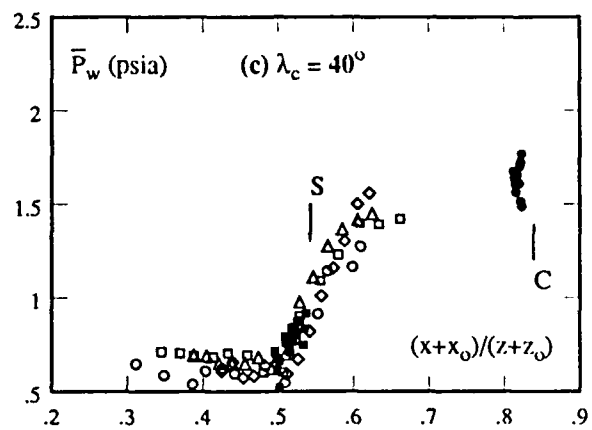


Fig. 4 Distributions of  $\bar{P}_w$  in conical coordinates (parts (c) and (d)).

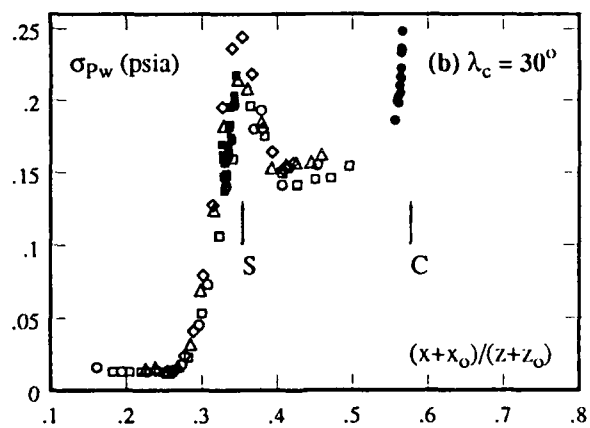
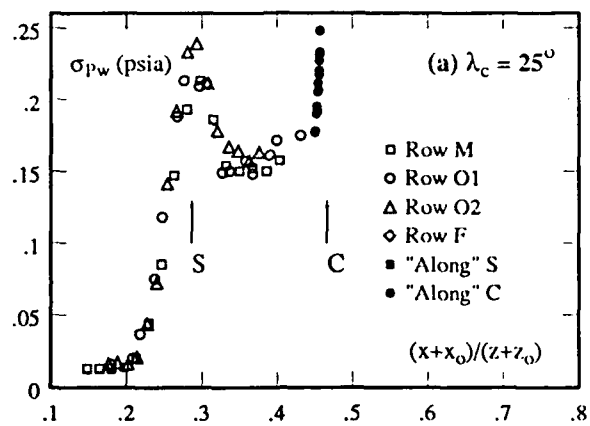


Fig. 5 Distributions of  $\sigma_{pw}$  in conical coordinates (parts (a) and (b)).

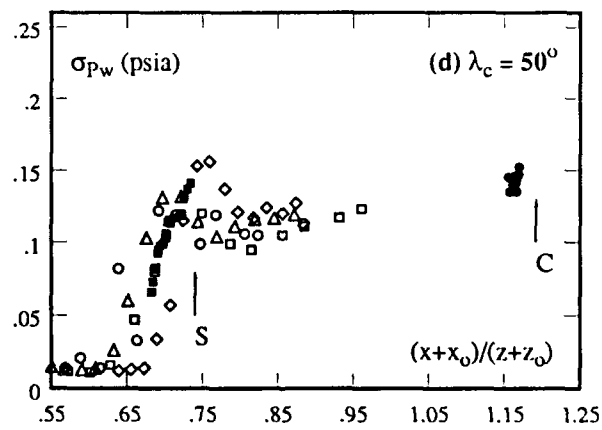
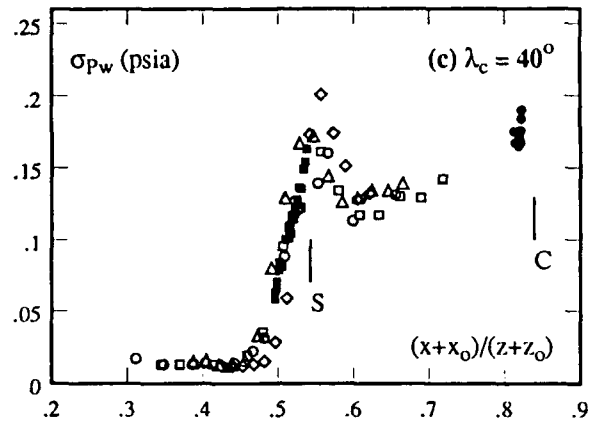


Fig. 5 Distributions of  $\sigma_{p_w}$  in conical coordinates (parts (c) and (d)).



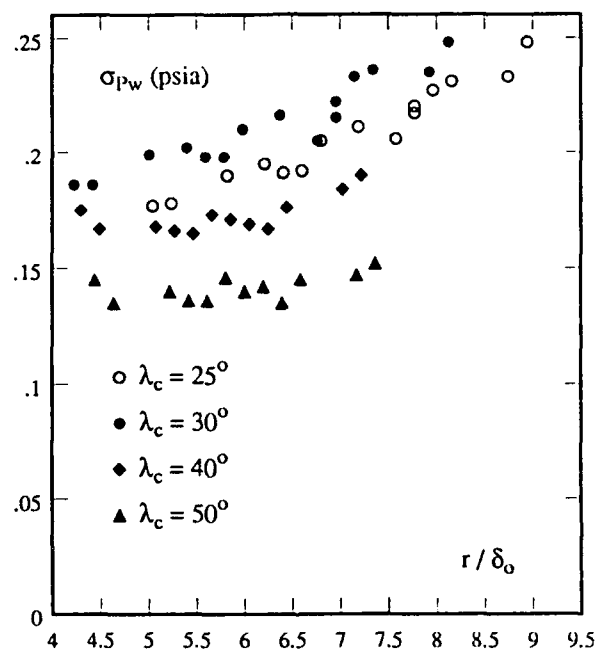


Fig. 6 Variation of  $\sigma_{pw}$  along the corner line.

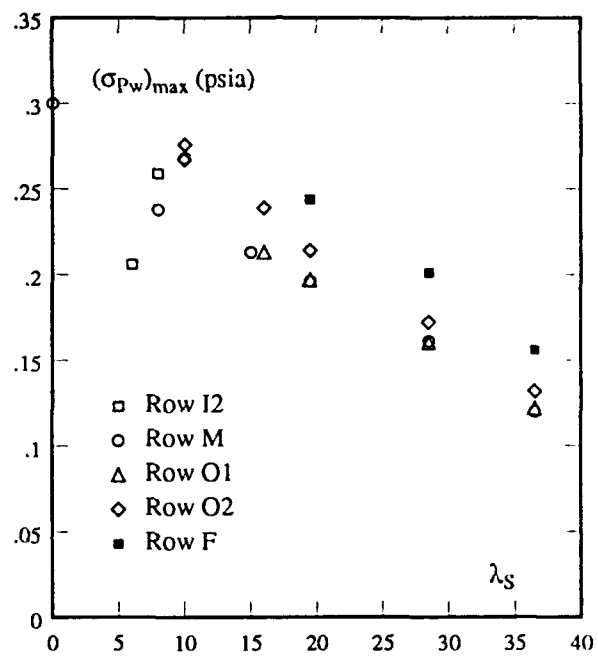


Fig. 7 Variation of  $(\sigma_{pw})_{max}$  with local sweepback angle of the separation line,  $\lambda_s$ .

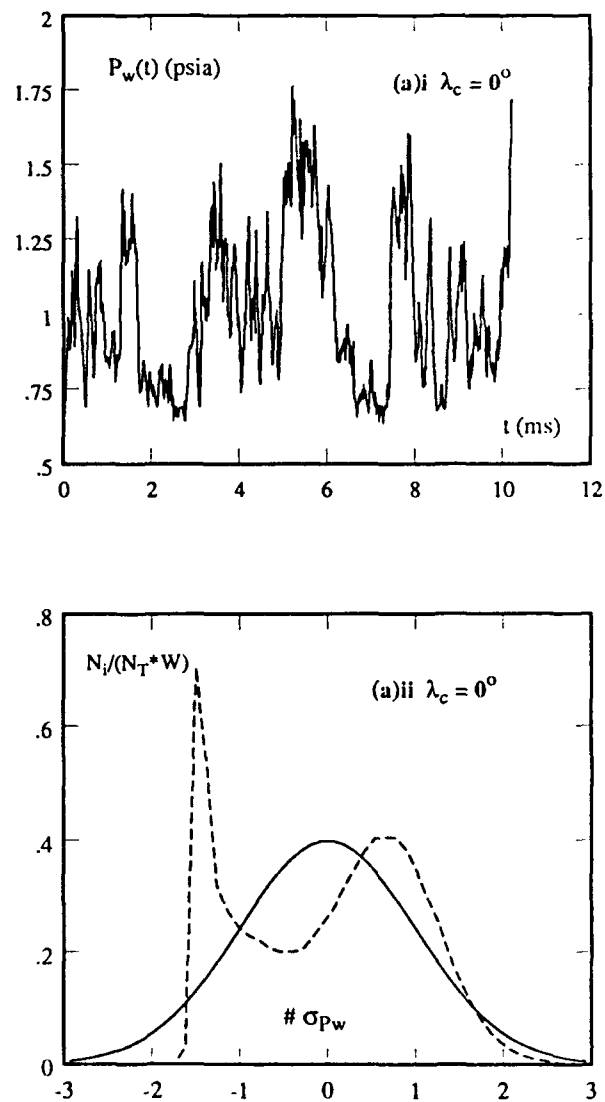


Fig. 8 Typical wall pressure histories and corresponding probability density functions for (a)  $\lambda_c = 0$  deg.

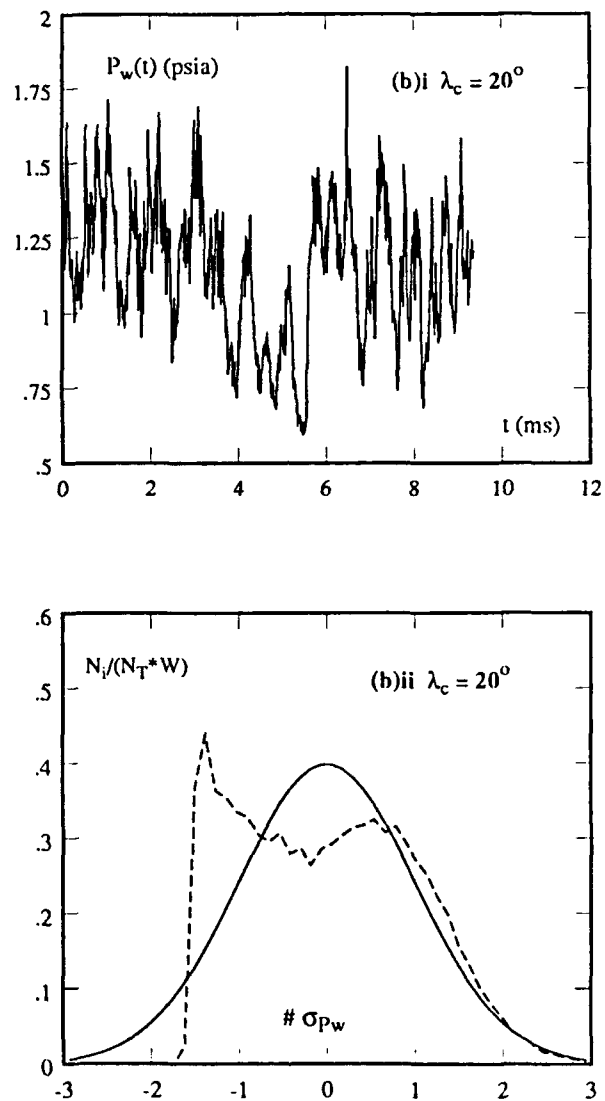


Fig. 8 Typical wall pressure histories and corresponding probability density functions for (b)  $\lambda_c = 20$  deg.

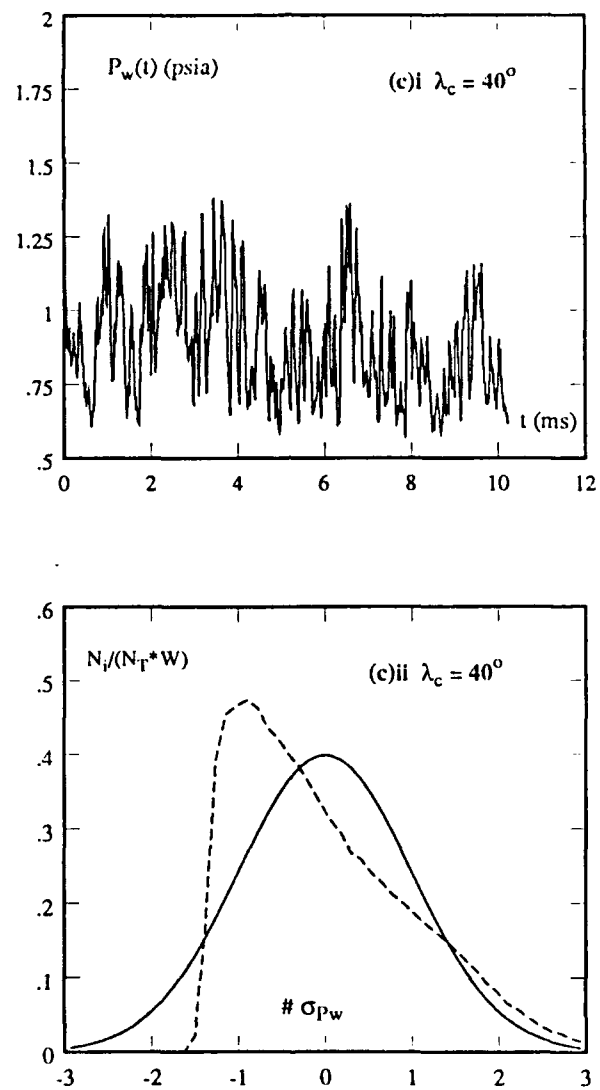


Fig. 8 Typical wall pressure histories and corresponding probability density functions for (c)  $\lambda_c = 30$  deg.

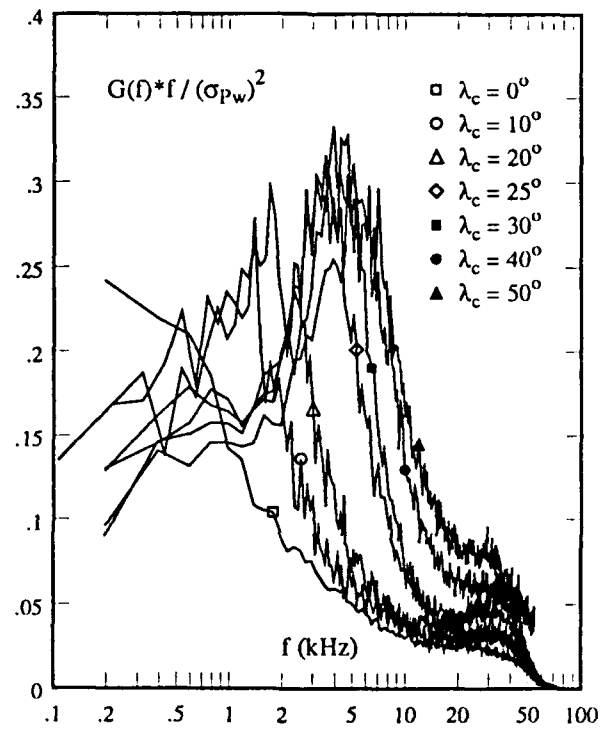


Fig. 9 Power spectral densities at  $(\sigma_{pw})_{max}$  along row O2.

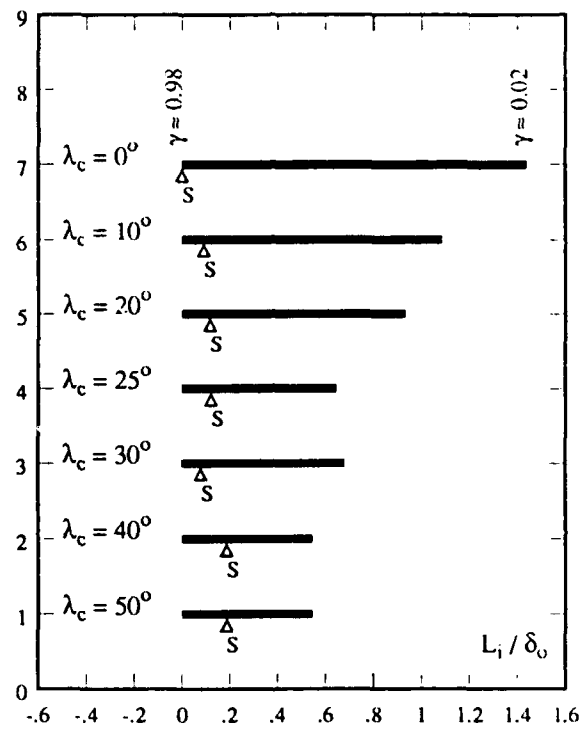


Fig. 10 Variation of intermittent region length.

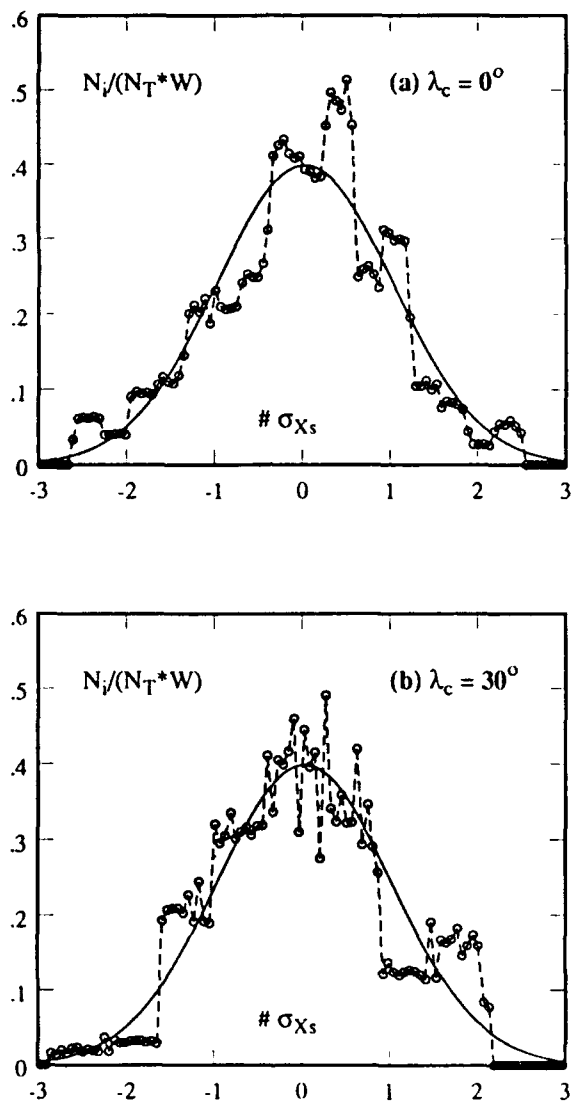


Fig. 11 Probability density functions of  $X_s(t)$  for (a)  $\lambda_c = 0$  deg., (b)  $\lambda_c = 30$  deg.



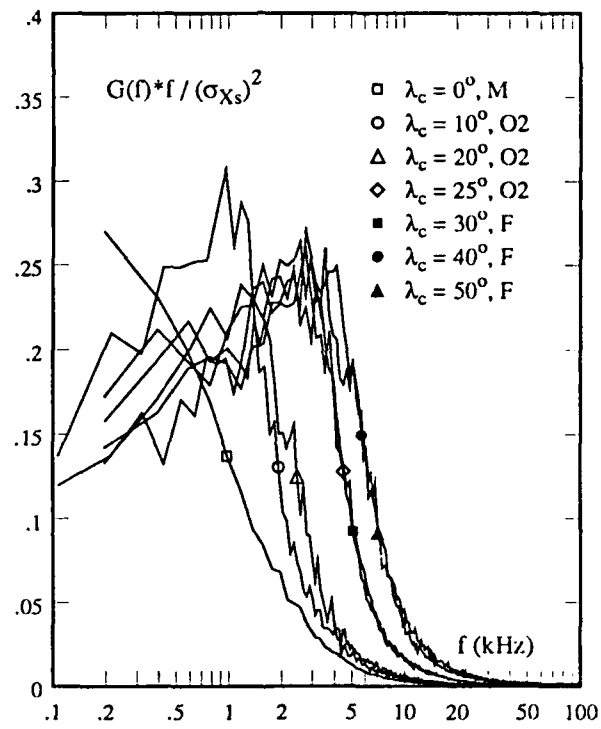


Fig. 12 Power spectral densities of  $X_s(t)$ .

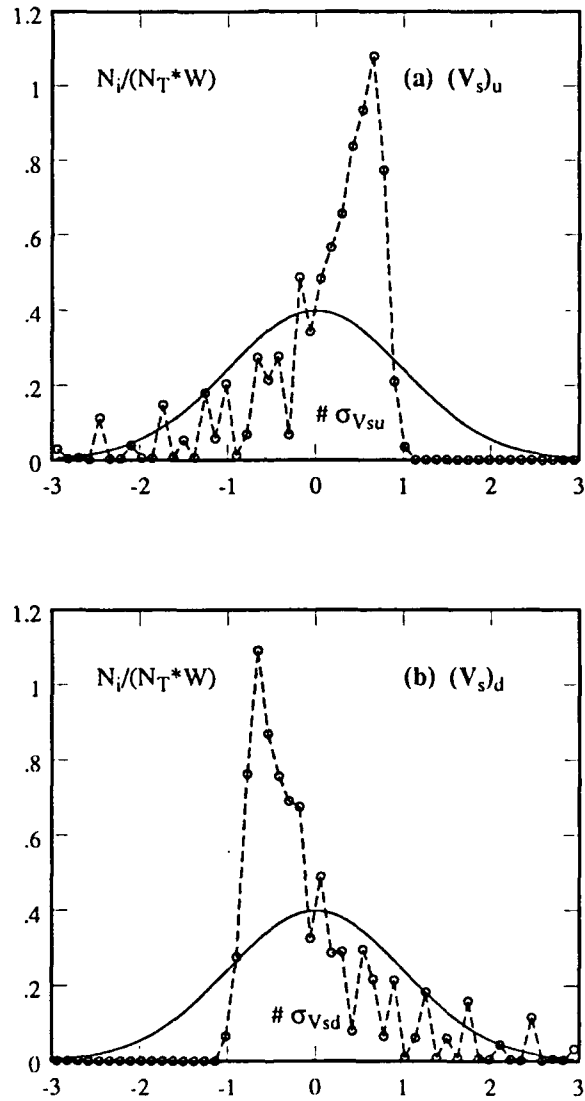


Fig. 13 Probability density functions of  $V_s(t)$  for (a) upstream, and (b) downstream velocities.

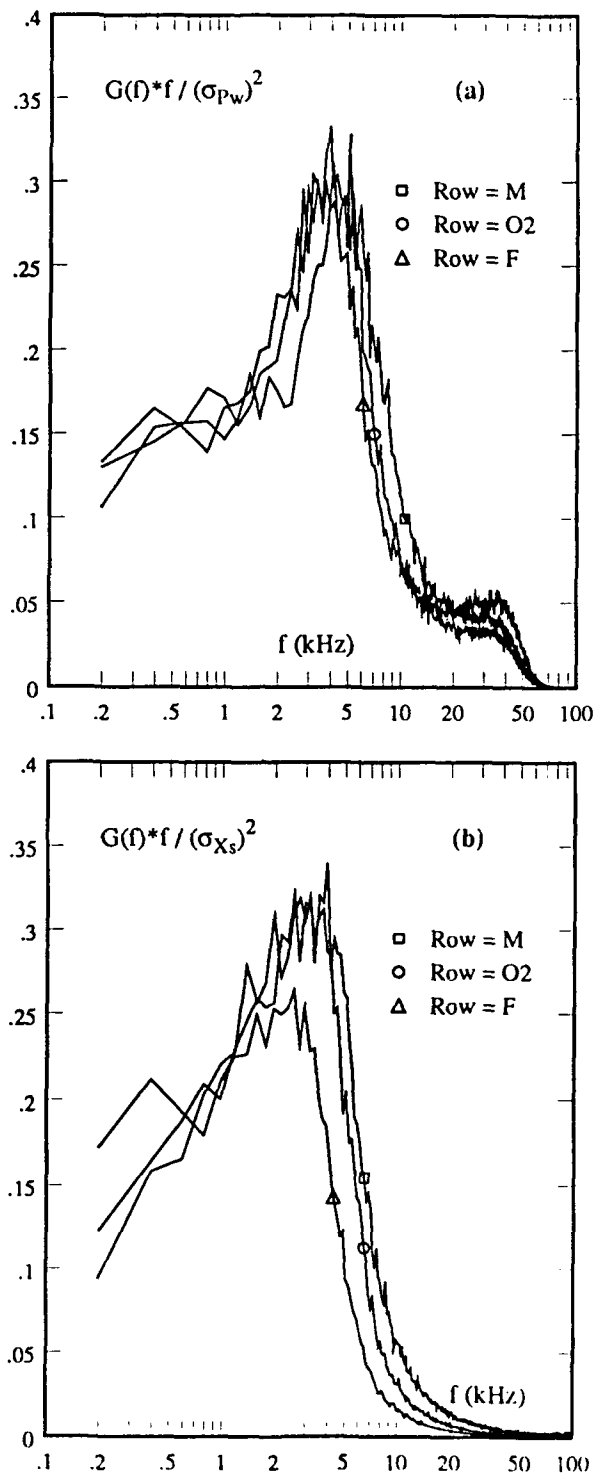


Fig. 14 Power spectral densities of (a)  $\bar{P}_w(t)$ , and (b)  $X_s(t)$  for  $\lambda_C = 30$  deg.