

AD-A265 412

DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188



This information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, completing and reviewing the collection of information, sending comments regarding this burden estimate or any aspect of this collection of information, including this burden estimate, to Washington Headquarters Services, Directorate for Information Operations and Services, Paperwork Reduction Project (0704-0188), Washington, DC 20543.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE 05/26/93	3. REPORT TYPE AND DATES COVERED Semi-Annual 12/1/92 - 05/31/93	
4. TITLE AND SUBTITLE An Investigation of the Channel Crosstalk in Optical Heterodyne Controlled Phased Array Radars.			5. FUNDING NUMBERS Award # N00014-92-J-1190
6. AUTHOR(S) Alan Rolf Mickelson			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Alan Rolf Mickelson Department of Electrical and Computer Engineering Campus Box 425 University of Colorado Boulder, CO 80309-0425			8. PERFORMING ORGANIZATION REPORT NUMBER
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Arthur K. Jordan Office of Naval Research 800 North Quincy Street Arlington, VA 22217-5000			10. SPONSORING, MONITORING AGENCY REPORT NUMBER
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE

S E D

DTIC  
ELECTE  
JUN 07 1993

93-12584



6rpf

**ABSTRACT (Maximum 200 words)**

The principal objective of this project is to investigate problems associated with achieving the drive/read-out system complexity necessary to control a phased array antenna with optical heterodyne techniques. The approach has been to study the problems associated with device arrays of single sideband modulators that would be necessary to control the amplitudes and phases of all signals delivered to a phased array front end. However, recent results of closely related research, when combined with results of this project, have led to a new viewpoint of the problem. It appears that a greater degree of complexity of control can be achieved by modulating a small number of optical channels and locking them to a previously self-locked array of active radiating elements. This approach promises to lead to a better system solution as well as a technical study which uncovers many new interesting problems in the computer aided analysis of nonlinear electromagnetic systems.

93 6 04 010

14. SUBJECT TERMS Microwave Optics, Phased Array Radar, Nonlinear Dynamics, Injection Locking, Optical Sampling			15. NUMBER OF PAGES 6
			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL

# SEMI-ANNUAL PROGRESS REPORT

for Office of Naval Research  
for the period December 1, 1992 through May 31, 1993

## 1. Contract Title:

An Investigation of the Channel Crosstalk in Optical Heterodyne  
Controlled Phased Array Radars

### Principal Investigator:

Professor Alan R. Mickelson  
Department of Electrical and Computer Engineering  
Campus Box 425  
University of Colorado  
Boulder, CO 80309-0425

### Program Manager:

Dr. Arthur Jordan

DTIC QUALITY INSPECTED 2

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification .....	
By .....	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

## 2. Technical Objectives:

The principal objective of this project is to investigate problems associated with achieving the drive/read-out system complexity necessary to control a phased array antenna with optical heterodyne techniques. In particular, this work concentrates on multi-channel microwave optical conversion.

## 3. Approach:

The approach has been to study the problems associated with device arrays of single sideband modulators that would be necessary to control the amplitudes and phases of all signals delivered to a phased array front end. However, recent results of closely related research, when combined with results of this project, have led to a new viewpoint of the problem. It appears that a greater degree of complexity of control can be achieved by modulating a small number of optical channels and locking them to a previously self-locked array of active radiating elements. This approach promises to lead to a better system solution as well as a technical study which uncovers many new interesting problems in the computer aided analysis of nonlinear electromagnetic systems.

## 4. Accomplishments:

Closely allied research in the MIMICAD center has led to the development of a electromagnetic analysis technique called "ZOOM" which is significantly faster than full wave techniques. This computer aided technique offers several advantages over competing methods while not sacrificing any of the accuracy of full wave techniques, at least, when the analysis of non-uniform coplanar waveguide structures in a simple mode is considered. The first reference of section 7 details this technique which is based on combining quasi static analysis with a "bootstrapping" dynamical fix-up based Ricatti equation solutions.

One motivation for developing "ZOOM" was the existence of our technique for mapping the amplitude and phase of microwave fields throughout substrates.

This technique was applied to an active surface during this period (see b and d of section 7) with quite surprising results. Electromagnetic theory predicted Floquet mode currents while measurements indicated currents periodic in the element spacing rather than in the wavelength. This surprising result seems to be explainable by the non-linear nature of the line under consideration and how the nonlinearity leads to a current "phase transition" as the oscillation power is increased.

Optical Injection locking measurements made on field effect transistor (FET) oscillator circuits have demonstrated the efficacy of locking microwave elements to a control signal through optical means. Even with a weak control oscillator, low modulation index, and low power injection level, large amounts of power can be locked precisely to the weak control oscillator.

5. **Significance:**

The form of the measured current distribution along with the oscillator locking results indicate that a small number of optically injected signals can efficiently control a large number of active high power antenna elements. A working understanding of such an array will require effective electromagnetic modeling as evidenced by the unexpected current distribution result. A most positive attribute of the program "ZOOM" is its ability to easily interface with highly nonlinear line elements. By combining "ZOOM" with simple nonlinear FET models it should be possible to make an electromagnetic model in which the nonlinearity plays a fundamental role in system behavior of optically addressed active antenna elements.

6. **Future Efforts:**

Present work involves trying to physically understand locked array results while simultaneously trying to modify existent software to accurately analyze optically addressed antenna elements.

7. **Publications and Presentations Partially Supported Under This Grant December 1, 1992 through May 31, 1993.**

- a) K.Y. Chen, P. Biernacki, Z.B. Popovic, and A.R. Mickelson, "Current and Field Distribution Across A 25-Hemt Grid Oscillator," National Radio Science Meeting, URSI, Boulder (January 1993).
- b) D.R. Hjelme, V. Radisic, Z.B. Popovic, and A.R. Mickelson, "Experimentally Verifiable Modeling of Parasitics in Coplanar Waveguides," National Radio Science Meeting, URSI, Boulder (January 1993).
- c) S.L. Kwiatkowski, D.R. Hjelme, and A.R. Mickelson, "Optical Waveguide Lenses for Integrated Optical Components," National Radio Science Meeting, URSI, Boulder (January 1993).
- d) E. Primas, V. Jevremovic, A.R. Mickelson, and Z. B. Popovic, "Microwave Characterization of Polymeric Materials for Electro-Optic Devices," National Radio Science Meeting, URSI, Boulder (January 1993).

- e) S. Lin, W. Feng, H.B. Hooker, Z.B. Popovic, and A.R. Mickelson, "Polymeric Materials Processing and Optical Properties of High Speed Modulators," National Radio Science Meeting, URSI, Boulder (January 1993).
- f) S.M. Genco, J. Buetow, Z.B. Popovic, and A.R. Mickelson, "Enhanced SNR and Stability of Microwave MESFET Oscillators via Optically Injected Signals," National Radio Science Meeting, URSI, Boulder (January 1993).


### **Guided Wave Optics Laboratory Reports**

D.R. Hjelme, V. Radisic, Z.B. Popovic, and A.R. Mickelson, "Experimentally Verifiable Modeling of Coplanar WaveGuide Discontinuities," submitted to IEEE Microwave Theory and Techniques (1993).


8. **Participants:**  
Professor Alan R. Mickelson  
Hyesook Hong

# Comparison of Calculated and Data Sheet S-parameters


## vs Frequency (GHz)

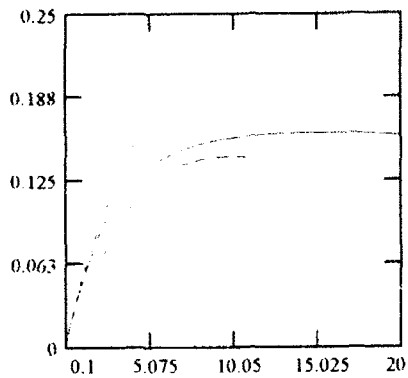


— Calculated |S12|  
- - - Fujitsu, FLO16XV  
... Fujitsu, FSC11X  
- . - Avantek, ATF10236

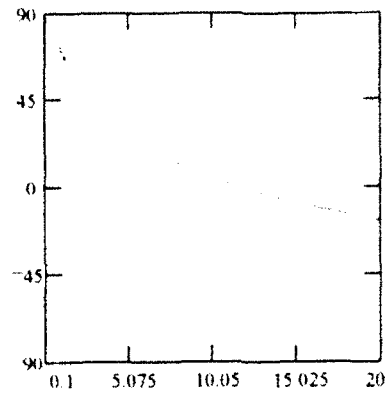

— Calculated arg(S12)  
- - - Fujitsu, FLO16XV  
... Fujitsu, FSC11X  
- . - Avantek, ATF10236




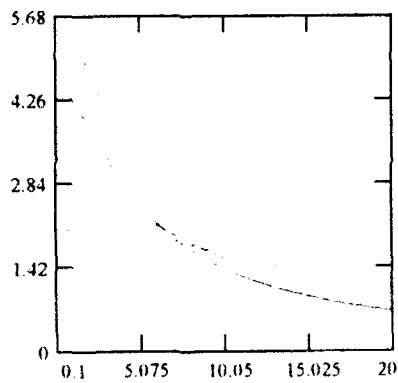


— Calculated |S21|  
- - - Fujitsu, FLO16XV  
... Fujitsu, FSC11X  
- . - Avantek, ATF10236

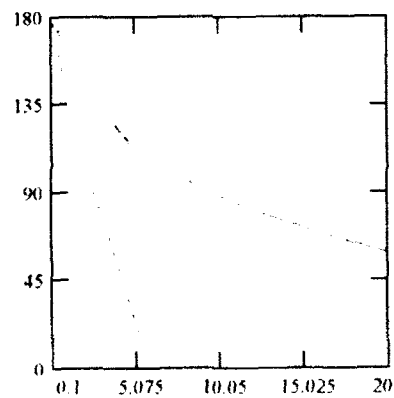

— Calculated arg(S21)  
- - - Fujitsu, FLO16XV  
... Fujitsu, FSC11X  
- . - Avantek, ATF10236

# Measurements along 3<sup>rd</sup> column

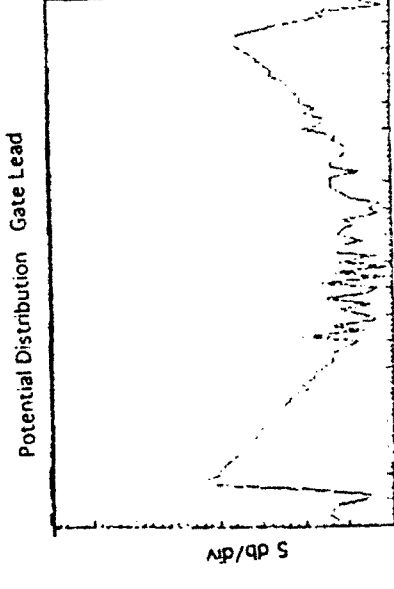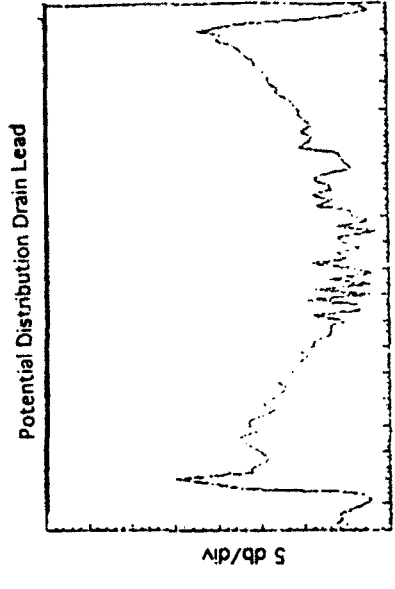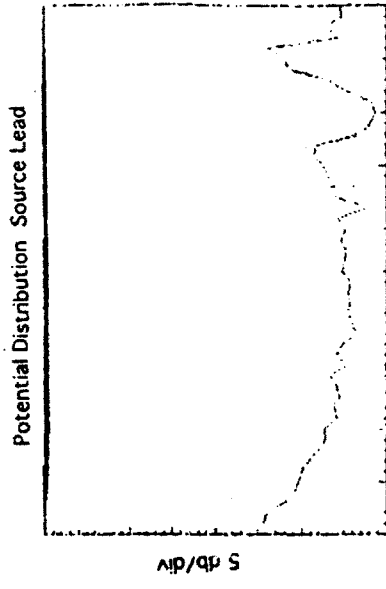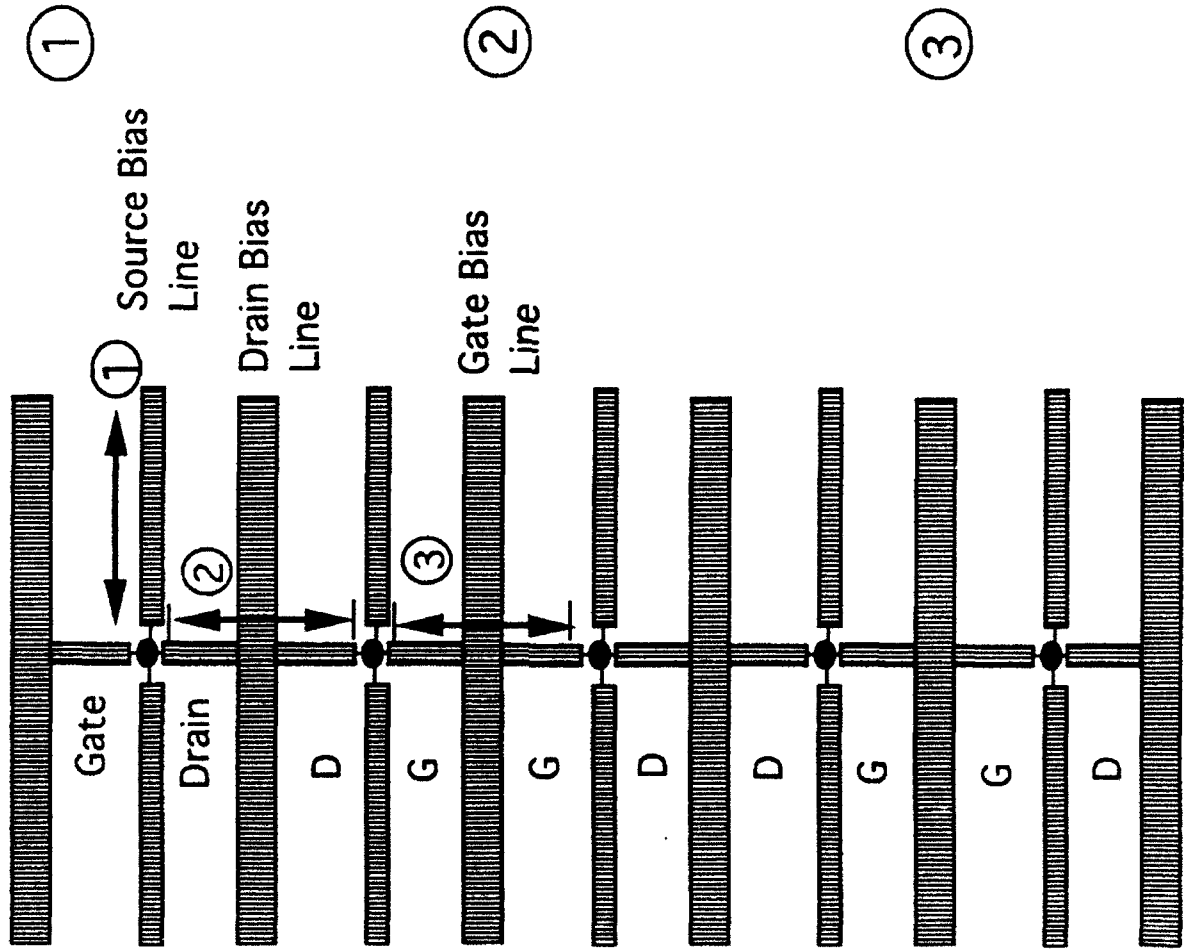

Current distributions can be extracted from these potential distribution measurements.