


AD-A265 863



2

**ARMY RESEARCH LABORATORY**



## **AN ACOUSTIC SCATTERING CODE**

*José Lopez*

*Department of Electrical Engineering and Computer Science  
University of Texas at El Paso  
El Paso, Texas 79968*

**SDTIC**  
**ELECTE**  
**S A D**  
JUN 16 1993

*Dr. G. H. Goedecke*

*Department of Physics  
New Mexico State University  
Las Cruces, New Mexico 88003*


*Dr. Harry J. Auvermann*

*U.S. Army Research Laboratory  
White Sands Missile Range, New Mexico 88002-5501*

**ARL-TR-53**

**April 1993**

**93-13484**



**93 6 15 17 5**

*Approved for public release; distribution unlimited.*

## NOTICES

### Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

### Destruction Notice

When this document is no longer needed, destroy it by any method that will prevent disclosure of its contents or reconstruction of the document.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE April 1993	3. REPORT TYPE AND DATES COVERED Final		
4. TITLE AND SUBTITLE AN ACOUSTIC SCATTERING CODE		5. FUNDING NUMBERS		
6. AUTHOR(S) José Lopez, Dr. G. H. Goedecke, Dr. Harry J. Auvermann				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Battlefield Environment Directorate ATTN: AMSRL-BE-M White Sands Missile Range, NM 88002-5501		8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-53		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1145		10. SPONSORING / MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words)  Acoustical scattering from atmospheric turbulence is of interest to the Army because it has been identified as a candidate cause of higher than expected sound levels in shadow zones. Shadow zones are those regions where ray theory indicates no sound penetrates. Scattering into these zones may give non-line-of-sight detection through acoustic detection. This report documents the creation of a computer code for acoustic scattering from a collection of turbules or eddies. The picture is a collection of turbules of different sizes with a specified number density in each size increment. In this aspect, the picture is similar to that of optical scattering from atmospheric aerosols where there is a collection of particles of different sizes with a specified size distribution. The optical scattering code AGAUS is the starting point for creation of the Acoustic SCattering from Turbules code, ASCT, which will for acoustic scattering accomplish what AGAUS accomplishes for optical scattering. The similarities and differences between the two types of scattering are pointed out as they influence the computational algorithm.				
14. SUBJECT TERMS  Turbules, acoustic, scattering, Mie theory		15. NUMBER OF PAGES 49		
		16. PRICE CODE		
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT SAR	

## Contents

List of Figures . . . . .	4
List of Tables . . . . .	5
1. Introduction . . . . .	7
2. Code Conversion . . . . .	8
3. Cross-Section and Phase Function Results . . . . .	14
4. Conclusion . . . . .	15
Literature Cited . . . . .	33
Appendix A. Notes on Acoustic Scattering by a Spherical Turbule . . . . .	35
Appendix B. The Four Size Distribution Models of ASCT . . . . .	45
Appendix C. AGAUS Formulas . . . . .	47
Distribution List . . . . .	49

Accession For	
NTIS CR&I	<input checked="" type="checkbox"/>
DTIC	<input type="checkbox"/>
DDP	<input type="checkbox"/>
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail. and/or Special
A-1	

THIS QUALITY INSPECTED

## List of Figures

1. Extinction for a turbule of radius $0.5 \text{ m} < r < 105 \text{ m}$ and refractive index $m = 1.0000015$ . . . . .	17
2. Extinction for a turbule of radius $0.5 \text{ m} < r < 105 \text{ m}$ and refractive index $m = 1.33333$ . . . . .	17
3. Percent error in ASCT and ADF formula results for refractive index $m = 1.0000015$ . . . . .	18
4. Percent error in ASCT and ADF formula results for refractive index $m = 1.33333$ . . . . .	18
5. Phase function for a turbule whose radius is large compared to the wavelength . . . . .	19
6. Phase function for a turbule whose radius is small compared to the wavelength . . . . .	19
7. Phase function for arbitrary user-supplied model . . . . .	20
8. Phase function for log-normal size distribution model . . . . .	20

## List of Tables

1. Table Generation Mode, $m = 1.0000015$ . . . . .	21
2. Table Generation Mode, $m = 1.33333$ . . . . .	22
3. Table Generation Mode, (Cross-Sections), $m = 1.0000015$ . . . . .	23
4. Single Turbule Model, $\lambda < r$ , $m = 1.0000015$ . . . . .	24
5. Single Turbule Model, $\lambda < r$ , $m = 1.33333$ . . . . .	25
6. Single Turbule Model, $\lambda > r$ , $m = 1.0000015$ . . . . .	26
7. Single Turbule Model, $\lambda > r$ , $m = 1.33333$ . . . . .	27
8. Arbitrary User-Supplied Model, $m = 1.0000015$ . . . . .	28
9. Arbitrary User-Supplied Model, $m = 1.33333$ . . . . .	29
10. Log-Normal Size Distribution Model, $m = 1.0000015$ . . . . .	30
11. Log-Normal Size Distribution Model, $m = 1.33333$ . . . . .	31

## 1. Introduction

Currently, there is great interest in acoustics within the Army because of the potential of its use for non-line-of-sight battlefield detection and location. Turbulence has been identified as a candidate cause for higher than expected sound levels within shadow zones, those regions where ray theory would indicate no sound could penetrate. Traditional turbulence theory has been developed around a model of an energy cascade through a series of eddies (hereinafter called turbules) of decreasing size until viscosity effects dissipate the energy. Traditional turbulence theory is more completely covered elsewhere (Noble and Auvermann, 1993). The theory goes immediately into statistical averages with no further interest in the internal structure of the turbulent region. This traditional theory is therefore termed the "statistical approach" to turbulence. More recently as experimental evidence has accumulated, interest has developed in the "structural approach" to turbulence wherein the effect of internal structure is more adequately accounted for. There is a natural parallel between optical scattering from aerosols and acoustical scattering from turbules. This parallel comes from the similarity between the picture of atmospheric aerosols as a collection of spherical particles of varying index-of-refraction and size and the picture of a turbulent region as a collection of spherical eddies with varying wave speeds and sizes. To determine scattering from such collections, the scattering from each size of scatterer must be determined and then the sum from some specified size distribution calculated. This is exactly the function of the optical scattering code AGAUS.

Program AGAUS was developed several years ago to determine electromagnetic scattering properties of small spherical particles. This report is concerned with the conversion of the AGAUS code from an optical scattering code to an acoustical scattering code. The notion is that the temperature distribution within a turbule creates an accompanying sound speed distribution that will cause the sound speed within the turbule to be different from that outside the turbule. There is thus an acoustic index of refraction discontinuity caused by the turbule in the same way an aerosol particle causes an optical index of refraction discontinuity. Acoustical scattering is also caused by the velocity distribution. This is not treated here. The index of refraction variation within a turbule is treated as an average quantity so it is uniform within the spherical volume occupied by the turbule. One other difference between optical scattering and acoustic scattering is that the index variations in turbulence are very slight as compared to index variations in aerosols distributions. One should be careful to calculate with sufficient precision so that the effects are not lost in computer round off errors. Small temperature variations between the inside and outside of a turbule result in refractive indices near 1. Hence, the conversion of program AGAUS from single precision to quadruple precision was accomplished, resulting in the code called QGAUS. This conversion is described elsewhere (Nguyen, 1993). The conversion to acoustic scattering began with QGAUS.

Electromagnetic scattering code AGAUS utilizes Mie theory for determining the scattering properties of spherical homogeneous particles. Mie theory predicts the scattering and absorption of electromagnetic radiation of wavelength  $\lambda$  by spherical particles of radius  $r$  having refractive index  $m = n + ik$  relative to the propagation

medium. A complex refractive index is used in the optical code AGAUS to account for a lossy propagation medium, and this usage is retained in the acoustic scattering code ASCT. Program runs of ASCT were performed with the imaginary component of the complex refractive index  $m$  set to zero as only real refractive indices were of interest. Particles in space attenuate incident electromagnetic radiation by scattering the radiation in different directions and absorption within the particle. Extinction is the sum of the scattering and the absorption. Extinction, scattering, and absorption of a particle are characterized by effective "blocking" areas or cross-sections ( $C_{ext}$ ,  $C_{sca}$ ,  $C_{abs}$ ). The angular distribution of the scattered radiation of spherical particles is characterized by the phase function  $p(\theta)$ , a function of the single variable  $\theta$  that is the angle between the direction of propagation and the direction to the observation position. The cross-sections and phase function are dependent on the particles' refractive index and size parameter  $x = 2\pi r/\lambda$ , where  $r$  is the particle radius and  $\lambda$  is the radiation wavelength. Mie theory provides a method for calculating the cross-sections and phase function as a series expansion of the field into partial waves (monopole, dipole, quadrupole, etc). A detailed description of the theory can be found in Bohren (1983).

Because electromagnetic and acoustic wave propagation both obey the wave equation, the same theory can be used to determine acoustic scattering properties of spherical turbules. For electromagnetic waves Mie theory matches partial wave expansion coefficients at the particle boundary so that both the electric field ( $E$ ) and the magnetic field ( $H$ ) are solutions of the wave equation inside and outside the particle. When Mie theory is applied to acoustic waves, the solution to the wave equation involves matching partial wave expansion coefficients for the sound wave pressure and velocity at the turbule boundary. A detailed derivation of expansion coefficients expressions for acoustical scattering by a uniform density spherical turbule has been provided through a separate contract (appendix A). Analytical formulae from this derivation were used in the conversion of QGAUS to the acoustic scattering code.

Details of the conversion of electromagnetic scattering code QGAUS to acoustic-scattering code ASCT (for Acoustical Scattering from Turbules) are presented in section 2. Representative results for the cross-sections and phase function are presented in tables and graphs in section 3. Code verification is obtained by a comparison of code results for extinction with approximate analytical formula results. Conclusions concerning the conversion and results are presented in section 4. Appendix B describes the four size distributions that may be chosen in ASCT. The electromagnetic scattering formulas that are the basis of AGAUS are included in appendix C to compare with the corresponding acoustic formulas more easily.

## 2. Code Conversion

A detailed description of AGAUS can be found in Miller (1983). Since Program QGAUS is identical to Program AGAUS except that all calculations are done in quadruple precision, the description in Miller (1983) is directly applicable to QGAUS. All work described in this report and in Nguyen (1993) was done on a Hewlett-Packard 9000/780 mainframe using HP FORTRAN 77/HP-UX. The only significant



computational differences between AGAUS and QGAUS result from the absence of quad precision complex arithmetic operations. Appropriate quad precision real operations were substituted where necessary and combined to give a quad precision complex result. Program QGAUS has 10 modes of operation defined by 10 different particle size distribution models. Inputs to QGAUS include wavelength, complex refractive index, and 11 integer program control parameters. Program output consists of cross-sections and phase function tables. Mie calculations are performed in subroutine MIEGX. Variable parameters to subroutine MIEGX include the size parameter  $x = 2\pi a/\lambda$  and the refractive index  $n = m + ik$ . MIEGX returns scattering efficiency factors from which the scattering cross-sections and phase function are calculated.

Conversion of program QGAUS to an acoustic scattering code involved redefinition of the formulas used in subroutine MIEGX for determining the efficiency factors. Subroutines AGAUG and WATER were deleted since the new code will not be used to treat hygroscopic effects. Control parameter IW was redefined as ICQ and is used for printing either efficiency factors (ICQ = 0) or cross-sections (ICQ = 1). Program QGAUS used units of micrometers for wavelength and particle radius and square centimeters for the cross-sections. The modified code uses units of meters for the wavelength and turbule radius and square meters for the cross-sections. Six of the 10 distribution models were deleted since they had no bearing on the problem of acoustic scattering by spherical turbules. A description of the four remaining models, as well as the inputs required by each, is given in appendix B.

Subroutine MIEGX has been modified to compute scattering properties of spherical turbules via the expansion coefficient  $a_\ell$ , which corresponds to the induced electric multipole moment in electromagnetic scattering problems. The expansion coefficient  $a_\ell$  is defined as follows:

$$-a_\ell = \frac{mj'_\ell(mx)j'_\ell(x) - j_\ell(mx)j'_\ell(x)}{mj'_\ell(mx)h^{(1)}_\ell(x) - j_\ell(mx)h^{(1)\prime}_\ell(x)}, \quad (1)$$

where  $j_\ell(z)$  and  $h_\ell(z)$  are the spherical Bessel function and the Hankel function of the third kind, respectively. The prime means "derivative with respect to the argument." For computational purposes  $a_\ell$  is rewritten as

$$-a_\ell = \frac{[mA_\ell(mx) + \frac{\ell+1}{x}]\Re[\xi_\ell(x)] - \Re[\xi_{\ell-1}(x)]}{[mA_\ell(mx) + \frac{\ell+1}{x}]\xi_\ell(x) - \xi_{\ell-1}(x)}, \quad (2)$$

where

$$\begin{aligned}
 A_\ell(mx) &= \frac{j'_\ell(mx)}{j_\ell(mx)} - \frac{j_{\ell-1}(mx)}{j_\ell(mx)} - \frac{(\ell+1)}{mx} \\
 &= -\frac{\ell}{mx} + \frac{j_{\ell-1}(mx)}{j_\ell(mx)} - \frac{1}{mx},
 \end{aligned} \tag{3}$$

and  $\xi(x)$  is the Ricatti-Bessel function of the third kind and is related to the Bessel function  $j_\ell(z)$  by

$$\xi_\ell(z) = zj_\ell(z) - izy_\ell(z). \tag{4}$$

The difference of the first two terms of the quantity  $A_\ell(mx)$  is computed using Lentz's continued fraction method. Detailed information on this method can be found in Lentz (1976).

The cross-sections, scattering amplitude, differential scattering amplitude, and phase function are defined as follows:

The extinction cross-section is given by

$$\sigma_{\text{ext}}(k) = \frac{-4\pi}{k^2} \sum_{\ell=0}^{\infty} (2\ell+1) \Re(a_\ell), \tag{5}$$

the scattering cross-section is given by

$$\sigma_{\text{scat}}(k) = \frac{4\pi}{k^2} \sum_{\ell=0}^{\infty} (2\ell+1) |a_\ell|^2, \tag{6}$$

the absorption cross-section is given by

$$\sigma_{\text{abs}}(k) = \sigma_{\text{ext}}(k) - \sigma_{\text{scat}}(k), \tag{7}$$

the radar cross-section is given by

$$\sigma_{rad}(k) = \frac{4\pi}{k^2} \left| \sum_{l=0}^{\infty} (2l+1)(-1)^l a_l \right|^2, \quad (8)$$

the scattering amplitude is given by

$$f(k, \theta) = \frac{1}{ik} \sum_{l=0}^{\infty} (2l+1) a_l P_l(\cos \theta), \quad (9)$$

where  $P_l(\cos \theta)$  is the Legendre polynomial function and is computed in MIEGX using the following recurrence formula

$$(2l+1)xP_l(x) = (l+1)P_{l+1}(x) + lP_{l-1}(x),$$

the differential scattering cross-section is given by

$$\sigma(k, \theta) = |f(k, \theta)|^2, \quad (10)$$

and the phase function is given by

$$p(\theta) = \frac{|f(k, \theta)|^2}{k^2 \sigma_{scat}(k)}, \quad (11)$$

for  $k = 2\pi/\lambda$ .

The radar cross-section and phase function were defined according to those given in Bohren (1983). Subroutine MIEGX computes efficiency factors  $Q_{ext}$ ,  $Q_{scat}$ ,  $Q_{abs}$ , and  $Q_{rad}$ , from which the cross-sections are computed. The efficiency factors are multiplied by the geometrical sphere cross-section to obtain the true cross-sections  $C_i = \pi r^2 Q_i$  in the main program.

The efficiency factors are defined as follows:

$$Q_{ext} = -\frac{4}{x^2} \sum_{l=0}^{\infty} (2l+1) \Re(a_l), \quad (12)$$

$$Q_{\text{res}} = \frac{4}{x^2} \sum_{l=0}^{\infty} (2l+1) |a_l|^2, \quad (13)$$

$$Q_{\text{res}} = \frac{4}{x^2} \left| \sum_{l=0}^{\infty} (2l+1) a_l (-1)^l \right|^2. \quad (14)$$

As mentioned above the difference of the first two terms of the quantity  $A_\ell(mx)$  is computed via the continued fraction method (Lentz, 1976). This method is valid for  $\ell = 1, 2, 3, \dots$  etc. Equations (5) through (14) require computation of  $A_\ell(mx)$  for  $\ell = 0$ , which is not possible with the continued fraction method. Subroutine A0 was developed to handle computation of  $A_\ell(mx)$  for  $\ell = 0$ .  $A_0$  is defined as follows:

$$A_0(mx) = \frac{j_{-1}(mx)}{j_0(mx)} - \frac{1}{mx}, \quad (15)$$

where

$$\begin{aligned} j_{-1}(mx) &= \frac{\cos(mx)}{mx}, \\ j_0(mx) &= \frac{\sin(mx)}{mx}. \end{aligned} \quad (16)$$

Substituting equation (16) into equation (15) yields,

$$A_0(mx) = \frac{\cos(mx)}{\sin(mx)} - \frac{1}{mx}. \quad (17)$$

The argument  $mx$  may be complex. Hence, computing of the ratio  $\cos(mx)/\sin(mx)$  is done in subroutine A0 by defining  $\cos(mx)$  and  $\sin(mx)$  as follows:

$$\begin{aligned} \cos(mx) &= \frac{e^{imx} + e^{-imx}}{2}, \\ \sin(mx) &= \frac{e^{imx} - e^{-imx}}{2i}. \end{aligned} \quad (18)$$

Once the quantity  $A_\ell(mx)$  is computed for  $\ell = 0$ , the remaining terms (for  $\ell = 1, 2, 3, \dots$  etc) are computed via the continued fractions method already coded in subroutine MIEGX.

For small size parameter  $x$ , the dominant term in the summations of equations (5) through (14) is  $a_0$ . Subroutine MIEGX bypasses the continued fraction calculations in this case, calls subroutine A0, and computes the efficiency factors and phase function using only the term  $a_0$ .

A comparison of the formulas implemented in program AGAUS to those implemented in the acoustic code reveals both similarities and differences between the two sets of formulas. Appendix C contains the definitions of the formulas implemented in program AGAUS. The corresponding formulas implemented in the acoustic code are given by equations (2), (3), (12), (13), (14), and (11).

A comparison of equation (2) with equations (C-1) and (C-2) shows that the formula for the expansion coefficient  $a_\ell$  given by equation (2) is most like the formula for the expansion coefficient  $b_\ell$  given by equation (C-2). Equation (2) and (C-2) differ in the term  $(\ell+c)/x$  where  $c = 0$  in equation (C-2) and  $c = 1$  in equation (2). Another difference between equation (2) and (C-2) is in the definition of the term  $A_\ell(mx)$ . Equations (3) and (C-3) give, respectively, the acoustic and electromagnetic code formulas for the term  $A_\ell(mx)$ . The two formulas are the same except for the absence of the term  $-1/mx$  in equation (C-3). The formulas for the extinction, scattering, and radar efficiency factors for the acoustic and electromagnetic codes are given in equations (12) through (14), and equations (C4) through (C6), respectively. The formulas given by equations (C-4) through (C-6) are dependent on both expansion coefficients  $a_\ell$  and  $b_\ell$ , whereas those given by equations (12) through (14) are dependent only on the expansion coefficient  $a_\ell$ . Also, the summation coefficient  $4/x^2$  shown in equations (12) and (13) is twice the coefficient  $2/x^2$  shown in equations (C-4) and (C-5), and four times the coefficient shown in equation (C-6).

The formulas for the phase function are given by equations (11) and (C-13). Computation of the phase function in program AGAUS is also dependent on the expansion coefficients  $a_\ell$  and  $b_\ell$  and the angular factors  $\pi_\ell(\theta)$  and  $\tau_\ell(\theta)$ . In contrast, the phase function given by equation (11) is dependent on the expansion coefficient  $a_\ell$  and the Legendre polynomial function  $P_\ell(\cos \theta)$ . Furthermore, the coefficient  $1/2k^2$  shown in equation (C-13) is half of the coefficient shown in equation (11). Finally, the summations computed in program AGAUS (see equations (C-4) through (C-8) begin with  $\ell = 1$ , whereas the summations computed in the acoustic code (see equations (9), and (12) through (14)) begin with  $\ell = 0$ . Appropriate changes were made to the formulas implemented in program QGAUS based on the differences mentioned above to convert it to acoustic scattering code ASCT.

Program ASCT operates under four distinct modes. In type 0 mode the user enters a set of radii and corresponding absolute number densities. The program calculates the cross-sections and phase function for each radii and sums the contribution of each to get the

total cross-sections and phase function. In type 1 mode a log-normal distribution function is used to determine the radii at which the cross-sections and phase function are calculated. In type 2 mode cross-section and phase function are calculated for a single turbule radius. In type 3 mode a table of cross-sections (ICQ = 1) or efficiency factors (ICQ = 0) versus turbule radius is generated. Appendix B describes the four modes as well as program input requirements. The code verification method and the results obtained are discussed in section 3.

### 3. Cross-Section and Phase Function Results

The code was verified by comparing the values for extinction efficiency obtained from program ASCT to those obtained from "anomalous diffraction" formula (ADF) given below,

$$Q_{ext} = 2 - \frac{4}{\rho} \sin \rho + \frac{4}{\rho^2} (1 - \cos \rho), \quad (19)$$

where  $\rho = 2x|m-1|$ . Equation (19) was derived in Van de Hulst (1957) and is good for large size parameter  $x$  (that is, for  $\lambda \ll r$ ) and refractive indices near 1 (that is,  $m = 1 \pm \epsilon$ ). For small size parameter  $x$  (that is,  $\lambda \gg r$ ), the following equation was derived for comparison,

$$Q_{ext} = \frac{4}{9} x^4 |m^2 - 1|^2. \quad (20)$$

Equation (20) was derived following the method used in Bohren (1983) for particles small compared to the wavelength. See also reference Morse (1968), page 427.

Program ASCT and ADF results for extinction efficiency are shown in figures 1 and 2, for refractive indices  $m = 1.0000015$  and  $m = 1.33333$ , respectively. The authors recognized that 1.33333 is far too large to represent an acoustic index of refraction. This index is used here solely as a means to exercise and check the code in the large size parameter regime. To get results where  $Q_{ext}$  flattens out for an index of 1.02 would require an enormous size parameter, for which the run time would have been prohibitive. Figure 1 gives the extinction curve for a turbule of radius  $0.5 \text{ m} < r < 105 \text{ m}$ , wavelength  $\lambda = 5 \text{ m}$ , and refractive index  $m = 1.0000015$ . The corresponding data for figure 1 is shown in table 1. Program ASCT extinction efficiency values are given in column Q(EXT), and the extinction predicted by ADF is given in the column so marked.

Figure 2 shows the extinction efficiency curve for a turbule having refractive index  $m = 1.33333$  and radius  $0.5 \text{ m} < r < 105 \text{ m}$ . Table 2 shows the corresponding data for

figure 2. For refractive index  $m = 1.0000015$ , the average percent error between the program and formula extinction efficiencies is  $\approx 0.04$  percent; and for refractive index  $m = 1.33333$ , the average percent error is  $\approx 7.4$  percent.

Figures 3 and 4 are plots of the percent error versus size parameter  $x$  for refractive indices  $m = 1.0000015$  and  $m = 1.33333$ , respectively. Table 3 simply shows cross-sections rather than efficiency factors for turbule radius  $0.5 \text{ m} < r < 45 \text{ m}$ , wavelength  $\lambda = 15 \text{ m}$ , and refractive index  $m = 1.0000015$ . The ADF formula was derived assuming a refractive index near 1 and a large size parameter  $x$  (that is,  $r \gg \lambda$ ). Table 1 and figure 3 show clearly good agreement between program ASCT and formula results for refractive index  $m = 1.0000015$ . For refractive index  $m = 1.33333$ , program ASCT and formula results differ slightly. This should be expected since the refractive index is greater than 1.

Figure 4 shows an improvement in the error for increasing size parameter  $x$ . This is in accordance with the large size parameter assumption of the formula. Using the parameters of table 1 for radius of 0.5 m, equation (20) gives an extinction efficiency of  $6.234\text{E-}13$ , which is only 14.4 percent different than the program results. Using the parameters of table 1 for a radius of 0.05 m, equation (20) gives an efficiency of  $3.23320\text{E-}09$  and the ASCT program gives a result of  $3.23328\text{E-}09$ , indicating the improved agreement for smaller size parameter. In this latter case, the angular dependence of the scattering is very nearly isotropic, which is consistent with the fact that monopole is the dominant mode of scatter when  $x$  is small.

The phase function gives out information about the angular distribution of the scattered wave. Figure 5 shows the phase function curve for a turbule whose radius ( $r = 30 \text{ m}$ ) is large compared to the wavelength ( $\lambda = 5 \text{ m}$ ) for refractive indices  $m = 1.0000015$  and  $m = 1.33333$ . Figure 6 shows the phase function curve for a turbule whose radius ( $r = 5 \text{ m}$ ) is small compared to the wavelength ( $\lambda = 30 \text{ m}$ ). Figure 7 shows the phase function for a user-supplied distribution of turbule radii. The phase function for a log-normal distribution of turbule radii is shown in figure 8. Tables 4 through 11 show the corresponding data for figures 5 through 8. The results obtained from program ASCT are in accord with those predicted by the "anomalous diffraction" formula and the small size approximation. ASCT correctly models the acoustic scattering properties of spherical turbules.

## 4. Conclusion

An acoustic scattering code, Program ASCT, is now available for determining the scattering properties of nonrotational spherical turbules. It can generate the cross-sections and phase function for four modes of operation. Program ASCT was developed by inserting acoustic interface relations in the electromagnetic scattering QGAUS code. QGAUS was, in turn, developed from the AGAUS code through conversion to quadruple precision arithmetic. The majority of the modifications to program QGAUS were in subroutine MIEGX, where the main Mie calculations are performed. Modifications to this routine were based on the derivations provided by Dr. G. H. Goedecke. These

derivations were compared to cross-section and phase function equations given in Morse (1968) for scattering by spherical particles. Aside from different notation used, the formulas for the cross-sections and phase function were found to be identical. The extinction results from program ASCT were then compared to those predicted by the "anomalous diffraction" formula and found to be in remarkably good accord. Thus, there is now available an accurate code for determining the acoustic scattering properties of spherical turbules modeled as uniform acoustic index-of-refraction inhomogeneities. The angular dependence for small size parameter was compared to that found in Morse (1968, page 427). Morse shows an angular dependence with predominant scattering in the backward direction. ASCT results show an isotropic scattering pattern. The difference is caused by the different boundary conditions for the two derivations. Morse considers a scatterer with a definite surface. For this case, the boundary conditions are that pressure is continuous and that the normal velocity is continuous. ASCT considers a scatterer without a definite surface. In the ASCT case, the boundary conditions are that the pressure is continuous and that the mass flow (density times velocity) is continuous. Morse shows the dipole term contributes to the lowest order of scattering. In ASCT, only the monopole term contributes to the lowest order of scattering.



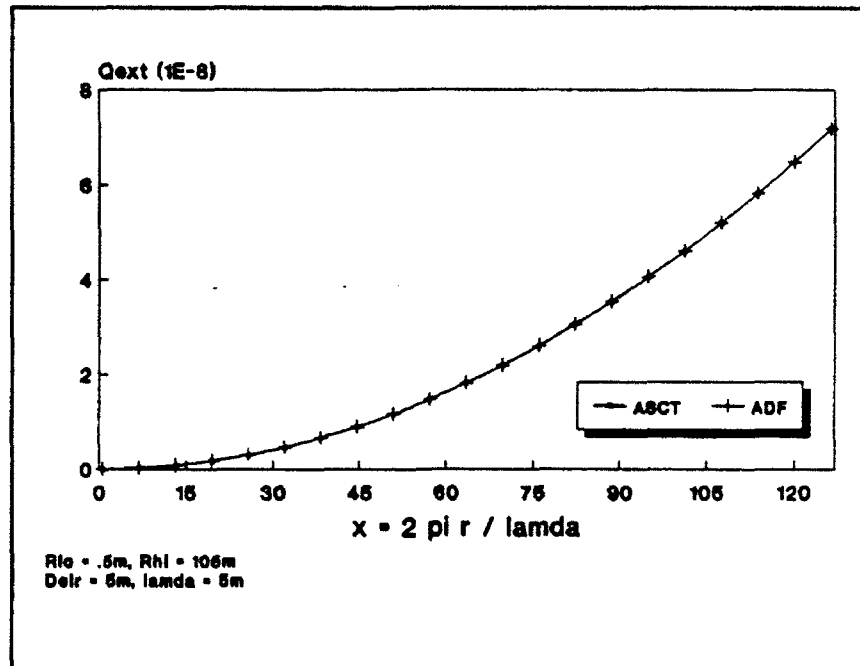


Figure 1. Extinction for a turbule of radius  $0.5 \text{ m} < r < 105 \text{ m}$  and refractive index  $m = 1.0000015$ .

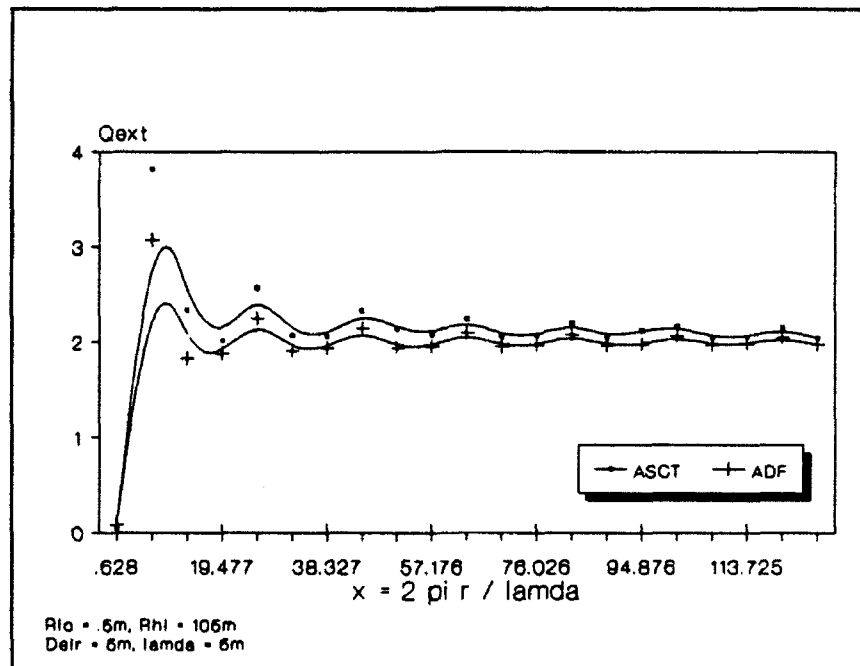


Figure 2. Extinction for a turbule of radius  $0.5 \text{ m} < r < 105 \text{ m}$  and refractive index  $m = 1.33333$ .

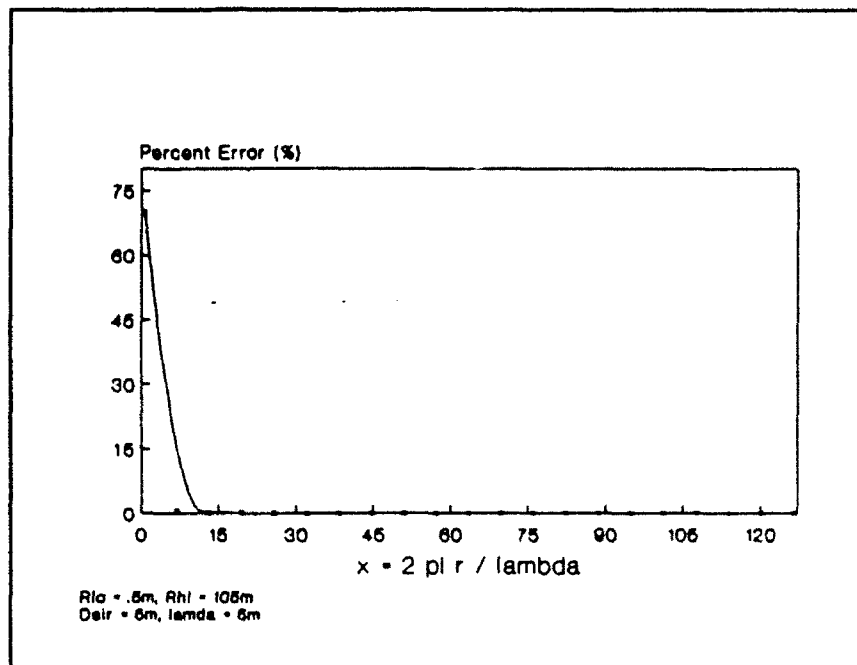


Figure 3. Percent error in ASCT and ADF formula results for refractive index  $m = 1.0000015$ .

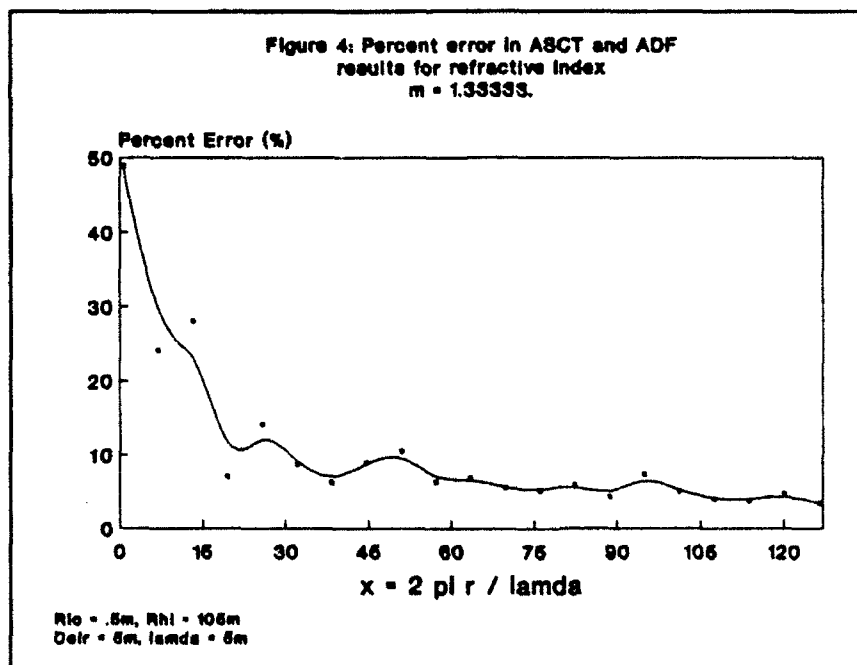


Figure 4. Percent error in ASCT and ADF formula results for refractive index  $m = 1.33333$ .

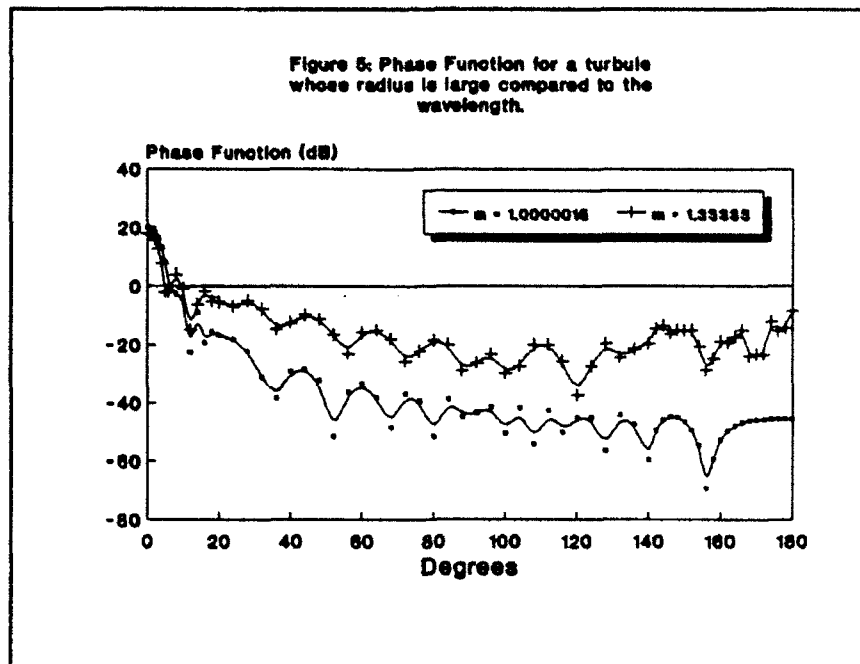


Figure 5. Phase function for a turbule whose radius is small compared to wavelength.

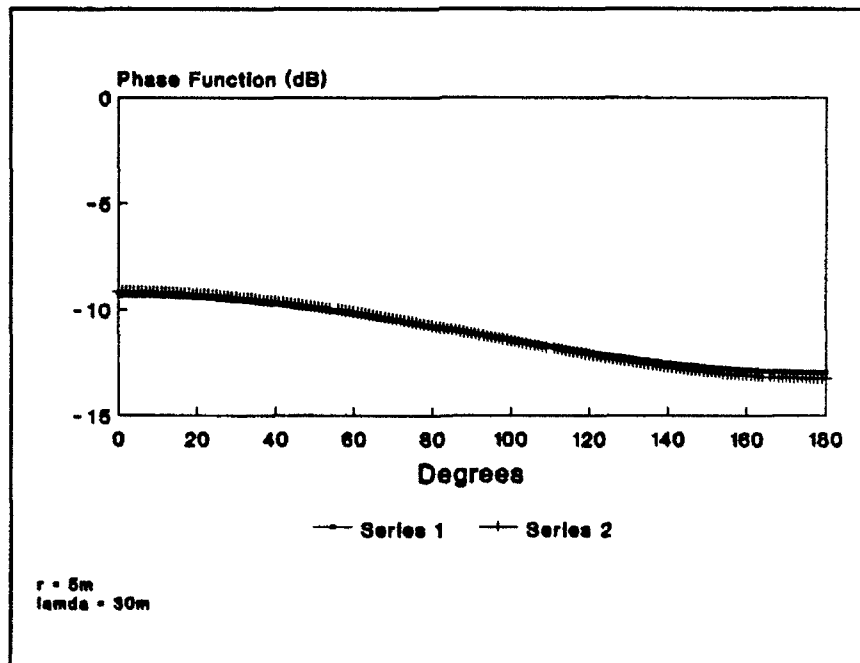


Figure 6. Phase function for a turbule whose radius is small compared to wavelength.

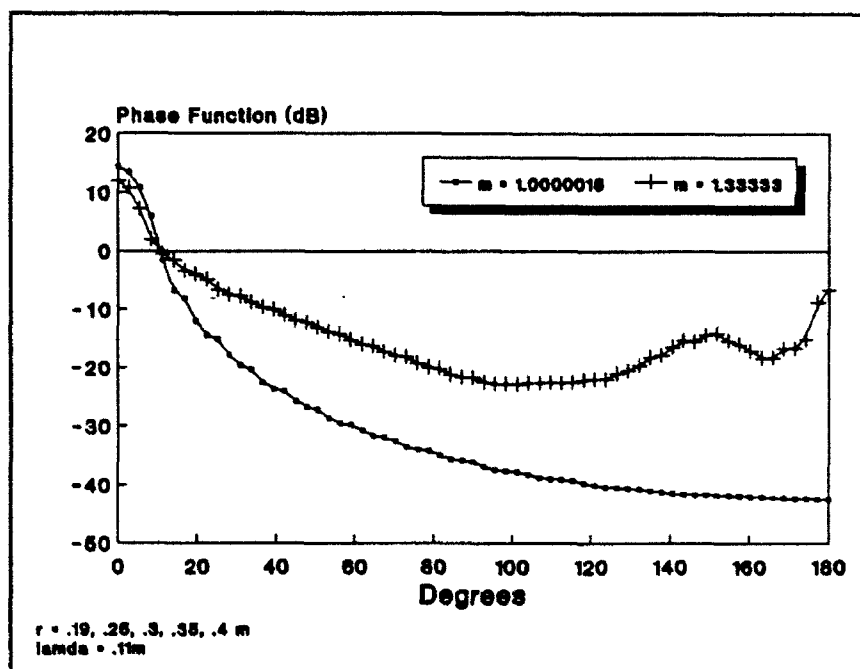


Figure 7. Phase function for arbitrary user-supplied model.

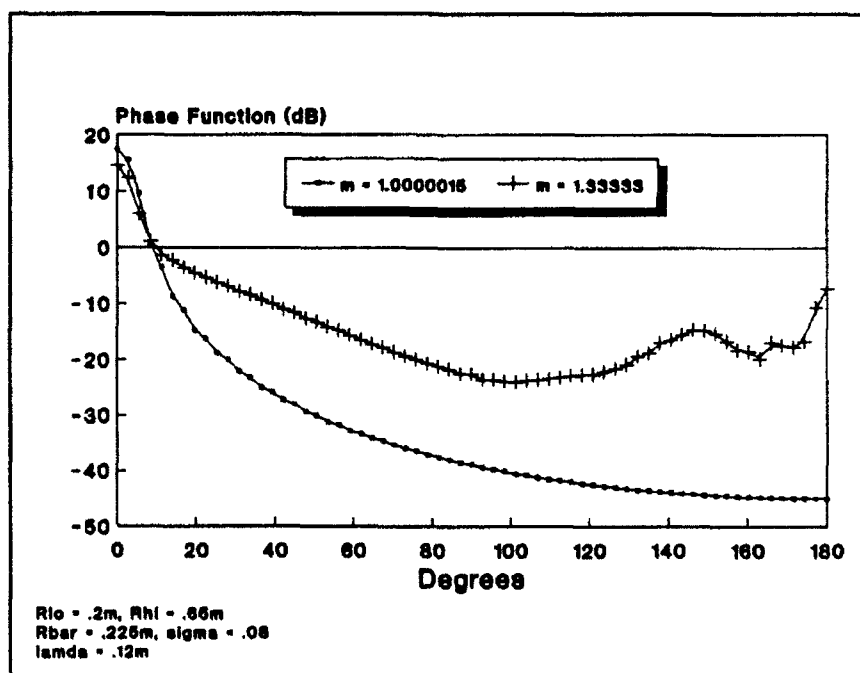


Figure 8. Phase function for log-normal size distribution model.

TABLE 1. TABLE GENERATION MODE

m = 1.0000015

RLO = 5.00000E-01. RHI = 1.05000E+02. DELR = 5.00000E+00  
Wavelength = 5.00 m  
Real Index = 1.00000150 Imag. Index = .00000000

R(m)	Size Parameter	Q(EXT)	Q(SCA)	Q(ABS)	ADF
.50000	6.28319E-01	5.33358E-13	5.33358E-13	0.00000E+00	1.77653E-12
5.50000	6.91150E+00	2.13878E-10	2.13878E-10	0.00000E+00	2.14960E-10
10.50000	1.31947E+01	7.82349E-10	7.82349E-10	0.00000E+00	7.83449E-10
15.50000	1.94779E+01	1.70614E-09	1.70614E-09	0.00000E+00	1.70724E-09
20.50000	2.57611E+01	2.98524E-09	2.98524E-09	0.00000E+00	2.98634E-09
25.50000	3.20442E+01	4.61964E-09	4.61964E-09	0.00000E+00	4.62075E-09
30.50000	3.83274E+01	6.60936E-09	6.60936E-09	0.00000E+00	6.61046E-09
35.50000	4.46106E+01	8.95435E-09	8.95435E-09	0.00000E+00	8.95548E-09
40.50000	5.08938E+01	1.16547E-08	1.16547E-08	0.00000E+00	1.16558E-08
45.50000	5.71770E+01	1.47103E-08	1.47103E-08	0.00000E+00	1.47114E-08
50.50000	6.34602E+01	1.81212E-08	1.81212E-08	0.00000E+00	1.81224E-08
55.50000	6.97434E+01	2.18873E-08	2.18873E-08	0.00000E+00	2.18886E-08
60.50000	7.60265E+01	2.60089E-08	2.60089E-08	0.00000E+00	2.60102E-08
65.50000	8.23097E+01	3.04858E-08	3.04858E-08	0.00000E+00	3.04870E-08
70.50000	8.85929E+01	3.53176E-08	3.53176E-08	0.00000E+00	3.53192E-08
75.50000	9.48761E+01	4.05039E-08	4.05039E-08	0.00000E+00	4.05066E-08
80.50000	1.01159E+02	4.60471E-08	4.60471E-08	0.00000E+00	4.60494E-08
85.50000	1.07442E+02	5.19455E-08	5.19455E-08	0.00000E+00	5.19475E-08
90.50000	1.13726E+02	5.81974E-08	5.81974E-08	0.00000E+00	5.82009E-08
95.50000	1.20009E+02	6.48068E-08	6.48068E-08	0.00000E+00	6.48095E-08
100.50000	1.26292E+02	7.17713E-08	7.17713E-08	0.00000E+00	7.17735E-08

TABLE 2. TABLE GENERATION MODE

m = 1.33333

RLO = 5.00000E-01. RHI = 1.05000E+02. DELR = 5.00000E+00  
Wavelength = 5.00 m  
Real Index = 1.33333000 Imag. Index = .00000000

R(m)	Size Parameter	Q(EXT)	Q(SCA)	Q(ABS)	ADF
.50000	6.28319E-01	4.44193E-02	4.44193E-02	0.00000E+00	8.68767E-02
5.50000	6.91150E+00	3.81237E+00	3.81237E+00	0.00000E+00	3.07148E+00
10.50000	1.31947E+01	2.33832E+00	2.33832E+00	0.00000E+00	1.82620E+00
15.50000	1.94779E+01	2.00868E+00	2.00868E+00	0.00000E+00	1.87679E+00
20.50000	2.57611E+01	2.56390E+00	2.56390E+00	0.00000E+00	2.24661E+00
25.50000	3.20442E+01	2.07078E+00	2.07078E+00	0.00000E+00	1.90576E+00
30.50000	3.83274E+01	2.05790E+00	2.05790E+00	0.00000E+00	1.93689E+00
35.50000	4.46106E+01	2.33004E+00	2.33004E+00	0.00000E+00	2.13875E+00
40.50000	5.08938E+01	2.14009E+00	2.14009E+00	0.00000E+00	1.93696E+00
45.50000	5.71770E+01	2.08112E+00	2.08112E+00	0.00000E+00	1.95759E+00
50.50000	6.34602E+01	2.24026E+00	2.24026E+00	0.00000E+00	2.09650E+00
55.50000	6.97434E+01	2.05988E+00	2.05988E+00	0.00000E+00	1.95275E+00
60.50000	7.60265E+01	2.06883E+00	2.06883E+00	0.00000E+00	1.96807E+00
65.50000	8.23097E+01	2.19703E+00	2.19703E+00	0.00000E+00	2.07396E+00
70.50000	8.85929E+01	2.04687E+00	2.04687E+00	0.00000E+00	1.96223E+00
75.50000	9.48761E+01	2.11949E+00	2.11949E+00	0.00000E+00	1.97440E+00
80.50000	1.01159E+02	2.16265E+00	2.16265E+00	0.00000E+00	2.05996E+00
85.50000	1.07442E+02	2.04734E+00	2.04734E+00	0.00000E+00	1.96855E+00
90.50000	1.13726E+02	2.05237E+00	2.05237E+00	0.00000E+00	1.97864E+00
95.50000	1.20009E+02	2.14777E+00	2.14777E+00	0.00000E+00	2.05041E+00
100.50000	1.26292E+02	2.04060E+00	2.04060E+00	0.00000E+00	1.97306E+00

TABLE 3. TABLE GENERATION MODE (CROSS-SECTIONS)  
m = 1.0000015

RLO = 5.00000E-01. RHI = 4.50000E+01. DELR = 1.00000E+00  
Wavelength = 15.00 m  
Real Index = 1.00000150 Imag. Index = .00000000

R(m)	Size Parameter	Gross Sections in Square Meters			
		Q(EXT)	Q(SCA)	Q(ABS)	ADF
.50000	2.09440E-01	5.93984E-15	5.93984E-15	0.00000E+00	1.55031E-13
1.50000	6.28319E-01	3.77008E-12	3.77008E-12	0.00000E+00	1.25575E-11
2.50000	1.04720E+00	6.18948E-11	6.18948E-11	0.00000E+00	9.68946E-11
3.50000	1.46608E+00	3.22713E-10	3.22713E-10	0.00000E+00	3.72230E-10
4.50000	1.88496E+00	9.61909E-10	9.61909E-10	0.00000E+00	1.01716E-09
5.50000	2.30383E+00	2.16275E-09	2.16275E-09	0.00000E+00	2.26981E-09
6.50000	2.72271E+00	4.24848E-09	4.24848E-09	0.00000E+00	4.42785E-09
7.50000	3.14159E+00	7.64968E-09	7.64968E-09	0.00000E+00	7.84846E-09
8.50000	3.56047E+00	1.27259E-08	1.27259E-08	0.00000E+00	1.29484E-08
9.50000	3.97935E+00	1.98716E-08	1.98716E-08	0.00000E+00	2.02038E-08
10.50000	4.39823E+00	2.97172E-08	2.97172E-08	0.00000E+00	3.01507E-08
11.50000	4.81711E+00	4.29363E-08	4.29363E-08	0.00000E+00	4.33841E-08
12.50000	5.23599E+00	6.00489E-08	6.00489E-08	0.00000E+00	6.05591E-08
13.50000	5.65487E+00	8.17080E-08	8.17080E-08	0.00000E+00	8.23900E-08
14.50000	6.07375E+00	1.08862E-07	1.08862E-07	0.00000E+00	1.09651E-07
15.50000	6.49262E+00	1.42374E-07	1.42374E-07	0.00000E+00	1.43175E-07
16.50000	6.91150E+00	1.82929E-07	1.82929E-07	0.00000E+00	1.83855E-07
17.50000	7.33038E+00	2.31494E-07	2.31494E-07	0.00000E+00	2.32644E-07
18.50000	7.74926E+00	2.89313E-07	2.89313E-07	0.00000E+00	2.90554E-07
19.50000	8.16814E+00	3.57389E-07	3.57389E-07	0.00000E+00	3.58656E-07
20.50000	8.58702E+00	4.36610E-07	4.36610E-07	0.00000E+00	4.38082E-07
21.50000	9.00590E+00	5.28296E-07	5.28296E-07	0.00000E+00	5.30021E-07
22.50000	9.42478E+00	6.33937E-07	6.33937E-07	0.00000E+00	6.35726E-07
23.50000	9.84366E+00	7.54649E-07	7.54649E-07	0.00000E+00	7.56504E-07
24.50000	1.02625E+01	8.91579E-07	8.91579E-07	0.00000E+00	8.93725E-07
25.50000	1.06814E+01	1.04642E-06	1.04642E-06	0.00000E+00	1.04882E-06
26.50000	1.11003E+01	1.22084E-06	1.22084E-06	0.00000E+00	1.22327E-06
27.50000	1.15192E+01	1.41606E-06	1.41606E-06	0.00000E+00	1.41863E-06
28.50000	1.19381E+01	1.63357E-06	1.63357E-06	0.00000E+00	1.63651E-06
29.50000	1.23569E+01	1.87541E-06	1.87541E-06	0.00000E+00	1.87857E-06
30.50000	1.27758E+01	2.14335E-06	2.14335E-06	0.00000E+00	2.14654E-06
31.50000	1.31947E+01	2.43877E-06	2.43877E-06	0.00000E+00	2.44220E-06
32.50000	1.36136E+01	2.76356E-06	2.76356E-06	0.00000E+00	2.76741E-06
33.50000	1.40324E+01	3.12004E-06	3.12004E-06	0.00000E+00	3.12406E-06
34.50000	1.44513E+01	3.51005E-06	3.51005E-06	0.00000E+00	3.51412E-06
35.50000	1.48702E+01	3.93519E-06	3.93519E-06	0.00000E+00	3.93961E-06
36.50000	1.52891E+01	4.39776E-06	4.39776E-06	0.00000E+00	4.40262E-06
37.50000	1.57080E+01	4.90033E-06	4.90033E-06	0.00000E+00	4.90529E-06
38.50000	1.61268E+01	5.44475E-06	5.44475E-06	0.00000E+00	5.44982E-06
39.50000	1.65457E+01	6.03294E-06	6.03294E-06	0.00000E+00	6.03848E-06
40.50000	1.69646E+01	6.66764E-06	6.66764E-06	0.00000E+00	6.67359E-06

TABLE 4. SINGLE TURBULE MODEL

$$\lambda < \gamma$$

$$m = 1.0000015$$

---

Wavelength = 5.00 m  
 Real Index = 1.00000150 Imag. Index = .00000000

---

<u>R(m)</u>	<u>Size Parameter</u>	<u>Q(EXT)</u>	<u>Q(SCA)</u>	<u>Q(ABS)</u>	<u>ADF</u>
30.00000	3.76991E+01	6.39439E-09	6.39439E-09	0.00000E+00	6.39550E-09

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

---

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	1.00549E+02	.500	9.83923E+01	1.000	9.21591E+01
2.000	7.04779E+01	3.000	4.39194E+01	4.000	2.11377E+01
5.000	6.90125E+00	6.000	9.74323E-01	8.000	5.51044E-01
10.000	4.06732E-01	12.000	5.57109E-03	14.000	1.26362E-01
16.000	1.18102E-02	18.000	2.81551E-02	20.000	2.10238E-02
24.000	1.50308E-02	28.000	5.92785E-03	32.000	7.73665E-04
36.000	1.46115E-04	40.000	1.21146E-03	44.000	1.42367E-03
48.000	5.82885E-04	52.000	6.96884E-06	56.000	2.40956E-04
60.000	4.48025E-04	64.000	1.51021E-04	68.000	1.43342E-05
72.000	2.05845E-04	76.000	1.17420E-04	80.000	7.05946E-06
84.000	1.33905E-04	88.000	3.38229E-05	92.000	4.57344E-05
96.000	7.08101E-05	100.000	9.23468E-06	104.000	6.78840E-05
108.000	3.88159E-06	112.000	5.38492E-05	116.000	1.00587E-05
120.000	3.10136E-05	124.000	3.07702E-05	128.000	2.38710E-06
132.000	3.82840E-05	136.000	1.81152E-05	140.000	1.14544E-06
142.000	1.17876E-05	144.000	2.53459E-05	146.000	3.28441E-05
148.000	3.10271E-05	150.000	2.23238E-05	152.000	1.17272E-05
154.000	3.61213E-06	156.000	1.21887E-07	158.000	1.18045E-06
160.000	5.37666E-06	162.000	1.09503E-05	164.000	1.64533E-05
166.000	2.10105E-05	168.000	2.42952E-05	170.000	2.63621E-05
172.000	2.74691E-05	174.000	2.79327E-05	176.000	2.80440E-05
178.000	2.80226E-05	180.000	2.80014E-05		

Test integral of phase function is: 1.04217E+00



TABLE 5. SINGLE TURBULE MODEL

$$\lambda < \gamma$$

$$m = 1.33333$$

---

Wavelength - 5.00 m  
 Real Index - 1.33333000 Imag. Index - .00000000

---

<u>R(m)</u>	<u>Size Parameter</u>	<u>Q(EXT)</u>	<u>Q(SCA)</u>	<u>Q(ABS)</u>	<u>ADF</u>
30.00000	3.76991E+01	2.13171E+00	2.13171E+00	0.00000E+00	2.00004E+00

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

---

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	6.19061E+01	.500	6.01188E+01	1.000	5.50098E+01
2.000	3.79818E+01	3.000	1.91703E+01	4.000	5.94872E+00
5.000	6.25238E-01	6.000	6.73745E-01	8.000	2.49006E+00
10.000	8.24598E-01	12.000	3.15137E-02	14.000	2.42282E-01
16.000	6.80251E-01	18.000	3.13066E-01	20.000	2.85330E-01
24.000	1.99759E-01	28.000	3.18359E-01	32.000	1.65788E-01
36.000	3.36434E-02	40.000	5.58591E-02	44.000	1.04645E-01
48.000	7.44567E-02	52.000	2.13933E-02	56.000	4.99427E-03
60.000	2.60021E-02	64.000	3.11628E-02	68.000	1.57804E-02
72.000	2.76854E-03	76.000	5.94687E-03	80.000	1.43038E-02
84.000	1.00182E-02	88.000	1.30953E-03	92.000	2.38238E-03
96.000	4.77071E-03	100.000	1.03444E-03	104.000	1.82243E-03
108.000	9.80708E-03	112.000	9.99972E-03	116.000	2.68559E-03
120.000	1.79242E-04	124.000	1.85665E-03	128.000	1.07126E-02
132.000	3.67086E-03	136.000	7.12088E-03	140.000	1.08049E-02
142.000	3.54139E-02	144.000	4.36453E-02	146.000	2.30289E-02
148.000	3.13271E-02	150.000	2.95026E-02	152.000	3.07851E-02
154.000	8.61732E-03	156.000	1.33666E-03	158.000	3.37359E-03
160.000	1.25980E-02	162.000	1.12088E-02	164.000	1.77247E-02
166.000	3.12651E-02	168.000	3.94053E-03	170.000	4.49724E-03
172.000	4.45448E-03	174.000	6.24914E-02	176.000	2.87252E-02
178.000	3.72092E-02	180.000	1.46867E-01		

Test integral of phase function is: 1.00015E+00

TABLE 6. SINGLE TURBULE MODEL

$$\lambda < \gamma$$

$$m = 1.0000015$$

---

Wavelength - 30.00 m  
 Real Index - 1.00000150 Imag. Index - .00000000

---

<u>R(m)</u>	<u>Size Parameter</u>	<u>Q(EXT)</u>	<u>Q(SCA)</u>	<u>Q(ABS)</u>	<u>ADF</u>
5.00000	1.04720E+00	3.15228E-12	3.15228E-12	0.00000E+00	4.93480E-12

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

---

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	1.21434E-01	.500	1.21432E-01	1.000	1.21426E-01
2.000	1.21402E-01	3.000	1.21361E-01	4.000	1.21305E-01
5.000	1.21232E-01	6.000	1.21143E-01	8.000	1.20917E-01
10.000	1.20627E-01	12.000	1.20275E-01	14.000	1.19861E-01
16.000	1.19386E-01	18.000	1.18851E-01	20.000	1.18258E-01
24.000	1.16903E-01	28.000	1.15335E-01	32.000	1.13568E-01
36.000	1.11619E-01	40.000	1.09507E-01	44.000	1.07250E-01
48.000	1.04868E-01	52.000	1.02381E-01	56.000	9.98096E-02
60.000	9.71734E-02	64.000	9.44920E-02	68.000	9.17842E-02
72.000	8.90681E-02	76.000	8.63606E-02	80.000	8.36776E-02
84.000	8.10337E-02	88.000	7.84423E-02	92.000	7.59153E-02
96.000	7.34634E-02	100.000	7.10959E-02	104.000	6.88210E-02
108.000	6.66455E-02	112.000	6.45751E-02	116.000	6.26145E-02
120.000	6.07673E-02	124.000	5.90365E-02	128.000	5.74241E-02
132.000	5.59315E-02	136.000	5.45596E-02	140.000	5.33089E-02
142.000	5.27291E-02	144.000	5.21795E-02	146.000	5.16601E-02
148.000	5.11710E-02	150.000	5.07120E-02	152.000	5.02831E-02
154.000	4.98842E-02	156.000	4.95153E-02	158.000	4.91762E-02
160.000	4.88669E-02	162.000	4.85873E-02	164.000	4.83374E-02
166.000	4.81170E-02	168.000	4.79262E-02	170.000	4.77648E-02
172.000	4.76329E-02	174.000	4.75303E-02	176.000	4.74570E-02
178.000	4.74131E-02	180.000	4.73984E-02		

Test integral of phase function is: 1.00005E+00

TABLE 7. SINGLE TURBULE MODEL

$$\lambda < \gamma$$

$$m = 1.33333$$

---

Wavelength - 30.00 m  
 Real Index - 1.33333000 Imag. Index - .00000000

---

<u>R(m)</u>	<u>Size Parameter</u>	<u>Q(EXT)</u>	<u>Q(SCA)</u>	<u>Q(ABS)</u>	<u>ADF</u>
5.00000	1.04720E+00	3.08358E-01	3.08358E-01	0.00000E+00	2.37171E-01

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

---

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	1.16616E-01	.500	1.16615E-01	1.000	1.16609E-01
2.000	1.16588E-01	3.000	1.16553E-01	4.000	1.16503E-01
5.000	1.16439E-01	6.000	1.16361E-01	8.000	1.16164E-01
10.000	1.15910E-01	12.000	1.15602E-01	14.000	1.15240E-01
16.000	1.14824E-01	18.000	1.14356E-01	20.000	1.13836E-01
24.000	1.12650E-01	28.000	1.11275E-01	32.000	1.09725E-01
36.000	1.08015E-01	40.000	1.06160E-01	44.000	1.04176E-01
48.000	1.02081E-01	52.000	9.98906E-02	56.000	9.76235E-02
60.000	9.52967E-02	64.000	9.29272E-02	68.000	9.05313E-02
72.000	8.81250E-02	76.000	8.57231E-02	80.000	8.33397E-02
84.000	8.09876E-02	88.000	7.86789E-02	92.000	7.64244E-02
96.000	7.42336E-02	100.000	7.21151E-02	104.000	7.00765E-02
108.000	6.81240E-02	112.000	6.62631E-02	116.000	6.44984E-02
120.000	6.28336E-02	124.000	6.12714E-02	128.000	5.98142E-02
132.000	5.84636E-02	136.000	5.72208E-02	140.000	5.60865E-02
142.000	5.55601E-02	144.000	5.50610E-02	146.000	5.45891E-02
148.000	5.41445E-02	150.000	5.37271E-02	152.000	5.33369E-02
154.000	5.29739E-02	156.000	5.26379E-02	158.000	5.23291E-02
160.000	5.20473E-02	162.000	5.17926E-02	164.000	5.15647E-02
166.000	5.13638E-02	168.000	5.11898E-02	170.000	5.10426E-02
172.000	5.09222E-02	174.000	5.08286E-02	176.000	5.07618E-02
178.000	5.07217E-02	180.000	5.07083E-02		

Test integral of phase function is: 1.00004E+00

TABLE 8. ARBITRARY USER-SUPPLIED MODEL

m = 1.0000015

<u>Radius</u>	<u>Relative No.</u>	<u>Radius</u>	<u>Relative No.</u>	<u>Radius</u>	<u>Relative No.</u>
1.900000E-01	1.000000E+00	2.500000E-01	1.000000E+00	3.000000E-01	1.000000E+00
3.500000E-01	1.000000E+00	4.000000E-01	1.000000E+00		

Average numerical dry volume per particle is: 1.211598E-01 cubic meters

Wavelength = .11 m  
 Real Index = 1.00000150  
 Imag. Index = .00000000  
 Number Density = 2.10000E-01 part/cubic meter

<u>Size Group</u>	<u>Maximum Radius</u>	<u>Group cross sections in square meters per particle</u>			
		<u>Extinction</u>	<u>Absorption</u>	<u>Scattering</u>	<u>Backscatter</u>
1	.400	4.38812E-10	4.48416E-44	4.38812E-10	3.18346E-13

\*\*\* Phase Function (integral over solid angle is unity) \*\*\*

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	2.69153E+01	2.813	2.20677E+01	5.625	1.18638E+01
8.438	3.84435E+00	11.250	6.91398E-01	14.063	2.09543E-01
16.875	1.54649E-01	19.688	6.20410E-02	22.500	3.56652E-02
25.313	3.06032E-02	28.125	1.63331E-02	30.938	1.10230E-02
33.750	9.18239E-03	36.563	5.49717E-03	39.375	4.27419E-03
42.188	3.85865E-03	45.000	2.64059E-03	47.813	2.11049E-03
50.625	1.89161E-03	53.438	1.36339E-03	56.250	1.10207E-03
59.063	1.04922E-03	61.875	8.42690E-04	64.688	6.78473E-04
67.500	6.40439E-04	70.313	5.48956E-04	73.125	4.33446E-04
75.938	3.97018E-04	78.750	3.76826E-04	81.563	3.19339E-04
84.375	2.75281E-04	87.188	2.63894E-04	90.000	2.44566E-04
92.813	2.08157E-04	95.625	1.83319E-04	98.438	1.76756E-04
101.250	1.68788E-04	104.063	1.51246E-04	106.875	1.35169E-04
109.688	1.28484E-04	112.500	1.25767E-04	115.313	1.19032E-04
118.125	1.08046E-04	120.938	9.81422E-05	123.750	9.28082E-05
126.563	9.08515E-05	129.375	8.90175E-05	132.188	8.53915E-05
135.000	8.03582E-05	137.813	7.54421E-05	140.625	7.18429E-05
143.438	6.98105E-05	146.250	6.88598E-05	149.063	6.82929E-05
151.875	6.75910E-05	154.688	6.65425E-05	157.500	6.51827E-05
160.313	6.36674E-05	163.125	6.21686E-05	165.938	6.08176E-05
168.750	5.96912E-05	171.563	5.88209E-05	174.375	5.82100E-05
177.188	5.78500E-05	180.000	5.77313E-05		

Test integral of phase function is: 1.06681E+00

TABLE 9. ARBITRARY USER-SUPPLIED MODEL

m - 1.33333

<u>Radius</u>	<u>Relative No.</u>	<u>Radius</u>	<u>Relative No.</u>	<u>Radius</u>	<u>Relative No.</u>
1.900000E-01	1.000000E+00	2.500000E-01	1.000000E+00	3.000000E-01	1.000000E+00
3.500000E-01	1.000000E+00	4.000000E-01	1.000000E+00		

Average numerical dry volume per particle is: 1.211598E-01 cubic meters

Wavelength - .11 m  
 Real Index - 1.33333000  
 Imag. Index - .00000000  
 Number Density - 2.10000E-01 part/cubic meter

<u>Size Group</u>	<u>Maximum Radius</u>	<u>Group cross sections in square meters per particle</u>			
		<u>Extinction</u>	<u>Absorption</u>	<u>Scattering</u>	<u>Backscatter</u>
1	.400	6.42572E-01	0.00000E+00	6.42572E-01	1.76685E+00

\*\*\* Phase Function (integral over solid angle is unity) \*\*\*

<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>	<u>Angle (Deg)</u>	<u>Phase Function</u>
.000	1.56191E+01	2.813	1.19070E+01	5.625	5.20701E+00
8.438	1.55340E+00	11.250	8.72676E-01	14.063	6.94558E-01
16.875	4.63789E-01	19.688	3.92105E-01	22.500	3.25768E-01
25.313	2.19202E-01	28.125	1.78952E-01	30.938	1.68788E-01
33.750	1.32202E-01	36.563	1.08059E-01	39.375	9.91544E-02
42.188	7.95723E-02	45.000	6.49130E-02	47.813	5.96756E-02
50.625	4.94084E-02	53.438	4.11315E-02	56.250	3.74403E-02
59.063	2.99048E-02	61.875	2.49234E-02	64.688	2.31956E-02
67.500	1.85913E-02	70.313	1.60056E-02	73.125	1.50842E-02
75.938	1.17547E-02	78.750	9.95956E-03	81.563	9.55965E-03
84.375	7.62468E-03	87.188	6.84997E-03	90.000	6.63866E-03
92.813	5.49053E-03	95.625	5.30885E-03	98.438	5.31182E-03
101.250	5.21668E-03	104.063	5.40052E-03	106.875	5.47881E-03
109.688	5.56325E-03	112.500	5.45785E-03	115.313	5.58924E-03
118.125	6.15020E-03	120.938	6.34299E-03	123.750	6.35298E-03
126.563	7.99460E-03	129.375	9.02378E-03	132.188	1.10437E-02
135.000	1.53470E-02	137.813	1.62270E-02	140.625	2.27691E-02
143.438	2.94942E-02	146.250	2.78958E-02	149.063	3.62969E-02
151.875	3.89313E-02	154.688	2.87069E-02	157.500	2.53064E-02
160.313	1.94413E-02	163.125	1.45743E-02	165.938	1.49503E-02
168.750	2.14306E-02	171.563	2.16007E-02	174.375	3.05357E-02
177.188	1.32714E-01	180.000	2.18811E-01		

Test integral of phase function is: 1.03898E+00

TABLE 10. LOG-NORMAL SIZE DISTRIBUTION MODEL

$$m = 1.0000015$$

RBAR = 2.25000E-01. SIGMA = 8.00000E-02. RLO = 2.00000E-01

RHI = 6.50000E-01. DENS = 5.00000E+00

Average numerical dry volume per particle is: 3.086332E-01 cubic meters

---

Wavelength = .12 m  
 Real Index = 1.00000150  
 Imag. Index = .00000000  
 Number Density = 5.00000E+00 part/cubic meter

---

Size Group	Maximum Radius	Group cross sections in square meters per particle			
		Extinction	Absorption	Scattering	Backscatter
1	.650	1.41035E-09	0.00000E+00	1.41035E-09	5.63142E-13

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

Angle (Deg)	Phase Function	Angle (Deg)	Phase Function	Angle (Deg)	Phase Function
.000	5.46813E+01	2.813	3.57618E+01	5.625	9.18735E+00
8.438	1.11536E+00	11.250	4.41477E-01	14.063	1.31935E-01
16.875	7.58641E-02	19.688	3.32985E-02	22.500	2.35993E-02
25.313	1.31178E-02	28.125	9.94893E-03	30.938	6.10393E-03
33.750	4.71830E-03	36.563	3.12050E-03	39.375	2.54196E-03
42.188	1.82794E-03	45.000	1.55004E-03	47.813	1.15871E-03
50.625	9.90197E-04	53.438	7.55367E-04	56.250	6.57504E-04
59.063	5.22778E-04	61.875	4.64370E-04	64.688	3.85438E-04
67.500	3.38978E-04	70.313	2.91634E-04	73.125	2.50455E-04
75.938	2.24592E-04	78.750	1.92143E-04	81.563	1.76692E-04
84.375	1.55715E-04	87.188	1.40705E-04	90.000	1.29404E-04
92.813	1.14679E-04	95.625	1.06163E-04	98.438	9.71798E-05
101.250	8.78992E-05	104.063	8.25674E-05	106.875	7.66793E-05
109.688	7.05860E-05	112.500	6.67580E-05	115.313	6.30485E-05
118.125	5.86993E-05	120.938	5.53438E-05	123.750	5.28847E-05
126.563	5.02146E-05	129.375	4.74549E-05	132.188	4.52723E-05
135.000	4.36412E-05	137.813	4.21141E-05	140.625	4.05212E-05
143.438	3.90216E-05	146.250	3.77783E-05	149.063	3.67912E-05
151.875	3.59630E-05	154.688	3.52097E-05	157.500	3.45032E-05
160.313	3.38544E-05	163.125	3.32842E-05	165.938	3.28063E-05
168.750	3.24241E-05	171.563	3.21348E-05	174.375	3.19330E-05
177.188	3.18140E-05	180.000	3.17748E-05		

Test integral of phase function is: 1.13438E+00

TABLE 11. LOG-NORMAL SIZE DISTRIBUTION MODEL

$$m = 1.33333$$

RBAR = 2.25000E-01. SIGMA = 8.00000E-02. RLO = 2.00000E-01  
 RHI = 6.50000E-01. DENS = 5.00000E+00

Average numerical dry volume per particle is: 3.086332E-01 cubic meters

Wavelength = .12 m  
 Real Index = 1.33333000  
 Imag. Index = .00000000  
 Number Density = 5.00000E+00 part/cubic meter

Size Group	Maximum Radius	Group cross sections in square meters per particle			
		Extinction	Absorption	Scattering	Backscatter
1	.650	1.11976E+00	0.00000E+00	1.11976E+00	2.59044E+00

\*\*\* Phase Function (Integral over solid angle is unity) \*\*\*

Angle (Deg)	Phase Function	Angle (Deg)	Phase Function	Angle (Deg)	Phase Function
.000	2.79135E+01	2.813	1.68235E+01	5.625	3.92475E+00
8.438	1.28005E+00	11.250	7.36541E-01	14.063	5.85671E-01
16.875	4.29428E-01	19.688	3.47377E-01	22.500	2.89255E-01
25.313	2.35830E-01	28.125	2.02544E-01	30.938	1.61005E-01
33.750	1.42696E-01	36.563	1.16183E-01	39.375	9.90076E-02
42.188	7.84624E-02	45.000	6.84321E-02	47.813	5.42196E-02
50.625	4.72283E-02	53.438	3.81453E-02	56.250	3.31485E-02
59.063	2.71950E-02	61.875	2.27121E-02	64.688	1.86862E-02
67.500	1.62634E-02	70.313	1.33752E-02	73.125	1.15372E-02
75.938	9.96603E-03	78.750	8.47404E-03	81.563	7.61079E-03
84.375	6.65180E-03	87.188	5.57197E-03	90.000	5.58129E-03
92.813	4.37463E-03	95.625	4.36005E-03	98.438	4.07728E-03
101.250	3.96532E-03	104.063	4.19893E-03	106.875	4.33502E-03
109.688	4.54302E-03	112.500	4.82269E-03	115.313	5.15307E-03
118.125	5.38522E-03	120.938	5.35189E-03	123.750	6.11372E-03
126.563	6.90978E-03	129.375	8.13378E-03	132.188	1.15220E-02
135.000	1.31309E-02	137.813	2.00602E-02	140.625	2.26719E-02
143.438	2.79511E-02	146.250	3.40878E-02	149.063	3.29420E-02
151.875	2.90356E-02	154.688	2.12366E-02	157.500	1.47333E-02
160.313	1.38721E-02	163.125	1.02886E-02	165.938	2.00481E-02
168.750	1.78127E-02	171.563	1.67157E-02	174.375	2.12180E-02
177.188	8.56301E-02	180.000	1.84094E-01		

Test integral of phase function is: 1.06846E+00

## Literature Cited

- Abramowitz, M., and I. A. Stegun, Eds., 1970, Handbook of Mathematical Functions, Applied Mathematics Series 55, Chaps. 8, 10, U.S. Government, Printing Office, Washington, D.C.
- Bohren, Craig F., 1983, Absorption and Scattering of Light by Small Particles, John Wiley & Sons.
- Lentz, William J., 1976, Generating Bessel Functions in Mie Scattering Calculations Using Continued Fractions, Applied Optics, 15:3.
- Miller, August, 1983, Mie Code AGAUS 82, ASL-CR-83-0100-3, U.S. Army Atmospheric Sciences Laboratory, White Sands Missile Range, New Mexico.
- Morse, Philip M., and K. U. Ingard, 1968, Theoretical Acoustics, McGraw-Hill Book Company.
- Nguyen, X. Nguyen, 1993, Conversion of AGAUS Single Precision Code to Quadruple Precision Code, Contract No. DAAD0791M0664, U.S. Army Research Laboratory, White Sands Missile Range, New Mexico.
- Noble, John W., and Harry J. Auvermann (Draft), 1993, The Effect of Large and Small Scale Turbulence on Sound Propagation in the Atmosphere, Battlefield Environment Directorate, U.S. Army Research Laboratory, White Sands Missile Range, New Mexico 88002-5501.
- Van de Hulst, H.C., 1957, Light Scattering by Spherical Particles, John Wiley & Sons, Inc.



## Appendix A. Notes on Acoustic Scattering by a Spherical Turbule

Dr. G. H. Goedecke  
Department of Physics  
New Mexico State University  
Las Cruces, New Mexico 88003

The problem of acoustic scattering by a spherical turbule having uniform reference density different from that of the surroundings but having no flow velocity is solved in these notes. Complete analytic solutions for the differential and total cross-sections for an ideal fluid (no viscosity) are given. The analytic expressions can be evaluated easily if subroutines are available that generate values of spherical Bessel and Neumann functions ( $j_\ell(x)$ ,  $n_\ell(x)$ ) for given arguments  $x$  and that calculate values of the Legendre polynomials  $P_\ell(\mu)$  for given argument  $\mu$  for integers  $\ell \geq 0$ . These subroutines exist in any Mie scattering code. In the following, bold symbols such as  $\mathbf{r}$  are three vectors.

### 1. General Equations and Boundary Conditions

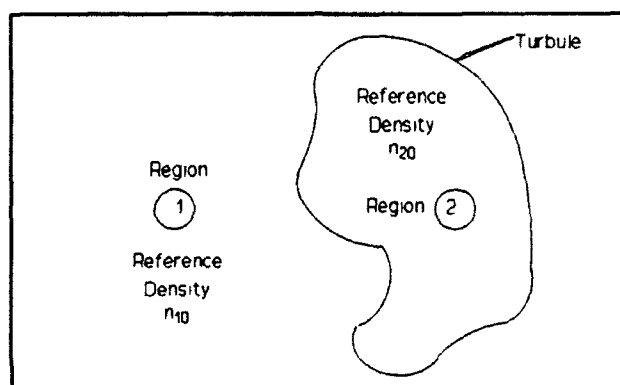


Figure A-1. Constituents of the propagation region.

Referring to figure A-1, imagine a massless but perfectly insulating membrane separating the two regions. Then the pressure must be continuous across the membrane; otherwise, the massless membrane would experience infinite acceleration. If the pressure is continuous, then the massless membrane will not be deformed.

Then, in the reference condition with no waves present, we have

$$p_{10} = n_{10}k_B T_{10} = p_{20} = n_{20}k_B T_{20} = p_0 \quad (\text{A-1})$$

$$p_{10} = n_{10} k_B T_{10} = p_{20} = n_{20} k_B T_{20} = p_0 \quad (\text{A-1})$$

where  $n_{10}$ ,  $n_{20}$  are the reference number concentrations in regions 1 and 2, respectively;  $p_{10}$ ,  $p_{20}$ ,  $p_0$  are pressures;  $T_{10}$ ,  $T_{20}$  are absolute temperatures; and  $k_B$  is the Boltzmann constant. Thus, if the reference number densities are different, then the temperatures must be different.

Now, consider small adiabatic disturbances away from these reference conditions. Then, we have

$$p_1 = p_0 n_1^\gamma / n_{10}^\gamma ; \quad p_2 = p_0 n_2^\gamma / n_{20}^\gamma \quad (\text{A-2})$$

where  $\gamma$  is the ratio of specific heats. Now, let

$$n_1 = n_{10}(1 + \epsilon_1(r,t)) ; \quad n_2 = n_{20}(1 + \epsilon_2(r,t)). \quad (\text{A-3})$$

Then, equations (A-2), (A-3), and continuity of pressure across the boundary imply

$$\epsilon_1 = \epsilon_2 \quad (\text{A-4})$$

at the boundary, or  $\epsilon(r,t)$  is continuous across a boundary.

In each region, we have the equations

$$\frac{\partial n}{\partial t} + \nabla \cdot (n\mathbf{v}) = 0 \quad (\text{A-5})$$

$$\frac{\partial \mathbf{v}}{\partial t} + \mathbf{v} \cdot \nabla \mathbf{v} = -\frac{1}{Mn} \nabla p \quad (\text{A-6})$$

where  $M$  = mass of molecule.

Equation (A-5) implies that  $n_{10} v_{1\perp}$  is continuous. To first order in small quantities, regarding  $v$  as small, this requires

$$n_{10} v_{1\perp} = n_{20} v_{2\perp} \quad (\text{A-7})$$

at the boundary, or  $n_0 v_{\perp}$  is continuous across the boundary.

Now, linearize equations (A-5) and (A-6) using

$$p = p_0(1 + \gamma e) \quad (\text{A-8})$$

in each region. Then equations (A-5) and (A-6) yield

$$\frac{\partial e}{\partial t} + \nabla \cdot v = 0, \quad (\text{A-9})$$

$$\begin{aligned} \frac{\partial v}{\partial t} &= -\frac{p_0 \gamma}{M n_0} \nabla e = -c^2 \nabla e, \\ c^2 &= \frac{\gamma p_0}{M n_0} = \frac{\gamma k_B T_0}{M}. \end{aligned} \quad (\text{A-10})$$

Putting in a time dependence  $e^{-i\omega t}$ , we have

$$e = \frac{1}{i\omega} \nabla \cdot v \quad (\text{A-11})$$

$$v = \frac{c^2}{i\omega} \nabla e. \quad (\text{A-12})$$

Now, from equation (A-7), with  $\hat{n} \equiv$  outward unit normal to boundary surface at any point on the surface, we have, with equation (A-10)

$$\begin{aligned}
n_{10}v_{11} &= \frac{n_{10}c_1^2}{i\omega} \hat{n} \cdot \nabla e_1 = \frac{p_0\gamma}{i\omega M} \hat{n} \cdot \nabla e_1, \\
n_{20}v_{21} &= \frac{n_{20}c_2^2}{i\omega} \hat{n} \cdot \nabla e_2 = \frac{p_0\gamma}{i\omega M} \hat{n} \cdot \nabla e_2.
\end{aligned}
\tag{A-13}$$

From this, we see immediately that

$$\hat{n} \cdot \nabla e_1 = \hat{n} \cdot \nabla e_2 \tag{A-14}$$

at the boundary, or  $\hat{n} \cdot \Delta e$  is continuous across the boundary.

Combining equations (A-11) and (A-12), we have

$$\Delta^2 e_1 + k^2 e_1 = 0, \quad \Delta^2 e_2 + m^2 k^2 e_2 = 0, \tag{A-15}$$

where

$$k = \frac{\omega}{c_1}, \quad m = \frac{c_1}{c_2}, \tag{A-16}$$

and  $m$  = "refractive index" of region 2 with respect to region 1.

Thus, we have to solve equation (A-15), subject to the boundary conditions (A-4) and (A-14); that is,

$$\begin{aligned}
e &\text{ is continuous across the boundary,} \\
\hat{n} \cdot \nabla e &\text{ is continuous across the boundary.}
\end{aligned}
\tag{A-17}$$

These are exactly the same conditions and equations that apply for potential scattering by a uniform potential in quantum mechanics;  $e$  here corresponds to the wave function in quantum mechanics.

## 2. Application to a Spherical Region

We let region 2 be a sphere of radius  $a$  centered at the origin. We assume a plane wave of unit amplitude incident in the  $z$ -direction:

$$e_0(r) = e^{ikz} = \sum_{l=0}^{\infty} (2l+1) i^l j_l(kr) P_l(\cos\theta). \quad (\text{A-18})$$

The second equality expresses the plane wave in terms of the spherical Bessel function  $j_l(kr)$  and the Legendre function  $P_l(\cos\theta)$ . So we write

$$e_1(r, \theta) = \sum_{l=0}^{\infty} (2l+1) i^l [j_l(kr) + a_l h_l^{(1)}(kr)] P_l(\cos\theta) \quad (\text{A-19})$$

$$e_2(r, \theta) = \sum_{l=0}^{\infty} (2l+1) i^l b_l j_l(mkr) P_l(\cos\theta), \quad (\text{A-20})$$

as the general solutions of equation (A-15) in regions 1 and 2, respectively. The coefficients  $(a_l, b_l)$  are to be determined using the boundary conditions (A-17), which for a sphere are

$$e_1(a, \theta) = e_2(a, \theta) \quad (\text{A-21})$$

$$\frac{\partial e_1}{\partial r}(a, \theta) = \frac{\partial e_2}{\partial r}(a, \theta). \quad (\text{A-22})$$

The scattered wave is the second term in equation (A-19). For  $r \rightarrow \infty$ , we know that

$$h_l^{(1)}(kr) \sim (-i)^{l+1} \frac{e^{ikr}}{kr}, \quad (\text{A-23})$$

so the scattered wave is

$$e_s(r, \theta) = \frac{e^{ikr}}{r} \cdot \frac{1}{ik} \sum_{l=0}^{\infty} (2l+1) a_l P_l(\cos \theta), \quad (\text{A-24})$$

whereby the scattering amplitude  $f(k, \theta)$  is

$$f(k, \theta) = \frac{1}{ik} \sum_{l=0}^{\infty} (2l+1) a_l P_l(\cos \theta). \quad (\text{A-25})$$

The differential scattering cross-section is

$$\sigma(k, \theta) = |f(k, \theta)|^2. \quad (\text{A-26})$$

The total scattering cross-section may be obtained in two ways.

First,

$$\sigma_s(k) = \frac{2\pi}{k^2} \sum_l \sum_{l'} (2l+1)(2l'+1) a_l a_{l'}^* \int_0^\pi \sin \theta P_l(\cos \theta) P_{l'}(\cos \theta) d\theta. \quad (\text{A-27})$$

But the integral is equal to

$$\delta_{ll'} \frac{2}{2l'+1}, \quad (\text{A-28})$$

where  $\delta_{ll'}$  is the Kronecker delta. So

$$\sigma_s(k) = \frac{4\pi}{k^2} \sum_{l=0}^{\infty} (2l+1) |a_l|^2. \quad (\text{A-29})$$

The optical theorem yields the extinction cross-section

$$\begin{aligned}\sigma_s(k) &= \frac{4\pi}{k} \Im m(f(0')) = \frac{4\pi}{k^2} \sum_{\ell=0}^{\infty} (2\ell + 1) \Im m(-ia_\ell), \\ \sigma_s(k) &= -\frac{4\pi}{k^2} \sum_{\ell=0}^{\infty} (2\ell + 1) \Re e(a_\ell)\end{aligned}\tag{A-30}$$

since  $P_\ell(\cos 0^\circ) = 1$ , for all  $\ell$ , and  $\Im m(-ia_\ell) = \Im m(-i\Re e(a_\ell) + \Im m(a_\ell)) = -\Re e(a_\ell)$ .

If the refractive index of region 2 is real, as it is here, then we should have

$$\sigma_s(k) = \sigma_j(k).\tag{A-31}$$

So, once we have found the  $a_\ell$ , we can evaluate  $f(k, \theta)$ ,  $\sigma(k, \theta)$ , and  $\sigma_s$ . In order to find the  $a_\ell$ , we apply the boundary conditions (A-21) and (A-22) to equations (A-19) and (A-20). This yields

$$j_\ell(ka) + a_\ell h_\ell^{(1)}(ka) = b_\ell j_\ell(mka),\tag{A-32}$$

$$j'_\ell(ka) + a_\ell h_\ell^{(1)'}(ka) = mb_\ell j'_\ell(mka).\tag{A-33}$$

Here, the prime means "derivative with respect to the argument."

Solution of these equations for  $a_\ell$  yields,

$$\frac{1}{a_\ell} = -\frac{j_\ell(mx)h_\ell^{(1)'}(x) - mj_\ell'(mx)h_\ell^{(1)}(x)}{j_\ell(mx)j'_\ell(x) - mj_\ell'(mx)j_\ell(x)},\tag{A-34}$$

where

$$x = ka.\tag{A-35}$$

Since  $h_\ell^{(1)} = j_\ell + in_\ell$ , we have

$$\frac{1}{a_l} = -\left(1 + i \frac{j_l(mx)n_l'(x) - mj_l'(mx)n_l(x)}{j_l(mx)j_l'(x) - mj_l'(mx)j_l(x)}\right), \quad (A-36)$$

$$= -1 - \Gamma_l$$

where  $\Gamma_l$  is the ratio above, and is real for real  $m$ . Thus

$$a_l = -\frac{1}{1 + i\Gamma_l} = -\frac{(1 - i\Gamma_l)}{1 + \Gamma_l^2}. \quad (A-37)$$

Therefore,

$$-\Re e(a_l) = \frac{1}{1 + \Gamma_l^2} = |a_l|^2. \quad (A-38)$$

From equations (A-38), (A-30), and (A-29), we see that indeed

$$\sigma_s = \frac{4\pi}{k^2} \sum_{\ell=0}^{\infty} (2\ell + 1) \left( \frac{1}{1 + \Gamma_\ell^2} \right) = \sigma_s, \quad (A-39)$$

where

$$\Gamma_l = \frac{j_l(mx)n_l'(x) - mj_l'(mx)n_l(x)}{j_l(mx)j_l'(x) - mj_l'(mx)j_l(x)}. \quad (A-40)$$

Depending on  $m$  and  $x = ka$ ,  $\Gamma_l \rightarrow 0$  for some  $\ell > \ell_{\max}$ ; that is, we can neglect  $\ell > \ell_{\max}$ . The larger  $m$  and the larger  $ka$ , the larger  $\ell_{\max}$ . Roughly,  $\ell_{\max} \approx mka$ . So for computational purposes, we take all sums from  $\ell = 0$  to  $\ell_{\max}$ .

For example, suppose  $mka \ll 1$ . Then the dominant term is  $\ell = 0$ , and we get



$$f(k, \theta) = -\frac{1}{ik} \cdot \frac{1}{1 + i\Gamma_0}, \quad \sigma(k, \theta) = \frac{1}{k^2(1 + \Gamma_0^2)} \quad (\text{A-41})$$

independent of  $\theta$ ; so the scattering is especially symmetric (monopole). This is to be contrasted with the lowest order multipole for the corresponding electromagnetic wave problem, which is dipole in character, with  $\sigma(k, \theta)$  dependent on  $\theta$ .

For this case,  $mka \ll 1$ , we can evaluate  $\Gamma_0$  easily. We need only the asymptotic forms of  $(j_0, n_0)$  for small argument.

From equations (A-12) and (A-24), we see that the scattered wave velocity field is given in the radiation zone ( $r \rightarrow \infty$ ) by

$$\mathbf{v}_s(r, \theta) = \frac{c_1^2}{i\omega} \nabla e_s(r, \theta) \xrightarrow{r \rightarrow \infty} \frac{e^{ikr}}{r} \hat{\mathbf{r}} f(k, \theta). \quad (\text{A-42})$$

Thus, the fluid velocity of the scattered wave is radial (longitudinal). This is to be contrasted with the electric and magnetic fields in the scattered wave in an electromagnetic scattering problem, which are transverse to  $\hat{\mathbf{r}}$ .

At any rate, we have a complete analytic solution to the problem of scattering of acoustic waves by a sphere of uniform reference density different from that of the surroundings. Merely evaluate the  $\Gamma_\ell$ ,  $\ell = 0, \ell_{\max}$  using standard algorithms for the spherical Bessel and Neumann functions  $(j_\ell, n_\ell)$ ; then substitute the results into equation (A-37) for  $a_\ell$ , then substitute  $a_\ell$  into equation (A-25) for  $f(k, \theta)$  using standard algorithms to evaluate the Legendre functions  $P_\ell(\cos\theta)$ .

## Appendix B. The Four Size Distribution Models of ASCT

### Type 0: Arbitrary User-Supplied Discrete Model

This distribution type allows the user to enter from 1 to 513 pairs of data. NRADI is the pairs of radii and absolute number densities. The radius must be entered in meters and the absolute number density in particles per cubic meter per meter. The input file has the following format:

```
NWAVE NIDSTP ICQ NANG IANG NBINS IEO NEOU NUNIT MQRTE
DELTA ATOP (if IDELT = 1)
IDSTP NRADI 0. 0. 0. 0. 0.
R1 F(R1)
R2 F(R2)
.
.
RNRADI F(RNRADI)
WAVE EM CAY 0. 0. 0. 0. 0.
```

### Type 1: Log-Normal Distribution Model

This model is used to compute the cross-sections and phase function for a log-normal distribution of turbule sizes and is described by the following formula:

$$f(r) = \frac{C}{r} \exp\left\{-\frac{1}{2} \left[ \frac{\ln(r/\bar{r})}{\ln(\sigma)} \right]^2\right\} \quad (B-1)$$

The input file has the following format:

```
NWAVE NIDSTP ICQ NANG IANG NBINS IEO NEOU NUNIT MQRTE
DELTA ATOP (if IDELT = 1)
IDSTP RLO RHI RBAR SIGMA DENS
WAVE EM CAY 0. 0. 0. 0. 0.
```

RLO - The minimum radius (m) at which the model is to be cutoff.

RHI - The maximum radius (m) at which the model is to be cutoff.

RBAR - The radius (m) at which the relative number density peaks.

SIGMA - The standard deviation to be used (not LN(SIGMA)).

DENS - The number of particles per cubic meter.

**Type 2: Single Turbule Model: Efficiency Factors/Cross-Sections  
Phase Function Calculations**

Used to compute efficiency factors ( $ICQ = 0$ ) or cross-sections ( $ICQ = 1$ ) and phase function for a single turbule radius. The input file has the following format:

```
NWAVE NIDSTP ICQ NANG IANG NBINS IEO NEOU NUNIT MQRTE  
DELTA ATOP (if IDELT = 1)  
IDSTP RADIUS 0. 0. 0. 0. 0.  
WAVE EM CAY 0. 0. 0. 0.
```

**Type 3: Special Table Generation Mode**

This is not a distribution model but is an operating model used for calculating and printing tables of the efficiency factors as a function of radius. The input file has the following format:

```
NWAVE NIDSTP ICQ NANG IANG NBINS IEO NEOU NUNIT MQRTE  
DELTA ATOP (if IDELT = 1)  
IDSTP RLO RHI DELR 0. 0. 0.  
WAVE EM CAY 0. 0. 0. 0. 0.
```

RLO - The minimum turbule radius (m) to be used.

RHI - The maximum turbule radius (m) to be used.

DELR - The increment in radius (m) to be used.

## Appendix C. AGAUS Formulas

The formulas implemented in program AGAUS for calculating the efficiency factors and the phase function are given below. They are included here to compare the corresponding acoustic formulas for efficiency factors and phase function more easily.

### Expansion Coefficients

$$a_t = \frac{\left[ \frac{A_t(mx)}{m} + \frac{\ell}{x} \right] \Re[\xi_t(x)] - \Re[\xi_{t-1}(x)]}{\left[ \frac{A_t(mx)}{m} + \frac{\ell}{x} \right] \xi_t(x) - \xi_{t-1}(x)}, \quad (C-1)$$

$$b_t = \frac{\left[ mA_t(mx) + \frac{\ell}{x} \right] \Re[\xi_t(x)] - \Re[\xi_{t-1}(x)]}{\left[ mA_t(mx) + \frac{\ell}{x} \right] \xi_t(x) - \xi_{t-1}(x)}, \quad (C-2)$$

$$A_t(mx) = -\frac{\ell}{mx} + \frac{j_{t-1}(mx)}{j_t(mx)} \quad (C-3)$$

### Efficiency Factors

$$Q_{\text{ext}} = \frac{2}{x^2} \sum_{t=1}^{\infty} (2t + 1) \Re(a_t + b_t) \quad (C-4)$$

$$Q_{\text{scat}} = \frac{2}{x^2} \sum_{t=1}^{\infty} (2t + 1) [|a_t|^2 + |b_t|^2] \quad (C-5)$$

$$Q_{\text{rad}} = \frac{1}{x^2} \left| \sum_{t=1}^{\infty} (2t + 1) (-1)^t (a_t + b_t) \right|^2 \quad (C-6)$$

### Scattering Amplitudes

$$S_1(\theta) = \sum_{\ell=1}^{\infty} \frac{2\ell + 1}{\ell(\ell + 1)} [a_{\ell}\pi_{\ell}(\theta) + b_{\ell}\tau_{\ell}(\theta)] \quad (C-7)$$

$$S_2(\theta) = \sum_{\ell=1}^{\infty} \frac{2\ell + 1}{\ell(\ell + 1)} [b_{\ell}\pi_{\ell}(\theta) + a_{\ell}\tau_{\ell}(\theta)] \quad (C-8)$$

### Intensity Factors

$$i_1(\theta) = |S_1(\theta)|^2 \quad (C-9)$$

$$i_2(\theta) = |S_2(\theta)|^2 \quad (C-10)$$

### Recurrence formulas for Pi and Tau Functions

$$\pi_{\ell}(\theta) = \cos\theta \frac{(2\ell + 1)}{(\ell + 1)} \pi_{\ell-1}(\theta) - \frac{\ell}{\ell-1} \pi_{\ell-2}(\theta) \quad (C-11)$$

$$\tau_{\ell}(\theta) = \cos\theta [\pi_{\ell}(\theta) - \pi_{\ell-2}(\theta)] - (2\ell-1)\sin^2\theta \pi_{\ell-1}(\theta) + \pi_{\ell-2}(\theta) \quad (C-12)$$

### Phase Function

$$P(\theta) = \frac{[i_1(\theta) + i_2(\theta)]}{2k^2 C_{\text{scat}}} \quad (C-13)$$

For all the above  $\ell = 1, 2, 3, \dots$

DISTRIBUTION LIST FOR PUBLIC RELEASE

Commandant  
U.S. Army Chemical School  
ATTN: ATZN-CM-CC (S. Barnes)  
Fort McClellan, AL 36205-5020

NASA/Marshall Space Flight Center  
Deputy Director  
Space Science Laboratory  
Atmospheric Sciences Division  
ATTN: E501 (Dr. George H. Fichtl)  
Huntsville, AL 35802

NASA/Marshall Space Flight Center  
Atmospheric Sciences Division  
ATTN: Code ED-41  
Huntsville, AL 35812

Deputy Commander  
U.S. Army Strategic Defense Command  
ATTN: CSSD-SL-L  
Dr. Julius Q. Lilly  
P.O. Box 1500  
Huntsville, AL 35807-3801

Commander  
U.S. Army Missile Command  
ATTN: AMSMI-RD-AC-AD  
Donald R. Peterson  
Redstone Arsenal, AL 35898-5242

Commander  
U.S. Army Missile Command  
ATTN: AMSMI-RD-AS-SS  
Huey F. Anderson  
Redstone Arsenal, AL 35898-5253

Commander  
U.S. Army Missile Command  
ATTN: AMSMI-RD-AS-SS  
B. Williams  
Redstone Arsenal, AL 35898-5253

Commander  
U.S. Army Missile Command  
ATTN: AMSMI-RD-DE-SE  
Gordon Lill, Jr.  
Redstone Arsenal, AL 35898-5245

Commander  
U.S. Army Missile Command  
Redstone Scientific Information  
Center  
ATTN: AMSMI-RD-CS-R/Documents  
Redstone, Arsenal, AL 35898-5241

Commander  
U.S. Army Intelligence Center  
and Fort Huachuca  
ATTN: ATSI-CDC-C (Mr. Colanto)  
Fort Huachuca, AZ 85613-7000

Northrup Corporation  
Electronics Systems Division  
ATTN: Dr. Richard D. Tooley  
2301 West 120th Street, Box 5032  
Hawthorne, CA 90251-5032

Commander - Code 3331  
Naval Weapons Center  
ATTN: Dr. Alexis Shlanta  
China Lake, CA 93555

Commander  
Pacific Missile Test Center  
Geophysics Division  
ATTN: Code 3250 (Terry E. Battalino)  
Point Mugu, CA 93042-5000

Lockheed Missiles & Space Co., Inc.  
Kenneth R. Hardy  
Org/91-01 B/255  
3251 Hanover Street  
Palo Alto, CA 94304-1191

Commander  
Naval Ocean Systems Center  
ATTN: Code 54 (Dr. Juergen Richter)  
San Diego, CA 92152-5000

Meteorologist in Charge  
Kwajalein Missile Range  
P.O. Box 67  
APO San Francisco, CA 96555

U.S. Department of Commerce  
Mountain Administration Support  
Center  
Library, R-51 Technical Reports  
325 S. Broadway  
Boulder, CO 80303

Dr. Hans J. Liebe  
NTIA/ITS S 3  
325 S. Broadway  
Boulder, CO 80303

NCAR Library Serials  
National Center for Atmos Rsch  
P.O. Box 3000  
Boulder, CO 80307-3000

HQDA  
ATTN: DAMI-POI  
Washington, DC 20310-1067

Mil Asst for Env Sci Ofc of  
The Undersecretary of Defense  
for Rsch & Engr/R&AT/E&LS  
Pentagon - Room 3D129  
Washington, DC 20301-3080

HQDA  
DEAN-RMD/Dr. Gomez  
Washington, DC 20314

Director  
Division of Atmospheric Science  
National Science Foundation  
ATTN: Dr. Eugene W. Bierly  
1800 G. Street, N.W.  
Washington, DC 20550

Commander  
Space & Naval Warfare System Command  
ATTN: PMW-145-1G (LT Painter)  
Washington, DC 20362-5100

Commandant  
U.S. Army Infantry  
ATTN: ATSH-CD-CS-OR  
Dr. E. Dutoit  
Fort Benning, GA 30905-5090

USAFETAC/DNE  
Scott AFB, IL 62225

Air Weather Service  
Technical Library - FL4414  
Scott AFB, IL 62225-5458

USAFETAC/DNE  
ATTN: Mr. Charles Glauber  
Scott AFB, IL 62225-5008

Commander  
U.S. Army Combined Arms Combat  
ATTN: ATZL-CAW (LTC A. Kyle)  
Fort Leavenworth, KS 66027-5300

Commander  
U.S. Army Space Institute  
ATTN: ATZI-SI (Maj Koepsell)  
Fort Leavenworth, KS 66027-5300

Commander  
U.S. Army Space Institute  
ATTN: ATZL-SI-D  
Fort Leavenworth, KS 66027-7300

Commander  
Phillips Lab  
ATTN: PL/LYP (Mr. Chisholm)  
Hanscom AFB, MA 01731-5000

Director  
Atmospheric Sciences Division  
Geophysics Directorate  
Phillips Lab  
ATTN: Dr. Robert A. McClatchey  
Hanscom AFB, MA 01731-5000

Raytheon Company  
Dr. Charles M. Sonnenschein  
Equipment Division  
528 Boston Post Road  
Sudbury, MA 01776  
Mail Stop 1K9

Director  
U.S. Army Materiel Systems  
Analysis Activity  
ATTN: AMXSY-MP (H. Cohen)  
APG, MD 21005-5071

Commander  
U.S. Army Chemical Rsch,  
Dev & Engr Center  
ATTN: SMCCR-OPA (Ronald Pennsyle)  
APG, MD 21010-5423

Commander  
U.S. Army Chemical Rsch,  
Dev & Engr Center  
ATTN: SMCCR-RS (Mr. Joseph Vervier)  
APG, MD 21010-5423

Commander  
U.S. Army Chemical Rsch,  
Dev & Engr Center  
ATTN: SMCCR-MUC (Mr. A. Van De Wal)  
APG, MD 21010-5423

Director  
U.S. Army Materiel Systems  
Analysis Activity  
ATTN: AMXSY-AT (Mr. Fred Campbell)  
APG, MD 21005-5071

Director  
U.S. Army Materiel Systems  
Analysis Activity  
ATTN: AMXSY-CR (Robert N. Marchetti)  
APG, MD 21005-5071

Director  
U.S. Army Materiel Systems  
Analysis Activity  
ATTN: AMXSY-CS (Mr. Brad W. Bradley)  
APG, MD 21005-5071

Director  
U.S. Army Research Laboratory  
ATTN: AMSRL-D  
2800 Powder Mill Road  
Adelphi, MD 20783

Director  
U.S. Army Research Laboratory  
ATTN: AMSRL-OP-CI-A  
(Technical Publishing)  
2800 Powder Mill Road  
Adelphi, MD 20783

Director  
U.S. Army Research Laboratory  
ATTN: AMSRL-OP-CI-AD, Record Copy  
2800 Powder Mill Road  
Adelphi, MD 20783

Director  
U.S. Army Research Laboratory  
ATTN: AMSRL-SS-SH  
Dr. Z.G. Sztankay  
2800 Powder Mill Road  
Adelphi, MD 20783

National Security Agency  
ATTN: W21 (Dr. Longbothum)  
9800 Savage Road  
Ft George G. Meade, MD 20755-6000

U. S. Army Space Technology  
and Research Office  
ATTN: Brenda Brathwaite  
5321 Riggs Road  
Gaithersburg, MD 20882

OIC-NAVSWC  
Technical Library (Code E-232)  
Silver Springs, MD 20903-5000

The Environmental Research  
Institute of Michigan  
ATTN: IRIA Library  
P.O. Box 134001  
Ann Arbor, MI 48113-4001

Commander  
U.S. Army Research Office  
ATTN: DRXRO-GS (Dr. W.A. Flood)  
P.O. Box 12211  
Research Triangle Park, NC 27709

Dr. Jerry Davis  
North Carolina State University  
Department of Marine, Earth, &  
Atmospheric Sciences  
P.O. Box 8208  
Raleigh, NC 27650-8208

Commander  
U. S. Army CECRL  
ATTN: CECRL-RG (Dr. H. S. Boyne)  
Hanover, NH 03755-1290



Commanding Officer  
U.S. Army ARDEC  
ATTN: SMCAR-IMI-I, Bldg 59  
Dover, NJ 07806-5000

U.S. Army Communications-Electronics  
Command EW/RSTA Directorate  
ATTN: AMSEL-RD-EW-OP  
Fort Monmouth, NJ 07703-5206

Commander  
U.S. Army Satellite Comm Agency  
ATTN: DRCPM-SC-3  
Fort Monmouth, NJ 07703-5303

6585th TG (AFSC)  
ATTN: RX (CPT Stein)  
Holloman AFB, NM 88330

Department of the Air Force  
OL/A 2nd Weather Squadron (MAC)  
Holloman AFB, NM 88330-5000

PL/WE  
Kirtland AFB, NM 87118-6008

Director  
U.S. Army TRADOC Analysis Command  
ATTN: ATRC-WSS-R  
White Sands Missile Range, NM 88002

USAF Rome Laboratory Technical  
Library, FL2810 Corridor W, Site 262,  
RL//SUL (DOCUMENTS LIBRARY)  
26 Electronics Parkway, Bldg 106  
Griffiss AFB, NY 13441-4514

AFMC/DOW  
Wright-Patterson AFB, OH 0334-5000

Commandant  
U.S. Army Field Artillery School  
ATTN: ATSF-TSM-TA  
Mr. Charles Taylor  
Fort Sill, OK 73503-5600

Commander  
Naval Air Development Center  
ATTN: Al Salik (Code 5012)  
Warminster, PA 18974

Commander  
U.S. Army Dugway Proving Ground  
ATTN: STEDP-MT-DA-M  
Mr. Paul Carlson  
Dugway, UT 84022

Commander  
U.S. Army Dugway Proving Ground  
ATTN: STEDP-MT-DA-L  
Dugway, UT 84022

Commander  
U.S. Army Dugway Proving Ground  
ATTN: STEDP-MT-M (Mr. Bowers)  
Dugway, UT 84022-5000

Defense Technical Information Center  
ATTN: DTIC-FDAC (2)  
Cameron Station  
Alexandria, VA 22314

Commanding Officer  
U.S. Army Foreign Science &  
Technology Center  
ATTN: CM  
220 7th Street, NE  
Charlottesville, VA 22901-5396

Naval Surface Weapons Center  
Code G63  
Dahlgren, VA 22448-5000

Commander  
U.S. Army OEC  
ATTN: CSTE-EFS  
Park Center IV  
4501 Ford Ave  
Alexandria, VA 22302-1458

Commander and Director  
U.S. Army Corps of Engineers  
Engineer Topographics Laboratory  
ATTN: ETL-GS-LB  
Fort Belvoir, VA 22060

TAC/DOWP  
Langley AFB, VA 23665-5524

U.S. Army Topo Engineering Center  
ATTN: CETEC-ZC  
Fort Belvoir, VA 22060-5546

Commander  
Logistics Center  
ATTN: ATCL-CE  
Fort Lee, VA 23801-6000

Commander  
USATRADO  
ATTN: ATCD-FA  
Fort Monroe, VA 23651-5170

Science and Technology  
101 Research Drive  
Hampton, VA 23666-1340

Commander  
U.S. Army Nuclear & Cml Agency  
ATTN: MONA-ZB Bldg 2073  
Springfield, VA 22150-3198