

AD-A272 841

2



NAVAL POSTGRADUATE SCHOOL
Monterey, California



DTIC
ELECTE
NOV 17 1993

E D

THESIS

Analysis of Simulated Drift Patterns of
a High Altitude Balloon Surveillance
System

by

Kurt Charles Reitinger

June 1993

Principal Advisor: Michael Melich

Approved for public release; distribution is unlimited.

93-27982



7114

93 11 13 011

REPORT DOCUMENTATION PAGE

1a Report Security Classification: Unclassified		1b Restrictive Markings	
2a Security Classification Authority		3 Distribution/Availability of Report	
2b Declassification/Downgrading Schedule		Approved for public release; distribution is unlimited.	
4 Performing Organization Report Number(s)		5 Monitoring Organization Report Number(s)	
6a Name of Performing Organization Naval Postgraduate School	6b Office Symbol (if applicable) 39	7a Name of Monitoring Organization Naval Postgraduate School	
6c Address (city, state, and ZIP code) Monterey CA 93943-5000		7b Address (city, state, and ZIP code) Monterey CA 93943-5000	
8a Name of Funding/Sponsoring Organization	6b Office Symbol (if applicable)	9 Procurement Instrument Identification Number	
Address (city, state, and ZIP code)		10 Source of Funding Numbers	
		Program Element No	Project No
		Task No	Work Unit Accession No
11 Title (include security classification) ANALYSIS OF SIMULATED DRIFT PATTERNS OF A HIGH ALTITUDE BALLOON SURVEILLANCE SYSTEM			
12 Personal Author(s) Reitinger, Kurt C.			
13a Type of Report Master's Thesis	13b Time Covered From To	14 Date of Report (year, month, day) June 1993	15 Page Count 71
16 Supplementary Notation The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.			
17 Cosati Codes		18 Subject Terms (continue on reverse if necessary and identify by block number)	
Field	Group	missile defense, theater missile defense, Scud, surveillance, balloon, high-altitude balloon, super pressure balloon, atmosphere, stratosphere, atmospheric circulation, command and control	
19 Abstract (continue on reverse if necessary and identify by block number) This study evaluates the potential of high altitude balloons as surveillance platforms. It begins with the mobile Theater Ballistic Missile (TBM) detection problem encountered during the Persian Gulf War of 1990-1991 and it describes a possible scenario using high altitude balloon surveillance systems to locate TBM's accurately enough for effective engagement by strike assets. It presents the history and military use of balloons, and it describes the current state of technology of differing balloon types. Atmospheric circulation impacting balloon drift is presented along with a description of available atmospheric models. Trajectory prediction programs are reviewed and a revised program is used to conduct a simulation of balloon trajectories. Balloon locations at fixed times are analyzed for variability. The study concludes that high altitude balloons have some potential for use as surveillance platforms for limited periods of time.			
20 Distribution/Availability of Abstract x_unclassified/unlimited x_same as report _ DTIC users		21 Abstract Security Classification Unclassified	
22a Name of Responsible Individual Michael Melich		22b Telephone (include Area Code) (408)_-656-2772	22c Office Symbol SP/MM

Approved for public release; distribution is unlimited.

Analysis of Simulated Drift Patterns of a High Altitude
Balloon Surveillance System

by

Kurt C. Reitingger
Major, United States Army
B.S., United States Military Academy


Submitted in partial fulfillment
of the requirements for the degree of

MASTER OF SCIENCE IN SYSTEMS TECHNOLOGY

from the


NAVAL POSTGRADUATE SCHOOL
June 1993

Author:



Kurt C. Reitingger


Approved by:



Michael Melich, Principal Advisor



R.T. Williams, Associate Advisor



Paul H. Moose, Chairman

Command, Control and Communications Academic Group

ABSTRACT

This study evaluates the potential of high altitude balloons as surveillance platforms. It begins with the mobile Theater Ballistic Missile (TBM) detection problem encountered during the Persian Gulf War of 1990-1991 and it describes a possible scenario using high altitude balloon surveillance systems to locate TBM's accurately enough for effective engagement by strike assets. It presents the history and military use of balloons, and it describes the current state of technology of differing balloon types. Atmospheric circulation impacting balloon drift is presented along with a description of available atmospheric models. Trajectory prediction programs are reviewed and a revised program is used to conduct a simulation of balloon trajectories. Balloon locations at fixed times are analyzed for variability. The study concludes that high altitude balloons have some potential for use as surveillance platforms for limited periods of time.

DTIC QUALITY INSPECTED 5

Accession For	
NTIS	CRA&I
DTIC	TAB
Unannounced	
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or Special
A-1	

TABLE OF CONTENTS

I. INTRODUCTION 1

 A. PURPOSE 1

 B. RESEARCH QUESTIONS AND LIMITATIONS 1

II. BACKGROUND: PERSIAN GULF WAR SCUD CAMPAIGN 3

 A. SCUD CAMPAIGN EFFORTS 3

 B. PERSIAN GULF SCUD CAMPAIGN DIFFICULTIES 4

 C. BALLOON SURVEILLANCE SCENARIO 1995 5

III. BALLOON USE AND TECHNOLOGY 7

 A. BALLOON HISTORY 7

 1. Buoyancy and Lift 7

 2. Balloon Invention and Development 9

 3. Military Balloon Use 10

 B. CURRENT BALLOON TECHNOLOGY 13

 1. Zero Pressure Balloons 14

 2. Superpressure Balloons 17

 3. Sky Anchor Balloons 20

 C. SUMMARY OF BALLOON USE AND HISTORY 21

IV. ATMOSPHERIC CIRCULATION AND MODELING 22

 A. ATMOSPHERE STRUCTURE 22

B.	ATMOSPHERIC CIRCULATION	24
1.	Fundamental Motion Forces	24
2.	Observed Circulation	27
a.	Zonally Averaged Circulation	27
b.	Observed Circulation Patterns	27
C.	ATMOSPHERIC CIRCULATION MODELING	30
D.	SUMMARY OF ATMOSPHERIC CIRCULATION AND MODELING	32
V.	TRAJECTORY PREDICTION	33
A.	BALLOON TRAJECTORY PREDICTION PROGRAMS	33
B.	PREDICTION SIMULATION DESIGN	36
1.	Physical Equipment	36
2.	Hypotheses	36
3.	Assumptions	36
4.	Measure of Balloon Drift	37
5.	Statistical Design of Simulation	37
C.	PREDICTION SIMULATION DATA ANALYSIS	38
1.	Balloon Location After Ten Days	38
2.	Balloon Location After 30 Days	40
3.	Balloon Location After 360 Days	41
4.	Comparison of Categories	42
5.	Real World Meaning of Results	43
VI.	CONCLUSIONS	44
A.	BALLOON SURVEILLANCE SYSTEM FEASIBILITY	44
B.	AREAS FOR FUTURE STUDY	44

APPENDIX (MODIFIED GRAM-90 SOURCE CODE)	46
LIST OF REFERENCES	59
INITIAL DISTRIBUTION LIST	61

LIST OF TABLES

TABLE I.	LIFT GAS COMPARISON	8
TABLE II.	HELIUM NEEDED FOR SELECTED PAYLOAD WEIGHTS	9
TABLE III.	ALTITUDE-PRESSURE REFERENCE POINTS	24
TABLE IV.	SIMULATION VARIABLES AND VALUES	37
TABLE V.	LATITUDE ANALYSIS OF VARIANCE AT TEN DAYS .	39
TABLE VI.	INITIAL CONDITION SETS	39
TABLE VII.	360 DAY LATITUDE DISTRIBUTION	42

LIST OF FIGURES

Figure 1. Basic Balloon Types	13
Figure 2. U.S. Standard Atmosphere Temperature Profile, 1976	22
Figure 3. Pressure Gradient Force	25
Figure 4. Coriolis Acceleration	25
Figure 5. Geostrophic Winds	26
Figure 6. Zonal Mean Winds for Solstice Conditions .	28
Figure 7. January Zonal Mean Winds	29
Figure 8. April Zonal Mean Winds	29
Figure 9. July Zonal Mean Winds	29
Figure 10. October Zonal Mean Winds	29
Figure 11. 10 Day Latitude Displacement	40
Figure 12. 30 Day Latitude Displacement	40
Figure 13. 360 Day Latitude Displacement	41

I. INTRODUCTION

A. PURPOSE

The Persian Gulf War of 1990-1991 included the firing of more than 80 Scud missiles against Coalition forces and Israel. This was actually the *second* employment of theater ballistic missiles against United States' forces; Germany's use of V-1 and V-2 rockets in World War II was the first. While the military importance of mobile tactical ballistic missiles can be argued, we learned from the Persian Gulf War that such missiles are a threat and they are neither easily detected nor easily destroyed. The purpose of this work is to examine using high altitude balloon systems with sensor payloads to increase our ability to detect and to locate enemy mobile tactical ballistic missile systems.

B. RESEARCH QUESTIONS AND LIMITATIONS

The basic hypothesis of this study is that employing balloons as surveillance platforms at altitudes in excess of 21 kilometers is feasible. Possible research questions include:

- How will balloons drift at higher altitudes?
- Will either "strategic" global circumnavigating balloons or "tactical" theater-employed balloons pass over or nearly over a designated target area to allow some set of these balloons to provide continuous coverage of a target area?

- What are the operational requirements of a balloon surveillance system: e.g. how many systems are needed for coverage of an area and what sensors are best?

This study focuses on the question of balloon drift: that is, where balloon surveillance systems drifting at high altitude would go. The question is further narrowed to balloon location at specific times after launch: ten days, one month, and one year. These locations were used for a statistical analysis of the variance in mean location of drifting high altitude balloons. Thus, the perspective is limited by these discrete and disparate time points. The research presented in this thesis contains no classified information.

II. BACKGROUND: PERSIAN GULF WAR SCUD CAMPAIGN

A. SCUD CAMPAIGN EFFORTS

When Iraq first launched its Scud missiles during the war, conventional wisdom was unanimous: the Scud missiles were militarily insignificant. The reasons were that Iraq had few missile systems and those they had were inaccurate and unreliable. Unfortunately, conventional wisdom concerning the political significance of the Scud attacks was equally unanimous: the attacks could easily bring Israel into the war, with the subsequent result that the Allied Coalition would disintegrate. Given this possibility, the Allies had no choice but to mount a major effort against the Scuds.

It is reported that five percent of the air sorties flown during the war were against the Scuds (Dunnigan, 1992, p. 155), but that figure does not indicate the level of effort actually directed against the Scud threat. The ratio of Scud missions flown out of the total number of strike aircraft sorties flown would be much more than five percent. Also, significant non-air assets (Patriot units, launch detection sensors and communication assets) were employed for Scud defense. With this level of effort, Scud operations were degraded, but post-war analysis has indicated that destroying

Scud launchers was a difficult job at best because of the complexities involved with detection and engagement.

B. PERSIAN GULF SCUD CAMPAIGN DIFFICULTIES

Initial claims reported by the services and published by the news media during and immediately after the war suggested that Allied forces were extremely effective in detecting and destroying mobile launchers, albeit usually after launch. Upon closer examination, however, it has become clear that we were not very effective in doing so. In fact, "there are no confirmed reports of any Scud launchers that were destroyed by Coalition forces during the war." (Israel, 1993) We particularly had difficulty finding the launchers, which fired missiles, quickly enough to engage them before they repositioned: sensors in use were inadequate to provide the range, accuracy, and timeliness needed. Costs and operational characteristics of overhead systems, to include remotely piloted vehicles and combat aircraft, precluded continuous, low-cost, low-risk surveillance of an area. Shortly before the Persian Gulf War, the U.S. Army Strategic Defense Command defined several requirements for sensors to detect and to locate mobile missiles. Future sensors must:

- Provide broad area coverage.
- Provide long dwell-time coverage.
- Provide day/night/all-weather coverage.
- Overfly enemy areas.

- Identify potential targets as mobile Scuds.
- Report in near-real time.
- Cue attack assets. (Severance, 1990, pp. 28-29)

What systems can meet these requirements? Our Gulf War experience could be used to argue that the U.S. currently has no sensor systems that satisfy all of these needs. However, a free-floating high-altitude balloon surveillance system may be able to do so.

C. BALLOON SURVEILLANCE SCENARIO 1995

Recent Iraqi behavior on several fronts has raised the possibility of military confrontation. Slaughtering of Shiites in the south, heightened tensions directed against the Kurds in the north, Iraqi defiance of United Nations inspection teams, and Iraqi saber-rattling about gaining control of Kuwait, long considered by Iraq as it's 19th province, all indicate an Iraqi intention to break out from underneath stifling U.N. sanctions through military action. United States (U.S.) forces stationed in Saudi Arabia and Israel are prepared, however, with limited defensive units in place and with alerted strike forces on board ships in the Persian Gulf. Seeming to have learned from his failed 1990 invasion of Kuwait, Saddam Hussein daringly launches an all-out attack, simultaneously crossing the border into Kuwait with ground forces and launching Scud missiles at both Saudi Arabia and Israel. Air raid sirens warn friendly personnel to

take cover and to don protective masks. Improved Patriot anti-missile rockets streak from the ground to intercept the Scud missiles before their targets can be reached. The dark night sky lights up brightly from the fireworks of intercepts, and the Scud missiles are obliterated by the kinetic energy impacts high in the atmosphere. Friendly personnel breathe a little easier as the "all-clear" is sounded and the counterattack against the Scud Transporter Erector Launchers (TELS) begins. Despite an inability to engage the TELS before their departure from the launch area, U.S. forces are able to track the TELS to their "hide" locations using reconnaissance balloons. Upon the launch of the Scuds, the Infrared sensor carried in the balloon payload detects a launch plume, and then triggers a Moving Target Indicator/Synthetic Aperture Radar (MTI/SAR) to point to the launch area. The MTI/SAR focuses upon the vehicle at the launch point, which the SAR processing system identifies as a mobile launcher. The MTI "locks" onto the launcher, tracking it as it repositions from the launch location to a hide location. That location is passed to an in-theater ground station which directs the mobilization of alert aircraft from a carrier to attack the Scud. Smart munitions are subsequently launched to penetrate a sand-covered bunker, where the TEL is destroyed.

III. BALLOON USE AND TECHNOLOGY

A. BALLOON HISTORY

1. Buoyancy and Lift

Archimedes first discovered the principle of buoyancy, that a body immersed in fluid is buoyed up by a vertical force equal in magnitude to the weight of the displaced fluid, in about 240 B.C. The object of a balloon is to displace a large weight of air, thus gaining a buoyant force equal to the weight of the air displaced. Buoyancy is defined by the equation $Bouyancy = (\rho_{air}) (Vol_{gas}) (g) (1 - M_{gas}/M_{air}) = (g) (Vol_{gas}) (\rho_{air} - \rho_{gas})$ which shows that balloon lift is dependent upon the volume of the balloon (Vol_{gas}) and the difference between the internal "lifting gas" density (ρ_{gas}) and the external air density (ρ_{air}), with g being the acceleration due to gravity. This equation indicates that any gas having a molecular weight less than the molecular weight of air is a potentially useful lifting gas. A comparison of several of these gases and their lifting capability is shown in Table 1. The medium with the smallest molecular weight, hydrogen, provides the greatest lift, with helium next best. (Morris, 1975, pp. IV-4 - IV-7)

TABLE I. LIFT GAS COMPARISON

Gas	Molecular Weight*	Lift Index ($1 - M_g/M_a$)
Vacuum	0.000	1.000
Hydrogen	2.016	0.930
Helium	4.003	0.862
Ammonia	17.030	0.412
Water Vapor (Steam)	18.010	0.378
Air	28.960	0.000

* Standard Temperature and Pressure (STP)
 M_g = Molecular Weight of Gas
 M_a = Molecular Weight of Air

A review of several key characteristics of a few lifting gases reveals why helium is a common choice:

- a vacuum is ideal but obviously difficult to contain.
- hydrogen is readily available and inexpensive, but it is highly flammable.
- helium is readily available, although it is moderately expensive.
- ammonia is toxic in high concentrations and it liquifies easily.
- steam liquifies too readily.
- air is inexpensive but it provides lift only if the density of the air inside the balloon is less than the air outside the balloon (hot air balloons). (Morris, 1975, p. IV-5)

Table II shows examples of the lifting gas required for buoyancy for selected payload weights. It should be noted

**TABLE II. HELIUM NEEDED FOR
SELECTED PAYLOAD WEIGHTS**

Payload Weight (lb/kg)	Balloon Diameter (ft)	Lifting Gas Quantity (ft ³)
100/ 45	45	1520
500/225	130	7600
1000/450	200	15200

that the buoyancy of the balloon must be greater than the weight of the payload for the system to ascend: the balloon will not lift a payload if the buoyant force is less than the forces holding the balloon down. Thus, the weight of the payload suspended below the balloon determines the amount of lifting gas (and the size the weight of the balloon) needed to ensure sufficient buoyancy. (Morris, 1975, pp. IV-4 - IV-7)

2. Balloon Invention and Development

It was not until 1250 A.D. that Roger Bacon suggested filling a vessel with some fluid lighter than air to apply Archimedes' principle in the atmosphere. Cyrano de Bergerac proposed using a belt consisting of glass phials filled with dew to help him ascend to the stars in his book *Voyages to the Moon and the Sun*, published between 1657 and 1662, and then Jacques and Joseph Montgolfier first demonstrated these concepts in November 1782. Wondering why smoke always rose upwards and what would happen if the hot air could be

entrapped, they fashioned a lightweight paper bag (their father was a paper manufacturer), and then burned paper underneath. The bag rose to the ceiling of their room. The Montgolfier's repeated their success outdoors, and then demonstrated it with a larger balloon before the Academy of Sciences in Paris. (Glines, 1965, p. 5)

Two centuries of experimentation in shapes, sizes, materials, and lifting gases have followed. Technological advancements have introduced lighter, thinner, stronger, and more versatile balloon envelopes, including plastic films. These changes have resulted in increased buoyancy, decreased gas permeability and longer duration flight. As a result, today's balloons can reliably fly higher and farther than ever before. (Dollfus, 1961, p. 97)

3. Military Balloon Use

Balloons were first used for military purposes during the French Revolution in 1794 at the Battle of Fleurus, where Frenchman Jean Coutelle went 450 meters aloft in a tethered balloon to observe enemy formations and movements. His observations were loudly proclaimed afterwards as key to the French victory. (Glines, 1965, p. 98)

Surveillance balloons were successfully used during the American Civil War with much fanfare, both by the South and the North. Union use was much more successful, led by the much-acclaimed Professor Thaddeus Lowe who made numerous

surveillance flights from 1861 to 1863. Professor Lowe's largest contributions were made during the Peninsular Campaign in support of General Hooker. Lowe frequently provided information about the enemy that could not have been obtained without his Balloon Corps of seven balloons and a Navy vessel. Unfortunately, neither Professor Lowe nor his fellow aeronauts were ever commissioned, and the administration of his Balloon Corps was passed from one organization to another. The result was that the Balloon Corps' transportation assets were frequently taken away for other needs so it became impossible to move the equipment: Professor Lowe failed to reach Antietam and Gettysburg quickly enough to provide observation of enemy movements. The difficulties in administrative organization and logistics led to the eventual disintegration of the Corps, with Lowe quitting shortly after Gettysburg. (Glines, 1965, pp. 101-109)

The Franco-Prussian War of 1870-71 saw an increase in balloon use during the siege of Paris, when citizens built 64 balloons which they used to escape and to send messages over the surrounding German troops. By the end of the war, 11 tons of mail and 164 people had been successfully airlifted out. (Glines, 1965, pp. 122-127)

Balloons were used during both World Wars, predominantly in the form of dirigibles, or powered air vehicles. Count Ferdinand von Zeppelin had served with Professor Lowe during the American Civil War and he had become

alarmed by the developments made by the French, who had crafted a non-rigid airship which could fly at 11 miles per hour powered by an electric engine. The non-rigid French airship could provide long-range surveillance and carry bombs. The Count built a new rigid airship, named after Zeppelin himself. The Zeppelins were used by the Germans during both World Wars for resupply and bombing, but the hydrogen-filled dirigibles were vulnerable to faster, higher-flying fighter aircraft equipped with machine guns, so their use was limited. (Macksey, 1986, pp. 48-49)

Also during World War II, the Japanese sent 9000 parchment balloons carrying incendiary devices toward the United States. About 1000 balloons reached the North American continent, but the only recorded casualties were five children and a woman at a picnic in Oregon. The U.S. government requested that newspapers not report that the balloons were reaching the mainland, and the media blackout led the Japanese to conclude that their program was not worth continuing, despite the fact that their trans-ocean success rate was actually rather good. (Glines, 1965, pp. 143-147)

American military use was prompted by the Japanese program's success, which demonstrated the potential of using jetstream winds to propel balloons. In 1950, the U.S. Air Force began research on a balloon surveillance system to provide reconnaissance overflights of the Soviet Union. This work was done concurrently with the development of the U-2

reconnaissance aircraft and early satellite research. In January 1956, the system was put into operation with balloons containing cameras launched from five locations in Europe. They drifted across Asia at 13.6 kilometers altitude, taking pictures, and while many landed over foreign territory, about 40 were successfully recovered from the Pacific Ocean. The program was discontinued on March 1, 1956 following Soviet protests and a *Washington Post* story on February 10. The program was able, however, to photograph over 1 million square miles of the Sino-Soviet area, at a cost of only \$48.49 per square mile. (Davies, 1988, pp. 59-61)

B. CURRENT BALLOON TECHNOLOGY

The three basic types of balloons, zero pressure, superpressure, and sky anchor, are shown in Figure 1 (after Lawrence Livermore). Each type is described below.

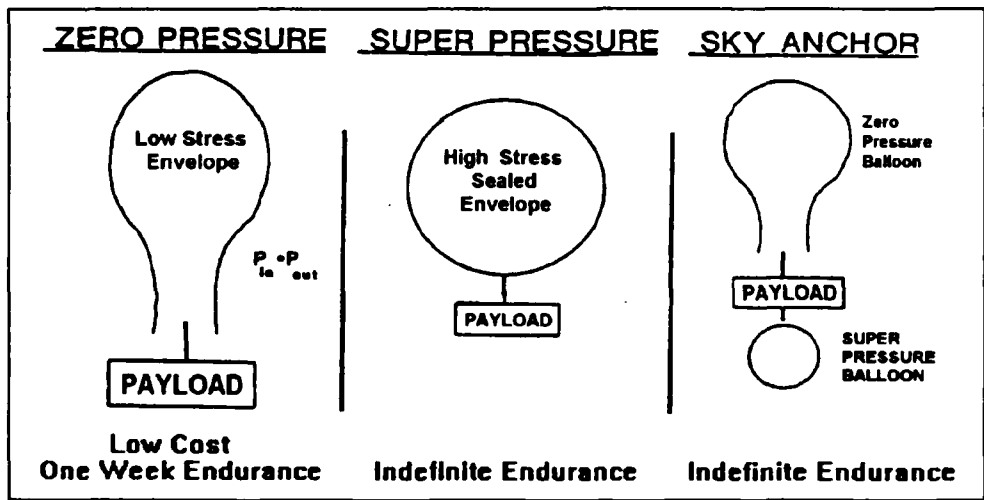


Figure 1. Basic Balloon Types

1. Zero Pressure Balloons

The zero pressure balloon, first built and flown by the Montgolfier brothers, is the type of balloon most used today, for science, military, and recreational purposes. The basic principles of zero pressure balloons have not changed in the 200-plus years since first flight: a non-extensible bag, open at the bottom, is inflated with a gas (usually hot air, helium, or hydrogen) lighter than the surrounding atmosphere. The term "zero pressure" is used because the internal gas pressure is equal to the external gas pressure near the base of the balloon. Slight overpressure is maintained higher inside the balloon above this point in order to retain the shape of the envelope. (Lawrence Livermore, 1990, p. 8)

As previously noted, balloon buoyancy results from the balloon's volume, or atmospheric displacement, following Archimedes principle. From the equation for buoyancy it can be seen that buoyancy increases as the lifting gas becomes less dense; and that buoyancy decreases as the lifting gas becomes more dense or as balloon volume decreases. Since lifting gas pressure, temperature, and density are related by the equation $P=(T_{gas})(\rho_{gas})(B)$ where B is a scaling constant, the altitude of a zero pressure balloon is dependent upon the temperature of the lifting gas. As the gas temperature increases, balloon volume increases and as the gas temperature decreases, balloon volume decreases. In the first case, the

balloon becomes more buoyant and it will rise in altitude. In the second case, the balloon becomes less buoyant and it will fall in altitude. An example helps illustrate the cycle a balloon would follow. (Rand, 1992, p. 4)

Assume a zero pressure balloon is floating at an equilibrium altitude. During the day, solar radiation will heat the internal gas, resulting either in increased volume (if the balloon is not fully inflated) or in decreased density (if the balloon is fully inflated, gas is vented, or forced out of the balloon). In either case, the balloon is more buoyant and it will rise to a new density-equilibrium altitude. At night, or in periods of cloudiness, the lifting gas is cooled and it becomes more dense. Pressure remains constant, so the balloon envelope decreases in volume. The decrease in displaced air means the balloon will lose altitude until a new density-equilibrium altitude is reached. (Rand, 1992, p. 4)

A zero pressure balloon may remain at a constant altitude only when gas is vented (if the gas temperature is rising), or when ballast is dropped (if the gas temperature is falling). Even when using these techniques to control zero pressure balloon flight, mission duration of zero pressure balloons is limited to five to seven days, except in rare environmental conditions such as at the poles, because approximately eight percent of the system mass (balloon plus

payload plus ballast) must be dropped each night to maintain altitude. (Rand, 1992 p. 5)

Recent developments in automatic ballasting have made it possible to extend zero pressure balloon mission duration at high altitudes in unmanned flight.

A group of researchers has reported the successful flight of a zero pressure balloon for 40 days above Antarctica. A pressure sensor was used to automatically release two kilograms of ballast whenever the balloon descended to two kilometers below the desired float altitude of 30 kilometers. (Rand, p. 8)

This example illustrates that automatic ballasting may increase mission duration, but the unique environment of Antarctica was a significant factor in this case. Thus, it remains to be seen if automatic ballasting would increase mission duration so dramatically at mid-latitudes.

Zero pressure balloons can carry several thousand pounds of payload to altitudes as high as 130,000 feet because there is very little stress on the balloon envelope.

In December 1990, a 29.47 million cubic foot helium balloon carried a 3750 pound payload to an altitude of 130,000 over Antarctica. During its nine day mission, the balloon circumnavigated the Antarctic continent (more than 4,000 miles) and landed its payload only 113 miles from the launch point. (Winzen, 1991, p. 2)

The condition of 24 hours per day of sunlight minimized ballast requirements, gas venting, and altitude changes, which maximized the mission duration of the balloon.

In sum, zero pressure balloons can be used to reliably lift large payloads to significantly high altitudes, but only for about a week at mid-latitudes.

2. Superpressure Balloons

Superpressure balloons are similar to zero pressure balloons, except that the envelope is sealed at the bottom to create a pressurized envelope so no gas can escape. Even though the internal pressure varies slightly due to changes in internal gas temperature, these balloons remain at a constant volume because of the strength of the envelope. This constant envelope volume results in altitude stability at a constant density altitude where system weights are in equilibrium with the surrounding atmosphere. The high internal pressures require a film envelope that is thin yet strong, lightweight, free of pinholes, and impermeable to gas diffusion. (Winzen, 1991, p. 2)

The first superpressure balloon was flown shortly after Montgolfier's first flight, but significant research of superpressure balloons was not pursued until polyethylene, a synthetic material with the physical properties necessary for superpressure envelopes, was developed during World War II. Polyethylene was tested extensively as the envelope in zero pressure balloons during the 1950's, then tried with superpressure balloons beginning in 1961. From 1968 through 1970, numerous superpressure balloon flights were conducted by

the National Center for Atmospheric Research (NCAR). Over 200 balloons were flown at altitudes of 16-24 kilometers for durations of up to 744 days, with altitude deviations of less than 100 meters. Payloads were less than one pound. (Lawrence Livermore, 1990, p. 52)

In 1973, the National Scientific Balloon Facility (NSBF) conducted Project Boomerang:

Two 20 meter diameter polyester superpressure spheres were successfully flown from Australia, with payloads of 52 kilograms and 46 kilograms respectively. Both flights circumnavigated the globe: one flight lasted 36 days and was recovered within 16 kilometers of the launch point; the other lasted 212 days. [recovery status not stated] (Rand, 1992, p. 9)

Multiple superpressure balloon flights were conducted during the 1970's by various organizations with mixed results. As attempts were made to scale the balloons to larger sizes, it was found that the materials being used had the propensity for catastrophic failure from flaws that developed either in manufacture or in handling. Thus, superpressure ballooning research was reduced while zero pressure balloon research was emphasized. (Winzen, 1991, p. 1)

Throughout the 1970's and 1980's, Mylar was the best material available for superpressure balloons...indeed the small Mylar balloons that may be bought at any number of gift or party stores today are really superpressure balloons. Unfortunately, Mylar develops pinholes during manufacture, so it is a poor gas barrier, and Mylar superpressure balloons are

limited to payloads less than 100 pounds at high altitudes.
(Winzen, 1991, p. 1)

Recognizing the potential applications of stable high altitude balloons, the Defense Advanced Research Project Agency (DARPA) sponsored a Small Business Innovative Research (SBIR) program to develop a superpressure system with better materials. The best material, determined from a 1991 study by Winzen International of San Antonio, Texas, is a biaxially oriented nylon film which has the strength, weight, and gas impermeability properties desired. Synthetic films are usually stressed in only one direction during manufacture but this material is a nylon film that is stressed in two directions. This process orients the film's molecules so that the material is as strong laterally as it is longitudinally. Research has shown that the altitude of a balloon made of this material will vary from day to night by only 200 meters, independent of the size of the balloon. Furthermore, permeability measurements demonstrate that the life of this balloon should exceed four years. (Rand, 1991, pp. 1-1 - 1-3)

Two test flights have been conducted using this biaxially oriented nylon material. In August 1992, a nine meter diameter balloon was launched in Utah, carrying a 14 kilogram payload to an altitude of 20 kilometers. In October 1992, a 23 meter diameter balloon carried a 23 kilogram payload to an altitude of 33 kilometers. Both balloons maintained their design altitudes until they were destroyed by

command. Test flights of superpressure balloons with this material continue with the following goals:

- Within one year; fly a 23 kilogram payload to 36 kilometers for 30 days.
- Within 18 months; fly a 450 kilogram payload to 36 kilometers for 30 days. (D. Brown, 1992, p. 56)

3. Sky Anchor Balloons

The sky anchor is a hybrid system combining zero pressure balloons and superpressure balloons in an attempt to stabilize zero pressure altitude excursions and to achieve extended flight. The idea is to fly two balloons together to gain lift capacity with the zero pressure balloon and to gain altitude stability with the superpressure balloon by using it as air ballast. As the zero pressure balloon ascends due to warming, the superpressure balloon becomes heavier than the surrounding air, preventing the entire system from ascending to an altitude that would require gas to be vented from the zero pressure balloon. Cooling the gas in the zero pressure balloon returns the system to its original equilibrium point. (Lawrence Livermore, 1990, p. 9)

Sky anchor systems have been constructed and flown, but with little success. The challenges involved in handling and launching two balloons simultaneously are significant, and even various configurations of balloons and payloads have produced limited results. The theory of operation at altitude

is fine; the difficulty lies in getting the system to an equilibrium altitude. (Winzen, 1991, p. 3)

The NSBF conducted a series of tests with sky anchors in the late 1970's. Numerous launch problems were experienced, but one system carrying 227 kilograms was able to remain at about 36 kilometers altitude for four days. Unfortunately, altitude variations of up to six kilometers were frequent. (Lawrence Livermore, 1990, p. 52)

The most famous sky anchor system is the EarthWinds project, which in recent years has made repeated attempts to circumnavigate the globe. The crew's attempts have not been successful, and they have encountered significant skepticism from the scientific community and the media throughout. Overall, the sky anchor's poor record make it an unlikely candidate for military use. (S. Brown, 1992, pp. 80-126)

C. SUMMARY OF BALLOON USE AND HISTORY

A variety of balloons have been used effectively for a number of purposes in military conflicts since their invention by Frenchmen in 1782. Two types of balloons, zero pressure and superpressure, seem to offer good potential for future military use. Currently, zero pressure balloons are capable of carrying large payloads for up to a week while superpressure balloons are capable of smaller payloads for many weeks or even years.

IV. ATMOSPHERIC CIRCULATION AND MODELING

Central to any discussion of the use of free-floating balloons is an understanding of atmospheric dynamics. This section describes the differences in the earth's atmospheric circulation based upon altitude, latitude, and time of year.

A. ATMOSPHERE STRUCTURE

Meteorologists conventionally divide the atmosphere into four layers based on the vertical gradient of temperature. These layers, as shown in Figure 2, are the troposphere, stratosphere, mesosphere, and the thermosphere. Temperature

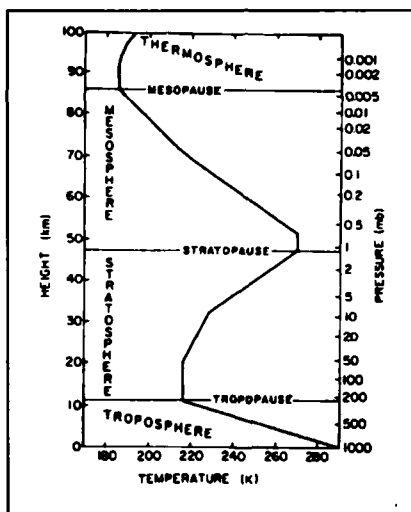


Figure 2. U.S. Standard Atmosphere Temperature Profile, 1976

generally decreases with height in the troposphere and in the mesosphere, and it generally increases with height in the stratosphere and in the thermosphere. The troposphere accounts for almost 85 percent of the total mass of the atmosphere, and it accounts for virtually all atmospheric water vapor. The tropopause, which separates the troposphere and the stratosphere, is a level of temperature minimum which varies in height from about 15 kilometers at the equator to nine kilometers at the poles. The stratopause is a level of temperature maximum near 50 kilometers which separates the stratosphere and the mesosphere. The mesosphere is bounded above by the mesopause, a level of temperature minimum similar to the tropopause at about 80 kilometers. (Andrews, 1987, p.3)

In addition to temperature, three other physical properties characterize the atmosphere: pressure, density and velocity. Pressure is defined as the amount of force applied over a surface or force per unit area, which can be either the earth's surface or an air parcel. Pressure is measured in either millibars (mb) or in kilopascals (kPa), with one bar equal to 14.5 pounds per square inch. Standard sea level pressure (STP) equals 1013.25 mb or 101.325 kPa. Air pressure decreases with altitude; several altitude-pressure reference points are provided in Table III. Density is the amount of a substance per unit measure or mass at standard pressure and temperature. The air density also decreases with altitude as

**TABLE III. ALTITUDE-PRESSURE
REFERENCE POINTS**

<u>ALTITUDE</u> <u>ft & (km)</u>	<u>PRESSURE</u> <u>lb/ft² & (mb)</u>
Sea Level	2116 (1013)
50,000 (15.2)	242 (116)
70,000 (21.3)	93 (44)
100,000 (30.5)	23 (11)
120,000 (36.6)	11 (5)
140,000 (42.7)	5 (2)

both pressure and temperature decrease. Velocity is a measure of wind speed relative to the ground, measured in meters per second. As noted in the discussion on balloon buoyancy, all three of these physical quantities have an impact upon balloon lift and drift. (Holton, 1979, p.1)

B. ATMOSPHERIC CIRCULATION

1. Fundamental Motion Forces

The motions of the atmosphere are governed by the fundamental laws of fluid mechanics and thermodynamics: the laws of conservation of mass, momentum, and energy. The primary forces which cause atmospheric motion are the pressure gradient force, the gravitational force, and friction. Additionally, one "apparent" force also acts upon the atmosphere to cause motion: the Coriolis force. (Holton, 1979, p.5-17)

An object or air parcel accelerates in the direction of the applied pressure gradient force, as shown in Figure 3.

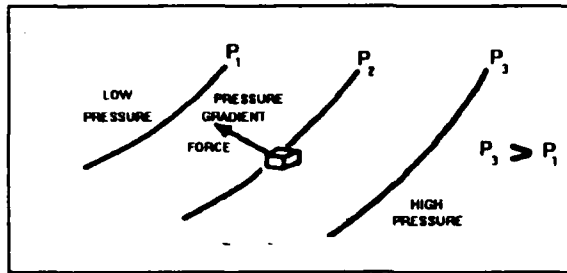


Figure 3. Pressure Gradient Force

The pressure gradient force is proportional to the *gradient* of the pressure field, not to the pressure itself. This force is active through the entire atmosphere. (Holton, 1979, p.5-7)

Tropospheric and stratospheric circulation are both strongly influenced by the Coriolis force, which is an apparent force or effect which accounts for the rotation of the earth. The rotation of the earth imparts spin to an air particle in the atmosphere, which causes the air particle to have an angular momentum, or coriolis acceleration, with respect to the earth. As shown in Figure 4 (after Lawrence

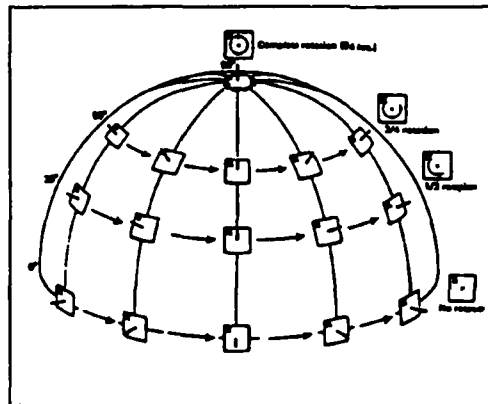


Figure 4. Coriolis Acceleration

Livermore), this angular momentum varies with latitude, with no Coriolis acceleration for horizontal motion at the equator. As the air particle is accelerated by the pressure gradient force, the Coriolis acceleration will increase until it reaches a balance as shown in Figure 5 (after Lawrence

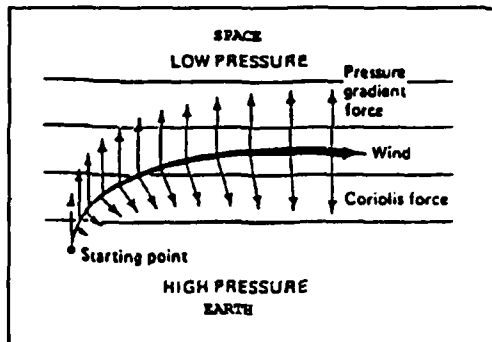


Figure 5. Geostrophic Winds

Livermore). The balance causes "geostrophic" winds that flow parallel to the isobars at a speed proportional to the pressure gradient and inversely proportional to the sine of the latitude. (Lawrence Livermore, 1990, p. 25)

Friction is important near the surface of the earth, where atmospheric motion is retarded by contact with the earth's surface. Friction thus influences circulation in the lower troposphere but its only effect at higher altitudes is indirect through the interaction of tropospheric eddy motions with the lower stratosphere. (Holton, 1979, pp. 296-298)

2. Observed Circulation

a. Zonally Averaged Circulation

All references in atmospheric circulation studies create a distinction between the longitudinally averaged flow, which is either zonal mean flow or meridional mean flow, and the deviations from these means, or eddies. Zonal mean winds are parallel to the equator, while meridional mean winds are perpendicular to the equator. This section describes stratospheric circulation in terms of zonally averaged circulation.

b. Observed Circulation Patterns

A combination of radiosonde data, rocketsonde data, and, more recently, remote temperature soundings from satellites, have provided meteorologists with a much clearer picture of stratospheric dynamics than ever before. At this time, the study of upper atmosphere circulation patterns has revealed that there are only a handful of general cases of circulation, and that upper atmosphere circulation is influenced by the annual solar cycle.

The net radiative heating distribution has a strong seasonal dependence with maximum heating at the summer pole and maximum cooling at the winter pole. The Coriolis torque exerted by this meridional flow generates mean zonal easterlies (from the east) in the summer hemisphere and westerlies in the winter hemisphere. (Andrews, 1987, p. 6)

The circulation patterns vary gradually from month to month during the annual cycle and they recur regularly. The

general categories of stratospheric circulation are listed below:

- the extratropical, or non-equatorial, pattern is westerly zonal-mean winds in the winter hemisphere, and easterly zonal-mean winds in the summer hemisphere. Figure 6 shows zonal mean winds in meters per second for solstice conditions with W and E designating centers of westerly (positive, from the west) and easterly (negative, from the east) winds, respectively. (Andrews, 1987, p. 8)

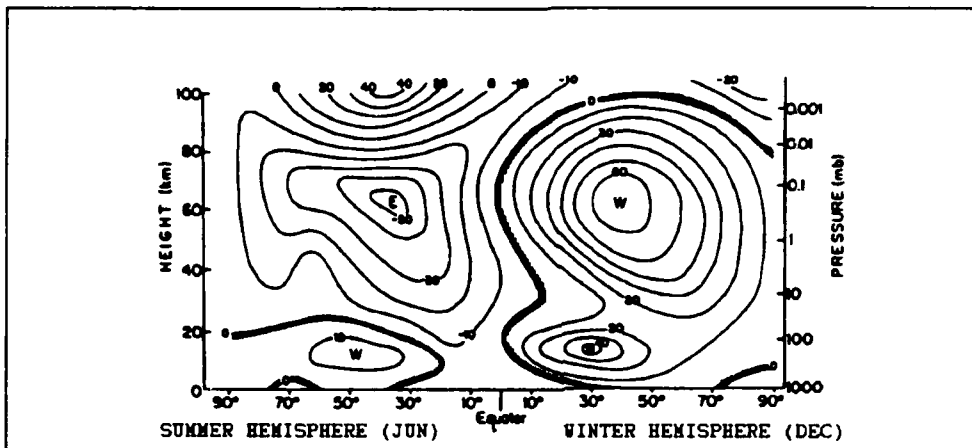


Figure 6. Zonal Mean Winds for Solstice Conditions

- stratospheric sudden winter warmings in the Northern Hemisphere lead to mean-flow deceleration and even to a reversal of the winds to easterly. (Andrews, 1987, p. 259)
- the equatorial pattern is an alternating pattern of eastward and westward winds that repeat at intervals varying from about 22 to 34 months, with an average period of about 27 months (though there is a six month cycle at higher levels). (Andrews, 1987, p. 313)
- the transition between the Northern and the Southern Hemispheres at the equinoxes results in weak mean zonal westerlies in both hemispheres. (Andrews, 1987, p. 6)

An important point to observe from Figure 6 is that wind speed seems to be at a minimum at approximately 20 kilometers altitude. This region of minimum winds is not

fixed, but varies in altitude depending upon latitude and time of year. Figures 7-10 show that altitudes of 30-40 kilometers appear to be the most promising for balloon surveillance operations.

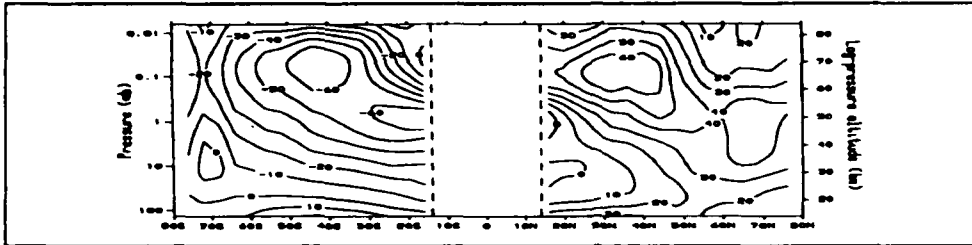


Figure 7. January Zonal Mean Winds

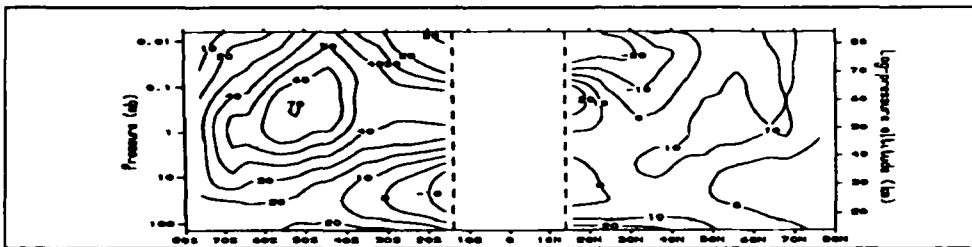


Figure 8. April Zonal Mean Winds

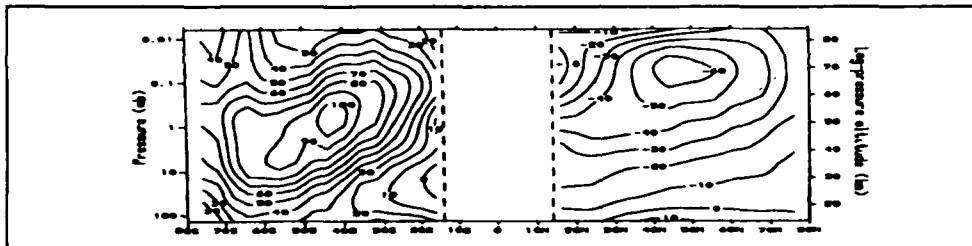


Figure 9. July Zonal Mean Winds

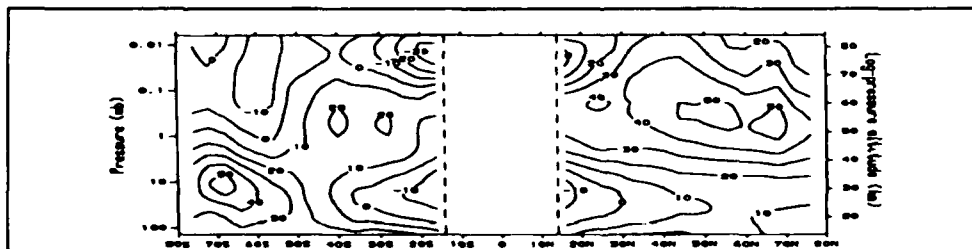


Figure 10. October Zonal Mean Winds

C. ATMOSPHERIC CIRCULATION MODELING

The majority of atmospheric circulation models that have been developed are tropospheric models, primarily because of the need to understand the earth's climate and weather. However, much more work dealing with the stratosphere has been done in the last 20-30 years because of concerns about the earth's ozone layer. Circulation models fall into two categories: those based on simulated physical processes and those based on historical data.

One general circulation model based on a simulation of the physical processes is the SKYHI model, developed by the Geophysical Fluid Dynamics Laboratory at Princeton. SKYHI is considered to provide the most complete representation of the middle atmosphere: it has 40 prediction levels extending from the surface of the earth to about 80 kilometers and the predicted fields include wind, temperature, water vapor and surface pressure. (Andrews, 1987, p. 422)

A model based on historical atmospheric data is the Global Reference Atmosphere Model, or GRAM, an empirical FORTRAN computer simulation of the earth's atmosphere developed at Georgia Tech. GRAM, which is currently the responsibility of the National Aeronautical and Space Administration (NASA), uses data from several sources and over several years to compute monthly averages of atmospheric properties, including wind speed and wind direction. GRAM provides a worldwide, 12-

month database of properties in four dimensions: latitude, longitude, altitude, and time of year. There are two key points to keep in mind when using the GRAM. The first is that the GRAM contains statistically averaged data: it provides mean wind speed and direction, with standard deviations, for an entire month for a given combination of latitude, longitude, and altitude. Secondly, insufficient data for the Southern Hemisphere caused the designers of the GRAM to represent it with a six month displacement of Northern Hemisphere data. (Hawkins, 1991, pp. 1-18)

This second shortcoming of GRAM was alleviated in its latest version, produced in 1990 and appropriately called GRAM-90. GRAM-90 incorporates extensive new data, mostly gathered by satellites, to utilize actual data from the Southern Hemisphere for each month. Like GRAM, GRAM-90 provides mean values, but it also produces "perturbation" values which are slightly different from the mean values. These perturbation values are drawn from the historical record of winds to provide a broad perspective of atmospheric conditions at a given point. (Jeffries, 1993)

Other models are available, but the models just described demonstrate the basic types and capabilities of circulation models. Of these, SKYHI is more of a "prediction" model, while GRAM, and the GRAM-90 in particular, provide useful databases for statistical analysis.

D. SUMMARY OF ATMOSPHERIC CIRCULATION AND MODELING

To sum up, it should be noted that stratospheric circulation is different than that of the troposphere and that models which describe atmospheric circulation are available. Stratospheric winds are *fairly stable, relatively light* and their circulation patterns vary during the year as a result of the annual solar cycle. However, even though wind circulation seems favorable for military balloon operations, it remains to be seen if the circulation patterns will cause a free floating balloon to "orbit" the earth or if they will cause them to congregate in localized patterns. This is the subject of the next chapter.

V. TRAJECTORY PREDICTION

Generally speaking, people reject out of hand the idea of using free-floating balloons for military surveillance or communications missions because of the uncertainty involved. Balloon trajectories cannot be predicted accurately like satellite orbits, nor are balloons tightly controlled like aircraft. However, the variability of free-floating high altitude balloon trajectories is not extreme: as described in Chapter IV, winds in the upper stratosphere may be stable enough to provide fairly constant trajectories. Balloons travelling in these winds may even be able to provide better coverage of an area than low-earth orbiting satellites because of longer time over target. Thus, a statistical analysis of the variability of balloon trajectories in the upper stratosphere may be useful either to confirm or to refute conventional wisdom about the potential of free-floating balloons.

A. BALLOON TRAJECTORY PREDICTION PROGRAMS

A study of relevant literature reveals that very little work has been done in the area of balloon trajectory prediction, with the exception of predicting vertical trajectories of weather balloons. The paucity of study led DARPA to sponsor Coleman Research Corporation (CRC) to develop

a Balloon Drift Pattern Simulation (BDPS). DARPA personnel were interested in exploiting high-altitude, expendable balloons for a variety of military missions, and they needed a model to predict how balloons would drift in order to assess the feasibility of several concepts.

In Phase I of an SBIR project, CRC wrote an upper-atmosphere drift pattern simulation for execution and display output on VAX computers, demonstrating the technical feasibility of predicting drift patterns using a digital computer simulation. In Phase II of the SBIR, DARPA required CRC to develop a Macintosh-based version of the BDPS. The intent was to build a desk-top, deployable aid that would enable a theater-level commander to assess how to employ balloon systems for either communications or surveillance missions. (Hawkins, 1991, p. 1-18)

The BDPS is a time-step simulation which draws upon a database of wind tables to compute a balloon drift pattern. This database can be actual wind tables (either archived wind data or forecast wind data) or a climate model. The user chooses the database based on his needs: archived and forecast data (such as the Navy's NOGAPS data from the Fleet Numerical Oceanography Center) is only available to an altitude of about 30 kilometers (10 millibars). If the simulation calls for drift patterns above this altitude, the forecast data must be extrapolated or a climate model must be used. As described in Chapter IV, several climate models are available for use.

Since BDPS is used on a Macintosh, it is *mostly* user-friendly, but it is quite large (39 Megabytes) and it is also very slow: it takes about 10 minutes to calculate and to display just 24 hours of a trajectory. (Hawkins, 1991, p. 1-18)

The combination of the BDPS program and the DARPA study on superpressure balloons demonstrated the potential of balloon systems. Unfortunately, the personnel at DARPA who were interested in such systems rotated to other duty stations and the balloon system ideas have not been pursued.

The GRAM-90 is not a drift prediction model in that it provides atmospheric data for a specific point of altitude, latitude, longitude, and date. However, modifications were made to the program so that it could be used as to describe balloon drift. Specifically, source code was added to convert the wind direction and wind speed for a designated time step into a drift vector to apply to the initial balloon start point (altitude, latitude, longitude, and date). This vector was used to compute a new balloon location. This new location was then treated as another start point input for the model, which produced the atmospheric conditions at the new location. This wind vector and time step process was repeated for a year and the balloon's location was recorded intermittently for future analysis. The design, use and analysis of this simulation are described in more detail in the next section.

B. PREDICTION SIMULATION DESIGN

The basic design of the simulation was to use the modified GRAM-90 as a time-step simulation of balloon movement resulting from winds at altitude. By changing the input seed to a random number generator used in the unmodified program, varying trajectories were produced. The seed was randomly changed for each replication of a given set of initial conditions (latitude, longitude, altitude and month). Balloon locations were recorded as desired to provide data for a determination of the variability of the trajectories.

1. Physical Equipment

The modified GRAM-90 was used on the Naval Postgraduate School's Amdahl mainframe computer emulating an IBM 3270. Data analysis was completed using the Minitab statistical package, also on the mainframe.

2. Hypotheses

The null hypothesis was that the trajectories of free-floating balloons drifting at 36 kilometers altitude would not follow regular or repeating patterns of drift. The alternative hypothesis was that these balloons would indeed follow regular or repeating patterns of drift.

3. Assumptions

- GRAM-90 as modified is a valid balloon drift prediction simulation. Since a balloon will achieve equilibrium with the winds surrounding it, the assumption is that a one hour time step is sufficiently small to accurately describe the balloon's trajectory using only the wind speed and wind direction outputs from the model.

- GRAM-90 is a valid atmospheric model of winds at altitude. Although the GRAM-90 has averaged data, the assumption is that drawing the standard deviations, or perturbation values, from many years of data ensured validity. In fact, the wind speeds varied considerably more than expected, although they tended to average out over time.
- Balloon altitude is constant. The vertical position of the balloon was assumed to be unchanging in an attempt to study the horizontal trajectory of a drifting balloon.
- Balloon ascent is assumed to be instantaneous to a point directly overhead the starting latitude and starting longitude. GRAM-90 describes atmospheric conditions at a specific point; the available portion was conditions above 30 kilometers. Tropospheric winds which would have an effect on the horizontal position of a balloon during ascent were not modeled for this simulation.

4. Measure of Balloon Drift

Balloon location was measured in latitude and longitude after ten days, 30 days, and 360 days. Latitude was in a form suitable for analysis in its range from -90° to $+90^\circ$. Longitude was not in a suitable form: in normal mathematical operations -179 is 178 units away from $+179$, yet there is a difference of only two degrees between -179° and $+179^\circ$. Thus, it was necessary to convert longitude from absolute degrees to a degree difference from the starting longitude.

5. Statistical Design of Simulation

Table IV lists the simulation's variables and values, which were chosen since atmospheric conditions vary with each.

TABLE IV. SIMULATION VARIABLES AND VALUES

<u>Month</u>	<u>Latitude</u>	<u>Longitude</u>
March	45° S	90° E
June	0°	90° W
September	45° N	
December		

The values of each variable are not all-inclusive but were chosen to provide a cross-section for each factor. Each of the 24 possible combinations of these variables was used to specify the initial conditions for multiple replications of the simulation.

C. PREDICTION SIMULATION DATA ANALYSIS

Data was separated into three categories for analysis: ten days; 30 days; and 360 days. Data in each category was checked for normality and uniformity, and then the variance of the means and medians was compared through a variety of statistical tests. Lastly, the three categories were compared to each other for a broader perspective.

1. Balloon Location After Ten Days

Data from all 24 sets of initial conditions in this category was found to be neither normal nor uniform. Latitude of a balloon after drifting ten days *does* follow a pattern but longitude does not. Despite a lack of normality, an Analysis of Variance (ANOVA) for latitude shown in Table V was used to indicate which factors were significant. Since the data was not normal, the numerical values derived from the ANOVA were not valid. The ANOVA shows that ending latitude was dependent upon starting latitude and month, but not on starting longitude ($P = 0.547$). Ending longitude was also dependent upon starting latitude and month, and it was dependent upon starting longitude only for Equator launches.

TABLE V. LATITUDE ANALYSIS OF VARIANCE AT TEN DAYS

```

MTB > anova 'lat' = 'month'!'slat'!'slong'

Factor      Type Levels Values
MONTH      fixed      4      3      6      9      12
SLAT       fixed      3     -45     0     45
SLONG      fixed      2     -90     90

Analysis of Variance for LAT

Source      DF      SS      MS      F      P
MONTH      3      50405   16802   521.40 0.000
SLAT       2      1158260 579130 1.8E+04 0.000
SLONG      1      12      12      0.36   0.547
MONTH*SLAT 6      15835   2639   81.90 0.000
MONTH*SLONG 3      5394   1798   55.79 0.000
SLAT*SLONG 2      4755   2377   73.77 0.000
MONTH*SLAT*SLONG 6      5796   966   29.98 0.000
Error      720    23202   32
Total      743    1263658

LAT = ENDING LATITUDE      DF = Degrees of Freedom
MONTH = START MONTH      SS = Sum of Squares
SLAT = START LATITUDE     MS = Mean Square
SLONG = START LONGITUDE   F = F Test Statistic
                           P = P-Value
    
```

Since longitude was found not to be a significant factor, data was analyzed further in the configuration shown in Table VI.

TABLE VI. INITIAL CONDITION SETS

<u>SET NUMBER</u>	<u>MONTH</u>	<u>LATITUDE</u>	<u>LONGITUDE</u>
1	MAR	45° S	90° E/90° W
2	MAR	0°	90° E/90° W
3	MAR	45° N	90° E/90° W
4	JUN	45° S	90° E/90° W
5	JUN	0°	90° E/90° W
6	JUN	45° N	90° E/90° W
7	SEP	45° S	90° E/90° W
8	SEP	0°	90° E/90° W
9	SEP	45° N	90° E/90° W
10	DEC	45° S	90° E/90° W
11	DEC	0°	90° E/90° W
12	DEC	45° N	90° E/90° W

Figure 11 shows mean latitudinal displacement distances for this category where balloons remained within about eight degrees of their starting latitude. This deviation varies by

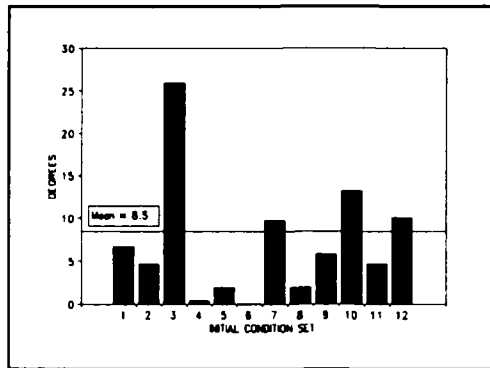


Figure 11. 10 Day Latitude Displacement

month, with June (initial condition sets 4-6) being the month when the balloons remained closest to the starting latitude and March (sets 1-3) having the largest deviation.

2. Balloon Location After 30 Days

As in the ten day category, data was found to be neither normal nor uniform. Figure 12 shows mean latitudinal

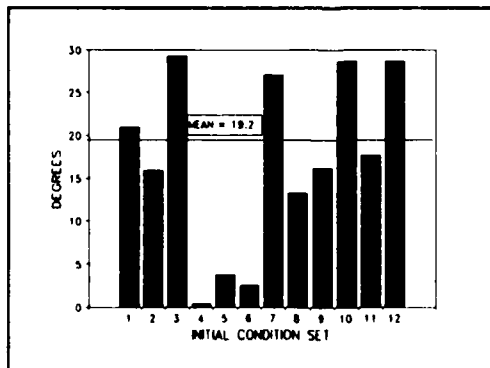


Figure 12. 30 Day Latitude Displacement

displacement distances for this category, where balloons drifted within about nineteen degrees of their starting latitude. The deviations were smallest again in June. ANOVA indicated that balloon location after 30 days is dependent upon all factors: month, starting latitude, and starting longitude.

3. Balloon Location After 360 Days

Figure 13 shows mean latitudinal displacement for balloons after 360 days of drift: the balloons usually drifted

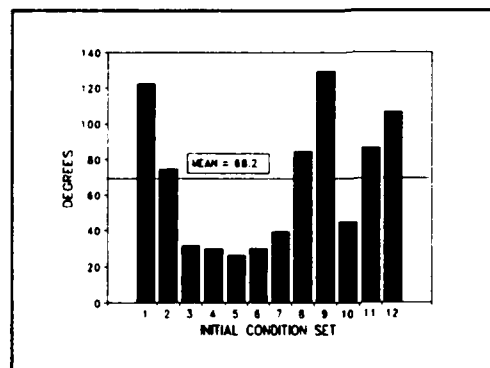


Figure 13. 360 Day Latitude Displacement

over sixty degrees from their starting latitude. In fact, Table VII shows that balloons tend to drift toward the poles after almost a year. Once again, the data is neither normal nor uniform. The ANOVA for latitude again indicates that ending latitude is not related to starting longitude, but it is dependent upon both starting latitude and the starting month. Most often, balloons launched from North of the Equator

TABLE VII. 360 DAY LATITUDE DISTRIBUTION

Midpoint	Count	
-80	350	*****
-60	9	*
-40	8	*
-20	36	****
0	26	***
20	38	****
40	19	**
60	88	*****
80	170	*****

tended to drift toward the North Pole, and balloons launched from South of the Equator tended to drift toward the South Pole, although there were anomalies where balloons drifted toward the pole opposite their launch hemisphere.

4. Comparison of Categories

It can be seen from all three categories that balloons follow regular or repeating patterns in their latitudinal displacement. Further, as might be expected, the displacement from start latitude increased over time. In all three categories, ending latitude was found to be dependent upon starting latitude and month but not on starting longitude. Starting longitude was found not to be a significant factor, except for an Equator launch in the 30 day category.

5. Real World Meaning of Results

The most important finding of the analysis of the data is that balloon drift patterns over ten days follow fairly narrow patterns. An examination of the distances involved illustrates this importance. After ten days, most balloons completed between one-half global circumnavigation and one complete global circumnavigation. The mean difference in latitude at that time was 8.5 degrees, or a ground distance of approximately 950 kilometers. At an altitude of 36 kilometers, the balloon has a line-of-sight footprint on the ground of 730 kilometers radius or 1460 kilometers diameter. Thus, even with a drift distance of 950 kilometers, the balloon retains visibility of a sizable portion of the original footprint, although that footprint obviously would have shifted dramatically longitudinally. A "theater" surveillance balloon which would be employed for less than ten days, perhaps even for as little as one or two days, would have even less drift.

VI. CONCLUSIONS

A. BALLOON SURVEILLANCE SYSTEM FEASIBILITY

The narrow drift patterns of balloon flights of ten days support the idea of "theater" or "tactical" high altitude surveillance balloons, probably with flights of three days or less. Such balloon systems could be recovered by steerable parachute or mid-air "snatch" after theater transit. With a ground speed much less than that of satellites and if outfitted with appropriate sensors, they would provide a surveillance system that could overfly enemy areas to identify and to locate mobile ballistic missile systems to be attacked. Such a system would provide a significant improvement in the United States' missile defense posture.

B. AREAS FOR FUTURE STUDY

There are many potential areas for further study with this subject. One suggestion would be to actually launch balloons to check the validity of the simulation model. Also, other simulations would be valuable. It is recommended that the simulation be replicated at different altitudes. This study looked only at 36 kilometers; it would be helpful to examine balloon drift at a variety of altitudes to examine the variance based on altitude. Additionally, and perhaps more importantly, since it appears that drift patterns are fairly

narrow over short periods of time, a distribution analysis similar to this study should be completed with balloon locations recorded at intervals less than ten days. Another area to be looked at would be a time series analysis of balloon location to try to get more of a "continuous" perspective rather than the discrete approach used here. Many other subjects for study fall under the heading of operational requirements of a high altitude balloon system: sensor selection, payload configuration, power requirements and sources, C3I architecture, and concept of operations.

APPENDIX (MODIFIED GRAM-90 SOURCE CODE)

The Scientific Model (SCIMOD or SCIM) is only a fraction of GRAM-90, but since it is the only section in which modifications were made for the balloon trajectory, it is the only portion enclosed for future reference. The entire GRAM-90 may be obtained from NASA Marshall Space Flight Center.

```

SUBROUTINE SCIMOD(NPOP)
C.....COMPUTES VALUES P,D,T,U,V AND SHEAR DUH,DVH FROM INPUT AND SCIM 1
C   ARRAYS IN COMMON POTCOM. INPUT TO SCIMOD IS SCIM 2
C   G = GRAVITY AT POSITION R1 = RADIUS AT HEIGHT H SCIM 3
C   PHIR = LATITUDE (RADIAN) THETR = LONGITUDE (RADIAN) SCIM 4
C   F10 = F10.7 SOLAR FLUX F10B = MEAN F10.7 FLUX SCIM 5
C   AP = SOLAR-GEOMAGNETIC A SUB P INDEX SCIM 6
C   MN/IDA/IYR = DATA (IYR = FULL YEAR-1900) SCIM 7
C   INR MIN = TIME N1 = PREVIOUS HEIGHT SCIM 8
C   PHI1R = PREVIOUS LATITUDE THET1R = PREVIOUS LONGITUDE SCIM 9
C   RP1,RD1,RT1 = PREVIOUS RANDOM PERTURBATIONS SCIM 10
C   SP1,SD1,ST1 = PREVIOUS RANDOM STANDARD DEVIATIONS (SIGMAS) SCIM 11
C   RU1,RV1 = PREVIOUS RANDOM WINDS SCIM 12
C   SU1,SV1 = PREVIOUS RANDOM WIND SIGMAS SCIM 13
COMMON/IPRTP/ IPRT,NLIMIT SCIM 14
COMMON/IOTEMP/IOTEM1,IOTEM2,IUS,DD,XMJD,PHI1,PHI, SCIM 15
.NSAME,RP1L,RD1L,RT1L,SP1L,SD1L,ST1L,RU1L,RV1L,SU1L,SV1L, SCIM 16
$ MN, IDA, IYR, H1, PHI1R,THET1R,G,R1,H,PHIR,THETR,F10,F10B,AP, SCIM 17
. INR,MIN,NMORE,DX,HL,VL,DZ,B,EPS,IOPP,LOOK,IET,FLAT, SCIM 18
1RP1S,RD1S,RT1S,RU1S,RV1S,SP1S,SD1S,ST1S,SU1S,SV1S, SCIM 19
2UDS1,VDS1,UDL1,VDL1,UDS2,VDS2,UDL2,VDL2 SCIM 20
COMMON /PDTCOM/IU4,MONTH,IOPR, SCIM 21
. PSP(15,19,18),DSP(15,19,18),TSP(15,19,18),USP(15,19,18), SCIM 22
. VSP(15,19,18), SCIM 23
. PG(21,19),DG(21,19),TG(21,19),UG(21,19), SCIM 24
. PAQ(17,5),DAQ(17,5),TAQ(17,5),UAQ(17,5),VAQ(17,5), SCIM 25
. PDQ(17,5),DDQ(17,5),TDQ(17,5),UDQ(17,5),VDQ(17,5), SCIM 26
. PR(29,19),DR(29,19),TR(29,19),UR(29,19),VR(29,19) SCIM 27
. ,PQ,DQ,TQ,UQ,VQ,POA,DOA,TOA,UA,VA,IOPQ, SCIM 28
1PLP(25,10),DLP(25,10),TLP(25,10), SCIM 29
2ULP(25,10),VLP(25,10),UDL(25,10), SCIM 30
3VDL(25,10),UDS(25,10),VDS(25,10) SCIM 31
COMMON /C4/ GLAT(16),GLON(16),NG,P4D(16,26),D4D(16,26),T4D(16,26), SCIM 32
. SP4(16,26) SD4(16,26),ST4(16,26),THET1,THET,DUMMY SCIM 33
COMMON/COMPER/SPH,SDH,STH,PRH,DRH,TRH,URH,VRH,SUH,SVH,CP, SCIM 34
1PRHS,DRHS,TRHS,URHS,VRHS,PRHL,DRHL,TRHL,URHL,VRHL, SCIM 35
2SPHS,SDHS,STHS,SUHS,SVHS,SPHL,SDHL,STHL,SUHL,SVHL SCIM 36
COMMON/WINCOM/DH,FCORY,DX5,DY5,DPX,DPY,UGH,VGH, SCIM 37
$ TH,DTX,DYU,DUH,DVH,PH,UPRE,VPRE,DUPRE,DVPRE SCIM 38
COMMON/CHK/PCK(4,4,3),DCK(4,4,3),NO(2) SCIM 39
COMMON /CHIC/LA(4,4),NB(2),IWSYM,USH,VSH,DUSH,DVSH SCIM 40
COMMON /VERT/RW1,SW1,WRH,SUH,WR(29) SCIM 41
SCIM 42

```

```

C   DECLARE VARIABLES FOR BALLOON DRIFT TIMESTEP SIMULATION
REAL LATSTEP, LONGSTEP, DELTALAT, DELTALONG, NEWLAT, NEWLONG
INTEGER TIME, STOPDAYS, TODAYS, PASS
C   INITIALIZE BALLOON DRIFT TIMESTEP SIMULATION VARIABLES
NEWLAT = 30.0
PASS = 0
TODAYS = 0
STOPDAYS = 362
C   TIME STEP IS 1 HOUR: 24 TIME INCREMENTS PER DAY
STOPDAYS = (24 * STOPDAYS)
C   FACTOR FOR RADIAN TO DEGREE
FAC = 57.2957795
IWSYM=ICHR(' ')
IF(NPOP.NE.0) GO TO 6
UPRE=0.
VPRE=0.
DUPRE=0.
DVPRE=0.
6   PQ=0.
    DQ=0.
    TQ=0.
    PRH=0.
    DRH=0.
    TRH=0.
    URH=0.
    VRH=0.
    WRH = 0.
    UQ=0.
    VQ=0.
    PQA=0.
    DQA=0.
    TQA=0.
    UA=0.
    VA=0.
    PSH=0.
    DSH=0.
    TSH=0.
    SPU = 0.
    SPV = 0.
    MONTH=MN
C   PRESENT LATITUDE, DEG
PHI = PHIR*FAC
C   PRESENT LONGITUDE, DEG
THET = THETR*FAC
C   PREVIOUS LATITUDE, DEG
PHI1 = PHI1R*FAC
C   PREVIOUS LONGITUDE, DEG
THET1 = THET1R*FAC
C   BEGINNING OF BALLOON DRIFT SIMULATION DO LOOP
DO LOOP IS FOR THE TOTAL NUMBER OF DAYS AS INITIALIZED
196 DO 197 K = 1, STOPDAYS, 1
C.....FCORY = NORTH COMPONENT CORIOLIS FACTOR TIMES DISTANCE FOR
C          5 DEGREES OF LATITUDE
DYS = 5000.*RI/FAC
DX5 = DY5*COS(PHIR)
FCORY = DY5*SIN(PHIR)/(120.*FAC)
C..... IN JACCHIA OR MIXED ZONAL MEAN-JACCHIA HEIGHT RANGE
8 IF(H.GT.90.0) GO TO 10
C..... IN 4-D DATA HEIGHT RANGE
IF (H.LE.25.0) GO TO 500
C..... IN ZONAL MEAN OR MIXED ZONAL MEAN 4D HEIGHT RANGE
GO TO 200
C..... IN MIXED JACCHIA-ZONAL MEAN RANGE, NEED TO FAIR DATA
10 IF (H.LT.120.) GO TO 20
C..... FOLLOWING IS THE PURE JACCHIA HEIGHT RANGE SECTION
C..... JACCHIA VALUES AT CURRENT POSITION
CALL JACCH(H, PHIR, THET, PH, DH, TH)
PHIN = PHIR + 5. / FAC

```

```

SCIM 43
SCIM 44
SCIM 45
SCIM 46
SCIM 47
SCIM 48
SCIM 49
SCIM 50
SCIM 51
SCIM 52
SCIM 53
SCIM 54
SCIM 55
SCIM 56
SCIM 57
SCIM 58
SCIM 59
SCIM 60
SCIM 61
SCIM 62
SCIM 63
SCIM 64
SCIM 65
SCIM 66
SCIM 67
SCIM 68
SCIM 69
SCIM 70
SCIM 71
SCIM 72
SCIM 73
SCIM 74
SCIM 75
SCIM 76
SCIM 77
SCIM 78
SCIM 79
SCIM 80

```

```

SCIM 81
SCIM 82
SCIM 83
SCIM 84
SCIM 85
SCIM 86
SCIM 87
SCIM 88
SCIM 89
SCIM 90
SCIM 91
SCIM 92
SCIM 93
SCIM 94
SCIM 95
SCIM 96
SCIM 97

```


THETE = THET - 5.	SCIM 98
C.....JACCHIA VALUES AT CURRENT POSITION+5 DEGREES LAT, FOR DP/DY AND DT/DY	SCIM 99
C CALL JACCH(H,PHIN,THET,PHN,DHN,THN)	SCIM 100
C.....JACCHIA VALUES AT CURRENT POSITION-5 DEGREES LON, FOR DP/DX AND DT/DX	SCIM 101
C CALL JACCH(H,PHIR,THETE,PHE,DHE,THE)	SCIM 102
C DP/DY FOR GEOSTROPHIC WIND	SCIM 103
DPY=PHN-PH	SCIM 104
C DP/DX FOR GEOSTROPHIC WIND	SCIM 105
DPX=PHE-PH	SCIM 106
C DT/DX FOR THERMAL WIND SHEAR	SCIM 107
DTX = THE - TH	SCIM 108
C DT/DY FOR THERMAL WIND SHEAR	SCIM 109
DTY = THN - TH	SCIM 110
C CHANGE NOTATION FOR OUTPUT	SCIM 111
PGH=PH	SCIM 112
DGH=PH	SCIM 113
TGH=TH	SCIM 114
CALL WIND	SCIM 115
UH = UGH	SCIM 116
VH = VGH	SCIM 117
NB = H + 5.	SCIM 118
CP = 7.*PH/(2.*DN*TH)	SCIM 119
CALL JACCH(NB,PHIR,THET,PB,DB,TB)	SCIM 120
DTZ = (TB - TH)/5000.	SCIM 121
C.....VERTICAL MEAN WIND	SCIM 122
WGH = -CP*(UH*DTX/DX5 + VH*DTY/DY5)/(G + CP*DTZ + UH*DUH+VH*DVH)	SCIM 123
C GO TO RANDOM PERTURBATIONS SECTION	SCIM 124
GO TO 800	SCIM 125
C.... FOLLOWING IS THE MIXED JACCHIA-ZONAL MEAN HEIGHT RANGE SECTION	SCIM 126
C LOWER HEIGHT INDEX	SCIM 127
20 IHA = 5*(INT(H)/5)	SCIM 128
C UPPER HEIGHT INDEX	SCIM 129
IHB = IHA + 5	SCIM 130
C LOWER HEIGHT FOR INTERPOLATION	SCIM 131
HA = IHA*1.	SCIM 132
C UPPER HEIGHT FOR INTERPOLATION	SCIM 133
HB = IHB*1.	SCIM 134
C.....JACCHIA VALUES AT LOWER HEIGHT, CURRENT LAT-LOW	SCIM 135
CALL JACCH(HA,PHIR,THET,PJA,DJA,TJA)	SCIM 136
PHIM = PHIR + 5. / FAC	SCIM 137
THETE = THET - 5.	SCIM 138
C.....JACCHIA VALUES AT LOWER HEIGHT, CURRENT LON-LAT+5 DEGREES	SCIM 139
C LAT, FOR DP/DY AND DT/DY	SCIM 140
CALL JACCH(HA,PHIN,THET,PJN,DJN,TJN)	SCIM 141
C.....JACCHIA VALUES AT LOWER HEIGHT, CURRENT LAT-LOW-5 DEGREES	SCIM 142
C LON, FOR DP/DX, AND DT/DX	SCIM 143
CALL JACCH(HA,PHIR,THETE,PJE,DJE,TJE)	SCIM 144
C JACCHIA DP/DY AT LOWER HEIGHT	SCIM 145
DPXJA=PJE-PJA	SCIM 146
C JACCHIA DP/DY AT LOWER HEIGHT	SCIM 147
DPYJA=PJN-PJA	SCIM 148
C JACCHIA DT/DX AT LOWER HEIGHT	SCIM 149
DTXJA = TJE - TJA	SCIM 150
C JACCHIA DT/DY AT LOWER HEIGHT	SCIM 151
DTYJA = TJN - TJA	SCIM 152
C.....JACCHIA VALUES AT UPPER HEIGHT, CURRENT LAT-LOW	SCIM 153
CALL JACCH(HB,PHIR,THET,PJB,DJB,TJB)	SCIM 154
PHIM = PHIR + 5. / FAC	SCIM 155
THETE=THET-5	SCIM 156
C.....JACCHIA VALUES AT UPPER HEIGHT, CURRENT LON-LAT+5 DEGREES	SCIM 157
C LAT, FOR DP/DY AND DT/DY	SCIM 158
CALL JACCH(HB,PHIN,THET,PJN,DJN,TJN)	SCIM 159
C.....JACCHIA VALUES AT UPPER HEIGHT, CURRENT LAT-LOW-5 DEGREES	SCIM 160
C LON, FOR DP/DX AND DT/DX	SCIM 161
CALL JACCH(HB,PHIR,THETE,PJE,DJE,TJE)	SCIM 162
C JACCHIA DP/DX FOR GEOSTROPHIC WINDS	SCIM 163
	SCIM 164
	SCIM 165

	DPXJB = PJE - PJB	SCIM 166
C	JACCHIA DP/DY FOR GEOSTOPHIC WINDS	SCIM 167
	DPYJB = PJM - PJB	SCIM 168
C	JACCHIA DT/DX FOR THERMAL WIND SHEAR	SCIM 169
	DTXJB = TJE - TJB	SCIM 170
C	JACCHIA DT/DY FOR THERMAL WIND SHEAR	SCIM 171
	DTYJB = TJN - TJB	SCIM 172
C....	ZONAL MEAN AT LOWER HEIGHT, TO BE FAIRED WITH JACCHIA	SCIM 173
	CALL GTERP(IHA, PHI, PGA, DGA, TGA, PG, DG, TG, DPGA, DTGA, UGA, UG)	SCIM 174
C....	ZONAL MEAN AT UPPER HEIGHT, TO BE FAIRED WITH JACCHIA	SCIM 175
	CALL GTERP(IHB, PHI, PGB, DGB, TGB, PG, DG, TG, DPGA, DTGA, UGB, UG)	SCIM 176
C....	FAIRED RESULTS AT LOWER HEIGHT	SCIM 177
	IHSB = 90	SCIM 178
	CALL PDTUV(PSP, DSP, TSP, USP, VSP, PHI, THET, IHSB, PSH, DSH, TSH,	SCIM 179
	& DPXSB, DPYSB, DTXSB, DTYSB, SPU, SPV)	SCIM 180
	PGA = PGA*(1. + PSH)	SCIM 181
	DGA = DGA*(1. + DSH)	SCIM 182
	TGA = TGA*(1. + TSH)	SCIM 183
	PGB = PGB*(1. + PSH)	SCIM 184
	DGB = DGB*(1. + DSH)	SCIM 185
	TGB = TGB*(1. + TSH)	SCIM 186
	UGA=UGA+SPU	SCIM 187
	VGA=SPV	SCIM 188
	UGB=UGB+SPU	SCIM 189
	VGB=SPV	SCIM 190
	DTXGA = DTXSB * TGA	SCIM 191
	DTXGB = DTXSB * TGB	SCIM 192
	DTYGA = TGA*DTYSB + DTYGA*(1. + TSH + DTYSB)	SCIM 193
	DTYGB = TGB*DTYSB + DTYGB*(1. + TSH + DTYSB)	SCIM 194
	DPXGA = DPXSB * PGA	SCIM 195
	DPXGB = DPXSB * PGB	SCIM 196
	DPYGA = PGA*DPYSB + DPGA*(1. + PSH + DPYSB)	SCIM 197
	DPYGB = PGB*DPYSB + DPGA*(1. + PSH + DPYSB)	SCIM 198
	CALL FAIR(PGA, DGA, TGA, PJA, DJA, TJA, IHA, P1, D1, T1, DPXGA, DPGA,	SCIM 199
	& DPXJA, DPYJA, DPXA, DPYA, DTXGA, DTGA, DTXJA, DTYJA, DTXA, DTYA)	SCIM 200
C....	FAIRED RESULTS AT UPPER HEIGHT	SCIM 201
	CALL FAIR(PGB, DGB, TGB, PJB, DJB, TJB, IHB, P2, D2, T2, DPXGB, DPGA,	SCIM 202
	& DPXJB, DPYJB, DPXB, DPYB, DTXGB, DTGB, DTXJB, DTYJB, DTXB, DTYB)	SCIM 203
C....	HEIGHT INTERPOLATION ON FAIRED P, D, T	SCIM 204
	CALL INTERZ(P1, D1, T1, HA, P2, D2, T2, HB, PH, DH, TH, H)	SCIM 205
C....	HEIGHT INTERPOLATION ON FAIRED DP/DX, DP/DY	SCIM 206
	CALL INTERW(DPXA, DPYA, HA, DPXB, DPYB, HB, DPX, DPY, H)	SCIM 207
C....	HEIGHT INTERPOLATION ON FAIRED DT/DX, DT/DY	SCIM 208
	CALL INTERW(DTXA, DTYA, HA, DTXB, DTYB, HB, DTX, DTY, H)	SCIM 209
C....	HEIGHT INTERPOLATION OF WIND	SCIM 210
	CALL INTERW(UGA, VGA, HA, UGB, VGB, HB, USH, VSH, H)	SCIM 211
	DUSH=(UGB-UGA)/5000.	SCIM 212
	DVSH=(VGB-VGA)/5000.	SCIM 213
C	CHANGE OF VARIABLES FOR OUTPUT	SCIM 214
	PGH=PH	SCIM 215
	DGH=DH	SCIM 216
	TGH=TH	SCIM 217
	CALL WIND	SCIM 218
	UH=UGH	SCIM 219
	VH=VGH	SCIM 220
	CP = 7.*PH/(2.*DH*TH)	SCIM 221
	DTZ = (T2 - T1)/5000.	SCIM 222
C....	VERTICAL MEAN WIND	SCIM 223
	WGN = -CP*(UH*DTX/DX5 + VH*DTY/DY5)/((G + CP*DTZ + UH*DUH + VH*DVH))	SCIM 224
C	GO TO RANDOM PERTURBATIONS SECTION	SCIM 225
	GO TO 800	SCIM 226
C....	THE FOLLOWING SECTION IS FOR ZONAL MEAN OR MIXED ZONAL MEAN 4D	SCIM 227
C	HEIGHTS	SCIM 228
C	UPPER HEIGHT INDEX	SCIM 229
200	IHGB = 5*(INT(H)/5) + 5	SCIM 230
C	UPPER HEIGHT	SCIM 231
	HGB = IHGB*1.	SCIM 232
C....	ZONAL MEAN AT UPPER HEIGHT	SCIM 233

CALL GTERP(IHGB,PHI,PGB,DGB,TGB,PG,DG,TG,DPYGB,DTYGB,UGB,UG)	SCIM 234
INSB = 5*(INT(N)/5) + 5	SCIM 235
IF (INSB .GT. 90)INSB = 90	SCIM 236
C UPPER STATIONARY PERTURBATION HEIGHT	SCIM 237
230 HSB = INSB*1.	SCIM 238
C....STATIONARY PERTURBATIONS AT UPPER HEIGHT	SCIM 239
CALL PDTUV(PSP,DSP,TSP,USP,VSP,PHI,THET,IHSB,PSB,DSB,TSB,	SCIM 240
\$ DPXSB,DPYSB,DTXSB,DTYSB,USB,VSB)	SCIM 241
C LOWER HEIGHT INDEX	SCIM 242
INGA = IHGB - 5	SCIM 243
C LOWER HEIGHT INDEX	SCIM 244
HGA = INGA*1.	SCIM 245
C.... ZONAL MEAN AT LOWER HEIGHT	SCIM 246
CALL GTERP(IHGA,PHI,PGA,DGA,TGA,PG,DG,TG,DPYGA,DTYGA,UGA,UG)	SCIM 247
IHSA=IHSB - 5	SCIM 248
C LOWER STATIONARY PERTURBATION HEIGHT	SCIM 249
250 HSA = IHSA*1.	SCIM 250
C....STATIONARY PERTURBATIONS AT LOWER HEIGHT	SCIM 251
CALL PDTUV(PSP,DSP,TSP,USP,VSP,PHI,THET,IHSA,PSA,DSA,TSA,	SCIM 252
\$ DPXSA,DPYSA,DTXSA,DTYSA,USA,VSA)	SCIM 253
CALL INTERW(UGA,O.,HGA,UGB,O.,HGB,UGH,VGH,H)	SCIM 254
CALL INTERW(USA,VSA,HSA,USB,VSB,HSB,SPU,SPV,H)	SCIM 255
USH=UGH+SPU	SCIM 256
VSH=SPV	SCIM 257
DUSH=((UGB-UGA)/(HGB-HGA)+(USB-USA)/(HSB-HSA))*0.01	SCIM 258
DVSH=.001*(VSB-VSA)/(HSB-HSA)	SCIM 259
C FOR MIXED ZONAL MEAN - 4D SECTION	SCIM 260
IF(H.LT.30.0) GO TO 300	SCIM 261
C.... ZONAL MEAN VALUES HEIGHT INTERPOLATIONS	SCIM 262
CALL INTER2(PGA,DGA,TGA,HGA,PGB,DGB,TGB,HGB,PGH,DGH,TGH,H)	SCIM 263
C....STATIONARY PERTURBATION HEIGHT INTERPOLATION	SCIM 264
CALL INTER2(PSA,DSA,TSA,HSA,PSB,DSB,TSB,HSB,PSH,DSH,TSH,H)	SCIM 265
C QUASI-BIENNIAL VALUES	SCIM 266
CALL QBOGEN	SCIM 267
C.... HEIGHT INTERPOLATION OF ZONAL MEAN DP/DY AND DT/DY	SCIM 268
CALL INTERW(DPYGA,DTYGA,HGA,DPYGB,DTYGB,HGB,DPYG,	SCIM 269
\$ DTYG,H)	SCIM 270
C....HEIGHT INTERPOLATION OF STATIONARY PERTURBATION DP/DX AND DP/DY	SCIM 271
CALL INTERW(DPXSA,DPYSA,HSA,DPXSB,DPYSB,HSB,DPXS,DPYS,H)	SCIM 272
C....HEIGHT INTERPOLATION OF STATIONARY PERTURBATION DT/DX AND DT/DY	SCIM 273
CALL INTERW(DTXSA,DTYSA,HSA,DTXSB,DTYSB,HSB,DTXS,DTYS,H)	SCIM 274
C....UNPERTURBED (MONTHLY MEAN) VALUES FOR OUTPUT	SCIM 275
TGH = TGH * (1. + TSH)	SCIM 276
PGH = PGH * (1. + PSH)	SCIM 277
DGH = DGH * (1. + DSH)	SCIM 278
C TOTAL DT/DX	SCIM 279
DTX = DTXS * TGH	SCIM 280
C TOTAL DT/DY	SCIM 281
DTY = TGH*DTYS + DTYG*(1. + TSH + DTYS)	SCIM 282
C TOTAL DP/DX	SCIM 283
DPX = DPXS * PGH	SCIM 284
C TOTAL DP/DY	SCIM 285
DPY = PGH*DPYS + DPYG*(1. + PSH + DPYS)	SCIM 286
C....UNPERTURBED VALUES PLUS QBO PERTURBATIONS	SCIM 287
PH = (1. + PQ) * PGH	SCIM 288
DH = DGH * (1. + DQ)	SCIM 289
TH = (1. + TQ) * TGH	SCIM 290
CALL WIND	SCIM 291
C GEOSTROPHIC WIND PLUS QBO WIND PERTURBATIONS	SCIM 292
UH=UGH+UQ	SCIM 293
VH=VGH+VQ	SCIM 294
CP = 7.*PGH/(2.*DGH*TGH)	SCIM 295
DTZ = (TGB*(1.+TSB) - TGA*(1.+TSA))/5000.	SCIM 296
C....VERTICAL MEAN WIND	SCIM 297
C THIS CHANGE WAS MADE 5 AUG 92 DUE TO PHONE CALL WITH MSFC JEFFRIES	
WGH=-CP*(UGH*DTX/DX5+VGH*DTY/DY5)/(G+CP*DTZ+VGH*DUH+VGH*DVH)	SCIM 298
WGH=-CP*(UGH*DTX/DX5+VGH*DTY/DY5)/(G+CP*DTZ+UGH*DUH+VGH*DVH)	SCIM 298
C GO TO RANDOM PERTURBATIONS SECTION	SCIM 299

GO TO 800	SCIM 300
C.... THE FOLLOWING IS THE MIXED ZONAL MEAN-4D SECTION	SCIM 301
C.... GENERATE GRID OF 4D PROFILES IF PREVIOUS HEIGHT GE 30	SCIM 302
300 IF (LOOK.EQ. 1)CALL GEN4D	SCIM 303
INCK = 24	SCIM 304
DO 310 KND = 1,3	SCIM 305
IKND = INCK + KND	SCIM 306
IF (IKND.GT.26)IKND=26	SCIM 307
DO 310 IND = 1,4	SCIM 308
DO 310 JND = 1,4	SCIM 309
PCK(IND,JND,KND) = P4D(4*(IND-1)+JND,IKND)	SCIM 310
DCK(IND,JND,KND) = D4D(4*(IND-1)+JND,IKND)	SCIM 311
310 CONTINUE	SCIM 312
C.... LAT-LON INTERPOLATION OF 4D DATA AT 25 KM	SCIM 313
CALL INTER4(PHI,THET,25, P4D,D4D,T4D,P4A,D4A,T4A,	SCIM 314
S DPX4,DPY4,DTX4,DTY4)	SCIM 315
C.... ZONAL MEAN PLUS STATIONARY PERTURBATIONS	SCIM 316
PB = PGB*(1. + PSB)	SCIM 317
C P,D,T	SCIM 318
DB = DGB*(1. + DSB)	SCIM 319
TB = TGB*(1. + TSB)	SCIM 320
DPXB = PGB*DPXSB	SCIM 321
DPYB = PGB*DPYSB + DPYGB*(1. + PSB + DPYSB)	SCIM 322
DTXB = TGB*DTXSB	SCIM 323
DTYB = TGB*DTYSB + DTYGB*(1. + TSB + DTYSB)	SCIM 324
C.... HEIGHT INTERPOLATION BETWEEN 4D AT 25 AND ZONAL MEAN AT UPPER	SCIM 325
C HEIGHT DP/DX AND DP/DY	SCIM 326
CALL INTERW(DPX4,DPY4,25.,DPXB,DPYB,HSB,DPX,DPY,H)	SCIM 327
C.... HEIGHT INTERPOLATION BETWEEN 4D AT 25 AND ZONAL MEAN AT UPPER	SCIM 328
C HEIGHT P,D,T	SCIM 329
CALL INTER2(P4A,D4A,T4A,25.,PB,DB,TB,HGB,PGH,DGH,TGH,H)	SCIM 330
C.... HEIGHT INTERPOLATION BETWEEN 4D AT 25 AND ZONAL MEAN AT UPPER	SCIM 331
C HEIGHT DT/DX AND DT/DY	SCIM 332
CALL INTERW(DTX4,DTY4,25.,DTXB,DTYB,HSB,DTX,DTY,H)	SCIM 333
IF (IOPQ.EQ.2) GO TO 350	SCIM 334
C QUASI BIENNIAL PERTURBATIONS	SCIM 335
CALL QBOGEN	SCIM 336
C ADD QBO PERTURBATIONS TO P,D,T	SCIM 337
350 PH=PGH*(1.+PQ)	SCIM 338
DH=DGH*(1.+DQ)	SCIM 339
TH=TGH*(1.+TQ)	SCIM 340
CALL WIND	SCIM 341
C ADD QBO WIND PERTURBATIONS	SCIM 342
UH=UGH+UQ	SCIM 343
VH=VGH+VQ	SCIM 344
CP = 7.*PGH/(2.*DGH*TGH)	SCIM 345
DTZ = (TB - T4A)/(1000.*(HGB - 25.))	SCIM 346
C.... VERTICAL MEAN WIND	SCIM 347
WGH=-CP*(UGH*DTX/DX5+VGH*DTY/DY5)/(G+CP*DTZ+UGH*DUH+VGH*DVH)	SCIM 348
C GO TO RANDOM PERTURBATIONS SECTION	SCIM 349
2000 FORMAT(' 4-D DATA AFTER ADJUSTMENTS'/' LATITUDE'/3X,16F8.3)	SCIM 350
2001 FORMAT(' LONGITUDE'/3X,16F8.3)	SCIM 351
2007 FORMAT(' PRESSURE')	SCIM 352
2002 FORMAT(1X,12,16F8.0)	SCIM 353
2003 FORMAT(' DENSITY')	SCIM 354
2005 FORMAT(' TEMPERATURE')	SCIM 355
2004 FORMAT(1X,12,16F8.5)	SCIM 356
2006 FORMAT(1X,12,16F8.2)	SCIM 357
GO TO 800	SCIM 358
500 IF (H.GE.0.0) GO TO 510	SCIM 359
IF (H.LT.-0.015) GO TO 505	SCIM 360
C IF -15 METER LE H LT 0 , H IS SET TO 0	SCIM 361
H = 0.	SCIM 362
GO TO 510	SCIM 363
C NO MORE COMPUTATIONS TO BE MADE IF HEIGHT LT -5 M	SCIM 364
505 NMORE = 0	SCIM 365
RETURN	SCIM 366
C.... GENERATE GRID OF 4D PROFILES IF PREVIOUS HEIGHT GE 30	SCIM 367

510 IF (LOOK.EQ.1)CALL GEN4D	SCIM 368
C LOWER HEIGHT INDEX	SCIM 369
IHA=INT(H)	SCIM 370
C LOWER HEIGHT INDEX	SCIM 371
HA = IHA*1.	SCIM 372
IWSX = IWSYM	SCIM 373
INCK=IHA-1	SCIM 374
DO 511 KND=1,3	SCIM 375
IKND = INCK + KND	SCIM 376
IF (IKND.LT.1)IKND = 1	SCIM 377
IF (IKND.GT.26)IKND = 26	SCIM 378
DO 511 IND=1,4	SCIM 379
DO 511 JND = 1,4	SCIM 380
PCK(IND,JND,KND)=P4D(4*(IND-1)+JND,IKND)	SCIM 381
DCK(IND,JND,KND)=D4D(4*(IND-1)+JND,IKND)	SCIM 382
511 CONTINUE	SCIM 383
C UPPER HEIGHT INDEX	SCIM 384
IHB = IHA + 1	SCIM 385
IF(IHB.LE.25) GO TO 513	SCIM 386
IHA=24	SCIM 387
HA=24.	SCIM 388
IHB=25	SCIM 389
C UPPER HEIGHT	SCIM 390
513 HB = IHB*1.	SCIM 391
C.....LAT-LOW INTERPOLATION OF 4D VALUES AT UPPER HEIGHT	SCIM 392
515 CALL INTER4(PHI,THET,IHB, P4D,D4D,T4D,PB,DB,TB,	SCIM 393
\$ DPX4B,DPY4B,DTX4B,DTY4B)	SCIM 394
IF(IHA.EQ.O.AND.PB*DB*TB.LE.O.)GO TO 520	SCIM 395
GO TO 540	SCIM 396
520 IHB=IHB+1	SCIM 397
C.....LOOP TO FIND LOWEST VALID HEIGHT	SCIM 398
HB=HB+1.	SCIM 399
GO TO 515	SCIM 400
540 IF(IHA.GT.O)CALL INTER4(PHI,THET,IHA, P4D,D4D,T4D,	SCIM 401
\$ PA,DA,TA,DPX4A,DPY4A,DTX4A,DTY4A)	SCIM 402
IF(IWSYM.EQ.ICHR('')) IWSX=IWSYM	SCIM 403
IF(IHA.EQ.O.OR.(PA*DA*TA.LE.O.AND.IHA.LT.10.AND.PB*DB*TB.GT.O.))	SCIM 404
1GO TO 550	SCIM 405
GO TO 600	SCIM 406
C.....LAT-LOW INTERPOLATION OF 4D VALUES AT LOWER HEIGHT	SCIM 407
550 CALL INTER4(PHI,THET,O, P4D,D4D,T4D,	SCIM 408
\$ PA,DA,TA,DPX4A,DPY4A,DTX4A,DTY4A)	SCIM 409
IF(IWSYM.EQ.ICHR('')) IWSX=IWSYM	SCIM 410
IF(TA-TB)560,570,560	SCIM 411
560 IF(TA*TB.LE.O.O) GO TO 570	SCIM 412
TZ = (TA-TB) / ALOG(TA/TB)	SCIM 413
GO TO 575	SCIM 414
570 TZ=TA	SCIM 415
C...COMPUTES HEIGHT OF SURFACE	SCIM 416
575 HA = HB	SCIM 417
IF(PB*PA.LE.O.O)GO TO 576	SCIM 418
HA = HB + 0.28705*TZ*ALOG(PB/PA)/G	SCIM 419
576 IF(H.GT.HA - 0.04)GO TO 600	SCIM 420
PH=O.	SCIM 421
DH=O.	SCIM 422
TH=O.	SCIM 423
PGH=O.	SCIM 424
DGH=O.	SCIM 425
TGH=O.	SCIM 426
GO TO 800	SCIM 427
C.....HEIGHT INTERPOLATION OF P,D,T	SCIM 428
600 CALL INTER2(PA,DA,TA,HA,PB,DB,TB,HB,PGH,DGH,TGH,H)	SCIM 429
C.....HEIGHT INTERPOLATION OF DP/DX AND DP/DY	SCIM 430
CALL INTERW(DPX4A,DPY4A,HA,DPX4B,DPY4B,HB,DPX,DPY,H)	SCIM 431
C.....HEIGHT INTERPOLATION OF DT/DX AND DT/DY	SCIM 432
CALL INTERW(DTX4A,DTY4A,HA,DTX4B,DTY4B,HB,DTX,DTY,H)	SCIM 433
C CHANGE OF NOTATION FOR OUTPUT	SCIM 434
PH = PGH	SCIM 435

DH = DGH	SCIM 436
TH = TGH	SCIM 437
IF(PH*DH*TH.LE.0.) GO TO 800	SCIM 438
CALL WIND	SCIM 439
C... CHANGE OF NOTATION FOR OUTPUT	SCIM 440
UH = UGH	SCIM 441
VH = VGH	SCIM 442
CP = 7.*PGH/(2.*DGH*TGH)	SCIM 443
DTZ = (TB - TA)/(1000.*(HB - HA))	SCIM 444
C.... VERTICAL MEAN WIND	SCIM 445
WGH = -CP*(UGH*DTX/DX5 + VGH*DTY/DY5)/(G+CP*DTZ+UH*DUH+VH*DVH)	SCIM 446
C... QBO=0 IF H LT 10	SCIM 447
IF (H.LT.10.) GO TO 800	SCIM 448
IF (IOPQ.EQ.2) GO TO 650	SCIM 449
C... COMPUTES QUASI BIENNIAL PERTURBATIONS	SCIM 450
CALL QBOGEN	SCIM 451
C... ADDS QBO PERTURBATIONS TO P,D,T	SCIM 452
650 PH=PGH*(1.+PQ)	SCIM 453
DH=DGH*(1.+DQ)	SCIM 454
TH=TGH*(1.+TQ)	SCIM 455
C... ADDS QBO WIND PERTURBATIONS TO U,V	SCIM 456
UH=UGH+UQ	SCIM 457
VH=VGH+VQ	SCIM 458
C.... THE FOLLOWING IS THE RANDOM PERTURBATIONS SECTION	SCIM 459
C.... NO RANDOM PERTURBATIONS IF IOPR GT 1	SCIM 460
800 CONTINUE	SCIM 461
IF(H .GE. 30.)GOTO 512	SCIM 462
IF(IPRT.NE.0)GOTO 512	SCIM 463
WRITE(6,2000) (GLAT(I),I=1,NG)	SCIM 464
WRITE(6,2001) (GLON(I),I=1,NG)	SCIM 465
WRITE(6,2007)	SCIM 466
DO 504 I=1,26	SCIM 467
IH=I-1	SCIM 468
WRITE(6,2004)IH,(SP4(J,I),J=1,NG)	SCIM 469
WRITE(6,2002) IH,(P4D(J,I),J=1,NG)	SCIM 470
504 CONTINUE	SCIM 471
WRITE(6,2003)	SCIM 472
DO 507 I = 1,26	SCIM 473
IH = I - 1	SCIM 474
WRITE(6,2004)IH,(SD4(J,I),J=1,NG)	SCIM 475
507 WRITE(6,2004)IH,(D4D(J,I),J=1,NG)	SCIM 476
WRITE(6,2005)	SCIM 477
DO 506 I = 1,26	SCIM 478
IH = I - 1	SCIM 479
WRITE(6,2004)IH,(ST4(J,I),J=1,NG)	SCIM 480
506 WRITE(6,2006)IH,(T4D(J,I),J=1,NG)	SCIM 481
IPRT=IPRT+1	SCIM 482
512 CONTINUE	SCIM 483
IF(NPOP.EQ.0)GO TO 840	SCIM 484
IF (IOPR.GT.1) GO TO 830	SCIM 485
C.... INTERPOLATES RANDOM WIND MAGNITUDES TO HEIGHT H, LATITUDE PHI	SCIM 486
CALL INTRUV(U,V,H,PHI,SUH,SVH)	SCIM 487
CALL INTR25(PLP,DLP,H,PHI,PLPH,DLPH)	SCIM 488
CALL INTR25(TLP,DLP,H,PHI,TLPH,DLPH)	SCIM 489
CALL INTR25(ULP,VLP,H,PHI,ULPH,VLPH)	SCIM 490
CALL INTR25(UDL,VDL,H,PHI,UDL2,VDL2)	SCIM 491
CALL INTR25(UVS,VDS,H,PHI,UVS2,VDS2)	SCIM 492
CALL INTRU(WR,H,SWH)	SCIM 493
SUHL=SQRT(ULPH*ABS(SUH))	SCIM 494
SUHS=SQRT((1.-ULPH)*ABS(SUH))	SCIM 495
SVHL=SQRT(VLPH*ABS(SVH))	SCIM 496
SVHS=SQRT((1.-VLPH)*ABS(SVH))	SCIM 497
SUH = SQRT(ABS(SUH))	SCIM 498
SVH = SQRT(ABS(SVH))	SCIM 499
IF(H.GE.25.)GOTO 805	SCIM 500
C.... IF H LE 20 USE 40 DATA RANDOM P,D,T SIGMAS	SCIM 501
IF(H.LE.20.)GOTO 810	SCIM 502
C.... INTERPOLATE PR,DR,TR ARRAYS TO GET P,D,T SIGMAS AT HEIGHT H,	SCIM 503

C	LATITUDE PHI	SCIM 504
	CALL RTERP(25.,PHI,PR,DR,TR,SPHG,SDHG,STHG)	SCIM 505
	GO TO 810	SCIM 506
805	CONTINUE	SCIM 507
	CALL RTERP(H,PHI,PR,DR,TR,SPH,SDH,STH)	SCIM 508
	GO TO 820	SCIM 509
C.....	LAT-LON INTERPOLATION ON P,D,T SIGMAS AT LOWER HEIGHT	SCIM 510
810	CALL INTER4(PHI,THET,IHA, SP4,SD4,ST4,PA,DA,TA, \$ DPX,DPY,DTX,DTY)	SCIM 511
		SCIM 512
C.....	LAT-LON INTERPOLATION ON P,D,T SIGMAS AT UPPER HEIGHT	SCIM 513
	CALL INTER4(PHI,THET,INB, SP4,SD4,ST4,PB,DB,TB, \$ DPX,DPY,DTX,DTY)	SCIM 514
		SCIM 515
C.....	HEIGHT INTERPOLATION OF SIGMAS	SCIM 516
	CALL INTERZ(PA,DA,TA, HA,PB,DB,TB, HB,SPH,SDH,STH,H)	SCIM 517
	IF(PH.LE.0.0.OR.DH.LE.0.0.OR.TH.LE.0.0)GO TO 825	SCIM 518
	IF(H.LE.20.)GOTO 820	SCIM 519
	FH = 1. - 0.2*(25. - H)	SCIM 520
	SPH = FH*SPHG + (1. - FH)*SPH	SCIM 521
	SDH = FH*SDHG + (1. - FH)*SDH	SCIM 522
	STH = FH*STHG + (1. - FH)*STH	SCIM 523
C.....	HEIGHT DISPLACEMENT BETWEEN PREVIOUS AND CURRENT POSITION	SCIM 524
820	DZ = H1 - H	SCIM 525
	SPHL=SQRT(PLPH*ABS(SPH))	SCIM 526
	SPHS=SQRT((1.-PLPH)*ABS(SPH))	SCIM 527
	SDHL=SQRT(DLPH*ABS(SDH))	SCIM 528
	SDHS=SQRT((1.-DLPH)*ABS(SDH))	SCIM 529
	STHL=SQRT(TLPH*ABS(STH))	SCIM 530
	STHS=SQRT((1.-TLPH)*ABS(STH))	SCIM 531
	SPH = SQRT(ABS(SPH))	SCIM 532
	SDH = SQRT(ABS(SDH))	SCIM 533
	STH = SQRT(ABS(STH))	SCIM 534
C.....	COMPUTES HORIZONTAL DISPLACEMENT DX BETWEEN PREVIOUS AND CURRENT	SCIM 535
C	POSITION, HORIZONTAL SCALE HL, AND VERTICAL SCALE VL	SCIM 536
C....	COMPUTES PERTURBATION VALUES PRH,DRH,TRH,URH,VRH AND WRH	SCIM 537
	CALL PERTRB	SCIM 538
C	ADDS RANDOM PERTURBATIONS TO PH,DH,TH	SCIM 539
	PH = PH*(1. + PRH)	SCIM 540
	DH = DH*(1. + DRH)	SCIM 541
	TH = TH*(1. + TRH)	SCIM 542
C	ADDS RANDOM WINDS TO UH,VH,WH	SCIM 543
	UH=UH+URH	SCIM 544
	VH=VH+VRH	SCIM 545
	WH=WH+WRH	SCIM 546
C.....	SETS PREVIOUS RANDOM PERTURBATION IN P,D,T TO CURRENT	SCIM 547
C	PERTURBATIONS, FOR NEXT CYCLE	SCIM 548
825	RP1S= PRHS	SCIM 549
	RD1S= DRHS	SCIM 550
	RT1S= TRHS	SCIM 551
	RP1L=PRHL	SCIM 552
	RD1L=DRHL	SCIM 553
	RT1L=TRHL	SCIM 554
C....	SETS PREVIOUS MAGNITUDES TO CURRENT VALUES, FOR NEXT CYCLE	SCIM 555
	SP1S=SPHS	SCIM 556
	SD1S= SDHS	SCIM 557
	ST1S=STHS	SCIM 558
	SP1L=SPHL	SCIM 559
	SD1L=SDHL	SCIM 560
	ST1L=STHL	SCIM 561
C.....	SETS PREVIOUS WIND PERTURBATION VALUES TO CURRENT VALUES,	SCIM 562
C	FOR NEXT CYCLE	SCIM 563
	RU1S=URHS	SCIM 564
	RV1S=VRHS	SCIM 565
	RU1L=URHL	SCIM 566
	RV1L=VRHL	SCIM 567
	RW1=WRH	SCIM 568
C.....	SETS PREVIOUS WIND PERTURBATION MAGNITUDES TO CURRENT VALUES,	SCIM 569
C	FOR NEXT CYCLE	SCIM 570
	SU1S=SUHS	SCIM 571

SV1S=SVKS	SCIM 572
SU1L=SUML	SCIM 573
SV1L=SVHL	SCIM 574
SW1=SWH	SCIM 575
C.....SETS PREVIOUS HEIGHT TO CURRENT HEIGHT, FOR NEXT CYCLE	SCIM 576
830 H1 = H	SCIM 577
C.....SETS PREVIOUS LATITUDE TO CURRENT LATITUDE, FOR NEXT CYCLE	SCIM 578
PH1R=PHIR	SCIM 579
C.....SETS PREVIOUS LONGITUDE TO CURRENT LONGITUDE, FOR NEXT CYCLE	SCIM 580
TH1R=THETR	SCIM 581
C SETS NMORE TO COMPUTE MORE DATA ON NEXT CYCLE	SCIM 582
840 NMORE = 1	SCIM 583
C.....NO MORE DATA IF P, D, OR T LEQ 0	SCIM 584
IF(PH*DH*TH.LE.0.) RETURN	SCIM 585
CALL STDATM(H,TS,PS,DS)	SCIM 586
IF ((PS*DS*TS).GT.0.) GO TO 870	SCIM 587
PGHP=0.	SCIM 588
DGHP=0.	SCIM 589
TGHP=0.	SCIM 590
PHP=0.	SCIM 591
DHP=0.	SCIM 592
THP=0.	SCIM 593
GO TO 880	SCIM 594
870 PGHP=100.*(PGH-PS)/PS	SCIM 595
DGHP=100.*(DGH-DS)/DS	SCIM 596
TGHP=100.*(TGH-TS)/TS	SCIM 597
PHP=100.*(PH-PS)/PS	SCIM 598
DHP=100.*(DH-DS)/DS	SCIM 599
THP=100.*(TH-TS)/TS	SCIM 600
C CONVERTS QBO P,D,T TO PERCENT	SCIM 601
880 PQ=100.*PQ	SCIM 602
DQ=100.*DQ	SCIM 603
TQ=100.*TQ	SCIM 604
C CONVERTS RANDOM P,D,T TO PERCENT	SCIM 605
PRH=100.*PRH	SCIM 606
DRH=100.*DRH	SCIM 607
TRH=100.*TRH	SCIM 608
PRHS=100.*PRHS	SCIM 609
DRHS=100.*DRHS	SCIM 610
TRHS=100.*TRHS	SCIM 611
PRHL=100.*PRHL	SCIM 612
DRHL=100.*DRHL	SCIM 613
TRHL=100.*TRHL	SCIM 614
SPHS = 100.*SPHS	SCIM 615
SDHS = 100.*SDHS	SCIM 616
STHS = 100.*STHS	SCIM 617
SPHL = 100.*SPHL	SCIM 618
SDHL = 100.*SDHL	SCIM 619
STHL = 100.*STHL	SCIM 620
C CONVERTS WIND SHEAR TO M/S/KM	SCIM 621
DUM = DUM * 1000.	SCIM 622
DVH = DVH * 1000.	SCIM 623
PQA=PQA*100.	SCIM 624
DQA=DQA*100.	SCIM 625
TQA=TQA*100.	SCIM 626
SPH=SPH*100.	SCIM 627
SDH=SDH*100.	SCIM 628
STH=STH*100.	SCIM 629
PSH=PSH*100.	SCIM 630
DSH=DSH*100.	SCIM 631
TSH=TSH*100.	SCIM 632
IF(NPOP.NE.0) GO TO 920	SCIM 633
UPRE=UGH	SCIM 634
VPRE=VGH	SCIM 635
DUPRE=DUM/1000.	SCIM 636
DVPRE=DVH/1000.	SCIM 637
RETURN	SCIM 638
920 IF (IOPP.NE.0)	SCIM 639


```

* WRITE(IOPP,951)H,PHI,THET,DGHP,TGH,UGH,VGH,WGH,SDHL,STHL, SCIM 640
& SUHL,SVHL SCIM 641
951 FORMAT(F5.1,7F7.2,4F6.2) SCIM 642
C WRITE(6,900) H,PHI,THET,PGH,DGH,TGH,UGH,CHAR(IWSYM), SCIM 643
C 1 VGH,PH,DH,TH,UM,CHAR(IWSYM),VM,DUH, SCIM 644
C $ DVH,SWH,IET,PGHP,DGHP,TGHP,WGH,PHP,DHP,THP,WH,PSH,DSH,TSH, SCIM 645
C $ SPU,SPV,PQ,DQ,TQ,UQ, SCIM 646
C $ VQ,PQA,DQA,TQA,UA,VA,PRHS,DRHS,TRHS,URHS,VRHS,SPHS,SDHS,STHS, SCIM 647
C 1SUHS,SVHS,PRNL,DRHL,TRHL,URHL,VRHL,SPHL,SDHL,STHL,SUHL,SVHL, SCIM 648
C 2PRH,DRH,TRH,URH,VRH,SPH,SDH,STM,SUH,SVH SCIM 649
C900 FORMAT(1X,F6.2,2F7.2,2(2E9.3,2F6.0,A1,F5.0),2F5.1,23X,F6.2/1X, SCIM 650
C 1 15,14X,2(F8.1,' '),F6.1,' ',E10.2,1X, SCIM 651
C & 2(F8.1,' '),F6.1,' ',F10.2,11X, SCIM 652
C 23F5.1,2F5.0,' SP'/102X,3F5.1,2F5.0,' QBO'/102X,3F5.1,2F5.0,' MAG'/ SCIM 653
C 3 102X,3F5.1,2F5.0,' RANS'/102X,3F5.1,2F5.0,' SIGS'/ SCIM 654
C 4102X,3F5.1,2F5.0,' RANL',/ SCIM 655
C 5102X,3F5.1,2F5.0,' SIGL',/ SCIM 656
C 6102X,3F5.1,2F5.0,' RANT',/ SCIM 657
C 7102X,3F5.1,2F5.0,' SIGT',/ SCIM 658
C NEXT THREE LINES PRINT OUT LAT, LONG, E-W WIND, N-S WIND
C PRINT*, 'LAT, LONG, E-W WIND, N-S WIND'
C WRITE(6,9091) PHI,THET,UH,CHAR(IWSYM),VM
C9091 FORMAT(1X,2(F7.2,6X),F6.0,A1,F5.0,/)
C MULTIPLY WIND SPEED AND WIND DIRECTION BY TIME STEP TO
C CREATE WIND VECTORS FOR THE TIME STEP IN KILOMETERS
C GIVEN A TIME STEP OF 1 HOUR WITH 60 SEC/MIN, 60 MIN/HR
LONGSTEP = UH * 60 * 60 * 1 / 1000
LATSTEP = VM * 60 * 60 * 1 / 1000
DELTALAT = LATSTEP / 111
DELTALONG = LONGSTEP / ((COS(PHI/FAC)) * 111.4)
DELTALONG = MOD(DELTALONG,360.0)
C APPLY WIND VECTORS TO LAT/LONG (COMPUTE NEW LAT/LONG)
IF (ABS(NEWLAT).EQ. 90) THEN
NEWLAT = PHI - DELTALAT
ELSE
NEWLAT = PHI + DELTALAT
ENDIF
IF (NEWLAT .GT. 90) THEN
NEWLAT = 90 - (NEWLAT - 90)
ELSE
CONTINUE
ENDIF
IF (NEWLAT .LT. -90) THEN
NEWLAT = ABS(NEWLAT) - 180
ELSE
CONTINUE
ENDIF
PHI1R = PHI * FAC
PHI2R = NEWLAT * FAC
PHI = NEWLAT
NEWLONG = THET - DELTALONG
IF (NEWLONG .GT. 180) THEN
NEWLONG = NEWLONG - 360
ELSE
CONTINUE
ENDIF
IF (NEWLONG .LT. -180) THEN
NEWLONG = NEWLONG + 360
ELSE
CONTINUE
ENDIF
THE1R = THET * FAC
THE2R = NEWLONG * FAC
THET = NEWLONG
C WRITE(6,9092) LATSTEP, LONGSTEP, DELTALAT, DELTALONG,
C $NEWLAT, NEWLONG
C9092 FORMAT(1X, 'LATSTEP(KM) LONGSTEP(KM)', 1X,
C $'DELTALAT(DEG) DELTALONG(DEG) NEWLAT(DEG) NEWLONG(DEG)', /,

```

```

C      $1X,F5.0,8X,F6.0,7X,F5.0,9X,F6.0,12X,F5.0,7X,F6.0,/)
C      CHECK LONGITUDE PICKET; RECORD LATITUDE IF LONGITUDE IS MET
C      CURRENT WRITE STATEMENT WRITES LATITUDE TO A FILE
C      IF (NEWLONG.LT.-42.0 .AND. NEWLONG.GT.-46.0 .AND. PASS.EQ.0) THEN
C          PASS = 1
C          WRITE(9,9093) NEWLAT
C9093  FORMAT(1X,F6.2)
C      ELSE
C          CONTINUE
C      ENDIF
C      INCREMENT TIME AND CHECK STOPPING RULE
C          TIME = TIME + 1
C          IF (TIME .GT. 23) THEN
C              DAYCOUNT = DAYCOUNT + 1
C          PRINT*, 'INSIDE TIME LOOP'
C          TIME = 0
C      WRITE(6,9094) LATSTEP, LONGSTEP, DELTALAT, DELTALONG,
C          $NEWLAT, NEWLONG
C9094  FORMAT(1X, 'LATSTEP(KM) LONGSTEP(KM)', 1X,
C          $'DELTALAT(DEG) DELTALONG(DEG) NEWLAT(DEG) NEWLONG(DEG)', /, /,
C          $1X, F5.0, 8X, F6.0, 7X, F5.0, 9X, F6.0, 12X, F5.0, 7X, F6.0, /)
C          IF (DAYCOUNT .GT. 30) THEN
C              PRINT*, 'INSIDE DAYCOUNT LOOP'
C              MN = MN + 1
C              MONTH = MN
C          PRINT*, 'MONTH IS CHANGED'
C              DAYCOUNT = 0
C              IF (MONTH .GT. 12) THEN
C                  IYR = IYR + 1
C                  MN = 1
C                  MONTH = MN
C          WRITE(6,9095) IYR
C9095  FORMAT(1X, I2, /)
C          ELSE
C              CONTINUE
C          ENDIF
C          WRITE(6,9099) MONTH
C9099  FORMAT(1X, I3, /)
C          ELSE
C              CONTINUE
C          ENDIF
C          ENDIF
C          ELSE
C              CONTINUE
C          ENDIF
C          LOCATION AFTER 10 DAYS OF 24 HOURS PER DAY TIME INCREMENTS
C          IF (TOTDAYS .EQ. 240) THEN
C              WRITE(7,9096) NEWLAT, NEWLONG
C9096  FORMAT(1X, F6.2, 2X, F7.2)
C          ELSE
C              CONTINUE
C          ENDIF
C          LOCATION AFTER 30 DAYS OF 24 TIME INCREMENTS PER DAY
C          IF (TOTDAYS .EQ. 720) THEN
C              WRITE(9,9097) NEWLAT, NEWLONG
C9097  FORMAT(1X, F6.2, 2X, F7.2)
C          ELSE
C              CONTINUE
C          ENDIF
C          LOCATION AFTER 360 DAYS OF 24 TIME INCREMENTS PER DAY
C          IF (TOTDAYS .EQ. 8640) THEN
C              WRITE(8,9098) NEWLAT, NEWLONG
C9098  FORMAT(1X, F6.2, 2X, F7.2)
C          ELSE
C              CONTINUE
C          ENDIF
C          TOTDAYS = TOTDAYS + 1
C          IF (NEWLONG .LT. -46.0 .AND. NEWLONG .GT. -50.0) THEN
C              PASS = 0

```

```
C  ELSEIF (NEWLONG .LT. -38.0 .AND. NEWLONG .GT. -42.0) THEN
C    PASS = 0
C  ELSE
C    CONTINUE
C  ENDIF
197 CONTINUE
C 197 PRINT*, 'END OF DO LOOP'
RETURN
END
```

```
SCIM 659
SCIM 660
```

LIST OF REFERENCES

Andrews, David G., Holton, James R., and Leovy, Conway B., *Middle Atmosphere Dynamics*, Academic Press, Inc., 1987.

Brown, Stuart F., "Earthwinds Waits on the Weather," *Popular Science*, May 1992.

Brown, David A., "Balloon Technology Offers High-Altitude Applications," *Aviation Week & Space Technology*, 16 November 1992.

Craig, Richard A., *The Upper Atmosphere Meteorology and Physics*, Academic Press, Inc., 1965.

Davies, Merton E., and Harris, William R., *RAND's Role in the Evolution of Balloon and Satellite Observation Systems and Related U.S. Space Technology*, The RAND Corporation, 1988.

Defense Advanced Research Projects Agency Final Technical Report, WII-9947-01-TR-01, "Long Duration Balloon Technology," by J.L. Rand and others, Winzen International, Inc., San Antonio, Texas, 6 December 1991.

Defense Advanced Research Projects Agency Final Technical Report, CHR/91-2750, "Expendable Air Vehicles/High Altitude Balloon Technology," by Robert Hawkins, Coleman Research Corporation, Huntsville, Alabama, 2 August 1991.

Dollfus, Charles, *The Orion Book of Balloons*, The Orion Press, 1961.

Dunnigan, James F. and Bay, Austin, *From Shield To Storm*, William Morrow and Company, Inc., 1992.

Glines, LTC C.V., USAF, *Lighter-Than-Air Flight*, Franklin Watts, Inc., 1965.

Holton, James R., *An Introduction to Dynamic Meteorology*, 2d ed., Academic Press, Inc., 1979.

Israel, David, "Theater Missile Defense," briefing presented at the Naval Postgraduate School, Monterey, California, 14 April 1993.

Lawrence Livermore National Laboratory Report, "A System Architecture for Long Duration Free Floating Flight for Military Applications," by Larry Epley, Cirrus Aerospace Corporation, Burke, Virginia, 31 August 1990.

Macksey, Kenneth, *Technology In War*, Prentice Hall Press, 1986.

National Center For Atmospheric Research Technical Note 1A 99, *Scientific Ballooning Handbook*, by Alvin Morris, May 1975.

Rand, James L., "Long Duration Balloons," paper presented at the World Space Congress and International Astronautical Federation Committee on Space Research, Fall 1992.

Severance, J.D., *Proposed Design of a Tactical Reconnaissance Satellite System*, Master's Thesis, Air Force Institute of Technology, Wright-Patterson Air Force Base, Ohio, December 1990.

Telephone conversation between W.R. Jeffries, National Aeronautical and Space Administration Marshall Space Flight Center, Huntsville, Alabama, and the author, 15 April 1993.

Winzen International White Paper, "Long Duration Balloon Technology Development Program," San Antonio, Texas, 1991.

INITIAL DISTRIBUTION LIST

	No. Copies
1. Defense Technical Information Center Cameron Station Alexandria VA 22304-6145	2
2. Library, Code 052 Naval Postgraduate School Monterey CA 93943-5002	2
3. Naval Reserach Laboratory Attn: Professor Michael Melich Code 8000 Building 69 Room 100 4555 Overlook Avenue SW Washington, D.C. 20375-5320	1
4. Professor R.T. Williams, Code MR/WU Department of Meteorology Naval Postgraduate School Monterey, CA 93943-5000	1
5. Professor William Kemple, Code OA/KE Department of Operations Analysis Naval Postgraduate School Monterey, CA 93943-5000	1
6. NASA Marshall Space Flight Center Attn: Mr. William R. Jeffries Mail Code ES44 MSFC, AL 35812	1
7. MAJ Kurt C. Reitingger P.O. Box 744 Gunnison, CO 81230	1
8. Naval Reserach Laboratory Attn: Mr Peter Wilhelm 4555 Overlook Avenue SW Washington, D.C. 20375-5320	1
9. Director for Command, Control and Communications Systems, Joint Staff Washington, D.C. 20318-6000	1

- 10. C3 Academic Group, Code CC 1
Naval Postgraduate School
Monterey, CA 93943-5000
- 11. LTC Dale E. Tietz 1
BMDO/DTD
Pentagon
Washington, D.C. 20301-7100
- 12. MAJ Thurman T. Hurmondeloney 1
BMDO/DTD
Pentagon
Washington, D.C. 20301-7100
- 13. MAJ Michael Fisher 1
BMDO/DTD
Pentagon
Washington, D.C. 20301-7100