

AD-A279 572



2

DODPOPHM/USA/DOD/NADTR94001 REVISION A

Superseding

DODPOPHM/USA/DOD/NADTR94001

February 1994

**PERFORMANCE ORIENTED PACKAGING TESTING  
OF CONTAINER, SHIPPING AND STORAGE, MK 732 MOD 0  
FOR PACKING GROUP II SOLID HAZARDOUS MATERIALS**

Author:

Dennis M. Kotun

Mechanical Engineering Technician


Performing Activity:

Naval Packaging, Handling, Storage and Transportation Center

Naval Weapons Station Earle

Colts Neck, New Jersey 07722-5023

May 1994

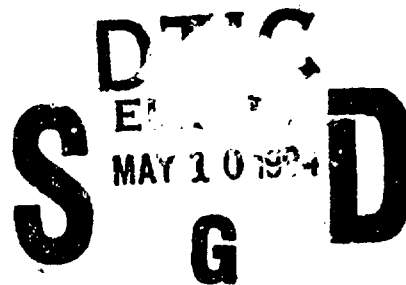

FINAL

DISTRIBUTION UNLIMITED

Sponsoring Organization:

Program Executive Office

Undersea Warfare (PMO406F1)

Washington, DC 20362-5169

94-13933

INSPECTED 1

**REPORT DOCUMENTATION PAGE**Form Approved  
OMB No 0704-0188

Public reporting burden of this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

3. REPORT TYPE AND DATES COVERED

05/94

POP Test (12/93)

4. TITLE AND SUBTITLE

Performance Oriented Packaging Testing of Container,  
Shipping and Storage, Mk 732 Mod 0 for Packing Group II  
Solid Hazardous Materials

5. FUNDING NUMBERS

6. AUTHOR(S)

Dennis M. Kotun

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Naval Packaging, Handling, Storage  
and Transportation Center  
Naval Weapons Station Earle  
Colts Neck, NJ 07722-5023

8. PERFORMING ORGANIZATION  
REPORT NUMBER

DODPOPHM/USA/DOD/NADTR94001  
REVISION A

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

Program Executive Office  
Undersea Warfare (PMO406F1)  
Washington, DC 20362-5169

10. SPONSORING/MONITORING  
AGENCY REPORT NUMBER

Same as above

11. SUPPLEMENTARY NOTES

N/A

12a. DISTRIBUTION/AVAILABILITY STATEMENT

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

This Performance Oriented Packaging (POP) test was conducted to ascertain whether the Mk 732 Mod 0 Shipping and Storage Container (Drawing 53711-6205246) meets the Packing Group II requirements specified by the Code of Federal Regulations, Title 49 CFR, Parts 106 through 178, dated 1 October 1992. The packaged commodity used for the test was a simulated weight of steel and sand weighing 6.1 kg (13.5 pounds). This represents the current maximum commodity weight. To compensate for future growth variations in commodity and/or packaging, 1.4 kg (3.0 pounds) were added. Gross weight of the loaded container was 17.0 kg (37.5 pounds). The test results indicate that the container has conformed to the POP requirements.

14. SUBJECT TERMS

POP Test of Mk 732 Mod 0 Shipping and Storage  
Container

15. NUMBER OF PAGES

6

16. PRICE CODE

17. SECURITY CLASSIFICATION OF  
REPORT

UNCLASSIFIED

18. SECURITY CLASSIFICA-  
TION OF THIS PAGE

UNCLASSIFIED

19. SECURITY CLASSIFICA-  
TION OF ABSTRACT

UNCLASSIFIED

20. LIMITATION  
OF ABSTRACT

UL

## INTRODUCTION

This Performance Oriented Packaging (POP) test was performed to ascertain whether the Mk 732 Mod 0 Shipping and Storage Container (Drawing 53711-6205246) meets the Packing Group II requirements specified by the Code of Federal Regulations, Title 49 CFR, Parts 106 through 178, dated 1 October 1992. The packaged commodity used for the test was a simulated weight of steel and sand weighing 6.1 kg (13.5 pounds). This represents the current maximum commodity weight. To compensate for future growth variations in commodity and/or packaging, 1.4 kg (3.0 pounds) were added. Gross weight of the loaded container was 17 kg (37.5 pounds).

Due a limited availability only five containers were used for testing. This is less than the number required by the regulations. The containers were identified as #1, #2, #3, #4, and #5.

## TESTS PERFORMED

### 1. Base Level Vibration Test

This test was performed in accordance with Title 49 CFR 178.608. Containers #1, #2, and #3 were placed on a repetitive shock platform which has a vertical linear motion of 1-inch double amplitude. Movement of the containers were restricted during vibration in all but the vertical direction. The frequency of the platform was increased until the containers left the platform 1/16 of an inch at some instant during each cycle. Test time was 1 hour.

### 2. Stacking Test

This test was performed in accordance with Title 49 CFR 178.606. Containers #1, #2, and #3 were used for this test. Each container was subjected to a force applied to its top surface equivalent to the total weight of identical packages stacked to a minimum height of 3 meters (including the test container). A weight of 170 kg (375 pounds) was stacked on each test container. The test was performed for 24 hours. The weight was then removed and the containers examined.

### 3. Drop Test

This test was performed in accordance with Title 49 CFR 178.603. Six drops were performed from a height of 1.2 meters (4 feet) in the following orientations (three drops for each orientation):

- a. Horizontally using container #1, #2, and #3.
- b. Diagonally on the edge between the cover assembly and the top ring of the container using container #4 and #5. (Two drops were performed on container #5.)

**PASS/FAIL**

**1. Base Level Vibration Test**

The criteria for passing the base level vibration test is outlined in Title 49 CFR 178.608(c): No test sample should show any deterioration which could adversely affect transportation safety or any distortion liable to reduce packaging strength.

**2. Stacking Test**

The criteria for passing the stacking test is outlined in Title 49 CFR 178.606(d): No test sample may show any deterioration which could adversely affect transportation safety or any distortion likely to reduce its strength, cause instability in stacks of packages, or cause damage to inner packagings likely to reduce safety in transportation.

**3. Drop Test**

The criteria for passing the drop test is outlined in Title 49 CFR 178.603(f): A package is considered to successfully pass the drop tests if for each sample tested, no rupture occurs which would permit spillage of loose explosive substances or articles from the outer packaging.

**TEST RESULTS**

**1. Base Level Vibration Test**

Satisfactory.

**2. Stacking Test**

Satisfactory.

**3. Drop Test**

Satisfactory.

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution /	
Availability Codes	
Dist	Avail and / or Special
A-1	

**DISCUSSION**

**1. Base Level Vibration Test**

The input vibration frequency was 3.95 Hz. Immediately after the vibration test was completed, each container was removed from the platform, turned on its side and inspected. No unfavorable distortion or deterioration was observed.

**2. Stacking Test**

Each container was inspected after the 24-hour period was over. No unfavorable distortion or deterioration was observed.

**3. Drop Test**

After each drop, the container was inspected. The contents were completely retained by the container.

**REFERENCE MATERIAL**

- A. Code of Federal Regulations, Title 49 CFR, Parts 106-178.
- B. Bureau of Explosives Tariff No. BOE 6000K Hazardous Materials Regulations of the Department of Transportation by Air, Rail, Highway, Water including Specifications for Shipping Containers.

**DISTRIBUTION LIST**

Defense Technical Information Center (2 copies)  
ATTN: DTIC/FDA  
Bldg. 5, Cameron Station  
Alexandria, VA 22304-6145

DLA Depot Operations Support Office  
Bldg. 32F, DGSE  
ATTN: Tom McElwee  
Richmond, VA 23297-5000

Commander  
Naval Surface Warfare Center  
ATTN: Crane Division (Code 4053)  
Crane, IN 47522-5000

## TEST DATA SHEET

<b>POP MARKING:</b>	
UN 1A2/Y17/S/**/USA/DOD/NAD	
**YEAR LAST PACKED OR MANUFACTURED	
<b>Nomenclature:</b> Mk 732 Mod 0 Shipping and Storage Container	
<b>Type:</b> 1A2	<b>NSN:</b> 4T 8140-01-311-7850
<b>Drawing Number or P/N:</b> (53711) 6205246	<b>Outer Packaging Material:</b> Steel
<b>Dimensions:</b> 17" Dia x 12.5" H	<b>Gross Weight:</b> 17 kg (37.5 pounds)
<b>Closure (Method/Type):</b> Removable Cover With Locking Ring	<b>Tare Weight:</b> 9.5 kg (21 pounds)
<b>Additional Description:</b>	
<b>PACKAGED COMMODITY:</b>	
<b>Nomenclature:</b> See table 1	<b>NSN(s):</b> See table 1
<b>United Nations Number:</b> See table 1	
<b>United Nations Packing Group:</b> II	
<b>Physical State (Solid, Liquid, or Gas):</b> Solid	
<b>Vapor Pressure (Liquids Only):</b> N/A <b>At 50 °C:</b> N/A <b>At 55 °C:</b> N/A	
<b>Consistency/Viscosity:</b> N/A	<b>Density/Specific Gravity:</b> N/A
<b>Amount per Package:</b> See table 1	<b>Flash Point:</b> N/A
<b>Net Weight:</b> See table 1	
<b>PACKAGED COMMODITY USED FOR TEST:</b>	
<b>Name:</b> Simulated Weight of Steel and Sand	<b>Physical State:</b> Solid
<b>Consistency:</b> N/A	<b>Density/Specific Gravity:</b> N/A
<b>Test Pressure (Liquids Only):</b> N/A	<b>Net Weight:</b> 7.5 kg (16.5 pounds)
<b>Additional Description:</b>	
The net weight includes the current maximum commodity weight plus an additional 1.4 kg (3.0 pounds).	

N/A = Not Applicable

**TABLE 1**  
**Commodities Approved for Shipping in the**  
**Mk 732 Mod 0 Shipping and Storage Container**

NALC/ DDIC	NSN	Commodity Nomenclature	Packing Document Number	Haz Class/Div	UN Number	Units/ Package	Total Net Weight kg (lb)	Total Gross Weight kg (lb)
5W13	4T 1356-01-272-2369	Air Stabilizer, Mk 32 Mod 0 Fixed Wing	53711- 6205257	1.4S	0349	1	6.1 (13.5)	15.7 (34.5)
5W14	4T 1356-01-272-2370	Air Stabilizer, Mk 33 Mod 0 Helo	53711- 6205260	1.4S	0349	1	6.1 (13.5)	15.7 (34.5)
N/A	N/A	Air Stabilizer, Mk 32 Mod 1 Fixed Wing	53711- 6205257	1.4S	0070	1	6.1 (13.5)	15.7 (34.5)

N/A = Not Assigned