
PL-TR-94-2178

AD-A285 846



EPSCoR Supplemental Grant for An Application of Neural Networks to Seismic Signal Discrimination

James A. Cercone John R. Martin




Tech Foundation, Inc.
Old Main
Montgomery, West Virginia 25316

11 April 1994

Scientific Report No. 3

Approved for public release; distribution unlimited.

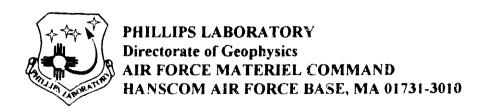



The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the official policies, either express or implied, of the Air Force or the U.S. Government.

This technical report has been reviewed and is approved for publication.

JAMES F. LEWKOWICZ

Contract Manager

Earth Sciences Division

Earth Sciences Division

AMES F. LEWKOWICZ, Directo

This report has been reviewed by the ESC Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

Qualified requestors may obtain additional copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

If your address has changed, or if you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify PL/TSI, 29 Randolph Road, Hanscom AFB, MA 01731-3010. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorage for information Operations and Asports, 1215 Jehrenson Date Holders, Survey 2202, 2402, 2012, 2012, 2013, 1215 Jehrenson Date Holders, Survey 2202, 2402, 2402, 2013, 1215 Jehrenson Date Holders, Survey 2202, 2402, 2402, 2502

1. AGENCY USE ONLY (Leave blar	المحمد والمحمد والأحمد والمتالي	3. REPORT TYPE AND			
committee where writes the mark the time.	11 April 1994	Scientific N			
4. TITLE AND SUBTITLE			FUNDING NUMBERS		
EPSCoR Supplemental Grant for an Application of Neural			FE 61101E		
Networks to Seismic Signal Discrimination			PR 1090 TA DA WU AA		
			0		
6. AUTHOR(S)			Contract F19628-91-K-00		
James A. Cercone					
John R. Martin					
7. PERFORMING ORGANIZATION N	ME(S) AND ADDRESS(ES)	n	FERFORMING ORGANIZATION REPORT NUMBER		
Tech Foundation, Inc.			NEFORT HOMBER		
Old Main					
Montgomery, West Virg	ginia 25136				
. SPONSORING MONITORING AGE	NCY NAME(S) AND ADDRESS(E	5) 10	SPONSORING / MONITORING		
Phillips Laboratory			AGENCY REPORT NUMBER		
29 Randolph Road	2010	1	PL-TR-94-2178		
Hanscom AFB, MA 01731	-5010				
Contract Manager: Ja	mes Lewkowicz/CPFH				
11. SUPPLEMENTARY NOTES					
Approved for public r	elease; distribution	unlimited.			
13. ABSTRACT (Maximum 200 words)				
The EPSCoR Supplement Signal Discrimination ARPA project. The st with a copy of the co model for seismic eve	was used to fund a udents course and rempleted Masters Thes.	Graduate Student fo search activities a	r work with a parent re presented along		
4 SUBJECT TERMS Epscore, Epscore Gra	duate Student, Seism		15. NUMBER OF PAGES 94 16. PRICE CODE		
			ID. PRICE CODE		
	SECURITY CLASSIFICATION	19 SECURITY CLASSIFICAT	ION 20. LIMITATION OF ABSTRACT		
OF REPORT The lassified	OF THIS PAGE Unclassified	Of ABSTRACT Unclassified	SAR		

Unclassified

Table of Contents

1	Cverview	1
2	Course of Study	2
3	Research Related Activities	3
4	Travel	3
5	Summary	4
Арре	ndix Seismic Event Classification using Neural Networks with ARMA Coefficient Modeling	5

Á)			
i · ·	F - 51	J			
1	24 3 - 4				
1 ,	0,000	. !			
Ву					
(2 t 0 t 0 d)					
Availability Codes					
Oest	Avail and Specie				
A-1					

1. Overview

Funding for an EPSCoR student in the area of control systems engineering (masters level) was requested and received as a supplement to an ARPA funded project "Application of Neural Networks to Seismic Signal Discrimination". This EPSCoR funded student was directly involved in the application of neural networks and fuzzy logic as part of the investigation of seismic signal detection and classification. The graduate advisory committee for the EPSCoR student was comprised of three faculty members directly involved in the research project.

Two different students filled the EPSCoR funded position. Initially, Mr. Mike Murphy was selected based on undergraduate achievement and supplemental sponsorship by Eagle Research Corporation of Charleston, West Virginia. Eagle Research provided Mr. Murphy with a two year leave of absence from his employment and agreed to continue insurance benefits and provide material support in Mr. Murphy's endeavors. Mr. Murphy completed one semester on campus but chose to return to full time employment upon learning of his wife's pregnancy towards the end of his first semester. Mr. Murphy left under favorable circumstances and continues his studies as a part time student. A second student, Mr. John Martin, began his program of study the same time as Mr. Murphy as a research assistant on the ARPA funded project and assumed the role of EPSCoR student the second semester of the program.

The goals of the EPSCoR position was for the active participation of the student in the parent research project working with the principle investigator and co-investigators in developing mathematical models of neural networks and implementing both neural nets and fuzzy logic. The student was expected to prepare and present a major paper. Mr Murphy prepared a paper entitled "Neural Network Techniques Applied to Seismic Event Classification" that was presented at the South East Symposium on System Theory, University of Alabama, March 8, 1993. Mr Martin has prepared and has been notified of acceptance of a paper at the West Virginia University Mining Symposium to be field July 11, 1994.

Mr Martin's role in the parent project was substantial. He was instrumental in writing the major parametric transformation codes used in the extensive network testing schemes. His main research involved the application of neural networks to seismic discrimination using an ARMA signal model. This work was used as his required masters project and the final version, as presented and approved by WVIT graduate school, is attached to this report.

main research team covering topics such as programming in ADA, various neural networks, and presentations on seismology.

3 Research Related Activities

Course attendance and work assignments were expected and assumed in connection with the students program of study. Other project related activities outside the normal realm of course study enhanced the EPSCoR students learning experience.

An Intel Neural Network Development System was purchased for use by the student as part of his research program. Use of this system allowed the student to independently study neural networks from a users point of view as well as conduct research on training and classification of different seismic parametric data transformations. The students was required to prepare and present a seminar on Intel System to the research group. Additionally, he trained other members of the research group in the use of the development system for preliminary testing of the main seismic data sets. The conference paper written by Mr. Murphy was based on test results obtained form the development system. Mr. Martin extensively used the development system in his preliminary ARMA modeling work. The development system was used mainly for quick experimentation and education. The software was not used for final result tabulation due to speed limitations and copy restrictions

A mathematics software package, Matlab, was used by the research project to preprocess the raw seismic waveforms and derive different parametric transformations. The EPSCoR student was responsible for taking the rough transformations developed by the co-investigators and modify the routines into the proper format used for test result generation. These modifications ranged from re-coding the algorithms for more efficient operation to the addition of data file manipulation routines that allowed auto execution of data processing routines

The process of selecting a masters research project lead to the exploration of combinations of the different parametric transformations for presentation to the neural networks for training and testing. A detailed study of the size and amount of overlap needed in the windowing of the seismic waveforms is presented in the masters project paper attached to this report.

4 Travel

Part of the EPSCoR students funding was utilized for travel. The following travel was conducted by the EPSCoR student

- 1. South East Symposium on System Theory, University of Alabama, March 8-9, 1993, Alabama. The EPSCoR student attended multiple sessions at the conference and a student paper was presented.
- 2. Artificial Neural Networks in Engineering, St. Louis, Missouri, November 11, 1993., The EPSCoR student attended an eight hour tutorial session on neural networks as well as attending three days of paper presentations.
- 3. Research trip to the Center for Seismic Studies, Arlington, VA. This trip introduced the EPSCoR student to some of the members of the Centers staff as well as providing an opportunity to ask several questions to the Centers staff pertaining to the seismic database.
- 4. West Virginia University Symposium on Mining, July 11, 1994. The EPSCoR student will present a paper on research findings at this conference.

5 Summary

The EPSCoR funded position provided a rich environment for the student involved above and beyond that of the normal graduate student at West Virginia Tech—The direct interaction with research faculty, provision of office space, computer equipment, neural network development tools, and travel money allowed the student to fully develop the skills and knowledge needed to conduct research. The additional resources of the parent research project made available an extensive research database and additional computer facilities at the Center for Seismic Studies—While the research project was not a thesis in the traditional sense, many of the elements of the project paper re-enforced the skills necessary to conduct applied research and report the results.

Seismic Event Classification using Neural Networks with ARMA Coefficient Modeling

A Masters Project

Presented to
The Faculty of the Graduate Program
West Virginia Institute of Technology

by

John R. Martin

In Partial Fulfillment
of the Requirements for the Degree
MASTER OF SCIENCE
Control Systems Engineering

April 26, 1994

AN ABSTRACT OF A MASTERS PROJECT

SEISMIC EVENT CLASSIFICATION USING NEURAL NETWORKS WITH ARMA COEFFICIENT MODELING

John R Martin

Master of Science in Control Systems Engineering

An artificial neural network is incorporated as part of a software simulation system for the purpose of classifying seismic events from waveform data. Neural network techniques augment traditional methods of seismic event classification to enhance classification flexibility and accuracy. Unprocessed seismograms are not well suited for presentation to neural networks because of the large number of data points required to represent a seismic event in the time domain. Parametric representation of the seismic waveform numerically extracts those features of the waveform that enable accurate event classification.

Coefficients of an Auto-Regressive Moving Average (ARMA) model are extracted to form a parametric representation of a seismic event. This parametric representation provides adequate information for accurate event classification, while significantly reducing the minimum size of the neural network. The data set is comprised of 75 wave forms, five signal classes, with 2400 samples per seismic trace. Each waveform in this database is parametrically represented by the windowed ARMA feature extraction stated above. These features are presented to the neural network for classification.

TABLE OF CONTENTS

1.0	INT	RODUCTION	. 10			
	1.1	Project Description	11			
	1.2	Scope of Activities	12			
	1.3	Report Overview	13			
2.0	SEIS	SMIC DATABASE				
	2.1	Database at CSS				
	2.2	Applications at CSS				
	2.3	Research Database	19			
3.0	SEIS	SMIC BACKGROUND	. 20			
	3.1	Seismic Event Classifications	. 20			
	3.2	Analysis of a Regional Seismic Event	. 23			
	3.3	Qualitative Assertions and Heuristics	28			
4.0	ARM	MA COEFFICIENT MODELING	31			
	4.1	ARMA Model Derivation	32			
	4.2	ARMA Coefficient Extraction	34			
5.0	NEU	NEURAL NETWORK CLASSIFICATION				
	5.1	Neural Network Model	38			
	5.2	Back-propagation Neural Networks				
	5.3	Supervised Kohonen Neural Networks	45			
	5.4	Software Implementation				
5.0	TES	T ANALYSIS AND SUMMARY	53			
	6.1	Test Results	54			
	6.2	Training Times	56			
	6.3	Summary				
REF	EREN	CES	58			
APP	ENDI	X A Data Base Wave Form Files from CSS	61			
APP I	ENDI	X B GSETT-Subset I Station Names & Location	64			
APPI	ENDI	X C ARMA Coefficient Extraction Routine	65			
APPI	ENDI	X D Neural Network Data	70			

LIST OF FIGURAS

1	Time Series Plot of FEBME16.W	10
2	CSS Database	. 16
3	Marine Explosion FEBME1 W from GSETT Database	22
4	Regional Seismogram of FEBR9.W	26
5	Frequency Response of Grafenberg Array Channel bz	27
6	Windowed Frequency Response of FEBME16.W	37
7	Frequency Response of the ARMA Model of FEBME16 W	37
8	Perceptron Model	39
9	Neuron Model	39
10	Sigmoidal Activation Function	40
11	Basic Neural Network Model	41
12	Kohonan Neural Network Architecture	46
13	2-Space Vector Mapping Example	50

LIST OF TABLES

1	Types of Seismic Events
2	Seismic Analysis of Regional Event FEBR9.W 25
3	Station Information
4	Qualitative Assertions
5	Seismic Heuristics
6	Test Data for Determining Window Size and Filter Order 36
7	Network Classification Results (%)
8	Average Network Training Times (sec / epoch)

1.0 INTRODUCTION

In recent years, detection and classification of seismic events have been studied extensively and require nighly trained seismologists to accurately interpret seismic traces.

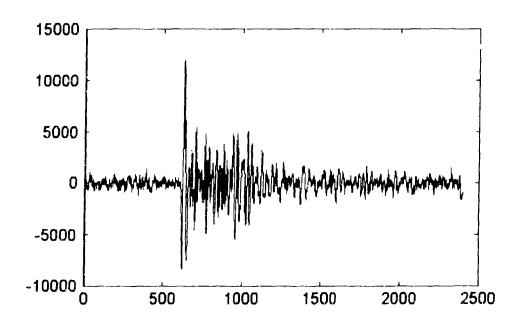


Figure 1 Time Series Plot of FEBME16.W

Figure 1 presents the seismic trace of a typical marine explosion. There are two methods which a seismologist might use to classify a seismic event. The easiest event classification occurs when information such as location and time are known prior to the event occurrence. Seismologists are then prepared to monitor the event and may easily verify the event type and location. The second method does not provide the seismologist with information prior to the event occurrence. Without this a-priori knowledge, the seismologists job becomes significantly difficult.

Upon initial examination of a seismic trace, a seismologist would begin the classification procedure by identifying features of the seismic event. Typical features of interest are the arrival and amplitude of primary surface waves, secondary waves, and long waves. After the initial phase identification, a classification is tentatively associated with the waveform. The seismologist would attempt to confirm the trace origin and type with someone at the event location or through published schedules of such events. To improve the probability of a correct classification, this procedure is usually verified by other seismologists.

Signal classification of this type is time consuming and is prone to error in interpreting the signal phases and arrival times. To a great extent, this type of signal classification is subjective at best. The purpose of this project is to determine the usefulness of a neural network in seismic event discrimination.

1.1 Project Description

Seismologists use heuristics and intuition in classifying seismic traces. The heuristics are based upon various features of the signal. Extraction of these various features, as performed by the seismologist, can introduce significant error in signal discrimination.

Feature extraction and classification error can be reduced by implementing these functions in an expert system. Heuristics, or rules of thumb, suggest parametric transformations that could potentially prove useful in developing a neural network based system. Since each signal in the seismic trace database consists of 2400 points, an excessive amount of data for a neural network, some method of data reduction must be

Regressive Moving Average (ARMA) filter coefficients. This method will be used to determine if the frequency content of the event and how it changes over the event life provide any useful information in discrimination of seismic events. Classification of seismic signals will be evaluated using supervised Kohonen and Back-propagation neural networks.

1.2 Scope of Activities

Determination of neural network usefulness in classifying seismic traces will require collecting known data for training and testing, development of ARMA coefficient calculation, research on back-propagation and Kohonen neural networks, and performance evaluation of the algorithms. Specifically, the project scope involves:

- Data collection
- ARMA coefficient development
- Signal preprocessing
- Back-propagation research and development
- Supervised Kohonen research and development
- Neural network training and classification
- Examination of results.

1.3 Report Overview

A brief description of the problems in seismic event classification has been provided along with an approximate research plan. The remainder of the paper discusses those topics in detail

Chapter 2 describes the data base used for testing as discussed throughout this paper. The various tables listed in Appendix A with seismic wave form names, stations and Julian dates are sufficient references such that anyone accessing the on-line data base at the Center for Seismic Studies can retrieve the related seismic wave forms. Appendix B provides seismic monitoring station information.

Chapter 3 offers background information on seismology. The broad classification of seismic events as used by seismologists is presented along with plots of sample wave forms. Qualitative assertions and heuristics that are commonly used for seismic event classification are discussed.

Seismic parametric conversions are covered in Chapter 4. Parametric data is derived from the sampled wave form and is independent of the identification of various seismic phases associated with most classification schemes. The parametric data is derived from ARMA coefficients. Appendix C contains the Matlab script file for the ARMA coefficient extraction.

Chapter 5 describes the neural networks utilized in the training and testing of the seismic parametric data. Basic neuron models, activation functions, neural network structure, network training methods, and differences between back-propagation and Kohonen neural networks are discussed at the introductory level

Test results, network training times and performance, and remarks are covered in Chapter 6 Detailed test results are included in Appendix D

2.0 SEISMIC DATABASE

The Center for Seismic Studies (CSS) is an agency funded by the Advanced Research Projects Agency (ARPA) with the principle objective of providing the research community easy access to seismic data. Since 1982, CSS has been improving the teleseismic database procedures and programs of the Lawrence Berkeley Laboratory and the Discrimination Group at Lincoln Laboratories. A more progressive database was needed to meet the standards of the seismic research community and an interactive method needed to access the database. In 1987, the version 2.8 database was released adhering to the Intelligent Array System (IAS), a type of seismic data collection standard. The version 2.8 database also embedded Ansi Standard Query Language (SQL) to interactively access the seismic database. In 1989, CSS modified the version 2.8 database to handle regional as well as teleseismic events. The modified database, Version 3.0, also has a simple database structure that was less complicated for the interactive use and lessened maintenance.

2.1 Databases at the Center for Seismic Studies

The Seismic Operations LAN (SOL) is the primary host for interactive analysis from the seismic research community. SOL is automated to collect and process external seismic information from various international seismic stations. Using the processing power of a SUN workstation, SOL is the heart of the interactions of CSS to the seismic community. The Central Data Repository (CDR), the seismic data archives of CSS, is the storage facility for SOL. The CDR consists of a 600 Gigabyte Tape drive system dedicated to waveform storage, a 6 Gigabyte database management system, and a 400

Gigabyte Optical Jukebox to store satellite imagery, map graphics, and waveform segments. Figure 2 displays the current configuration at CSS.

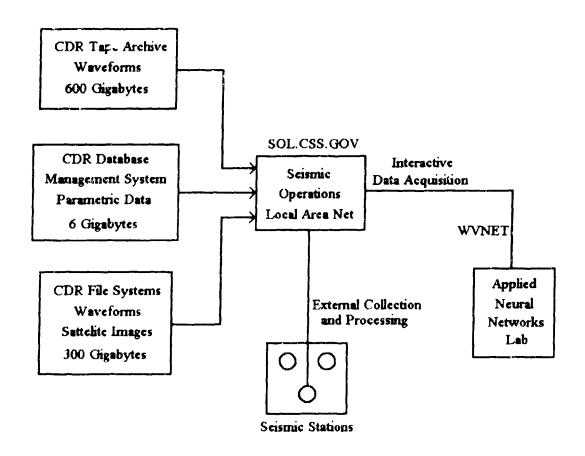


Figure 2 CSS Database

Although the Center has many databases consisting of seismic data that has been collected worldwide, the three major databases are the GSETT, the IMS, and the EXPLOSION. These three databases represent 75% of the entire parametric and waveform data stored at the Center.

The GSETT database was the work of the Ad Hoc Group of Scientific Experts to Consider International Co-Operative Measures to Detect and Identify Seismic Events, called GSE [6]. GSE was formed in 1976 by an international group of scientists during the Conference on Disarmament for the sole purpose of exchanging data useful for monitoring a limited or comprehensive nuclear test-ban treaty. Using approximately 50 international seismic stations, GSE conducted the first international exchange of seismic data in 1986 during the GSETT-1 test. Due to the complexity and size of the exchange of parametric and waveform data, the test was only a limited success [6]. Waveform data were to be available on request, but never exchanged routinely. But with the increasing technology and the availability of larger computer networks, the second international full-scale test was conducted from the 22nd of April 1991 to the 2nd of June 1991. During these 42 days, over 3,700 seismic events were classified and 85,000 waveform segments were collected and stored into 1.2 Gigabytes of information. Although, the second international test had some small procedural problems, the test was a seismological success [6].

The Intelligent Monitoring System (IMS) is a ARPA-sponsored computer system for automated processing and interpretation of seismic data recorded by arrays and single stations. It was integrated into CSS computer systems, and has been operational since 1990. The IMS data has been cataloged in the IMS database at CSS, which contains seismic traces from the two largest seismic stations in Norway, ARCESS and NORESS ARRAYS.

The EXPLOSION database consists of all unclassified seismic data on nuclear testing. Another database currently being investigated is the GROUND TRUTH database, created by Lori Grant at CSS [12]. This database is currently being compiled from both the IMS and GSETT databases. The GROUND TRUTH database consists of a hand picked group of seismic events that were verified through means of seismic bulletins, mining records, and personal contact. Although the database has been released to the

public, the number and type of events are not sufficient for training and testing a neural network as investigated in this research. The database presently consists of 62 waveforms with sample rates and durations that vary. A fixed sample rate and duration was needed for the development of ARMA models.

2.2 Applications at the Center for Seismic Studies

The heart of database management at CSS is the SQL/ORACLE database host. This gives users an interactive method of accessing data. Since SQL querying can be quite taxing, CSS has created some tools making the collection and examination of data easier. To make the seismic tools accessible from many different operational platforms, CSS programmed the tools to be used as Xwindows applications.

CENTERVIEW was the first programmed tool from CSS [2]. Using this tool, one can directly access the database without using the burdensome SQL queries, and still have the power to select the data on a variety of constraints. With this program, one can compile data for downloading, review parametric data, and transfer data to the other seismic tools. The next tool was MAP. This tool displayed the location of the seismic events [epicenters] and the location of the seismic stations that recorded each event. These locations can be displayed on a variety of geographic maps stored at CSS by using the MAP program. The last tool created was GEOTOOL. This tool gives researchers the ability to view the waveform in a time series plot, seismogram. It also has some signal processing capabilities such as FFT's, filtering, spectrogram, and others.

2.3 Research Database

The research database, *SUBSET!*, is a subset of the GSETT and IMS databases. *SUBSET!* contains 75 seismic traces composed of 5 event types with 15 waveforms each. The event types selected included both man-made and natural events as follows;

- marine explosions
- quarry blasts
- local
- regional and
- teleseismic.

The waveforms were recorded in the Euro-Asian area with a fixed wavelength of 2400 samples and a sample rate of 20 Hertz. Each event classification was verified through the *REMARKS* database table [1].

3.0 SEISMIC BACKGROUND

The various aspects of seismology include observational seismology, instrumental seismology, theoretical seismology, and data analysis of seismic events. The primary focus of applying neural networks to seismology was the analysis and subsequent classification of seismic data. Some introductory terminology as applied to seismic data analysis will be reviewed.

3.1 Seismic Event Classifications

The types of seismic events can be roughly divided into two categories: natural and man made. Natural seismic events include tectonic plate movement, volcanic activity, collapse earthquakes, and oceanic microseisms. Man made seismic events can be the result of a controlled event or that of an induced event. Controlled events are typically explosions and cultural noises while induced events will result from reservoir impounding, mining, quarry and fluid injection. Table 1 lists the broad categories of natural and man made seismic events.

Seismogram interpretation is dependent on the location of the recording station and the type of structural model utilized for wave propagation in the geological region of the recording station. The structural models and propagation paths have lead seismologists to three different categories of seismic events, without regard to the source of seismic activity. These categories are based on distance between the source epicenter and the recording station. It is common practice to use a spherical model of the earth and express the distance from seismic event focus to the recording station as the angle.

subtended at the center of the earth between the focus and the station (10 = 111 km). The categories thus established are:

Local events < 100

Regional events 100 to 200

Teleseimic > 20°

Table 1 Types of Seismic Events

Natural events:

tectonic volcanic

collapse earthquakes ocean microseisms

Man Made - Controlled

explosions

cultural noises

Man Made - Induced

reservoir impounding

mining

quarry

fluid injection

Raw seismograms are relatively lengthy. Typical sampling rates vary between 20 Hz to 40 Hz with high frequency instruments operating at sampling rates up to 1 KHz. The duration of seismic events range from a few minutes for discrete events to day for seismic swarms. Seismograms used in this research all result from discrete events sampled at 20 Hz, with a total of 2400 data points per sampled waveform. Waveforms were taken from the GSETT database at the Center for Seismic Studies—Figure 1, shown below, illustrates a typical marine explosion—The start of the seismic event occurs at

sample number 600. This starting alignment represents a 30 second pre-event leader and is common for all seismic traces used in the GSETT database.

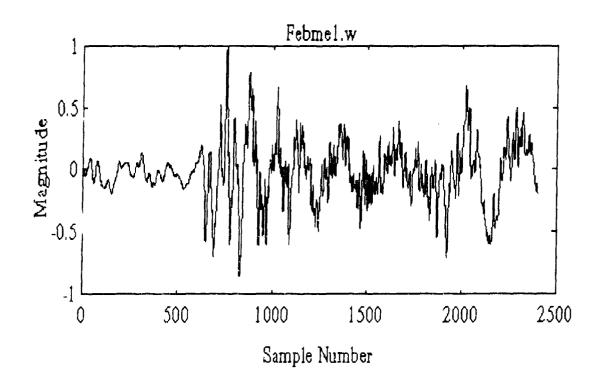


Figure 3 Marine Explosion Febme 1 w from GSETT Database

In analyzing waveforms such as the one presented in Figure 3, seismologists will identify different phases of the seismogram based on the time of arrival and the mode of propagation through the earth.

There are two basic types of seismic waves, body waves and surface waves [21]. Body waves are radiated by the seismic source and propagate in all directions while surface waves are concentrated along the surface. Body waves can be further subdivided into compressional (longitudinal) and shear (transversal) waves. Compressional waves are

often called primary waves or P waves and transversal waves are called secondary or S waves. P waves tend to travel at a rate 1.7 times that of S waves and are normally the first portion of the seismic waves to be present in a seismogram.

The P waves are always the first waves to arrive [21, 34]. The P waves are surface waves that cause the rock particles to oscillate back and forth in the direction of propagation and can be compared to the propagation of sound waves. S waves cause rock motion perpendicular to the motion of P waves and represent a shear wave. Motion of S v/aves through the liquid parts of the earth's interior is not possible since liquids do not sustain shear forces. Two additional waves often associated with a seismic event are the LQ and LR surface waves. The L stands for long, Q represents Love waves and R is Rayleigh waves [21]. These two waves are often dominate in terms of relative amplitude. Love and Rayleigh waves exhibit velocity dispersion which can be observed as frequency variant whereas P and S waves tend to be velocity invariant.

The P, S, LQ, and LR, portion of the seismic trace are referred to as phases. These phases are further subdivided to give indication of propagation path. A Pn or Sn phase indicates a path that is in the upper crust, and is confined to the granitic layer. Reflection of phases are possible off other layers in the earth. A phase reflected off the Moho layer is referred to as a PmP or SmP phase [21]. Many other combinations are used as dictated by the seismic event being evaluated.

3.2 Analysis of a Regional Seismic Event

A regional seismic event from the GSETT data base is now presented to illustrate the type of parametric information determined by a seismic analyst. Data base notation as

assigned by the Center for Seismic Studies is utilized in the seismic event description that follows. The regional event considered is illustrated in Figure 4. The event is assigned an origin identification within the GSETT data base of ORID = 36907. This event occurred on April 28th, 1991 [Julian date of JDATE = 1991117], and was determined to be a regional event. A summary of the seismogram analysis is given in Table 2.

The STASSID label represents a station association identification number assigned as part of the data base record. The wave train of a single event may be made up of a number of arrivals and the STASSID allows arrivals believed to have come from a common event to be joined together in the data base.

The signal amplitude is denoted AMP and represents a zero to peak amplitude of the earth's displacement in units of nanometers. The duration of a particular phase is designated PER and is in units of seconds.

Figure 4 is a regional event with three recorded phases. The magnitude scale was normalized to +/- 1 with actual displacement magnitudes indicated in Table 2. The first arrival wave is the Pn wave that traveled through the earth's crust from the epicenter to the recording station. A secondary surface wave, Pg, arrived from a deeper propagation path followed by a large magnitude LQ or Long-Love wave. The first 618 sample points (approximately 30 seconds) before the arrival of the Pn wave is a period of no seismic activity. This represents normal background noise and will tend to drift in magnitude throughout the course of the day due to cultural noises.

The recording station for this particular waveform was located in Boyern, Germany It was recorded with a single vertical channel that measures earth displacement.

Table 3 gives the station location and instrument calibration factors. The frequency

response of the instrument is plotted in Figure 5. The 3 dB bandwidth is 3 Hz. A usable bandwidth of about 10 Hz can be created with appropriate inverse filtering of the seismic waveform.

TABLE 2 Seismic Analysis of Regional Event FEBR9.W

ORID	36907
Date	April 28, 1991
Julian Date	1991117
Event Time	672777893.300 seconds from January 1, 1970.
Classification	Regional event
Recording Station	Grafenberg Array, Boyern, Germany (GRA1)
Date Julian Date Event Time Classification	April 28, 1991 1991117 672777893.300 seconds from January 1, 1970. Regional event

Event Location

Latitude	46.22°
Longitude	15.44°
Depth	8 Kilometers

Phase Information

3 phases recorded at GRA1 Surface Wave Magnitude measured at 2 nanometers Body wave Magnitude measured at 3.50 nanometers

Phase Summary

Phase	Start	Start	ARID	STASSID	AMP	PER	
	Time	Sample number					
Pn	672777957.3	619	492530	368441	41.2	0.65	
Pg	672777971.3	886	492531	368442	323.6	0.082	
Lg	672778033.8	2136	492532	368443	468.0	0.71	

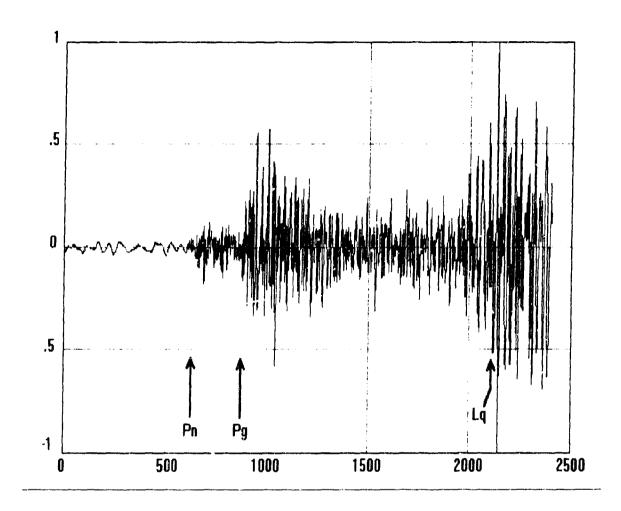


Figure 4 Regional Seismogram of FEBR9.W

Table 3 Station Information

GRA1 - Grafenberg Array -- Boyern, Germany

Single Station

Channel Type:

bz

Channel Id:

51671

Location

Latitude

49.692°

Longitude

11.222°

Depth

0.5 Kilometers From Mean Sea Level

Noise Measurements - Correction Factor

Mean Noise -

6.5 nM

Stand Dev

-0.2 nM 1.5

Signal to Noise Threshold

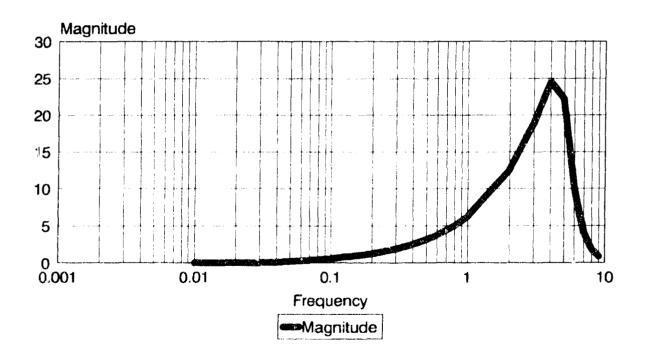


Figure 5 Frequency Response of Grafenberg Array Channel bz

3.3 Qualitative Assertions and Heuristics

When evaluating a given seismic event, the seismologist must base his reasoning on a physical model of the earth with respect to the recording station location and the suspected seismic epicenter. Qualitative assertions, based largely on the identification of seismic phases, must be made concerning the propagation in a global scale. Table 4 lists several such qualitative assertions.

Table 4 Qualitative Assertions

- 1. The dominant frequency of the seismic signal is inversely proportional to the distance of the event.
- 2. The Pg wave is the first arriving wave for local events, Pn for regional events P or PKP for teleseismic events.
- 3. The longer the duration, the greater the magnitude.
- 4. Presence of a strong S-wave is a distinctive feature of natural events such as earthquakes.
- 5. The absence of S-waves or weakness with respect to P waves indicate an explosive or artificial seismic source.
- 6. Similar waveforms are present in seismograms that originate in the same seismological area.

These assertions may be supplemented by seismologist developed heuristics as listed in Table 5. Many of the heuristics can be utilized as linguistic descriptors in the development of a neural network seismic event discriminator.

Table 5 Seismic Heuristics

- 1. If the duration of a signal is less than one second, it is most likely noise.
- 2. If two different signals have dominant signals whose ratio is above 10, then they probably belong to two different events.
- 3. If the dominant frequency of the first arrival is above 7 Hz, then the seismogram belongs to a local event.
- 4. If the dominant frequency of the first arrival is between 2-7 Hz, then it belongs to a regional event.
- 5. If the dominant frequency of the first arrival is below 2 Hz then it belongs to a teleseismic event.
- 6. The beginning of a seismic event can be detected using Dixon's test [10].
- 7. Cultural noise will have dominant frequencies above 1 Hz.
- 8. Microseismic events will exhibit low frequency broad band noise from less than 0.01 to 0.5 Hz with periods of 2 to 100 seconds.
- 9. P wave is normally recorded first.
- 10. P is normally followed by S, LQ, and LR.
- 11. P waves have linear polarization.
- 12. LR will have elliptical polarization.
- 13. Earthquakes produce approximately equal amounts of P and S waves.
- 14. Explosions produce more P waves than natural events.
- 15. Earthquakes give anaseismic and kataseismic first onsets.
- 16. Explosions give anaseismic first onsets everywhere.
- 17 Earthquakes have relatively deep foci.
- 18. Explosions have shallow foci.
- Wave train durations are shorter for explosions than for earthquakes

Most of the qualitative assertions and heuristics are based on the various phases of a waveform as identified by a seismologist. The listed assertions and heuristics offer several clues which aid in the development of neural network parametric conversions.

The heuristics dealing with dominate frequency raised questions as to the usefulness of the remaining frequency information. One method of obtaining additional frequency information is through generation of the ARMA filter coefficients which will be discussed in Chapter 4.

4.0 ARMA COEFFICIENT MODELING

Several of the heuristics stated in Chapter 3 deal with the dominant frequency of the first arrival wave of a seismic signal. These heuristics offer information on local, regional, and teleseismic events only; no information is provided for man-made events such as marine explosions or quarry blasts.

Since the given heuristics are limited to natural events, additional information must be provided for further discrimination of man-made events. One method of creating this information is in generating the power spectrum for each seismic event. The power spectrum may be obtained by processing the time series data through a FFT. However, the resulting frequency data is as large as the original time data. As the original time series contains 2400 points, the data size must be reduced since a 2400 point vector is excessively large for neural network training and classification.

The power spectrum information may be retained while significantly reducing the volume of data through calculation and use of the ARMA filter coefficients. The ARMA filter is designed from the time series data and can approximate the original frequency response with a filter of proper order.

As the ARMA model significantly reduces the amount of data, it was decided to include information pertaining to the frequency variation over time which is accomplished by windowing the time series data. The process of windowing divides the data into a specified number of consecutive segments. Each segment or time slice is usually of equal size or duration.

4.1 ARMA Model Derivation

The time domain design problem can be stated as follows:

Given a sequence g(n), n = 0, 1, ..., K, design a digital system of prescribed degree such that its impulse response h(n) approximates g(n) as well as possible.

This problem arises as an unusual design task. In many cases, g(n) is the sampled output of a continuous system. When this occurs, the unknown system is to be modeled by a rational transfer function. The modeling of the system is very important. The modeling procedure described here was named for Prony who developed it in 1795 for problems in gas and hydro mechanics [23].

Let the transfer function H(z) be designed to be

$$H(z) = \frac{\sum_{k=0}^{p} b_{k} \cdot z^{-k}}{1 + \sum_{k=1}^{p} a_{k} \cdot z^{-k}} = \sum_{n=0}^{\infty} h(n) \cdot z^{-n}$$

$$(4.1)$$

where p is an element of the set of natural numbers. Here, the order of the numerator and denominator are assumed to be equal. First, the number of given values g(n) is chosen to be equal to the number of coefficients to be determined. At least one recursive system always exists, the impulse response of which satisfies exactly the condition

$$h(n) = g(n), \quad n = 0, 1, ..., K$$
 (4.2)

Multiplying Eq. (4.1) by the denominator, substituting for Eq. (4.2), and comparing the terms of equal order, you get the matrix equations shown below.

$$\begin{bmatrix} b_0 \\ b_1 \\ \vdots \\ b_{(p-1)} \\ b_p \\ -\frac{1}{0} \\ \vdots \\ 0 \end{bmatrix} = \begin{bmatrix} g(0) & 0 & \cdots & 0 \\ g(1) & g(0) & & \vdots \\ g(p-1) & g(1) & g(0) & 0 \\ g(p) & \cdots & g(2) & g(1) & g(0) \\ \hline g(p+1) & \cdots & \vdots & \vdots \\ g(2p) & \cdots & g(p+1) & g(p) \end{bmatrix} \star \begin{bmatrix} 1 \\ a_1 \\ \vdots \\ a_{(p-1)} \\ \vdots \\ a_p \end{bmatrix}$$

$$\vdots \\ a_{(p-1)} \\ \vdots \\ a_{(p-1)} \\ \vdots \\ g(2p) & \cdots & g(p+1) & g(p) \end{bmatrix}$$

$$(4.3)$$

The indicated partition in Eq. (4.3) leads to the pair of matrix equations

$$\mathbf{b} = \mathbf{G}_1 \mathbf{a} \tag{4.4a}$$

$$\mathbf{0} = \mathbf{G}_2 \mathbf{a} \tag{4.4b}$$

where G_1 is a $(p+1) \times (p+1)$ lower triangular toeplitz matrix, and

$$G_2 = [g_1, g_2, ..., g_{n+1}]$$
 (4.4c)

is a p x (p+1) rectangular matrix. Equation (4.4a) yields the vector **b** of the numerator coefficients for any denominator such that the impulse response has the desired values for n = 0, 1, ..., p.

To calculate the denominator, we write Eq. (4.4b) as

$$0 = g_1 + [g_2, ..., g_{p+1}] * a'$$

= $g_1 + G_3 * a'$

where $\mathbf{a}' = [\mathbf{a}_1, \mathbf{a}_2, ..., \mathbf{a}_p]^T$ is the vector of the unknown coefficients.

If G3 has rank p, we obtain

$$\mathbf{a}^{i} = -\mathbf{G}_{3}^{-i} * \mathbf{g}_{1} . \tag{4.5}$$

Together with **b** from Eq. (4.4a) we then have the coefficients of H(z).

4.2 ARMA Coefficient Extraction

Once the method for creating the ARMA coefficients has been determined, the next step is to implement the feature extraction. The Prony method as described above handles ARMA modeling through matrix manipulation. At this point, the MatlabTM software package was chosen for feature extraction. Matlab is a software package which was written for the processing of mathematical functions especially in its handling of matrices. The Matlab script file used to extract the ARMA coefficients is included in Appendix C. Direct implementation of the Prony method can be accomplished using the prony command [25]. The command format is

$$[b,a] = prony(h,nb,na)$$

where b = numerator coefficients in descending powers of z

a = denominator coefficients in descending powers of z

h = desired impulse response

nb = numerator order

na = denominator order.

After calculating the filter coefficients, the results are stored with the exception of the constant 1 of the denominator. This constant 1, the a_0 term, was left out of the training data since it would be the same for each signal and provided no significant information to the neural networks for training or classification.

The next step in creating a reduced parametric data set is in determining the number of windows and the filter order required to optimize neural network training and classification. By varying both the number of windows and filter order between 8 and 24, a series of 25 data sets were obtained. Each data set was divided into a 45/30 split, 45 signals for training and 30 signals for classification, then placed into a back-propagation neural network for training and classification. Network training was limited to 1000 epochs before event classification.

Table 6 contains the window size and filter order testing. The data of highest importance is the classification percentage. From Table 6, it can be determined that using 16 windows and a fourth order ARMA model will provide the best training and discrimination results. This modeling will reduce the size of each signal from 2400 points to 144 points.

Table 6 Test Data for Determining Window Size and Filter Order

Filter Order

Number of Windows

	2	3	4	5	6
8	57 / 10	80 / 6.7	80 / 10	80 / 15	83 / 16
12	78 / 20	87 / 23	84 / 30	86 / 26	86 / 23
16	96 / 13	93 / 22	93 / 35	94 / 30	90 / 26
20	90 / 12	94 / 18	92 / 20	93 / 22	93 / 22
24	94 / 10	95 / 12	95 / 13	94 / 15	95 / 10

Note: Table format is a / b where a is the training % and b is the classification %

A comparison of the frequency plots of the time series and ARMA model demonstrates the information contained in the reduced parametric data. Figure 6 gives the time series frequency plots for Febme 16.W over the chosen four windows. The resulting ARMA filter frequency response plots are contained in Figure 7. A comparison of the respective windows shows the ARMA model to contain the same frequency information as the time series. The resulting ARMA plots are significantly smoother than the time series plots. This is due to the time series plots being created from the actual frequency information contained in the signal while the ARMA plots show the true frequency response curve. The plots shown in Figure 6 and Figure 7 are normalized to a magnitude of one (1) to eliminate any amplitude information. Elimination of amplitude information can be justified as the original project intention was to determine the usefulness of frequency information other than the frequency heuristic of the first arrival wave which was described in Chapter 3.

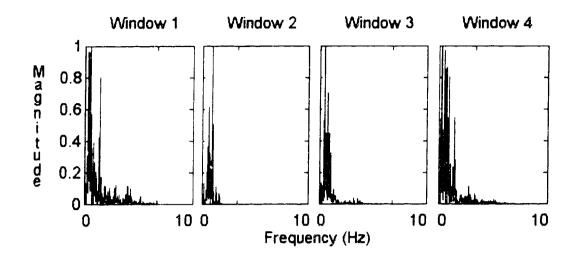


Figure 6 Windowed Frequency Response of Febme 16.W

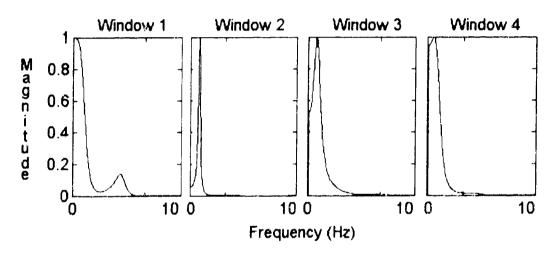


Figure 7 Frequency Response of the ARMA Model of FEBME16.W

5.0 NEURAL NETWORK IMPLEMENTATION

Currently, there are several types of neural network algorithms available for use. These networks are developed based upon various learning methods or processes including synaptic learning, linear associator, adaptive resonance, autoassociation, and feature detection. A few of the more popular neural network types are back-propagation, ART, Hopfield, neocognitron, Kohonen, and ADALINE.

For this research, two neural networks were chosen, back-propagation and supervised Kohonen. These networks were used due to their ease in implementation, learning processes, and for their differences in classification procedures.

Prior to discussing the usage and results of the networks, a description of the basic neural network model is presented.

5.1 Neural Network Model

Pattern recognition techniques have been used since the early 1950's when the field of neural networks was introduced [22]. One early type of neural network was the perceptron [37]. Simply stated, a perceptron is a node which takes a set of inputs, multiplies them by a weighted value, then sums the terms. The result is a single weighted value related to the input terms which can be expressed mathematically as

$$NET = i_1 W_1 + i_2 W_2 + ... + i_n W_n$$
 (5.1.1)

A diagram of a perceptron is shown in Figure 8

One problem with a perceptron is that the output is unbounded. This can cause overflow conditions in digital systems and saturation in analog systems. In creating a bounded perceptron output, the neuron was developed. A neuron provides the basic building block of a neural network [37] (see Figure 9).

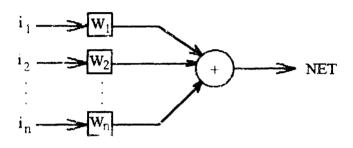


Figure 8 Perceptron Model

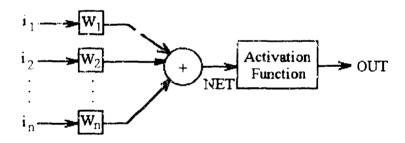


Figure 9 Neuron Model

The neuron takes the perceptron output, processes it through an activation function and produces a bounded output value as shown

$$OUT = F (NET) . (5.1.2)$$

Several types of activation, or logistic, functions exist; one of the most common being the sigmoidal activation function. The sigmoid function is given by:

$$OUT = F(NET) = \frac{1}{1 + e^{-NET}}$$
(5.1.3)

and the first derivative becomes

$$F'(NET) = \frac{\delta OUT}{\delta NET} = OUT \cdot (1 - OUT)$$
(5.1.4)

A plot of the activation function output is shown in Figure 10. The sigmoid is desirable since it is continuous and has a simple derivative which is also continuous.

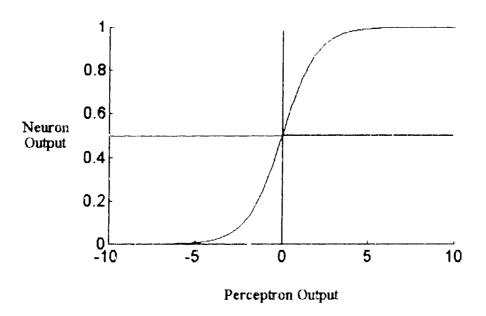


Figure 10 Sigmoidal Activation Function

The logistic function compresses the perceptron output range such that the output lies between 0 and 1. It also introduces a nonlinearity which allows for better prediction or classification in multi-layer networks [37]. The sigmoidal function provides an automatic gain control thereby eliminating network saturation. It should be noted that any non-linear function may be used providing that it is differentiable over the entire range [37].

Figure 11 illustrates a typical neural network consisting of an input layer, hidden layers, and an output layer. Each network layer may contain a different number of neurons. The input layer neurons receive data from the outside world without making any modifications. The hidden layer neurons provide intermediate calculations for internal feature maps. Hidden neurons are named as such because their inputs and outputs cannot be seen. The output layer neurons display the network results which contain the prediction or classification information. Interpretation of the output neurons depends upon the initial definition of the network.

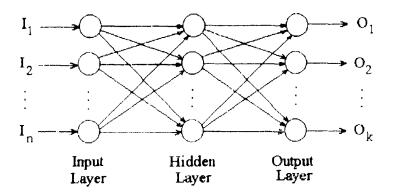


Figure 11 Basic Neural Network Model

After creating a base neural network, the next step is to decide how the network is to operate and implement a training algorithm. Network operation and training is different

for back-propagation and supervised Kohonen networks. These networks and their training is described below.

5.2 Back-Propagation Neural Networks

The back-propagation neural network gets its name from the training method. Back-propagation training is accomplished in two stages, a forward pass and a reverse pass. In the first stage, or forward pass, an input vector is applied to the network and an output vector created. The second stage, or reverse pass, calculates an error vector and propagates backwards through the network to adjust the intermediate weight vectors so as to minimize the error. Initially, the network weights are set to small random numbers to prevent the network from saturating with large numbers. The basic training steps are as follows:

Forward Pass

- 1. Select input information
- 2. Calculated output of network k

Reverse Pass

- 3. Calculate the error between the network and target
- 4. Adjust weights to minimize the error
- 5. Repeat steps 1-4 until error is acceptable.

Once training is complete, the network can be used for recognition or prediction, depending upon the type of training data.

In a forward pass, the output of each layer is the input to the next layer. This can be mathematically described as

$$O = F(XW) \tag{5.2.1}$$

where X = input vector

O = output vector for given layer

W = Matrix of weights between neurons

F() = activation function as described in Eq. (5.1.3).

The final output vector is calculated by stepping between the individual layers.

The output from the input layer is

$$O_i = X. (5.2.2)$$

The hidden layer output vector is

$$O_h = F(O_iW_i) \tag{5.2.3}$$

and the final output vector, Y, becomes

$$Y = F(O_hW_h) = F[F(O_iW_i)W_h]$$
 (5.2.4)

Now that an output vector has been calculated, the task of adjusting the weights begins. Back-propagation uses a modified version of the Delta rule to adjust the weights as follows:

$$\delta = O_j(1 \cdot O_j)(TARGET - O_j)$$
 (5.2.5)

This δ is then multiplied by the source neuron for the weight being calculated. This product is in turn multiplied by the learning rate coefficient η (typically 0.01 to 1.0) and this result is now added to the weight. This process in mathematical matrix form is as follows:

$$\Delta W_{pq,k} = \eta * \delta_{q,k} * O_{p,j} \tag{5.2.6}$$

$$W_{pq,k}(N+1) = W_{pq,k}(N) + \Delta W_{pq,k}$$
 (5.2.7)

where $W_{pq,k}(n)$ = value of weight from neuron p in the hidden layer to neuron q in the output layer at step N (before adjustment). k indicates that the weight is associated with its destination layer.

 $W_{pq,k}(N+1) = \text{value of weight } @ \text{ step } N+1 \text{ (after adjustment)}$

 $\delta_{q,k}$ = the value of δ for neuron q in output layer k

 $O_{p,j}$ = the value of OUT for neuron p in hidden layer j

Note: p & q refer to a specific neuron; j & k refer to a specific layer.

Back-propagation trains the hidden layers by propagating the output error back through the network layer by layer. The equations previously discussed are still valid, but they must be modified due to a lack of a TARGET vector. This modification is accomplished by first calculating the δ for the output layer, which is used to calculate δ for all the previous layers by propagating it back through all the weights. This is represented mathematically as:

$$\delta_{p,j} = O_{p,j}(1 - O_{p,j})(\Sigma \delta_{q,k} * W_{pq,k})$$
 (5.2.8)

where

$$\sum \delta_{q,k} * W_{pq,k}$$
 (5.2.9)

is the sum of the weighted errors. Using this we can now adjust the weights using the previously discussed equations. Using vector notation:

$$D_{j} = D_{k}W_{k}^{t} \# [O_{j} \# (I - O_{j})]$$
 (5.2.10)

where $D_k = \text{set of } \delta$ at output layer

 W_k = set of weights for output layer

 $D_i = \delta$ vector for hidden layer

= a component by component multiplication of the two vectors.

 O_i = the output layer for layer j and

I = matrix where all components are 1.

5.3 Supervised Kohonen Neural Network

In the early 1970's, Tuevo Kohonen published a paper proposing a model for an associative memory, the linear associator [22]. The linear associator uses neurons with linear transfer functions rather than non-linear activation functions such as the sigmoid. The neurons respond to input changes by changing the firing rate of the outputs. This network will map similar inputs to similar outputs, leading automatically to the ability to generalize [22].

With the back-propagation neural network, the number of output layer neurons depended upon the number of classes in the data set. Each output neuron was assigned to a specific class and the interior network weights were adjusted so that for a given input vector, the output vector had a one (1) for the correct class and zero (0) for the other classes. The Kohonen neural network has a slightly different structure which is demonstrated in Figure 12.

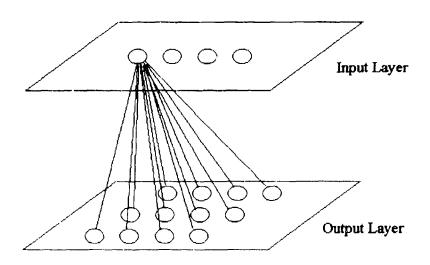


Figure 12 Kohonen Neural Network Architecture

A Kohonen network, shown in Figure 12, consists of two layers of neurons, an input layer and an output layer. This structure does not contain the hidden layer neurons of the back-propagation networks. The number of input layer neurons is determined by the input data vector length whereas the number of output layer neurons is chosen based upon the number of classes and the users intuition as to the number of neurons required to properly represent each particular class

Kohonen networks contain two types of interconnections. The first set of connections is between the input and output neurons where each input neuron is connected to each output neuron. The second set of connections allows interaction between the output neurons themselves. These output neuron interactions determine which neuron will fire and make the classification.

One advantage of Kohonen networks is the ability to self organize feature maps. During training, the output neurons are adjusted so as to cluster around groups or features of the data presented to the network. In a back-propagation network, all neuron weights are adjusted such that the neuron representing the correct class approaches a value of one (1) and the incorrect class neuron values are reduced to zero (0). In simpler terms, for each back-propagation network adjustment, every neuron is updated for error minimization. The Kohonen network is adjusted differently. For each given input only the winning neuron is adjusted. As the winning neuron is the only one adjusted, the concept of competition is introduced into the output layer. Determination of the winning neuron is accomplished through closest output neuron to the input data with respect to any given metric. One of the most common methods of choosing a winning neuron uses the Euclidean distance, whereby the winning neuron would have the smallest distance from the input vector.

At this point, it should be noted that Kohonen neurons are not handled in the same manner as back-propagation neurons. For input layer neurons, there are no differences between networks as these neurons are single valued and contain one point of the input vector. From Figure 12, it is shown that Kohonen networks do not have hidden layer neurons, however there is a significant number of output neurons as compared to the back-propagation network. The Kohonen output neurons are treated as vectors with the same number of components as the input vector. Since the lengths of the input vector and

the output neurons are equal, choosing the distance between them is a simple method of determining the winning output.

Suppose that the training data consists of n vectors with M components each.

Then the Euclidean distance is calculated by

$$d[i] = \sqrt{\sum_{j=1}^{m} (x[i] - W[i][j])^{2}}$$
(5.3.1)

where

$$i = 1, 2, ..., n$$

x[i] = components of the input vector

W[i][j] = elements of the weight matrix

d[i] = Euclidean distance for the ith input vector

and the neuron associated with the smallest d[i] value is the winning neuron. This neuron will adjusted during training or determine the class when discriminating signals. When calculating this distance, it is not necessary to include the square root since the comparison is related to magnitude only.

The training of Kohonen networks differs from that of back-propagation nets. In a back-propagation network, an error vector is used to adjust the weight values for each neuron, whereas Kohonen networks typically adjust only the neuron that wins. Adjustment of the winning neuron uses the delta rule and a learning rate in the form

$$w \text{ new}[i][j] = w \text{ old}[i][j] + \lambda (x[j] - w[i][j])$$
 (5.3.2)

where λ is the learning rate. The learning rate typically star's at 0.2 and decreases to 0 over the training period by

$$\lambda_{\text{new}} = \lambda_{\text{old}} - (\lambda_{\text{start}} / N)$$
 (5.3.3)

where λ _start is the initial learning rate and N is the number of iterations for learning.

Kohonen learning is much simpler than back-propagation learning, but there are two possible disadvantages in its use. First, Kohonen networks are slow to learn the input data. For each input vector applied, only one output neuron has its weights adjusted. Since the weights of one neuron are affected, the other neurons are not adjusted toward or away from their respective classes. The second problem is again related to the restriction of adjusting neurons independently. If the clusters of input data are close together and the Kohonen neurons are significantly far away, most of the neurons will never be adjusted toward the data clusters. This can be easily demonstrated through a 2-space example. Figure 13 contains two data clusters represented by D1 and D2 and Kohonen neurons K. From this plot, it can be seen that requardless of which input is used for training, the neuron K' will win and be adjusted toward the appropriate cluster. When the next input is applied, this same neuron will win again. As a result, the K' neuron will always win, the remaining neurons will never move toward either cluster, and the network will never distinguish between classes. This particular problem can be overcome by using supervised Kohonen learning.

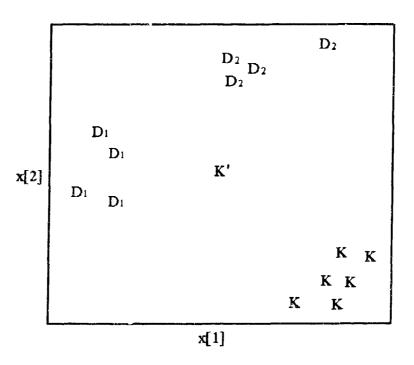


Figure 13 2-Space Vector Mapping

In supervised Kohonen networks each output neuron is assigned to a particular class. By knowing the class of the neuron and the input class, it can be determined whether the winning output neuron should be adjusted towards or away from the input vector. Using Eq. 5.3.2 will move the neuron towards the input vector while a slight modification,

$$w_{new}[i][j] = w_{old}[i][j] - \lambda (x[j] - w[i][j]),$$
 (5.3.4)

will increase the distance between the neuron and input. Controlling the direction of adjustment will force neurons toward their assigned class. However, this does not address the problem of adjusting all neurons toward their respective vactor spaces.

To insure that all neurons are adjusted toward their proper vector spaces, it is necessary to count the number of firings for each neuron. By monitoring neuron firings over a user defined number of training epochs, it can be determined which neurons are not being properly adjusted. After the specified number of training epochs, any neuron that has not fired, or fired few times, will be adjusted by the procedure described above.

By forcing every output neuron to be adjusted toward its assigned class, the grouping of Kohonen neurons will better represent the data clustering. As a result, the supervised Kohonen network will have good pattern recognition and noise tolerance.

5.4 Software Implementation

Currently, there are many commercial software packages that implement various types of neural networks. For this research, the neural networks implemented are included in the SeisNet neural network package which was created for use by the Applied Neural Networks Lab at West Virginia Institute of Technology [36]. This program provides a significant amout of user control over the network implementation. Several of the user determined options are as follows:

number of training records
number of training records
number of testing records
number of training epochs
number of network layers
number of neurons per layer
learning rate

termination error.

Seisnet generates a report which includes the network parameters, as determined by the user, training results, and the classification results. A typical network report is included in Appendix D.

6.0 TESTING AND ANALYSIS

The detailed results of the testing for this project are included in Appendix D with a summary in Table 7. The first page of Appendix D is a typical neural network report file which contains information on network training parameters, training results, and classification results in the following order. The first section of the report gives the number of training records, testing records, network size, momentum, learning rate, and the computer on which the network was trained. Section two states the training threshold, training time per epoch, and training error values. Section three shows the training results in tabular form. Finally, section four lists the classification results in tabular form.

Since the GROUND TRUTH database at CSS was in the process of being created at the time of this testing, the number of known good signals for testing was limited to 75. Due to variations in seismic events and event types, a database of this size is limited in its ability to provide a sufficient base for proper neural network training. In order to overcome the small number of signals available, the testing was limited to five classes as follows:

class 1 quarry blast

class 2 local earthquake

class 3 teleseismic earthquake

class 4 regional earthquake

class 5 marine explosion

It was also decided to split the database such that one part of the signals were used for training and the remaining signals used for testing

The back-propagation network implemented consisted of 144 input neurons, 70 hidden neurons, and 5 output neurons where each output neuron represents one of the five event classes.

Ideally, for any given seismic event, the output vector would consist of one neuron of a value equal to 1 and four neurons with a value of zero. In reality this never happens, so a method must be implemented to chose between the five output neurons in case of contention. To be considered the winning output, the neuron must meet the following two conditions;

- 1. a value greater than 0.7 and
- 2. a value of 0.2 greater than the other four neurons.

The supervised Kohonen network consists of 144 input neurons and 360 output neurons. This configuration uses 72 neurons to represent the vector space for each class.

Signal discrimination in supervised Kohonen networks do not require the post-processing of back-propagation networks. This is due to each output neuron having a designated class. Since only one neuron may fire for any given input, signal discrimination is determined by the class designation of the winning neuron.

6.1 Test Results

A statistical average for training and testing can be obtained using the database splitting method mentioned above. Before splitting the database, the signal order was randomized to prevent the network from learning the pattern in which they were presented

to the network. To build a statistical base, 20 randomized data sets were generated. These randomized sets were then divided into two groups. The first group was split into 30 signals for training and 45 for testing while the split for the second group were reversed, 45 for training and 30 for testing. The complete results from this procedure are shown in Appendix D where the tests denoted by SP1 to SP10 are the 30/45 split and SP11 to SP20 are the 45/30 split.

Back-propagation Network

	Class					
****	1	2	3	4	5	j
30 / 45 Split	2.11	9.33	33.01	8.18	18.10	
45 / 30 Split	0.00	10.27	36.98	1.43	32.26	

Supervised Kohonan Network

	Class					
	1	2	3	4	5	
30 / 45 Split	53.38	25.85	47.58	37.04	49.21	
45 / 30 Split	57.58	26.94	67.83	22.40	27.50	

Table 7 Network Classification Results (%)

Table 7 presents the average classification results per class. These results were obtained after 10000 training iterations for the back-propagation network and 2500 iterations for the supervised Kohonen network. The back-propagation network, based upon the information in Table 7, does not prove to be useful in discrimination of seismic signals using the ARMA coefficient model. However, the supervised Kohonen network

yields significantly higher recognition rates. This is most likely due to the noise tolerance of Kohonen networks.

6.2 Training Time

Training of the neural networks varies between different computers as would be expected. The average training times of the back-propagation and Kohonen networks for the different database splits is shown in Table 8.

Back-propagation Network

	IBM PS70 386 - DX 20 MHz	Gateway 486 - DX2 50 Mhz	Flex 486 - DX 50 Mhz
30 / 45 Split	27.45	4.80	3.39
45 / 30 Split	41.02	7.43	5.05

Supervised Kohonan Network

	IBM PS70 386 - DX 20 MHz	Gateway 486 - DX2 50 Mhz	Flex 486 - DX 50 Mhz
30 / 45 Split	23.69	3.48	2.66
45 / 30 Split	36.11	5.78	3.81

Table 8 Average Network Training Times (sec / epoch)

6.3 Summary

Overall, the results of this study demonstrate that the ARMA coefficient model is insufficient as a stand alone seismic signal discriminator. The classification results of the back-propagation network are poor at best. Back-propagation does acheive a recognition rate of 36.98% for teleseismic events but, this is not a promising number. The supervised Kohonen network, however, has recognition rates of 67.83% for teleseismic events and 57.58% for quarry blasts.

This information suggests that a supervised Kohonan network using ARMA modeling in conjunction with other preprocessing techniques could produce an acceptable seismic signal discriminator.

REFERENCES

- [1] Anderson, J., et. al., "Center for Seismic Studies Version 3 Database: Schema Reference Manual," Center for Seismic Studies Technical Report., C90-1 (1990).
- [2] Anderson, J., and H. Swarger, "Center for Seismic Studies Version 3 Database: SQL Tutorial," Center for Seismic Studies Technical Report, C90-02 (1990).
- [3] "Artificial Neural Networks for Seismic Data Interpretation," Lexington, Massachusetts, MIT Lincoln Laboratory, Semi-Annual Technical Summary, November 30, 1990.
- [4] "Artificial Neural Networks for Seismic Data Interpretation," Lexington, Massachusetts, MIT Lincoln Laboratory, Semi-Annual Technical Summary, June 30, 1992.
- [5] Bache, Thomas, C., et. al., "The Intelligent Monitoring System," <u>Bulletin of Seismological Society of America</u>, Volume 80, Number 6, December 1990, pp. 1833-1851.
- [6] Bratt, Steve, "Data Management and Access at the Center for Seismic Studies", Center for Seismic Studies, November 1991.
- [7] Davis, Randall, and Douglas B. Lenat, <u>Knowledge-Based Systems in Artificial Intelligence</u>, McGraw-Hill, 1982.
- [8] Dahlmann, O. and H. Israelson, <u>Monitoring Underground Nuclear Explosions</u>, Amsterdam (Elsevier), 1977.
- [9] Dowla, Farid U., et. al., "Seismic Discrimination with Artificial Neural Networks: Preliminary Results with Regional Spectral Data", <u>Bulletin of the Seismological Society of America</u>, vol. 80, no. 5, pp. 1346-1373, October 1990.
- [10] Dysart, Paul S., and Jay J. Pulli, "Regional Seismic Event Classification at the Noress Array: Seismological Measurements and the use of Trained Neural Networks", <u>Bulletin of the Seismological Society of America</u>, vol. 80, no. 6, pp. 1910-1933, December 1990.
- [11] Fuller, Joe. Class notes and interview on Kohonan neural networks, West Virginia Institute of Technology, Montgomery, WV, 1994.
- [12] Grant, Lori, and John Coyne, "A Ground-Truth Database for Seismic Discrimination Research", internal report, Center for Seismic Studies, Alexandria VA., 1992.

- [13] Hanrahan, H.E., "An Open-Ended Computer Package for Signal Processing Teaching and Design," <u>IEEE Transactions on Education</u>, August 1985, pp. 155.
- [14] Hartzband, David J., and Fred J. Maryanski, "Enhancing Knowledge Representation in Engineering Databases," <u>IEEE Computer</u>, September 1985, pp. 39-46.
- [15] Hedlin, A.H., J.B. Minster and J.A. Orcutt, "An Automatic Means to Discriminate Between Earthquakes and Quarry Blasts", <u>Bulletin of the Seismological Society of America</u>, vol. 80, no. 6, December 1990, pp. 12143-2160.
- [16] Hedlin, A.H., J.B. Minster and J.A. Orcutt, "The time-frequency characteristic of quarry blasts and calibration explosions recorded in Kazakhstan, USSR", Geophysics Journal International 89, pp. 109-121.
- [17] Ignizio, James P., <u>Introduction to Expert Systems</u>, McGraw-Hill, 1991.
- [18] Joswig, Manfred, "Pattern Recognition for Earthquake Detection," <u>Bulletin of the Seismological Society of America</u>, Volume 80, Number 1, February 1990, pp. 170-186.
- [19] Jurkevics, Andy, "Polarization Analysis of Three-Component Array Data," <u>Bulletin of the Seismology Society of America</u>, Volume 78, Number 5, October 1988, pp. 1725-1743.
- [20] Kosko, B., Neural Networks and Fuzzy Sets, Prentice Hall, 1988.
- [21] Kulhanek, Ota, Anatomy of Seismograms, Elsevier, 1990.
- [22] Lawrence, Jeanette, <u>Introduction to Neural Networks and Expert Systems</u>, Nevada City, CA: California Scientific Software, 1992, pp.3-11, pp. 29-33, pp. 1198-215.
- [23] Lim, J., and A. Oppenheim, <u>Advanced Topics in Signal Processing</u>, Englewood Cliffs: Prentice Hall, 1988, pp. 420-428.
- [24] Lippmann, P., "Introduction to Computing with Neural Nets", <u>IEEE ASSP</u>
 Magazine 4, 4-22.
- [25] Matlab Reference Guide, Math Works Incorporated, 1992.
- [26] McClellan, James H., Two-Dimensional Spectrum Analysis in Sonic Logging," IEEE ASSP Magazine, July 1986, pp. 12-18.

- [27] Mendel, Jerry M., "Some Modeling Problems in Reflection Seismology," <u>IEEE ASSP Magazine</u>, April 1986, pp. 4-17.
- [28] Mykkeltveit, Svein, et al, "Application of Regional Arrays in Seismic Verification Research," <u>Bulletin of Seismological Society of America</u>, Volume 80, Number 6, December 1990, pp. 1777-1800.
- [29] Mykkeltveit, Svein, and H. Bungum, "Processing of Regional Seismic Events Using Data From Small-Aperature Arrays," <u>Bulletin of Seismological Society of America</u>, Volume 74, Number 6, December 1984, pp. 2313-2333.
- [30] Nilsson, Nils J., <u>Principles of Artificial Intelligence</u>, Tioga Publishing Company, 1980.
- [31] Nilsson, Nils J., Learning Machines, McGraw-Hill, 1965.
- [32] Papoulis, Athanusios, "Probability," <u>Random Variables, and Stochastic Processes</u>, 3rd Edition, McGraw-Hill, 1991.
- [33] Rioul, O., and M. Vetterli, "Wavelets and Signal Processing," <u>IEEE SP Magazine</u>, October 1991, pp. 14-37.
- [3+] Reberto, Vito, and Claudio Chiaruttini, "Seismic Signal Understanding: A Knowledge-Based System", IEEE Transactions on Signal F ocessing, vol. 40, no. 7, July 1992, pp. 1787-1806.
- [35] Schalkoff, Robert, Pattern Recognition, Wiley, 1992
- [36] SeisNet Neural Network Software Package, Applied Neural Network Lab, WVIT, 1994.
- [37] Wasserman, P., Neural Computing, Theory and Practice, New York: Van Nostrand Reinhold, 1988, pp. 10-59.
- [38] Wuster, Jan, "Discrimination of Chemical Explosions and Earthquakes in Central Europe A Case Study", DARPA Annual Report, 1992, under grant AFOSR-90-0189.

APPENDIX A Data Base Wave Form Files from CSS

FNAME	STA	CHAN	JDATE
Febme1.w	ARU	bz	1991119
Febme 16.w	ESLA	SZ	1991114
Febme 17.w	ESLA	SZ	1991114
Febme18.w	ESLA	SZ	1991135
Febme 19.w	ESLA	SZ	1991135
Febme43.w	GAR	bz	1990051
Febme45.w	GAR	bz	1991124
Febme47.w	GAR	bz	1991139
Febme48.w	GAR	bz	1991141
Febme49.w	GAR	bz	1991146
Febme55.w	KIV	bz	1991133
Febme56.w	KIV	bz	1991146
Febme65.w	OBN	bz	1991139
Febme66.w	OBN	bz	1991144
Febme67.w	OBN	bz	1991146
Febr0.w	GRA1	bz	1990331
Febr9.w	GRA1	bz	1991117
Febr15.w	GRA1	bz	1991127
Febr21.w	GRA1	bz	1991136
Febr46.w	WRA	SZ	1990331
Febr52.w	WRA	cb	1991114
Febr58.w	WRA	cb	1991119
Febr66.w	V/RA	cb	1991121
Febr72.w	WRA	cb	1991129
Febr86.w	WRA	cb	1991141
Febr99.w	WRA	cb	1991143
Febr103.w	WRA	cb	1991147
Febr109.w	WRA	cb	1991151
Febr112.w	WRA	cb	1991152
Febr115.w	WRA	cb	1991153

NOTE: All signals are 2400 samples at 20.00 samples per second.

APPENDIX A Data Base Wave Form Files from CSS

FNAME	STA	CHAN	JDATE
Febta25.w	GRA1	bz	1991132
Febta52.w	WRA	SZ	1990123
Febta69.w	WRA	SZ	1990334
Febta78.w	WRA	SZ	1990335
Febta81.w	WRA	SZ	1990335
Febta86.w	WRA	SZ	1990051
Febta97.w	WRA	SZ	1990065
Febta150.w	WRA	cb	1991114
Febta 177.w	WRA	cb	1991118
Febta229 w	WRA	cb	1991121
Febta309.w	WRA	cb	1991125
Febta317.w	WRA	cb	1991125
Febta408.w	WRA	cb	1991133
Febta513.w	WRA	cb	1991137
Febta542.w	WRA	cb	1991138
Febla0.w	ВЈТ	SZ	1991147
Febla5.w	GAR	bz	1991115
Febla7.w	GAR	bz	1991117
Febla8.w	GAR	bz	1991119
Febla9.w	GAR	bz	1991145
Febla I I.w	GRA1	bz	1991112
Febla 13. w	GRA1	bz	1991116
Febla16.w	GRAI	bz	1991122
Febla 19. w	GRA1	bz	1991149
Febla20.w	HFS	SZ	1991135
Febla26.w	HFS	cb	1991135
Febla73.w	WRA	cb	1991137
Febla75.w	WRA	cb	1991143
Febla76.w	WRA	cb	1991143
Febla82.w	WRA	cb	1991146

NOTE: All signals are 2400 samples at 20.00 samples per second.

APPENDIX A Data Base Wave Form Files from CSS

FNAME	STA	CHAN	JDATE
Febqb0.w	ASAR	cb	1991123
Febqb 12.w	СТА	bz	1991123
Febqb20.w	CTA	bz	1991141
Febqb33.w	KAF	SZ	1990331
Febqb45.w	KAF	SZ	1991114
Febqb93.w	KAF	SZ	1991133
Febqb100.w	KAF	SZ	1991135
Febqb114.w	KAF	SZ	1991140
Febqb117.w	KAF	SZ	1991140
Febqb118.w	KAF	SZ	1991140
Febqb122.w	KAF	SZ	1991142
Febqb147.w	KAF	SZ	1991150
Febqb154.w	KAF	SZ	1991154
Febqb158.w	STK	bz	1991121
Febqb180.w	WRA	cb	1991141

NOTE: All signals are 2400 samples at 20.00 samples per second.

APPENDIX B GSETT-Subset1 Station Names and Locations

ISTA	STATION NAME	LATITUDE	LONGITUDE
ARU	ARTI - SVERDLOVSK, OBLAST	56,4000	58.6000
⊖ASAF	R ALICE SPRINGS ARRAY - NORTH TERRITORY, AUSTRALIA	A 23.7040	133.9620
BJT	BAIJIATUAN - BAIJIATUAN, CHINA	40.0403	116.1750
∃CTA	CHARTERS TOWERS - QUEENSLAND, AUSTRALIA	20.0880	146,2540
HESLA	SONSECA ARRAY STATION - SPAIN	39.6700	-3.9600
GAR	GARM - GARM, USSR	39.0000	70.3000
UGRAI	GRAFENBERG ARRAY - BOYERN, GERMANY	49.6920	11.2220
HFS	HAGFORS ARRAY - SWEDEN	60,1335	13.6836
⊟KAF	KANGASNIEMI - FINLAND	62.1127	26.3062
UKIV	KISLOVODSK - WESTERN CAUCASUS USSR	43,9500	42.6833
OBN	OBNINSK - OBNINSK, USSR	55,1167	36.5667
□STK	STEPHENS CREEK - NEW SOUTH WALES, AUSTRALIA	31.8820	141.5920
□WRA	WARRAMUNGA ARRAY - NORTH TERRITORY, AUSTRALIA	A -19,7657	134.3891

%				~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		
% File: ARMA.M (Matlab Script File)						
% Author: John R. Martin % Date: 01-26-1993			lartin			
% Purpos % % %	e:	This program calculates the auto-regressive-moving average coefficients for an equivalent approximation of the time series. The results are stored with the numerator coefficients then denominator coefficients per window for the given number of windows.				
_				Store data on individual basis not as full matrix.		
% Variabl	e Lis					
-				% dir for *.w files		
_		::\data\ss1'; ::\data\arma	. dat!	% output filename		
indez filer			Luai,	= 'file'; % name of index file		
no class				% number of classes		
slice				% number of time slices		
filt ord		*		% order of ARMA filter		
auto len				% automatic samples/window		
no samp				% manual samples/window		
		,		% Ignored if auto len = 1		
graphics	= 1;	•		% 0 - no graphics		
				% ! - create plots		
norm	 2 ,			% 0 - no Normalization		
				% 1 - normalize input data		
				% 2 - normalize output data		
win type	- O;			% 0 - Rectangular		
				% 1 - Hamming		
				% 2 - Hanning		

```
0/0-----
   % External Variables
   %-----
   % These Variables should be in the file pointed to by index filename
   %
   % File = []
                                                              The name of the waveforms
   % class = []
                                                              The class of the waveforms in the same order as
   %
                                                                                  the file name listing
   % wave length
                                                              Length in samples of the waveforms
                                                                                  should be the same per waveform.
  % file number
                                                              Number of waveforms
  %
  %_____
  % Begin Executable Code
  0/0-----
  % Get File Index
  0/0-----
 disp([' ']);
 disp (['Auto-Regressive Moving Average Extraction Routine']);
 disp([' ']);
 disp (['Loading Waveform Index from ',wave dir]);
                                                                                 %Loads File Prefix FILE.M
 eval (index filename);
 clear index filename;
 0/0-----
 % Create the Output Data File
 0/0----
 FID = -1;
                                                            % -1 is default for failure to open file
 while FID === -1
          FID = fopen(out_file,'at','n');
                                                                                                   % Append ASCII format to IBM
end
data out = zeros(1,(slice/4)*(filt ord+filt ord+1)+no class);
0/0-----
% Waveform loop
Opening the second of the seco
```

```
% Remove blanks from the filename
for file no = 1:file number
   clf.
   namesize = 0:
   for character = 1:8
       if strcmp(File(file no, character),'') == 0
           namesize = namesize + 1;
       end
   end
   % Get name from the filelist
   fname = File(file no, 1:namesize);
   % Diplays which file is currently be worked on
   disp([' Evaluating: ',fname]);
   % Retreives the datafile from the waveform directory
   eval (['load ',wave dir,'\',fname,'.w']);
   eval(['data=',fname,',']);
                                    % assign to working variable
                                    % free variable from memory
   eval(['clear ',fname]);
   if auto len == 1
      no samp = wave length / slice;
   end
   % Calculate the window smoothing
  if file no == 1
      for n = 1:no samp
                                           % Rectangular
          if win type == 0
              window(n) = 1;
          end
          if win type == 1
                                           % Hamming
              window(n) = 0.54 - 0.46*\cos((2*pi*n)/no samp);
          end
          if win type == 2
                                           % Hanning
              window(n) = 0.50 - 0.50*\cos((2*pi*n)/no samp);
          end
      end
  end
```

```
% Normalize the input data
if norm === 1
   data = data / max(abs(data));
end %if
0/0-----
% Window loop
0/0----
for win = 1: slice/4
   disp(win)
   start = (win-1) * no samp + 1;
   stop = win * no_samp;
   win data = data(1, start:stop);
  if win data(1) == 0
     win data(1) = 01;
  end
  0/0----
  % Get ARMA filter coefficients
  6/0-----
  [b,a] = prony(win data, filt ord, filt ord);
  0/3-----
  % store data
  0/0-----
  start = (win-1)*(fiit ord+filt ord+1)+1;
  stop = win*(filt ord+filt ord+1);
  data out(1,start:stop) = [b a(1,2:filt ord+1)];
  0/0-----
  % compare frequency response of fft and arma
  0/0----
  freq = fft(win data);
  tmp = size(freq);
  f = freq(1:tmp(2)/2)/max(abs(freq));
  [h,n] = freqz(b,a,tmp(2)/2);
  h = h/\max(abs(h));
```

```
0/0-----
      % Plot Graphics
      %
      if graphics == 1
         clf;
         plot(1:tmp(2)/2,abs(f),1:tmp(2)/2,abs(h));
         title(['FFT / ARMA Response Plot']);
         xlabel(['Frequency']);
         ylabel(['Magnitudε']);
      end
   end% window loop
   0/0----
   % Normalize the output data
   %-----
   if norm == 2
      data out(1,:) = data out(1,:)/max(abs(data out(1,:)));
   end
   0/0----
   % Class identifier
   %-----
   if class(file no) == 1,
                              classifier = [1.0 \ 0.0 \ 0.0 \ 0.0 \ 0.0];
   elseif class(file no) == 2, classifier = [0.01.00.000.00];
   elseif class(file no) == 3, classifier = [0.0001000000];
   elseif class(file no) == 4, classifier = [0.0000001.000],
   elseif class(file no) == 5, classifier = [0.90000000010];
   0/0----
   % Save data in ASCII format
   0/0----
   for count = 1:63,
      fprintf(FID, '%12.8f', data out(1,count));
   end
   fprintf(FID, '%3.1f %3.1f %3.1f %3.1f \%3.1f\n', classifier);
end% waveform loop
fclose(FID);
```

APPENDIX D Neural Network Data

Typical Neural Network Classification Report

Network: Back Propagation Ru	n Date:	7/ 8/1993
------------------------------	---------	-----------

Input	Data
-------	------

Waveform File Name	SPIALPRM
Number of Data Records	75
Number of Training Records	30
Number of Testing Records	45
Number of Training Epochs	10000
Number of Network Layers	3
Number of Neurons Per Layer	144 70 5
Learning Rate Delta	0.2000
Momentum	C.1000
Termination Error	0.000E+00
Saving Weight in	SPIALBWT
Computer	20 MHz IBM Model 70

Training Summary

Training Threshold		0.7000
Training Threshold Differe	ence	0.2000
Average Time Per Epoch.(sec)	28.10
Ave. Error	7.187E-05	
Max Error	1.691E-04	

	Outpu
Min. Error	8.139E-06
Max. Error	1.691E-04

					Percent				
			0	1	2	3	4	5	Correct
	1	\ 	0/6	6/6	0/6	0/6	0/6	0/6	100.00
Input	2	ĺ	0/4	0/4	4/4	0/4	0/4	0/4	100.00
Class	3		0/5	0/5	0/5	5/5	0/5	0/5	100.00
	4		0/9	0/9	0/9	0/9	9/9	0/9	100.00
	5	1	0/6	0/6	0/6	0/6	0/6	6/6	100.00

Classification Summary

Classification Threshold	0.7000
Classification Threshold Difference	0.2000

					Percent					
			0	0 1		2 3		5	Correct	
	1	\ -	5/9	1/ò	2/9	0/9	1/9	0/9	1 11.11	
Input	2	i	5/11	1/11	0/11	0/11	3/11	2/11	0.00	
Class	3		5/10	1/10	0/10	2/10	2/10	0/10	20.00	
	4		4/6	0/6	1/6	0/6	1/6	0/6	16.67	
	5	i	3/9	1/9	3/9	0/9	1/9	0/9	0.00	

APPENDIX D Neural Network Data

Back-propagation Neural Network Training Data

	Input	Output Class									
	Class	0	1	2	3	4	5	Total	% CORR		
SPI	1	0	6	0	0	0	0	6	100.00		
	2	0	0	4	0	0	0	4	100,00		
	3	0	0	0	5	0	0	5	100.00		
	4	0	0	0	0	9	0	9	100.00		
	5	0	0	0	0	0	6	6	100.00		
SP2	1	0	3	0	0	0	0	3	100.00		
	2	0	0	6	0	0	0	6	100.00		
	3	0	0	0	6	0	0	6	100.00		
	4	0	0	0	0	7	0	7	100.00		
	5	0	0	0	0	0	8	8	100.00		
SP3	1	0	6	0	0	0	0	6	100.00		
	2	1	0	5	0	0	()	6	83.33		
	3	0	0	0	5	0	0	5	100,00		
	4	0	0	0	0	4	0	4	100.00		
	5	0	0	0	0	0	9	9	100.00		
SP4	1	0	5	0	0	0	0	5	100.00		
	2	0	0	7	0	0	0	7	100.00		
	3	2	0	0	2	0	0	4	50.00		
	4	0	0)	0	7	0	7	100.00		
	5	0	0	0	0	0	7	7	100.00		
SP5	1	0	4	9	0	0	0	4	100.00		
	2	0	0	8	0	0	0	8	100,00		
	3	1	0	0	6	0	0	7	85.71		
	4	0	0	0	6	4	()	4	100.00		
	5	0	0	()	0	0	7	7	100,00		
SP6	I	()	5	0	0	0	0	5	100.00		
	2	0	0	6	0	()	0	6	100,00		
	3	0	0	0	6	0	0	6	100.00		
	4	0	0	0	0	6	0	6	100,00		
	5	0	0	0	0	0	7	7	100.00		
SP7	I	0	4	0	0	0	0	4	100.00		
	2	0	0	8	()	0	0	8	100 00		
	3	1	0	()	2	0	()	3	66.67		
	4	0	0	0	0	8	0	8	100.00		
	5	0	0	0	0	0	7	7	100.00		

APPENDIX D Neural Network Data

Back-propagation Neural Network Training Data

	Input			Output Class					
	Class	0	1	2	3	4	5	Total	% CORR
SP8	1	0	3	0	0	0	0	3	100.00
	2	0	0	7	0	0	0	7	100.00
	3	1	0	0	5	0	0	6	83.33
	4	0	0	0	0	6	0	6	100.00
	5	0	0	0	0	0	8	8	100.00
SP9	1	0	5	0	0	0	0	5	100.00
	2	0	0	7	0	0	0	7	100.00
	3	2	0	0	3	0	0	5	60.00
	4	1	0	0	0	4	0	5	80.00
	5	()	0	0	0	0	8	8	100.00
SP10	1	0	8	0	0	0	0	8	100.00
	2	0	0	5	0	0	0	5	100.00
	3	0	0	0	7	0	0	7	100.00
	4	0	0	0	O	7	0	7	100.00
	5	0	0	0	0	0	3	3	100.00
SPII	1	0	9	0	0	0	0	9	100.00
	2	0	0	11	0	0	()	11	100,00
	3	2	0	0	8	0	0	10	80.00
	4	0	0	0	0	6	0	6	100.00
	5	0	0	0	0	0	9	9	100.00
SP12	1	0	12	0	0	0	0	12	100.00
	2	0	0	9	0	0	0	9	100.00
	3	3	0	0	6	0	0	9	66.67
	4	1	0	0	0	7	0	8	87.50
	5	0	0	0	0	0	7	7	100,00
SP13	1	1	3	0	0	0	0	9	88.89
	2	0	0	9	0	0	0	9	100.00
	3	0	0	0	10	0	0	10	160 0
	4	0	0	0	0	11	0	11	100.00
	5	0	O	0	0	()	6	6	100.00
SP14	1	0	10	0	()	0	0	10	10 00
	2	0	()	8	0	0	0	8	100-00
	3	0	0	0	11	()	0	11	100.00
	4	0	()	0	0	8	0	8	100,00
	5	()	()	()	()	()	8	8	100.00

APPENDIX D Neural Network Data

Back-propagation Neural Network Training Data

	put				put Class				
C	lass	()	l	2	3	4	5	Total	% CORR
SP15	1	0	11	0	0	0	0	11	100,00
	2	l	0	6	Ö	ő	ő	7	85.71
	3	1	0	0	8	Ö	0	8	100,00
	4	2	0	0	0	9	0	11	81.82
	5	0	0	0	0	0	8	8	100,00
SP16	1	1	9	0	0	0	0	10	90.00
	2	0	0	9	0	0	0	9	100.00
	3	2	0	0	7	0	0	9	77.78
	4	0	0	0	0	9	0	9	100.00
	5	0	0	0	0	0	8	8	100.00
SP17	i	0	11	()	0	0	9	11	100.00
	2	1	0	6	0	0	0	7	85.71
	3	2	0	0	10	0	0	12	83.33
	4	0	0	0	0	7	0	7	100.00
	5	0	0	0	0	0	8	8	100.00
SP18	1	1	11	0	0	0	0	12	91.67
	2	0	0	8	0	0	0	8	100,00
	3	0	0	0	9	0	0	9	100.00
	4	0	0	0	0	9	0	9	100.00
	5	0	0	0	0	0	7	7	100.00
SP19	1	0	10	0	0	0	0	10	100 00
	2	0	0	8	0	0	0	8	100.00
	3	1	0	0	9	0	0	10	90.00
	4	0	0	0	()	10	()	10	100,00
	5	0	0	0	0	0	7	7	100.00
SP20	1	0	7	0	()	0	0	7	100,00
	2	()	0	10	0	0	0	10	100.00
	3	3	0	0	5	0	0	8	5 2 .50
	4	0	0	0	0	8	()	8	100.00
	5	0	0	0	0	0	12	12	100.00

APPENDIX D Neural Network Data

Back-propagation Neural Network Classification Data

	Input			Out	out Class				
	Class	0	1	2 .	3	4	5	Total	% CORR
SPI	i	5	1	2	0	ì	0	9	11.11
· ·	2	5	Ī	0	0	3	2	11	0.00
	3	5	i	0	2	2	0	10	20,00
	4	4	0	1	0	1	0	6	16.67
	5	3	1	3	0	2	0	9	0.00
SP2	1	4	0	ì	2	5	0	12	0.00
01 2	2	5	ő	ó	3	1	ő	9	0.00
	3	4	ő	ő	5	ó	ő	9	55.56
	4	4	ì	2	i	ő	ő	8	0.00
	5	ō	Ô	1	ó	ő	ő	7	0.00
		V	V	•	Ü	V	V	•	0,00
SP3	1	7	0	1	0	1	0	9	0.00
	2	6	0	0	0	2	1	9	0.00
	3	6	0	0	2	2	0	10	20.00
	4	7	0	0	0	2	2	11	18.18
	5	4	0	0	0	0	2	6	33.33
SP4	1	5	1	0	i	2	1	10	10.00
	2	4	0	0	0	0	4	8	0.00
	3	5	0	2	3	1	0	11	27.27
	4	5	i	2	0	0	0	8	0.00
	5	3	i	0	0	0	4	8	50.00
SP5	1	6	0	0	1	3	1	11	0.00
	2	6	0	0	Ö	0	1	7	0.00
	3	5	0	0	3	0	0	8	37.50
	4	6	0	2	2	1	O	11	9.09
	5	3	0	2	0	1	2	8	25,00
SP6	1	4	0	0	1	4	i	10	0.00
Si O	2	5	ì	ì	ì	0	ì	9	11.11
	3	4	Ò	2	3	ő	ó	ý	33.33
	4	3	0	2	2	Ö	2	9	0.00
	5	2	0	2	0	ì	3	8	37.50
	.,	2	()	2	•		.,	.,	37.27
SP7	l	4	0	4	0	0	3	11	0.00
	2	i	0	4	0	1	1	7	57.14
	3	8	0	2	1	0	ì	12	8.33
	4	2	0	3	0	1	1	7	14.29
	5	4	0	.3	0	0	ì	8	12.50

APPENDIX D Neural Network Data

Back-propagation Neural Network Classification Data

Iı	nput	Output Class								
	lass	0	l	2	3	4	5	Total	% CORR	
SP8	1	5	0	3	1	2	1	12	0.00	
0. ()	2	3	Ö	1	3	1	0	8	12.50	
	3	3	Ö	î	5	ō	Ö	9	55.56	
	4	7	ő	i	ő	1	0	ý	11.11	
	5	3	ő	4	ő	ō	0	7	0,00	
	•	.,	V	•	v	,,	V	,	0,00	
SP9	1	6	0	2	0	1	1	10	0.00	
	2	6	0	1	0	0	l	8	12.50	
	3	6	0	3	1	()	0	10	10.00	
	4	6	0	4	0	0	0	10	0.00	
	5	5	0	1	0	0	1	7	14.29	
SP10	1	4	0	0	0	3	0	7	0.00	
	2	6	2	0	1	1	0	10	0.00	
	3	1	1	0	5	i	0	8	62.50	
	4	4	2	0	1	ì	0	8	12.50	
	5	6	I	1	1	2	1	12	8.33	
SPH	1	4	0	1	0	i	0	6	0.00	
	2	1	0	1	0	0	2	4	25.00	
	3	4	0	0	1	0	0	5	20.00	
	4	5	0	4	0	0	0	9	0.00	
	5	2	0	4	0	0	θ	6	0.00	
SP12	1	l	0	1	0	1	0	3	0.00	
J. 12	2	3	Ö	0	1	0	2	6	0,00	
	3	1	Ö	2	3	0	Ö	6	50.00	
	4	3	1	2	0	1	0	7	14.29	
	5	1	0	1	0	1	5	8	62.50	
CDIA		2	0	•			0	,	0.00	
SP13	l	3	0	1	0	2	0	6	0.00	
	2	1	1	1	2	()	1	6	16.67	
	3	5	0	0	0	0	0	5 .1	0.00	
	4	3	0	0	1	0	0	7	0.00	
	5	3	0	1	1	1	3	9	33.33	
SP14	1	1	0	0	2	1	ı	5	0,00	
	2	2	3	0	2	\mathbf{G}	()	7	0.00	
	3	0	0	0	3	1	()	4	75.00	
	4	6	()	1	()	0	0	7	0.00	
	5	3	0	2	9	()	2	7	28.57	

APPENDIX D Neural Network Data

Back-propagation Neural Network Classification Data

L	nput	Output Class									
C	lass	0	1	2	3	4	5	Total	% CORR		
SP15	1	2	0	0	2	0	0	4	0.00		
	2	4	0	1	2	0	1	8	12.50		
	3	4	0	0	3	0	0	7	42.86		
	4	4	0	0	0	0	0	4	0.00		
	5	5	0	0	0	0	2	7	28.57		
SP16	1	3	0	0	1	I	0	5	0.00		
	2	3	0	0	2	0	1	6	0.00		
	3	2	0	1	3	0	0	6	50.00		
	4	3	1	ì	ì	0	0	6	0.00		
	5	4	()	0	Ċ	0	3	7	42.86		
SP17	1	3	0	0	0	i	0	4	0.00		
	2	6	0	0	2	0	0	8	0.00		
	3	2	0	0	1	0	0	3	33.33		
	4	6	0	1	1	0	0	8	0.00		
	5	0	2	2	0	2	1	7	14.29		
SP18	1	0	0	0	l	2	0	3	0.00		
	2	4	0	9	0	1	2	7	0.00		
	3	2	0	0	3	1	0	6	50 00		
	4	1	3	1	1	U	0	6	0.00		
	5	I	1	2	0	4	0	8	0.00		
SP19	1	1	0	2	0	2	0	5	0.00		
	2	3	0	2	1	0	ì	7	28.57		
	3	4	()	0	1	0	0	5	20.00		
	4	5	0	0	0	0	0	5	0.00		
	5	3	0	2	l	1	1	8	12.50		
SP20	1	5	0	ì	0	0	2	8	0.00		
	2	0	0	1	2	0	2	5	20,00		
	3	3	0	2	2	0	0	7	28.57		
	4	3	1	.3	0	()	0	7	0.00		
	.5	()	0	0	0	0	3	3	100,00		

APPENDIX D Neural Network Data

Supervised Kohonan Neural Network Training Data

	Input	Output Class									
	Class	0	1	2	3	4	5	Total	% CORR		
SPI	1	0	6	0	0	0	0	6	100.00		
	2	0	0	4	0	0	0	4	100.00		
	3	0	0	0	5	0	0	5	100.00		
	4	0	0	0	0	9	0	9	100.00		
	5	0	0	0	0	0	6	6	100.00		
SP2	1	0	3	0	0	0	0	3	100.00		
	2	0	0	6	0	0	0	6	100.00		
	3	()	0	0	6	0	0	6	100.00		
	4	()	0	0	0	7	0	7	100.00		
	5	0	0	0	0	0	8	8	100.00		
SP3	1	0	6	0	0	0	0	6	100.00		
	2	0	0	6	0	0	0	6	100.00		
	3	0	0	0	5	0	0	5	100.00		
	4	0	0	0	0	4	0	4	100.00		
	5	0	0	0	0	0	9	9	100.00		
SP4	i	0	5	0	0	0	0	5	100.00		
	2	0	0	7	0	0	0	7	100.00		
	3	0	0	0	4	0	0	4	100.00		
	4	0	0	0	0	7	0	7	100.00		
	5	0	0	0	0	0	7	7	100.00		
SP5	1	0	4	0	0	0	()	4	100.00		
	2	0	0	8	0	0	0	8	100.00		
	3	Ö	0	0	7	0	0	7	100.00		
	4	0	0	0	0	4	0	4	100.00		
	5	()	0	0	0	0	7	7	100.00		
SP6	ì	0	5	0	0	()	0	5	100.00		
	2	0	0	6	()	0	()	6	00.001		
	3	0	0	0	6	()	0	6	100.00		
	4	0	0	0	0	6	()	6	100,00		
	5	0	0	()	0	()	7	7	100.00		
SP7	1	0	4	0	0	0	0	4	100.00		
	2	0	0	8	0	0	()	8	100.00		
	3	0	0	0	3	0	0	3	100.00		
	4	0	0	()	0	8	()	8	100 00		
	5	()	()	()	()	()	7	7	100,00		

APPENDIX D Neural Network Data

Supervised Kohonan Neural Network Training Data

I	nput	Output Class								
	lass	0	1	2	3	4	5	Total	% CORR	
SP8	1	0	3	0	0	0	0	3	100.00	
0. 9	2	Ö	0	7	0	ő	0	7	100.00	
	3	Ö	0	Ó	6	ő	ő	6	100.00	
	4	Ö	Õ	ő	0	6	ő	6	100.00	
	5	0	0	0	0	0	8	8	100.00	
SD0		0	5	0	0	Λ	0	•	100.00	
SP9	1 2	0	0	0 7	0	0	0	5 7	100.00 100.00	
	3	0	0	0	5	0 0	0	5	100.00	
	4	0	0	0	0	5	0	5	100.00	
	5	0	0	0	0	0	8	8	100.00	
	3	U	U	U	U	U	O	0	100,00	
SP10	1	0	8	0	0	0	0	8	100.00	
	2	0	0	5	0	0	0	5	100,00	
	3	0	0	0	7	0	0	7	100.00	
	4	0	0	0	0	7	0	7	100.00	
	5	0	0	0	0	0	3	3	100.00	
SP11	1	0	9	0	0	0	0	9	100.00	
D	2	ő	ó	11	ŏ	ŏ	0	11	100,00	
	3	ő	0	0	10	ő	0	10	100.00	
	4	Ö	Ö	Ö	0	6	ő	6	100.00	
	5	0	Ö	0	Ö	0	9	9	100.00	
SP12	1	0	12	O	0	0	0	12	100,00	
	2	0	0	9	()	0	0	9	100,00	
	3	0	0	0	9	0	()	9	100,00	
	4	()	0	()	0	8	0	8	100.00	
	5	0	O	0	0	0	7	7	100.00	
SP13	1	0	9	()	0	()	o	9	100,00	
	2	0	()	9	()	0	0	9	100,00	
	3	0	()	Ð	10	0	()	10	100,00	
	4	0	()	0	0	11	0	11	100,00	
	5	0	0	()	Θ	0	Ð	6	100,00	
SP14	1	0	10	0	()	0	O	10	100.00	
Ģr 14	1 2	0	()		()	0	0		100.00	
	3			8		0		8		
		0	()	0	11	() e	0	11	100,00	
	4 5	()	()	0	0	8	()	8	100.00	
	.7	()	0	()	0	()	8	8	100 00	

APPENDIX D Neural Network Data

Supervised Kohonan Neural Network Training Data

Input			Output Class						
Class		0	1	2	3	4	5	Total	% CORR
SP15	i	0	10	0	0	1	0	11	90.91
	2	0	0	7	0	0	0	7	100.00
	3	0	0	0	8	0	0	8	100.00
	4	0	C	0	0	11	0	11	100.00
	5	0	0	0	0	0	8	8	100.60
SP16	ı	0	10	0	0	0	0	10	100,00
	2	0	0	9	0	0	0	9	106.00
	3	0	0	0	9	0	0	9	100.00
	4	0	0	0	0	9	0	9	100.00
	5	0	0	0	0	0	8	8	100,00
SP17	1	0	10	0	0	I	0	11	90.91
	2	()	0	7	0	0	0	7	100.00
	3	0	()	0	12	0	0	12	100.00
	4	0	0	1	()	7	0	7	100.00
	5	0	0	0	0	0	8	8	100.00
SP18	1	0	12	0	0	0	0	12	100,00
	2	0	0	8	0	0	()	8	100,00
	3	0	0	0	9	0	0	9	100.00
	4	0	0	0	0	9	0	9	100.00
	5	0	()	0	0	0	7	7	100.00
SP19	l	0	10	0	0	0	()	10	100.00
	2	0	0	8	0	0	0	8	100.00
	3	()	()	0	9	1	()	10	90,00
	4	0	()	0	0	10	()	10	100.00
	5	0	0	0	()	()	7	7	100,00
SP20	1	0	7	0	0	0	0	7	100,00
	2	()	0	10	()	0	0	10	100.00
	4	()	O	0	8	0	0	8	100,00
	4	()	0	()	0	8	0	8	100.00
	5	0	0	()	0	0	12	12	100.00

APPENDIX D Neural Network Data

Supervised Kohonan Neural Network Classification Data

	Input			Out	put Class	3			
	Class	0	1	2	3	4	5	Total	% CORR
SPI	1	0	8	0	0	l	0	9	88.89
	2	0	7	1	0	1	2	11	9.09
	3	0	7	0	1	2	0	10	10.00
	4	0	4	i	0	0	1	6	0.00
	5	0	2	4	0	2	1	9	11.11
SP2	ı	0	7	0	1	3	1	12	58.33
	2	0	0	0	1	4	4	9	0.00
	3	0	0	0	6	3	0	9	66,67
	4	0	0	1	0	6	1	8	75.00
	5	0	1	()	0	2	4	7	57.14
SP3	1	0	5	3	0	0	1	9	55.56
	2	0	4	3	2	0	0	9	33,33
	3	0	1	2	3	4	0	10	30.00
	4	0	0	4	1	1	5	11	9.09
	5	C	2	3	0	0	1	6	16.67
SP4	1	0	7	0	ı	2	0	10	70.00
	2	()	0	2	1	0	5	8	25.00
	3	()	0	3	8	()	0	11	72.73
	4	()	0	2	1	5	0	8	62.50
	5	0	1	0	0	3	4	8	50.00
SP5	1	0	2	3	1	1	4	11	18.18
	2	0	C	.3	2	l	1	7	42.86
	3	0	()	3	5	()	0	8	62.50
	.1	0	0	6	()	()	5	11	0.00
	5	0	0	3	0	0	5	8	62.50
SP6	1	0	6	0	U	2	2		60.00
	2	0	2	Ì	ì	2	3	9	11.11
	.3	0	2	C	5	1	1	9	55.56
	4	0	()	1	0	2	6	9	22.22
	5	()	1	1	0	l	5	8	62.50
SP7	1	()	4	4	0	2	1	1.1	36.36
	2	0	0	4	0	1	2	7	57.14
	3	()	()	9	l	2	()	12	8.33
	4	()	()	2	()	4	ł	7	57.14
	5	()	1	2	0	1	4	8	50,00

APPENDIX D Neural Network Data

Supervised Kohonan Neural Network Classification Data

Input Output Class Class 0 1 2 3 4 5 Total % C SP8 1 0 3 2 1 3 3 12 25.0	ORR
SP8 1 0 1 2 1 2 2 2 22	0
	.,
2 0 0 0 4 2 2 8 0.00	
3 0 0 0 9 0 0 9 100.	00
4 0 0 0 1 4 4 9 44.4	
5 0 0 1 0 1 5 7 71.4.	
	,
SP9 1 0 5 1 0 0 4 10 50.00	
2 0 0 4 0 0 4 8 50.00)
3 0 0 8 2 0 0 10 20.00)
4 0 0 1 1 0 8 10 0.00	
5 0 1 0 0 0 6 7 85.73	
SP10 1 0 5 0 0 2 0 7 71.43	
2 0 1 3 1 5 0 10 30,00	
3 0 0 2 4 2 0 8 50.00	
4 0 0 0 8 0 8 100.0	
5 0 2 3 0 4 3 12 25.00	
SPII 1 0 3 0 I 1 1 6 50.00	
2 0 0 0 1 1 2 4 0.00	
3 0 0 0 5 0 0 5 100.0	0
4 0 0 5 0 4 0 9 44.44	
5 0 0 4 0 0 2 6 33.33	
SP12 1 0 1 0 0 1 1 3 33.33	
2 0 1 1 3 0 1 6 16.67	
3 0 0 2 4 0 0 6 66.67	
4 0 2 4 1 0 0 7 0.00	
5 0 1 3 0 1 3 8 37.50	
37.30	
SP13 1 0 5 0 0 1 0 0 83.33	
2 0 0 1 1 3 1 6 16.67	
3 0 0 0 5 0 0 5 100.00)
4 0 0 0 2 2 0 4 50.00	
5 0 1 1 0 7 0 9 0.00	
SP14 1 0 3 1 0 1 0 5 60.00	
2 0 0 3 + 1 0 7 42.86	
3 0 0 1 3 0 0 4 75.00	
4 0 1 4 0 2 0 7 28.57	
5 0 0 7 0 0 7 0,00	

APPENDIX D Neural Network Data
Supervised Kohonan Neural Network Classification Data

Ir	nput	Output Class									
	lass	0	1	2	3	4	5	Total	% CORR		
SP15	ì	0	2	0	1	i	0	4	50.00		
	2	Ü	3	5	0	0	0	8	62.50		
	3	0	2	3	2	0	0	7	28.57		
	4	()	2	2	0	()	0	4	0.00		
	5	0	3	1	()	0	3	7	42.86		
SP16	I	()	4	0	1	0	0	5	80.00		
	2	0	0	0	4	0	2	6	0.00		
	3	0	0	0	6	0	0	6	100.00		
	4	()	0	0	2	4	0	6	66.67		
	5	()	0	0	1	4	2	7	28.57		
SP17	1	0	2	1	0	1	0	4	50.00		
	2	0	2	2	2	0	2	8	25,00		
	3	0	0	0	3	0	0	3	100,00		
	4	0	1	5	1	0	ì	8	0.00		
	5	0	3	1	()	1	2	7	28.57		
SP18	1	0	2	1	0	0	0	3	66.67		
	2	()	3	1	0	0	3	7	14.29		
	3	()	1	4	1	()	0	6	16.67		
	4	0	2	4	0	()	()	6	0.00		
	5	()	5	1	0	0	2	8	25 00		
SP19	1	0	2	1	()	0	i	5	40.00		
	2	0	1	5	i	0	()	7	71.43		
	3	0	0	3	l	1	0	5	20.00		
	4	0	1	3	()	1	()	5	20.00		
	5	()	2	3	0	2	ì	8	12.50		
SP20	!	()	5	0	i	ı	l	8	62.50		
	2	()	()	l	2	()	2	5	20.00		
	.3	()	0	2	5	0	0	7	71.43		
	4	()	1	2	2	1	1	7	14.29		
	5	()	()	ì	()	()	2	3	66-67		

Prof. Thomas Ahrens Seismological Lab, 252-21 Division of Geological & Planetary Sciences California Institute of Technology Pasadena, CA 91125

Prof. Keiiti Aki Center for Earth Sciences University of Southern California University Park Los Angeles, CA 90089-0741

Prof. Shelton Alexander Geosciences Department 403 Deike Building The Pennsylvania State University University Park, PA 16802

Prof. Charles B. Archambeau CIRES
University of Colorado
Boulder, CO 80309

Dr. Thomas C. Bache, Jr. Science Applications Int'l Corp. 10260 Campus Point Drive San Diego, CA 92121 (2 copies)

Prof. Muawia Barazangi Cornell University Institute for the Study of the Continent 312c SNEE Hall Ithaca, NY 14853

Dr. Jeff Barker Department of Geological Sciences State University of New York at Binghamton Vestal, NY 13901

Dr. Douglas R. Baumgardt ENSCO, Inc 5400 Port Royal Road Springfield, VA 22151-2388

Dr. Susan Beck Department of Geosciences Building #77 University of Arizona Tuscon, AZ 85721

Dr. T.J. Bennett S-CUBED A Division of Maxwell Laboratories 11800 Sunrise Valley Drive, Suite 1212 Reston, VA 22091 Dr. Robert Blandford AFTAC/TT, Center for Seismic Studies 1300 North 17th Street Suite 1450 Arlington, VA 22209-2308

Dr. Stephen Bratt ARPA/NMRO 3701 North Fairfax Drive Arlington, VA 22203-1714

Dale Breding U.S. Department of Energy Recipient, IS-20, GA-033 Office of Arms Control Washington, DC 20585

Dr Lawrence Burdick 2780 Ardmore Foad San Marino, CA 91108

Dr. Robert Burridge Schlumberger-Doll Research Center Old Quarry Road Ridgefield, CT 06877

Dr. Jerry Carter Center for Seismic Studies 1300 North 17th Street Suite 1450 Arlington, VA 22209-2308

Dr. Martin Chapman Department of Geological Sciences Virginia Polytechnical Institute 21044 Derring Hall Blacksburg, VA 24061

Mr Robert Cockerham Arms Control & Disarmament Agency 320 21st Street North West Room 5741 Washington, DC 20451,

Prof. Vernon F. Cormier Department of Geology & Geophysics U-45, Room 207 University of Connecticut Storrs, CT 06268

Prof. Steven Day Department of Geological Sciences San Diego State University San Diego, CA 92182 Dr. Zoltan Der ENSCO, Inc. 5400 Port Royal Road Springfield, VA 22151-2388

Prof. Adam Dziewonski Hoffman Laboratory, Harvard University Dept. of Earth Atmos. & Planetary Sciences 20 Oxford Street Cambridge, MA 02138

Prof. John Ebel
Department of Geology & Geophysics
Boston College
Chestnut Hill, MA 02167

Eric Fielding SNEE Hall INSTOC Comell University Ithaca, NY 14853

Dr. Petr Firbas Institute of Physics of the Earth Masaryk University Brno Jecna 29a 612 46 Brno, Czech Republic

Dr. Mark D. Fisk Mission Research Corporation 735 State Street P.O. Drawer 719 Santa Barbara, CA 93102

Prof. Donald Forsyth Department of Geological Sciences Brown University Providence, RI 02912

Dr. Cliff Frolich Institute of Geophysics 8701 North Mopac Austin, TX 78759

Dr. Holly Given IGPP, A-025 Scripps Institute of Oceanography University of California, San Diego La Jolla, CA 92093

Dr. Jeffrey W. Given SAIC 10260 Campus Point Drive San Diego, CA 92121 Dr. Dale Glover Defense Intelligence Agency ATTN: ODT-1B Washington, DC 20301

Dan N. Hagedon Pacific Northwest Laboratories Battelle Boulevard Richland, WA 99352

Dr. James Hannon Lawrence Livermore National Laboratory P.O. Box 808 L-205 Livermore, CA 94550

Prof. David G. Harkrider Seismological Laboratory Division of Geological & Planetary Sciences California Institute of Technology Pasadena, CA 91125

Prof. Danny Harvey CIRES University of Colorado Boulder, CO 80309

Prof. Donald V. Helmberger Seismological Laboratory Division of Geological & Planetary Sciences California Institute of Technology Pasadena, CA 91125

Prof. Eugene Herrin Institute for the Study of Earth and Man Geophysical Laboratory Southern Methodist University Dallas, TX 75275

Prof. Robert B. Herrmann Department of Earth & Atmospheric Sciences St. Louis University St. Louis, MO 63156

Prof. Lane R. Johnson Seismographic Station University of California Berkeley, CA 94720

Prof. Thomas H. Jordan Department of Earth, Atmo-pheric & Planetary Sciences Massachusetts Institute of Technology Cambridge, MA 02139 Prof. Alan Kafka Department of Geology & Geophysics Boston College Chestnut Hill, MA 02167

Robert C. Kemerait ENSCO, Inc. 445 Pineda Court Melbourne, FL 32940

Dr. Karl Koch Institute for the Study of Earth and Man Geophysical Laboratory Southern Methodist University Dallas, Tx 75275

U.S. Dept of Energy Max Koontz, NN-20, GA-033 Office of Research and Develop. 1000 Independence Avenue Washington, DC 20585

Dr. Richard LaCoss MIT Lincoln Laboratory, M-200B P.O. Box 73 Lexington, MA 02173-0073

Dr. Fred K. Lamb University of Illinois at Urbana-Champaign Department of Physics 1110 West Green Street Urbana, IL 61801

Prof. Charles A. Langston Geosciences Department 403 Deike Building The Pennsylvania State University University Park, PA 16802

Jim Lawson, Chief Geophysicist Oklahoma Geological Survey Oklahoma Geophysical Observatory P.O. Box 8 Leonard, OK 74043-0008

Prof. Thorne Lay Institute of Tectonics Earth Science Board University of California, Santa Cruz Santa Cruz, CA 95064

Dr. William Leith U.S. Geological Survey Mail Stop 928 Reston, VA 22092 Mr. James F. Lewkowicz Phillips Laboratory/GPEH 29 Randolph Road Hanscom AFB, MA 01731-3010(2 copies)

Mr. Alfred Lieberman ACDA/VI-OA State Department Building Room 5726 320-21st Street, NW Washington, DC 20451

Prof. L. Timothy Long School of Geophysical Sciences Georgia Institute of Technology Atlanta, GA 30332

Dr. Randolph Martin, III New England Research, Inc. 76 Olcott Drive White River Junction, VT 05001

Dr. Robert Masse Denver Federal Building Box 25046, Mail Stop 967 Denver, CO 80005

Dr. Gary McCartor
Department of Physics
Southern Methodist University
Dallas, TX 75275

Prof. Thomas V. McEvilly Seismographic Station University of California Berkeley, CA 94720

Dr. Art McGarr U.S. Geological Survey Mail Stop 977 U.S. Geological Survey Menlo Park, CA 94025

Dr. Keith L. McLaughlin S-CUBED A Division of Maxwell Laboratory P.O. Box 1620 La Jolla, CA 92038-1620

Stephen Miller & Dr. Alexander Florence SRI International 333 Ravenswood Avenue Box AF 116 Menlo Park, CA 94025-3493 Prof. Bernard Minster IGPP, A-025 Scripps Institute of Oceanography University of California, San Diego La Jolla, CA 92093

Prof. Brian J. Mitchell Department of Earth & Atmospheric Sciences St. Louis University St. Louis, MO 63156

Mr. Jack Murphy S-CUBED A Division of Maxwell Laboratory 11800 Sunrise Valley Drive, Suite 1212 Reston, VA 22091 (2 Copies)

Dr. Keith K. Nakanishi Lawrence Livermore National Laboratory L-025 P.O. Box 808 Livermore, CA 94550

Prof. John A. Orcutt IGPP, A-025 Scripps Institute of Oceanography University of California, San Diego La Jolla, CA 92093

Prof. Jeffrey Park Kline Geology Laboratory P.O. Box 6666 New Haven, CT 06511-8130

Dr. Howard Patton Lawrence Livermore National Laboratory L-025 P.O. Box 808 Livermore, CA 94550

Dr. Frank Pilotte HQ AFTAC/IT 1030 South Highway A1A Patrick AFB, FL 32925-3002

Dr. Jay J. Pulli Radix Systems, Inc. 201 Perry Parkway Gaithersburg, MD 20877

Dr. Robert Reinke ATTN: FCTVTD Field Command Defense Nuclear Agency Kirtland AFB, NM 87115 Prof. Paul G. Richards Lamont-Doherty Geological Observatory of Columbia University Palisades, NY 10964

Mr. Wilmer Rivers Teledyne Geotech 314 Montgomery Street Alexandria, VA 22314

Dr. Alan S. Ryall, Jr. ARPA/NMRO 3701 North Fairfax Drive Arlington, VA 22203-1714

Dr.Chandan K. Saikia Woodward Clyde- Consultants 566 El Dorado Street Pasadena, CA 91101

Dr. Richard Sailor TASC, Inc. 55 Walkers Brook Drive Reading, MA 01867

Prof. Charles G. Sammis Center for Earth Sciences University of Southern California University Park Los Angeles, CA 90089-0741

Prof. Christopher H. Scholz Lamont-Doherty Geological Observatory of Columbia University Palisades, NY 10964

Dr. Susan Schwartz Institute of Tectonics 1156 High Street Santa Cruz, CA 95064

Secretary of the Air Force (SAFRD) Washington, DC 20330

Office of the Secretary of Defense DDR&E Washington, DC 20330

Thomas J. Sereno, Jr. Science Application Int'l Corp. 10260 Campus Point Drive San Diego, CA 92121

Dr. Michael Shore
Defense Nuclear Agency/SPSS
6801 Telegraph Road
Alexandria, VA 22310

Dr. Robert Shumway University of California Davis Division of Statistics Davis, CA 95616

Dr. Matthew Sibol Virginia Tech Seismological Observatory 4044 Derring Hall Blacksburg, VA 24061-0420

Prof. David G. Simpson IRIS, Inc. 1616 North Fort Myer Drive Suite 1050 Arlington, VA 22209

Donald L. Springer Lawrence Livermore National Laboratory L-025 P.O. Box 808 Livermore, CA 94550

Dr. Jeffrey Stevens S-CUBED A Division of Maxwell Laboratory P.O. Box 1620 La Jolla, CA 92038-1620

Lt. Col. Jim Stobie ATTN: AFOSR/NL 110 Duncan Avenue Bolling AFB Washington, DC 2033 2-0001

Prof. Brian Stemp Los Alamos Mational Laboratory EES-3 Mail Stop C-335 Los Alamos, NM 87545

Prof. Jeremiah Sullivan University of Illinois at Urbana-Champaign Department of Physics 1110 West Green Street Urbana, IL 61801 Prof. L. Sykes Lamont-Doherty Geological Observatory of Columbia University Palisades, NY 10964

Dr. David Taylor ENSCO, Inc. 445 Pineda Court Melbourne, FL 32940

Dr. Steven R. Taylor Los Alamos National Laboratory P.O. Box 1663 Mail Stop C335 Los Alamos, NM 87545

Prof. Clifford Thurber
University of Wisconsin-Madison
Department of Geology & Geophysics
1215 West Dayton Street
Madison, WS 53706

Prof. M. Nafi Toksoz Earth Resources Lab Massachusetts Institute of Technology 42 Carleton Street Cambridge, MA 02142

Dr. Larry Tumbull CIA-OSWR/NED Washington, DC 20505

Dr. Gregory van der Vink IRIS, Inc. 1616 North Fort Myer Drive Suite 1050 Arlington, VA 22209

Dr. Karl Veith EG&G 5211 Auth Road Suite 240 Suitland, MD 20746

Prof. Terry C. Wallace Department of Geosciences Building #77 University of Arizona Tuscon, AZ 85721

Dr. Thomas Weaver Los Alamos National Laboratory P.O. Bex 1663 Mail Stop C335 Los Alamos, NM 87545 Dr. William Wortman Mission Research Corporation 8560 Cinderbed Road Suite 700 Newington, VA 22122

Prof. Francis T. Wu
Department of Geological Sciences
State University of New York
at Binghamton
Vestal, NY 13901

Prof Ru-Shan Wu University of California, Santa Cruz Earth Sciences Department Santa Cruz , CA 95064

ARPA, OASB/Library 3701 North Fairfax Drive Arlington, VA 22203-1714

HQ DNA ATTN: Technical Library Washington, DC 20305

Defense Intelligence Agency Directorate for Scientific & Technical Intelligence ATTN: DTIB Washington, DC 20340-6158

Defense Technical Information Center Cameron Station Alexandria, VA 22314 (2 Copies)

TACTEC
Battelle Memorial Institute
505 King Avenue
Columbus, OH 43201 (Final Report)

Phillips Laboratory ATTN: XPG 29 Randolph Road Hanscom AFB, MA 01731-3010

Phillips Laboratory ATTN: GPE 29 Randolph Road Hanscon: AFB MA 01731-3010 Phillips Laboratory ATTN: TSML 5 Wright Street Hanscom AFB, MA 01731-3004

Phillips Laboratory ATTN: PL/SUL 3550 Aberdeen Ave SE Kirtland, NM 87117-5776 (2 copies)

Dr. Michel Bouchon I.R.I.G.M.-B.P. 68 38402 St. Martin D'Heres Cedex, FRANCE

Dr. Michel Campillo
Observatoire de Grenoble
I.R.I.G.M.-B.P. 53
38041 Grenoble, FRANCE

Dr. Kin Yip Chun Geophysics Division Physics Department University of Toronto Ontario, CANADA

Prof. Hans-Peter Harjes Institute for Geophysic Ruhr University/Bochum P.O. Box 102148 4630 Bochum 1, GERMANY

Prof. Eystein Husebye NTNF/NORSAR P.O. Box 51 N-2007 Kjeller, NORWAY

David Jepsen Acting Head, Nuclear Monitoring Section Bureau of Mineral Resources Geology and Geophysics G.P.O. Box 378, Canberra, AUSTRALIA

Ms. Eva Johannisson Senior Research Officer FOA S-172 90 Sundbyberg, SWEDEN

Dr. Peter Marshall Procurement Executive Ministry of Defense Blacknett, Brimpton Reading FG7-FRS, UNITED KINGDOM Dr. Bernard Massinon, Dr. Pierre Mechler Societe Radiomana 27 rue Claude Bernard 75005 Paris, FRANCE (2 Copies)

Dr. Svein Mykkeltveit NTNT/NORSAR P.O. Box 51 N-2007 Kjeller, NORWAY (3 Copies)

Prof. Keith Priestley University of Cambridge Bullard Labs, Dept. of Earth Sciences Madingley Rise, Madingley Road Cambridge CB3 OEZ, ENGLAND

Dr. Jorg Schlittenhardt Federal Institute for Geosciences & Nat'l Res. Postfach 510153 D-30631 Hannover, GERMANY

Dr. Johannes Schweitzer Institute of Geophysics Ruhr University/Bochum P.O. Box 1102148 4360 Bochum 1, GERMANY

Trust & Verify VERTIC Carrara House 20 Embankment Place London WC2N 6NN, ENGLAND