

SDTIC
ELECTE
DEC 28 1994
C D

ARMY RESEARCH LABORATORY



Natural Aerosol Extinction Module XSCALE 92 User's Guide

by Robert P. Fiegel

edited by
Patti L. Gillespie and Alan E. Wetmore
Battlefield Environment Directorate

ARL-TR-273

November 1994

APPROVED FOR RELEASE
Approved for public release;
Distribution Unlimited

Approved for public release; distribution is unlimited.

19941221 001

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

Destruction Notice

When this document is no longer needed, destroy it by any method that will prevent disclosure of its contents or reconstruction of the document.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE November 1994	3. REPORT TYPE AND DATES COVERED Final	
4. TITLE AND SUBTITLE Natural Aerosol Extinction Module XSCALE 92 User's Guide			5. FUNDING NUMBERS	
6. AUTHOR(S) Robert P. Fiegel				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Battlefield Environment Directorate Attn: AMSRL-BE-E White Sands Missile Range, NM 88002-5501			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-273	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory 2800 Powder Mill Road Adelphi, MD 20783-1145			10. SPONSORING / MONITORING AGENCY REPORT NUMBER ARL-TR-273	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE A	
13. ABSTRACT (Maximum 200 words) XSCALE* is an empirical and semi-empirical model based on measurements and theoretical calculations of extinction due to naturally occurring aerosols. This model can be used to calculate transmission along horizontal and slant paths near the surface of the earth. This description of XSCALE is an enhancement of descriptions previously released. * XSCALE applies to the wavelength range 0.2-12.5 μm .				
14. SUBJECT TERMS aerosol extinction, transmittance, natural aerosols, horizontal paths, slant paths, 0.2-12.5 μm wavelengths			15. NUMBER OF PAGES 152	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT SAR	

Acknowledgment

The author would like to acknowledge the efforts of several people in the work of developing and improving the EOSAEL 92 models. Chapter 2 is largely based upon the XSCALE 87 User's Guide written by Dr. Lou Duncan, Dr. Mary Ann Seagraves, and Dr. Mel Heaps. Discussions with these early researchers on XSCALE history and model development have been enlightening. Thanks go to Dr. Henry Rachele for several discussions on the physics of models of the region below a cloud. The author appreciates the work of Dr. Alan Wetmore and Mr. Ed Creegan in bringing standardization to the EOSAEL modules, their knowledge of Fortran when the programming became involved, and their help in using Latex. The responsibility for any lack of clarity is Dr. Fiegel's. Other contributors include Bruce Miers, Dick Larsen, James Lindberg, and John Crain who have all helped by finding and generously sharing various pieces of data used in this manual.

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

Contents

Acknowledgment.....	1
1. Introduction	9
1.1 <i>Names of Things</i>	9
1.2 <i>Availability</i>	9
1.2.1 Mailing Address	10
1.2.2 Phone and Electronic Mail	10
2. Background.....	11
2.1 <i>Attenuation Along Horizontal Lines of Sight</i>	11
2.1.1 Hazes	11
2.1.2 Fogs.....	22
2.1.3 Desert Aerosol	23
2.1.4 Attenuation Through Rain.....	25
2.1.5 Attenuation Through Falling Snow	28
2.1.6 Attenuation Through Blowing Snow.....	30
2.1.7 Attenuation Through Snow and Fog.....	31
2.1.8 Attenuation Through Ice Fog	32
2.2 <i>Attenuation Along Inclined Lines of Sight</i>	35
2.2.1 Introduction	35
2.2.2 Basis of Vertical Profile Model.....	37
2.2.3 Parameterization of the Model.....	40
2.2.4 Use of the Vertical Profile Model	42
2.2.5 Vertical Profile of Blowing Snow.....	45
3. Caveats.....	49
3.1 <i>Grade of Software</i>	49
3.2 <i>Model Failure</i>	49
3.3 <i>Verification Tests</i>	52
3.3.1 Previous Tests.....	53
3.3.2 Tests Since Last User's Guide.....	55
4. Operations Guide.....	73
4.1 <i>Inputs</i>	73
4.1.1 Input Records.....	73
4.1.2 Record Combinations.....	80
4.2 <i>Output</i>	82

5. Sample Runs	83
5.1 <i>Overview</i>	83
5.2 <i>Default Horizontal Path</i>	83
5.3 <i>Simplest Slant Path</i>	87
5.4 <i>Multiple Runs, Horizontal Path</i>	90
5.5 <i>Desert Aerosol, 3.392 μm</i>	97
5.6 <i>Desert Aerosol, 3.20 μm</i>	100
5.7 <i>Desert Aerosol, 3-5 μm</i>	103
5.8 <i>Ice Fog</i>	106
5.9 <i>Slant Path Through a Cloud</i>	109
5.10 <i>Multiple Run with Mistake</i>	115
5.11 <i>Slant Path and Boundary Defaults Dependence on Visibility</i>	118
5.12 <i>Response Function Option</i>	124
 References	 127
 Acronyms and Abbreviations	 135
 Appendix	
<i>Plots Showing the Meppen 80 Measured Extinction at 10.6 μm and the XSCALE Calculated Extinction</i>	137
 Distribution	 143

Figures

1. Rural aerosol, 90 percent relative humidity. Measured and modeled particle size distribution for a rural aerosol from the Cardington test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points	15
2. Maritime aerosol, 90 percent relative humidity. Measured and modeled particle size distribution for a maritime aerosol from the Cardington test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points	16
3. Rural aerosol, 70 percent relative humidity. Measured and modeled particle size distribution for a rural aerosol from the Meppen 80 test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points	17

4. Maritime aerosol, 70 percent relative humidity. Measured and modeled particle size distribution for a maritime aerosol from the Meppen 80 test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points.....	18
5. Maritime extinction as a function of wavelength and relative humidity for a constant density of 4,000 particles/cm ³ . Semilog scale used.....	19
6. Rural extinction as a function of wavelength and relative humidity for a constant density of 15,000 particles/cm ³ . Semilog scale used.....	20
7. Urban extinction as a function of wavelength and relative humidity for a constant density of 20,000 particles/cm ³ . Semilog scale used.....	21
8. Fog-one and fog-two extinction as a function of wavelength. Fog-one density is 20 particles/cm ³ ; fog-two density is 200 particles/cm ³ . Semilog scale used.....	23
9. Desert particle size distribution at four wind speeds: 0, 10, 20, and 30 m/s. Arbitrary particle densities, see table 2.....	24
10. Desert extinction as a function of wavelength and wind speed. Semilog scale used.....	26
11. Slant path geometry.....	36
12. Four regions represented by the vertical structure algorithm.....	40
13. Data-to-model extinction ratio at 0.55 μm . Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.....	56
14. Data-to-model extinction ratio at 1.06 μm . Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.....	57
15. Data-to-model extinction ratio at 10.6 μm . Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.....	57
16. Frequency distribution of the surface extinction in steps of 2 km ⁻¹ for the low cloud/fog cases.....	59
17. Frequency distribution of the cloud thickness which minimizes χ_r^2 in steps of 10 m for low cloud/fog cases.....	60
18. Frequency distribution of the upper air extinction in steps of 0.025 km ⁻¹	60
19. Transmittance determined from the measured visibilities (y-axis) versus transmittance calculated from the model extinction (x-axis) for the low cloud/fog cases. The line has slope 1.....	61
20. Low cloud profile, $\chi_r^2 = 1.0$, transmittance calculated from the data is 23 \pm 19 percent, from the model 18 percent. The measured ceiling is 35 \pm 8 m, the calculated ceiling is 25 m, the cloud top is at 76 m.....	62
21. Advection fog profile, $\chi_r^2 = 2.0$, transmittance calculated from the data is 8 \pm 3 percent, from the model 11 percent. The measured ceiling is 10 \pm 8 m, the calculated ceiling is 0 m, the cloud top is at 75 m.....	62

22. Frequency distribution of the surface extinction in steps of 1 km ⁻¹ for inversion layer cases	63
23. Frequency distribution of the upper air extinction in steps of 0.025 km ⁻¹ for inversion layer cases.....	63
24. Frequency distribution of the inversion layer height determined to minimize χ_r^2 in steps of 10 m.....	64
25. Transmittance determined from the measured visibilities (y-axis) versus transmittance calculated from the model extinctions (x-axis) for the inversion layer cases. The line has slope 1.....	65
26. Inversion profile, $\chi_r^2 = 0.5$; transmittance calculated from the data is 70 ±8 percent, from the model 67 percent	65
27. Inversion profile, $\chi_r^2 = 2.0$; transmittance calculated from the data is 70 ±7 percent, from the model 73 percent	66
28. Meppen balloon flight data times. The y-axis denotes the type of profile, or an unsuitable data block.....	67
29. Cardington balloon flight data times. The y-axis denotes the type of profile, or an unsuitable data block.....	67
30. Sprakensehl tower data, type III.A.1 episode times. The y-axis denotes the type of profile, or an unsuitable data block	67
31. Frequency distribution of χ_r^2 between measured and XSCALE cloud profiles	68
32. Frequency distribution of χ_r^2 between measured and XSCALE haze profiles	68
33. Meppen flight 1 and XSCALE profile	69
34. Meppen flight 7 and XSCALE profile	69
35. Cardington flight 5 and XSCALE profile.....	70
36. Cardington flight 27 and XSCALE profile	70
37. Sprakensehl block 14 and XSCALE profile	70
38. Sprakensehl block 926 and XSCALE profile.....	70
39. Meppen flight 89 and XSCALE profile.....	70
40. Meppen flight 53 and XSCALE profile.....	70
41. Sprakensehl block 735 and XSCALE profile.....	71
42. Sprakensehl block 790 and XSCALE profile.....	71

Tables

1. Mode radii and standard deviations of the XSCALE aerosols. The standard deviation values are appropriate for the Shettle-Fenn particle size distribution of equation (2)	12
2. Mode radii and standard deviations of the XSCALE aerosols. The standard deviation values are appropriate for the Shettle-Fenn particle size distribution of equation (2)	25

3. Rain, type, and rate	28
4. XSCALE multimodal ice fog particle size distribution	33
5. Extinction equation parameters	39
6. Grades of software.....	49
7. Detectable errors.....	50
8. The AERO record. Use this record to specify the aerosol present, the required meteorological parameters, and one detector parameter.....	74
9. The HORZ record. Use this record for a horizontal path.....	75
10. The SLNH record. Use this record for slant path predictions. One of two ways to specify a slant path	75
11. The SLNS record. Use this record for slant path predictions. One of two ways to specify a slant path	75
12. The CLD record. Use this record to specify the altitude of the low visibility layer	76
13. The ICEF record. Use this record to provide nondefault information for the ice fog aerosol. One to three ICEF records may be present, one for each water vapor source (see section 2.1.7 and table 4).....	77
14. The PLOT record. Use this record to direct the saving of the extinction profile generated by a slant path prediction	78
15. The RESF record. Use this record to define a detector response function. The predicted aerosol transmittance will be modified by this function before the transmittance is printed out.....	78
16. The GO record. Use this record to specify that multiple XSCALE runs are to be made.....	79
17. The DONE record specifies that input for the last (or only) XSCALE run is complete and execution is to begin.....	79

1. Introduction

XSCALE calculates the transmittance through naturally occurring aerosols of haze, fog, rain, snow, and ice fog. Slant path transmittance for wavelengths of 0.2 – 12.5 μm are calculated through haze, fog, cloud, and blowing snow; these transmittances are calculated either at a single wavelength or as a band average. The module XSCALE is very similar to XSCALE 87 and the interim XSCALE 89. A few enhancements have been added and, in some cases, the execution time has been reduced. The algorithms are empirical and semi-empirical models of theoretical calculations and measurements. The physical models and algorithms will be discussed in chapter 2.

1.1 Names of Things

EOSAEL standard typefaces will be used for descriptions:

1. Names of modules will be in new helvetica narrow style.
2. Variable and subroutine names will be in courier style.
3. Sample input and sample output will be in typewriter style but monospaced to allow column alignment.

1.2 Availability

EOSAEL 92 is available at no cost to U.S. Government agencies, specified Allied organizations, and their authorized contractors. U.S. Government agencies needing EOSAEL 92 should send a letter of request, signed by a branch chief or division director, to U.S. Army Research Laboratory (ARL). Contractors should have their Government contract monitor send the letter of request. Allied organizations must request EOSAEL 92 through their national representative. The EOSAEL 92 point of contact at ARL is Dr. Alan Wetmore.

Intended uses should be included with requests. Requests should also include the type of nine-track tape necessary for computer execution. Tape formats are as follows: ASCII, UNIX "tar" format in either 1600 or

6250 bpi, or SUN cartridge. EOSAEL 92 cannot be supplied on any other media. Documentation for modules are included.

1.2.1 Mailing Address

Directorate Executive
Battlefield Environment Directorate
Army Research Laboratory
ATTN: AMSRL-BE-S (EOSAEL)
White Sands Missile Range, NM 88002-5501

1.2.2 Phone and Electronic Mail

(505) 678-5563
FAX (505) 678-2432
DSN 258-5563
email awetmore@arl.army.mil

2. Background

Weather has a profound effect on the performance of all electro-optical (EO) devices that depend on the propagation of electromagnetic energy through the atmosphere. XSCALE models the wavelength dependence of transmittance on natural aerosols (i.e., haze, fog, low clouds, snow, rain, and ice fog) for line-of-sight (LOS) paths within 2 km of the Earth's surface. The aerosols are assumed to be horizontally homogeneous. Beer's law is used to calculate horizontal transmittance:

$$T_{\lambda}(R) = \exp(-K_{\lambda} R) \quad (1)$$

where

$T_{\lambda}(R)$ = the transmittance at range R and wavelength λ
 K_{λ} = the extinction coefficient at λ .

The wavelength range modeled by XSCALE is: $0.2 < \lambda < 12.5 \mu\text{m}$. The model has been under development since 1980 at ARL's Battlefield Environment Directorate (BED), formerly the U.S. Army Atmospheric Sciences Laboratory (ASL). Aerosols will be individually discussed in this chapter. Horizontal LOS paths will be considered first, then slant LOS paths.

2.1 Attenuation Along Horizontal Lines of Sight

2.1.1 Hazes

An air mass containing particles from the Earth's surface is referred to as haze. The particles become part of the air mass either by the action of surface winds in rural or maritime settings or by human activities in urban settings. The three different air masses available in XSCALE are mathematically distinguished by representative particle size distributions.

The rural aerosol is a continental-type air mass composed of 70 percent water soluble substances and 30 percent dust-like particles. The urban aerosol is the rural aerosol with the addition of soot and combustion products. The urban particle size distribution is a combination of the rural distribution plus carbonaceous particles in a ratio of 4 to 1. The maritime aerosol is the rural distribution without large particles and with 1 percent

given over to a sea-salt distribution. While the sea-salt fraction depends on location and weather, the 1 percent value was chosen as an average.

A theoretical aerosol model of the lower atmosphere is used to calculate extinction and absorption coefficients for the rural, urban, and maritime hazes. [1] This model assumes a bimodal, log normal particle size distribution of the following form:

$$\frac{dn(r)}{dr} = \sum_{i=1}^2 \frac{N_i}{\ln 10 \sqrt{2\pi} r \sigma_i} \exp - \left[\frac{(\log r - \log r_i)^2}{2\sigma_i^2} \right], \quad (2)$$

where

- r_i = the mode radius of mode i
- N_i = the density associated with r_i
- σ_i = the standard deviation for mode i .

Table 1 contains the values of r_i and σ_i . [1] This equation is equivalent to that used in the Mie calculation module AGAUS except that the denominator of the exponential in AGAUS is $2 (\ln(\sigma_i))^2$ and the numerator in AGAUS uses the natural rather than the common logarithm. Consequently, the standard deviation used in AGAUS is 10 raised to the Shettle-Fenn standard deviation:

$$\sigma_A = 10^{\sigma_{SF}}. \quad (3)$$

Table 1. Mode radii and standard deviations of the XSCALE aerosols. The standard deviation values are appropriate for the Shettle-Fenn particle size distribution of equation (2)

	Maritime		Rural		Urban	
Relative Humidity	$N_1 = 0.99$	$N_2 = 0.01$	$N_1 = 0.999875$	$N_2 = 0.000125$	$N_1 = 0.999875$	$N_2 = 0.000125$
	$\sigma_1 = 0.35$	$\sigma_2 = 0.4$	$\sigma_1 = 0.35$	$\sigma_2 = 0.4$	$\sigma_1 = 0.35$	$\sigma_2 = 0.4$
	r_1	r_2	r_1	r_2	r_1	r_2
0%	0.02700	0.1600	0.02700	0.4300	0.02500	0.4000
50%	0.02748	0.1711	0.02748	0.4377	0.02563	0.4113
70%	0.02846	0.2041	0.02846	0.4571	0.02911	0.4777
80%	0.03274	0.3180	0.03274	0.5477	0.03514	0.5805
90%	0.03884	0.3803	0.03884	0.6462	0.04187	0.7061
95%	0.04238	0.4606	0.04238	0.7078	0.04909	0.8634
98%	0.04751	0.6024	0.04751	0.9728	0.05996	1.1691
99%	0.05215	0.7505	0.05215	1.1755	0.06847	1.4858

The particle size distribution is a function of the locale where the air mass was formed and the relative humidity. Particles grow with increasing humidity. [2] Based on the dn/dr of equation (2) and the refractive indices of the constituents, the standard Mie theory is used to calculate the extinction and absorption coefficients. [1] The resulting coefficients have been tabulated for each haze at 8 relative humidities (0, 50, 70, 80, 90, 95, 98, and 99 percent) and at 31 wavelengths (in the range of 0.2 – 12.5 μm) for each humidity. [1] These results are normalized at each humidity to the 0.55 μm extinction and included as a table in XSCALE.

XSCALE uses the empirical Koschmieder relation:

$$K_{0.55} = \frac{3.912}{V} \quad (4)$$

to determine $K_{0.55}$ from V , where V is the meteorological range, or visibility, and 3.912 corresponds to a 2 percent contrast threshold. XSCALE uses input values for relative humidity, visibility, and wavelength to scale the visible extinction to the infrared (IR) extinction. This is achieved by linear interpolation between the tabulated extinctions for wavelengths and logarithmic interpolation for the humidity. The subroutines TRPCTL and INTERP handle these interpolations.

Since 1980, BED, formerly ASL, has conducted field tests to measure particle size distributions under low visibility conditions. [3,4,5] Data from the Project Meppen 80 test, conducted during the winter in western Germany, and the Cardington test, conducted during the winter of 1983 in England, were used for comparison with theoretical air mass particle size distributions. Figures 1 and 2 show the particle size distributions from the Cardington test for rural and maritime air masses compared to the theoretical rural and maritime aerosols with 90 percent relative humidity. Figure 3 shows a similar comparison between a rural air mass measured during the Meppen test and a theoretical rural aerosol at 70 percent relative humidity. Figure 4 compares a maritime air mass measured at Meppen to a theoretical maritime aerosol at 70 percent relative humidity.

In figures 1 through 4, the particle size distributions measured during several balloon flights have been normalized to the particle surface area. The vertical bars through the data points represent ± 1 standard deviation. The small standard deviations in figure 1 are due to the small data set available for that air mass type. The noticeable bump in the data in the 0.7 – 1.0 μm range possibly is due to the local addition of pollutants. The overall agreement justifies the use of the model to predict extinction and absorption coefficients of the atmosphere. There is no comparison of measured extinction coefficients to model predictions for these tests, although the Mie theory is very accurate for these particles.

This model does not predict extinction and absorption coefficients that vary with humidity and wavelength. Graphs of the extinction coefficients for maritime, rural, and urban aerosols are shown in figures 5 through 7. These figures show the wavelength variation of the extinction coefficient at 8 humidity levels. The plots represent an aerosol with a constant number density; at any wavelength, the extinction increases with humidity. These figures are identical to the corresponding figures in the Shettle-Fenn report. [1] The extinction coefficient is the sum of the scattering and absorption coefficients.

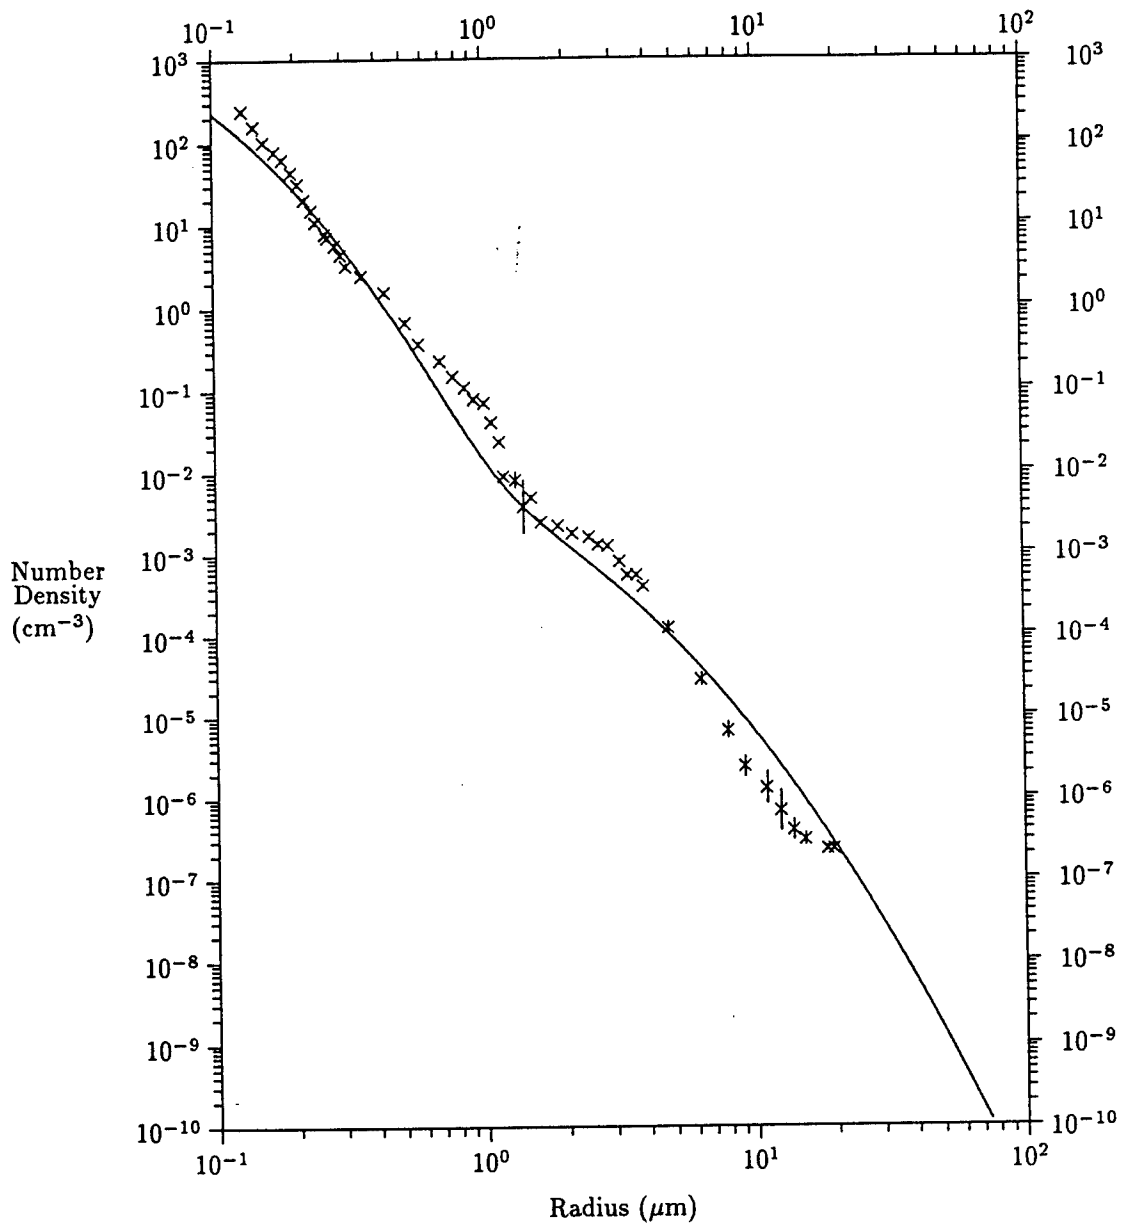


Figure 1. Rural aerosol, 90 percent relative humidity. Measured and modeled particle size distribution for a rural aerosol from the Cardington test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points.

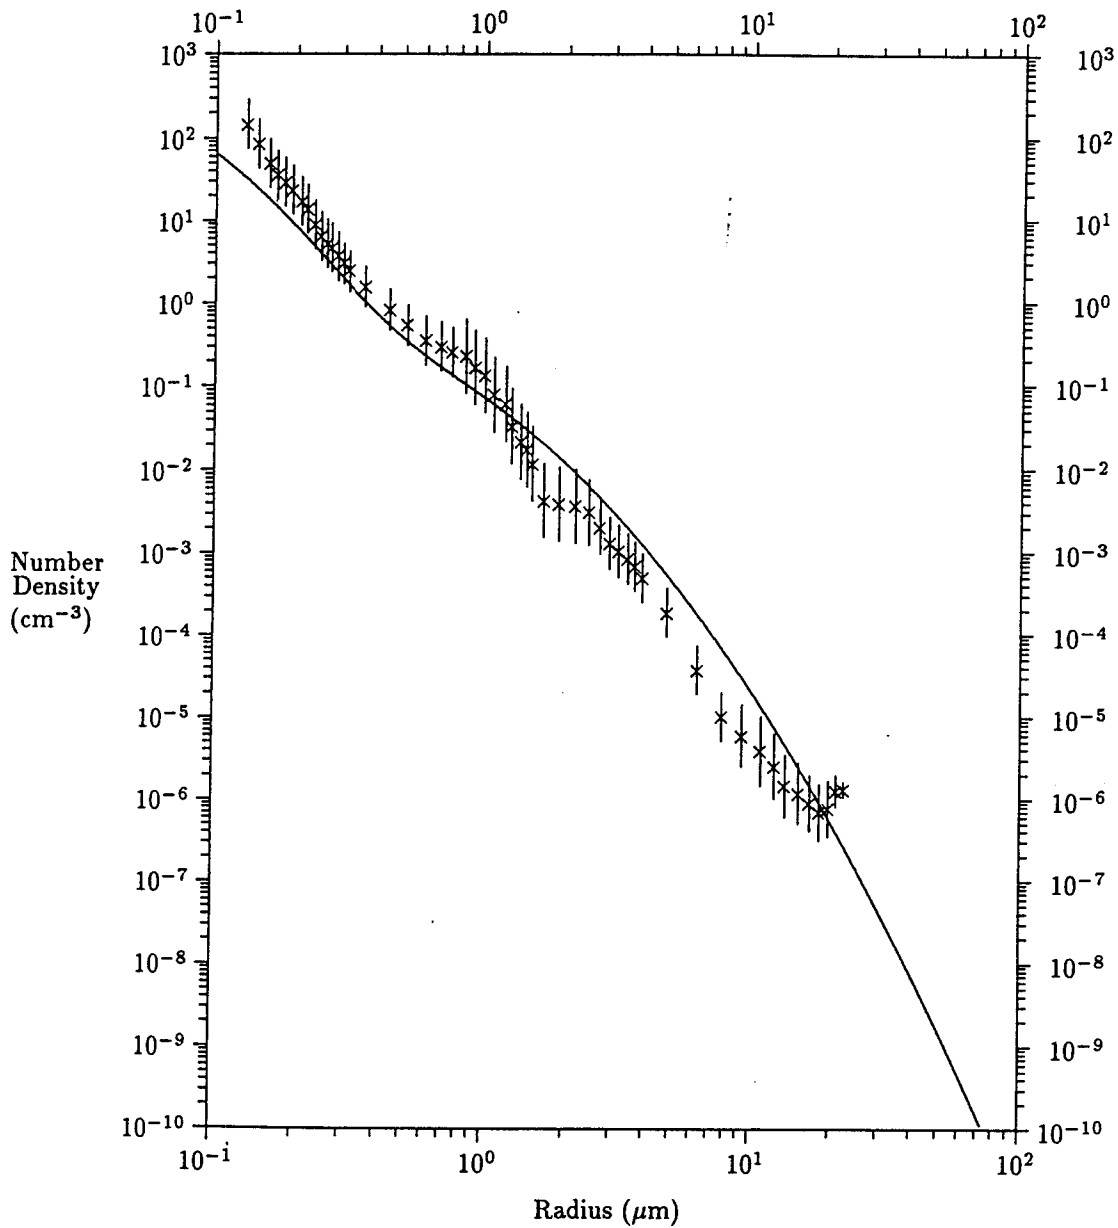


Figure 2. Maritime aerosol, 90 percent relative humidity. Measured and modeled particle size distribution for a maritime aerosol from the Cardington test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points.

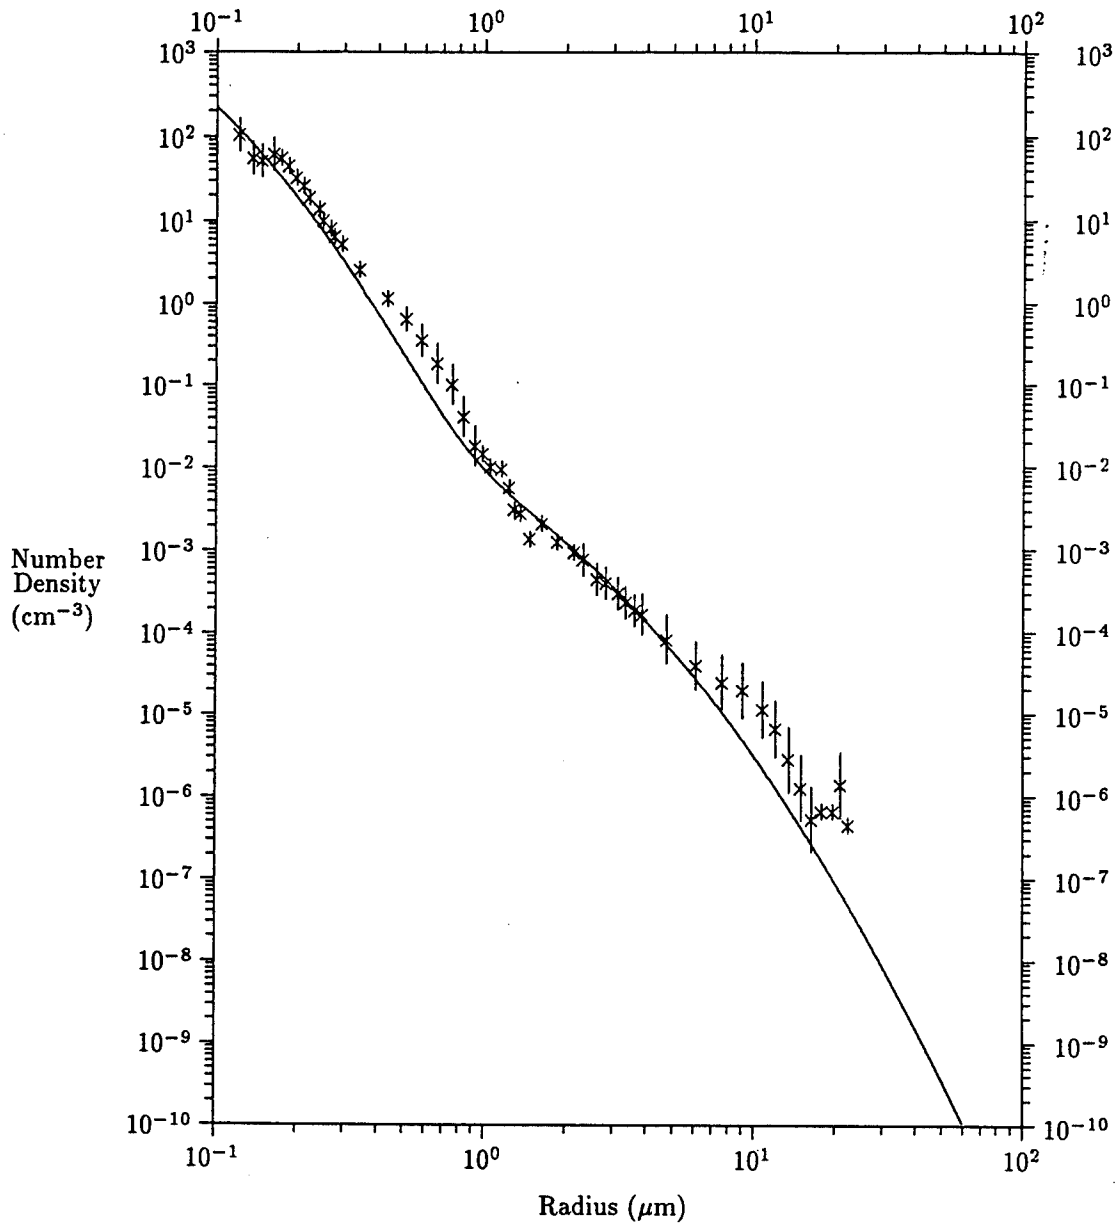


Figure 3. Rural aerosol, 70 percent relative humidity. Measured and modeled particle size distribution for a rural aerosol from the Meppen 80 test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points.

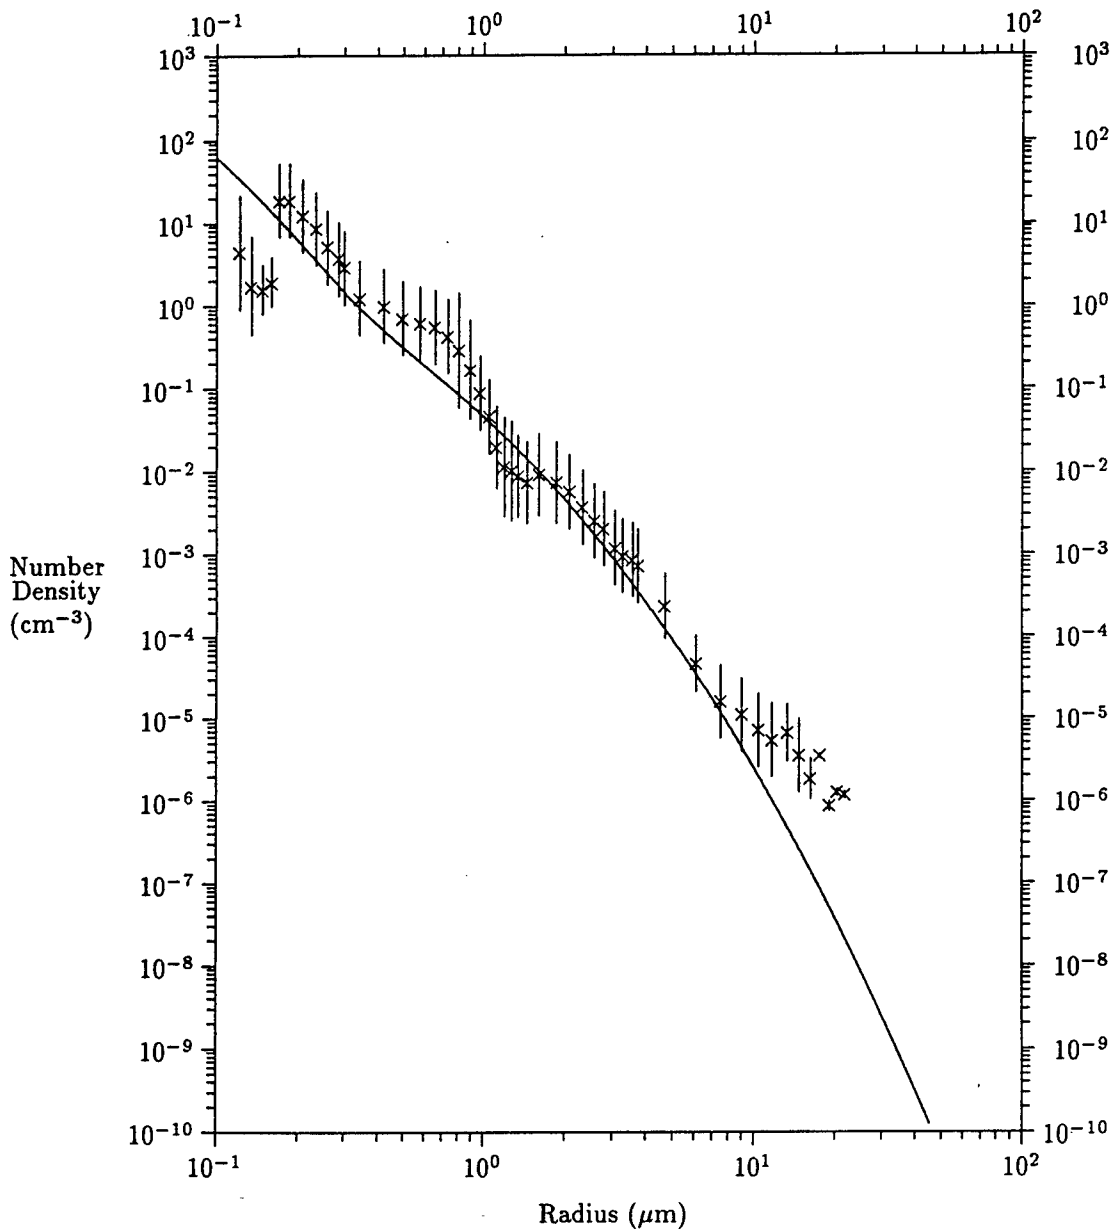


Figure 4. Maritime aerosol, 70 percent relative humidity. Measured and modeled particle size distribution for a maritime aerosol from the Meppen 80 test. The solid line represents the theoretical size distribution that has been normalized to the particle surface area. The vertical bars represent ± 1 standard deviation about the data points.

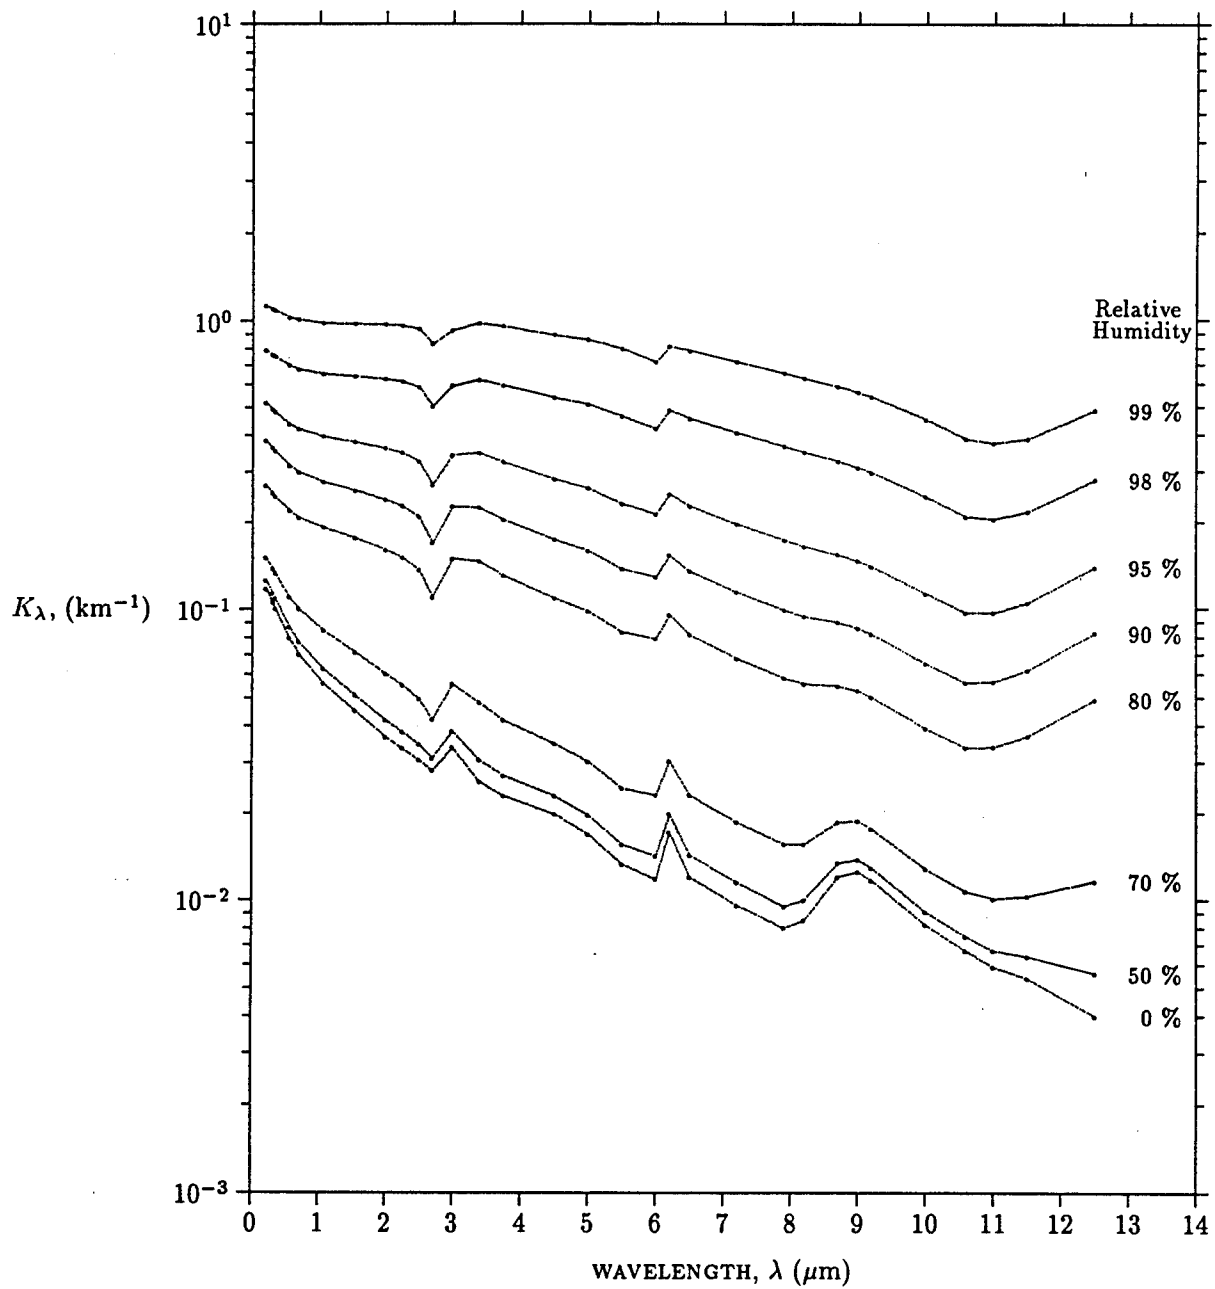


Figure 5. Maritime extinction as a function of wavelength and relative humidity for a constant density of 4,000 particles/cm³. Semilog scale used.

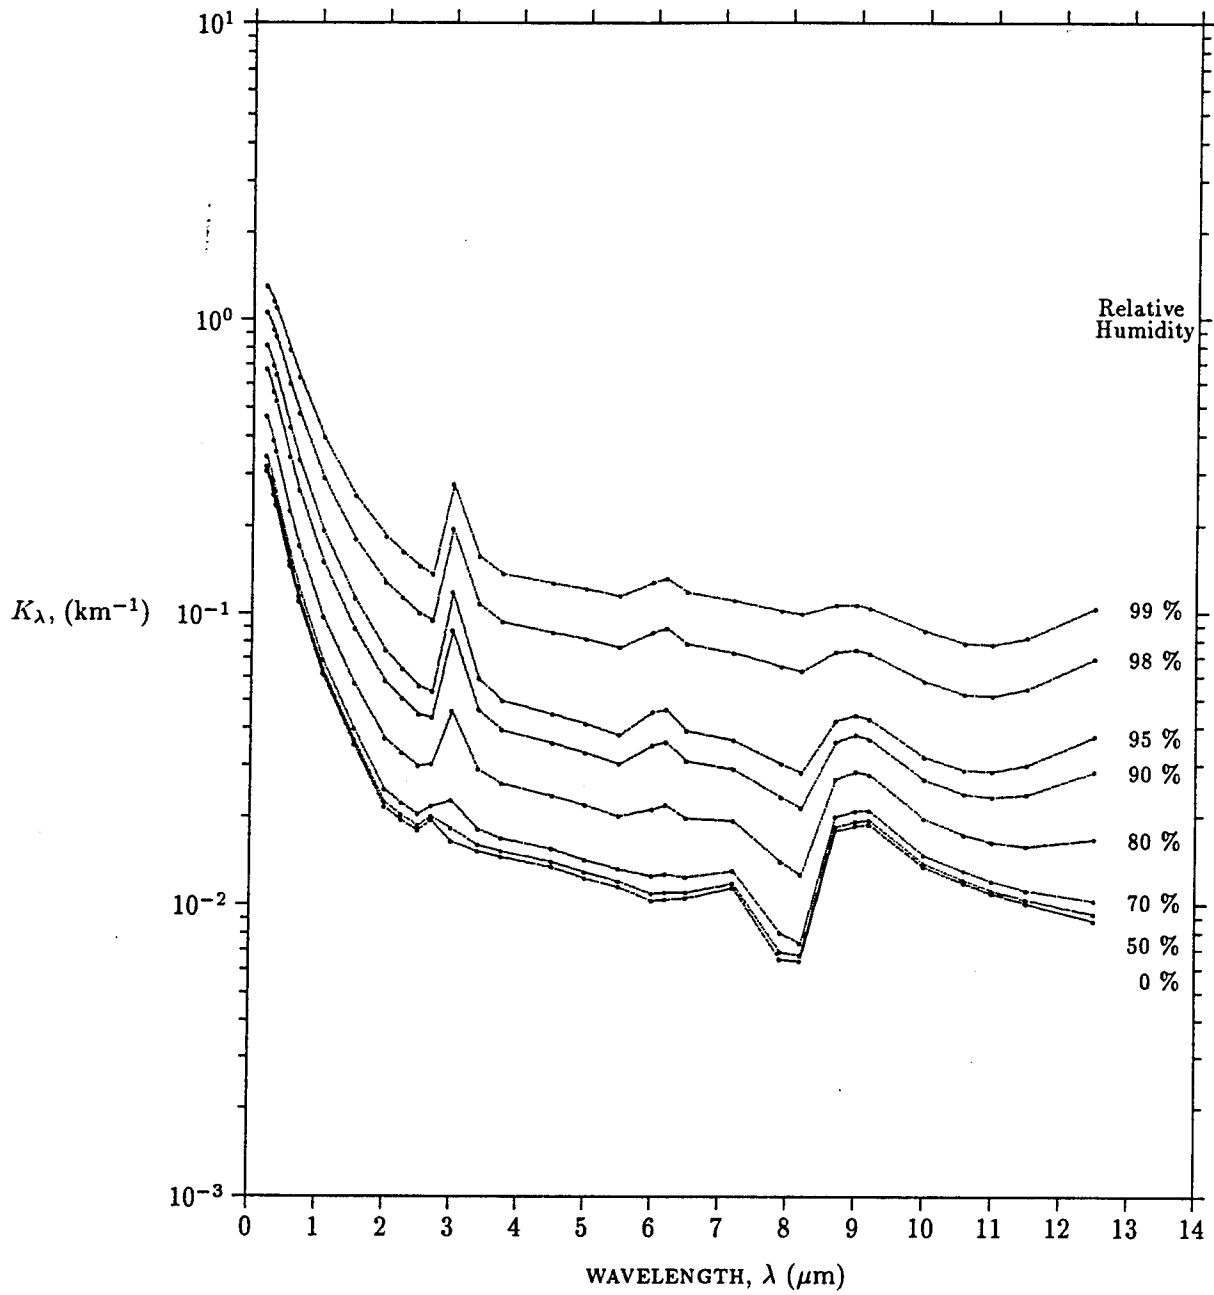


Figure 6. Rural extinction as a function of wavelength and relative humidity for a constant density of 15,000 particles/cm³. Semilog scale used.

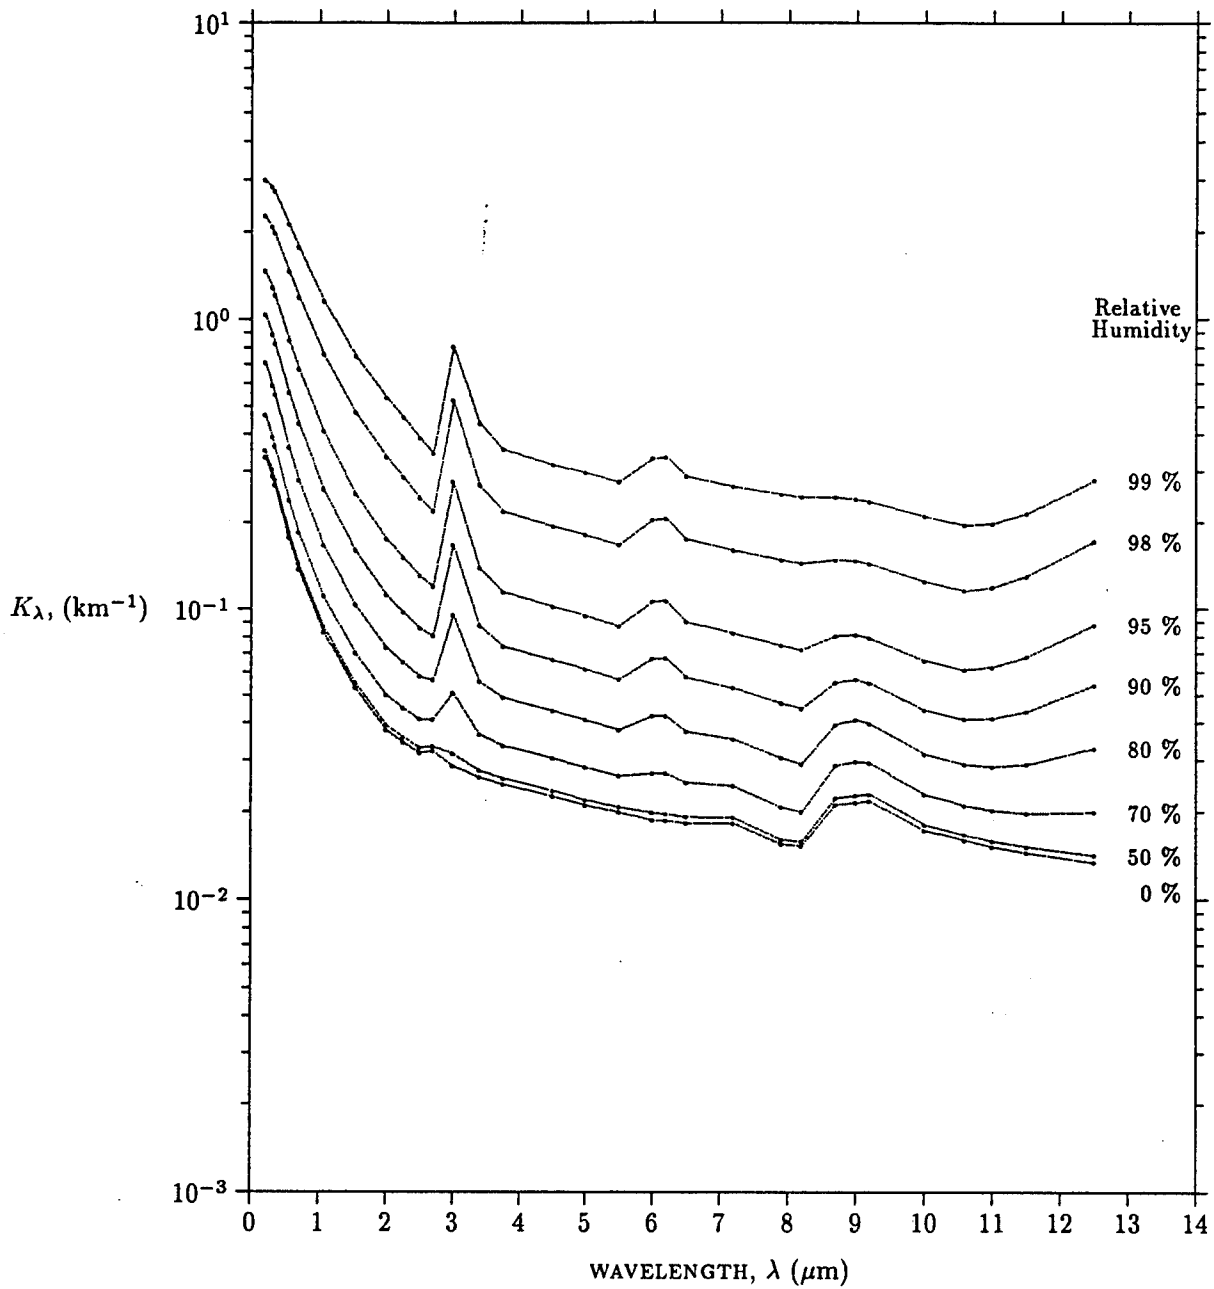


Figure 7. Urban extinction as a function of wavelength and relative humidity for a constant density of 20,000 particles/cm³. Semilog scale used.

2.1.2 *Fogs*

Two models represent the range of natural fog types. The models are Mie calculations based on a particle size distribution. Mie theory calculates the scattering and absorption of an incident plane electromagnetic wave by a single spherical particle. To determine the attenuation of a collection of particles, Mie calculations are performed for each type and size particle, then summed over the particle distribution. [6]

The two models used for fog types are the same ones used in LOWTRAN 7; [7] a complete description can be found in LOWTRAN 6. [8] The two models represent typical advection and radiation fogs. [9] Fog particle size distributions are characteristic of more situations than their labels imply. Consequently, the labels will be dropped, and the particle size distributions will be identified as fog-one and fog-two. These fogs have size distributions represented by Deirmendjian's modified gamma distribution: [10]

$$\frac{dn}{dr} = Ar^{\alpha} \exp(-br). \quad (5)$$

For fog-one, this equation becomes:

$$\frac{dn}{dr} = 0.06592r^3 \exp(-0.3r). \quad (6)$$

For fog-two, this equation becomes:

$$\frac{dn}{dr} = 607.5r^6 \exp(-3r). \quad (7)$$

The fog models are implemented in the same manner as the haze models. The extinction and absorption coefficients have been computed, normalized to the extinction at 0.55 μm , and tabulated for the 31 wavelengths (only 100 percent humidity is considered). XSCALE then interpolates between the extinction values at the requested wavelength. Figure 8 shows the wavelength dependence of the two fog models. Fog-two should be used for visibilities above 200 m, and fog-one should be used for visibilities below 200 m.

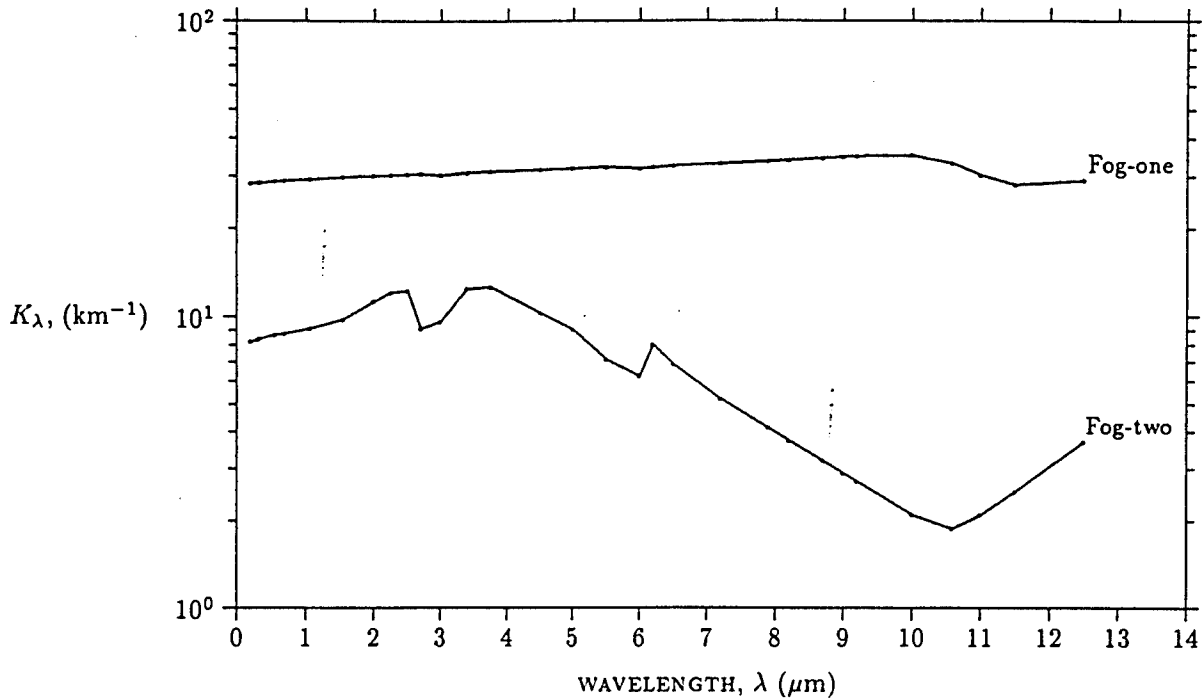


Figure 8. Fog-one and fog-two extinction as a function of wavelength. Fog-one density is 20 particles/cm³; fog-two density is 200 particles/cm³. Semilog scale used.

2.1.3 Desert Aerosol

This release of XSCALE includes a desert aerosol model. [11] This model arises from measurements taken in northern Africa and the southwest United States between 1977 and 1985. Several measurement efforts were examined. The measurements included size distributions, composition, radiation, and total mass loading. Usually, any one effort involved only one type of measurement. [11] As implemented within XSCALE, the desert air mass is composed of three components; each component has a different log normal (equation (2)), particle size distribution, and indices of refraction. The components represent carbonaceous particles, water soluble particles, and sand. Two types of sand contribute to the sand component; 50 percent of sand particles are pure quartz and 50 percent are quartz contaminated with 10 percent hematite. The amount of carbonaceous and water soluble particles are constant (once they are scaled by the visibility); the sand component increases with wind speed. This model does not consider a humidity dependence. An example of the

particle size distribution is shown in figure 9. The densities of the components are arbitrary, but are roughly similar to those measured before. [11] The mode radii, standard deviations, and densities used are given in table 2.

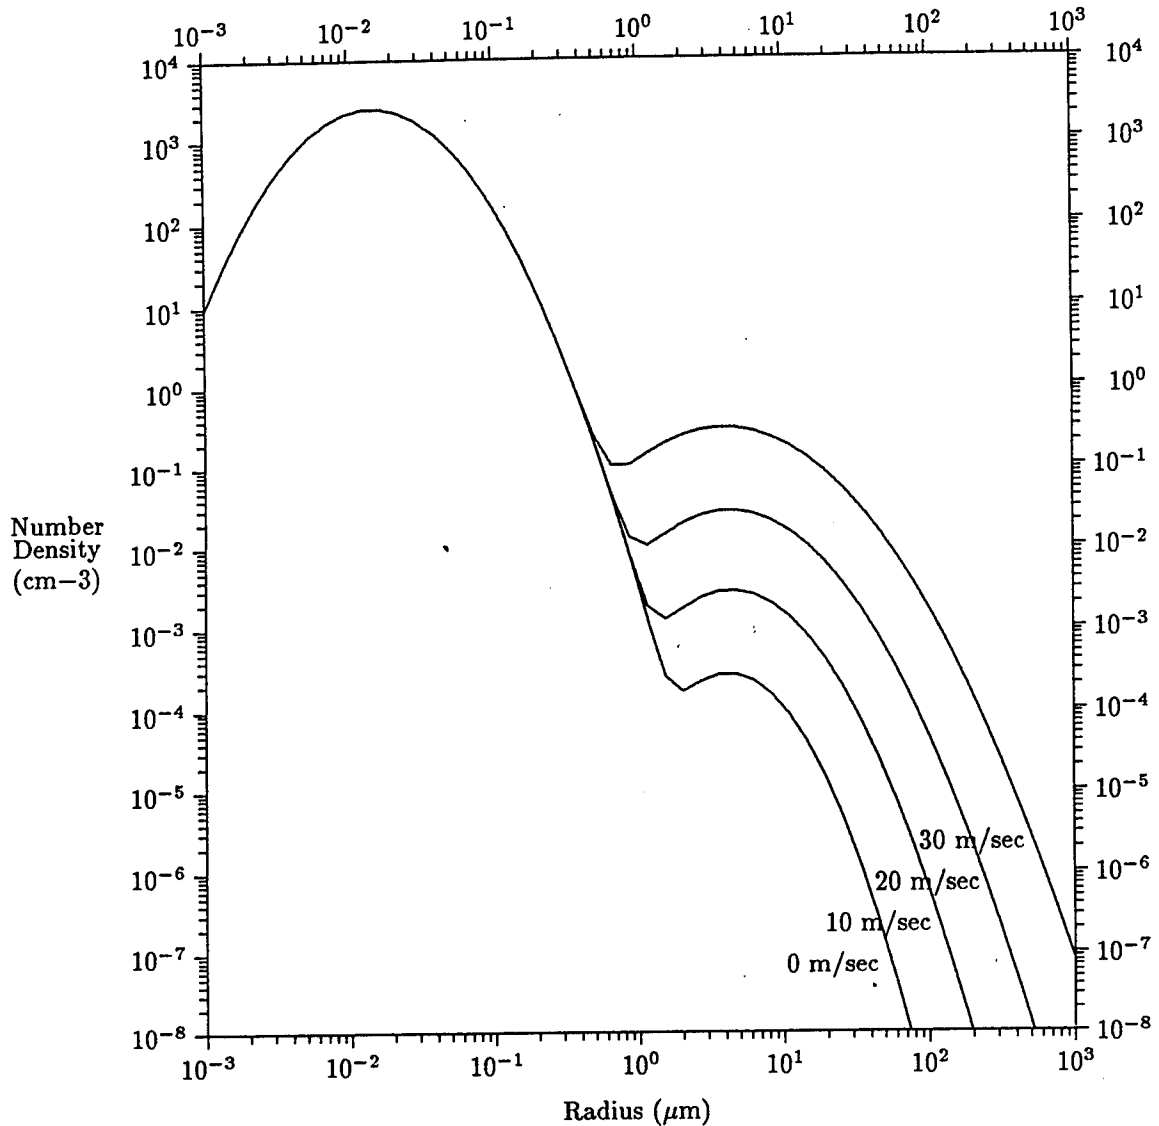


Figure 9. Desert particle size distribution at four wind speeds: 0, 10, 20, and 30 m/s. Arbitrary particle densities, see table 2.

A look-up table is contained within the XSCALE module. Relative extinction and absorption coefficients normalized to the extinction at 0.55 μm are tabulated at 31 wavelengths and 4 wind speeds. XSCALE performs linear interpolation to determine the relative extinction, absorption, and scattering coefficients at any specific wavelength and

wind speed; these are scaled by the visibility. Figure 10 shows the extinction coefficient as a function of wavelength at the four wind speeds. For a constant background air mass, the mass loading increases with wind speed. The figure 10 plots are derived from the extinction values found in appendix C of Longtin et al. [11] at the 31 wavelengths tabulated in XSCALE.

Table 2. Mode radii and standard deviations of the XSCALE aerosols. The standard deviation values are appropriate for the Shettle-Fenn particle size distribution of equation (2)

Wind Speed (m/s)	Carbonaceous			Water Soluble			Sand		
	N ₁ (cm ⁻³)	r ₁ (μm)	σ ₁ —	N ₂ (cm ⁻³)	r ₂ (μm)	σ ₂ —	N ₃ (cm ⁻³)	r ₃ (μm)	σ ₃ —
0	0.3197	0.0118	2.00	682.0	0.0285	2.24	0.0152	6.24	1.89
10	0.3197	0.0118	2.00	682.0	0.0285	2.24	0.2022	7.76	2.14
20	0.3197	0.0118	2.00	682.0	0.0285	2.24	2.402	9.28	2.42
30	0.3197	0.0118	2.00	682.0	0.0285	2.24	30.55	10.80	2.74

2.1.4 Attenuation Through Rain

The attenuation in the visible and IR range caused by raindrops can be calculated by means of the Mie theory. [6] The attenuation can be expressed as a function of rain rate. Visible and IR wavelengths are significantly less than the radius of most raindrops, which typically vary from 50 μm to a few mm. Thus, the XSCALE model assumes a value of 2 for the Mie extinction coefficient. This removes the wavelength dependence of the extinction coefficient in this band of the electromagnetic spectrum, resulting in an extinction coefficient:

$$K = 2\pi \int N(r) r^2 dr, \quad (8)$$

where

N(r) = the rain particle size distribution.

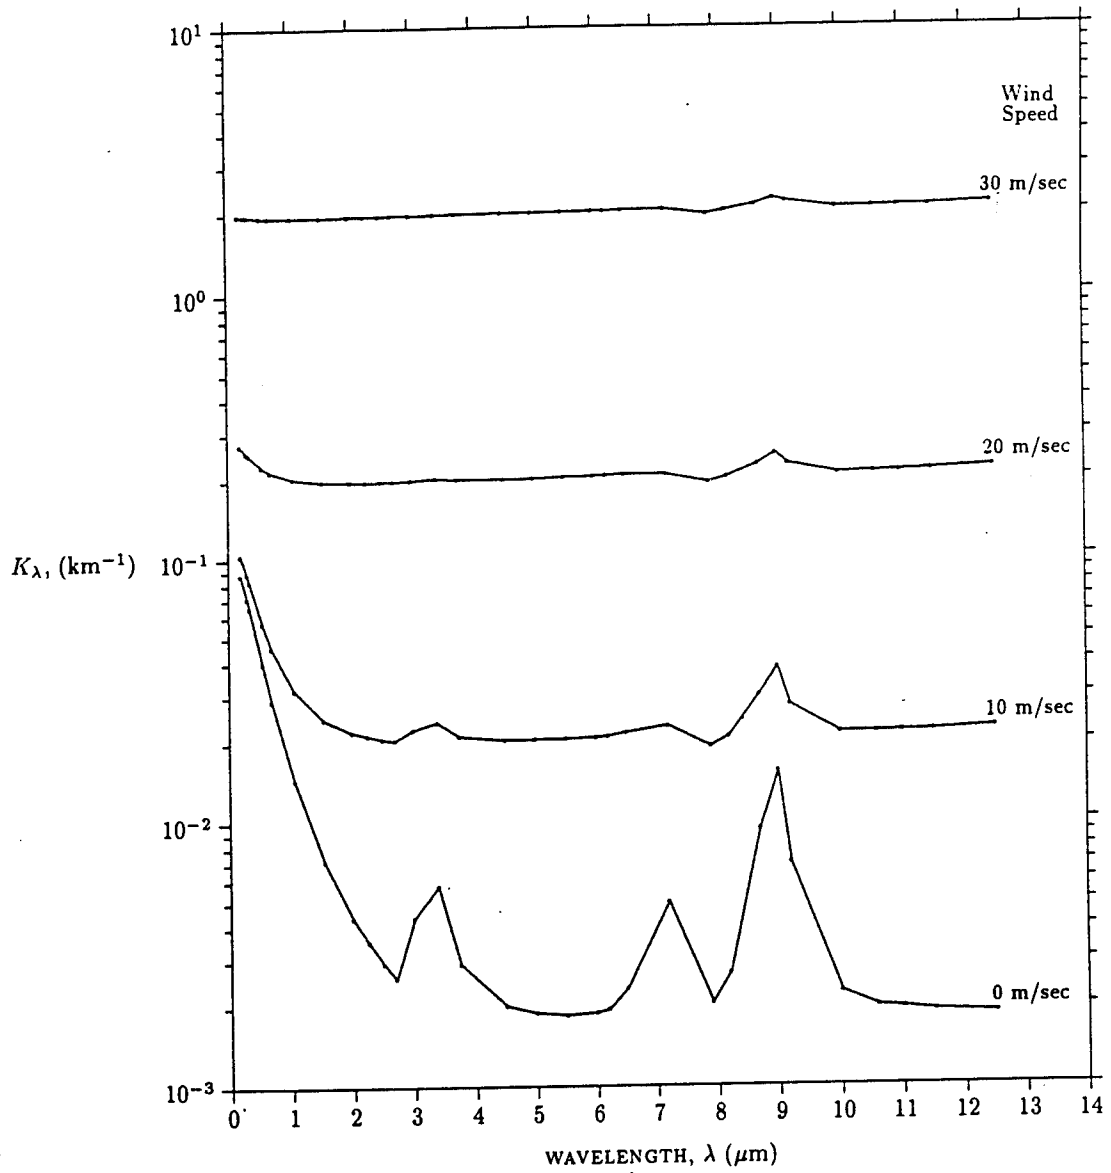


Figure 10. Desert extinction as a function of wavelength and wind speed. Semilog scale used.

Several different models for raindrop size distributions are found in the literature. The most widely used description is that of Marshall and Palmer, [12] which is based on the observations of Laws and Parsons. [13] This distribution is given by the following:

$$N(d) = N_0 \exp(-\Lambda d), \quad (9)$$

where

$$\begin{aligned} \Lambda &= 4.1R^{-0.21} \text{ (mm}^{-1}\text{)} \\ N_0 &= 8 \times 10^3 \text{ (m}^{-3} \text{ mm}^{-1}\text{)} \\ d &= \text{the droplet diameter (mm)} \\ R &= \text{the rain rate (mm/h).} \end{aligned}$$

With this distribution, the extinction coefficient in km^{-1} can be expressed as a function of rain rate:

$$K = 0.365 R^{0.63}. \quad (10)$$

The data of Waldvogel [14] shows that different size distributions are typical of different rain situations. Joss and Waldvogel developed size distributions for drizzle, widespread rain, and thunderstorm situations. [15] For these three models, the extinction coefficient is related to rain rate by the following:

$$K = 0.5089 R^{0.63}, \text{ drizzle} \quad (11)$$

$$K = 0.3201 R^{0.63}, \text{ widespread rain,} \quad (12)$$

$$K = 0.1635 R^{0.63}, \text{ thunderstorm.} \quad (13)$$

Equations (10) and (12) show that the Marshall and Palmer distribution and the Joss and Waldvogel model for widespread rain give comparable values for extinction.

Equations (11), (12), and (13) are used as the XSCALE rain models. Equation (12) is recommended for general use and is the default model of the computer code if a specific model is not requested. The other two models may be used to provide reasonable upper and lower bounds for the extinction coefficient for a given rain rate, or to investigate the type of rainfall they represent. Table 3 gives representative rain rates for the three types of rain; the default is 3 mm/h.

Table 3. Rain, type, and rate

Type	Rainfall Rate (mm/h)
Drizzle	$R \leq 1.00$
Widespread rain	$1.00 < R \leq 7.60$
Thunderstorm	$7.60 < R$

2.1.5 *Attenuation Through Falling Snow*

Falling snow is defined in XSCALE as precipitating snow carried by a wind of less than 5 m/s and a relative humidity of less than 95 percent. Crystals of falling snow generally are large, 100 μm or more, in comparison to visible and IR wavelengths. The geometric optics approximation are expected to be valid. Therefore, the extinction coefficient is equal to 2.0 and the resulting extinction is wavelength independent. However, field measurements of transmittance usually have exhibited a wavelength dependence in falling snow such that the extinction coefficient increases with wavelength in the absence of coexisting fog. This observed spectral dependence is explained for the most part by considering diffraction effects. For the above conditions, the forward direction diffraction lobe is very narrow at visible wavelengths, but increases in width with wavelength. Thus, as the wavelength increases, less diffracted energy is directed along the LOS to enter the transmissometer resulting in an increasing extinction coefficient with wavelength.

The diffracted energy entering a detector may be used to develop an approximate relationship to calculate radiative transfer in snow and to give the functional dependence of the spectral variations in extinction on path length L , detector radius r_d , and snow particle size \bar{r} : [16]

$$\frac{K(\lambda_1)}{K(\lambda_2)} = \frac{\exp(-0.88 C(\lambda_1)) + 1}{\exp(-0.88 C(\lambda_2)) + 1}, \quad (14)$$

where the subscripts indicate values corresponding to two different wavelengths, path lengths, detector radii, or particle size. The C_i are given by the following:

$$C(\lambda_i) = 2\pi \bar{r} \frac{r_{d_i}}{\lambda_i L_i}. \quad (15)$$

If the detector radius is small in comparison to the path length, $K(\lambda_1) \approx K(\lambda_2)$.

An approximate value of \bar{r} for a particular snow particle size distribution must be determined. If the size distribution is approximately known, then a value of \bar{r} equal to one-half the distribution model radius or one-tenth the maximum radius would be appropriate. The XSCALE inputs do not allow for entering of \bar{r} , the subroutine XSCALE would need to be modified. A second method of estimating \bar{r} , which XSCALE uses, is to assume it to be a function of surface temperature T , based on the observations that warmer snow fall generally is larger:

$$\bar{r} = \begin{cases} 100 \mu\text{m} & T \leq -15 \text{ }^\circ\text{C} \\ (250 + 10T) \mu\text{m} & -15 \text{ }^\circ\text{C} < T < 0 \text{ }^\circ\text{C} \\ (250 + 25T) \mu\text{m} & -0 \text{ }^\circ\text{C} \leq T \leq 2 \text{ }^\circ\text{C} \\ 300 \mu\text{m} & T > 2 \text{ }^\circ\text{C} \end{cases} \quad (16)$$

The extinction coefficient at wavelength λ as a function of visibility V may be obtained from equation (14) with r_d and L fixed:

$$K(\lambda) = \frac{\exp(-0.88 C(\lambda)) + 1}{\exp(-0.88 C(0.55 \mu\text{m})) + 1} \cdot \frac{3.912}{V}, \quad (17)$$

where $C(\lambda)$ and $C(0.55 \mu\text{m})$ are given by equation (15).^{*} If path radiance effects are ignored and if diffraction effects are neglected in human visibility cases, then for $C(0.55 \mu\text{m})$ in equation (15), r_d is 0.2 cm, $\lambda = 0.55 \mu\text{m}$, and \bar{r}/L is small. Thus $C(0.55 \mu\text{m})$ is small, the denominator exponential approaches 1, and the denominator of the first fraction approaches 2, giving the following:

$$K(\lambda) = [\exp - (0.88 C(\lambda)) + 1] \frac{1.96}{V}. \quad (18)$$

XSCALE employs equation (17). Equation (15) is convenient for hand approximations.

2.1.6 *Attenuation Through Blowing Snow*

Blowing snow is defined for XSCALE as snow carried by a wind of speed greater than 5 m/s and a relative humidity less than 95 percent. The spectral dependence of extinction in blowing snow and the relationship between visibility and the extinction coefficient are determined by equation (17). The particle sizes of blowing snow generally are small than for falling snow, and a value of 100 μm or less for \bar{r} is appropriate.[†]

^{*}In equation (17), there is no explicit dependence on precipitation rate; this enters the equation through the visibility estimate.

[†]Visibility in blowing snow as a function of wind speed is: [17] $V = a u^{-5}$, where $a = 1.1 \times 10^8 \text{ m}^6 \text{ s}^{-5}$ for unlimited loose snow on the surface and $a = 10^{10} \text{ m}^6 \text{ s}^{-5}$ for very little available snow. The V may be approximated only if the wind speed is known; however, a varies over two orders of magnitude.

2.1.7 Attenuation Through Snow and Fog

XSCALE defines snow and fog to be falling snow occurring with a relative humidity greater than 95 percent; no height variation is considered. The total extinction coefficient K_λ , in the combination of snow and fog, is equal to the sum of the extinction coefficient for fog alone plus that of snow alone. Therefore, if $0 \leq B \leq 1$ is the fraction of the total extinction caused by snow, then

$$K(\lambda) = (1 - B) K_{F\lambda} + BK_{S\lambda}, \quad (19)$$

where

$K_{F\lambda}$ = the fog extinction coefficient

$K_{S\lambda}$ = the snow extinction coefficient

under the current conditions.

The fraction B is estimated within XSCALE by a calculation based on a regression equation obtained from analysis of the Scenario Normalization for Operations in Winter (SNOW) series field experiment data: [18]

$$B = -0.025T + 0.23V^{-1} - 0.021H + 2.47, \quad (20)$$

where

T = the temperature in °C at 2 m

V = the visibility in km

H = the percent relative humidity at 2 m.

This equation does not give completely accurate values for B since relative amounts of snow and fog are weakly correlated with temperature, visibility, and relative humidity.

With the scaling laws given above for snow and the interpolation described in section 2.1.1 for fog, equation (19) is used by XSCALE to calculate K_λ at various wavelengths when it is known at one wavelength.

2.1.8 Attenuation Through Ice Fog

Ice fog forms when a hot combustion by-product, such as automobile exhaust or a heating flue gas, enters a cold air mass of less than $-30\text{ }^{\circ}\text{C}$. Rapid cooling produces a supersaturated mixture from which water droplets condense, freeze into ice fog particles, and grow until the vapor is exhausted. Because combustion is a good source of vapor and nucleating material, ice fog is common in populated arctic and subarctic areas. Ice fog also forms over open water, such as cooling ponds and hot springs, although the process is slower and fewer particles result.

Attenuation through ice fog is calculated by the Mie theory. [6] Since the heaviest concentrations of ice fog contain mostly irregular, nuggetlike particles, sphericity is a reasonable approximation. Although various size distributions can describe ice fog particles, for ease of computation, a Maxwell function is used for the following form: [19]

$$N(r) = \frac{4N_0}{r_c^3 \sqrt{\pi}} r^2 \exp\left[-\left(\frac{r}{r_c}\right)^2\right], \quad (21)$$

where

- $N(r)$ = the particle size distribution
- N_0 = the total particle concentration
- r_c = the mode radius.

Particles range from about 1 to 20 μm in diameter; they increase in size with ambient air temperature and decrease with the temperature of the water vapor source. [20,21] Distributions frequently are multimodal, hypothetically caused by different vapor sources. The user may supply a mix of up to three components for the distribution; or XSCALE will default to one of the two combinations of table 4, depending on whether open water is present.*

*These distributions are representative of those sampled by Huffman. [21]

Table 4. XSCALE multimodal ice fog particle size distribution

Proportion of particles	Open water nearby	No open water nearby	Vapor source
P ₁	0.42	0.56	automobile exhaust
P ₂	0.33	0.44	heating flue gases
P ₃	0.25	0.00	open water
Total	1.00	1.00	

Values for r_c are input or estimated by XSCALE as follows: [22]

$$r_c = \begin{cases} \exp(-27.51 + 0.120T_k) & \text{automobile exhaust} \\ \exp(-26.87 + 0.119T_k) & \text{heating flue gases} \\ \exp(-26.12 + 0.118T_k) & \text{open water}^* \end{cases} \quad (22)$$

In the above, T_k is the ambient air temperature in Kelvin.

The extinction efficiency Q_λ for ice fog is very sensitive to particle size, wavelength λ , and refractive index m . For a collection of particles with mode radius r_c and a combined geometrical cross section of $N_o\pi r_c^2$, Q_λ is described by the following theoretical formulae, valid for the indicated ranges of $x_c \equiv 2\pi r_c/\lambda$ or $\rho_c \equiv 2(m-1)x_c$, where $m \equiv n - in'$.

In Rayleigh scattering region ($x_c \leq 0.81 - 3n'(\sqrt{n} - 1)$),

$$Q_\lambda = -\Im m \left[\frac{16}{\pi} x_c P + \frac{3.2}{\sqrt{\pi}} x_c^3 P^2 \frac{m^4 + 27m^2 + 38}{2m^2 + 3} \right] + \Re e \left[35x_c^4 P^2 - 56x_c^6 P^2 \frac{1}{m^2} \right], \quad (23)$$

$$\text{where } P = \frac{m^2 - 1}{m^2 + 2}.$$

*Ohtake [20] observed that the distributions of particle radii from unpolluted open water sources (hot springs) have narrow peaks in concentration at around 5 μm .

In intermediate ρ_c ($x_c > 0.81 - 3n'(\sqrt{n} - 1)$; $\Re(\rho_c)$ or $\Im(\rho_c) \leq 4.0$),

$$\begin{aligned}
 Q\lambda = 3 + \frac{5.5}{C} \left(1 - \exp\left(-\frac{0.44C}{x_c^{2/3}}\right) \right) \\
 + \frac{4m}{\rho_c^2} \left[1 - \left(1 + \rho_c^2 - \frac{\rho_c^4}{4} \right) \exp\left(-\frac{\rho_c^2}{2}\right) \operatorname{erfc}\left(i\frac{\rho_c}{2}\right) \right] \\
 - i\frac{4m}{\rho_c\sqrt{\pi}} + i\frac{2m\rho_c}{\sqrt{\pi}}, \quad (24)
 \end{aligned}$$

where $C = m\frac{m+1}{m-1}$.

Large ρ_c region ($\Re(\rho_c)$ or $\Im(\rho_c) > 4.0$)

$$Q\lambda = 3 + \frac{2.442}{x_c^{2/3}} - \Im \left\{ \frac{2.257}{x_c} \left[\frac{m^2 + 1}{\sqrt{m^2 - 1}} \right] - \frac{0.759}{x_c^{4/3}} + \frac{4m}{\rho_c^2} \right\}. \quad (25)$$

Indices of refraction are supplied within XSCALE from a table compiled by Warren. [23] The function $\exp(-\rho_c^2/2) \operatorname{erfc}(i\rho_c/2)$ is approximated to an accuracy of ± 0.01 by equations derived through the method of continued fractions. [24] Except near the boundary between the Rayleigh and intermediate ρ_c regions where errors may run to ± 20 percent*, these formulae estimate $Q\lambda$ to within ± 4 percent of the rigorous Mie solutions. The combined extinction Q_{avg} for all vapor sources is calculated as a weighted average:

$$Q_{\text{avg}} = \sum_{i=1}^3 \rho_i Q_i. \quad (26)$$

*Errors of ± 10 to 20 percent are limited to a relatively narrow region around $x_c = 0.81 - 3n'(\sqrt{n} - 1) \pm 0.1$, and will be considerably lessened by broadband averaging.

The extinction coefficient $K\lambda$ for ice fog with visibility V is as follows:

$$K\lambda = \left(\frac{Q_{\lambda, \text{ avg}}}{Q_{0.55, \text{ avg}}} \right) \frac{3.912}{V}, \quad (27)$$

where $Q_{0.55, \text{ avg}}$ is found by evaluating equations (23), (24), or (25) for $m = 1.311$ and $\lambda = 0.55$.

2.2 Attenuation Along Inclined Lines of Sight

2.2.1 Introduction

The development of precision guided munitions and sophisticated EO sensors have placed new emphasis on near surface visibility. Traditionally, visibility has referred to visual estimates of the range within which certain objects were discernible against the horizon or background. Often the visibility estimates were automatically measured and recorded by several types of visibility meters. In either case, the emphasis has been upon the horizontal visibility. New surveillance and weapon systems are increasingly relying on sensors that must function over a slant path, where variations in the vertical as well as the horizontal visibility are important.

In low visibility situations, because of haze or fog, a large number of observations have shown that the measured visibility at the surface is not representative of conditions a few hundred meters, or even tens of meters, above the surface. [3,4,5,25,26,27,28] Therefore, slant path visibility can be significantly different from horizontal visibility. In a significant fraction of the cases, the visibility becomes worse as the height above the surface increases. These cases are of special concern here. [29,30] This part of XSCALE is controlled by the subroutine SLANT. The extinction and absorption tables for hazes and fogs described above and semi-empirical formulae for visible extinction and relative humidity profiles are used to predict the IR extinction as a function of height. Extinction within a low lying stratus cloud is modeled by the fog-one particle size distribution.

The transmittance over a path of varying extinction is obtained by using the average extinction along the path in equation (1). The average extinction is the path integral of the extinction along the path divided by the path length:

$$\bar{K} = \frac{1}{S} \int_{s_i}^{s_f} K(s) ds, \quad (28)$$

where

s = the spatial path
 $S = s_f - s_i$.

If z is the vertical displacement of the path ($Z = z_f - z_i$) and θ the elevation angle, then ds can be written as $ds = dz/\sin \theta = S dz/Z$ ($\sin \theta = Z/S$). Since K depends only on altitude, $K(s) = K(z)$. See figure 11 for the geometry. Therefore, \bar{K} can be rewritten in terms of altitude:

$$\bar{K} = \frac{1}{S} \frac{S}{Z} \int_{z_i}^{z_f} K(z) dz = \frac{1}{Z} \int_{z_i}^{z_f} K(z) dz. \quad (29)$$

XSCALE approximates this integration by the sum

$$\bar{K} = \frac{1}{Z} \sum_{i=1}^{N-1} \frac{K_i + K_{i+1}}{2} (z_{i+1} - z_i) \quad (30)$$

for N points along the path.

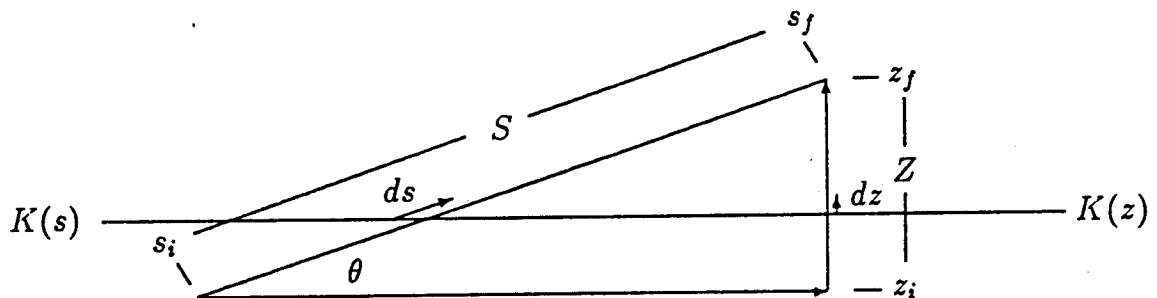


Figure 11. Slant path geometry.

The vertical profile of the extinction of blowing snow has been implemented in this version of XSCALE. The model is discussed in the final subsection of this section. The subroutine SNOSLN contains the Fortran code for this model.

2.2.2 *Basis of Vertical Profile Model*

Detailed data on the vertical structure of fogs and hazes has been gathered in the United Kingdom and the Federal Republic of Germany on several occasions. [3,4,5,25,28] Droplet size distributions in the 0.5- to 47- μm range have been measured from a balloon borne instrument, thus yielding vertical profiles. Extinction coefficients at desired wavelengths or the liquid water content can be calculated from these measured droplet size distributions.

Duncan and others [31] have examined the vertical structure of these profiles previously and have characterized the vertical structure in the form:

$$y = a'x + b', \quad (31)$$

where

$$\begin{aligned} x &= \log_{10}[K_{0.55}(z)] \\ y &= \log_{10}[K_{0.55}(z + 20)] \\ a' \text{ and } b' &= \text{the coefficients that were chosen to fit the data} \\ K_{0.55}(z) &= \text{the value of the visible extinction coefficient at altitude } z \\ K_{0.55}(z + 20) &= \text{value of this variable at an altitude of } z + 20 \text{ m.} \end{aligned}$$

Thus, the work is accomplished stepwise from the surface up through the cloud boundary layer. Since $x = \log_{10}[K_{0.55}(z)]$ in equation (31) and y is $x + \Delta x$, a relation for the extinction as a function of altitude can be derived as follows: [29]

$$K_{0.55}(z) = A \exp[B \exp(Cz)], \quad (32)$$

where A , B , and C are functions of the boundary conditions, such as the ground level value of extinction, and the cloud ceiling height. Note that

the coefficients A, B, and C may have different values, depending on whether one is below or within a low-lying stratus cloud.

The original development of the vertical structure model, which resulted in equations (31) and (32), was based on data where the ceiling height was quite low, typically 300 m or less. During January and February, 1983, ASL conducted a field test at Cardington, England to obtain data for validation of the vertical structure algorithm. [5] This test provided a new block of data similar to that used to develop the vertical structure algorithm but containing measurements to altitudes of 1200 m in stratocumulus cloud conditions. When the algorithm was compared to the Cardington data, the results were found satisfactory for cases in which the ceiling was low, but much less satisfactory for the higher ceiling cases.

The comparisons showed that the vertical structure model needed to be modified to address higher ceiling situations. The success of the algorithm in describing the older data base and the part of the Cardington data with similar ceiling values requires that changes do not disturb the fit for such cases. The changes adopted are based on the idea that the farther a parcel of aerosol is below a stratus cloud, the less its properties are related to the physical details of the stratus layer itself. To be more specific, it is assumed that a critical region exists just below the stratus cloud base in which the altitude dependence of extinction is governed by the presence of the stratus. Below the critical region, the altitude dependence is less related to the presence of the stratus layer and is presumed to be similar to its value at the surface. [32] This assumption is represented in the algorithm by changing the form for the coefficient A, used in equation (32), to an empirical formula that depends on the surface visibility and cloud ceiling height (see table 5).

Table 5. Extinction equation parameters

Visible extinction, $K_{0.55}(z) = A \exp(B \exp(Cz))$					
	Units	Region 1	Region 2	Region 3	Region 4
Description		Thick fog, within cloud (ceiling obscured)	Below cloud, clear/haze/light fog at surface. Ceiling less than 2 km	Inversion layer, radiation fog, no ceiling or greater than 2 km	Clear sky, no or high ceiling, no distinct layer.
Aerosol type		Fog-one aerosol	Maritime, Urban, Rural, or Fog-two may be selected.		
Surface visibility, V	km	less than 0.5	0.56 < V < 50.0		0.56 < V < 326.
Surface extinction, $D, K_{0.55}(0)$	km ⁻¹	greater than 7	0.0782 < D < 7.0		0.012 < D < 7.
Parameter					
A	km ⁻¹	92.0 Note a	$F(1 - e^{-D/F})$	1.1 * D Note b	0.012 Note c
B	none	$\ln(D/A)$	$\ln(D/A)$	$\ln(D/A)$	$\ln(D/A)$
C	m ⁻¹	-0.014 Note a	$\frac{1}{Z_c} * \ln(\frac{\ln(7.0/A)}{B})$	$\frac{1}{Z_c} * \ln(\frac{\ln(0.0782/A)}{B})$	-0.030 Note b
		$B < 0, C < 0$	Note a $B > 0, C > 0$	Note c $B < 0, C > 0$	$B > 0$ (if $V < 326$, i.e., the Rayleigh limit), $C < 0$
Associated parameter					
F	km ²		$(\frac{V Z_c}{350})^2$ Note d		
Z_c	m		CEILHT, cloud ceiling height Note e	AINVHT, inversion layer thickness	
Region selected by:		IAERO = 4 or $D > 7$ or $V \leq 0.2$ km and IAERO = 5 \Rightarrow IAERO = 4	$D \leq 7$ and CEILHT > 0	CEILHT < 0 and AINVHT \geq 0 or IAERO = 5	CEILHT < 0 and AINVHT < 0
Defaults:		if THICK \leq 0 then THICK = 0.1 km		if AINVHT = 0 AINVHT = 0.1 km	None

$D =$ visible extinction at surface in km⁻¹, = $\frac{3.912}{V} - 0.012$ (in region 1 for the path within a cloud $D = 7$),
 in VSA this is the FORTRAN variable D.
 $Z_c =$ cloud ceiling or inversion layer height in m.
 in VSA this is the FORTRAN variable CEILHT or AINVHT.
 FORTRAN variables not defined elsewhere:
 THICK is the thickness of the cloud or fog layer.
 IAERO is the selected aerosol type, type 5 is the fog-two aerosol.

Notes:

- Value of coefficient based upon data representative of low-lying stratus clouds.
- Ad-hoc default value; insufficient data to determine best value. May be adjusted by users.
- Value of coefficient chosen to represent "clear atmosphere" background above surface layer.
- Empirically determined scaling factor to best fit the data.
- A solid (8/8's) cloud cover is assumed.

2.2.3 Parameterization of the Model

XSCALE uses four different regions to model a vertical extinction profile. In this subsection, the regions will be described and the circumstances in which they apply. Once a region has been associated with an atmospheric layer, the values of the coefficients A, B, and C in equation (32) can be found for that layer.

The division between regions 1 and 2 (see figure 12) physically represents the change in extinction due to changes in the state of particle growth as one moves from a subsaturated environment (region 2), where relative humidities are less than 100 percent, to a supersaturated environment (region 1). Thus, this division will be taken to represent the cloud boundary. Region 1 represents the change in extinction with altitude caused by a growing and changing particle-size distribution in a moist, supersaturated environment. This environment is that of a stratus cloud or a thick, ground-based fog where droplet size distributions are being controlled by convective motions. The upper boundary for the extinction represents the average upper limit expected for the extinction in a stratus cloud or thick fog.

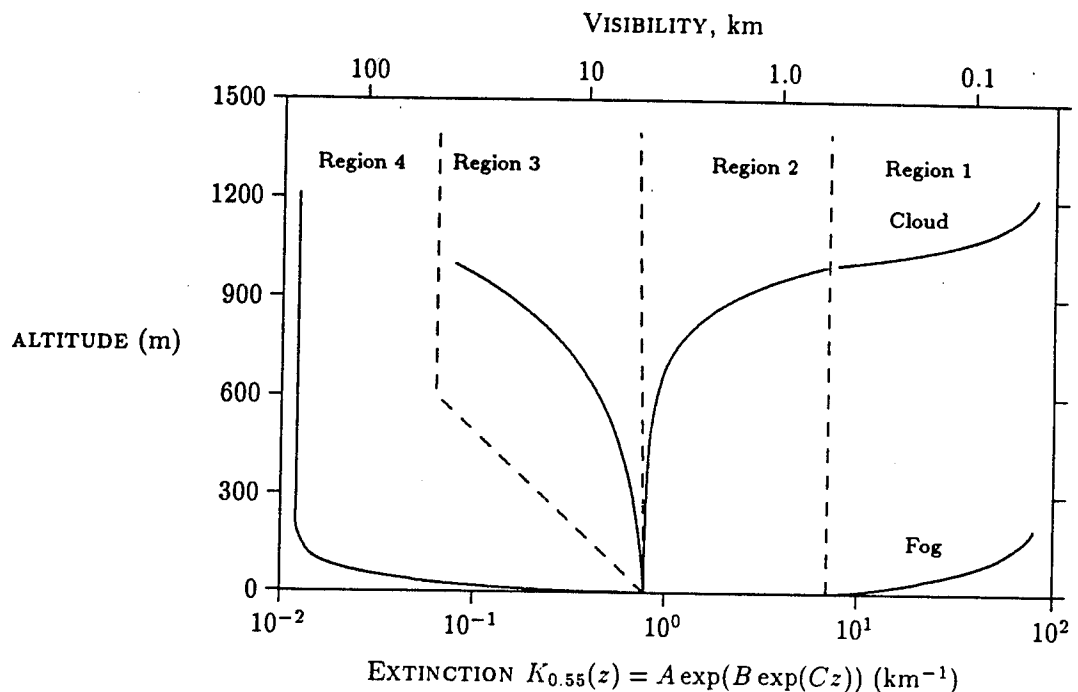


Figure 12. Four regions represented by the vertical structure algorithm.

Region 2 represents the change in extinction with altitude below the cloud boundary. The coefficients A, B, and C represent the increase in extinction caused by particle-size distribution growth changes in a clear to foggy layer beneath a cloud.

The rate at which the extinction changes with altitude below the cloud ceiling depends on the cloud ceiling height Z_c . The explicit dependence of C on the cloud ceiling height can be incorporated by defining the coefficient C as follows:

$$C = \frac{1}{Z_c} \ln \left[\frac{\ln(E/A)}{\ln(D/A)} \right], \quad (33)$$

where

- Z_c = the cloud ceiling height
- E = the value for the extinction at the cloud base
- D = the value of 0.55 μm extinction at the surface.

A is explained in greater detail below. In practice, E has the value 7 km^{-1} , and D can be calculated from the surface visibility V by using equation (4).

Originally, the algorithm for the vertical structure of hazes, fogs and clouds represented by equation (32) was developed for low visibility and low stratus conditions in which the extinction increases with altitude. This algorithm is based on inputs of the surface meteorological range (extinction coefficient) and the cloud ceiling height. This algorithm has been extended to regions 3 and 4 where there may be no cloud ceiling and the extinction coefficient decreases with increasing altitude.

One additional parameter is needed for use with the vertical structure algorithms — the value of the relative humidity (H) as a function of altitude up to the cloud ceiling (assumed to be at 100 percent relative humidity). Within a cloud or fog, the relative humidity is set equal to 100 percent. When the path is below the cloud deck (where visibility can vary from clear to foggy conditions), the following empirically derived algorithm is used:

$$H(z) = a \ln K_{0.55}(z) + b. \quad (34)$$

Equation (35) is a restatement of the reaction between visibility and relative humidity found in Shettle and Fenn and Hanel. [1,2] The coefficients a and b are adjusted to represent the change in relative humidity with altitude from the surface (H_0) to the cloud base ($H = 100$ percent):

$$a = \frac{100 - H_0}{\ln(7/D)} \quad (35)$$

$$b = 100 - a \ln(7) \quad (36)$$

D is the same initial value of the extinction coefficient at the surface as used in equation (33).

2.2.4 *Use of the Vertical Profile Model*

Depending on the signs of the coefficients B and C in equation (32), the vertical structure of visibility can be represented by four different curves as illustrated in figure 12. Curves 1 and 2 represent the regions where the extinction coefficient increases (visibility degrades) with increasing altitude; these regions represent the vertical structure of extinction for low visibility and low stratus conditions and for dense fog at the surface, or when inside the cloud. Curves 3 and 4 represent regions where the extinction coefficient decreases (visibility improves) with increasing altitude. Each of these regions are:

Region 1: ($B < 0, C < 0$) A is the upper limit for the extinction coefficient in the thick fog and cloud layer. This curve is to be used for dense fogs at ground level, at the cloud base, or in the cloud. Physically, this curve represents the increase in liquid water content, and consequently, the increase in extinction coefficient and decrease in visibility of a saturated parcel of air rising at the wet adiabatic lapse rate. [29, 33] This curve should be used only when the extinction coefficient (or meteorological range) is in the thick fog and cloud layer (i.e., $K_{0.55} > 7 \text{ km}^{-1}$).

Region 2: ($B > 0, C > 0$) A is the lower limit for extinction coefficient in clear to foggy conditions at the surface. This curve is to be used for

visibility conditions ranging from clear to hazy to light fog when there is a low cloud ceiling present.

Region 3: ($B < 0, C > 0$) A is the upper limit for the extinction coefficient. Surface visibility should indicate clear, hazy, or light fog conditions. This curve is to be used when there is a shallow radiation fog present or when a haze layer is capped by a distinct, low-lying temperature inversion. A cloud ceiling is not present.

Region 4: ($B > 0, C < 0$) A is the lower limit for the extinction coefficient and is taken as the nominal background value within the planetary boundary layer. This profile is used for regions of reasonable vertical homogeneity of visibility in a clear to slightly hazy atmosphere that may have a shallow haze layer near the surface. A cloud ceiling is not present.

Profiles of the $0.55 \mu\text{m}$ extinction coefficient are shown in figure 12 for these different regions. Two examples of representative profiles are shown for region 1. The first example is for a thick fog at the surface, which is represented by an extinction coefficient profile that increases with height. When the depth of the fog is not known (usually the case because the sky is obscured), a default depth of 100 m is recommended. The second example is for a low-lying stratus cloud; for illustration, the cloud ceiling height is taken to be 1000 m. As shown, this is an extension of the region 2 below-cloud profile into a cloud. This region 1 profile should only be used from the cloud base to the cloud top. Again, cloud thickness is usually not a measured quantity, and a default value of 100 m is recommended. Within the thick fog and cloud layer, only profiles of the region 1 type should be used. For a dense, shallow radiation fog, use region 3 as described below.

A representative profile for the structure beneath a stratus cloud of ceiling height 1000 m is shown for region 2. The slope and shape of the vertical structure profile beneath the cloud deck are a function of the initial value of the surface visibility and the cloud ceiling height. When cloud cover is present, the surface visibility may range from clear to light fog;

therefore, for any instances of ceiling height within 2000 m of the surface, a vertical structure profile similar to region 2 is appropriate.

A shallow radiation fog or a haze layer bounded by a temperature inversion can be represented by a vertical structure profile as shown in figure 12 for region 3. The boundary layer heights for such occurrences are often difficult to estimate. Temperature inversion heights can be obtained from acoustic sounders and radiosonde observations; visual sightings often can be used to estimate depths of shallow fogs or haze layers. A nominal boundary layer height of 1000 m has been selected for illustrative purposes. For radiation fogs in which the depth is not known, a default value of 100 m is selected; for inversion layers where the height of the inversion or boundary layer is not known, a default value of 100 m is selected.

Region 4 is represented by a profile for the condition in which the vertical structure is essentially constant with altitude, except for the lowest 100 m of the boundary layer. An appropriate default value is the nominal background value for the 0.55- μm extinction coefficient for a fair weather situation (represented here by a value of 0.012 km^{-1}). Numerous observations have shown that the extinction coefficient essentially is constant within the planetary layer for well-mixed conditions.

Table 5 gives the tabular values of the various coefficients that are to be used as boundary values for the different regions in their respective layers of applicability.

2.2.5 Vertical Profile of Blowing Snow

The variation of extinction with height Z for blowing snow is included in the XSCALE 92 module. The snow may originate from current precipitation, or it may be loose surface snow picked up by the wind. The surface wind speed must be greater than 5 m/s to invoke this calculation. The extinction profile is found by considering the variation of mass concentration m with height and assuming that the extinction coefficient is proportional to this m . Therefore, [34]

$$\frac{K_1}{K_2} = \frac{m_1}{m_2} = \left(\frac{Z_1}{Z_2} \right)^{-w/(ku_*)}, \quad (37)$$

where

- w = particle fall velocity
- k = von Karmann's constant = 0.4
- u_* = friction velocity,

and the subscripts indicated values at two different heights. The friction velocity is given by the following:

$$u_* = \left[\frac{k}{\ln(h/Z_o)} \right] u_h, \quad (38)$$

where

- u_h = the horizontal wind speed at height h
- Z_o = the roughness height ≈ 0.1 mm for snow. [35]

The value of w is approximately 0.2 m/s for 100 μm particles. [36] Therefore, equation (37) becomes

$$\frac{K_1}{K_2} = \frac{m_1}{m_2} = \left(\frac{Z_1}{Z_2} \right)^{-0.5/u_*}. \quad (39)$$

This result compares favorably with the results of Seagraves: [37]

$$\frac{K_1}{K_2} = \left(\frac{Z_1}{Z_2} \right)^{-(0.596/u_*)} \quad (40)$$

If equation (38) is rearranged for u_h , and $h = 2$ m,

$$u_2 = 24.7u_*, \quad (41)$$

equation (39) becomes

$$\frac{K_1}{K_2} = \left(\frac{Z_1}{Z_2} \right)^{-(12.4/u_2)} \quad (42)$$

By identifying the subscript 1 with the altitude of interest, subscript 2 with a reference height of 2 m, and rearranging the equation, a visible extinction profile is obtained.

$$K_{0.55}(Z) = K_{0.55}(2) \left(\frac{Z}{2} \right)^{-(12.4/u_2)} \quad (43)$$

Equation (17) may now be used to scale the visible extinction to the wavelength of interest. When the first factor of equation (17) is identified with f , and $3.912/V$ is recognized to be $K_{0.55}$, the extinction at λ and Z is:

$$K_\lambda = fK_{0.55}(Z) = \frac{\exp(-0.88C_\lambda) + 1}{\exp(-0.88C_{0.55}) + 1} K_{0.55}(2) \left(\frac{Z}{2} \right)^{-(12.4/u_2)} \quad (44)$$

$$= f \cdot g \cdot Z^{-a}$$

where

$$a = 12.4/u_2$$

$$g = K_{0.55}(2)2^a.$$

The path average extinction used in equation (1) is obtained by integration of equation (44):

$$K_{\lambda} = \frac{1}{Z_t} \int_{z_i}^{z_f} K_{\lambda}(Z) dZ = \frac{f g}{Z_t} \int_{z_i}^{z_f} z^{-a} dZ, \quad (45)$$

where

Z_f = the upper endpoint of the path

Z_i = the greater of the 2-m reference height or low end of the slant path

$Z_t = Z_f - Z_i$.

Performing the integration gives the following:

$$K_{\lambda} = \frac{f g}{Z_t(1 - a)} \left[Z_f^{(1 - a)} - Z_i^{(1 - a)} \right]. \quad (46)$$

This is the equation implemented in the subroutine SNOSLN. Because an analytic expression is used for K_{λ} , $K_{\lambda}(Z)$ for various Z are not calculated.

3. Caveats

3.1 Grade of Software

XSCALE is at the developmental grade of software (see table 6). Several evaluations have been made concentrating on the vertical structure model. Other models within XSCALE have received less scrutiny. These evaluations will be enumerated in section 3.3. As further data is collected, the models will continue to be evaluated.

Table 6. Grades of software

Research	Describes phenomena based on a physical or meteorological theory. Limited evaluations in the field or laboratory.
Developmental	Tailored version of a research model. Limits of applicability have been defined. At least several evaluations have been made.
Fieldable	Applicability has been defined. Confidence has been established throughout the community. Many evaluations have been passed. The model has been verified for its stated usage.

3.2 Model Failure

Table 7 lists the errors (fatal to the execution of the XSCALE program) for which XSCALE checks and the warnings that are printed. If one of these errors is detected, the program has not been given enough information for the calculation; execution is then returned to the EOSAEL driving program and halts. A catastrophic failure results if an input to XSCALE is incorrect and no default value can be rationally substituted. In such a case, the error flag IERR is set to 1; program execution then returns to the calling program EOEXEC which checks IERR and halts if this value is 1.

Table 7. Detectable errors

Error	Test	Action
Wavelength out of range	Initial wavelength, λ_i : $\lambda_i < 0.2$ or $12.5 < \lambda_i \mu\text{m}$ Final wavelength, λ_f : $\lambda_f < 0.2$ or $12.5 < \lambda_f \mu\text{m}$	Control returns to EOEEXEC.
Message: ***** WAVELENGTH (_____ UM) OUTSIDE ALLOWABLE RANGE (0.2 - 12.5) - CONTROL RETURNED TO MAIN FROM XSCALE.		
Improper aerosol for a slant path.	For the aerosol index, $I_a \in \{1, 2, 3, 4, 5, 6, 7, 8, 9, 10\}$: $I_a \in \{6, 7, 8, 10\}$ is not allowed.	Return to EOEEXEC.
Message: INCORRECT AEROSOL TYPE FOR SLANT PATH (IAERO =___)		
Within ICEFOG temperature too warm.	T = air temperature, $T > -30$ C	Return to XSCALE.
Message: ICEFOG DOES NOT FORM ABOVE -30 DEGR CENT		
Unknown input record (card).	ID = card identifier $ID \notin \{ \text{AERO, RESF, HORZ, SLNH, SLWS, CLD, PLOT, GO, DONE, ICEF} \}$	Return to EOEEXEC.
Message: UNKNOWN CARD TYPE - CONTROL RETURNED TO MAIN FROM XSCALE -----E-----E-----E-----E-----E-----E-----E-----		

XSCLIO is the subroutine responsible for input and output. Within XSCLIO, all input variables other than WAVE1 and VIS have default values assigned (see chapter 4). These defaults allow the program to run and are noted as defaults on the program output. The defaults are reasonable, but certainly not the only reasonable values; user inputs will override defaults at this level. Default values should not be depended on; values and the expected range of values should be determined for respective scenarios. XSCALE should be executed for each of these values. Users should experiment with the program to determine what difference each group of values will make.

At a lower level, within the XSCALE subroutines, checks are made of the EXT55, IAERO, RH, and TEMP. Various values are expected depending on the scenario; if an unexpected value is found, a better value is assigned and execution continues. Whenever such a change is made, a message is printed on the output file. Some of the explicit checks follow. If a fog aerosol is specified and the visibility is less than 0.2 km, fog-one is always used. If the aerosol IAERO index is greater than or equal to 6 and not equal to 10, the slant path is impossible. The desert, rain, and ice fog aerosol models do not support altitude dependent calculations. The program will not run if both an inversion height and ceiling height are input.

The program may gracefully fail in the sense that an unexpected default value is used as described in the previous two paragraphs. Such an unexpected or unwanted value amounts to a redefined scenario. The prediction for this is correct but may not be what the user intended. All XSCALE output includes the scenario parameters used in the prediction; default values are labeled as such. The output should be checked to ensure that the answer corresponds to the intended question.

The predictions made by XSCALE are realistic; a real world example can be found that will support the prediction. However, the models are empirical, and as such, the local conditions may be different from the conditions during a measurement program. Independent tests of XSCALE have shown that there are some situations that XSCALE does not model. These are noted in the following subsection as the tests are described. If possible, the predictions should be compared to a few local measurements. This can result in a useful "fudge factor" for the locale of interest.

The defaults used in XSCALE are primarily climatic averages. A transmittance prediction for a specific scenario will more likely be correct if input values for the scenario are used. Guesses are probably better than averages for a specific case. In fact, a flag can be passed to XSCALE from the EOSAEL executive program. This indicates that the CLIMAT data base has been read. Values obtained from CLIMAT will provide the default values for temperature, relative humidity, and wind speed.

Since the desert aerosol model is new to XSCALE, a few specific caveats and potential problem areas will be mentioned. This model, as implemented in XSCALE, has a fixed composition and particle size distribution. Some suggest that the aerosol composition (and therefore the particle size distribution) depends on the region where the air mass originates. [11] These factors apply to all the aerosol models, although there are probably more data and tests supporting the maritime, rural, urban, and fog aerosols. Also, despite a hygroscopic component, the desert model does not have a relative humidity dependence. The measurements apparently do not include relative humidity because of a lack of data to model; [11] it is not always true that the humidity in the desert is zero.

A corollary to the two previous points is that one usually does not know everything needed to make an accurate prediction for a specific scenario. A single XSCALE run using defaults and guesses may be useful, but consideration should also be made of runs using different values. This will provide a range of values for the transmittance to be expected in a specific scenario. With luck, the range will be small and the transmittance will be insensitive to the unknown values.

A final caveat, the single most important input value is the surface visibility. This value is used for scaling the amount of aerosol present, and the IR transmittance is some factor times the visible transmittance that is related to the visibility by equation (4). Unfortunately, the visibility is the hardest value to determine accurately. At present, the recommended solution is to run XSCALE for several representative visibility values.

3.3 Verification Tests

For the most part, XSCALE is based on empirical models. Therefore, each model has been developed to closely mimic at least one set of real world data. These data sets are cited in chapter 2 as each model is discussed. Most of the individual models have been tested against independent data sets. The rain, ice fog, and blowing snow models have not been tested nor has the slant path model for IR wavelengths. The independent tests are discussed in this chapter.

3.3.1 *Previous Tests*

A study was performed that compared the climatological average transmittance to the transmittance calculated by XSCALE using the climatological meteorology as inputs. [38] Several weather classes and regions were considered; these were taken from the CLIMAT module of EOSAEL. The XSCALE calculations compared very well to the climatological average transmittance. Since only average visible transmittance was considered, this was not a very strict test.

Measurements of the visible transmittance along the slant were compared to XSCALE predictions. [39] The predicted and measured transmittance usually corresponded to within 5 percent. However, differences of up to 15 percent were noted. XSCALE predictions generally are sensitive to the cloud ceiling height and surface visibility. Both of these values depended on a human observer. There were no instrument measurements in this test. The above similarity consequently was considered very positive.

Tower based visibility measurements to XSCALE slant path transmittance were compared in the visible. [40] For the sub-cloud case modeled by XSCALE (increasing extinction as the cloud ceiling is approached), agreement was very good. Several occurrences were noted in which the extinction decreases, but these were primarily for high clouds. XSCALE does not model this situation. Transmittance differences as large as 36 percent were found in these situations.

The Sprakensehl data set (the data set used by Hoidale [40]) was examined for the occurrence of episodes of decreasing visible extinction with height. [41] The range of measurable heights was limited to that of the tower (2 to 300 m).^{*} These episodes predominate those of increasing extinction in high ceiling, moderate surface visibility (2 – 6 km) situations. As pointed out in the later study of Fiegel, [43] such episodes should not be thought to offer evidence against XSCALE, but to remind the

**The report of Hoidale and Schulze [42] contains the numbers of episodes in this study.*

user that XSCALE (as any model) will not model all real world situations.* The few altitudes sampled in the Sprakensehl study suggest that a thin haze layer often may occur under a cloud layer. Such an occurrence would result in constant extinction near the surface, then decreasing extinction above the haze (near the tower top). Finally, extinction would increase as the cloud is approached.

Other studies compared visible measurements of transmittance through snow and fog with XSCALE calculations. [44,45] The agreement at visible wavelengths was very good but less so at IR wavelengths. This was attributed to the off-axis forward scattering as follows: The XSCALE algorithm models the transmissometer measurement of unscattered light and that of forward scattering from snow particles near the beam (within one detector radius of the beam axis). Scattering away from the beam, entering the transmissometer will increase the transmittance (or decrease the extinction). The visible transmissometer had a beam much smaller than the receiver diameter. The IR transmissometer had a beam comparable to the receiver diameter. Off-beam scattering can enter the receiver, but the amount is not calculated by XSCALE since it is greater than one detector radius from the beam axis. The measured transmittance was reduced by the amount calculated due to off-beam scattering. This value then corresponded very well with that predicted by XSCALE. Such an adjustment has not yet been implemented in XSCALE.*

XSCALE horizontal path calculations were also compared to visible and IR transmissometer measurements through fog, haze, and rain during the BEST-ONE test. [46] Agreement was erratic. There are three reasons for the disagreement:

1. Many trials were modeled as an advection fog; only one trial had a visibility that XSCALE recognized as advection fog. If the visibility is greater than 0.55 km, a radiation fog model should be used because the advection fog particle size distribution allows too little transmittance. It should be noted that the meteorological definition

**As a matter of course, XSCALE is driven by its users. If more fogs or the ability to handle multiple aerosols is required, please contact EOSAEL POC.*

of fog is: a surface visibility less than 1 km. [47] Only 2 of the 14 trials satisfy this, although fog was clearly present.

2. In only one trial does the human estimate of visibility agree with the transmissometer measured visibility. The transmissometer always measured a higher visibility than that recorded by the observer. If the transmissometer visibility were used as the XSCALE input, the agreement would improve.
3. IR extinction is sensitive to the air mass and to which air mass to employ was uncertain. All the BEST-ONE trials used in this comparison were composed of multiple aerosols: fog, drizzle, and maritime and urban haze. XSCALE does not deal with multiple aerosols.

Run predictions for each aerosol or the one aerosol of primary importance must be selected to obtain the range of possible transmittance. Gillespie did run predictions for fog and either a maritime haze or drizzle; [46] a large variation was found and neither aerosol matched the measurements.

3.3.2 Tests Since Last User's Guide

3.3.2.1 Vertical profile model and Meppen IR extinction.— Comparisons were made of the IR extinction calculated from the particle size distributions taken during three balloon flights of the Project Meppen 80 with the XSCALE vertical structure algorithm and a similarity theory model. [48] Reasonable agreement was found for visible and 3 – 5 μm transmittance; however, XSCALE greatly overestimated the 8 – 12 μm transmittance for these three profiles. These three flights make for a very limited test of the IR profile at this time.

The Project Meppen 80 balloon flight data blocks were reviewed. Thirty-three data sets, each representing one flight, and representative of low stratus or fog conditions, were examined. These data are measured particle size distributions that have been reduced and tabulated for extinction at 0.55, 1.06, and 10.6 μm as a function of altitude. XSCALE calculations were made for these profiles at the same three wavelengths. The reduced data and XSCALE results in the cloud layer were plotted for comparison; the visible and 1.06 μm profiles show very good agreement. The 10.6 μm in-cloud profiles are shown in appendix A. The agreement in

this case varies; XSCALE often overestimates the extinction, although sometimes it underestimates or gives good agreement. Figures 13, 14, and 15 consolidate all 33 comparisons onto three histograms. These histograms show the frequency distribution of the ratio of the data to model extinction for the in-cloud region at $0.55\ \mu\text{m}$ (figure 13), at $1.06\ \mu\text{m}$ (figure 14), and at $10.6\ \mu\text{m}$ (figure 15). This extinction ratio is calculated at each altitude within the cloud and then the average of these ratios is determined for each profile; it is the average that is plotted for the frequency distribution. This ratio is near 1.0 for the 0.55 and $1.06\ \mu\text{m}$ distributions, suggesting that the model and data agree. The $10.6\ \mu\text{m}$ distribution shows a larger spread of values. The mean and standard deviation is 0.68 and 0.46 ; the median is 0.62 . This suggests that XSCALE generally overestimates the $10.6\ \mu\text{m}$ extinction. This is a very limited data set, made up of low, wintertime, German stratus clouds. The distribution is broad; it includes 1.0 and shows no clear peak. Since the data are limited and the disagreement neither well defined nor bad, XSCALE will not be changed at this time. A broader database or particle size distribution specifically designed for stratus clouds are needed to justify a change.

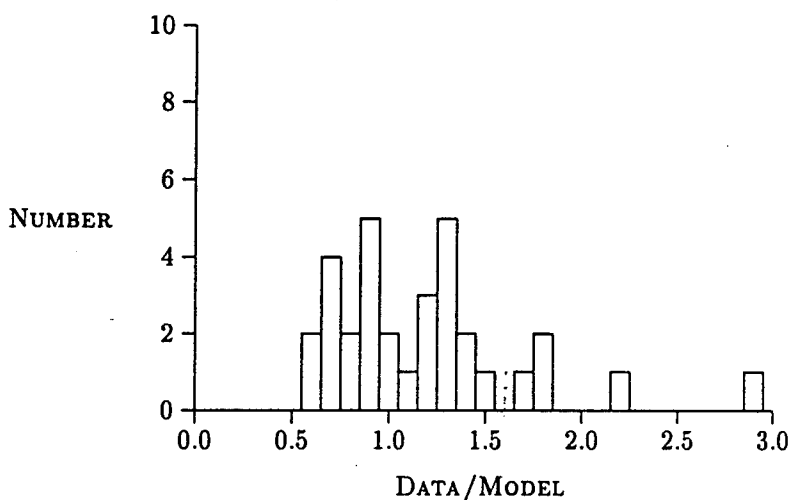


Figure 13. Data-to-model extinction ratio at $0.55\ \mu\text{m}$. Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.

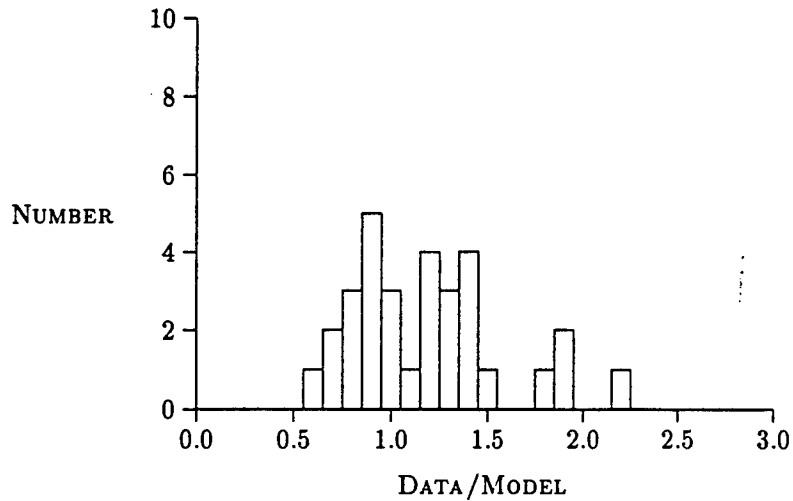


Figure 14. Data-to-model extinction ratio at 1.06 μm . Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.

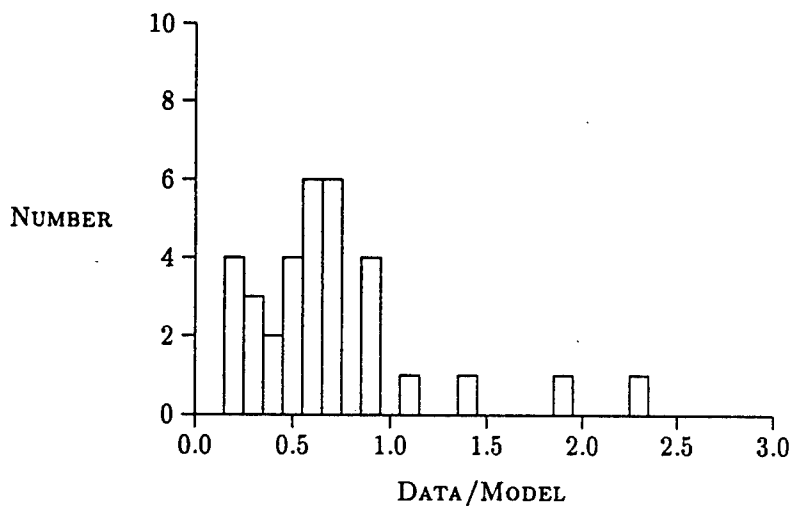


Figure 15. Data-to-model extinction ratio at 10.6 μm . Frequency distribution of the ratios of 33 profiles. The data-to-model ratio of each profile is the average of the ratios at each altitude of measurement.

3.3.2.2 *Vertical profile model and Sprakensehl visible extinction.*— Comparisons were made between the XSCALE visible vertical profile model and tower measurements made at Sprekensehl, Germany. [43] The data has been classified into different types of episodes. [49] An episode is a continuous span of time during which low visibility was recorded at the tower.

Episodes classified as type III.A.1 were requested from the Atmospheric Aerosol Optics Data Library (AAODL) database. [49] This classification specifies low visibility (less than 1 km) at the surface and high visibility at the top of the tower. These episodes were selected so that the tower would span the entire low visibility region and the air just above; this provides a test of the model in the overlaying clear air region as well as a test of the model in the low visibility region.

These episodes ranged in duration from 2 to 40 h; [49] the low visibility region was from 9- to 255-m thick. The data was recorded and stored as 10-min averages of the visibility, temperature, dew point, and the associated maximum and minimum measurement at each of six levels on the tower: 2, 9, 80, 150, 225, and 300 m above the ground level. A ceilometer also provided a 10-min average, maximum, and minimum measurement of the cloud ceiling. One such set of 10-min averages, maximum, and minimum values will be called a block of data.

A data block was rejected from consideration if the ceiling was measured to be greater than 300 m. In all remaining cases, the data was modeled as both an inversion layer and low cloud and fog, and the reduced chi-square was calculated. A block was said to represent an inversion layer if the reduced chi-square was less than that for the low cloud and fog case. The AAODL has 1066 blocks of data for 17 different episodes of type III.A.1. The ceilometer recorded an average ceiling less than 300 m for 733 of these blocks; the remaining blocks were not considered in this study. Of the 733 low ceiling blocks, 293 represent the XSCALE low cloud and advection fog profile, and 119 represent the inversion and radiation fog profile. The remaining 321 blocks are not well modeled by the current version of XSCALE.

The vertical extinction profile depends on the following inputs: ceiling height, cloud thickness, and inversion height. The profile also depends on the value of surface extinction. During analyses of these data, the clear

air value for the extinction (0.031 km^{-1}) above the low visibility region was also a model input. The ceiling height is the altitude at which the extinction first increases to 7 km^{-1} , or 0 m if the surface extinction is greater than 7 km^{-1} . This altitude is calculated by linear interpolation between the data points. Surface extinction and the upper air extinction are 2 and 300 m, respectively. The cloud top and inversion layer heights were determined to minimize the subsequent χ_r^2 value of the model profile and data block. If this cloud top was less than the ceiling, the block was not modeled as a low cloud and fog case. Low cloud and fog cases gave the results in figures 16 through 27.

Figure 16 shows the frequency distribution of the measured extinction at 2 m in steps of 2 km^{-1} for the 293 low cloud and fog data blocks. The most likely surface extinction is 14 km^{-1} , although it can range from 2 to 24 km^{-1} . Most of these data blocks represent fogs with an extinction at 2 m greater than 7 km^{-1} and a z_c of 0 m.

Figure 16. Frequency distribution of the surface extinction in steps of 2 km^{-1} for the low cloud/fog cases.

Figure 17 is the frequency distribution in steps of 10 m of the cloud thickness that minimizes χ_r^2 . For these data blocks, the most common thickness is only 80 m; many blocks (~50) evidence a cloud less than 30-m thick. The previous XSCALE default was 200 m. The default has been changed to 100 m. This frequency distribution highlights the danger of using the model default value for all runs.

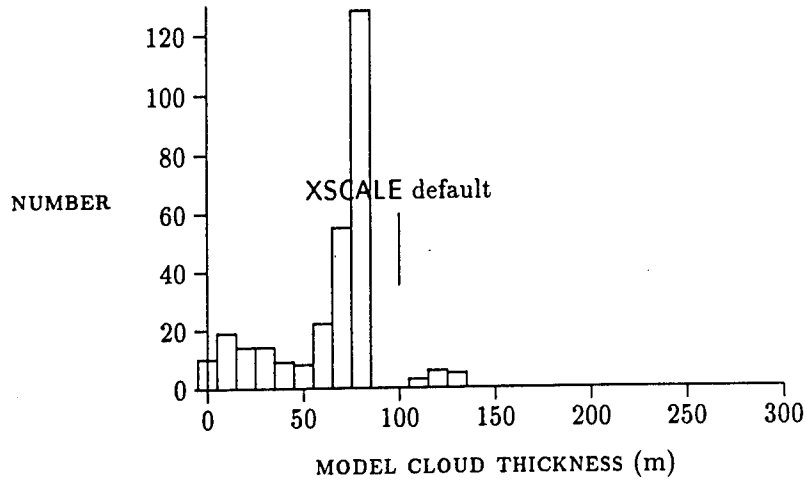


Figure 17. Frequency distribution of the cloud thickness which minimizes χ_r^2 in steps of 10 m for low cloud/fog cases.

Figure 18 shows the frequency distribution of the extinction at 300 m in steps of 0.025 km^{-1} . Since XSCALE employs clear air extinction above clouds, the model default is 0.030 km^{-1} . The most common extinction is 0.075 km^{-1} ; this is the limit of the visibility meters used for the measurements. A very broad range of greater extinctions were measured at a significant frequency of occurrence, suggesting that clear air is not always immediately above fogs or cloud tops.

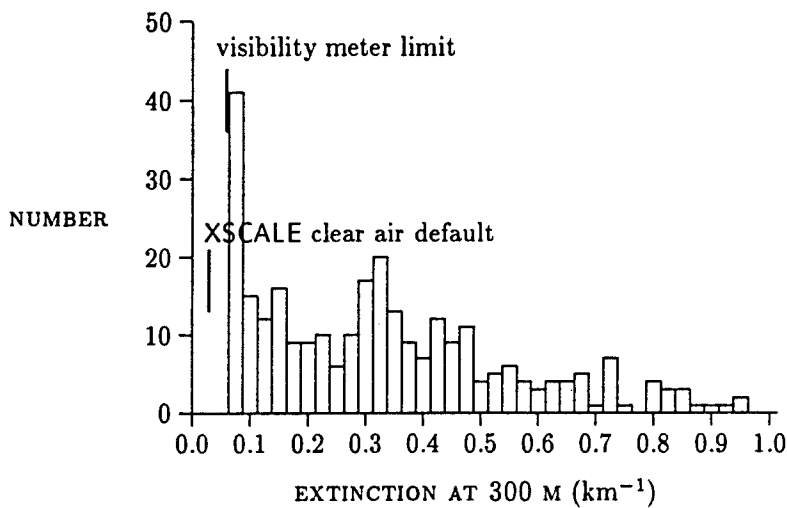


Figure 18. Frequency distribution of the upper air extinction in steps of 0.025 km^{-1} .

For many applications, the most important question is whether XSCALE calculates a reasonable transmittance. Figure 19 shows the path transmittance (from 2 to 300 m) calculated from the measured visibilities compared to the path transmittance determined by the XSCALE extinction profile at the tower stations. In almost every case, the transmittance agrees within the measurement uncertainty; this is shown by the error bars overlapping the slope 1 line. The most frequent transmittance is about 10 percent.

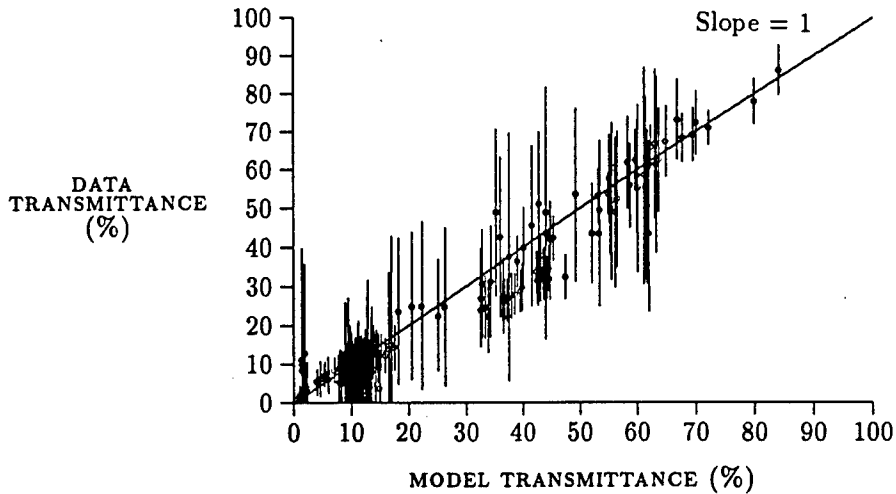


Figure 19. Transmittance determined from the measured visibilities (y-axis) versus transmittance calculated from the model extinction (x-axis) for the low cloud/fog cases. The line has slope 1.

Two representative data blocks are shown in figures 20 and 21. Figure 20 demonstrates good agreement ($\chi_r^2 = 1.0$); figure 21 demonstrates marginal agreement ($\chi_r^2 = 2.0$). Both figures illustrate a difficulty in the data samples. The calculation of z_C and the selection of z_T places a thin cloud between two of the observation levels. Since both the data and model transmittance are calculated from extinction at the six tower platforms, they agree with each other. However, had XSCALE been run for these parameters along a continuous path, a much lower transmittance would have been found. The few measurement altitudes in each data block severely restrict any conclusions that may be drawn from this data.

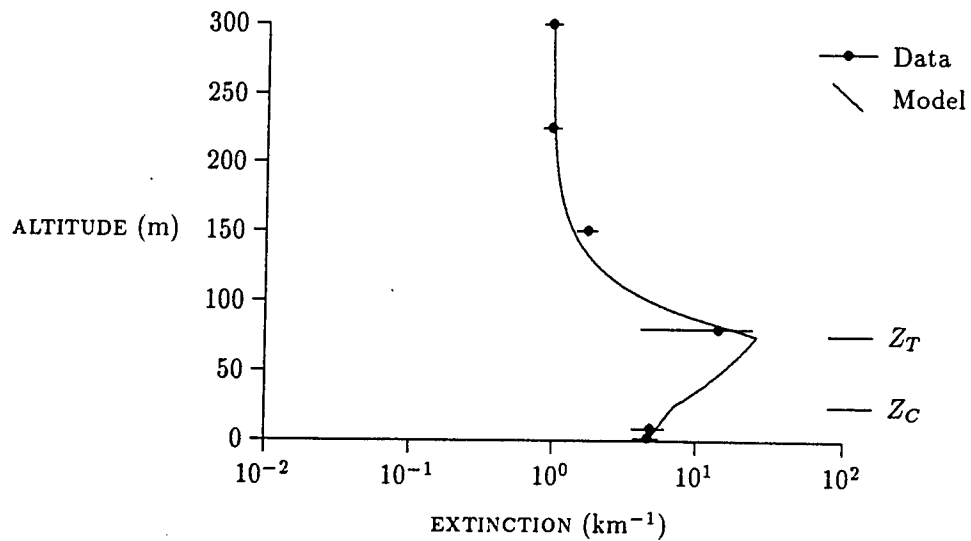


Figure 20. Low cloud profile, $\chi_r^2 = 1.0$, transmittance calculated from the data is 23 ± 19 percent, from the model 18 percent. The measured ceiling is 35 ± 8 m, the calculated ceiling is 25 m, the cloud top is at 76 m.

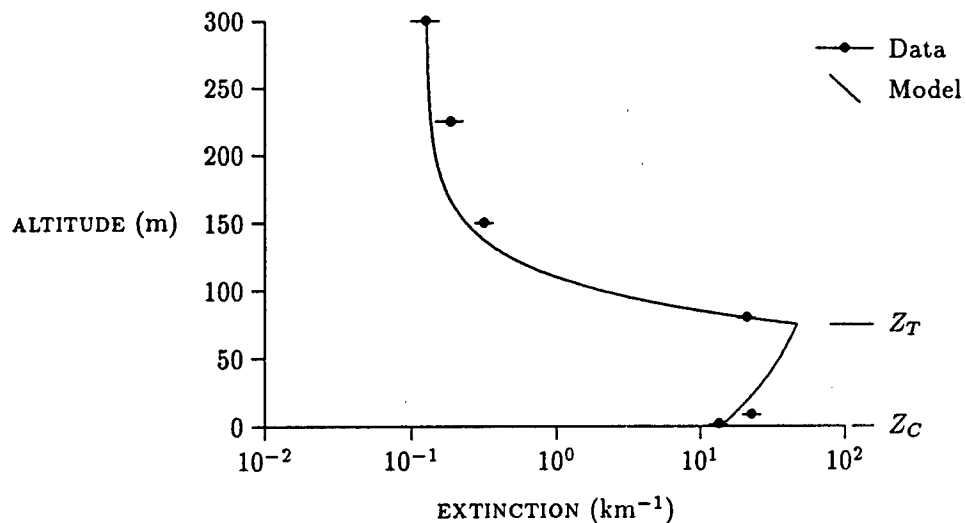


Figure 21. Advection fog profile, $\chi_r^2 = 2.0$, transmittance calculated from the data is 8 ± 3 percent, from the model 11 percent. The measured ceiling is 10 ± 8 m, the calculated ceiling is 0 m, the cloud top is at 75 m.

Inversion layer cases gave the following results. Figure 22 is the frequency distribution of the 2-m extinction measurement in steps of 1 km^{-1} for the 119 data blocks representative of the inversion layer case. Two separate values, 5 km^{-1} and 23 km^{-1} , of the surface extinction are very common. Surface extinctions above 7 km^{-1} are identified as fogs in this XSCALE user's manual. Lower extinctions are haze inversion layers. The blocks are nearly equally split between fogs and inversions. Figure 23 shows the frequency distribution of the 300-m extinction in 0.025-km^{-1} steps. The most common extinction is 0.075 km^{-1} , the upper limit of the visible meters. Again, higher extinction values were found, indicating other than clear air above this layer.

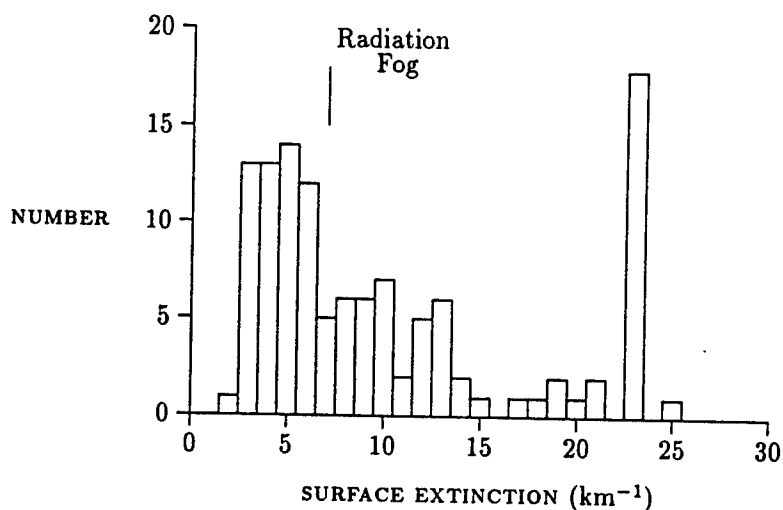


Figure 22. Frequency distribution of the surface extinction in steps of 1 km^{-1} for inversion layer cases.

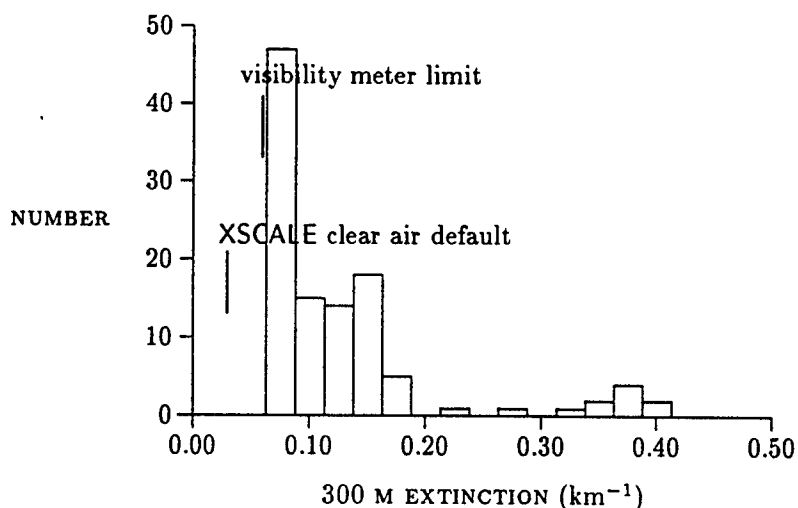


Figure 23. Frequency distribution of the upper air extinction in steps of 0.025 km^{-1} for inversion layer cases.

Figure 24 is the frequency distribution in 10-m steps of the modeled inversion height. The most likely height is approximately 170 m, although other heights are quite common. The XSCALE default height was 200 m, underestimating transmittance by approximately 15 percent. Thin layers, of heights less than 100 m, are also common. The XSCALE default has been changed to 100 m. However, no default should always be used. The subroutine VSA, which is the LOWTRAN 7 [7] implementation of XSCALE, sets a default of 50 m if the surface visibility is less than 2.0 km (extinction greater than 1.5 km^{-1}); this is true for all these data blocks. For most of these blocks, this would drastically underestimate the transmittance.

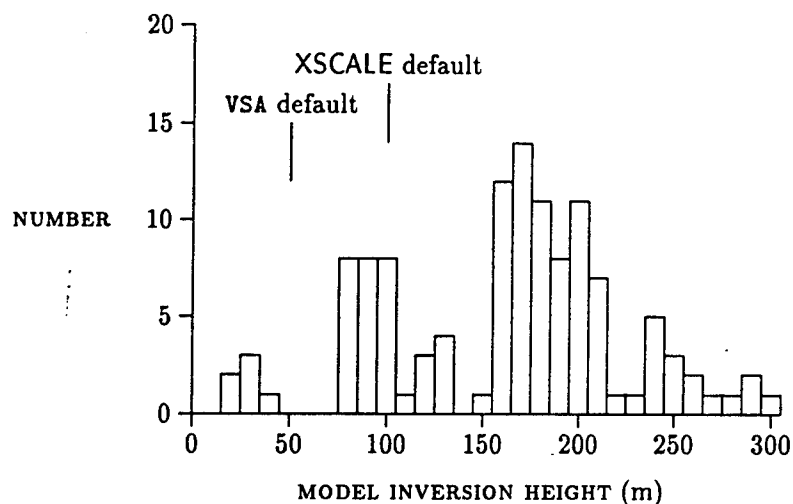


Figure 24. Frequency distribution of the inversion layer height determined to minimize χ_r^2 in steps of 10 m.

Figure 25 compares the transmittance calculated from the measured visibilities with that calculated from the XSCALE profile. Most of the points lay along the slope 1 line; many points show that XSCALE overestimates the transmittance.

Figure 26 shows a representative data block of low χ_r^2 (0.5). Figure 27 is typical of high χ_r^2 (2.0). The inversion height used in figure 26 appears to fit the data well. The height calculated from the temperature profile is 188 ± 38 m; this is clearly inappropriate for these extinction values. The inversion height used for the data graphed in figure 27 is 122 m. The temperature profile suggests 115 ± 35 m for this block, showing good agreement.

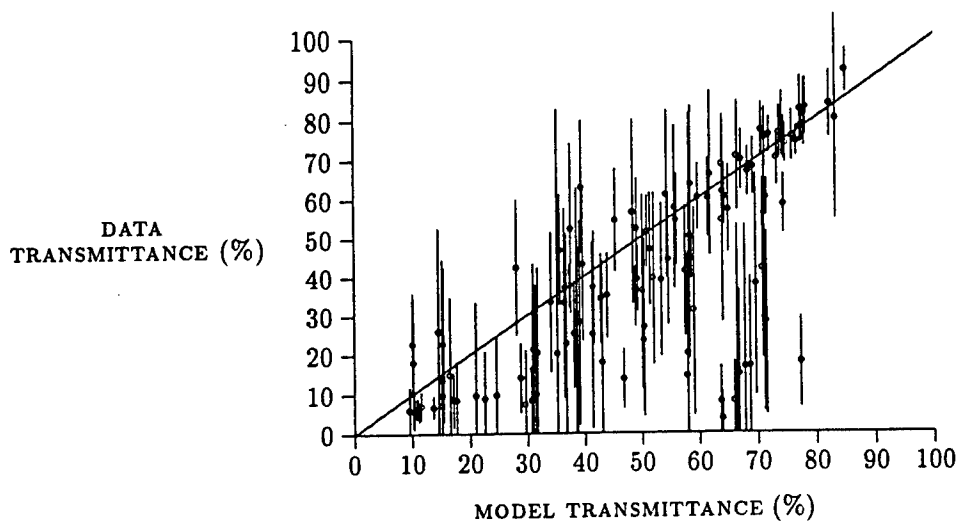


Figure 25. Transmittance determined from the measured visibilities (y-axis) versus transmittance calculated from the model extinctions (x-axis) for the inversion layer cases. The line has slope 1.

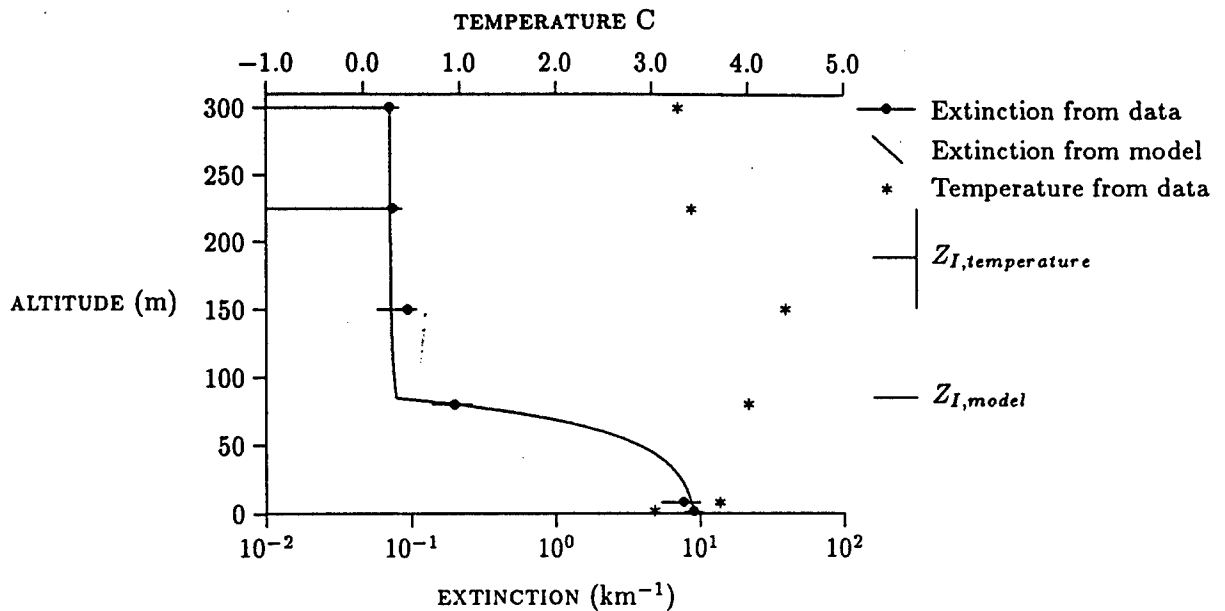


Figure 26. Inversion profile, $\chi_r^2 = 0.5$; transmittance calculated from the data is 70 ± 8 percent, from the model 67 percent.

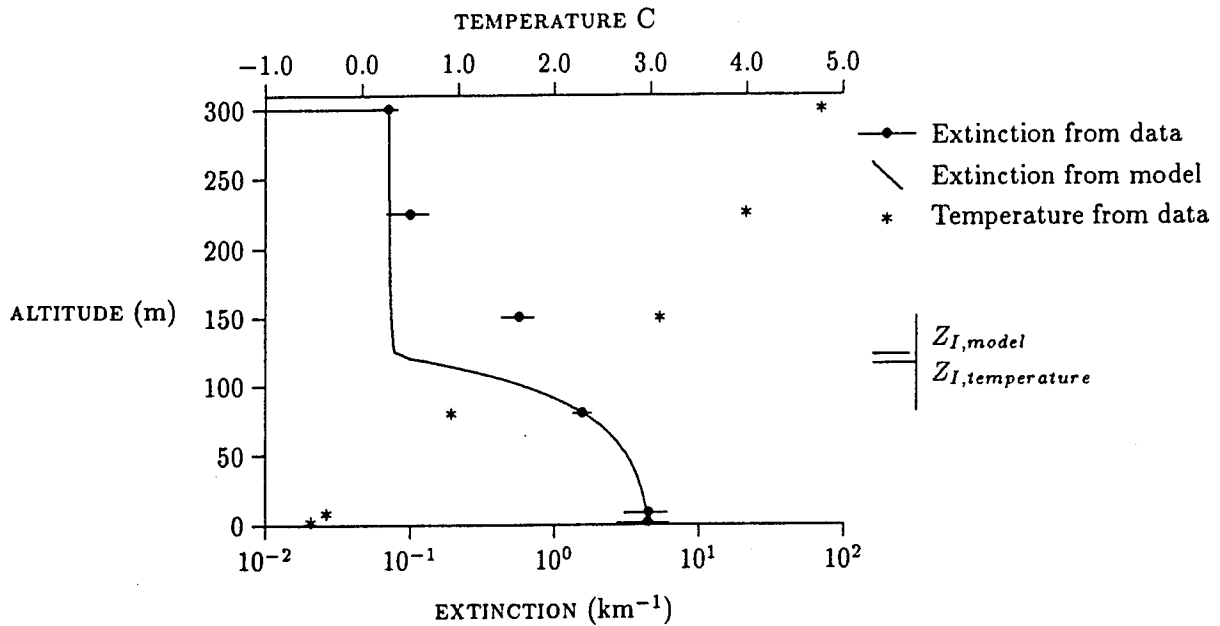


Figure 27. Inversion profile, $\chi_r^2 = 2.0$; transmittance calculated from the data is 70 ± 7 percent, from the model 73 percent.

3.3.2.3 *Vertical profile model and the Meppen, Cardington, and Sprakensehl visible extinction.*— Comparisons were made of data from three separate measurement programs to the XSCALE vertical profile model visible extinction predictions. [50] All the extinction profiles and any associated data from one such measurement program are termed a data set. The data making up a single measured extinction profile are termed a data block, or a measured profile. The earliest set is from the Meppen 1980 measurement program. [4] A tethered balloon carried particle counters between the surface and approximately 750 m. The flights occurred during November and December (figure 28).

The Cardington set is from tethered balloon flights near Cardington, England, in January and February 1983. [5] Figure 29 shows the times at which the measurements were taken. The flights went to approximately 1300 m.

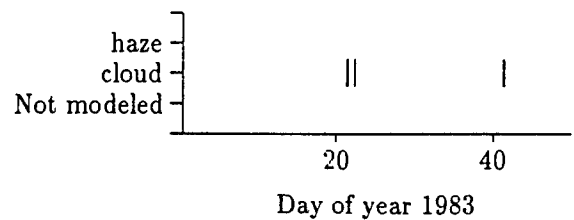
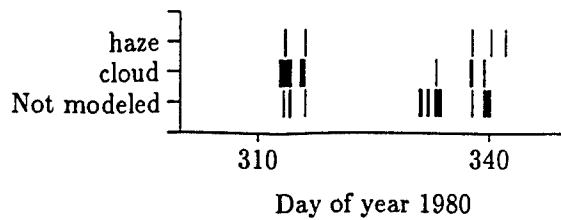


Figure 28. Meppen balloon flight data times. The y-axis denotes the type of profile, or an unsuitable data block.

Figure 29. Cardington balloon flight data times. The y-axis denotes the type of profile, or an unsuitable data block.

The Sprakensehl measurements cover the greatest period (1983 – 1985). [50] These measurements are from visibility meters mounted at six stations of a radio mast at heights of 2, 9, 80, 150, 225, and 300 m. Low visibility occurrences of type III.A.1 are examined here; these are episodes when at least the 300-m station was above the low visibility layer. These occurrences of ground fog, very low clouds, or haze and inversion layers. Most of these episodes occurred in late fall and winter, although some were during spring and summer. Figure 30 gives the measurement times of the data blocks and whether a particular data block was cloud-like, haze-like, or not modeled.

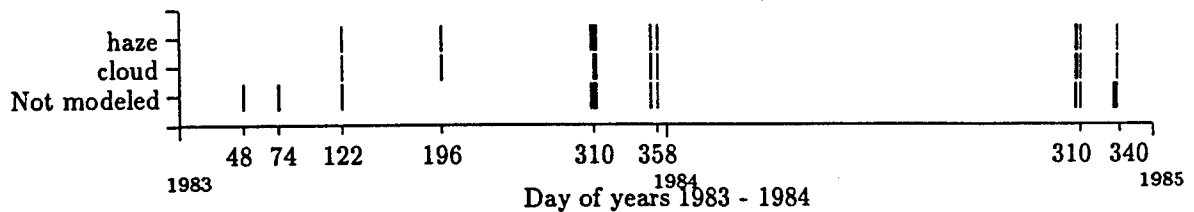


Figure 30. Sprekensehl tower data, type III.A.1 episode times. The y-axis denotes the type of profile, or an unsuitable data block.

Figure 31 shows the frequency distribution of the reduced chi-squared, χ_r^2 , for the case 1 (fog and low cloud) data sets. The Meppen data result in values less than or near 10.0, while the Sprakensehl data show values of approximately 30. The reason for the large Sprakensehl

values can be traced to the visibility meters used. The upper limit of these meters is 50 km; the XSCALE profile above a cloud quickly approaches a value of 100 km. One or two points out of six with this much difference will easily result in a χ_r^2 value of 30. The Cardington set results in high χ_r^2 caused by multiple layers found in the large altitude range (~ 1300 m) covered.

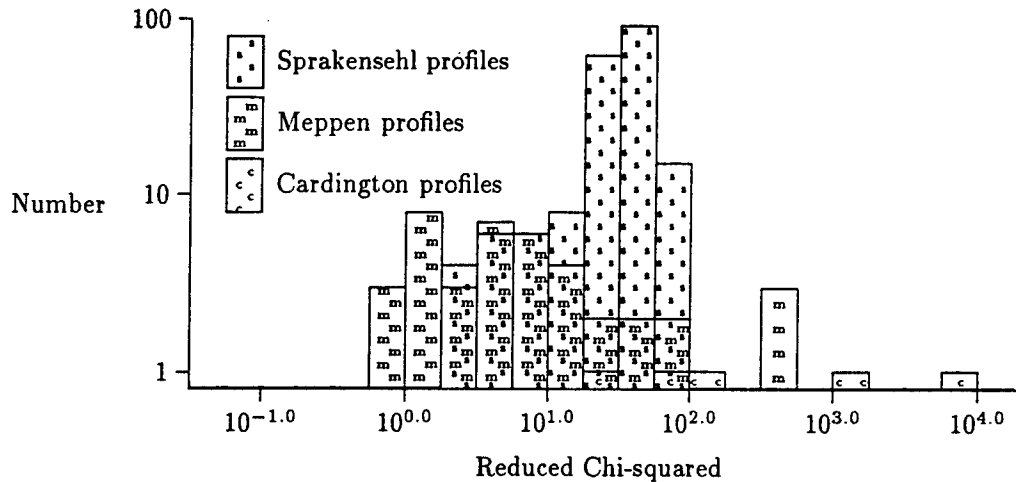


Figure 31. Frequency distribution of χ_r^2 between measured and XSCALE cloud profiles.

Figure 32 shows a similar frequency distribution for case 2 (haze layer) data sets. Here the Meppen data also show large χ_r^2 . Above a haze layer, the particle counters frequently obtained a particle size distribution reflecting clearer air, but not as clear as that measured above clouds.

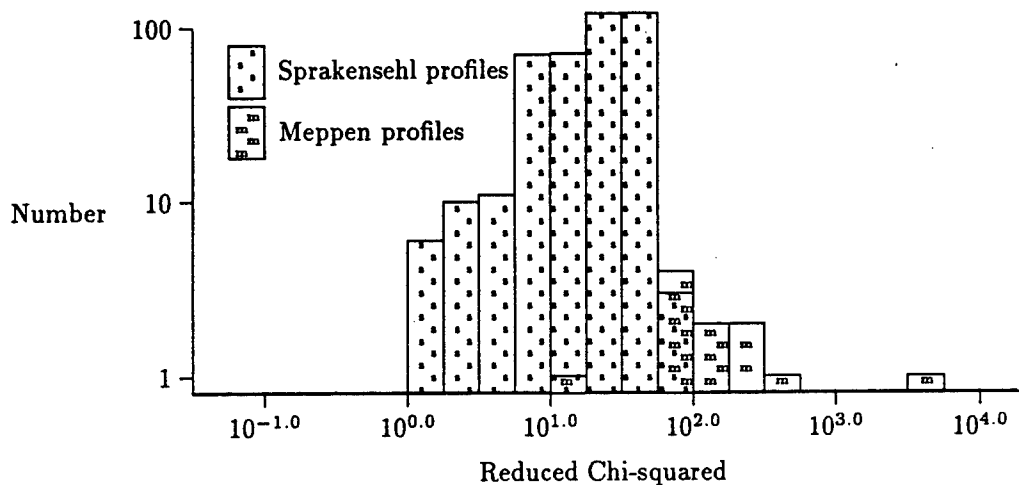


Figure 32. Frequency distribution of χ_r^2 between measured and XSCALE haze profiles.

Figures 33 through 42 show representative data sets and XSCALE calculated profiles that contributed to the above χ_r^2 frequency distributions. Data sets reflecting both low and high χ_r^2 values are shown from the Meppen, Cardington, and Sprakensehl measurement programs. Figures 33 through 38 display case 1 occurrences; figures 39 through 42 show case 2 samples. While at any particular altitude, the agreement between the measured and the XSCALE profile may be poor, the overall agreement is good. This is reflected by the transmissions and is noted on the graphs by T_{data} and T_{xscale} for transmission directly calculated from the data and from the XSCALE profile for each data block. Even the very high χ_r^2 of figure 33 appears to be a reasonable fit. This large χ_r^2 value arises from: (1) low uncertainty in the points; (2) a cloud profile not quite identical with that of XSCALE; and (3) above cloud extinction greater than that of the clear air profile.

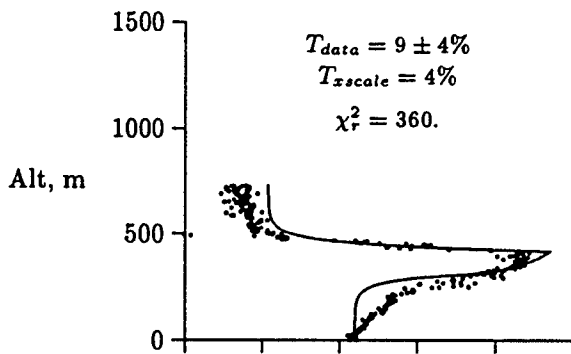


Figure 33. Meppen flight 1 and XSCALE profile.

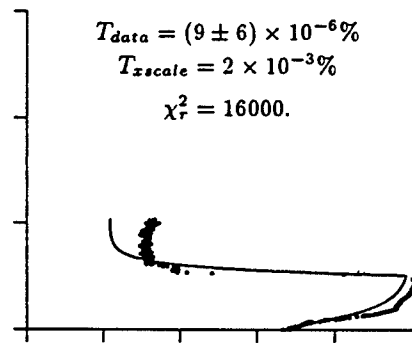


Figure 34. Meppen flight 7 and XSCALE profile.

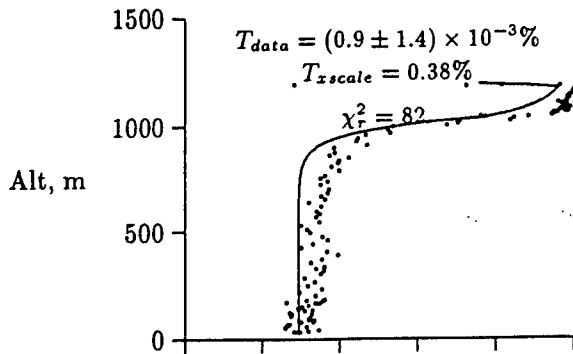


Figure 35. Cardington flight 5 and XSCALE profile.

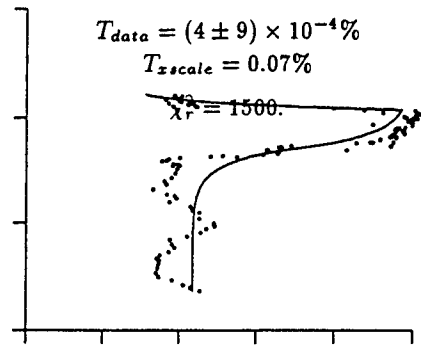


Figure 36. Cardington flight 27 and XSCALE profile.

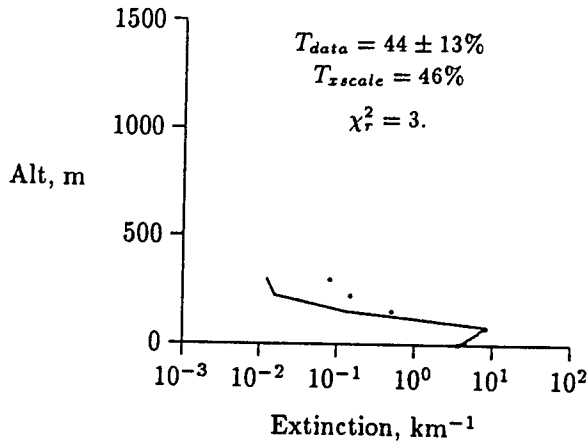


Figure 37. Sprekensehl block 14 and XSCALE profile.

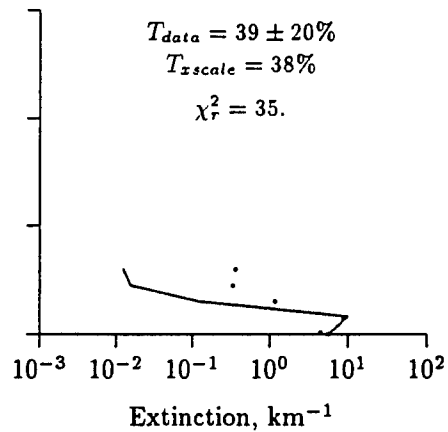


Figure 38. Sprekensehl block 926 and XSCALE profile.

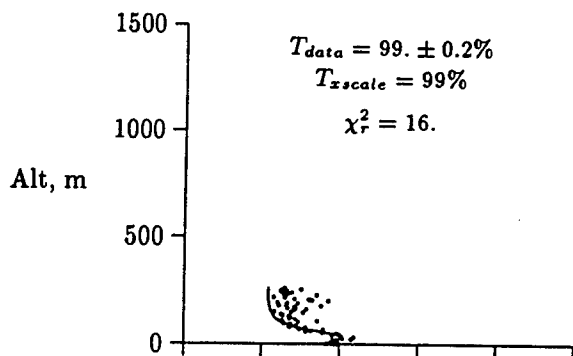


Figure 39. Meppen flight 89 and XSCALE profile.

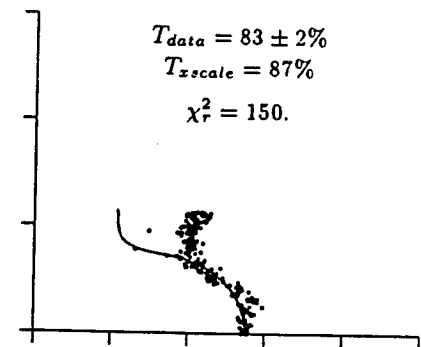


Figure 40. Meppen flight 53 and XSCALE profile.

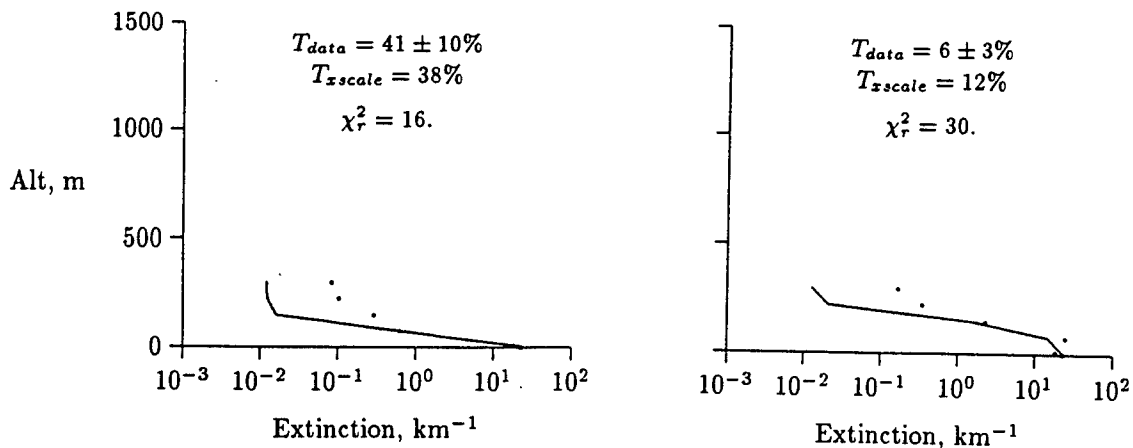


Figure 41. Sprekensehl block 735 and XSCALE profile. **Figure 42. Sprekensehl block 790 and XSCALE profile.**

All five available profiles measured at Cardington were cloud layers with a ceiling more than 1000 m. The visible extinction profiles agreed with those predicted by XSCALE. Project Meppen 80 produced 89 profiles, 40 of which were those of stratus clouds and 11 of which were haze layer under clear air. These were well modeled by XSCALE. The remaining 38 profiles were incomplete, showed no structure, or demonstrated problems with the instruments; these were not considered. Of 733 episodes at the Sprakensehl tower: (1) 263 were episodes of clear air over radiation fog or haze concentrated in an inversion layer; (2) 152 were low cloud episodes; (3) 127 had missing data and were not considered; and (4) 191 were profiles not represented by XSCALE. These numbers are different from the earlier Sprakensehl study since that study adjusted the clear air extinction value to minimize χ_r^2 and determine the profile type. The earlier study stated that $\chi_r^2 \leq 2.0$ in order to determine a profile type. The predictions critically depend on surface visibility, cloud ceiling height, and cloud thickness. Approximately one-fourth of the Sprakensehl profiles exhibited structure that is not modeled by XSCALE. These structures appear to be multiple layers, such as a ground haze under clear air under a cloud, or a low cloud under a haze layer under clear air. The Sprakensehl data are not spatially dense enough to be certain of this.

4. Operations Guide

4.1 Inputs

Section 4.1.1 describes the records that XSCALE recognizes and reads for input. XSCALE can read ten different input records. These are: AERO, HORZ, SLNH, SLNS, CLD, ICEF, PLOT, RESF, GO, and DONE. The inputs associated with these records will be described first, then the interrelationships of the input (i.e., which inputs are really needed for various scenarios). Records specific to the EOSAEL driver program are not described. These EOSAEL records are included in the input files covered in section 4.1.2 for completeness.

4.1.1 *Input Records*

An image of each input record is given in its own table. A default is a value assigned to a Fortran variable if the variable does not contain an acceptable value. A blank field will be read as zero; this will be assigned to the corresponding variable. The first two lines of the table identify the column numbers; these are present to aid in field identification, but should not be in the input file. The following line begins with the record identifier, then the Fortran variables that are assigned the values appearing on the record. The remainder of the table describes each variable and expected value in turn. All values on the records are to be real numbers; these are converted to integers when assigned to integer variables.

Table 8. The AERO record. Use this record to specify the aerosol present, the required meteorological parameters, and one detector parameter

1 2 3 4 5 6 7 8
 1234567890123456789012345678901234567890123456789012345678901234567890
 AERO IAERO RNRT RH TEMP WNDVEL RD

NAME	UNITS	Description																								
IAERO	Index	<p>Aerosol index. XSCALE predicts the transmission through this aerosol. The choices are shown below. When choosing the air mass 1, 2, or 3 consideration should be given to where the air came from, rather than the local geographical position. For instance, to predict the transmission across a farmer's field one may at first thought select a rural air mass. However, if the field is within 100 miles of a sea coast and the prevailing wind has been from the coast, the maritime air mass may be appropriate. If the field is outside an urban area and the wind is from the city, then the urban air mass may be appropriate. The fog, rain, snow, and icefog conditions are described in Chapter 2.</p> <table border="1"> <thead> <tr> <th>Aerosol index</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>1.0</td><td>Maritime air mass (arctic and polar)</td></tr> <tr><td>2.0</td><td>Urban air mass</td></tr> <tr><td>3.0</td><td>Rural air mass (continental polar)</td></tr> <tr><td>4.0</td><td>Fog one (heavy advection)</td></tr> <tr><td>5.0</td><td>Fog two (moderate radiation)</td></tr> <tr><td>6.0</td><td>Desert air mass</td></tr> <tr><td>7.0</td><td>Rain (drizzle)</td></tr> <tr><td>8.0</td><td>Rain (widespread)</td></tr> <tr><td>9.0</td><td>Rain (thunderstorm)</td></tr> <tr><td>10.0</td><td>Snow (Falling or blowing. Includes fog if relative humidity is above 95%)</td></tr> <tr><td>11.0</td><td>Icefog</td></tr> </tbody> </table> <p>The default is 1, the maritime aerosol.</p>	Aerosol index	Description	1.0	Maritime air mass (arctic and polar)	2.0	Urban air mass	3.0	Rural air mass (continental polar)	4.0	Fog one (heavy advection)	5.0	Fog two (moderate radiation)	6.0	Desert air mass	7.0	Rain (drizzle)	8.0	Rain (widespread)	9.0	Rain (thunderstorm)	10.0	Snow (Falling or blowing. Includes fog if relative humidity is above 95%)	11.0	Icefog
Aerosol index	Description																									
1.0	Maritime air mass (arctic and polar)																									
2.0	Urban air mass																									
3.0	Rural air mass (continental polar)																									
4.0	Fog one (heavy advection)																									
5.0	Fog two (moderate radiation)																									
6.0	Desert air mass																									
7.0	Rain (drizzle)																									
8.0	Rain (widespread)																									
9.0	Rain (thunderstorm)																									
10.0	Snow (Falling or blowing. Includes fog if relative humidity is above 95%)																									
11.0	Icefog																									
RNRT	mm/hr	<p>The rain rate. Required for rain aerosols only, IAERO ∈ {7, 8, 9}. The default is 3 mm/hr.</p>																								
RH	percent	<p>The surface value of the relative humidity. This is required for air mass hazes and snow, IAERO ∈ {1, 2, 3, 10}. The default is 70 % unless the climatology option has been specified through an EOSAEL record.</p>																								
TEMP	degrees C	<p>The surface value of the temperature. This is required for snow and icefog, IAERO ∈ {10, 11}. The default is 0 C unless the climatology option has been specified through an EOSAEL record.</p>																								
WNDVEL	m/sec	<p>The surface value of the wind speed. This is required for snow, IAERO ∈ {6, 10}. The default is 2 m/sec unless the climatology option has been specified through an EOSAEL record.</p>																								
RD	cm	<p>The detector radius, needed for snow transmittance. This is required for snow, IAERO ∈ {10}. The default is 10 cm.</p>																								

Table 9. The HORZ record. Use this record for a horizontal path

1 2 3 4 5 6 7 8
 1234567890123456789012345678901234567890123456789012345678901234567890
 HORZ HORDI ALT

NAME	UNITS	Description
HORDI	km	Horizontal distance or range over which the transmission is to be predicted. The default path is a 1.0 km horizontal path.
ALT	km	Altitude of transmission path above the surface. The default is 0.0 km, the surface.

Table 10. The SLNH record. Use this record for slant path predictions. One of two ways to specify a slant path

1 2 3 4 5 6 7 8
 1234567890123456789012345678901234567890123456789012345678901234567890
 SLNH HORDI ANG ALT

NAME	UNITS	Description
HORDI	km	Horizontal distance over which the transmission is to be predicted. The default is 1.0 km.
ANG	degrees above horizon	The elevation angle. The default is 0.0 degrees, a horizontal path.
ALT	km	Altitude of one endpoint of transmission path. If ANG is greater than 0, then the path is considered to be looking upward and ALT is the lower endpoint. If ANG is less than 0, then the path is considered to be looking downward and ALT is the higher endpoint. The default is 0.0 km for the lower endpoint, the surface.

Table 11. The SLNS record. Use this record for slant path predictions. One of two ways to specify a slant path

1 2 3 4 5 6 7 8
 1234567890123456789012345678901234567890123456789012345678901234567890
 SLNS SLNDI ANG ALT

NAME	UNITS	Description
SLNDI	km	Slant distance or range over which the transmission is to be predicted. The default is 1.0 km.
ANG	degrees above horizon	The elevation angle. The default is 0.0 degrees, a horizontal path.
ALT	km	Altitude of one endpoint of transmission path. If ANG is greater than 0, then the path is considered to be looking upward and ALT is the lower endpoint. If ANG is less than 0, then the path is considered to be looking downward and ALT is the higher endpoint. The default is 0.0 km for the lower endpoint, the surface.

Table 12. The CLD record. Use this record to specify the altitude of the low visibility layer

```

      1      2      3      4      5      6      7      8
123456789012345678901234567890123456789012345678901234567890
CLD          CEILHT    THICK    AINVHT

```

NAME	UNITS	Description
CEILHT	km	Cloud ceiling height (base of cloud) above ground. This must be given as a value greater than or equal to zero if the XSCALE prediction is to include the effect of a cloud. The value should be negative if a cloud is not to be modeled. The default is -1.0, no cloud present.
THICK	km	Cloud thickness. The default is 0.0. Unless CEILHT is greater or equal to 0.0 or fog-one has been specified (IAERO = 4), then 0.100.
AINVHT	km	Inversion layer thickness. This must be given as a value greater than zero if an inversion layer is to be modeled. The inversion is taken to begin at ground level and continue upward to this height. The value should be negative if an inversion layer is not to be modeled. The default is -1.0, no inversion present. Unless fog-two has been specified (IAERO = 5), then 0.100.

Table 13. The ICEF record. Use this record to provide nondefault information for the ice fog aerosol. One to three ICEF records may be present, one for each water vapor source (see section 2.1.7 and table 4)

```

1      2      3      4      5      6      7      8
1234567890123456789012345678901234567890123456789012345678901234567890
ICEF   ISOURC  DECPER   XMEAN   XMODE   IWATER

```

NAME	UNITS	Description
ISOURC	Index	An index identifying the source of water vapor causing the icefog.
	ISOURC value	Description
	0.0	Accept the algorithm defaults depending on nearness to open water
	1.0	Vehicle exhaust
	2.0	Heating plant flues
	3.0	Open water
		The default is 0.0
DECPER	0. - 1.	Fraction of particles of the source type ISOURC. The DECPER values on this and other ICEF records must add to 1.0. The default is 0.
XMEAN	μm	Mean diameter of the source particles. This is optional, although either this or XMODE must be specified if ISOURC \neq 0. The default is 0.
XMODE	μm	Mode diameter of the source particles. This is optional, although either this or XMEAN must be specified if ISOURC \neq 0.0. The default is 0.0
IWATER	Index	Descriptor of source nearness to open water. This is used if ISOURC = 0.
	IWATER value	Description
	0.0	Open water not nearby (default)
	1.0	Open water nearby
		The default is 0.

Table 14. The PLOT record. Use this record to direct the saving of the extinction profile generated by a slant path prediction

```

      1      2      3      4      5      6      7      8
1234567890123456789012345678901234567890123456789012345678901234567890
PLOT          NPLT

```

NAME	UNITS	Description
NPLT	Index	Index to direct the saving of a vertical profile to a file. See below. This file will contain profiles of relative humidity, visible extinction, and IR extinction, and the IR path average extinction at each altitude step for the wavelengths of interest. The first record (line) of the written file will contain the number of points and wavelength. (In 18X, I5, 22X, F8.3 format) The second line holds column headings, and the subsequent records will contain aerosol type, altitude, relative humidity, visible extinction, IR extinction, and IR path average extinction up to the altitude. (In 2X, I2, 2X, F5.0, 2X, F6.2, 3(1X, 1PE10.4) format). Plotting index, NPLT Description 0.0 Do not save the profile 1.0 Save to the default file, PROFIL 2.0 Save to specified file If choice '2.0' is made the following unnamed record must contain a file name up to 12 characters long.

The default is 0.

Table 15. The RESF record. Use this record to define a detector response function. The predicted aerosol transmittance will be modified by this function before the transmittance is printed out

```

      1      2      3      4      5      6      7      8
123456789012345678901234567890123456789012345678901234567890
RESF          NBR

```

NAME	UNITS	Description
NBR	Count	The number of wavelength dependent sensor response function values on following records. The maximum is 20.0. The following unnamed records must contain these values as wavelength (μm), response value (0. - 1.) pairs in (10X, 2E10.4) format. These records should be in order of increasing wavelength. The device response is taken to be 0.0 outside this specified wavelength range, and linearly interpolated between the specified values. The default is 0., although use of this record implies the response at a single wavelength at least would be expected.

Table 16. The GO record. Use this record to specify that multiple XSCALE runs are to be made

```

      1      2      3      4      5      6      7      8
1234567890123456789012345678901234567890123456789012345678901234567890
GO

```

NAME	UNITS	Description
		The GO record signifies that input for the current run is complete and execution is to begin, another data set is expected to follow. Only records containing values that change need to be present in the next set of records for the next run. All values on a record will be renewed, either with the value on the record or with a default value. Previous values associated with a record are over-written.

Table 17. The DONE record specifies that input for the last (or only) XSCALE run is complete and execution is to begin

```

      1      2      3      4      5      6      7      8
1234567890123456789012345678901234567890123456789012345678901234567890
DONE

```

NAME	UNITS	Description
		Program control is returned to EOEEXEC after this run is complete.

4.1.2 Record Combinations

A sample of possible input record combinations will now be given. The simplest input file contains only the records required by EOEXEC, and DONE is the sole required XSCALE record. All the XSCALE defaults are employed. This gives the prediction for a 1-km horizontal path through the maritime aerosol at the surface.

```
WAVL      3.0      5.0

VIS       10.0

XSCALE

DONE

END

STOP
```

More interesting and varied situations can be considered. There is one major choice to be made: whether the transmittance along a horizontal or slant path geometry will be predicted. For a horizontal path, the input records are:

```
WAVL      3.0      5.0

VIS       10.0

XSCALE

<AERO>

HORZ           5.0

<RESF>

< >

. . .

< >

<ICEF>

<ICEF>

<ICEF>
```

```
<GO >  
.  
.  
.  
DONE  
END  
STOP
```

Records enclosed in < > are optional. As shown, only two records are required: the HORZ record for the transmission path range (here 5.0 km; note that the path is at the surface since no value for ALT is present and the default is 0.0 km), and the DONE record. No AERO record results when maritime aerosol at 70 percent humidity is used. If RESF is used, the sensor response curve must follow. If GO is used, at least one more input set must follow. One to three ICEF records may be present if the aerosol index corresponding to ice fog is present on the AERO record. The PLOT and CLD records are not used since the vertical structure is not calculated.

For a slant path, the input records are as follows:

```
<AERO>  
[SLNH, SLNS] 5.0  
  
<CLD >  
  
<PLOT>  
  
< >  
  
<RESF>  
  
< >  
  
.  
.  
.  
  
< >  
  
<GO >  
  
.  
.  
.  
  
DONE
```

Again, only two records are required: '[]' indicates that one of the enclosed must be used. If the CLD record is not used, a clear air condition will be the default (The values of CEILHT, THICK, and AINVHT will be initialized as -1.0, 0.0, and -1.0). If PLOT is present, the following record may contain a user specified file name; this is allowed for by the NPLT value contained on the PLOT record. The ICEF record is not present because XSCALE will not calculate a vertical profile for the rain, snow, or ice fog aerosols.

All the input values contained on the AERO record are not needed for all the aerosol choices. Table 8 attempts to clarify the inputs that are needed for each aerosol. If a value is not required, the field may be left blank; this is true for any XSCALE input record.

4.2 Output

All output is 80 columns wide or less. The chosen input parameters are written to output. Undefined values will have been assigned a default value; these are identified by "DEFAULT" labels. The output calculations are the extinction, scattering, and absorption coefficients averaged over the path and the wavelength band. The path and wavelength averaged transmittance is also printed. The particular outputs are discussed in the next chapter.

5. Sample Runs

5.1 Overview

Two simple examples will be given in sections 5.2 and 5.3. The simplest horizontal and slant path cases are demonstrated, employing defaults wherever possible. This is the minimum amount of inputs required to make XSCALE run.

Section 5.4 will show a multiple run (use of GO) for a single horizontal path and wavelength region requesting predictions for each aerosol in turn. Section 5.5 will contain a single run for a slant path into a cloud; the profile will be saved to a file.

Section 5.6 will present a file for multiple runs through fog, rain, and maritime aerosols. The path is the same for each; the transmittance of the 3 – 5 μm band is very dependent on the aerosol. In section 5.7, two files show the influence a single input value can have on the prediction made and therefore, the necessity to read the output labels. Section 5.8 has a final file that demonstrates the use of the RESF record for the 8 – 12 μm band.

5.2 Default Horizontal Path

The input file for a simple horizontal case follows. The 3 – 5 μm wavelength band is requested, the surface visibility is 10.0 km, and the XSCALE module is specified. These three lines are required by the EOSAEL driver program. The next line is the minimum XSCALE record, the DONE record. The AERO record need not be present; the defaults will be accepted. The transmission over a 1-km path will be calculated (if the HORZ record is not present). The run ends, the next two lines are required by EOSAEL. The final two lines of the input file are used to help the reader place values in the proper columns. They are not read.

WAVL 3.0 5.0

VIS 10.0

XSCALE

DONE

END

STOP

1234567890123456789012345678901234567890123456789012345678901234567890

0 1 2 3 4 5 6 7 8

The output from this run is as follows:

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 3.0 5.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000
VISIBILITY		
	10.00 KM	

1

 * *

```

*           X S C A L E           *
*
*           NATURAL AEROSOL       *
*           EXTINCTION            *
*           MODULE                *
*
* EOSAEL87  REV 00  27 OCT 87 *
*
*****

```

XSCALE RUN # 1

OPTIONS CHOSEN: AEROSOL MODEL WAS NOT RECOGNIZED
MARITIME AEROSOL MODEL [BY DEFAULT]
RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)
SURFACE RELATIVE HUMIDITY IS GREATER THAN 99%,
ADVECTION FOG WILL BE SUBSTITUTED FOR CHOSEN AEROSOL
HORIZONTAL PATH (DEFAULT VALUE)
WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
1.4566E-01	1.9413E-02	1.2625E-01	1.000	8.6445E+01

(DEFAULT VALUE)

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .8645E+00

END EOSAEL RUN

STOP 000

5.3 Simplest Slant Path

The next run models a slant path. The only difference is that the SLNS record is used. This specifies a 10-km range (total path length) and a 30° elevation angle.

```
WAVL      3.0      5.0
VIS       10.0
XSCALE
SLNS      10.0     30.0
DONE
END
STOP
```

```
C234567890123456789012345678901234567890123456789012345678901234567890
C      1      2      3      4      5      6      7      8
```

The output from this file is:

WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
SEVERE CRIMINAL PENALTIES.

1

* *
* ELECTRO-OPTICAL SYSTEMS *
* *
* ATMOSPHERIC EFFECTS LIBRARY *
* *
* NOT FOR OPERATIONAL USE *
* *
* EOSAEL87 REV 2.1 02/23/90 *
* *

WAVL 3.0 5.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000

VISIBILITY

10.00 KM

1

* *

```

*       X S C A L E       *
*
*       NATURAL AEROSOL   *
*
*       EXTINCTION        *
*
*       MODULE            *
*
*
* EGS AEL87  REV 00  27 OCT 87 *
*
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: AEROSOL MODEL WAS NOT RECOGNIZED
 MARITIME AEROSOL MODEL [BY DEFAULT]
 RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)
 SURFACE RELATIVE HUMIDITY IS GREATER THAN 99%,
 ADVECTION FOG WILL BE SUBSTITUTED FOR CHOSEN AEROSOL
 SLANT PATH
 WIDEBAND WAVELENGTH AVERAGE

THERE IS NO INVERSION OR CLOUD LAYER PRESENT

SLANT	VERTICAL	HORIZONTAL	
DISTANCE	DISTANCE	DISTANCE	ANGLE
KM	KM	KM	DEGREES
10.000	5.000	8.660	30.00

XSCALE ONLY PREDICTS FOR 0 - 2 KM BOUNDARY LAYER

SLANT, VERTICAL, AND HORIZONTAL DISTANCES REDUCED

4.000	2.000	3.464
-------	-------	-------

PATH IS ABOVE THE SURFACE, ALTITUDE RANGES

FROM .001 TO 5.001 KILOMETERS

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%

1.6967E-02 10.000 8.4394E+01

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .8439E+00

END EOSAEL RUN

STOP 000

5.4 Multiple Runs, Horizontal Path

The transmittance for each aerosol (in order) will be calculated for a 10-km horizontal path. The visibility is 1 km, and a wideband average will again be requested. The default relative humidity is employed for the maritime, urban, rural, advection fog, and radiation fog aerosols. Rain rates of 1.0, 3.0, and 6.0 mm/h are specified for drizzle, widespread, and thunderstorm rain aerosols. This is the only meteorological parameter required for rain. Three different snow conditions are specified. The default detector radius will be employed. First is falling snow, which has a 30 percent relative humidity, a temperature of -3 °C, and a wind speed of 3 m/s (a wind speed less than 5 m/s indicates falling snow). Second is blowing snow, which has a 30 percent relative humidity, a temperature of -3 °C, and a wind speed of 7 m/s (a wind speed of greater than 5 m/s indicates blowing snow). Finally, there is snow and fog, which has a 98 percent relative humidity, a temperature of 3 °C, and a wind speed of 3 m/s (a wind speed of less than 5 m/s indicates falling snow, while a relative humidity of greater than 95 percent indicates the presence of fog as well). The output is as follows:

```
WAVL      3.0      5.0
VIS        10.0
XSCALE
HORZ      10.0
AERO      1.0
GO
AERO      2.0
GO
AERO      3.0
GO
```

AERO 4.0

GO

AERO 5.0

GO

AERO 6.0 1.0

GO

AERO 7.0 3.0

GO

AERO 8.0 6.0

GO

AERO 9.0 30.0 -3.0 3.0

GO

AERO 9.0 30.0 -3.0 7.0

GO

AERO 9.0 98.0 3.0 3.0

DONE

END

STOP

C234567890123456789012345678901234567890123456789012345678901234567890

C 1 2 3 4 5 6 7 8

WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
SEVERE CRIMINAL PENALTIES.

1

* *
* ELECTRO-OPTICAL SYSTEMS *
* *
* ATMOSPHERIC EFFECTS LIBRARY *
* *
* NOT FOR OPERATIONAL USE *
* *
* EOSAEL87 REV 2.1 02/23/90 *
* *

WAVL 3.0 5.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000
VISIBILITY		
	10.00 KM	

1

* *

```

*           X S C A L E           *
*
*           NATURAL AEROSOL       *
*           EXTINCTION            *
*           MODULE                 *
*
* EDSAEL87  REV 00   27 OCT 87 *
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: MARITIME AEROSOL MODEL
RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)
HORIZONTAL PATH
WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
1.4566E-01	1.9413E-02	1.2625E-01	10.000	2.3303E+01

XSCALE RUN # 2

OPTIONS CHOSEN: URBAN AEROSOL MODEL
RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)
HORIZONTAL PATH
WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
5.6911E-02	3.1176E-02	2.5735E-02	10.000	5.6603E+01

XSCALE RUN # 3

OPTIONS CHOSEN: RURAL AEROSOL MODEL
RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
4.0803E-02	8.1393E-03	3.2664E-02	10.000	6.6496E+01

XSCALE RUN # 4

OPTIONS CHOSEN: FOG1 - HEAVY

RELATIVE HUMIDITY 100.00 PERCENT (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
4.2276E-01	1.3774E-01	2.8502E-01	10.000	1.4587E+00

XSCALE RUN # 5

OPTIONS CHOSEN: FOG2 - LIGHT

RELATIVE HUMIDITY 100.00 PERCENT (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
4.9355E-01	6.3155E-02	4.3039E-01	10.000	7.1871E-01

XSCALE RUN # 6

OPTIONS CHOSEN: DESERT AEROSOL

WIND SPEED 2.00 M/S (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
5.4201E-02	1.2196E-02	4.2005E-02	10.000	5.8158E+01

XSCALE RUN # 7

OPTIONS CHOSEN: RAIN - DRIZZLE

RAIN RATE 3.00 MM/HR

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
1.0168E+00	10.000	3.8394E-03

XSCALE RUN # 8

OPTIONS CHOSEN: RAIN - WIDESPREAD MODEL

RAIN RATE 6.00 MM/HR

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
9.8974E-01	10.000	5.0306E-03

XSCALE RUN # 9

OPTIONS CHOSEN: RAIN - THUNDERSTORM

RELATIVE HUMIDITY 30.00 PERCENT

RAIN RATE 3.00 MM/HR (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%

3.2667E-01 10.000 3.8134E+00

XSCALE RUN # 10

OPTIONS CHOSEN: RAIN - THUNDERSTORM

RELATIVE HUMIDITY 30.00 PERCENT

RAIN RATE 3.00 MM/HR (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
3.2667E-01	10.000	3.8134E+00

XSCALE RUN # 11

OPTIONS CHOSEN: RAIN - THUNDERSTORM

RELATIVE HUMIDITY 98.00 PERCENT

RAIN RATE 3.00 MM/HR (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
3.2667E-01	10.000	3.8134E+00

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .3813E-01

END EOSAEL RUN

STOP 000

5.5 Desert Aerosol, 3.392 μ m

The following three files invoke the desert aerosol: First, the extinction at 3.392 μ m, visibility of 68.51 km, and wind speed of 10 m/s^{-1} is requested. This should give the extinction, absorption, and scattering coefficients found in table C-2 of Longtin et al. [11] Next, the same wavelength and visibility are used, but the wind speed is increased to 15 m/s^{-1} .

The 3.392- μ m wavelength is a He-Ne laser line. XSCALE can be used to calculate aerosol extinction at laser wavelengths since an aerosol air mass is a polydispersive ensemble of many different particles. Any wavelength dependence of a particular shape, size, or substance is washed out by the rest of the ensemble. The EOSAEL module LZTRAN should be used to calculate the gaseous extinction at a laser line. However, programs like LOWTRAN and MODTRAN should not be used for laser transmittance since the resolution is not great enough for the gaseous part.

```
WAVL 3.392
VIS 68.51
XSCALE
AERO 6.0 10.0
HORZ 1.0
GO
AERO 6.0 15.0
DONE
END
STOP
C2345678901234567890123456789012345678901234567890123456789012345678901234567890
C 1 2 3 4 5 6 7 8
```

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 3.392

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3392E+01 .3392E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2948.113	2948.113
WAVELENGTH (MICROMETERS)	3.392	3.392
FREQUENCY (GHZ)	88443.398	88443.398

VISIBILITY

68.51 KM

1

 * *

```

*           X S C A L E           *
*
*           NATURAL AEROSOL        *
*           EXTINCTION              *
*           MODULE                  *
*
* EOSAEL87  REV 00   27 OCT 87 *
*

```

XSCALE RUN # 1

```

OPTIONS CHOSEN:  DESERT AEROSOL

WIND SPEED  10.00 M/S

HORIZONTAL PATH

WAVELENGTH  3.392 MICROMETERS

SURFACE EXTINCTION = 2.3810E-02 1/KM

ABSORPTION  = 3.3569E-03 1/KM

SCATTERING  = 2.0453E-02 1/KM

SINGLE SCATTERING ALBEDO = .8590

```

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
2.3810E-02	1.000	9.7647E+01

XSCALE RUN # 2

```

OPTIONS CHOSEN:  DESERT AEROSOL

WIND SPEED  15.00 M/S

HORIZONTAL PATH

WAVELENGTH  3.392 MICROMETERS

SURFACE EXTINCTION = 3.7201E-02 1/KM

ABSORPTION  = 2.1324E-03 1/KM

SCATTERING  = 3.5068E-02 1/KM

SINGLE SCATTERING ALBEDO = .9427

```

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
3.7201E-02	1.000	9.6348E+01

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .9635E+00

END EOSAEL RUN

STOP 000

5.6 Desert Aerosol, 3.20 μm

The second file retains the visibility and initial wind speed but requests a calculation at 3.20 μm . These values will be found in table C-2 of Longtin et al. [11] but involve an interpolation within XSCALE.

WAVL 3.20

VIS 68.51

XSCALE

AERO 6.0 10.0

HORZ 1.0

DONE

END

STOP

C234567890123456789012345678901234567890123456789012345678901234567890

C 1 2 3 4 5 6 7 8

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS' EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * * * * *
 * ELECTRO-OPTICAL SYSTEMS *
 * * * * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * * * * *
 * NOT FOR OPERATIONAL USE *
 * * * * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * * * * *

WAVL 3.20

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3200E+01 .3200E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	3125.000	3125.000
WAVELENGTH (MICROMETERS)	3.200	3.200
FREQUENCY (GHZ)	93750.000	93750.000
VISIBILITY		
	68.51 KM	

1

 * * * * *

```

*       X S C A L E       *
*
*       NATURAL AEROSOL   *
*       EXTINCTION        *
*       MODULE            *
*
* EOSAEL87  REV 00  27 OCT 87 *
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: DESERT AEROSOL

WIND SPEED 10.00 M/S

HORIZONTAL PATH

WAVELENGTH 3.200 MICROMETERS

SURFACE EXTINCTION = 2.3083E-02 1/KM

ABSORPTION = 2.9573E-03 1/KM

SCATTERING = 2.0126E-02 1/KM

SINGLE SCATTERING ALBEDO = .8719

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
2.3083E-02	1.000	9.7718E+01

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .9772E+00

END EOSAEL RUN

STOP 000

5.7 Desert Aerosol, 3 – 5 μm

The third input file requests a 3 – 5 μm band average at 68.51-km visibility and a 10 m/s^{-1} wind speed. This should be an integration of values found in table C-2 of Longtin et al. [11] The output of these three files is as follows:

```
WAVL      3.00      5.00
VIS       68.51
XSCALE
AERO      6.0              10.0
HORZ      1.0
DONE
END
STOP
C234567890123456789012345678901234567890123456789012345678901234567890
C         1         2         3         4         5         6         7         8
```

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 3.00 5.00

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000

VISIBILITY

68.51 KM

1

 * *

```

*           X S C A L E           *
*
*           NATURAL AEROSOL       *
*           EXTINCTION             *
*           MODULE                  *
*
* EOSAEL87  REV 00  27 OCT 87 *
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: DESERT AEROSOL

WIND SPEED 10.00 M/S

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
2.1446E-02	2.1142E-03	1.9331E-02	1.000	9.7878E+01

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .9788E+00

END EOSAEL RUN

STOP 000

5.8 Ice Fog

The transmittance for ice fog at a single wavelength of 4 μm is requested in the following file: The visibility is 0.8 km, a horizontal path of 1 km at the surface is specified, and the temperature is -35 °C. Several default values are accepted here because the ICEF record is not present. These values and the resulting action by the program are: ISOURC = 0 meaning no source values will be input, DECPER = 0.0 meaning the value of IWATER will decide the source mixture, IWATER = 0 meaning no open water nearby (thus DECPER (vehicles) = 0.56 and DECPER (heating flue) = 0.44), neither XMEAN nor XMODE specified meaning the program will calculate the mode radii r_c by equation (22).

```
WAVL      4.0
VIS       0.8
XSCALE
HORZ      1.0
AERO      10.0          -35.0
DONE
END
STOP
C2345678901234567890123456789012345678901234567890123456789012345678901234567890
```

C	1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---	---

This produces more involved output:

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 4.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .4000E+01 .4000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2500.000	2500.000
WAVELENGTH (MICROMETERS)	4.000	4.000
FREQUENCY (GHZ)	75000.000	75000.000

VISIBILITY

.80 KM

1

 * *

```

*       X S C A L E       *
*
*       NATURAL AEROSOL   *
*       EXTINCTION        *
*       MODULE            *
*
* EOSAEL87 REV 00  27 OCT 87 *
*

```

XSCALE RUN # 1

```

OPTIONS CHOSEN: SNOW MODEL
                 TEMPERATURE -35.00 DEGREES C
                 WIND SPEED  2.00 M/S (DEFAULT VALUE)
                 DETECTOR RADIUS 10.00 CM (DEFAULT VALUE)
                 HORIZONTAL PATH
                 WAVELENGTH  4.000 MICROMETERS
                 SURFACE EXTINCTION = 4.8613E+00 1/KM
                 ABSORPTION = 0.0000E+00 1/KM
                 SCATTERING = 0.0000E+00 1/KM
                 SINGLE SCATTERING ALBEDO = .0000

```

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
4.8613E+00	1.000	7.7403E-01

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .7740E-02

END EOSAEL RUN

STOP 000

5.9 Slant Path Through a Cloud

The transmission over a slant path extending through a thin cloud is calculated here. The path is 10-km long with a 6° elevation beginning at the surface. The cloud is 700 m above the earth's surface and extends to 750 m. The extinction profile will be written to the file UG5. This file already exists in the directory in which XSCALE was run; this will be noted in the output.

```
WAVL      3.0      5.0
VIS       10.0
XSCALE
AERO      2.0              87.0
SLNS      10.0      6.0
CLD       0.700      0.050      -1.0
PLOT      2.0
UG5
DONE
END
STOP
C234567890123456789012345678901234567890123456789012345678901234567890
C      1      2      3      4      5      6      7      8
```

This produces the following output:

WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
SEVERE CRIMINAL PENALTIES.

1

* * *

* ELECTRO-OPTICAL SYSTEMS *

* * *

* ATMOSPHERIC EFFECTS LIBRARY *

* * *

* NOT FOR OPERATIONAL USE *

* * *

* EOSAEL87 REV 2.1 02/23/90 *

* * *

WAVL 3.0 5.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000

VISIBILITY

10.00 KM

1

* * *


```

*       X S C A L E       *
*
*       NATURAL AEROSOL   *
*
*       EXTINCTION        *
*
*       MODULE            *
*
*
* EOSAEL87  REV 00  27 OCT 87 *
*
*****

```

xscale WARNING: FILE(

WILL BE OVER WRITTEN

UG5

XSCALE RUN # 1

OPTIONS CHOSEN: URBAN AEROSOL MODEL

RELATIVE HUMIDITY 87.00 PERCENT

SLANT PATH

WIDEBAND WAVELENGTH AVERAGE

CLOUD CEILING HEIGHT IS .700 KILOMETERS

CLOUD THICKNESS IS .050 KILOMETERS

* * AVERAGE EXTINCTION CALCULATED FROM THE
GROUND UP TO THE CLOUD TOP * *

ASSUME CLEAR AIR PROFILE ABOVE

SLANT DISTANCE	VERTICAL DISTANCE	HORIZONTAL DISTANCE	ANGLE
KM	KM	KM	DEGREES
10.000	1.045	9.945	6.00

PATH IS ABOVE THE SURFACE, ALTITUDE RANGES
FROM .001 TO 1.046 KILOMETERS

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%

1.1250E+00 10.000 1.3003E-03

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .1300E-04

END EOSAEL RUN

STOP 000

This file UG5 has been written over with the extinction profile calculated in this run. The file looks like:

NUMBER OF POINTS	24	WAVELENGTH:	3.000		
IAERO	ALT	RELHUM	WISEXT	IR EXT	IR PATHAVE
2	1.	87.00	3.9121E-01	1.1295E-01	0.0000E+00
2	70.	87.01	3.9198E-01	1.1319E-01	1.1145E-01
2	135.	87.03	3.9347E-01	1.1364E-01	1.1240E-01
2	198.	87.06	3.9627E-01	1.1450E-01	1.1293E-01
2	258.	87.12	4.0140E-01	1.1606E-01	1.1348E-01
2	315.	87.22	4.1061E-01	1.1888E-01	1.1420E-01
2	369.	87.39	4.2683E-01	1.2384E-01	1.1525E-01
2	421.	87.68	4.5511E-01	1.3252E-01	1.1684E-01
2	470.	88.15	5.0438E-01	1.4771E-01	1.1926E-01
2	515.	88.86	5.9116E-01	1.7466E-01	1.2300E-01
2	558.	89.92	7.4778E-01	2.2386E-01	1.2883E-01
2	597.	91.41	1.0414E+00	3.1924E-01	1.3820E-01
2	633.	93.40	1.6184E+00	5.1216E-01	1.5368E-01
2	664.	95.87	2.8017E+00	9.3359E-01	1.8031E-01
2	690.	98.73	5.2797E+00	1.9640E+00	2.2906E-01
2	700.	100.00	7.0000E+00	7.3430E+00	2.9088E-01
4	747.	100.00	2.4128E+01	2.5310E+01	1.2951E+00
4	750.	100.00	2.5601E+01	2.6856E+01	1.4020E+00
4	756.	100.00	9.1653E+00	9.6144E+00	1.5300E+00

2 769. 50.00 1.5023E+00 2.5551E-01 1.5894E+00
 2 803. 50.00 1.4453E-01 2.4582E-02 1.5277E+00
 2 874. 50.00 4.5662E-02 7.7662E-03 1.4057E+00
 2 980. 50.00 3.9255E-02 6.6765E-03 1.2541E+00
 2 1046. 50.00 3.9035E-02 6.6391E-03 1.1757E+00

NUMBER OF POINTS 24 WAVELENGTH: 3.200

IAERO	ALT	RELHUM	WISEXT	IR EXT	IR PATHAVE
2	1.	87.00	3.9121E-01	8.6544E-02	0.0000E+00
2	70.	87.01	3.9198E-01	8.6720E-02	1.9683E-01

2 980. 50.00 3.9255E-02 4.7909E-03 1.2007E+01
 2 1046. 50.00 3.9035E-02 4.7641E-03 1.1252E+01

NUMBER OF POINTS 24 WAVELENGTH: 5.000

IAERO	ALT	RELHUM	WISEXT	IR EXT	IR PATHAVE
2	1.	87.00	3.9121E-01	4.3620E-02	0.0000E+00
2	70.	87.01	3.9198E-01	4.3705E-02	6.4178E-01
2	135.	87.03	3.9347E-01	4.3869E-02	6.4724E-01
2	198.	87.06	3.9627E-01	4.4178E-02	6.5022E-01
2	258.	87.12	4.0140E-01	4.4743E-02	6.5325E-01
2	315.	87.22	4.1061E-01	4.5757E-02	6.5726E-01
2	369.	87.39	4.2683E-01	4.7542E-02	6.6307E-01
2	421.	87.68	4.5511E-01	5.0653E-02	6.7179E-01
2	470.	88.15	5.0438E-01	5.6067E-02	6.8505E-01
2	515.	88.86	5.9116E-01	6.5588E-02	7.0543E-01
2	558.	89.92	7.4778E-01	8.2729E-02	7.3709E-01

2	597.	91.41	1.0414E+00	1.1564E-01	7.8757E-01
2	633.	93.40	1.6184E+00	1.8066E-01	8.7028E-01
2	664.	95.87	2.8017E+00	3.2286E-01	1.0116E+00
2	690.	98.73	5.2797E+00	7.0997E-01	1.2775E+00
2	700.	100.00	7.0000E+00	7.7259E+00	1.9170E+00
4	747.	100.00	2.4128E+01	2.6630E+01	1.3383E+01
4	750.	100.00	2.5601E+01	2.8256E+01	1.4600E+01
4	756.	100.00	9.1653E+00	1.0116E+01	1.6061E+01
2	769.	50.00	1.5023E+00	1.7828E-01	1.6750E+01
2	803.	50.00	1.4453E-01	1.7151E-02	1.6091E+01
2	874.	50.00	4.5662E-02	5.4187E-03	1.4804E+01
2	980.	50.00	3.9255E-02	4.6584E-03	1.3207E+01
2	1046.	50.00	3.9035E-02	4.6323E-03	1.2375E+01

Some points concerning the slant path calculation may be made. The vertical step size is not constant; it depends on how quickly the visible extinction is changing. The more rapid the change, the smaller the step taken. There is always a step at a layer boundary (700 and 750 m). The altitude is given in meters. The profile is calculated from the surface up to the vertical extent of the path. The humidity begins at 87 percent, as specified, and grows to 100 percent at the cloud ceiling. For any altitude at which the visible extinction is greater than 7 km^{-1} , the humidity is set to 100 percent and the fog-one particle size distribution is used. Above the cloud, the humidity is a constant 50 percent and the surface aerosol particle size distribution is used. The IR extinction is calculated every $0.2 \mu\text{m}$, but not all values are shown here. The IR PATHAVE column contains the IR extinction at the wavelength averaged over the path from the surface to the given altitude.

5.10 Multiple Run with Mistake

The following input file specifies a horizontal path of 2 km at the surface. A wideband average is again performed with a visibility of 0.8 km. First, transmittance through a radiation fog is requested. Then a drizzle is specified with a rain rate of 0.2 mm/h. Then the rain rate is increased to 6 mm/h. Because the AERO record has been entered, the variable IAERO has been reset; since it is not specified, the default is used (1, maritime).

```
WAVL      3.0      5.0
VIS        0.8
XSCALE
HORZ      2.0
AERO      5.0
GO
AERO      7.0      0.2
GO
AERO              6.0
DONE
END
STOP
1234567890123456789012345678901234567890123456789012345678901234567890
0         1         2         3         4         5         6         7         8
```

The output from this set of records is as follows:

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 3.0 5.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .3000E+01 .5000E+01 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	2000.000	3333.333
WAVELENGTH (MICROMETERS)	3.000	5.000
FREQUENCY (GHZ)	60000.000	100000.000

VISIBILITY

.80 KM

1

 * *

```

*           X S C A L E           *
*
*           NATURAL AEROSOL       *
*           EXTINCTION            *
*           MODULE                 *
*
* EOSAEL87  REV 00  27 OCT 87  *
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: FOG2 - LIGHT
RELATIVE HUMIDITY 100.00 PERCENT (DEFAULT VALUE)
HORIZONTAL PATH
WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
6.1693E+00	7.8943E-01	5.3799E+00	2.000	4.3791E-04

XSCALE RUN # 2

OPTIONS CHOSEN: RAIN - DRIZZLE
RAIN RATE .20 MM/HR
HORIZONTAL PATH
WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
1.8462E-01	2.000	6.9126E+01

XSCALE RUN # 3

OPTIONS CHOSEN: AEROSOL MODEL WAS NOT RECOGNIZED
MARITIME AEROSOL MODEL [BY DEFAULT]

RELATIVE HUMIDITY 70.00 PERCENT (DEFAULT VALUE)

HORIZONTAL PATH

WIDEBAND WAVELENGTH AVERAGE

WIDEBAND AVERAGE: FROM 3.000 TO 5.000 UM

EXTINCTION	ABSORPTION	SCATTERING	DISTANCE	TRANSMISSION
1/KM	1/KM	1/KM	KM	%
1.8207E+00	2.4266E-01	1.5781E+00	2.000	2.6214E+00

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .2621E-01

END EOSAEL-RUN

STOP 000

5.11 Slant Path and Boundary Defaults Dependence on Visibility

The following two input files show how a small change in the input records can cause XSCALE to report two different predictions. The only difference in the inputs is in the VIS record; first the VIS is set to 0.21 km, then 0.1 km. As the output shows, the first run is the expected calculation: a 5-km slant path through a radiation fog. The second run calculated the transmission through a heavy advection fog. The fog thickness in the first run is 60 m; since a radiation fog is the aerosol, the value of AINVHT is used. The fog thickness is 90 m in the second run; since an advection fog is the aerosol employed, the value of THICK is used. The VIS value is the cause of the two predictions; if the VIS is poor (less than 0.2 km), XSCALE will use the advection fog particle size distribution for scaling the visible extinction to the IR extinction.

```
WAVL      8.0      12.0
VIS        0.21
XSCALE
AERO       5.0
SLMS       5.0      10.0
```


CLD 0.0 0.09 0.06

DONE

END

STOP

1234567890123456789012345678901234567890123456789012345678901234567890

0 1 2 3 4 5 6 7 8

The poor visibility file is as follows:

WAVL 8.0 12.0

VIS 0.1

XSCALE

AERO 5.0

SLNS 5.0 10.0

CLD 0.0 0.09 0.06

DONE

END

STOP

1234567890123456789012345678901234567890123456789012345678901234567890

0 1 2 3 4 5 6 7 8

The output of the first file is as follows:

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 8.0 12.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .8000E+01 .1200E+02 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	833.333	1250.000
WAVELENGTH (MICROMETERS)	8.000	12.000
FREQUENCY (GHZ)	25000.000	37500.000

VISIBILITY

.21 KM

1

 * *

```

*       X S C A L E       *
*
*       NATURAL AEROSOL   *
*       EXTINCTION        *
*       MODULE            *
*
* EOSAEL87 REV 00  27 OCT 87 *
*

```

XSCALE RUN # 1

OPTIONS CHOSEN: FOG2 - LIGHT
RELATIVE HUMIDITY 100.00 PERCENT (DEFAULT VALUE)
SLANT PATH
WIDEBAND WAVELENGTH AVERAGE
THICKNESS OF RADIATION FOG IS .060 KILOMETERS
ASSUME CLEAR AIR PROFILE ABOVE.

SLANT DISTANCE KM	VERTICAL DISTANCE KM	HORIZONTAL DISTANCE KM	ANGLE DEGREES
5.000	.868	4.924	10.00

PATH IS ABOVE THE SURFACE, ALTITUDE RANGES
FROM .001 TO .869 KILOMETERS

WIDEBAND AVERAGE: FROM 8.000 TO 12.000 UM

EXTINCTION 1/KM	DISTANCE KM	TRANSMISSION %
6.6685E-01	5.000	3.5642E+00

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .3564E-01

END EOSAEL RUN

STOP 000

The second input file produces the following output:

WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
SEVERE CRIMINAL PENALTIES.

1

*
* ELECTRO-OPTICAL SYSTEMS *
*
* ATMOSPHERIC EFFECTS LIBRARY *
*
* NOT FOR OPERATIONAL USE *
*
* EOSAEL87 REV 2.1 02/23/90 *
*

WAVL 8.0 12.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .8000E+01 .1200E+02 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	833.333	1250.000
WAVELENGTH (MICROMETERS)	8.000	12.000
FREQUENCY (GHZ)	25000.000	37500.000

VISIBILITY

.10 KM

1

*
*

* X S C A L E *

* *

* NATURAL AEROSOL *

* EXTINCTION *

* MODULE *

* *

* EOSAEL87 REV 00 27 OCT 87 *

* *

XSCALE RUN # 1

OPTIONS CHOSEN: FOG1 - HEAVY

RELATIVE HUMIDITY 100.00 PERCENT (DEFAULT VALUE)

SLANT PATH

WIDEBAND WAVELENGTH AVERAGE

THICKNESS OF ADVECTION FOG IS .090 KILOMETERS

ASSUME CLEAR AIR PROFILE ABOVE.

SLANT	VERTICAL	HORIZONTAL	
DISTANCE	DISTANCE	DISTANCE	ANGLE
KM	KM	KM	DEGREES
5.000	.868	4.924	10.00

PATH IS ABOVE THE SURFACE, ALTITUDE RANGES

FROM .001 TO .869 KILOMETERS

WIDEBAND AVERAGE: FROM 8.000 TO 12.000 UM

EXTINCTION	DISTANCE	TRANSMISSION
1/KM	KM	%
7.2382E+00	5.000	1.9163E-14

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .1916E-15

END EOSAEL RUN

STOP 000

5.12 Response Function Option

The use of the RESF record is demonstrated next. An 8 – 12 μm band average is requested. Only two response function values are input, both specified at wavelengths outside the requested band. This specifies a very simple trapezoidal shaped response function. As such, this is not very real, but is presented as a simple example.

```
WAVL      8.0      12.0
VIS        2.4
XSCALE
AERO      5.0
SLNS      5.0      10.0
CLD       0.0      0.09      0.06
RESF      2.0
          .7000E+01 .1000E+00
          .1210E+02 .8000E+00
DONE
END
STOP
1234567890123456789012345678901234567890123456789012345678901234567890
0         1         2         3         4         5         6         7         8
```

 WARNING - THIS LIBRARY CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED
 BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751 ET SEQ.) OR
 EXECUTIVE ORDER 12470. VIOLATION OF THESE EXPORT LAWS ARE SUBJECT TO
 SEVERE CRIMINAL PENALTIES.

1

 * *
 * ELECTRO-OPTICAL SYSTEMS *
 * *
 * ATMOSPHERIC EFFECTS LIBRARY *
 * *
 * NOT FOR OPERATIONAL USE *
 * *
 * EOSAEL87 REV 2.1 02/23/90 *
 * *

WAVL 8.0 12.0

NOTE: THAT THE ABOVE CARD WAS MODIFIED FOR CONSISTENCY TO:

WAVL .8000E+01 .1200E+02 .0000E+00

	BEGINNING	ENDING
WAVENUMBER (CM**-1)	833.333	1250.000
WAVELENGTH (MICROMETERS)	8.000	12.000
FREQUENCY (GHZ)	25000.000	37500.000

VISIBILITY

2.40 KM

1

 * *

```
*           X S C A L E           *  
*                                     *  
*           NATURAL AEROSOL       *  
*           EXTINCTION             *  
*           MODULE                 *  
*                                     *  
* EOSAEL87 REV 00  27 OCT 87 *  
*                                     *
```

A non response function format input record encountered

.7000E+01 .1000E+00

A NON EOSAEL FORMAT INPUT CARD ENCOUNTERED

.1210E+02 .8000E+00

TOTAL TRANSMITTANCE FOR ALL SOURCES IS: .0000E+00

END EOSAEL RUN

STOP 000

References

1. Shettle, Eric P. and R. W. Fenn. *Models for the Aerosols of the Lower Atmosphere and the Effects of Humidity Variations on Their Optical Properties*. AFGL-TR-79-0214, Air Force Geophysics Laboratory: Hanscom Air Force Base, MA, 1979.
2. Hanel, G. "The Properties of Atmospheric Aerosol Particles as Functions of the Relative Humidity of Thermodynamic Equilibrium with the Surrounding Moist Air." *Advances in Geophysics*: vol. 19. Academic Press: New York, 1976.
3. Lindberg, James D. *Vertical Distribution of Fog and Haze Near Greding, Germany, During February and March 1980*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1982.
4. Lindberg, James D., Radon B. Loveland, Louis D. Duncan, and M. B. Richardson. *Vertical Profiles of Extinction and Particle Size Distribution Measurements Made in European Wintertime Fog and Haze*. ASL-TR-0151, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1984.
5. Lindberg, James D. *Final Report on the European Vertical Structure Experiment on Cardington, England*. ASL-TR-0153, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1984.
6. Bohren, Craig F. and Donald R. Huffman. *Absorption and Scattering of Light by Small Particles*. John Wiley and Sons: New York, 1983.
7. Kneizys, F. X., E. P. Shettle, L. W. Abreu, G. P. Anderson, J. H. Chetwynd, W. O. Gallery, J. E. A. Selby, and S. A. Clough. *Users Guide to LOWTRAN 7*. AFGL-TR-88-0177, Air Force Geophysics Laboratory: Hanscom Air Force Base, MA, 1989.

8. Kneizys, F. X., E. P. Shettle, W. O. Gallery, J. H. Chetwynd, L. W. Abreu, J. E. A. Selby, S. A. Clough, and R. W. Fenn. *Atmospheric Transmittance/Radiance: Computer Code LOWTRAN 6*, AFGL-TR-83-0187, Air Force Geophysics Laboratory: Hanscom Air Force Base, MA, 1983.
9. Silverman, B. A. and E. D. Sprague. "Airborne Measurements of In-Cloud Visibility." *Second National Conference on Weather Modification*. American Meteorological Society: Boston, MA, 1970.
10. Deirmendjian, D. "Scattering and Polarization Properties of Water Clouds and Hazes in the Visible and Infrared." *Applied Optics*: vol. 3, 1964.
11. Longtin, David R., Eric P. Shettle, John R. Hummel, and James D. Pryce. *A Wind Dependent Desert Aerosol Model: Radiative Properties*. AFGL-TR-88-0112, Air Force Geophysics Laboratory: Hanscom Air Force Base, MA, 1988.
12. Marshall, J. S. and W. McK. Palmer. "The Distribution of Raindrops with Size." *Journal of Meteorology*: vol. 5, 1948.
13. Laws, J. O. and D. A. Parsons. "The Relation of Raindrops to Intensity." *Trans. Am. Geophys. Union*: vol. 24, 1943.
14. Waldvogel, A. "The N_0 Jump of Raindrop Spectra." *Journal of Atmospheric Sciences*: vol. 31, 1974.
15. Joss, S. and A. Waldvogel. "Raindrop Size Distribution and Sampling Size Errors." *Journal of Atmospheric Sciences*: vol. 26, 1969.
16. Seagraves, Mary Ann. *Visible and Infrared Extinction Due to Falling Snow: An Approximate Model*. ASL-TR-0158, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1984.

17. Tabler, R. D. "Using Visual Range Data for Highway Operations in Blowing Snow." *Optical Engineering for Cold Environment: Proceedings of SPIE* vol. 414, 1983.
18. Aitken, G. W., ed. *SNOW-ONE-A Data Report*. U.S. Army Cold Regions Research and Engineering Laboratory: Hanover, NH, 1982.
19. Jordan, Rachele. "Extinction Coefficient for a Distribution of Ice Fog Particles." *Proceedings of the Seventh Annual EOSAEL Conference: vol. II*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1987.
20. Ohtake, T. *Studies on Ice Fog*. UAG-R-11, Prepared for the National Center for Air Pollution Control under contract No. AP-00449, Geophysical Institute of the University of Alaska: Fairbanks, AK, 1970.
21. Huffman, P. J. *Size Distribution of Ice Fog Particles*. University of Alaska: Fairbanks, AK, 1968.
22. Jordan, Rachele. "Extinction Model for Ice Fog." *Proceedings of the Fifth Annual EOSAEL Conference: vol. II*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.
23. Warren, S. G. "Optical Constants of Ice from the Ultraviolet to the Microwave." *Applied Optics: vol. 23*, 1984.
24. Abramowitz, M. and I. A. Stegun. *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables*. 1964.
25. Hoihjelle, D. L, Ron G. Pinnick, James D. Lindberg, Radon B. Loveland, E. B. Stenmark, and C. J. Patracia. *Balloon-borne Aerosol Particle Counter Measurement Made in Wintertime at Grafenwöhr, West Germany*. ECOM-DR-76-3, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1976.

26. Pinnick, Ron G., D. L. Hoihjelle, G. Fernandez, E. B. Stenmark, J. D. Lindberg, G. B. Hoidale, and S. G. Jennings. "Vertical Structure in Atmospheric Fog and Haze and Its Effects on Visible and Infrared Extinction." *Journal of Atmospheric Sciences*: vol. 35, 1978.
27. Loveland, Radon B., et al. *Atmospheric Characterization Measurements for Copperhead Ground Fog Experiment*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1978.
28. Lindberg, James D., Radon B. Loveland, A. F. Lewis, and James E. Butterfield. *Vertical Distribution of Fog and Haze Near Greding, Germany, During February and March 1980*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1980.
29. Heaps, Melvin G. *A Vertical Structure Algorithm for Low Visibility/Low Stratus Conditions*. ASL-TR-0111, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1982.
30. Heaps, Melvin G. and R. D. Johnson. *An Algorithm for the Vertical Structure of Aerosol Extinction in the Lowest Kilometer of the Atmosphere*. ASL-TR-0142, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1983.
31. Duncan, Louis D., James D. Lindberg, and Radon B. Loveland. *An Empirical Model of the Vertical Structure on German Fogs*. ASL-TR-0071, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1980.
32. Lindberg, James D. and Louis D. Duncan. *Improving the EOSAEL Vertical Structure Algorithm Fit to Measured Data*. ASL-TR-0168, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.

33. Rodgers, C. W. and J. T. Hanley. *An Algorithm for the Increase of Liquid Water Content with Height in Fog and Water Hazes*. 6711-M-1, Calspan Corporation: Buffalo, NY, 1980.
34. Budd, W. P., W. R. J. Dingle, and U. Radok. "The Byrd Snow Drift Project: Outline and Basic Results." *Studies in Antarctic Meteorology*. Antarctic Research Series 9, American Geophysical Union: Washington, DC, 1966.
35. Liljequist, G. H. "Energy Exchange of an Antarctic Snow Field: Wind Structure in Low Layer." *Scientific Results, Norwegian - British - Swedish - Antarctic Expedition, 1949-52*: vol. 2, 1957.
36. Mellor, M. *Blowing Snow*. III A3c, Cold Regions Research and Engineering Laboratory: Hanover, NH, 1965.
37. Seagraves, Mary Ann. *Some Optical Properties of Blowing Snow*. ASL-TR-0091, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1981.
38. Avara, Elton P. "Comparison of Estimates of Average Transmission." *Proceedings of the Sixth Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.
39. Burlbaw, Edward J. "Slant-Path Transmittance in the Visible: Sensitivity and Comparison of Methods." *Proceedings of the Sixth Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.
40. Hoidale, Glenn B. "XSCALE Visits Sprakensehl, West Germany." *Proceedings of the Sixth Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.

41. Schulze, Beth. "A Proposed Modification to XSCALE." *Proceedings of the Seventh Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1986.
42. Hoidale, Glenn B. and Beth Schulze. *On the Occurrence of Counter-XSCALE Conditions at Sprakensehl, West Germany*. ASL-DR-86-0011, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1986.
43. Fiegel, Robert P. "Comparison of XSCALE 89 Vertical Structure Algorithm with Sprakensehl Measurements." *Proceedings of the Thirteenth Annual Review Conference on Atmospheric Transmission Models*. Air Force Geophysics Laboratory: Hanscom Air Force Base, MA, 1990.
44. Shirkey, Richard and Dan Hutt. "Verification of the Snow Algorithm in EOSAEL Module XSCALE." *Proceedings of the Sixth Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1985.
45. Hutt, Dan and Richard Shirkey. *Verification of EOSAEL Snow Transmittance Predictions*. Defence Research Establishment: Valcartier, PQ, 1987.
46. Gillespie, Patti S. *BEST-ONE Data Analysis and Comparison*. OMI-237, Optimetrics, Inc.: Las Cruces, NM, 1987.
47. National Oceanic and Atmospheric Agency. *Federal Meteorological Handbook*. 1982.
48. Rachele, Henry and Neal H. Kilmer. "Comparison of Estimates of Vertical Extinction Profiles in Very Low Stratus Clouds and Subcloud Regions." *Proceedings of the Eleventh Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1990.

49. Hoidale, Glenn B., *Classification Guide for the Development and Dissipation of Low Visibilities*. ASL-DR-86-0003, U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1986.

50. Fiegel, Robert P. "XSCALE Vertical Structure Algorithm Comparison with Field Data." *Proceedings of the Eleventh Annual EOSAEL Conference*. U.S. Army Atmospheric Sciences Laboratory: White Sands Missile Range, NM, 1990.











Acronyms and Abbreviations











AAODL	Atmospheric Aerosol Optics Data Library
ARL	Army Research Laboratory
ASL	Atmospheric Sciences Laboratory
BED	Battlefield Environment Directorate
EO	electro-optical
IR	infrared
LOS	line-of-sight
SNOW	Scenario Normalization for Operations in Winter











Appendix




**Plots Showing the Meppen 80 Measured Extinction at
10.6 μm and the XSCALE Calculated Extinction**

For clarity, only the in-cloud part of the vertical profiles are shown. The measurements are represented by ‘.’, the calculation by a solid curve. The vertical axis is altitude in meters; the horizontal axis is extinction in km^{-1} on a log scale. The profiles are identified by flight numbers and are in chronological order.

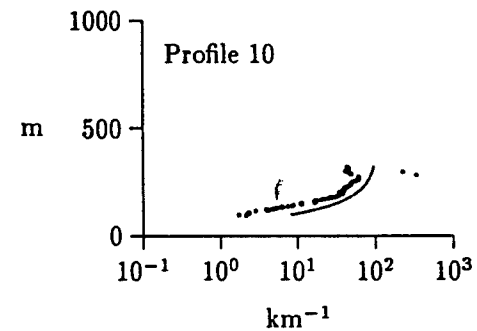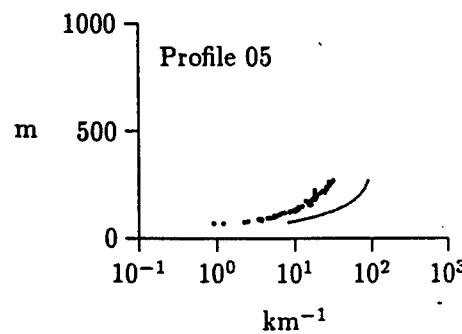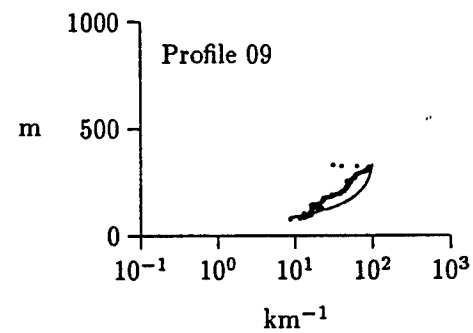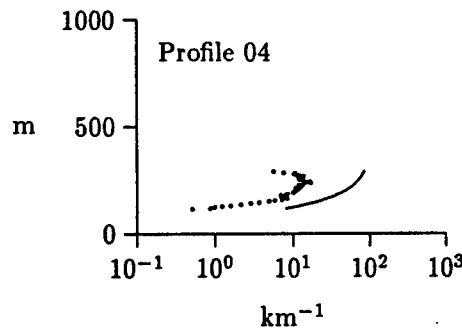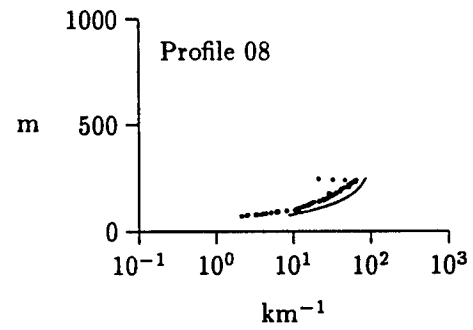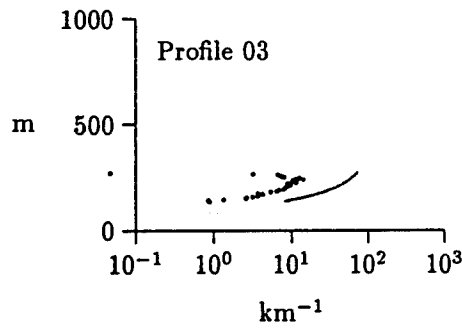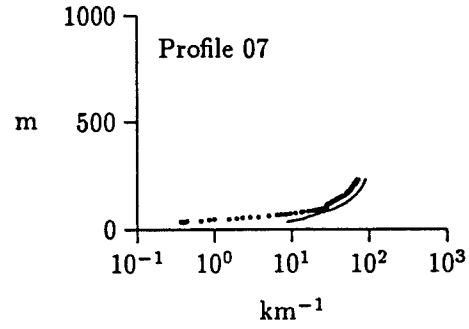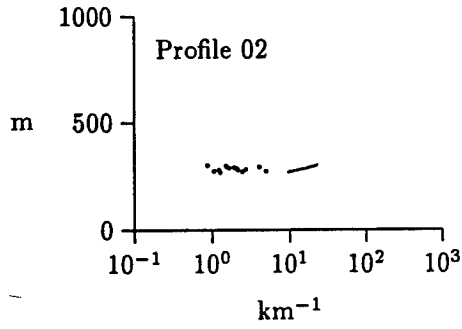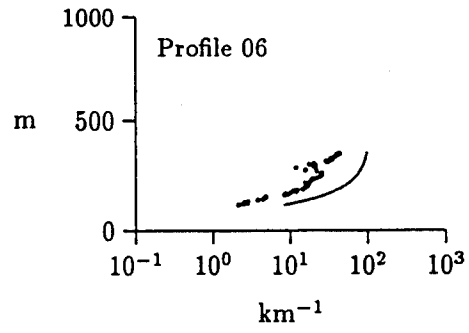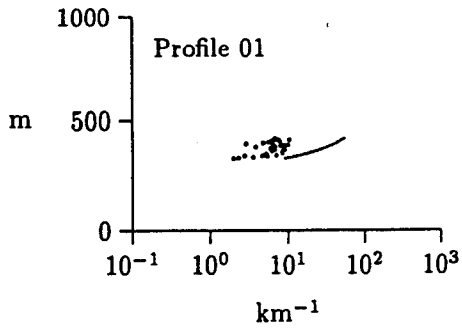

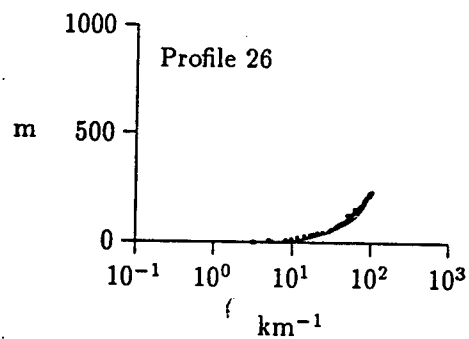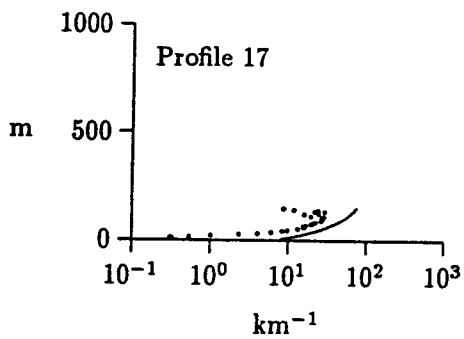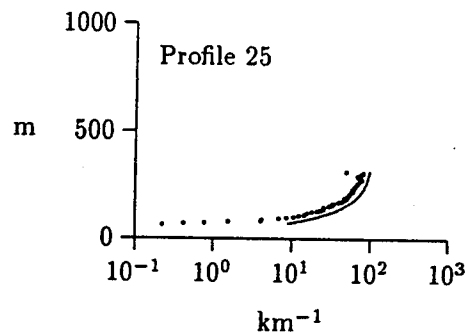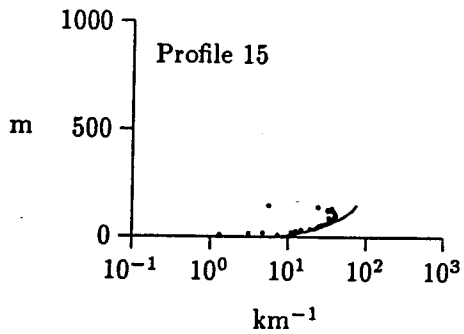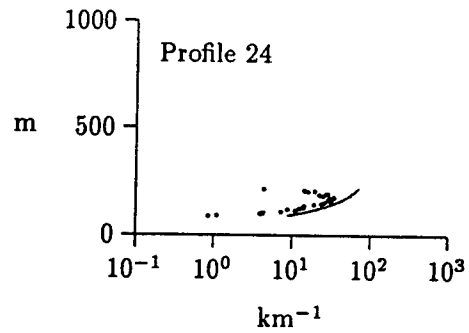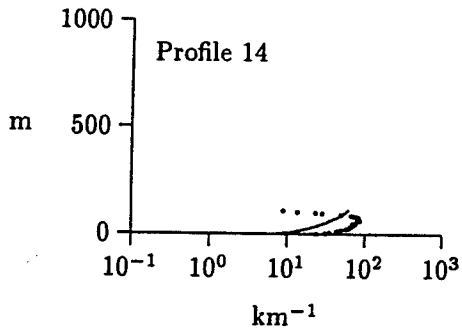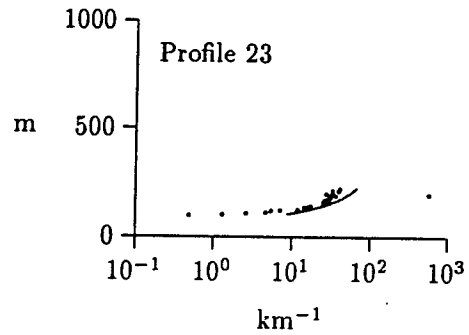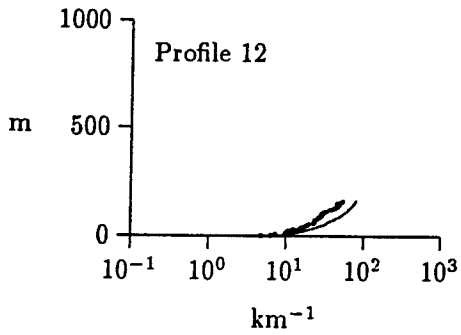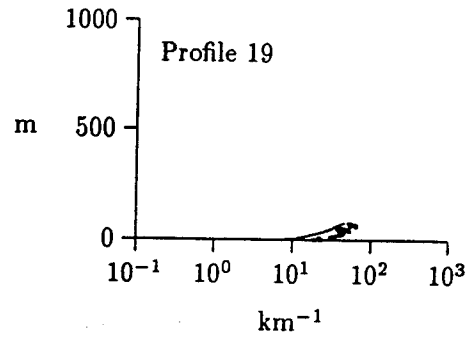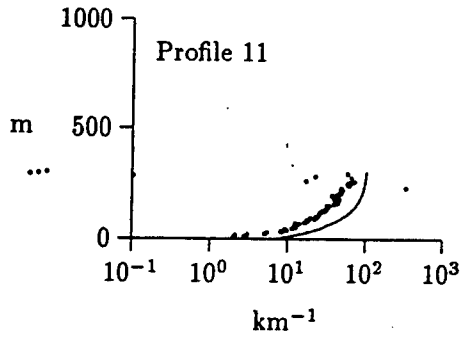

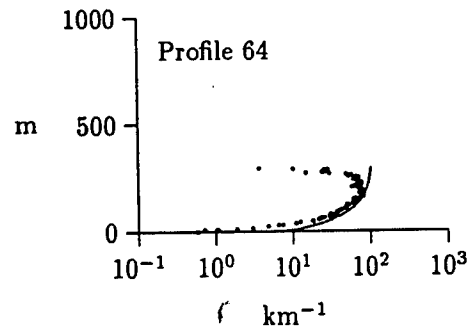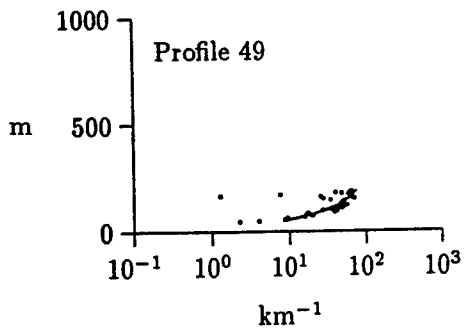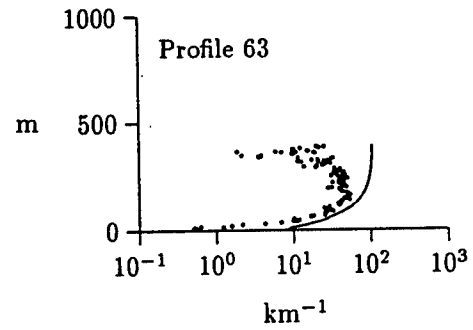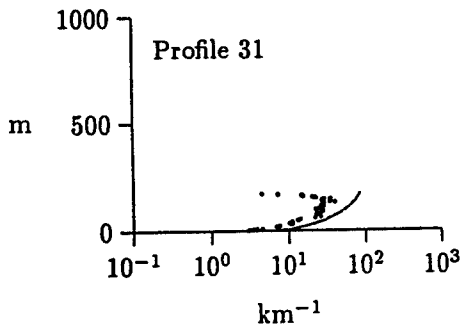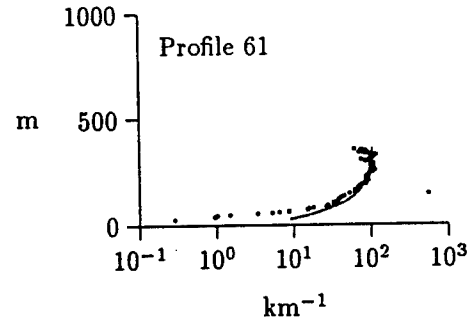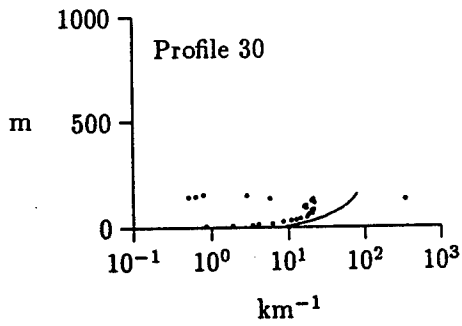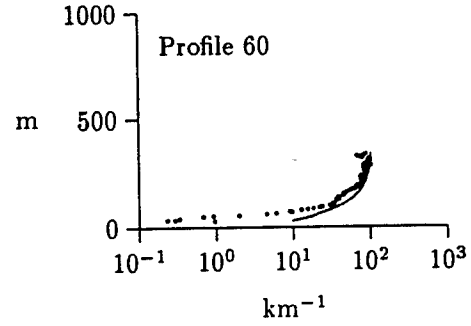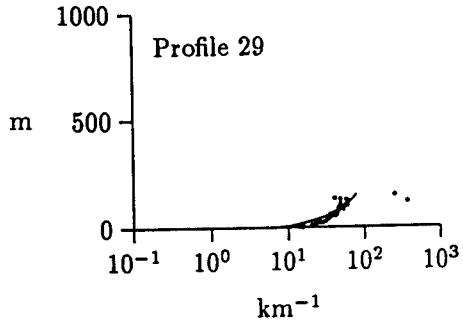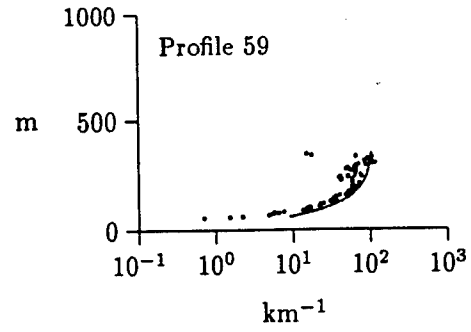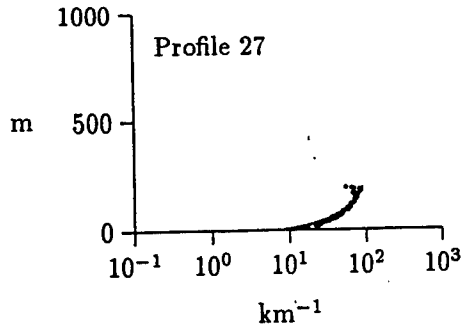

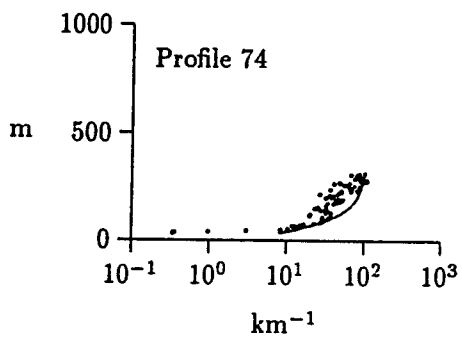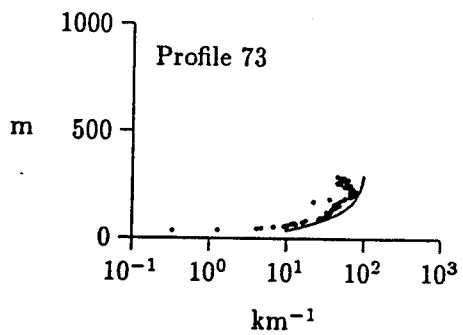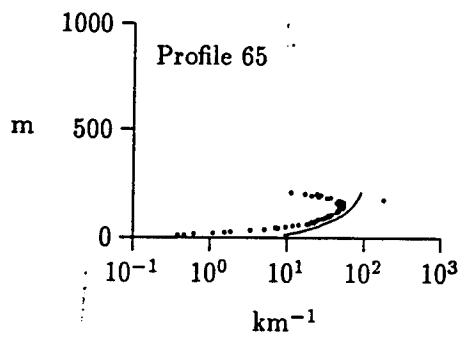

Distribution

	Copies
• Commandant U.S. Army Chemical School ATTN: ATZN-CM-CC (Mr. Barnes) Fort McClellan, AL 36205-5020	1
NASA Marshal Space Flight Center Deputy Director Space Science Laboratory Atmospheric Sciences Division ATTN: E501 (Dr. Fichtl) Huntsville, AL 35802	1
NASA/Marshall Space Flight Center Atmospheric Sciences Division ATTN: Code ED-41 Huntsville, AL 35812	1
Deputy Commander U.S. Army Strategic Defense Command ATTN: CSSD-SL-L (Dr. Lilly) P.O. Box 1500 Huntsville, AL 35807-3801	1
Deputy Commander U.S. Army Missile Command ATTN: AMSMI-RD-AC-AD (Dr. Peterson) Redstone Arsenal, AL 35898-5242	1
Commander U.S. Army Missile Command ATTN: AMSMI-RD-DE-SE (Mr. Lill, Jr.) Redstone Arsenal, AL 35898-5245	1
• Commander U.S. Army Missile Command ATTN: AMSMI-RD-AS-SS (Mr. Anderson) Redstone Arsenal, AL 35898-5253	1
• Commander U.S. Army Missile Command ATTN: AMSMI-RD-AS-SS (Mr. B. Williams) Redstone Arsenal, AL 35898-5253	1

Commander
U.S. Army Missile Command
Redstone Scientific Information Center
ATTN: AMSMI-RD-CS-R/Documents 1
Redstone Arsenal, AL 35898-5241

Commander
U.S. Army Aviation Center
ATTN: ATZQ-D-MA (Mr. Heath) 1
Fort Rucker, AL 36362

Commander
U.S. Army Intelligence Center
and Fort Huachuca
ATTN: ATSI-CDC-C (Mr. Colanto) 1
Fort Huachuca, AZ 85613-7000

Northrup Corporation
Electronics Systems Division
ATTN: Dr. Tooley 1
2301 West 120th Street, Box 5032
Hawthorne, CA 90251-5032

Commander
Pacific Missile Test Center
Geophysics Division
ATTN: Code 3250 (Mr. Battalino) 1
Point Mugu, CA 93042-5000

Commander
Code 3331
Naval Weapons Center
ATTN: Dr. Shlanta 1
China Lake, CA 93555

Lockheed Missiles & Space Co., Inc.
Kenneth R. Hardy
ORG/91-01 B/255 1
3251 Hanover Street
Palo Alto, CA 94304-1191

Commander
Naval Ocean Systems Center
ATTN: Code 54 (Dr. Richter) 1
San Diego, CA 92152-5000

Meteorologist in Charge
Kwajalein Missile Range
P.O. Box 67
APO San Francisco, CA 96555 1

U.S. Department of Commerce Center
Mountain Administration
Support Center, Library, R-51
Technical Reports
325 S. Broadway
Boulder, CO 80303 1

Dr. Hans J. Liebe
NTIA/ITS S 3
325 S. Broadway
Boulder, CO 80303 1

NCAR Library Serials
National Center for Atmos Research
P.O. Box 3000
Boulder, CO 80307-3000 1

Headquarters
Department of the Army
ATTN: DAMI-POI
Washington, DC 20310-1067 1

Mil Asst for Env Sci Ofc of
the Undersecretary of Defense
for Rsch & Engr/R&AT/E&LS
Pentagon - Room 3D129
Washington, DC 20301-3080 1

Headquarters
Department of the Army
DEAN-RMD/Dr. Gomez
Washington, DC 20314 1

Director
Division of Atmospheric Science
National Science Foundation
ATTN: Dr. Bierly
1800 G. Street, N.W.
Washington, DC 20550 1

Commander Space & Naval Warfare System Command ATTN: PMW-145-1G Washington, DC 20362-5100	1
Director Naval Research Laboratory ATTN: Code 4110 (Mr. Ruhnke) Washington, DC 20375-5000	1
Commandant U.S. Army Infantry ATTN: ATSH-CD-CS-OR (Dr. E. Dutoit) Fort Benning, GA 30905-5090	1
USAFETAC/DNE Scott AFB, IL 62225	1
Air Weather Service Technical Library - FL4414 Scott AFB, IL 62225-5458	1
USAFETAC/DNE ATTN: Mr. Glauber Scott AFB, IL 62225-5008	1
Headquarters AWS/DOO Scott AFB, IL 62225-5008	1
Commander U.S. Army Combined Arms Combat ATTN: ATZL-CAW Fort Leavenworth, KS 66027-5300	1
Commander U.S. Army Space Institute ATTN: ATZI-SI Fort Leavenworth, KS 66027-5300	1
Commander U.S. Army Space Institute ATTN: ATZL-SI-D Fort Leavenworth, KS 66027-7300	1

Commander
Phillips Lab
ATTN: PL/LYP (Mr. Chisholm) 1
Hanscom AFB, MA 01731-5000

Director
Atmospheric Sciences Division
Geophysics Directorate
Phillips Lab
ATTN: Dr. McClatchey 1
Hanscom AFB, MA 01731-5000

Raytheon Company
Dr. Sonnenschein
Equipment Division
528 Boston Post Road 1
Sudbury, MA 01776
Mail Stop 1K9

Director
U.S. Army Materiel Systems Analysis Activity
ATTN: AMXSY-CR (Mr. Marchetti) 1
Aberdeen Proving Ground, MD 21005-5071

Director
U.S. Army Materiel Systems Analysis Activity
ATTN: AMXSY-MP (Mr. Cohen) 1
Aberdeen Proving Ground, MD 21005-5071

Director
U.S. Army Materiel Systems Analysis Activity
ATTN: AMXSY-AT (Mr. Campbell) 1
Aberdeen Proving Ground, MD 21005-5071

Director
U.S. Army Materiel Systems
Analysis Activity
ATTN: AMXSY-CS (Mr. Bradley) 1
Aberdeen Proving Ground, MD 21005-5071

Director
ARL Chemical Biology
Nuclear Effects Division
ATTN: AMSRL-SL-CO 1
Aberdeen Proving Ground, MD 21010-5423

Army Research Laboratory ATTN: AMSRL-D 2800 Powder Mill Road Adelphi, MD 20783-1145	1
Army Research Laboratory ATTN: AMSRL-OP-SD-TP Technical Publishing 2800 Powder Mill Road Adelphi, MD 20783-1145	1
Army Research Laboratory ATTN: AMSRL-OP-CI-SD-TL 2800 Powder Mill Road Adelphi, MD 20783-1145	1
Army Research laboratory ATTN: AMSRL-SS-SH (Dr. Sztankay) 2800 Powder Mill Road Adelphi, MD 20783-1145	1
U.S. Army Space Technology and Research Office ATTN: Ms. Brathwaite 5321 Riggs Road Gaithersburg, MD 20882	1
National Security Agency ATTN: W21 (Dr. Longbothum) 9800 Savage Road Fort George G. Meade, MD 20755-6000	1
OIC-NAVSWC Technical Library (Code E-232) Silver Springs, MD 20903-5000	1
Commander U.S. Army Research office ATTN: DRXRO-GS (Dr. Flood) P.O. Box 12211 Research Triangle Park, NC 27009	1

Dr. Jerry Davis North Carolina State University Department of Marine, Earth, and Atmospheric Sciences P.O. Box 8208 Raleigh, NC 27650-8208	1
Commander U.S. Army CECRL ATTN: CECRL-RG (Dr. Boyne) Hanover, NH 03755-1290	1
Commanding Officer U.S. Army ARDEC ATTN: SMCAR-IMI-I, Bldg 59 Dover, NJ 07806-5000	1
Commander U.S. Army Satellite Comm Agency ATTN: DRCPM-SC-3 Fort Monmouth, NJ 07703-5303	1
Commander U.S. Army Communications-Electronics Center for EW/RSTA ATTN: AMSEL-EW-MD Fort Monmouth, NJ 07703-5303	1
Commander U.S. Army Communications-Electronics Center for EW/RSTA ATTN: AMSEL-EW-D Fort Monmouth, NJ 07703-5303	1
Commander U.S. Army Communications-Electronics Center for EW/RSTA ATTN: AMSEL-RD-EW-SP Fort Monmouth, NJ 07703-5206	1
Commander Department of the Air Force OL/A 2d Weather Squadron (MAC) Holloman AFB, NM 88330-5000	1
PL/WE Kirtland AFB, NM 87118-6008	1

Director U.S. Army TRADOC Analysis Center ATTN: ATRC-WSS-R White Sands Missile Range, NM 88002-5502	1
Director U.S. Army White Sands Missile Range Technical Library Branch ATTN: STEWS-IM-IT White Sands Missile Range, NM 88002	3
Army Research Laboratory ATTN: AMSRL-BE (Mr. Veazy) Battlefield Environment Directorate White Sands Missile Range, NM 88002-5501	1
Army Research Laboratory ATTN: AMSRL-BE-A (Mr. Rubio) Battlefield Environment Directorate White Sands Missile Range, NM 88002-5501	1
Army Research Laboratory ATTN: AMSRL-BE-M (Dr. Niles) Battlefield Environment Directorate White Sands Missile Range, NM 88002-5501	1
Army Research Laboratory ATTN: AMSRL-BE-W (Dr. Seagraves) Battlefield Environment Directorate White Sands Missile Range, NM 88002-5501	1
USAF Rome Laboratory Technical Library, FL2810 Corridor W, STE 262, RL/SUL 26 Electronics Parkway, Bldg 106 Griffiss AFB, NY 13441-4514	1
AFMC/DOW Wright-Patterson AFB, OH 03340-5000	1
Commandant U.S. Army Field Artillery School ATTN: ATSF-TSM-TA (Mr. Taylor) Fort Sill, OK 73503-5600	1

Commander
U.S. Army Field Artillery School
ATTN: ATSF-F-FD (Mr. Gullion) 1
Fort Sill, OK 73503-5600

Commander
Naval Air Development Center
ATTN: Al Salik (Code 5012) 1
Warminster, PA 18974

Commander
U.S. Army Dugway Proving Ground
ATTN: STEDP-MT-M (Mr. Bowers) 1
Dugway, UT 84022-5000

Commander
U.S. Army Dugway Proving Ground
ATTN: STEDP-MT-DA-L 1
Dugway, UT 84022-5000

Defense Technical Information Center
ATTN: DTIC-OCP 2
Cameron Station
Alexandria, VA 22314-6145

Commander
U.S. Army OEC
ATTN: CSTE-EFS 1
Park Center IV
4501 Ford Ave
Alexandria, VA 22302-1458

Commanding Officer
U.S. Army Foreign Science & Technology Center
ATTN: CM 1
220 7th Street, NE
Charlottesville, VA 22901-5396

Naval Surface Weapons Center
Code G63 1
Dahlgren, VA 22448-5000

Commander and Director
U.S. Army Corps of Engineers
Engineer Topographics Laboratory
ATTN: ETL-GS-LB 1
Fort Belvoir, VA 22060

U.S. Army Topo Engineering Center ATTN: CETEC-ZC Fort Belvoir, VA 22060-5546	1
Commander USATRADO ATTN: ATCD-FA Fort Monroe, VA 23651-5170	1
TAC/DOWP Langley AFB, VA 23665-5524	1
Commander Logistics Center ATTN: ATCL-CE Fort Lee, VA 23801-6000	1
Science and Technology 101 Research Drive Hampton, VA 23666-1340	1
Commander U.S. Army Nuclear and Chemical Agency ATTN: MONA-ZB, Bldg 2073 Springfield, VA 22150-3198	1
Record Copy	3
Total	89