		A	FOSR-TR-97
	CUMENTATION PA		€ V • data need
Public reporting burden for this collection of information is estin completing and reviewing the collection of information. Sen Headquarters Services, Directorate for information Operationa (0704-0188), Washington, DC 20503.	d comments regarding this burden estimate or any ol and Reports, 1215 Jefferson Davis Highway, Suite 120	4, Artir	den to Was
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE	3. REPORT TYPE A	ND DATES COVERED
	November 18, 1996	Fina	1 (8/1/95-12/31/96)
4. TITLE AND SUBTITLE	See Affendable	Companitor	5. FUNDING NUMBERS
Durability and Life Ase: Manufacturing of Polyme:	r-Matrix Composites	Composites	F49620-95-1-0486
6. AUTHOR(S)		<u></u>	
John W. Gillesp	ie Jr. and Diane S. K	ukich	
7. PERFORMING ORGANIZATION NAME	S) AND ADDRESS(ES)		8. PERFORMING ORGANIZATION REPO
Center for Composite Ma	terials		NOMBER
University of Delaware Newark, DE 19716-3144			3-3-21-3144-48
9. SPONSORING/MONITORING AGENCY	NAMES(S) AND ADDRESS(ES)		10. SPONSORING/MONITORING AGENC' REPORT NUMBER
AFOSR/PKA			Project-Task 3484/US
110 Duncan Avenue Room Bolling AFB, DC 20332-8			_
BUILING ARD, DC 20332-8			
Approved for public	release; distribution	unlimited.	
13. ABSTRACT (Maximum 200 words)			
13. ABSTRACT (Maximum 200 words) The capability to chara environments-including solvents, etcis essen civilian and military a facilities for durabili applications as bridge for propulsion, and arm programs is the durabil used to promote (1) sig degradation mechanisms aimed at increasing the applications.Researcher local elasticity over a promising correlation b The work has successful nanomechanical properti composite materials and	cterize and test adva elevated temperatures tial to the future us pplications. This pr ty assessment of adva rehabilitation, high- ored ground vehicles. ity of composite mate nificant advances in and (2) concomitant i durability of compos s are currently using sample surface. The between the generated ly extended the capak es and property varia	nced composite , thermal cycl e of these mat ogram sought f nced polymer-m speed civil ai The cross-cu rials. The eq the fundamenta mprovements in ite components the equipment results obtai force curve da oilities of the tions importan so resulted in	uipment purchased is be 1 understanding of design and processing for these to measure changes in ned thus far show ta and the sample modul AFM as a probe of t to the performance of development of the fir- ons in multiphase system
13. ABSTRACT (Maximum 200 words) The capability to chara environments-including solvents, etcis essen civilian and military a facilities for durabili applications as bridge for propulsion, and arm programs is the durabil used to promote (1) sig degradation mechanisms aimed at increasing the applications.Researcher local elasticity over a promising correlation b The work has successful nanomechanical properti composite materials and	cterize and test adva elevated temperatures tial to the future us pplications. This pr ty assessment of adva rehabilitation, high- ored ground vehicles. ity of composite mate nificant advances in and (2) concomitant i durability of compos s are currently using sample surface. The between the generated ly extended the capak es and property varia adhesive. It has all to directly examine in	nced composite , thermal cycl e of these mat ogram sought f nced polymer-m speed civil ai The cross-cu rials. The eq the fundamenta mprovements in ite components the equipment results obtai force curve da ilities of the tions importan so resulted in nterphase regi	ing, moisture, oxidation erial systems in various unding to establish core atrix composites in such rcraft, engine component tting issue in these uipment purchased is bes l understanding of design and processing for these to measure changes in ned thus far show ta and the sample modul AFM as a probe of t to the performance of development of the fir ons in multiphase system 15. NUMBER OF PAGES
13. ABSTRACT (Maximum 200 words) The capability to chara environments-including solvents, etcis essen civilian and military a facilities for durabili applications as bridge for propulsion, and arm programs is the durabil used to promote (1) sig degradation mechanisms aimed at increasing the applications.Researcher local elasticity over a promising correlation b The work has successful nanomechanical properti composite materials and experimental technique	cterize and test adva elevated temperatures tial to the future us pplications. This pr ty assessment of adva rehabilitation, high- ored ground vehicles. ity of composite mate nificant advances in and (2) concomitant i durability of compos s are currently using sample surface. The between the generated ly extended the capak es and property varia adhesive. It has all to directly examine in	nced composite , thermal cycl e of these mat ogram sought f nced polymer-m speed civil ai The cross-cu rials. The eq the fundamenta mprovements in ite components the equipment results obtai force curve da oilities of the tions importan so resulted in	ing, moisture, oxidation erial systems in various unding to establish core atrix composites in such rcraft, engine component tting issue in these uipment purchased is bes 1 understanding of design and processing for these to measure changes in ned thus far show ta and the sample modul AFM as a probe of to the performance of development of the fir ons in multiphase system 15. NUMBER OF PAGES 4
13. ABSTRACT (Maximum 200 words) The capability to chara environments-including solvents, etcis essen civilian and military a facilities for durabili applications as bridge for propulsion, and arm programs is the durabil used to promote (1) sig degradation mechanisms aimed at increasing the applications.Researcher local elasticity over a promising correlation b The work has successful nanomechanical properti composite materials and experimental technique	cterize and test adva elevated temperatures tial to the future us pplications. This pr ty assessment of adva rehabilitation, high- ored ground vehicles. ity of composite mate nificant advances in and (2) concomitant i durability of compos s are currently using sample surface. The between the generated ly extended the capak es and property varia adhesive. It has all to directly examine in	nced composite , thermal cycl e of these mat ogram sought f nced polymer-m speed civil ai The cross-cu rials. The eq the fundamenta mprovements in ite components the equipment results obtai force curve da ilities of the tions importan so resulted in nterphase regi	ing, moisture, oxidation erial systems in various unding to establish core atrix composites in such rcraft, engine component tting issue in these uipment purchased is bes l understanding of design and processing for these to measure changes in ned thus far show ta and the sample modul AFM as a probe of t to the performance of development of the fir ons in multiphase system 15. NUMBER OF PAGES
13. ABSTRACT (Maximum 200 words) The capability to chara environments—including solvents, etc.—is essen civilian and military a facilities for durabili applications as bridge for propulsion, and arm programs is the durabil used to promote (1) sig degradation mechanisms aimed at increasing the applications.Researcher local elasticity over a promising correlation b The work has successful nanomechanical properti composite materials and experimental technique 14. SUBJECT TERMS	cterize and test adva elevated temperatures tial to the future us pplications. This pr ty assessment of adva rehabilitation, high- ored ground vehicles. ity of composite mate nificant advances in and (2) concomitant i durability of compos s are currently using sample surface. The between the generated ly extended the capak es and property varia adhesive. It has all to directly examine in	nced composite , thermal cycl e of these mat ogram sought f nced polymer-m speed civil ai The cross-cu rials. The eq the fundamenta mprovements in ite components the equipment results obtai force curve da ilities of the tions importan so resulted in nterphase regi	ing, moisture, oxidation erial systems in various unding to establish core atrix composites in such rcraft, engine component tting issue in these uipment purchased is be: 1 understanding of design and processing for these to measure changes in ned thus far show ta and the sample modul. AFM as a probe of to the performance of development of the fir ons in multiphase system 15. NUMBER OF PAGES 4 16. PRICE CODE

2

## 1995–96 AFOSR Defense University Research Instrumentation Program (DURIP)

# Durability and Life Assessment for Affordable Manufacturing of Polymer-Matrix Composites

Contract/Award: F49620-95-1-0486 August 1, 1995-December 31, 1996



19970616 133

**Final Report** 

November 1996

REPORT DOCUMENTATION PAGE		Form Approved OMB No. 0704-0188			
Public reporting burden for this collection of information is estim completing and reviewing the collection of information. Sen Headmarters Services. Directorate for information Operations	nated to average 1 hour per response, including the ti d comments regarding this burden estimate or any and Reports, 1215 Jefferson Davis Highway, Suite	ime for reviewing instructions, searching, rother aspect of this collection of inform 1204, Arlington, VA 22202-4302, and to	axisting data sources, gathering and maintaining the data needed, and lation, including suggestions for reducing the burden to Washington the Office of Management and Budget, Paperwork Reductions Project		
1. AGENCY USE ONLY (Leave blank) 2. REPORT DATE 3. REPORT TYPE AND DATES COVERED					
	November 18, 199	96 Fina	1 (8/1/95-12/31/96)		
4. TITLE AND SUBTITLE			5. FUNDING NUMBERS		
Durability and Life Asessment for Affordable Composites Manufacturing of Polymer-Matrix Composites			F49620-95-1-0486		
6. AUTHOR(S)	vie Jr. and Diane S.	Kukich			
7. PERFORMING ORGANIZATION NAME(S			8. PERFORMING ORGANIZATION REPORT NUMBER		
Center for Composite Materials					
University of Delaware Newark, DE 19716-3144			3-3-21-3144-48		
9. SPONSORING/MONITORING AGENCY	NAMES(S) AND ADDRESS(ES)		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
AFOSR/PKA			Project-Task 3484/US		
110 Duncan Avenue Room			-		
Bolling AFB, DC 20332-8	080				
11. SUPPLEMENTARY NOTES					
The view, opinions an	nd/or findings cont	ained in this	report are those of the		
author(s) and should position, policy, or d	not be construed a	as an official	Department of the Army her documentation.		
12a, DISTRIBUTION/AVAILABILITY STATE		designated by or	12B. DISTRIBUTION CODE		
Approved for public	release; distributio	on unlimited.			
13. ABSTRACT (Maximum 200 words)					
The capability to characterize and test advanced composites in simulated operational environments-including elevated temperatures, thermal cycling, moisture, oxidation, solvents, etcis essential to the future use of these material systems in various civilian and military applications. This program sought funding to establish core facilities for durability assessment of advanced polymer-matrix composites in such applications as bridge rehabilitation, high-speed civil aircraft, engine components for propulsion, and armored ground vehicles. The cross-cutting issue in these programs is the durability of composite materials. The equipment purchased is being used to promote (1) significant advances in the fundamental understanding of degradation mechanisms and (2) concomitant improvements in design and processing aimed at increasing the durability of composite components for these applications.Researchers are currently using the equipment to measure changes in local elasticity over a sample surface. The results obtained thus far show promising correlation between the generated force curve data and the sample moduli. The work has successfully extended the capabilities of the AFM as a probe of nanomechanical properties and property variations important to the performance of composite materials and adhesive. It has also resulted in development of the first experimental technique to directly examine interphase regions in multiphase systems. 14. SUBJECT TERMS					
			4 16. PRICE CODE		
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION	19. SECURITY CLASSIFICA OF ABSTRACT			
UNCLASSIFIED	UNCLASSIFIED	UNCLASSIFI			
NSN 7540-01-280-5500	8		Standard Form 298 (Rev. 2-89) Prescribed by ANSI Std. 239-18 298-102		

## **Background/Motivation**

The capability to characterize and test advanced composites in simulated operational environments—including elevated temperatures, thermal cycling, moisture, oxidation, solvents, etc.—is essential to the future use of these material systems in various civilian and military applications. This program sought funding to establish core facilities for durability assessment of advanced polymer-matrix composites in such applications as bridge rehabilitation, highspeed civil aircraft, engine components for propulsion, and armored ground vehicles. The crosscutting issue in these programs is the durability of composite materials. The equipment purchased is being used to promote (1) significant advances in the fundamental understanding of degradation mechanisms and (2) concomitant improvements in design and processing aimed at increasing the durability of composite components for these applications.

Elucidation of degradation mechanisms requires interrogation of composites at both the microscopic and macroscopic levels, with a particular emphasis on issues related to the fiber/matrix interface. The interface—or more correctly, the *interphase*, as it is actually a region—has been proposed to nucleate microcracks in composites, which evolve into macroscopic failure. The interphase is also a conduit for the ingress of moisture, which, during repeated thermal cyclings, causes expansion and contraction of the composite, leading to failure. In short, what happens at the microscopic level permits aging at an accelerated pace. Thus, the instrumentation purchased with this grant is enabling these mechanisms to be investigated both in isolation and in combination to provide an overall profile of composite durability.

Equipment Purchased	
B142786 Dimension 3000 Scanning Probe Microscope	43,630.00
B227710 3 AT-GPIB/TNT-488 Interface Card for Windows 95 w/2 Meter Cable, 1 Labview for Windows 95 Base Package, Shipping	\$2,215.50
B238250 Tenney Environmental Chamber	\$17,230.09
B226190 3-Dimension XPS P133S Computer System	\$7,662.00
Upgrade to Testing Lab, including Instron Model 4484 floor-mounted materials testing system	\$154,257.00
	Total: \$224,995.59

#### **Research Issues**

Long-term environmental concerns include the effects of heat aging, degradation from natural elements (i.e., rain/humidity, salt, UV radiation), effects of service environmental fluids (e.g., fuels, oils, deicers, paint strippers). It has been shown that humidity effects can severely reduce mechanical properties, and they typically have a synergistic effect with temperature (i.e., there is a greater effect at elevated temperatures). Exposure to moisture can result in transverse matrix cracking in cross-ply and quasi-isotropic laminates. The glass transition temperature ( $T_g$ ), fracture toughness ( $G_{IC}$ ), and bearing strength are all significantly affected by moisture; upon drying,  $T_g$  and bearing strength are regained, but  $G_{IC}$  is not, indicating permanent damage.

On the microscopic level, the behavior of a formed part is affected by the formation of interphase zones that can lead to variations in local material properties such as modulus and glass transition temperature. Such compositional and material property gradients affect microcracking and interfacial strength, which influence macroscopic characteristics such as strength and fracture toughness.

The unifying concept is that complex material systems can be treated as a hierarchy of structures associated with decreasing scales. Each level of structure imparts certain behavior to the next succeeding higher level of organization, and each exhibits differing response sensitivities to the environments encountered under service conditions. This approach offers the potential for translating service condition requirements to the molecular level.

Semi-empirical analyses conducted at the gross structural level of composites have been relatively successful in predicting and describing effective thermomechanical behavior in terms of the properties, concentration, and geometry of the components. These properties are manifestations of bulk average behavior, which is insensitive to localized perturbations. Similar treatments fail to adequately predict and describe ultimate properties, fracture, fatigue performance, impact strength, or environmental effects. Properties belonging to this important group are sensitive to the "weak links" generated by small-scale variations in structure and properties. Progress in understanding this vital class of properties requires research directed at a sublevel of organization tentatively characterized as a microsystem. It is at this structural level that the interphase becomes important.

A focus on this reduced scale can take into account inhomogeneities in the internal structure of the reinforcing agents and the matrix, as well as the possibility of a perturbed interphase region near the surface of the reinforcing agent. It is generally accepted that the nature of the interphase region can be dependent upon the chemical composition of the fiber and matrix as well as that of the coupling agents and additives. The behavior of the interphase region is expected to be sensitive to concentration and thermal gradients encountered during processing.


The response of candidate materials for these applications under operating conditions needs to be characterized over the expected life cycle, which in all cases is long. The inordinate time and expense involved in such testing necessitates the development of accelerated test methodologies to address the durability issues. Verification of such methodologies once they have been developed will necessitate facilities enabling temperature and mechanical fatigue to be varied; additional variables to be investigated include the presence of moisture and chemical solvents. In other words, there is an urgent need for the capability to look at the synergistic superposition of service load cases within a single testing environment.

## **Current Research Using Purchased Equipment**

The atomic force microscope (AFM) is being used to investigate environmental effects including elevated-temperature as well as high humidity—on the properties and behavior of polymer-matrix composites. It is known that these environments reduce composite properties, and it is assumed that this property reduction is due to degradation of the fiber/matrix interphase. However, while theoretical work has been done, models have been developed, and indirect methods have supported this assumption, it has not been verified experimentally; the AFM is a powerful new tool in the effort to do so.

Researchers are currently using the equipment to measure changes in local elasticity over a sample surface. Appropriate analysis of AFM force curves enables a great deal of information to be obtained regarding the mechanical, chemical, and adhesive properties of the surface. To date, very little effort has been dedicated to examining the contact portion of the force curve. This region contains valuable information about the nanoscale mechanical response of the sample. A technique is being developed that relates the elastic modulus of the sample to the sample response measured using AFM force curves.

The results obtained thus far show promising correlation between the generated force curve data and the sample moduli. The work has successfully extended the capabilities of the AFM as a probe of nanomechanical properties and property variations important to the performance of composite materials and adhesive. It has also resulted in development of the first experimental technique to directly examine interphase regions in multiphase systems.

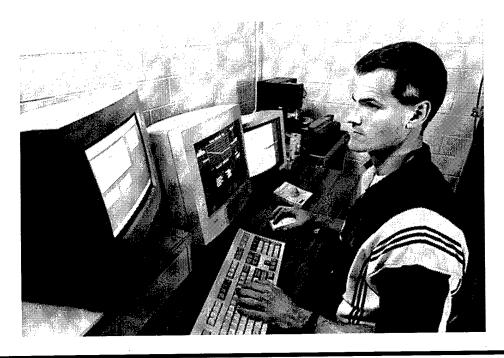

Graduate student Mark VanLandingham analyzes force curve data generated by the atomic force microscope purchased by the University of Delaware Center for Composite Materials with AFOSR DURIP funds.

### **Related Publications**

"Characterization and Mechanical Properties of the Epoxy/Polysulfone Interphase," with K. M. Immordino, S. H. McKnight, and M. R. VanLandingham, to be submitted, 1996.

"Nanoscale Indentation of Polymer Systems Using the Atomic Force Microscope," with M. R. VanLandingham, S. H. McKnight, G. R. Palmese, X. Huang, and R. F. Eduljee, submitted to *The Journal of Adhesion*, October 1996.

"Characterization of the Elastic Properties of the Fiber-Matrix Interphase Using the Atomic Force Microscope," with R. F. Eduljee and M. R. Van Landingham, submitted to *The Journal of Adhesion*, 1996.

"Relating Elastic Modulus to Indentation Response Using Atomic Force Microscopy," with M. R. Van Landingham, S. H. McKnight, G. R. Palmese, R. F. Eduljee and R. L. McCullough, *Proceedings of the American Society for Composites 11th Technical Conference on Composite Materials*, Technomic Publishing Company, Lancaster, PA, 1996.

"Moisture Effects on the Material Behavior in Graphite/Polyimide Composites," with L. J. Burcham, M. R. Van Landingham, and R. F. Eduljee, *Polymer Composites*, Vol. 17, No. 5, pp. 682–690, October 1996.

"The Effect of Hygrothermal Cycling on the Microcracking Behavior of Fabric Laminates," with R. F. Eduljee and M. R. VanLandingham, *Proceedings of the 28th International SAMPE Technical Conference*, Seattle, WA, November 4–7, 1996.