

**REPORT DOCUMENTATION PAGE**Form Approved  
OMB No. 074-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

<b>1. AGENCY USE ONLY (Leave blank)</b>		<b>2. REPORT DATE</b> 1998	<b>3. REPORT TYPE AND DATES COVERED</b> Conference Proceedings	
<b>4. TITLE AND SUBTITLE</b> Acid Gas Removal Characteristics of Corona Radical Shower System for A Treatment of Stationary Engine Flue Gas			<b>5. FUNDING NUMBERS</b> N/A	
<b>6. AUTHOR(S)</b> T. Nomura, S.J. Kim, K. Urashima, T. Ito, A. Miziolek, L.A. Rosocha, and J.S. Chang				
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b>  Department of Engineering Physics, McMaster University, Hamilton, Ontario, Canada L8S 4M1  U.S. Army Laboratory, AMSRL-MT-PC, Aberdeen, Providing Ground, MD			<b>8. PERFORMING ORGANIZATION REPORT NUMBER</b> N/A  Korea Institute of Machinery and Materials, Taejon 305-343, Republic of Korea  Los Alamos National Laboratory, P-24, Los Alamos, NM	
<b>9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b> SERDP 901 North Stuart St. Suite 303 Arlington, VA 22203			<b>10. SPONSORING / MONITORING AGENCY REPORT NUMBER</b> N/A	
<b>11. SUPPLEMENTARY NOTES</b> Presented at HAKONE VI International Symposium on High Pressure, Low Temperature Plasma Chemistry. No copyright is asserted in the United States under Title 17, U.S. code. The U.S. Government has a royalty-free license to exercise all rights under the copyright claimed herein for Government purposes. All other rights are reserved by the copyright owner.				
<b>12a. DISTRIBUTION / AVAILABILITY STATEMENT</b> Approved for public release: distribution is unlimited.			<b>12b. DISTRIBUTION CODE</b> A	
<b>13. ABSTRACT (Maximum 200 Words)</b> Acid gas removal experiments are carried out in large bench scale corona radical shower reactor. A simulated stationary engine flue gas is air mixed with NO, SO <sub>2</sub> and CH <sub>4</sub> . Optimums for acid gas removal rate have been conducted in terms of the ammonia to acid gas molar ratio, the applied voltage and the additional gas velocity. Both the removal efficiencies of NO and SO <sub>2</sub> increase with increasing applied voltage and decreasing initial NO concentration. It is also shown that high concentrations of CH <sub>4</sub> have a negative effect on NO removal, where part of the NO converted only to NO <sub>2</sub> but not to ammonium nitrate aerosol particles.				
<b>14. SUBJECT TERMS</b> SERDP, acid gas, corona radical shower, stationary engine flue gas, NO <sub>x</sub> , SO <sub>x</sub>			<b>15. NUMBER OF PAGES</b> 5	
			<b>16. PRICE CODE</b> N/A	
<b>17. SECURITY CLASSIFICATION OF REPORT</b> unclass	<b>18. SECURITY CLASSIFICATION OF THIS PAGE</b> unclass	<b>19. SECURITY CLASSIFICATION OF ABSTRACT</b> unclass	<b>20. LIMITATION OF ABSTRACT</b> UL	

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)  
Prescribed by ANSI Std. Z39-18  
298-102

DTIC QUALITY INSPECTED 4

19991202 046

# ACID GAS REMOVAL CHARACTERISTICS OF CORONA RADICAL SHOWER SYSTEM FOR A TREATMENT OF STATIONARY ENGINE FLUE GAS

T. Nomura<sup>1,2</sup>, S.J. Kim<sup>1,3</sup>, K. Urashima<sup>1</sup>, T. Ito<sup>2</sup>, A. Miziolek<sup>4</sup>, L.A. Rosocha<sup>5</sup>, and J.S. Chang<sup>1</sup>

<sup>1</sup> Department of Engineering Physics, McMaster University, Hamilton, Ontario, Canada L8S 4M1

<sup>2</sup> Department of Electrical and Electronics Engineering, Musashi Institute of Technology, 1-28-1, Tamazutsumi, Setagaya-ku, Tokyo 158-8557, Japan

<sup>3</sup> Korea Institute of Machinery and Materials, Taejon 305-343, Republic of Korea

<sup>4</sup> U.S. Army Laboratory, AMSRL-MT-PC, Aberdeen, Providing, Ground, MD, U.S.A.

<sup>5</sup> Los Alamos National Laboratory, P-24, Los Alamos, NM, U.S.A.

## ABSTRACT

Acid gas removal experiments are carried out in large bench scale corona radical shower reactor. A simulated stationary engine flue gas is air mixed with NO, SO<sub>2</sub> and CH<sub>4</sub>. Optimums for acid gas removal rate have been conducted in terms of the ammonia to acid gas molar ratio, the applied voltage and the additional gas velocity. Both the removal efficiencies of NO and SO<sub>2</sub> increase with increasing applied voltage and decreasing initial NO concentration. It is also shown that high concentrations of CH<sub>4</sub> have a negative effect on NO removal, where part of the NO converted only to NO<sub>2</sub> but not to ammonium nitrate aerosol particles.

## INTRODUCTION

NO<sub>x</sub> and SO<sub>x</sub> are one of air pollutants and the major cause of acid rain. Many NO<sub>x</sub> and SO<sub>x</sub> conversion techniques such as wet scrubber, selective catalytic reactor, sorbent injection, low NO<sub>x</sub> burner, etc., have been used. More recently, non-thermal plasma techniques become a commercial plant, however, the energy efficiency of the non-thermal plasma reactors have not been optimum yet. For example, the electron beam, barrier discharge and pulsed corona reactors, i.e. direct plasma treatments of flue gases, may loss input energy to activate unwanted components of flue gases such as CO<sub>2</sub>, N<sub>2</sub>, etc. Hence, the corona discharge radical injection techniques have been developed. On the other hand, the treatments of an engine combustion flue gas by non-thermal plasmas have been investigated by many researchers [1-5]. In this work, an experimental investigation has been conducted to remove NO<sub>x</sub> and SO<sub>2</sub> from the stationary engine flue gases.

## EXPERIMENTAL APPARATUS

The schematics of experimental test loop and corona radical shower electrode are shown in Fig. 1. In stationary engine flue gas treatments, the combustion flue gas was normally diluted

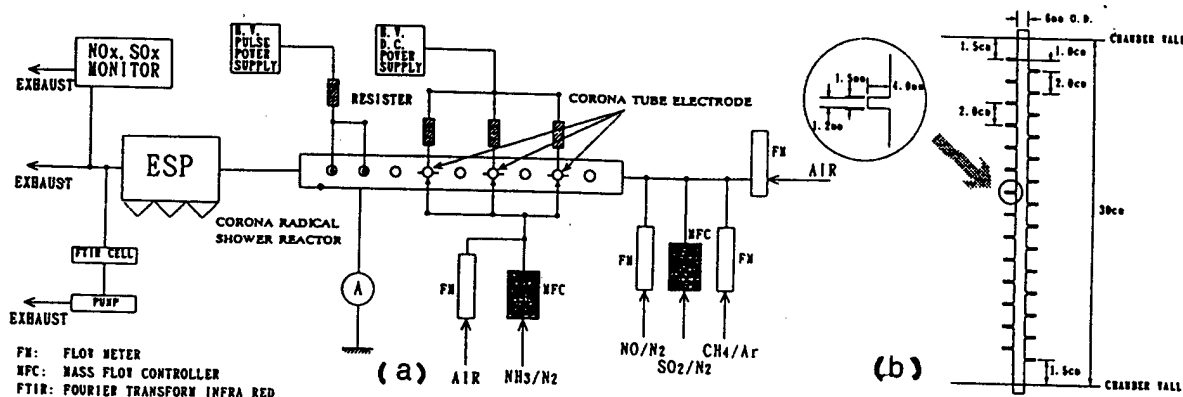


Fig. 1 Schematics of experimental flow loop (a) and corona radical shower electrode (b).

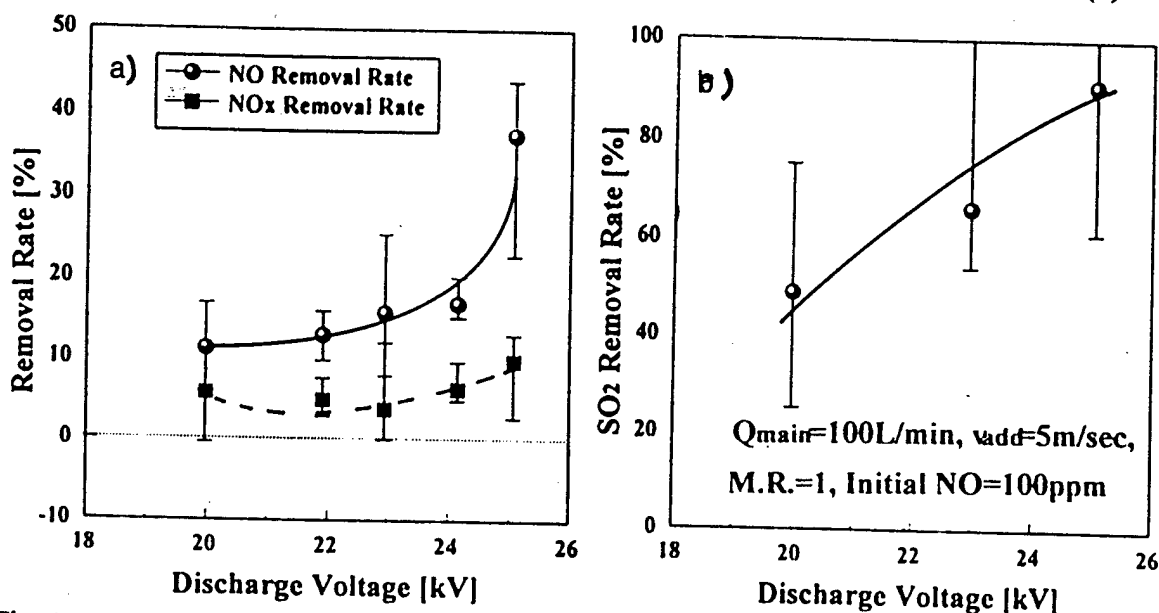


Fig. 2 Acid gas removal rate as a function of corona shower system applied voltage  $V$ , where bar in the each experimental points indicated minimum and maximum values. a)  $\text{NO}$  and  $\text{NO}_x$  and b)  $\text{SO}_2$ .

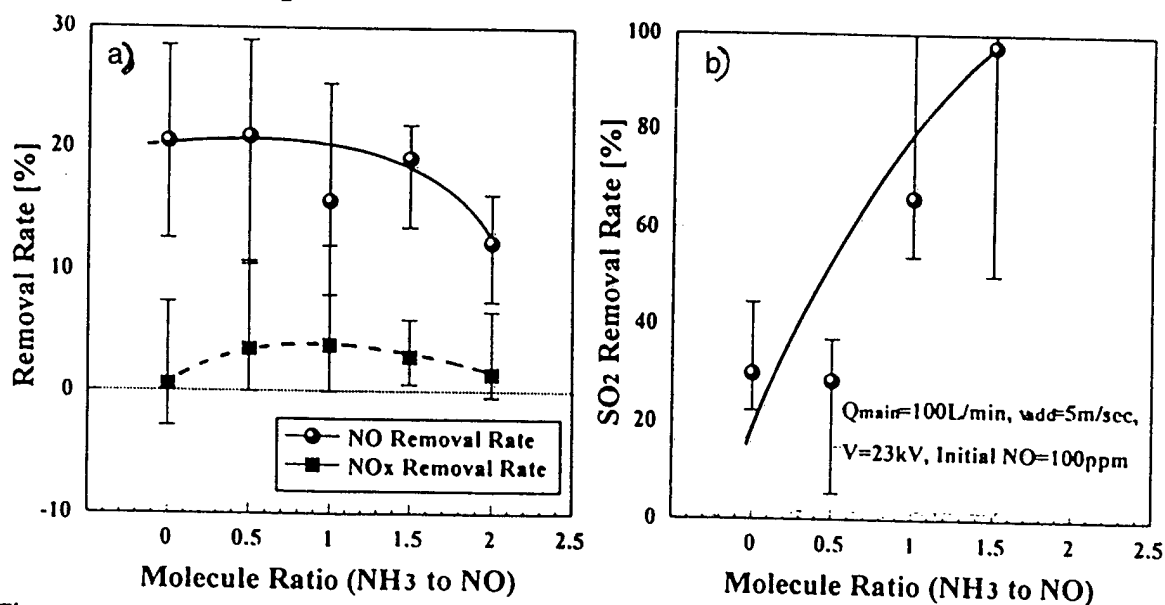


Fig. 3 Acid gas removal rate as a function of ammonia to acid gas molecule ratio  $\text{MR}$ . a)  $\text{NO}$  and  $\text{NO}_x$  and b)  $\text{SO}_2$ .

by the air for cooling down to room temperature. In the present simulated flue gas test, the concentration ratio between NO and SO<sub>2</sub> or CH<sub>4</sub> are fixed at 0.128 or 1.667, respectively, and then NO initial concentration was studied from 30 to 100 ppm. NO, NO<sub>2</sub> and SO<sub>2</sub> concentrations were measured by the Green Line gas analyzer and the trace by-products are determined by the Fourier Transform Infra-Red spectroscopy (FTIR). The aerosol particles generated by the acid gases and ammonia/methane related plasma processes were collected by the electrostatic precipitator operated at -19 kV dc at the downstream of the reactor. The size of the reactor is (10×30×100 cm) and three radical injectors are placed in series as shown in Fig. 1. The corona radical shower electrode used was 6 mm o.d. tube equipped with 28 hollow electrodes (1.2 mm i.d./1.5 mm o.d.) as shown in Fig. 1b. Additional gas consisting of air-NH<sub>3</sub> mixture was injected from these hollow electrodes to the reactor via corona discharge generated by a positive dc high voltage at the edge of the hollow electrodes.

## EXPERIMENTAL RESULTS

NO, NO<sub>x</sub> and SO<sub>2</sub> removal rate as a function of applied voltage, ammonia-to-acid gas molecule ratio MR, additional gas superficial velocity and NO initial concentration are shown in Figs. 2, 3, 4 and 5, respectively, where the bar for each experimental point shows minimum and maximum value observed during the time transient tests. NO, NO<sub>x</sub> and SO<sub>2</sub> removal rate increases with increasing NO initial concentration in flue gases as shown in Figs. 2 and 5, respectively, as expected from radical chemistry and heterogeneous reactions [5]. However, acid gas removal rate has an optimum values in terms of MR and corona radical shower system additional gas velocity as shown in Figs. 3 and 4, respectively, where NO and NO<sub>x</sub> removal rate is maximum near molecule ratio between 1 to 1.5 and additional gas velocity near 8 m/s. Based on analyses of Ohkubo et al [6], the effect of additional gas velocity can be explained by the better mixing of ammonia radicals to react with acid gases in lower velocity regions, where the mixing effect increases with increasing additional gas flow rates. For higher additional gas velocities, the ammonia radicals ejected from the hollow electrode may have shorter residence time in the reactor and only generate narrow flow channels to reduce reactions. Hence, the optimum additional gas flow velocity exists for the present range of flue gas flow rate (6 Nm<sup>3</sup>/h or reactor superficial velocity of 0.33 m/s).

Based on corona discharge gas phase and heterogeneous reactions with ammonia [5], the SO<sub>2</sub> removal rate increases with increasing MR as shown in Fig. 3. However, if we examined discharge by-products, ammonia and methane relative concentrations ( $\propto$  absorbance of IR) as shown in Fig. 6, CH<sub>4</sub> and N<sub>2</sub>O concentration become minimum at molecule ratio near 1 to 1.5 where NH<sub>3</sub>, H<sub>2</sub>O and  $\phi$ -CHO were determined by the IR absorptions at the wave length

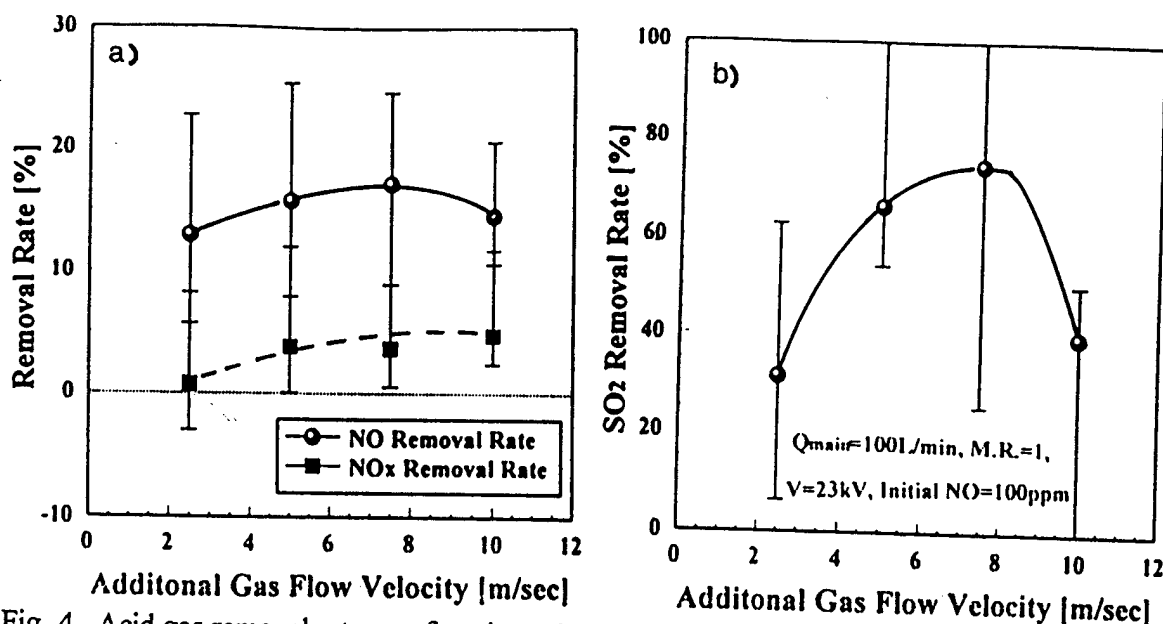


Fig. 4 Acid gas removal rate as a function of corona shower system hollow electrode additional gas flow velocity  $V_{add}$ . a) NO and NO<sub>x</sub> and b) SO<sub>2</sub>.

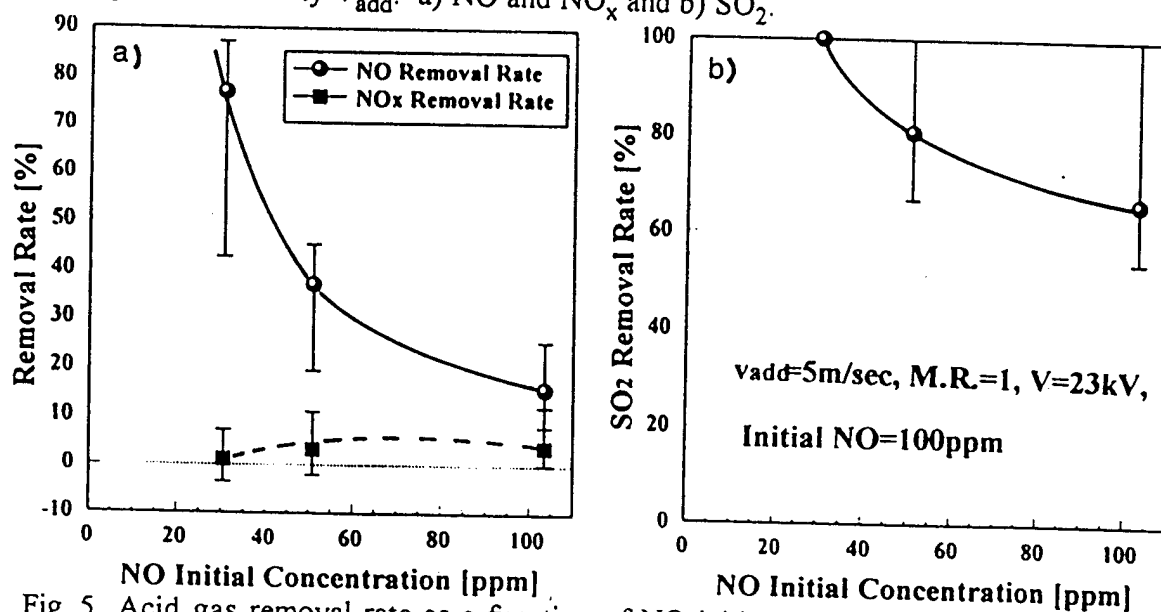


Fig. 5 Acid gas removal rate as a function of NO initial concentration in flue gases  $[NO]_0$ . a) NO and NO<sub>x</sub> and b) SO<sub>2</sub>.

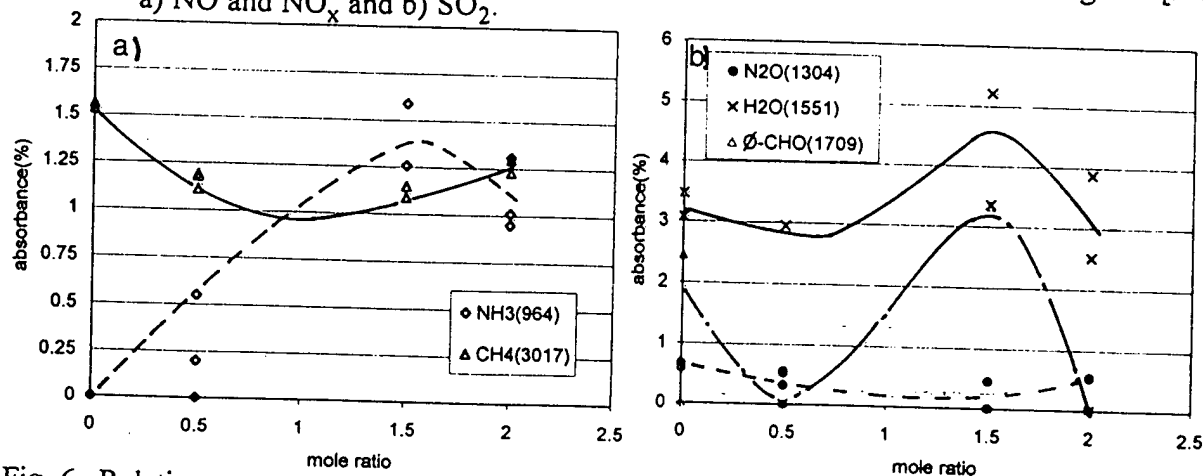


Fig. 6 Relative concentration ( $\propto$  IR absorbance) of a) NH<sub>3</sub> and CH<sub>4</sub> and b) N<sub>2</sub>O, H<sub>2</sub>O and φ-CHO (aldehyde) as a function of ammonia to acid gas molecule ratio at flue gas flow rate  $Q_f = 6 \text{ Nm}^3/\text{h}$  (100 L/min),  $V = 23 \text{ kV}$ ,  $[NO]_0 = 100 \text{ ppm}$  and  $V_{add} = 5 \text{ m/s}$ .

964, 3017, 1304, 1551 and 1709  $\text{cm}^{-1}$  in Fig. 6. For the molecule ratio below 1, NO and  $\text{NO}_x$  are removed by a reduction reaction of methane and ammonia radicals, hence, removal rate of NO,  $\text{NO}_x$ ,  $\text{N}_2\text{O}$  and  $\text{CH}_4$  increase with increasing molecule ratio. However, for the molecule ratio larger than 1, ammonia and their radicals may be mainly consumed for  $\text{SO}_2$  removal and  $\phi$ -CHO formations hence NO,  $\text{NO}_x$ ,  $\text{N}_2\text{O}$  and  $\text{CH}_4$  removals may be reduced.

By comparison with combustion generated flue gas (without large methane concentration), the removal rate of  $\text{NO}_x$  is much lower as has been observed for the other engine generated flue gas plasma treatments [1-4] in spite of effective NO oxidations. The role played by the hydrocarbon under the non-thermal plasma should be investigated in detail.

### CONCLUDING REMARKS

An experimental investigation has been conducted to remove acid gases from the stationary engine flue gas and the following concluding remarks are obtained: 1) NO,  $\text{NO}_x$  and  $\text{SO}_2$  removal rates increase with increasing applied voltage and decrease with increasing NO initial concentration in the flue gases; (2) NO,  $\text{NO}_x$  and  $\text{SO}_2$  removal rates non-monotonically depend on corona shower system additional gas flow velocity due to the mixing effects where the maximum removal rates are observed near 8 m/s; (3)  $\text{SO}_2$  removal rate increases with increasing ammonia to acid gas molecule ratio while NO and  $\text{NO}_x$  non-monotonically depend on molecule ratio; (4) Ammonia and methane slips non-monotonically depend on ammonia to acid gas molecule ratio; (5) Trace unwanted discharge by-products significantly depend on ammonia to acid gas molecule ratio and only  $\text{N}_2\text{O}$  and  $\phi$ -CHO (aldehydes) are observed; and (6) Significant amount of aerosol particles are formed during the acid gas removal processes.

### ACKNOWLEDGEMENT

This work is partly supported by the U.S. DOD-SERDP program.

### REFERENCES

1. K. Urashima, H. Miyamoto and T. Ito, Comb. Sci. & Tech., 133, 89-100 (1998).
2. M. Higashi, S. Uchida, N. Suzuki and K. Fujii, IEEE Trans. Plasma Sci., 20, 1-12, 1992.
3. B.M. Penetrante, J.N. Bardsley and M.C. Hsiao, Japanese J. Appl. Phys., 36, 5007-5017, 1997.
4. T. Hammer, S. Broer and T. Kishimoto, J. Adv. Oxid. Tech., 3 (in press, 1998).
5. J.S. Chang, J. Aerosol Sci., 20, 1087-1090, 1989.
6. T. Ohkubo, S. Kanazawa, Y. Nomoto, J.S. Chang and T. Adachi, IEEE Trans. Ind. Appl., 20, 1058-1062, 1996.