

NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

**MODELING AND SIMULATION SUPPORT FOR THE
OPERATIONAL TEST AND EVALUATION OF A
TACTICAL AIRBORNE RECONNAISSANCE SYSTEM**

by

Kevin J. Schmidt

December 1999

Thesis Advisor:
Co-Thesis Advisor:
Second Reader:

Donald P. Gaver
Patricia A. Jacobs
Arnold H. Buss

Approved for public release; distribution is unlimited.

20000306 033

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE
December 1999

3. REPORT TYPE AND DATES COVERED
Master's Thesis

4. TITLE AND SUBTITLE
MODELING AND SIMULATION SUPPORT FOR THE OPERATIONAL TEST AND EVALUATION OF A TACTICAL AIRBORNE RECONNAISSANCE SYSTEM

5. FUNDING NUMBERS

6. AUTHOR(S)
Schmidt, Kevin J.

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)
Naval Postgraduate School
Monterey, CA 93943-5000

8. PERFORMING
ORGANIZATION REPORT
NUMBER

9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)
DOT&E
1700 Defense Pentagon
Washington, DC 20301-1700

10. SPONSORING /
MONITORING
AGENCY REPORT NUMBER

11. SUPPLEMENTARY NOTES

The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.

12a. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release; distribution is unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT

Today's decreasing defense budget has forced the military to reduce its spending on operational testing of new equipment, among many other areas. Reduced testing has forced evaluators to focus their attention on possible sensitive issues prior to and during testing of new equipment. The Simulation, Test, and Evaluation Process implemented in 1995 to help reduce testing costs has been an integral part of the test and evaluation process.

This thesis develops stochastic simulations to suggest the sensitive aspects of operating and maintaining a system of mobile reconnaissance platforms, specifically a helicopter force, (more specifically the RAH-66 Comanche) prior to and during actual testing. The simulation can also be implemented to compare the effectiveness of different mobile reconnaissance platforms to augment the conduct of side-by-side field testing of actual platforms.

This simple, stochastic, event-driven simulation may be used to conduct sensitivity analysis on system design and operational issues, including attrition, for mobile reconnaissance platforms in order to focus the attention of the testers and evaluators on influential parameters during testing. It may also be used to inform force design decision-makers.

14. SUBJECT TERMS

Modeling and Simulation, Java, Simkit, Maintenance and Repair, Mobile Reconnaissance Platform, Attrition, Non-homogeneous Poisson Process, Operational Test and Evaluation

15. NUMBER OF
PAGES

179

16. PRICE CODE

17. SECURITY CLASSIFICATION OF
REPORT

Unclassified

18. SECURITY CLASSIFICATION OF
THIS PAGE

Unclassified

19. SECURITY CLASSIFICATION OF
ABSTRACT

Unclassified

20. LIMITATION
OF ABSTRACT

UL

Approved for public release; distribution is unlimited.

**MODELING AND SIMULATION SUPPORT FOR THE OPERATIONAL TEST
AND EVALUATION OF A TACTICAL AIRBORNE RECONNAISSANCE
SYSTEM**

Kevin James Schmidt
Lieutenant, United States Navy
B.S., United States Naval Academy, 1993

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH


from the

**NAVAL POSTGRADUATE SCHOOL
December 1999**

Author: _____



Kevin J. Schmidt

Approved by: _____

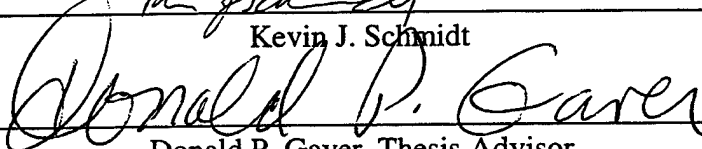
Donald P. Gaver, Thesis Advisor


Patricia A. Jacobs, Co-Thesis Advisor


Arnold H. Buss, Second Reader

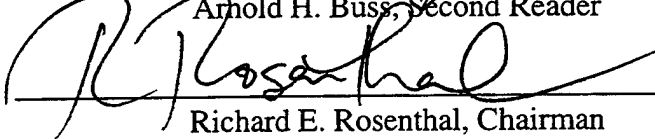
Richard E. Rosenthal, Chairman
Department of Operations Research

ABSTRACT

Today's decreasing defense budget has forced the military to reduce its spending on operational testing of new equipment, among many other areas. Reduced testing has forced evaluators to focus their attention on possible sensitive issues prior to and during testing of new equipment. The Simulation, Test, and Evaluation Process implemented in 1995 to help reduce testing costs has been an integral part of the test and evaluation process.

This thesis develops stochastic simulations to suggest the sensitive aspects of operating and maintaining a system of mobile reconnaissance platforms, specifically a helicopter force, (more specifically the RAH-66 Comanche) prior to and during actual testing. The simulation can also be implemented to compare the effectiveness of different mobile reconnaissance platforms to augment the conduct of side-by-side field testing of actual platforms.

This simple, stochastic, event-driven simulation may be used to conduct sensitivity analysis on system design and operational issues, including attrition, for mobile reconnaissance platforms in order to focus the attention of the testers and evaluators on influential parameters during testing. It may also be used to inform force design decision-makers.

THESIS DISCLAIMER

The reader is cautioned that computer programs developed in this research may not have been exercised for all cases of interest. While every effort has been made, within the available time, to ensure that the programs are free of computational and logic errors, they cannot be considered validated. Any application of these programs without additional verification and validation is at the risk of the user.

TABLE OF CONTENTS

I.	INTRODUCTION	1
A.	GENERAL	1
B.	PROBLEM	2
C.	PURPOSE	3
D.	SCOPE	3
II.	BACKGROUND	7
III.	MODEL DEVELOPMENT	11
A.	OVERVIEW	11
B.	CLASS (ENTITY) DESCRIPTIONS	14
1.	Helicopter	14
2.	Helicopter Manager	16
3.	Threat Area Manager	16
4.	Maintenance Manager	17
C.	OUTPUT	18
D.	SETUP AND ASSUMPTIONS	19
IV.	MODELS IN WHICH THE TIMES BETWEEN MISSION-AFFECTING FAILURES ARE INDEPENDENT HAVING A WEIBULL DISTRIBUTION	23
A.	SENSITIVITY ANALYSIS OF WEIBULL SHAPES	24
B.	SENSITIVITY ANALYSIS FOR VULNERABILITY PARAMETERS	28
C.	SENSITIVITY ANALYSIS FOR TIME BETWEEN SCHEDULED MAINTENANCE ACTIONS	32
D.	SENSITIVITY ANALYSIS FOR MEAN TIMES BETWEEN MISSION-AFFECTING FAILURES	36
E.	SENSITIVITY ANALYSIS OF OVERHAUL TIMES	39
F.	SENSITIVITY ANALYSIS ON THE NUMBER OF SCHEDULED MAINTENANCE FACILITIES	42
G.	SENSITIVITY ANALYSIS FOR THE NUMBER OF REPAIR FACILITIES	46
H.	SENSITIVITY ANALYSIS FOR PRIORITY MAINTENANCE	49
I.	SUMMARY OF ANALYSIS FOR THE WEIBULL DISTRIBUTION	52
V.	MODELING SYSTEM AGING AND SCHEDULED MAINTENANCE	55

A.	SENSITIVITY ANALYSIS FOR VULNERABILITY PARAMETERS	57
B.	SENSITIVITY ANALYSIS FOR TIME BETWEEN SCHEDULED MAINTENANCE ACTIONS	61
C.	SENSITIVITY ANALYSIS FOR FAILURE-RATE AGING	65
D.	SENSITIVITY ANALYSIS FOR AVERAGE TIME BETWEEN MISSION- AFFECTING FAILURES	70
E.	SENSITIVITY ANALYSIS OF OVERHAUL TIMES	73
F.	SENSITIVITY ANALYSIS OF THE EFFECT OF CHANGING NUMBERS OF SCHEDULED MAINTENANCE FACILITIES	76
G.	SENSITIVITY ANALYSIS FOR THE NUMBER OF REPAIR FACILITIES	80
H.	SENSITIVITY ANALYSIS FOR PRIORITY MAINTENANCE.....	83
I.	SUMMARY ANALYSIS FOR THE NON-HOMOGENEOUS POISSON (INCREASING FAILURE RATE) FUNCTION	86
VI.	ADDITIONAL COMPARISONS OF SIMULATIONS	89
A.	COMARISON OF THE MODEL WITH IID TIMES BETWEEN FAILURES AND THE MODEL WITH A NON-HOMOGENEOUS POISSON FAILURE RATE	89
B.	ANALYSIS OF A LOWER FATALITY RATE FOR MISSION-AFFECTING FAILURES.....	92
C.	COMPARISONS BETWEEN THE COMANCHE AND THE KIOWA WARRIOR	95
VII.	CONCLUSIONS AND RECOMMENDATIONS.....	99
A.	SUMMARY OF ANALYSIS.....	99
B.	RECOMMENDATIONS	100
1.	Model Improvement.....	100
2.	Further Studies and Analysis.....	101
C.	CONCLUSIONS	101
	LIST OF REFERENCES	103
	APPENDIX A: ANALYTICAL MODELS FOR COMPARISON.....	105
	APPENDIX B: SIMULATION DATA OUTPUT FOR WEIBULL DISTRIBUTION.....	109
	APPENDIX C: SIMULATION DATA OUTPUT FOR NON-HOMOGENEOUS FAILURE RATE PROCESS	127
	APPENDIX D: SIMULATION DATA OUTPUT FOR ADDITONAL COMPARISONS	147

INITIAL DISTRIBUTION LIST	153
---------------------------------	-----

LIST OF FIGURES

Figure 1. Chart of the Operation Area	13
Figure 2. Chart of the Model Flow	14
Figure 3. MOEs for a Weibull Distribution with a Shape of 0.5.....	27
Figure 4. MOEs for a Weibull Distribution with a Shape of 1.0.....	27
Figure 5. MOEs for a Weibull Distribution with a Shape of 2.0.....	28
Figure 6. MOEs with Low Vulnerability for a Model with Exponential Times between Failures	30
Figure 7. MOEs with Medium Vulnerability for a Model with Exponential Times between Failures.....	31
Figure 8. MOEs with High Vulnerability for a Model with Exponential Times between Failures	31
Figure 9. MOEs for 300-hour Maintenance Policy for Model with Exponential Time between Failures.....	34
Figure 10. MOEs for 400-Hour Maintenance Policy for Model with Exponential Time between Failures..	35
Figure 11. MOEs for 500-Hour Maintenance Policy for Model with Exponential Times between Failures	35
Figure 12. MOEs with MTBMAF equal to 4.25 Hours for Model with Exponential Times between Failures	38
Figure 13. MOEs with MTBMAF equal to 8.5 Hours for Model with Exponential Times between Failures	38
Figure 14. MOEs with MTBMAF equal to 17.0 Hours for Model with Exponential Times between Failures	39
Figure 15. MOEs with Short Overhaul Times for Model with Exponential Times between Failures.....	41
Figure 16. MOEs with Medium Overhaul Times for Model with Exponential Times between failures.....	41
Figure 17. MOEs with Long Overhaul Times for Model with Exponential Times between Failures	42
Figure 18. MOEs with One Scheduled Maintenance Facility for Model with Exponential Times between Failures.....	44
Figure 19. MOEs with Two Scheduled Maintenance Facilities for Model with Exponential Times between Failures.....	45
Figure 20. MOEs with Four Scheduled Maintenance Facilities for Model with Exponential Times between Failures.....	45
Figure 21. MOEs with a Single Repair Facility for Model with Exponential Times between Failures	48
Figure 22. MOEs with Two Repair Facilities for Model with Exponential Times between Failures.....	48
Figure 23. MOEs with Four Repair Facilities for Model with Exponential Times between Failures	49
Figure 24. MOEs with Priority Maintenance for Model with Exponential Times between Failures	51
Figure 25. MOEs with First-Come, First-Served, Maintenance for Model with Exponential Times between Failures.....	52
Figure 26. MOEs with Low Vulnerability for Model with a Non-homogeneous Failure Rate Process	59
Figure 27. MOEs with Medium Vulnerability for Model with a Non-homogenous Failure Rate Process....	60

Figure 28. MOEs with High Vulnerability for Model with a Non-homogeneous Failure Rate Process	60
Figure 29. MOEs with 300-Hour Maintenance Policy for Model with a Non-homogeneous Failure Rate Process	64
Figure 30. MOEs with 400-Hour Maintenance Policy for Model with a Non-homogeneous Failure Rate Process	64
Figure 31. MOEs with 500-Hour Maintenance Policy for Model with a Non-Homogeneous Failure Rate Process	65
Figure 32. MOEs for Case I of the Varying Rate Functions	68
Figure 33. MOEs for Case II of the Varying Rate Functions.....	69
Figure 34. MOEs for Case III of the Varying Rate Functions	69
Figure 35. MOEs with ATBMAF equal to 4.25 Hours for Model with a Non-homogeneous Failure Rate Process	72
Figure 36. MOEs with ATBMAF equal to 8.5 hours for Model with a Non-homogeneous Failure Rate Process	72
Figure 37. MOEs with ATBMAF equal to 17.0 Hours for Model with a Non-homogeneous Failure Rate Process	73
Figure 38. MOEs with Short Overhaul Times for Model with a Non-homogeneous Failure Rate Process ..	75
Figure 39. MOEs with Medium Overhaul Times for Model with a Non-homogeneous Failure Rate Process	75
Figure 40. MOEs with Long Overhaul Times for Model with a Non-homogeneous Failure Rate Process...	76
Figure 41. MOEs with One Scheduled Maintenance Facility for Model with a Non-homogeneous Failure Rate Process	78
Figure 42. MOEs with Two Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process	79
Figure 43. MOEs with Four Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process.....	79
Figure 44. MOEs with a Single Repair Facility for Model with a Non-homogeneous Failure Rate Process	82
Figure 45. MOEs with Two Repair Facilities for Model with a Non-homogeneous Failure Rate Process ...	82
Figure 46. MOEs with Four Repair Facilities for Model with a Non-homogeneous Failure Rate Process...	83
Figure 47. MOEs with Priority Maintenance for Model with a Non-homogeneous Failure Rate Process....	85
Figure 48. MOEs with First-Come, First-Served, Maintenance for Model with a Non-homogeneous Failure Rate Process	86
Figure 49. MOEs for the Model with iid Times between Mission-Affecting Failures	91
Figure 50. MOEs for Model with a Non-homogeneous Failure Rate Process	91
Figure 51. MOEs with 10% of Mission-Affecting Failures Resulting in Fatalities.....	94
Figure 52. MOEs with 1% of Mission-Affecting Failures Resulting in Fatalities.....	94
Figure 53. MOEs for the Comache Helicopter	97

Figure 54. MOEs for the Kiowa Warrior Helicopter	98
--	----

LIST OF TABLES

Table 1. Description of Weibull Cases.	24
Table 2. Description of Vulnerability Cases for a Model with Exponential Times between Failures.....	28
Table 3. Description of Different Maintenance Policies for a Model with Exponential Times between Failures.	32
Table 4. Description of MTBMAF for Model with Exponential Times between Failures.	36
Table 5. Description of Overhaul Times for Model with Exponential Times between Failures.	39
Table 6. Description of the Number of Scheduled Maintenance Facilities for Model with Exponential Times between Failures.	42
Table 7. Description of the Number of Repair Facilities for Model with Exponential Times between Failures.	46
Table 8. Description of Priority Maintenance Policies for Model with Exponential Times between Failures.	49
Table 9. Description of Vulnerability Cases for Model with a Non-homogeneous Failure Rate Process.....	57
Table 10. Description of Different Maintenance Policies for Model with a Non-homogeneous Failure Rate Process.	61
Table 11. Description of Aging Process for Model with a Non-homogeneous Failure Rate Process.	66
Table 12. Description of ATBMAF for Model with a Non-homogeneous Failure Rate Process.....	70
Table 13. Description of Overhaul Times for Model with a Non-homogeneous Failure Rate Process.	73
Table 14. Description of the Number of Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process.	76
Table 15. Description of the Number of Repair Facilities for Model with a Non-homogeneous Failure Rate Process.	80
Table 16. Description of Priority Maintenance Policies for Model with a Non-homogenous Failure Rate Process.	83
Table 17. Description of Models being Compared.	89
Table 18. Description of the Percentage of Mission-Affecting Failures that are Fatal.	92
Table 19. Description of Differences between Two Helicopter Systems.....	95
Table 20. Comparison of Simulation and Analytical Models.	107
Table 21. Data for Figure 3, Figure 9, Figure 13, Figure 17, Figure 18, and Figure 21.	109
Table 22. Data for Figure 4.....	110
Table 23. Data for Figure 5.....	111
Table 24. Data for Figure 6.....	112
Table 25. Data for Figure 7.....	113
Table 26. Data for Figure 8.....	114

Table 27. Data for Figure 10.....	115
Table 28. Data for Figure 11.....	116
Table 29. Data for Figure 12.....	117
Table 30. Data for Figure 14.....	118
Table 31. Data for Figure 15.....	119
Table 32. Data for Figure 16.....	120
Table 33. Data for Figure 19.....	121
Table 34. Data for Figure 20.....	122
Table 35. Data for Figure 22.....	123
Table 36. Data for Figure 23.....	124
Table 37. Data for Figure 24.....	125
Table 38. Data for Figure 25.....	126
Table 39. Data for Figure 26.....	128
Table 40. Data for Figure 27.....	128
Table 41. Data for Figure 28.....	129
Table 42. Data for Figure 29, Figure 33, Figure 40, Figure 41, and Figure 44.....	130
Table 43. Data for Figure 30.....	131
Table 44. Data for Figure 31.....	132
Table 45. Data for Figure 32.....	133
Table 46. Data for Figure 34.....	134
Table 47. Data for Figure 35.....	135
Table 48. Data for Figure 36.....	136
Table 49. Data for Figure 37.....	137
Table 50. Data for Figure 38.....	138
Table 51. Data for Figure 39.....	139
Table 52. Data for Figure 42.....	140
Table 53. Data for Figure 43.....	141
Table 54. Data for Figure 45.....	142
Table 55. Data for Figure 46.....	143
Table 56. Data for Figure 47.....	144
Table 57. Data for Figure 48.....	145
Table 58. Data for Figure 49, and Figure 51.....	147
Table 59. Data for Figure 50.....	148
Table 60. Data for Figure 52.....	149
Table 61. Data for Figure 53.....	150
Table 62. Data for Figure 54.....	151

EXECUTIVE SUMMARY

The Operational Test and Evaluation (OT&E) of a new weapon system is that part of the acquisition process that determines whether the weapon system is operationally effective and operationally suitable in the combat environment for which it was designed when operated by typical users. Because of the increasing costs of conducting tests, testers and evaluators must be focused on the important and highly sensitive operational issues needed to ensure successful fielding of a new weapon system.

Modeling and Simulation (M&S) is a useful way of beginning to understand what a particular system will be able to accomplish, and can be used as an aid in the determination of sensitive operational issues. This thesis develops a simple, stochastic, event-driven simulation to identify sensitive aspects (parameters) of operating and maintaining a mobile reconnaissance platform, specifically a helicopter. The simulation has been built to provide support for the Operational Test and Evaluation of the RAH-66 Comanche. Specifically, the simulation is used to identify the influential parameters involved in operating and maintaining the Comanche as a reconnaissance system by conducting sensitivity analysis of the input parameters to determine the effects of each on selected Measures of Effectiveness (MOE).

One MOE used throughout this thesis is the mean percentage of time that a team of helicopters is on station providing reconnaissance coverage of a Named Area of Interest (NAI) on each day of the campaign. The MOE is the total amount of time per day that at least one helicopter is providing coverage of the NAI divided by the total amount of time in a day, averaged over numerous replications. Another MOE used is the

mean number of helicopters surviving at the end of each day during the campaign. This measure of effectiveness shows the rate of decline in the number of helicopters over time resulting from attrition by enemy forces and helicopter crashes. Additional MOEs can be computed as determined by the needs of the user.

Several parameters were varied in the conduct of sensitivity analysis for two models used to generate times between mission-affecting failures. One model, a Weibull distribution, demonstrated that not only is the mean time between mission-affecting failures an influential parameter, but that the shape of the distribution is highly influential as well. The shape of the Weibull distribution represents the type of failures that are predominately experienced. For a shape parameter less than one many short failure times are generated (infant failure), while a shape parameter greater than one (wear-out) will produce many failure times clustered around the mean of the distribution.

The other model used to generate times between mission-affecting failures is a time dependent non-homogeneous Poisson process. This process represents aging of the helicopters. As more flight time is accumulated, shorter times between mission-affecting failures are generated and thus more mission-affecting failures occur.

The vulnerability of reconnaissance platforms proved to have the largest effect on the MOEs in both models. In most instances the vulnerability parameters dominate effects of the other parameters. This suggests that the vulnerability of the helicopters needs to be addressed and monitored during operational testing.

By obtaining information about the sensitive aspects of weapon system operations prior to actual testing, the testers and evaluators can design tests specifically to look at the

above mentioned issues. This thesis demonstrates the use of a simple stochastic simulation to identify influential parameters involved in operating and maintaining a mobile reconnaissance platform. Its use can provide valuable insights into complex operational issues.

ACKNOWLEDGEMENTS

I would like to express my sincerest thanks to Professor Donald Gaver, Professor Patricia Jacobs, and Professor Arnold Buss. Without their vast knowledge, expertise, and guidance this work could not have been completed. I would also like to thank Colonel Wayland Parker and DOT&E for their support and guidance during my experience tour.

Finally, I would like to thank my loving wife Libby, whose love and patience have shown no bounds throughout this endeavor.

I. INTRODUCTION

A. GENERAL

The Operational Test and Evaluation (OT&E) of a new weapon system is that part of the acquisition process that determines whether the weapon system is operationally effective and operationally suitable in the combat environment for which it was designed, when operated by typical users. Because of the increasing costs of conducting tests, testers and evaluators must be focused on the important and highly sensitive operational issues needed to ensure successful fielding of a new weapon system. Sensitive operational issues are those aspects of the weapon system that, when changed slightly, cause a significant variation in the operational suitability and/or effectiveness of the weapon system. With their attention focused on the sensitive operational issues, testers and evaluators can plan tests more efficiently to examine a system's operational performance with regard to several issues at once rather than conducting several tests to obtain all the required data for the analysis of the new weapon system. Modeling and Simulation can increase the efficiency and timeliness of the acquisition process.

A primary OT&E issue is to decide whether a particular new or upgraded weapon system will be a valuable addition to the force, where value must include its general operational capability (including range, reliability, availability and maintainability) plus its life-cycle cost, compared with alternatives. Modeling and Simulation (M&S) is a useful way of beginning to anticipate what a particular system will be able to accomplish and cost, under realistic conditions. More importantly, M&S will help to focus attention

on possibly sensitive aspects of system design and operation prior to actual tests (Stoneman, 1998).

This thesis develops a stochastic simulation to identify sensitive aspects (parameters) of operating and maintaining a mobile reconnaissance platform, specifically a helicopter, prior to and during actual field-testing. The simulation has been built to provide support for the Operational Test and Evaluation of the RAH-66 Comanche. With some parameter adjustments, the same simulation can be used to evaluate many other reconnaissance platforms.

B. PROBLEM

During OT&E, the Department of Defense (DoD) user must oversee the operational test of certain weapon systems to ensure that they meet operational requirements, defined during and before the developmental phase of the acquisition process. Many of these requirements are specifically designated in the Operational Requirements Document (ORD). It is the testers' and evaluators' responsibility to ensure that the platform is able to meet or exceed the requirements specified in the ORD.

However, when initially entering the testing phase, the testers and evaluators may not know which aspects of the weapon system are of great importance to successful operation in the field. Prior to conducting actual tests, testers and evaluators, and the program manager and eventual user force, will have many questions about the operation and/or design of the weapon system, its operational sensitivities and their effect on mission accomplishment. Some of these questions can be answered using a stochastic simulation designed to conduct sensitivity analysis. The answers to these questions will

focus the attention of the testers and evaluators on issues of system design and operation prior to actual tests. By knowing what to look for during testing, the testers and evaluators will be able to focus on the significant operational issues and ensure that the weapon system meets its specified requirements during operational testing. Properly employed, system modeling and simulation will assist in cost-effective fielding of new and upgraded weapons.

C. PURPOSE

The purpose of this thesis is to aid in the Operational Test and Evaluation of the RAH-66 Comanche helicopter using a simple, event-step, stochastic simulation. The simulation, developed for this thesis, will be used to identify influential parameters involved in operating and maintaining the RAH-66 Comanche as a reconnaissance platform system prior to, and during, operational testing (OT). The question being answered is:

Which aspects of operation and maintenance of the Comanche helicopter greatly affect its ability to perform the reconnaissance mission?

The model developed for this purpose can also be used for many other similar purposes, and analogous situations and systems: for T&E guidance and force design for force elements that are failure-susceptible, vulnerable, and of limited endurance.

D. SCOPE

The scope of this thesis is to determine how variations of the input parameters affect a measure of effectiveness. One measure of effectiveness (MOE) used throughout

this thesis is the mean percentage of time that a helicopter or team of helicopters is on station providing reconnaissance coverage of the search area or Named Area of Interest (NAI) on each day of the campaign. The MOE is the total amount of time per day that at least one helicopter or team of helicopters is providing coverage of the NAI divided by the total amount of time in a day, averaged over numerous runs. Another MOE used is the mean number of helicopters surviving at the end of each day during the campaign. This measure of effectiveness shows rate of decline in the number of helicopters over time resulting from attrition by enemy forces and helicopter crashes. The mean number is also augmented by selected (25%, 50% and 75%) percentiles of those surviving to portray risk.

To facilitate understanding, several input parameters are varied to determine the extent of each varied parameter's effects on the measures of effectiveness. Plausible alternatives for generating the random times between mission-affecting failures are modeled for their effect on the results, as are alternative maintenance strategies and capabilities. It is shown that changes in the distribution of time to failure can importantly affect overall system performance; these sensitivities can be efficiently discovered by simulation (Stoneman, 1998).

By using a simple stochastic simulation to discover the sensitive issues of the RAH-66 Comanche helicopter system, testers and evaluators can effectively plan tests and make better use of output data from such tests. The data collected during each test run of the helicopter system can be used to verify the predictions of the simulation and modify the simulation model, if necessary, for future simulations prior to further

operational testing. This is an example of the “model, test, modify, and (re)model, test...” paradigm of modern Test and Evaluation.

II. BACKGROUND

Operational Test and Evaluation is traditionally defined as the field test, under realistic combat conditions, of any system of weapons, equipment, or munitions for the purpose of determining the Effectiveness and Suitability of the weapons, equipment, or munitions for use in combat by typical military users, and the evaluation of the results of such a test (DoDD 5141.2, 1989). This is as defined in DoDD 5141.2, "Director of Operational Test and Evaluation," which establishes and defines the responsibilities for the Director, Operational Test and Evaluation (DOT&E). Operational Test and Evaluation is performed to ensure that before accepting delivery and offering complete payment for the systems, DoD has tested them to ensure that they are operationally effective and operationally suitable in the intended combat environment when operated by typical users. From this precept has sprung an extensive policy directing how and when such testing must be done, and by whom (Carter, 1998).

Operational Effectiveness represents the overall degree of mission accomplishment of a system when used by representative personnel in the environment planned or expected (e.g., natural, electronic, threat) for operational employment considering organization, doctrine, tactics, survivability, vulnerability, and threat (<http://web.nps.navy.mil/~orfacpag/resumePages/gaver/planning.htm>). Operational Suitability suggests the degree to which a system can be placed satisfactorily in field use with consideration given to availability, compatibility, transportability, interoperability, reliability, wartime usage rates, maintainability, safety, human factors, manpower

supportability, logistics supportability, natural environmental effects and impacts, documentation, and training requirements

(<http://web.nps.navy.mil/~orfacpag/resumePages/gaver/planning.htm>).

Even though much of the testing is directed by policy, the detailed focus of the tests is not always straightforward. Since 1995, the Simulation, Test and Evaluation Process (STEP) has been a required, integral part of the test and evaluation process. The STEP process, a repetitive cycle of "model, test, model," allows the testers and evaluators to gain insight into the system prior to conducting any actual field tests. Modeling and Simulation (M&S) is used to gain insights into operational consequences (O'Bryan, 1998). A simulation is formulated to represent the system and then run numerous times to gain an understanding of the mean and variability of measures of operability for the actual system and its characteristics. The simulation focuses the attention of the testers and evaluators on sensitive issues that should be addressed or monitored during actual testing. As Mr. Philip E. Coyle, current Director, Operational Test and Evaluation in OSD, said in a presentation, "Modeling and Simulation and testing are intertwined; when they are not, neither is effective" (Coyle, 13 May 1999).

The following quote shows that the entire acquisition community has been directed to implement and use modeling and simulation throughout the entire acquisition process. "Test and evaluation programs shall be structured to integrate all developmental test and evaluation (DT&E), operational test and evaluation (OT&E), live-fire test and evaluation (LFT&E), and modeling and simulation (M&S) activities conducted by different agencies as an efficient continuum. All such activities shall be part of a strategy

to provide information regarding risk and risk mitigation, to provide actual data to accredit models and simulations, to permit an assessment of technical performance specifications and to determine whether systems are operationally effective, suitable and survivable for intended use" (DOD 5000.2-R, Section 3.4, 1999).

Many models and simulations are available for use. Some are high-resolution models, with a narrow focus, which are often costly to operate and reprogram to represent operational situations. Examples of high-resolution models are FAST3D and PARACOMT. Both model the effects of chemical and biological warfare by providing high-fidelity assessments of chemical agent cloud movements and target area coverage along with personnel casualty estimates respectively (<https://www.msrr.dmsi.mil/KeywordMain.htm>). Models of this nature provide more detail than is necessary to gain an understanding of the underlying processes that are important to the operational effectiveness of a system. More often than not, these types of models require a vast amount of computing power as well as a great deal of time to provide useful output.

Other models are very low resolution; they do not provide a detailed enough view of a specific "piece of the action," but provide a big picture overview of everything. Examples of low-resolution models are CEM and IDAGAM. These are both deterministic theater-level models of ground and air-combat whose basic units are either a division or brigade (Hartman, Parry, Caldwell, 1992). These types of models may not have sufficient detail to answer the questions posed by weapon system developers, testers and evaluators.

Many times the model or simulation needed to study the contribution of a specific system does not exist. In this case, new models or simulations can be constructed quickly and inexpensively, and run on a personal computer to provide an analysis tool that fits the tailored needs of the current weapon system being tested. Models of this type are very inexpensive to operate, can be distributed to many users to allow increased analysis, and are tailored to answer the exact questions that have been posed by the decision-makers. One such question addressed by the current model is: "How does attrition by enemy forces affect mission accomplishment?" Models, such as MASS and UAVSim, have been developed to study area coverage and maintenance policies for various platforms (Stoneman, 1998; Heath, 1999). Neither of the previous models has addressed the issue of attrition. Attrition reduces the number of available platforms and thereby affects mission accomplishment. The current model addresses this issue and its effects.

Even though a model is "unaccredited," i.e., not officially approved for use, it can still produce valuable insights into testing (Coyle, 1998). It is this type of model that is created and exercised (used to provide test design insights) in this thesis.

III. MODEL DEVELOPMENT

A. OVERVIEW

The model developed is realized as a stochastic, event-driven simulation, which simulates the operation of a tactical reconnaissance platform, e.g., a helicopter (but not exclusively). The model is programmed in Java using the simulation package Simkit that was developed by Arnold Buss and Kirk Stork (Stork, 1997). The model consists of four Java classes or entities:

- 1) Helicopter
- 2) Helicopter Manager
- 3) Threat Area Manager
- 4) Maintenance Manager

The objective of the model is to represent an operation that sends reconnaissance assets, i.e., helicopters traveling in pairs, from a home base to a search area via waypoints to conduct a search of a Named Area of Interest (NAI). While in transit to and from the search area the helicopters are subject to mission-affecting failures, and are also vulnerable (can be shot down by enemy forces) to differing degrees in different areas, as shown in Figure 1. Retaliation or suppression of Red enemy defensive fire is not modeled here, but its effect may be represented by reducing the vulnerability rate. If a helicopter experiences a mission-affecting failure, it immediately returns to its home base for repairs. If a helicopter is shot down, it is assumed lost and removed from the simulation. Further losses from pilot rescue are also not modeled here. Once a helicopter

completes a mission or returns to its home base due to a mission affecting-failure, it is sent to the maintenance facility for repairs, rearming and refueling. The number of mission-affecting failures that the helicopter experienced during its previous mission as well as additional turn-around time (rearming and refueling) determines the time spent in the maintenance facility for repairs. The model also monitors total flight time for each helicopter and after a specified number of flight hours (e.g., 300 hours) each helicopter is sent to the maintenance facility for scheduled maintenance. The scheduled maintenance period is an extended period of time (e.g., 7 days) during which the helicopter is overhauled. Such overhaul reduces system failure rate to its initial level. A chart depicting the flow of model operation is shown in Figure 2.

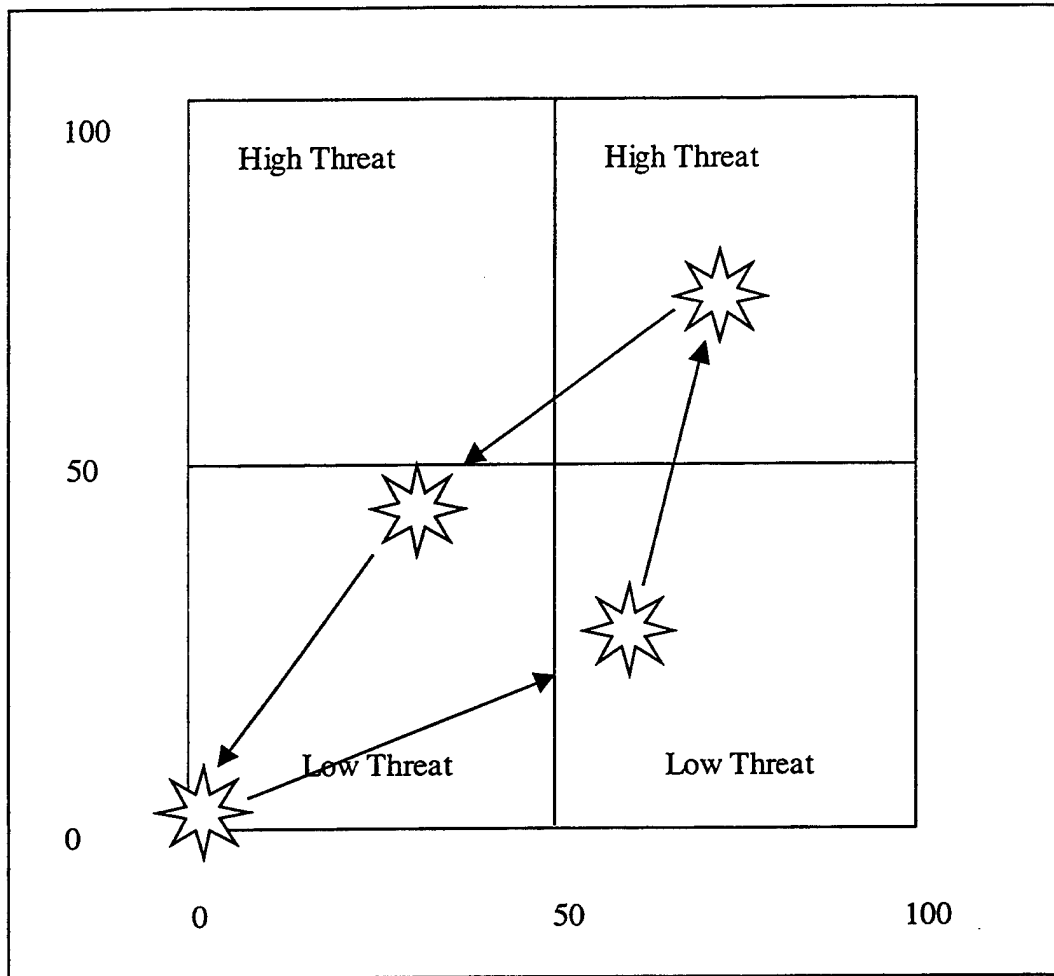


Figure 1. Chart of the Operation Area. The home base is located at the origin with the search area in the high threat region. The ingress and egress waypoints are located in the low threat regions.

One prominent measure of effectiveness (MOE) used to compare different platforms, different initial conditions, and different operational policies is the *mean percentage of time that a group of such reconnaissance platforms, operating cooperatively, can maintain coverage over the search area*. Another MOE used is the *mean number of helicopters surviving at the end of each day*. Other measures can also be studied using the model's software to extract the necessary data from the simulation.

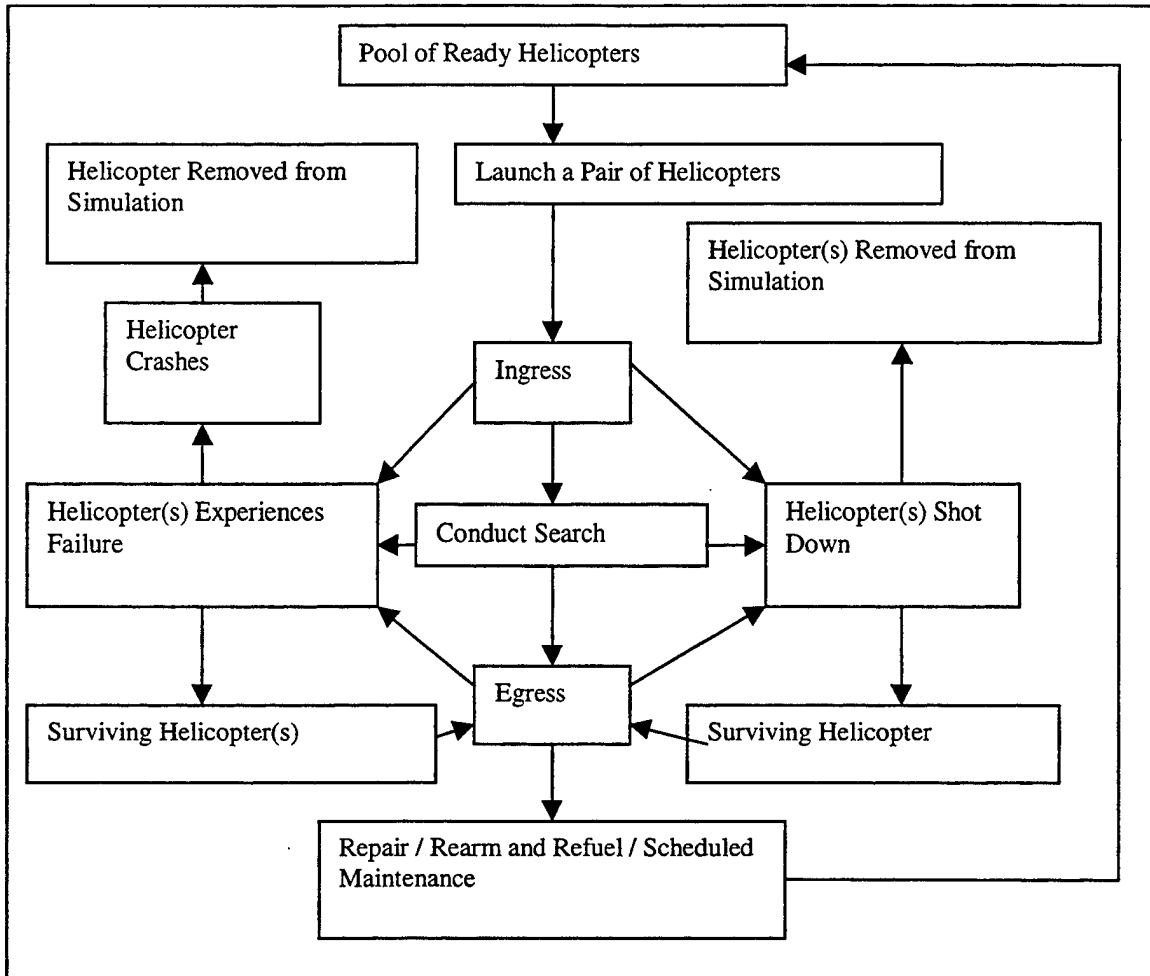


Figure 2. Chart of the Model Flow. This chart depicts the flow of the model as it directs helicopters to accomplish the mission of maintaining coverage over the search area.

B. CLASS (ENTITY) DESCRIPTIONS

1. Helicopter

Each reconnaissance asset (helicopter) can ingress to the search area, search the search area, egress from the search area, fail, be shot down, be refueled and rearmed, be repaired, overhauled, and often it must, by doctrine, be assigned a partner or wingman.

When a helicopter experiences a mission-affecting failure, it either forces the helicopter to return to its home base or destroys the helicopter at the time of failure

(crashes). The times between mission-affecting failures (MAF) can be modeled using various potentially appropriate stochastic processes. One of the processes examined in this thesis assumes the times between MAF are independently and identically distributed having a Weibull distribution (specified by shape and scale parameters and hence a specified mean time to failure). Another process examined assumes the times between MAF are the times between arrivals of a non-stationary Poisson process that emulates the effects of aging which can be reversed by periodic overhauls. These distributions were created in separate Java classes for use with Simkit. When a helicopter is shot down, it is simply removed from the simulation. Helicopter replacements and reinforcements are not modeled at present. While performing a mission, each helicopter is assigned a partner or wingman. If the helicopter's partner experiences a mission-affecting failure or is shot down, the surviving helicopter is notified of this event and in both cases is directed to return to its home base.

Each helicopter monitors and updates its state variables as it progresses through the simulation. The state variables monitored are the number of mission-affecting failures per mission, state of helicopter flight (ingress, search, or egress), total flight time or flight hours, whether the helicopter is dead or alive, and the state of the helicopter's partner or wingman while in flight. At the start of each simulation, each helicopter's initial flight hours are set such that the arrival of helicopters to the maintenance facility for periodic overhauls is staggered. This practice of staggering periodic overhauls is normal for actual helicopters or any other equipment that periodically requires time intensive maintenance.

2. Helicopter Manager

The helicopter manager controls the movement of all the helicopters that are created for the simulation. If any event or movement occurs to a helicopter, the helicopter manager controls it. The helicopter manager directs the helicopters to and from their search area via the helicopter's ingress and egress waypoints. It also directs the helicopters to return to their home base via the most direct route in the event of a mission-affecting failure. The helicopter might also divert if the enemy were known to be dense along the direct route; this is not represented here. If a helicopter is shot down, the helicopter manager directs the surviving helicopter to return to its home base via the most direct or minimum-risk route. Barring any failures or attrition, the helicopter manager is designed to control the helicopters to maintain continuous coverage of the search area.

The helicopter manager also directs the helicopters to the maintenance manager for failure repairs or periodic maintenance. Before sending a helicopter on a mission, the helicopter manager compares the helicopter's flight hours to its periodic scheduled maintenance time. If the helicopter has sufficient flight hours remaining to complete another mission, it is sent on the mission. Otherwise the helicopter is sent to the maintenance manager for scheduled maintenance. Upon completion of the repairs or the scheduled maintenance, the helicopter is returned to the helicopter manager where it awaits assignment of its next mission.

3. Threat Area Manager

The threat area manager is a simulation program entity that keeps track of where the helicopter is in relation to pre-assigned threat areas and assigns times until the

individual helicopters get shot down. A threat area manager is assigned to each helicopter.

The time until being shot down in a threat area is modeled with an exponential distribution specified by the assumed mean time until an individual helicopter is shot down in that area. As the helicopter enters and leaves the pre-assigned threat areas, its threat area manager will change the time until the helicopter is shot down based on the threat area that the helicopter is entering. If a helicopter is shot down, both the helicopter and its threat area manager are removed from the simulation. Occasional recovery of crashed helicopters (certainly their surviving crew) is plausible, but not covered by the present models.

4. Maintenance Manager

The maintenance manager (a simulation device, but one that reflects and approximates the actions of an actual scheduler) is responsible for generating the repair, turnaround, and scheduled maintenance times for the helicopters. The turnaround time is the time to refuel and rearm the helicopter to prepare it for its next flight. The maintenance system is a specialized multi-type customer and server queuing system; it is a complicated "repairman problem," (Feller, 1967). Separate servers are used for the repair (includes turnaround) and scheduled maintenance systems that the maintenance manager controls.

As each helicopter enters the repair system, it is assigned a repair time for each of its failures, and a turnaround time. In the present model, both of these times are exponentially distributed, but other distributions may be easily substituted. The repair

system can be operated on a first-come, first-served basis or, more realistically, it can be set up as a priority queuing system that might start repair on the helicopter in the queue with the shortest total repair and turnaround time. This assumes that the repair times for each of the helicopters in the queue are known. This is a reasonable assumption due to the high technological systems of modern day equipment with sophisticated and reliable fault detection. The repair system can also be set up with multiple repair facilities.

The maintenance manager also controls the helicopters that require scheduled maintenance. Each helicopter that enters the maintenance system for scheduled maintenance is assigned a random maintenance time, taken to be uniformly distributed over an interval restricted around seven days. The maintenance times are generally many times greater than the repair times since the scheduled maintenance simulates the helicopters being periodically overhauled. Once a helicopter completes its scheduled maintenance, it is returned to the helicopter manager. The model can be set up so that, upon completing scheduled maintenance, the helicopter is returned to the helicopter manager in perfect condition or near-perfect condition. Either way, the helicopter is always returned to service in much better condition (lower failure rate) than when it entered the maintenance facility for scheduled maintenance.

C. OUTPUT

The model writes its output to a text file. The file lists, for each run, the fraction of time per day that at least one helicopter-team is searching over the named area of interest (NAI) and the number of helicopters surviving at the end of each day. The times are then combined to provide the mean percentage of time per day that helicopter-teams

are providing coverage over the NAI. *Note: The 25th, 50th, and 75th percentiles of the distribution of percent coverage of the NAI are also computed; the results appear in Appendix B, Appendix C, and Appendix D. Helicopter Survivability is also tabulated similarly.* The number of helicopters surviving each day is also combined to provide a mean number of helicopters alive at the end of each day. These are the two primary Measures of Effectiveness (MOE) used to make comparisons among the different simulations. By comparing the data for different platforms as well as different initial conditions, T&E decision makers are able to determine which input parameters are highly influential and need to be monitored or tested during field operational testing.

D. SETUP AND ASSUMPTIONS

The purpose of the simulation model is to usefully represent the behavior of actual helicopters in the field. The first item of concern is the helicopter units used for each replication. The doctrine being written for the RAH-66 Comanche helicopter currently calls for three Air Cavalry Troops consisting of eight Comanche helicopters each to make up one Division Cavalry Squadron. There is one Cavalry Squadron per Army Division for a total of 24 RAH-66 Comanche helicopters. Actual practice dictates that the total flight hours of each helicopter be staggered such that the helicopters each enter scheduled maintenance sequentially staggered and not all at once. With this in mind at the start of each simulation replication, the total flight hours for each helicopter are uniformly staggered between zero and the time between scheduled maintenance actions. This means that for 24 helicopters, operating with a scheduled time between maintenance of 300 hours, each helicopter's flight hours are staggered by 12.5 (300/24) hours.

The operation of the maintenance and repair facilities is also set up to reflect actual practices in the field. There is a separate scheduled maintenance facility and a repair facility that operate independently of each other. In the model, the scheduled maintenance facility, which corresponds to depot level maintenance, is strictly responsible for the conduct of overhauls, while the repair facility is strictly responsible for the repair of mission-affecting failures as well as turnaround of the helicopters. In real life this may not always be the case as the company's repair department can become overwhelmed, at which point the commander can request additional help from depot level maintenance. The model is also set up to reflect imperfect repair of failures. When a MAF occurs, a new MAF time is generated from the applicable distribution. Once the helicopter reaches its home base, it is immediately sent to the repair facility to be repaired. The helicopter retains the scheduled time of the next MAF for use on its next mission. Once repairs are complete and the helicopter begins a new mission, a MAF time is not generated. The remaining time until the next MAF that was scheduled is now used as the time until the next MAF for the helicopter. If the helicopter is returning from scheduled maintenance, the previous mission-affecting failure time is disregarded and a new failure time is generated.

The current simulation only generates mission-affecting failures. Non-mission affecting failures are not represented in the present model. The non-mission-affecting failures can be thought of as failures of components or systems with built in redundancy. They could degrade, but possibly not completely eliminate the operational performance of the helicopter since the helicopter would not be forced to abandon its mission. The non-mission-affecting failures would increase the amount of time spent in the repair system,

as these failures should be repaired prior to sending a helicopter on its next mission. The impact of non-mission-affecting failures can be included later, but the mission-degrading tendency should be followed during OT&E.

The mission of the helicopters is to maintain continuous coverage on a Named Area of Interest for a 2 or 3 week period. This is an exceptionally long period of time to attempt to maintain continuous coverage. During that time, the NAI may have lost its significance or even been destroyed, at which point, coverage would no longer be necessary. The model makes the assumption that the NAI is significant and coverage needs to be maintained for the entire time period. If this is not the case, as is typical, the reader can assume that other Named Areas of Interest have been selected that are located at roughly the same distance and flying time from the helicopter's home base, and that coverage of these is the scouting mission.

The base unit of time in the simulation model is the hour. All time measurements are reflected in hours and each day is 24 hours long. The MOEs used, the mean percent coverage of the NAI per day and the mean number of helicopters surviving at the end of each day, have each incorporated the events of the previous 24 hour time-period for which it is reporting data.

IV. MODELS IN WHICH THE TIMES BETWEEN MISSION-AFFECTING FAILURES ARE INDEPENDENT HAVING A WEIBULL DISTRIBUTION

The Weibull distribution may be used to model the random times between mission effecting failures. This distribution is very versatile and useful for a wide range of applications related to system or component failures. The Weibull distribution is specified with shape and scale parameters (always greater than zero) that implicitly define the mean and variance for the distribution. It is generally used to represent time-stable random times between failures of a component or system; such a model does not represent wear-out or aging (this is done next). The Weibull distribution is used for that purpose in this thesis. All values generated by the distribution are greater than zero and the simplest, and most recognized Weibull distribution is that with a shape parameter of one. The mean for this distribution is equal to the scale parameter and the distribution is more commonly referred to as the exponential distribution. The versatility of a Weibull distribution is realized by changing the shape parameter in order to obtain different behaviors by the random numbers generated from the distribution. With a shape parameter less than one, the Weibull distribution generates many small, but positive, values, balanced by some that are quite long to obtain a required mean. This type of behavior is referred to as *infant failure* since many short failure times are generated.

Setting the shape parameter greater than one will result in a distribution centered about the value of the scale parameter. This type of behavior is referred to as *wear-out*

since few short failure times are generated with many longer failure times generated near the mean of the distribution.

The MOEs displayed in this chapter are the mean percent coverage per day of the NAI and the mean number of helicopter surviving at the end of each day. The 25th, 50th, and 75th percentiles for each of the MOEs appear in Appendix B. Appendix B also displays for a campaign the mean number of MAF, mean number of fatal failures, and mean number of helicopters shot down. The mean repair and turnaround time, mean number of missions started, probability of returning to base safely, mean time spent in the high threat regions, mean survival time of individual helicopters, and the mean number of helicopters in the repair system for each campaign are also displayed in Appendix B.

A. SENSITIVITY ANALYSIS OF WEIBULL SHAPES

The shape of the Weibull distribution, used to model the mean time between mission-affecting failures, determines the type of behavior that the failures will exhibit. Using the same mean time between mission-affecting failures (MTBMAF), this section examines the effects of different shapes of the Weibull distribution on MOEs. The cases chosen for comparison are shown below in Table 1.

	Shape	Scale	Mean
Case I	0.5	4.25	8.5 Hours
Case II	1.0	8.5	8.5 Hours
Case III	2.0	9.591223	8.5 Hours

Table 1. Description of Weibull Cases.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the varying Weibull distribution shapes on the mean percent coverage per day of the NAI as well as the mean number of helicopters surviving at the end of each day. Figure 3, Figure 4, and Figure 5 graphically show how the mean percent coverage varied per day as well as the mean number of helicopters remaining at the end of each day. The vertical bars display the mean percent coverage per day of the NAI with the values located on the left vertical axis. The line graph displays the mean number of helicopters that are still alive at the end of each day with the values located on the right vertical axis. The error bars are set at plus and minus one standard error to indicate the variability of the simulation results.

The results show that as the shape of the Weibull distribution increases (the behavior shifts from infant failure to wear-out) the mean number of failures decreases. A significant difference in the mean percent coverage of the NAI and the mean number of

helicopters surviving is shown for the first two days of the campaign. This large difference in mean percent coverage of the NAI is a direct result of the shape of the Weibull distribution. For the case using a shape parameter of 0.5, the helicopters experience infant failures that prevent many of the helicopters from completing their assigned mission. This then results in less coverage of the NAI. The higher number of infant failures also accounts for the lower mean number of helicopters surviving. With more mission-affecting failures occurring initially, more of these failures will result in the helicopters crashing and thus decreasing the mean number of helicopters surviving. As the campaign continues, the wear-out mission-affecting failures for Case III begin to take their toll on the helicopters so that by the end of the campaign there is very little difference in the mean percent of coverage or the mean number of helicopters surviving compared to the other cases. This emphasizes the fact that the type of failures experienced (in part, the shape of the time-to-failure distribution) is just as important as the mean time between mission-affecting failures. Note that all numbers given are notional and illustrative only, but the results point to effects to become aware of during OT&E.

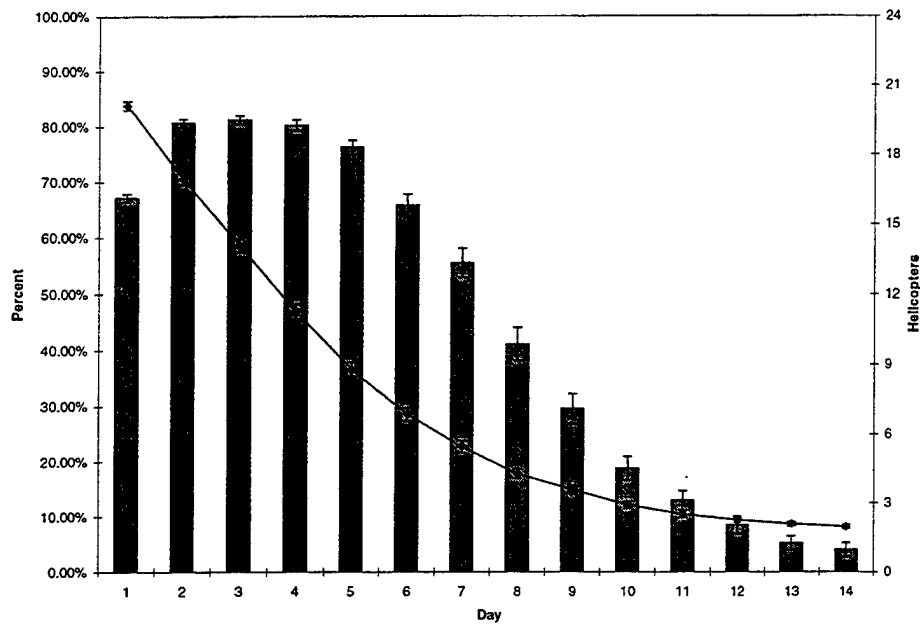


Figure 3. MOEs for a Weibull Distribution with a Shape of 0.5. Case I from Table 1 that shows the effects of a Weibull distribution with a shape parameter of 0.5 and a MTBMAF of 8.5 hours on the mean percent coverage and the mean number of surviving helicopters.

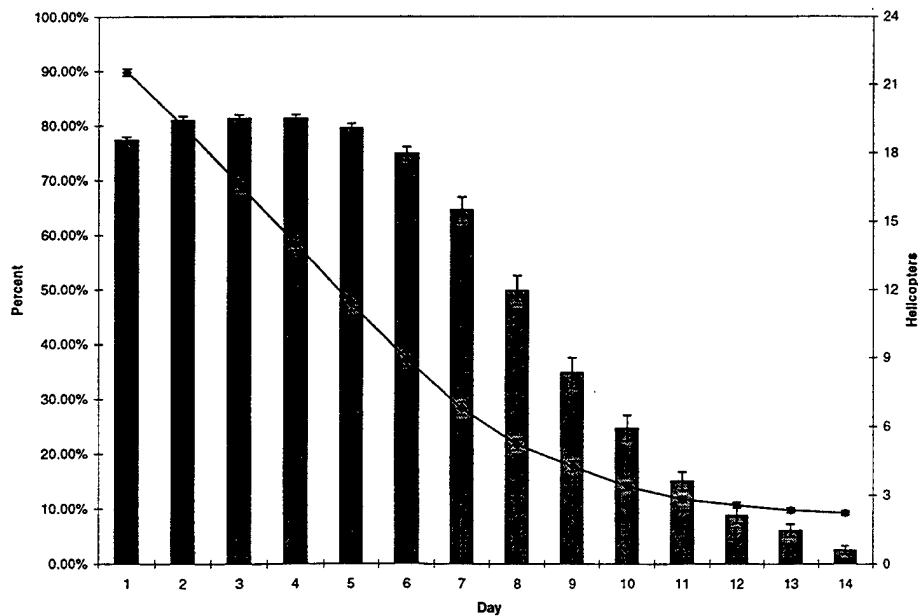


Figure 4. MOEs for a Weibull Distribution with a Shape of 1.0. Case II from Table 1 that shows the effects of a Weibull distribution with a shape parameter of 1.0 and a MTBMAF of 8.5 hours on the mean percent coverage and the mean number of surviving helicopters.

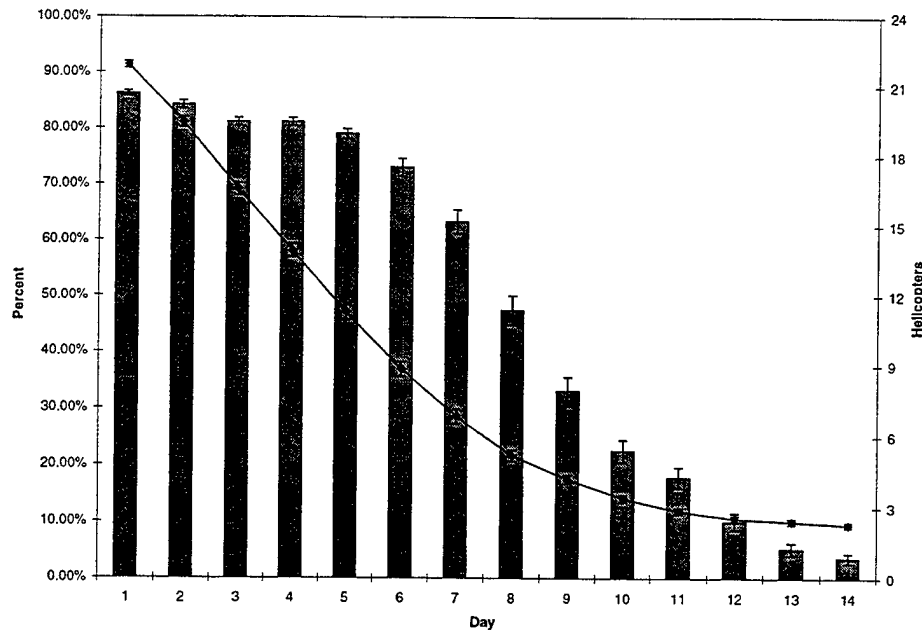


Figure 5. MOEs for a Weibull Distribution with a Shape of 2.0. Case III from Table 1 that shows the effects of a Weibull distribution with a shape parameter of 2.0 and a MTBMAF of 8.5 hours on the mean percent coverage and the mean number of surviving helicopters.

B. SENSITIVITY ANALYSIS FOR VULNERABILITY PARAMETERS

The vulnerability of the helicopters is modeled as an exponential random variable representing the mean time until a helicopter is shot down when in particular regions.

The cases chosen for comparison are shown below in Table 2.

	Mean Time until a Helicopter is Shot Down while in a Low Vulnerability Region	Mean Time until a Helicopter is Shot Down while in a High Vulnerability Region
Case I	320 Hours	160 Hours
Case II	160 Hours	80 Hours
Case III	80 Hours	40 Hours

Table 2. Description of Vulnerability Cases for a Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	8.5	Mean Time Between Mission-Affecting Failures (hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a three-week campaign to observe the effects of the varying vulnerability rates on the mean percent coverage per day of the NAI as well as the mean number of helicopters surviving at the end of each day. Figure 6, Figure 7, and Figure 8 show how the mean coverage varied per day over the three-week period as well as the mean number of remaining helicopters at the end of each day. The results support what would be expected. As the vulnerability increases, the ability of the helicopters to maintain coverage decreases, along with the mean number of surviving helicopters for each day. With the low vulnerability rate, the helicopters are nearly able to maintain mean coverage of the NAI above 50% for almost two weeks. With the medium vulnerability rate, the helicopters can no longer maintain mean coverage of the NAI above 50% after ten days. With the high vulnerability rate, the helicopters are only able to maintain mean coverage above 50% for seven days. This emphasizes the fact that sufficient helicopters are necessary to sustain a prolonged operation, or that operational action by Blue is essential to successfully suppress enemy

(Red) defensive actions. It also informs T&E decision-makers that the vulnerability of the helicopters is a significant issue that dramatically affects the MOEs and needs to be carefully and thoroughly considered during operational field-testing.

As the vulnerability increases, the rate of decrease in the number of helicopters surviving increases as the time progresses since fewer helicopters are available to perform the mission. This causes the remaining helicopters to fly more missions and reach their scheduled maintenance flight hour limit sooner than normal. The helicopters are then temporarily no longer flying, but rather waiting in the scheduled maintenance queue. This pattern will continue unless the scheduled maintenance duration (overhaul time) is deliberately shortened or eliminated. In that case, the increasing occurrence of random failures will rapidly degrade coverage of the NAI.

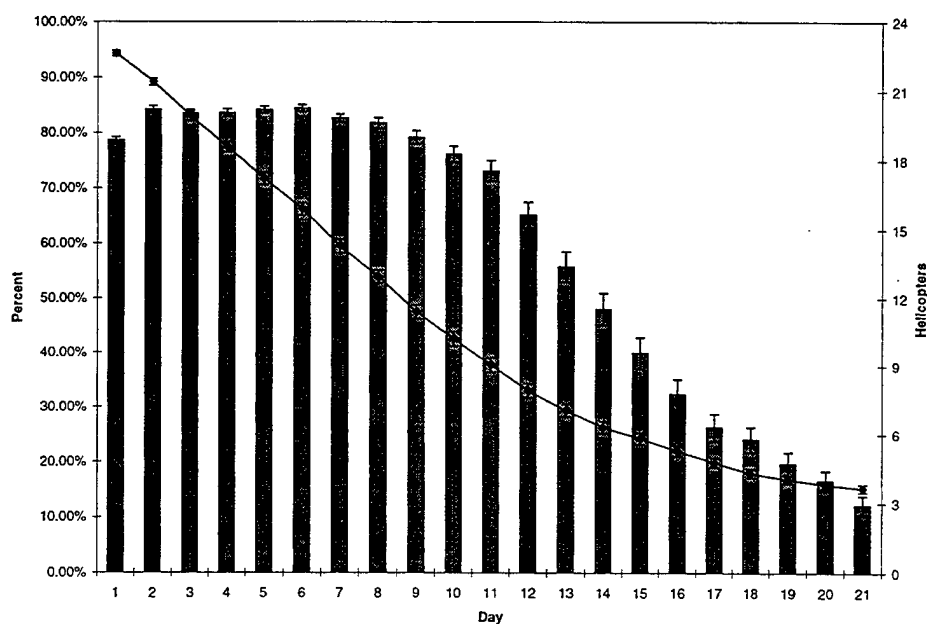


Figure 6. MOEs with Low Vulnerability for a Model with Exponential Times between Failures. Case I from Table 2 showing the effects of a low vulnerability rate on the mean percent coverage and the mean number of surviving helicopters.

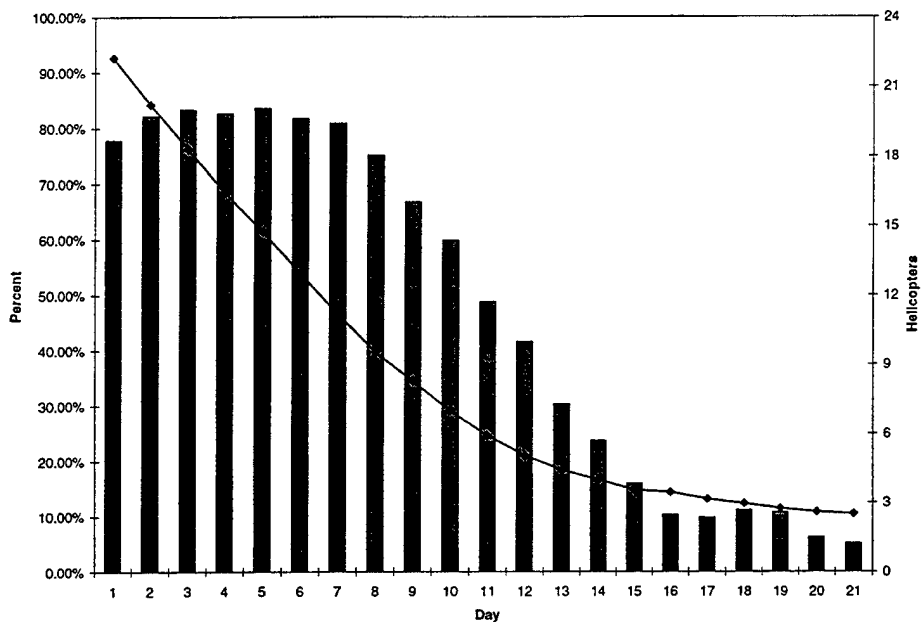


Figure 7. MOEs with Medium Vulnerability for a Model with Exponential Times between Failures. Case II from Table 2 showing the effects of a medium vulnerability rate on the mean percent coverage and the mean number of helicopters surviving.

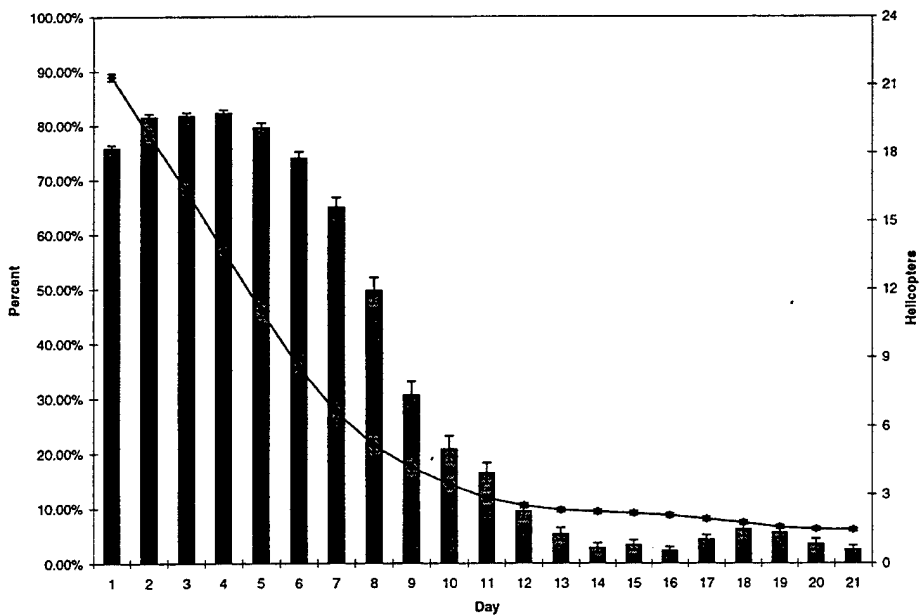


Figure 8. MOEs with High Vulnerability for a Model with Exponential Times between Failures. Case III from Table 2 showing the effects of a high vulnerability rate on the percent coverage and the number of helicopters surviving.

C. SENSITIVITY ANALYSIS FOR TIME BETWEEN SCHEDULED MAINTENANCE ACTIONS

The time between scheduled maintenance actions is the number of flight hours, T_S , which a helicopter accumulates before being overhauled. Recall the initial flight hours for each helicopter are staggered to allow a sequential progression of helicopters into the scheduled maintenance facility. As the time between scheduled maintenance actions is adjusted, so too is the staggering of the individual helicopter's flight hours. For each case examined, the initial stagger between each helicopter's flight hours is the time between scheduled maintenance actions divided by the number of helicopters. The cases chosen for comparison are shown below in Table 3.

	Time between Scheduled Maintenance Actions
Case I	300 Hours
Case II	400 Hours
Case III	500 Hours

Table 3. Description of Different Maintenance Policies for a Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different maintenance policies on the MOEs. Figure 9, Figure 10, and Figure 11 show the results of the varying maintenance policies. The only significant differences between the cases are between the 300-hour and 500-hour maintenance policies about halfway through the campaign. The longer time between maintenance actions allows for a slightly higher mean percentage of coverage for the 7th, 8th and 9th days. This results from the helicopters flying more missions before reaching their flight hour limit for scheduled maintenance. By being able to continue flying for longer periods of time, the helicopters are able to maintain a higher mean percent coverage of the NAI. This ability to continue flying longer is also detrimental to the helicopters. While the helicopters are flying, they are still experiencing failures, some of which are fatal, as well as being subjected to enemy fires. This additional flight time causes the loss of more helicopters and hence the longer maintenance policy ends the

campaign with fewer helicopters than the shorter maintenance policies. The shorter maintenance policies force the helicopters to reach their flight hour limit for scheduled maintenance sooner and are forced to end the campaign on the ground waiting for scheduled maintenance. The establishment of an intelligently adaptable maintenance schedule is an open problem.

In the model as implemented, the rate at which helicopters are killed dominates all other factors. This dominant effect may be masking other outcomes of interest. Keeping this in mind, the results attributed to the change in maintenance policies may be more pronounced or significant for a lower vulnerability rate. Effort spent decreasing the attrition rate should be well rewarded.

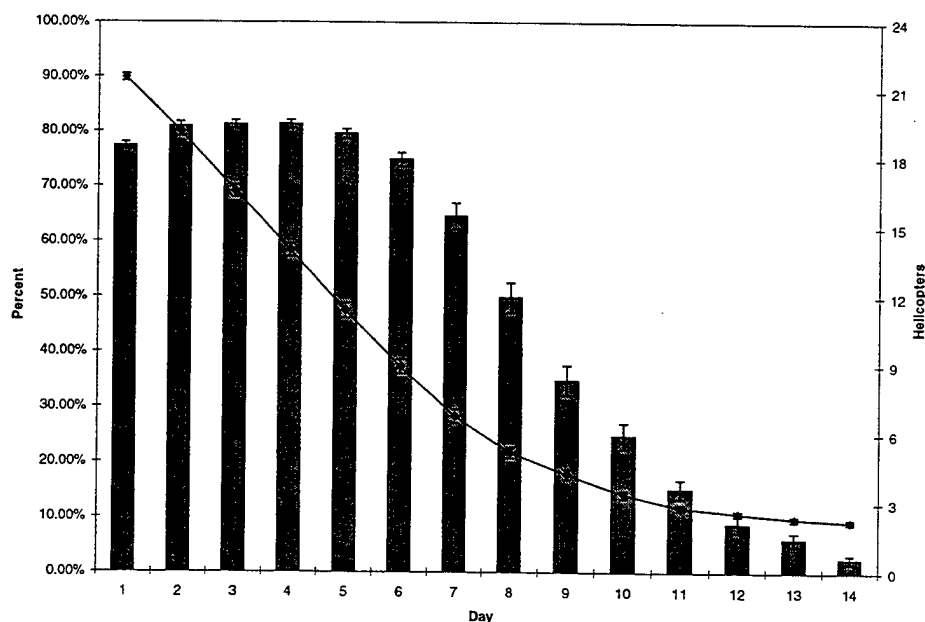


Figure 9. MOEs for 300-hour Maintenance Policy for Model with Exponential Time between Failures. Case I from Table 3 that shows the effects of 300 hours between scheduled maintenance activities on the mean percent coverage and the mean number of helicopters surviving.

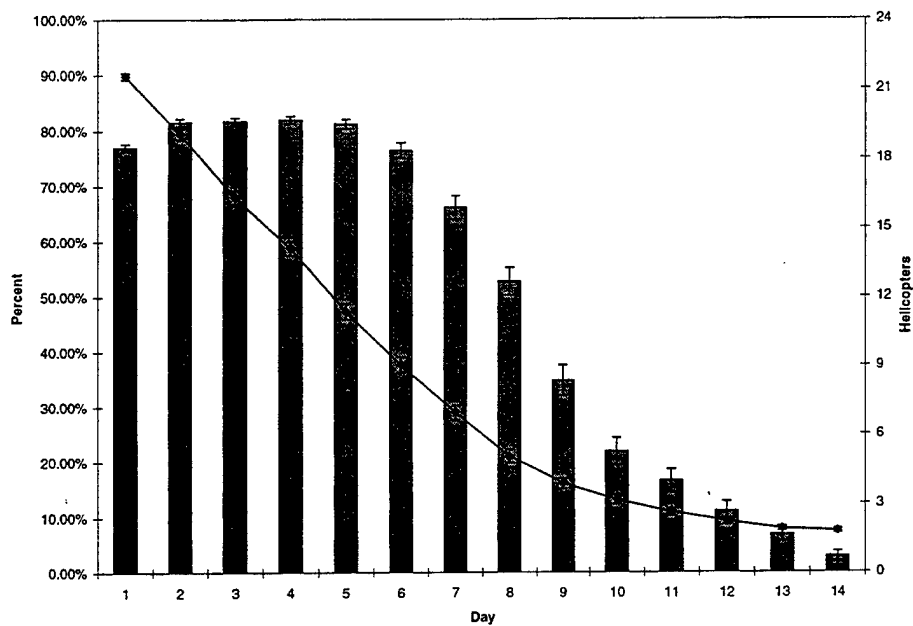


Figure 10. MOEs for 400-Hour Maintenance Policy for Model with Exponential Time between Failures. Case II from Table 3 that shows the effects of 400 hours between scheduled maintenance activities on the mean percent coverage and the mean number of helicopters surviving.

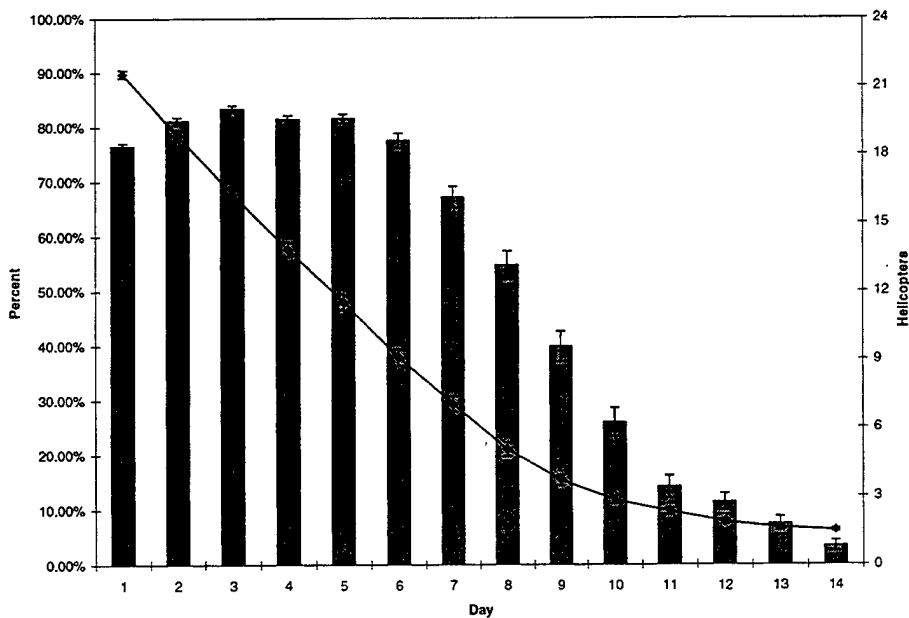


Figure 11. MOEs for 500-Hour Maintenance Policy for Model with Exponential Times between Failures. Case III from Table 3 that shows the effects of 500 hours between scheduled maintenance activities on the mean percent coverage and the mean number of helicopters surviving.

D. SENSITIVITY ANALYSIS FOR MEAN TIMES BETWEEN MISSION-AFFECTING FAILURES

This section examines the effect that different mean times between mission-affecting failures have on the MOEs. The cases chosen for comparison are shown below in Table 4.

	Shape	Scale	Mean Time between Mission-Affecting Failures
Case I	1.0	4.25	4.25 Hours
Case II	1.0	8.5	8.5 Hours
Case III	1.0	17.0	17.0 Hours

Table 4. Description of MTBMAF for Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different MTBMAF on the MOEs. Figure 12, Figure 13, and Figure 14 show the results for each of the different MTBMAF. The mean time between mission-affecting failures has a significant effect on both the mean percent coverage of

the NAI per day and the mean number of helicopters surviving at the end of each day. As the MTBMAF increases, on the average fewer failures are experienced during the campaign, which results in several areas of performance in the system improving. With fewer failures, more helicopters are able to successfully complete an entire mission without having to return to home base for repairs. This results in more and longer times on station for each helicopter pair, thus improving the mean percent coverage of the Named Area of Interest. However, more helicopters are subject to enemy action. The diminished mean number of failures also results in less time being spent in the repair facility and more helicopters being available to perform the assigned mission. Also as fewer failures are experienced, fewer crashes (modeled as 10% of the number of MAF) occur. This results in a lower total attrition rate for the helicopters during the campaign and significantly more helicopters surviving at the end of each day. Thus, the MTBMAF needs to be well estimated during actual field-testing, along with the shape of the time to failure. Note that the MTBMAF may well decrease during testing if failure modes are discovered and rectified.

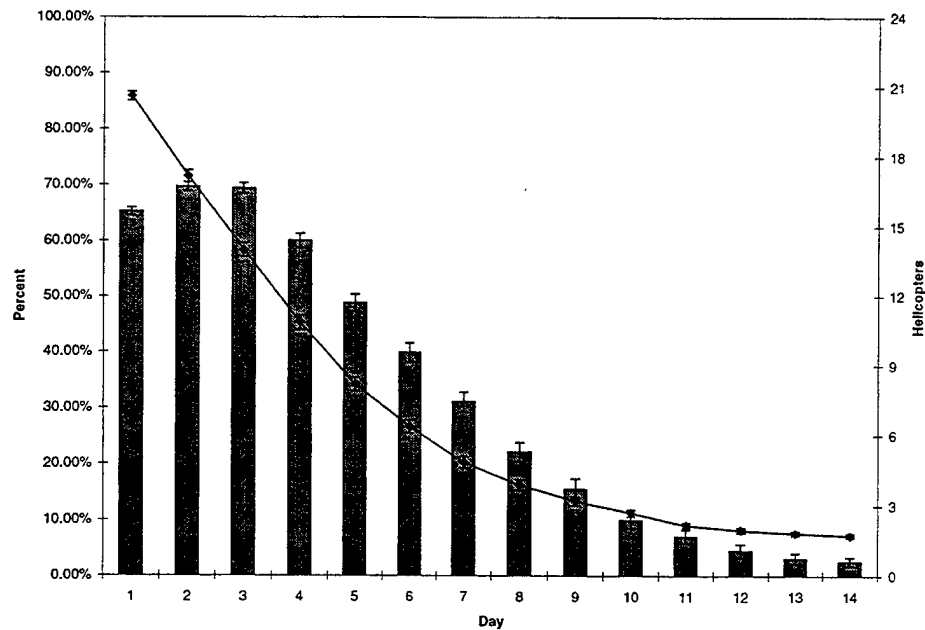


Figure 12. MOEs with MTBMAF equal to 4.25 Hours for Model with Exponential Times between Failures. Case I from Table 4 that shows the effect with a MTBMAF equal to 4.25 hours on the mean percent coverage and the mean number of helicopters surviving.

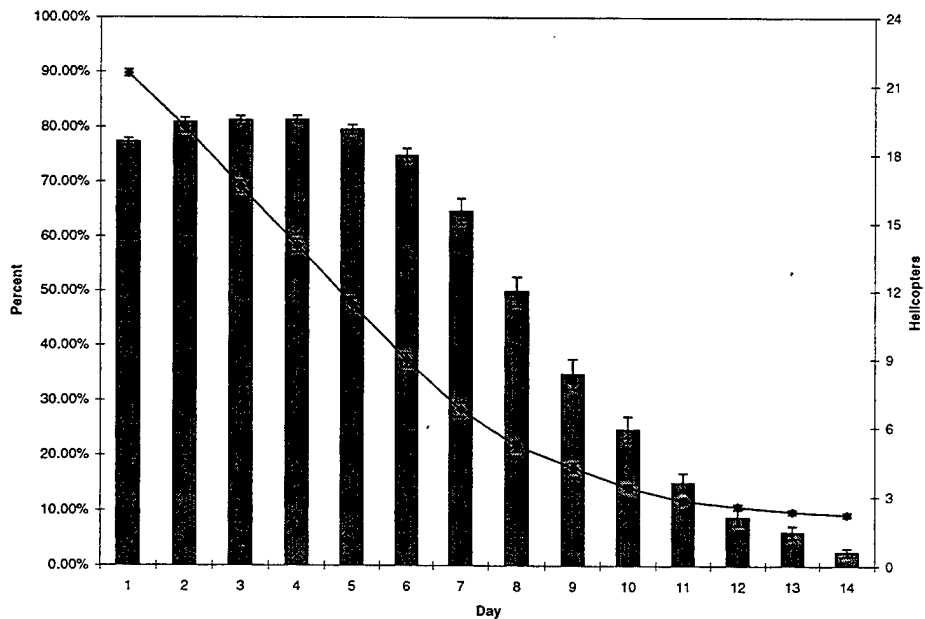


Figure 13. MOEs with MTBMAF equal to 8.5 Hours for Model with Exponential Times between Failures. Case II from Table 4 that shows the effect with MTBMAF equal to 8.5 hours on the mean percent coverage and the mean number of helicopters surviving.

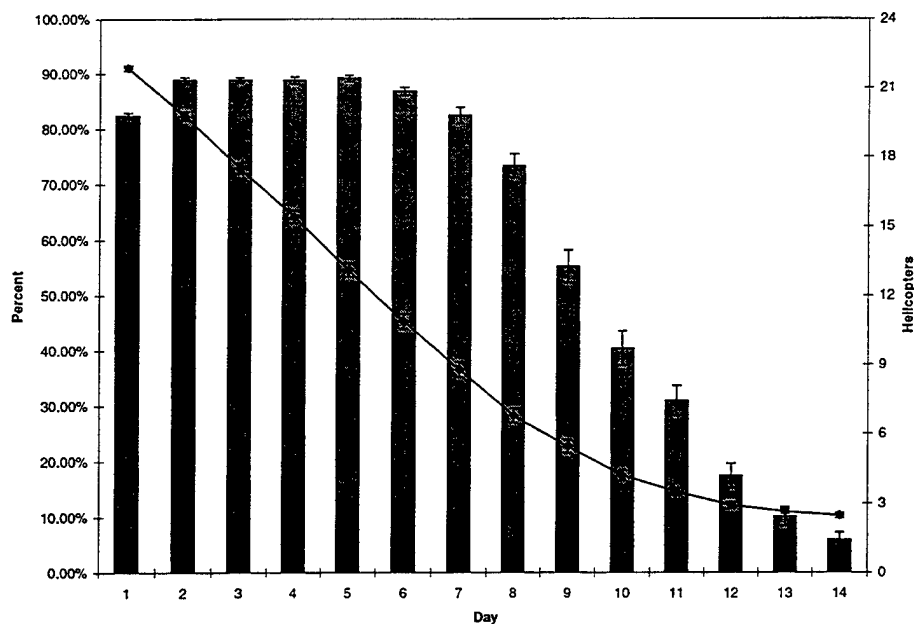


Figure 14. MOEs with MTBMAF equal to 17.0 Hours for Model with Exponential Times between Failures. Case III from Table 4 that shows the effect with MTBMAF equal to 17.0 hours on the mean percent coverage and the mean number of helicopters surviving.

E. SENSITIVITY ANALYSIS OF OVERHAUL TIMES

The overhaul time is that amount of time needed to complete scheduled maintenance on a helicopter and return it to service. It is being modeled with a uniform distribution that specifies the minimum and maximum times to complete the scheduled maintenance. This section examines the effects of different overhaul times on the MOEs. The cases selected for comparison are listed below in Table 5.

	Minimum Overhaul Time	Maximum Overhaul Time
Case I	48 Hours	96 Hours
Case II	96 Hours	144 Hours
Case III	144 Hours	192 Hours

Table 5. Description of Overhaul Times for Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (8.5 hours)
⇒	1.0	Shape for MTBMAF
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different overhaul times on the MOEs. In each case, one scheduled maintenance facility was available for overhaul. There is also a separate facility to repair MAF and turn around helicopters. Figure 15, Figure 16, and Figure 17 show the results for the different overhaul times. The effect of the different overhaul times begins to show up after four days. The longer overhaul times result in fewer helicopters being available once they reach their flight hour limit since they are now sitting on the ground waiting for the maintenance facility to begin the overhaul. This results in fewer helicopters flying the assigned mission until each of their flight hour limits is reached, and thus less coverage of the NAI being provided. The longer overhaul times do result in more helicopters surviving at the end of the campaign. This is once again due to the helicopters being backed up in the maintenance facility, fewer helicopters flying missions, and thus fewer helicopter crashes and attrition.

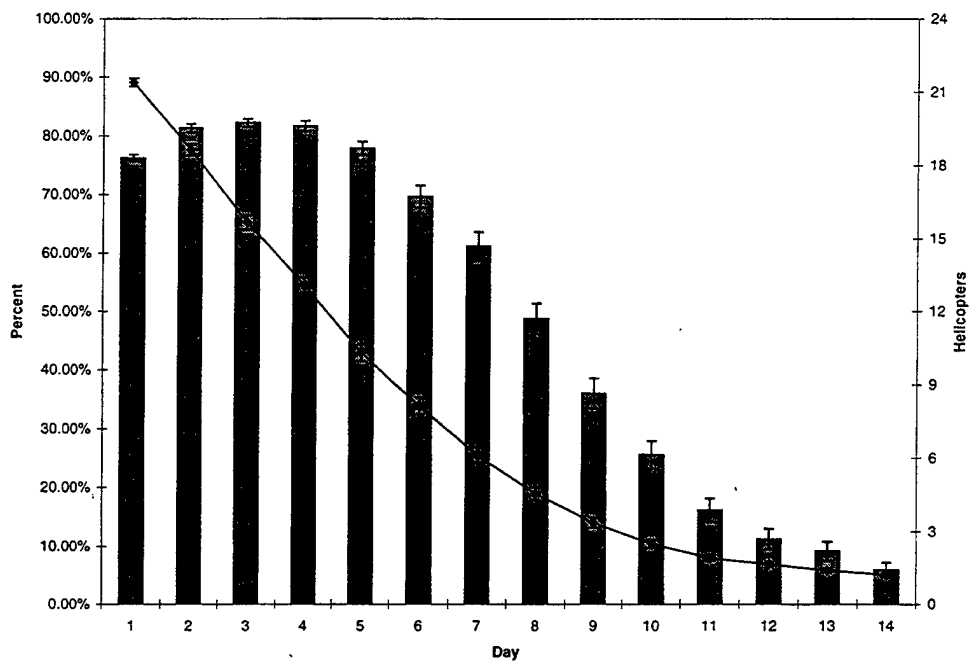


Figure 15. MOEs with Short Overhaul Times for Model with Exponential Times between Failures. Case I from Table 5 that shows the effects of a short overhaul time on the mean percent coverage and the mean number of helicopters surviving.

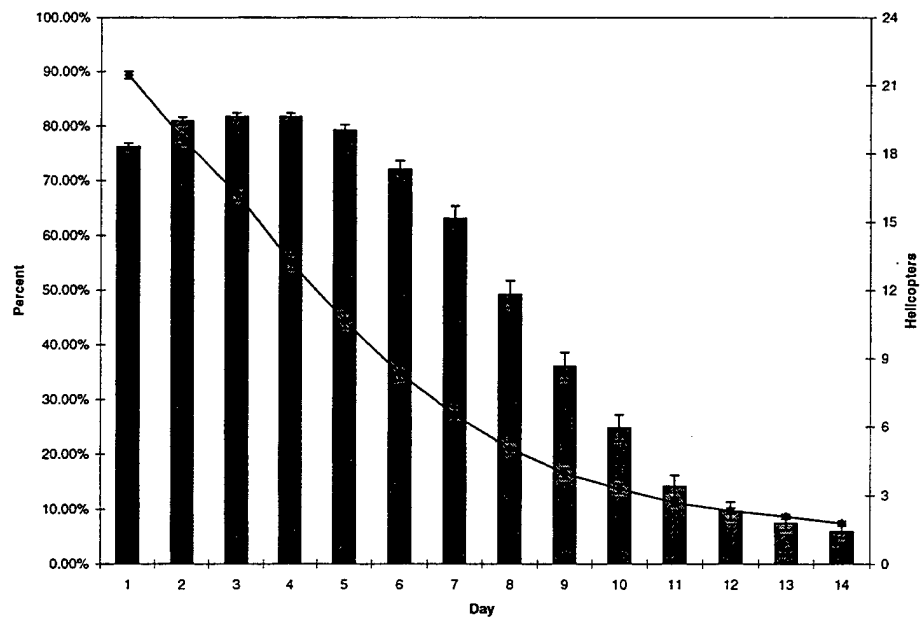


Figure 16. MOEs with Medium Overhaul Times for Model with Exponential Times between failures. Case II from Table 5 that shows the effects of a medium overhaul time on the mean percent coverage and the mean number of helicopters surviving.

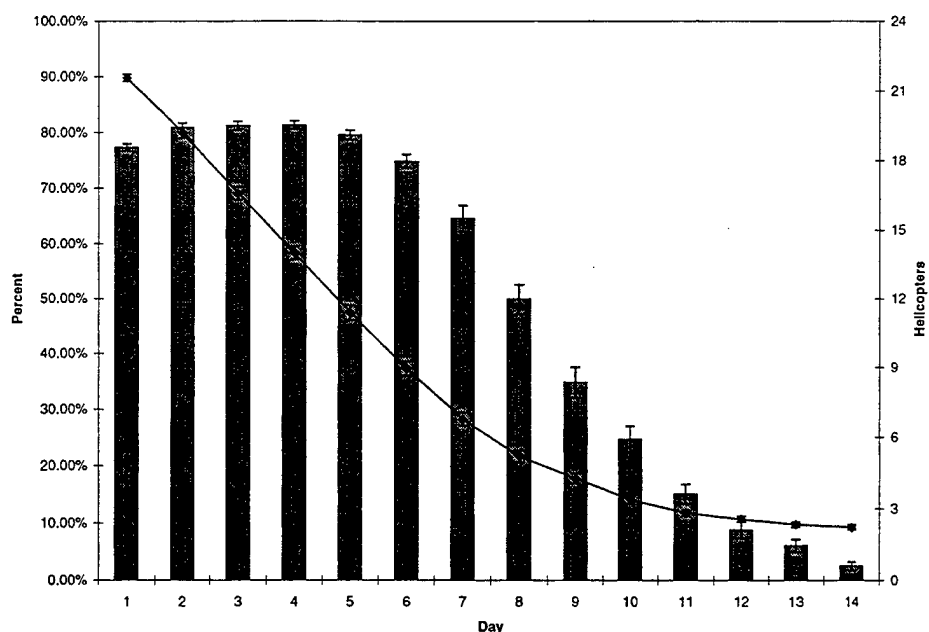


Figure 17. MOEs with Long Overhaul Times for Model with Exponential Times between Failures. Case III from Table 5 that shows the effects of long overhaul times on the mean percent coverage and the mean number of helicopters surviving.

F. SENSITIVITY ANALYSIS ON THE NUMBER OF SCHEDULED MAINTENANCE FACILITIES

This section examines the effect that different numbers of scheduled maintenance facilities have on the MOEs. Recall from Chapter 3, Section D on page 19 that the maintenance facility is utilized exclusively for scheduled overhaul maintenance. The cases chosen for consideration are shown below in Table 6.

	Number of Scheduled Maintenance Facilities
Case I	1
Case II	2
Case III	4

Table 6. Description of the Number of Scheduled Maintenance Facilities for Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (8.5 hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different number of scheduled maintenance facilities on the MOEs. Figure 18, Figure 19, and Figure 20 show the results for each of the different cases. The results show that as the number of scheduled maintenance facilities increases, the helicopters are able to maintain a higher mean percentage of coverage later in the campaign. In the short term, the number of maintenance facilities has very little effect. As time progresses and more helicopters are sent in for overhaul, the number of scheduled maintenance facilities has a large impact. On the last day of the campaign, mean coverage more than doubled from 2.5% with one scheduled maintenance facility to over 8% percent for just one additional facility and to better than 10% with an additional three facilities. This does take a toll on the number of helicopters remaining at the end of the campaign since fewer helicopters will be waiting in the maintenance facilities and

more are returned to conduct the assigned mission in a timely manner. These helicopters are once again subjected to attrition from enemy action and can also crash.

If these effects are to be seen during actual testing, the tests will need to be of longer duration, and tests cannot be conducted with helicopters that have all just completed an overhaul. The helicopters used in the operational tests should be similar to those used in the field, which have staggered flight hours to facilitate staggered overhauls.

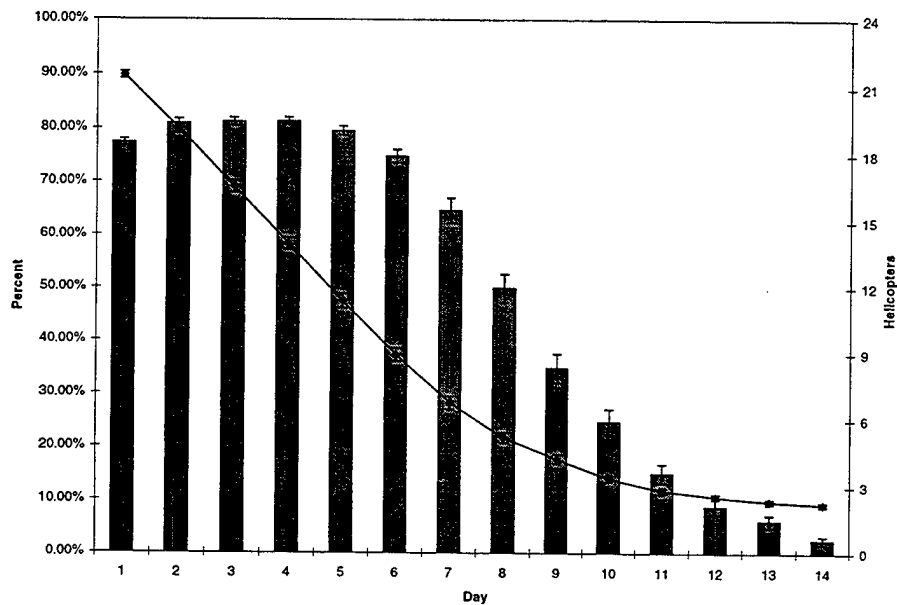


Figure 18. MOEs with One Scheduled Maintenance Facility for Model with Exponential Times between Failures. Case I from Table 6 that shows the effects of one scheduled maintenance facility on the mean percent coverage and the number of helicopters surviving.

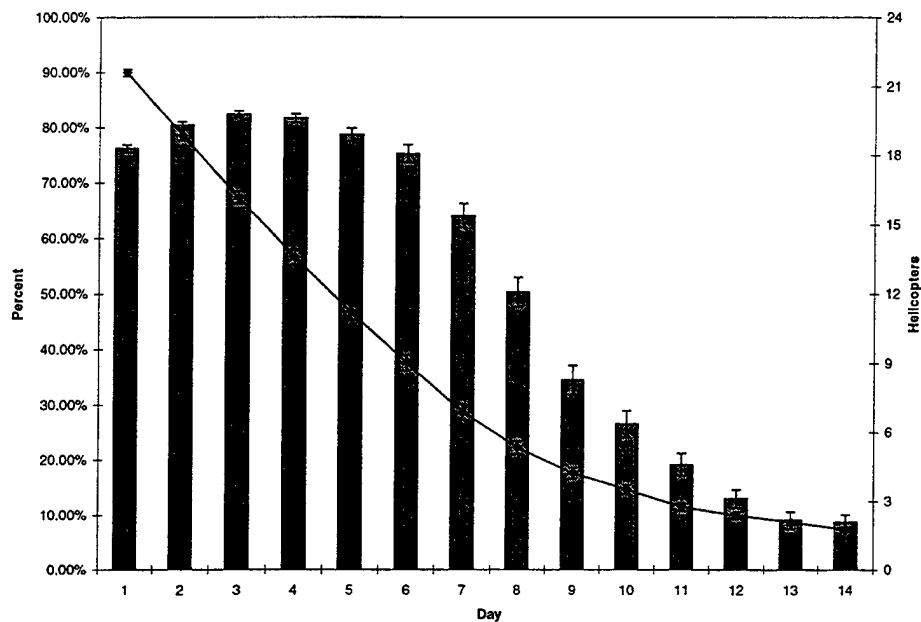


Figure 19. MOEs with Two Scheduled Maintenance Facilities for Model with Exponential Times between Failures. Case II from Table 6 that shows the effects of two scheduled maintenance facilities on the mean percent coverage and the number of helicopters surviving.

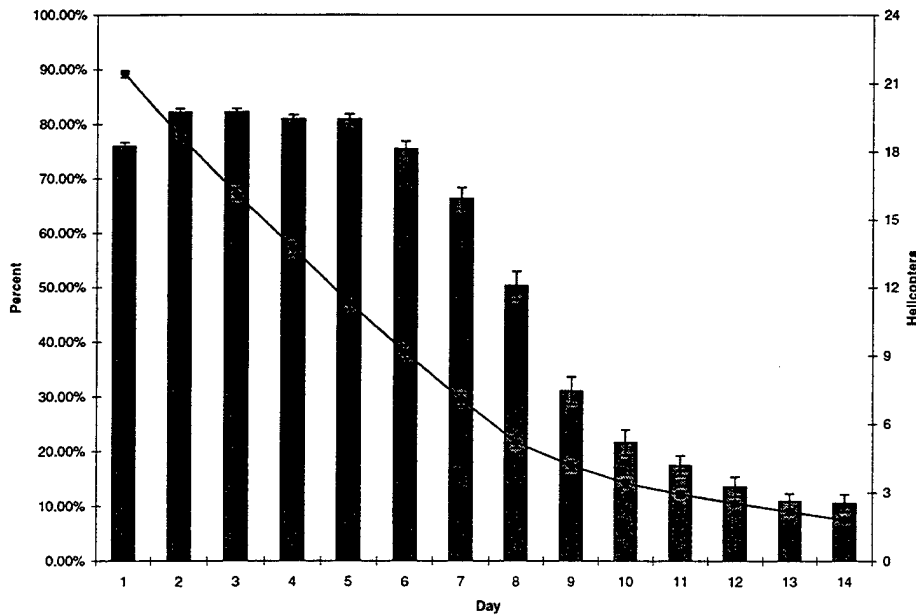


Figure 20. MOEs with Four Scheduled Maintenance Facilities for Model with Exponential Times between Failures. Case III from Table 6 that shows the effects of four scheduled maintenance facilities on the mean percent coverage and the mean number of helicopters surviving.

G. SENSITIVITY ANALYSIS FOR THE NUMBER OF REPAIR FACILITIES

This section examines the effect that different numbers of repair facilities have on the MOEs. Recall from Chapter 3, Section D on page 19 that the repair facility is used exclusively for repair of random mission-affecting failures and helicopter rearming and refueling. The repair facilities operate on the basis of priority maintenance in which the helicopter in the repair facility with the shortest repair time will be serviced first. The cases selected are shown below in **Table 7**.

	Number of Repair Facilities
Case I	1
Case II	2
Case III	4

Table 7. Description of the Number of Repair Facilities for Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different number of repair facilities on the MOEs. Figure 21, Figure 22, and Figure 23 show the results for each of the different numbers. The results show that the number of repair facilities has little effect on either of the MOEs. This is the result of there being a sufficient number of helicopters at the beginning of the campaign to overcome any delays in the repair facilities. Even if the single repair facility case has a queue of helicopters, it is able to complete the repairs before the repair backlog causes a detrimental problem.

The reader is cautioned that for the parameters chosen for these cases, the repair facilities were never challenged. For the 3 cases observed, the mean number of non-fatal mission-affecting failures experienced per campaign was 72.42. This means that on average there were approximately 5.17 MAF that needed to be repaired per day. Using the mean time to repair of 1.0 hours, the repair facility was busy repairing a mission-affecting failure on average just over 5 hours per day. The average time needed to rearm and refuel all 24 helicopters using a mean turnaround time of 0.25 hours is 6 hours. Even if all 24 helicopters need to be reamed and refueled on any given day, the average time that the repair facility is busy is just over 11 hours per day.

The cases analyzed are far from stretching the limits of one repair facility, let alone two or four. More analysis needs to be done in this area by looking at longer repair times, fewer helicopters, or a completely different distribution for the repair times. In these cases reduction in force size of one or two helicopters being in the repair facility may dramatically affect the MOEs.

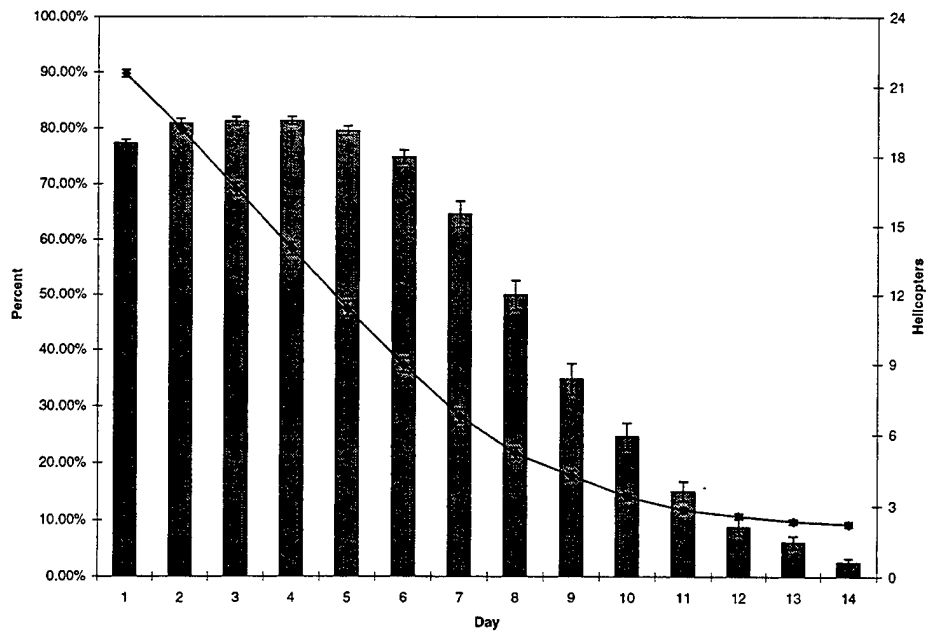


Figure 21. MOEs with a Single Repair Facility for Model with Exponential Times between Failures. Case I from Table 7 that shows the effects of a single repair facility on the mean percent coverage and the mean number of helicopters surviving.

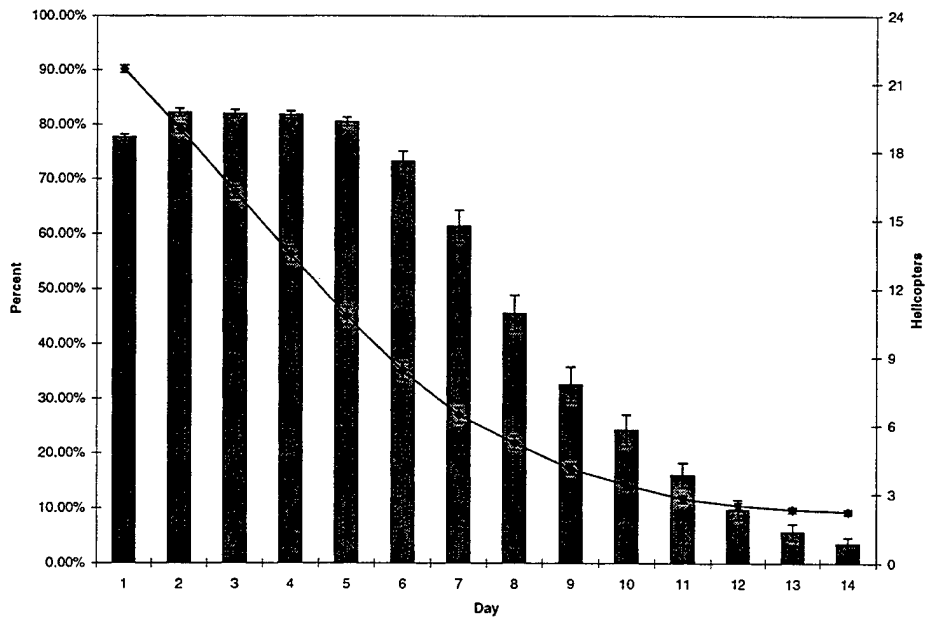


Figure 22. MOEs with Two Repair Facilities for Model with Exponential Times between Failures. Case II from Table 7 that shows the effects of two repair facilities on the mean percent coverage and the mean number of helicopters surviving.

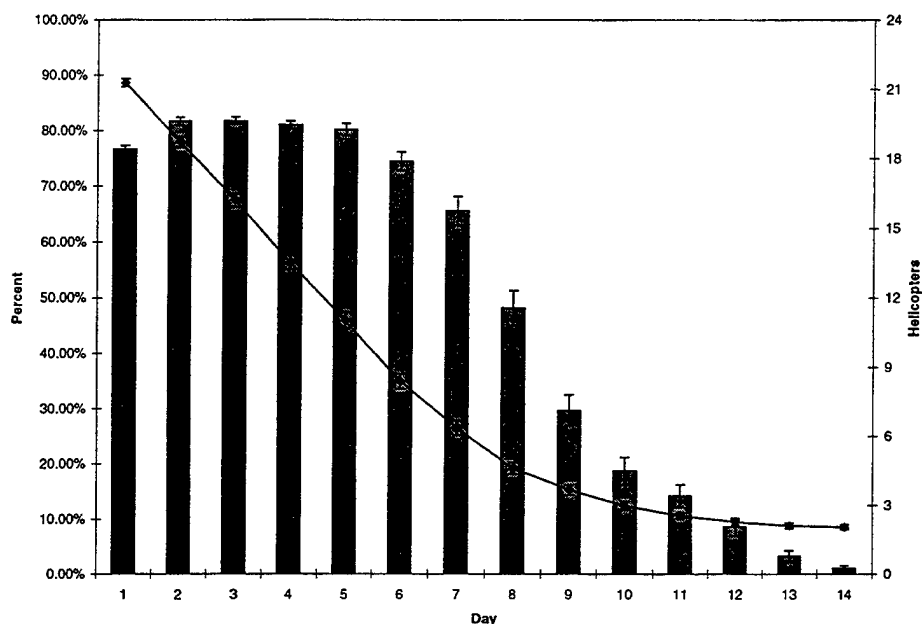


Figure 23. MOEs with Four Repair Facilities for Model with Exponential Times between Failures. Case III from Table 7 that shows the effects of four repair facilities on the mean percent coverage and the mean number of helicopters surviving.

H. SENSITIVITY ANALYSIS FOR PRIORITY MAINTENANCE

Priority maintenance is the maintenance policy of determining the helicopter in the repair queue with the shortest repair time and conducting repairs on this helicopter first. If the priority maintenance policy is not in effect, the repair system operates on a first-come, first-served, basis. This section examines the effects of the two different maintenance policies on the MOEs. The cases chosen for consideration are shown below in Table 8.

	Priority Maintenance
Case I	TRUE
Case II	FALSE

Table 8. Description of Priority Maintenance Policies for Model with Exponential Times between Failures.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	2	Scheduled Maintenance Facilities
⇒	2	Repair Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	1	Shape of Weibull Distribution Modeling MAF
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different maintenance policies on the MOEs. Figure 47 and Figure 48 show the results for each of the different policies. As expected from the previous section, there is very little difference between the results for the two different maintenance policies. The mean numbers of surviving helicopters are comparable throughout the campaign, as is the mean percent coverage per day of the NAI. There is essentially no difference between the two policies as far as the two observed MOEs are concerned since the repair facilities are not saturated.

As previously discussed in Section G on page 46 the cases analyzed do not test the repair facilities to its limits. Here again the repair facility spends on average just over 5 hours per day performing repairs. In order to see the effects of priority maintenance, the repair facility must first be tested near its limits. This can be accomplished by increasing

the number of failures or by increasing the average amount of time necessary to complete a repair of a mission-affecting failure.

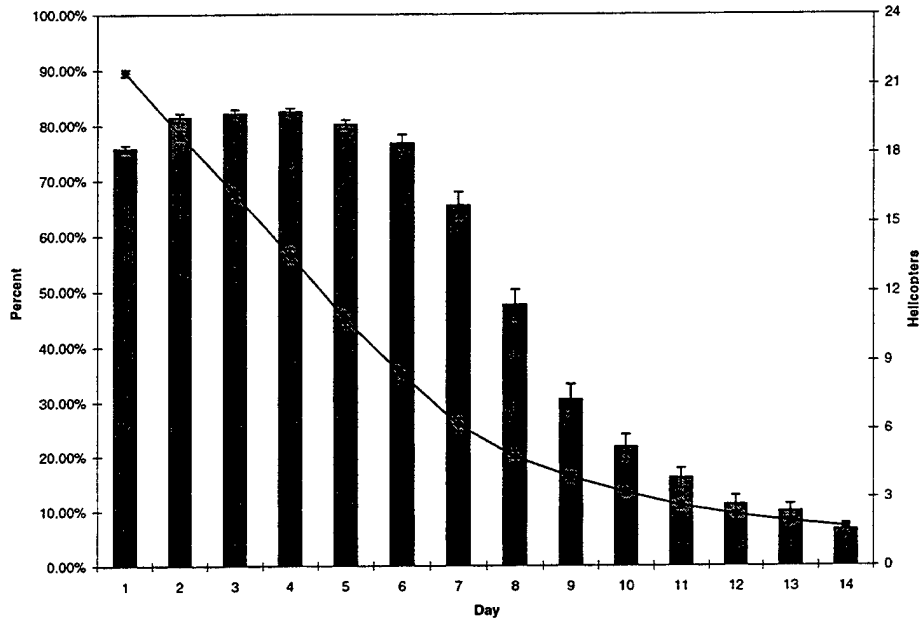


Figure 24. MOEs with Priority Maintenance for Model with Exponential Times between Failures. Case I from Table 8 that shows the effects of priority maintenance on the mean percent coverage and the mean number of helicopters surviving.

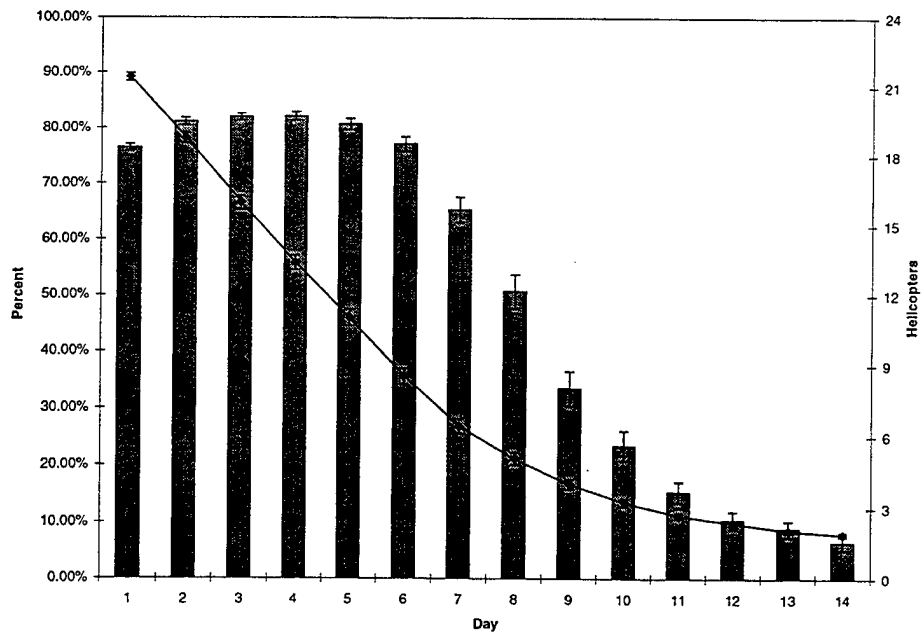


Figure 25. MOEs with First-Come, First-Served, Maintenance for Model with Exponential Times between Failures. Case II from Table 8 that shows the effects of non-priority maintenance on the mean percent coverage and the number of helicopters surviving.

I. SUMMARY OF ANALYSIS FOR THE WEIBULL DISTRIBUTION

This chapter focused on the behavior of the MOEs when the Weibull distribution was used as the underlying distribution for the mean time between mission-affecting failures. The dominant sensitivities, as determined by the simulation, were the vulnerability rates for each region, the mean time between mission-affecting failures, and *the shape of the distribution*. The shape of the distribution can be thought of as representing the type of failures (“infant mortality” or “wearout” or other) that tend to occur. This indicates that the types of failures experienced are just as important as the mean time between mission-affecting failures. The vulnerability rates for each area had a large effect on the MOEs. This indicates that the vulnerability of the helicopter must be

analyzed to minimize its effects on mission accomplishment. Vulnerability can possibly be managed by tactics. Loss of sensor capability may well increase vulnerability.

V. MODELING SYSTEM AGING AND SCHEDULED MAINTENANCE

In this chapter a non-homogeneous increasing-rate Poisson process is used to model the rate of occurrence of mission-affecting failures (MAF) when *aging* is assumed (failures, predominantly of the platform, occur more frequently as time elapses) (Ross, 1997). The following specific and convenient (but only illustrative) intensity function for the non-homogeneous Poisson process is used:

$$\lambda(t) = \lambda_1 + \lambda_2 (p+1)t^p, \text{ where } p=1 \quad (\text{V-1})$$

The mean value function for the non-homogeneous Poisson process is:

$$\Lambda(t) = \lambda_1 t + \lambda_2 t^{(p+1)} \quad (\text{V-2})$$

The average time between mission-affecting failures (ATBMAF) is approximated by dividing the specified time between scheduled maintenance actions, denoted by T_s and taken as fixed, by the expected number of failures to occur in the time between scheduled maintenance actions, as shown below.

$$ATBMAF = \frac{T_s}{\lambda_1 T_s + \lambda_2 T_s^2} = \frac{1}{\lambda_1 + \lambda_2 T_s} \quad (\text{V-3})$$

This formula shows that the average rate of failure occurrence, $(ATBMAF)^{-1}$, increases (linearly) with time. The parameters for the ATBMAF are chosen by setting T_s equal to the time between scheduled maintenance actions, setting the ATBMAF to a specified level, and then fixing one of the parameters to solve for the other parameter.

The non-homogenous Poisson failure process used provides the analyst and planner the ability to understand the possible effects of aging on the helicopters. As the helicopters age (more flight hours) the times between mission-affecting failures tend to decrease. This means that the helicopters generally will have more mission-affecting failures just prior to entering scheduled maintenance than they will have upon exiting scheduled maintenance. The model, utilizing the non-homogeneous Poisson failure process, has been set up to provide helicopters that are “as good as new” upon completing an overhaul (there is no post-overhaul infant failure, although this is a practical possibility). The model also is set up to reflect imperfect repairs. This means that when a helicopter completes repair of a non-scheduled random failure, a new independent failure time is not generated. Rather, the time until its next failure is carried forward from its previous generated failure time, *unless* the helicopter has just completed scheduled maintenance.

The model also makes the assumption that the initial flight hours for each helicopter are staggered so that the helicopters sequentially and periodically enter the scheduled maintenance facility as discussed in Chapter 3, Section D on page 19.

The MOEs displayed in this chapter are again the mean percent coverage per day of the NAI and the mean number of helicopter surviving at the end of each day. The 25th, 50th, and 75th percentiles for each of the MOEs appear in Appendix C. Appendix C also displays for a campaign the mean number of MAF, mean number of fatal failures, and mean number of helicopters shot down. The mean repair and turnaround time, mean number of missions started, probability of returning to base safely, mean time spent in the

high threat regions, mean survival time of individual helicopters, and the mean number of helicopters in the repair system for each campaign are also displayed in Appendix C.

A. SENSITIVITY ANALYSIS FOR VULNERABILITY PARAMETERS

The vulnerability of the helicopters is again modeled as an exponential random variable specified by the mean time until a helicopter is shot down when in particular regions. Note that the reduction of threat to helicopters by pausing to fire back is *not* represented here. This tactic may be very profitable, and should be modeled in follow-on work. The cases chosen for comparison are shown below in Table 9.

	Mean Time until a Helicopter is Shot Down while in a Low Vulnerability Region	Mean Time until a Helicopter is Shot Down while in a High Vulnerability Region
Case I	320 Hours	160 Hours
Case II	160 Hours	80 Hours
Case III	80 Hours	40 Hours

Table 9. Description of Vulnerability Cases for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	λ_1 (Average Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Average Time between Mission-Affecting Failures = 8.5 hours)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a three-week campaign to observe the effects of the varying vulnerability rates on the mean percent coverage per day of the NAI as well as the mean number of helicopters surviving at the end of each day. Figure 26, Figure 27, and Figure 28 graphically show how the mean coverage varied per day over the three-week period as well as the mean number of remaining helicopters at the end of each day. The vertical bars display the mean percent coverage per day of the NAI with the values located on the left vertical axis. The line graph displays the mean number of helicopters that are still alive at the end of each day with the values located on the right vertical axis. The error bars are set at plus and minus one standard error to indicate the variability of the simulation results.

The results support what would be expected. As the vulnerability increases, the ability of the helicopters to maintain coverage decreases, along with the mean number of helicopters alive at the end of each day. With the low vulnerability rate, the helicopters are nearly able to maintain mean coverage of the NAI above 50% for almost two weeks.

With the medium vulnerability rate, the helicopters are no longer able to maintain mean coverage of the NAI above 50% after eleven days. With the high vulnerability rate, the helicopters can only maintain mean coverage of the NAI above 50% for 7 days. This emphasizes the fact that sufficient helicopters are necessary to sustain a prolonged operation, *unless* the Red threat is suppressed. It also informs T&E decision-makers that vulnerability of the helicopters is an important issue that dramatically affects the MOEs and needs to be carefully and thoroughly considered during operational field-testing.

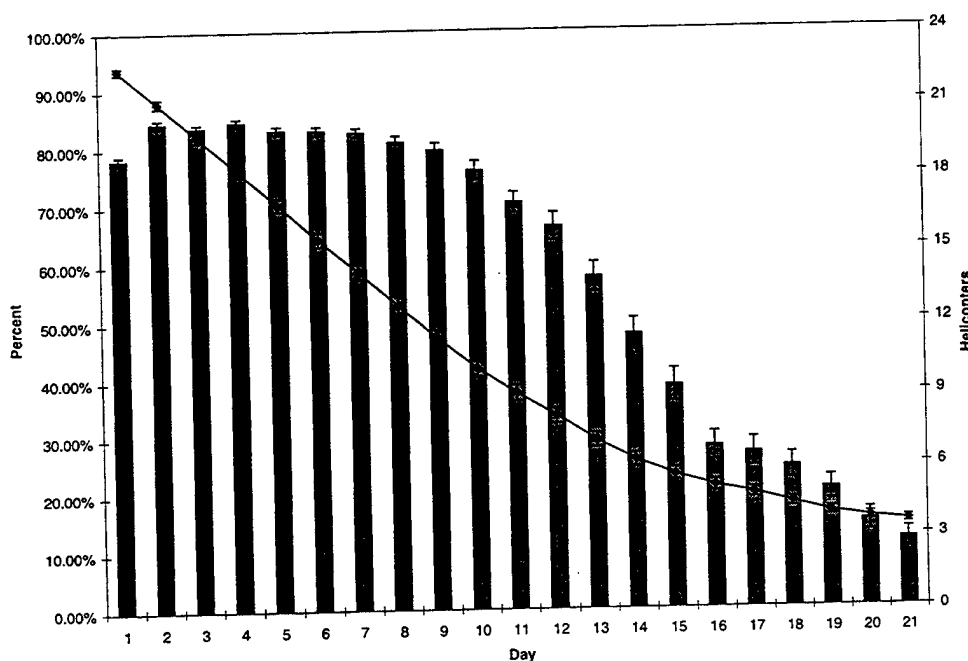


Figure 26. MOEs with Low Vulnerability for Model with a Non-homogeneous Failure Rate Process. Case I from Table 9 showing the effects of a low vulnerability rate on the mean percent of coverage and mean number of surviving helicopters. This graph can be compared to the iid times between failures in Figure 6.

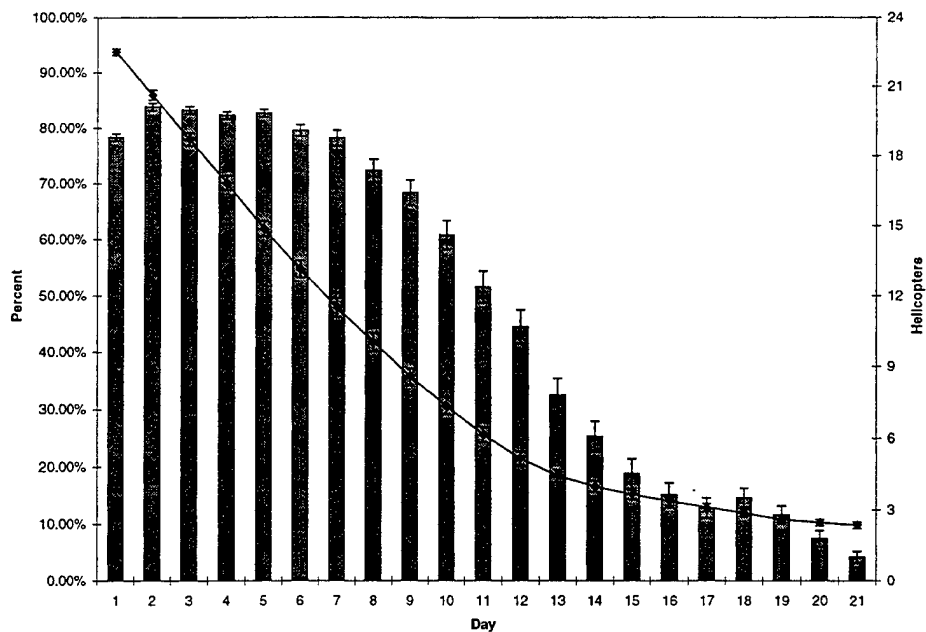


Figure 27. MOEs with Medium Vulnerability for Model with a Non-homogenous Failure Rate Process. Case II from Table 9 showing the effects of a medium vulnerability rate on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 7.

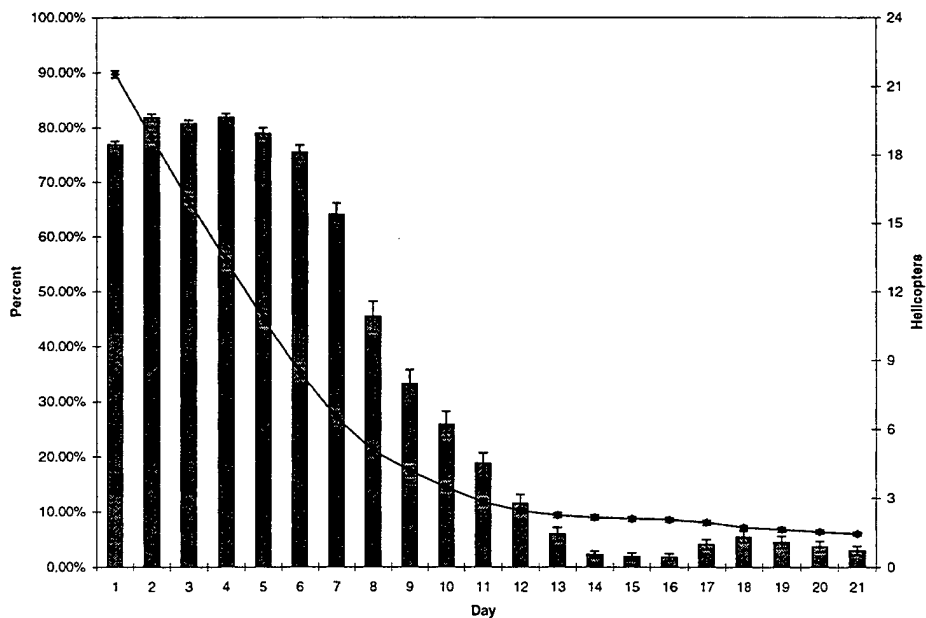


Figure 28. MOEs with High Vulnerability for Model with a Non-homogeneous Failure Rate Process. Case III from Table 9 showing the effects of a high vulnerability rate on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 8.

As the vulnerability increases, the rate of decrease in the number of helicopters surviving increases as time progresses since fewer helicopters are available to perform the mission. This causes the remaining helicopters to have to fly more hours and thus reach their scheduled maintenance flight hour limit sooner than normal. The helicopters are then temporarily no longer flying, but rather waiting in the scheduled maintenance queue for scheduled maintenance unless that scheduled maintenance duration is deliberately shortened or eliminated. In that case, the increasing occurrence of random failures will rapidly degrade coverage of the NAI.

B. SENSITIVITY ANALYSIS FOR TIME BETWEEN SCHEDULED MAINTENANCE ACTIONS

The time between scheduled maintenance actions is the number of flight hours, T_S , which a helicopter accumulates before being overhauled. This section examines the effect that different maintenance policies have on the MOEs. The cases chosen for comparison are shown below in Table 10.

	Time between Scheduled Maintenance Actions
Case I	300 Hours
Case II	400 Hours
Case III	500 Hours

Table 10. Description of Different Maintenance Policies for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	λ_1 (Average Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Average Time between Mission-Affecting Failures = 8.5 hours)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different maintenance policies on the MOEs. Figure 29, Figure 30, and Figure 31 show the results of the varying maintenance policies. As the time between scheduled maintenance actions increases, the first four or five days of mean coverage do not change much between the different maintenance policies. As time progresses, the mean coverage over the NAI improves as the time between scheduled maintenance actions increases. The mean coverage does not drop off as rapidly in the beginning of the second week for the longer maintenance policies. By the end of the second week mean coverage does not change when taking into account the variability of the simulation as shown on the graphs by the error bars. Even though an improvement is shown in the mean coverage provided during the second week, more helicopters are being lost because of fatal mission-affecting failures and being shot down while attempting to provide this extra coverage. The average number of helicopters that finished the second

week alive decreased from 2.2 with the 300-hour maintenance policy to 1.6 with the 500-hour maintenance policy. As attrition and fatal mission-affecting failures kill more helicopters, the remaining helicopters must fly more missions. If the maintenance policy uses a shorter time period between scheduled maintenance actions, the helicopters reach their flight hour limit sooner and finish up the two-week period sitting on the ground waiting for scheduled maintenance. If the maintenance policy uses a longer time period between scheduled maintenance, the helicopters do not reach their flight hour limit as soon, more helicopters continue flying and are susceptible to being shot down and having fatal mission-affecting failures. In the model as currently formulated, the vulnerability of the helicopters does not decrease as the helicopter numbers decrease. Of course in practice, the Red force may diminish its defense when it observes a great decrease in helicopter reconnaissance. Perhaps a policy that "manages" the overhaul so that helicopters are sometimes overhauled before they need it would be appropriate.

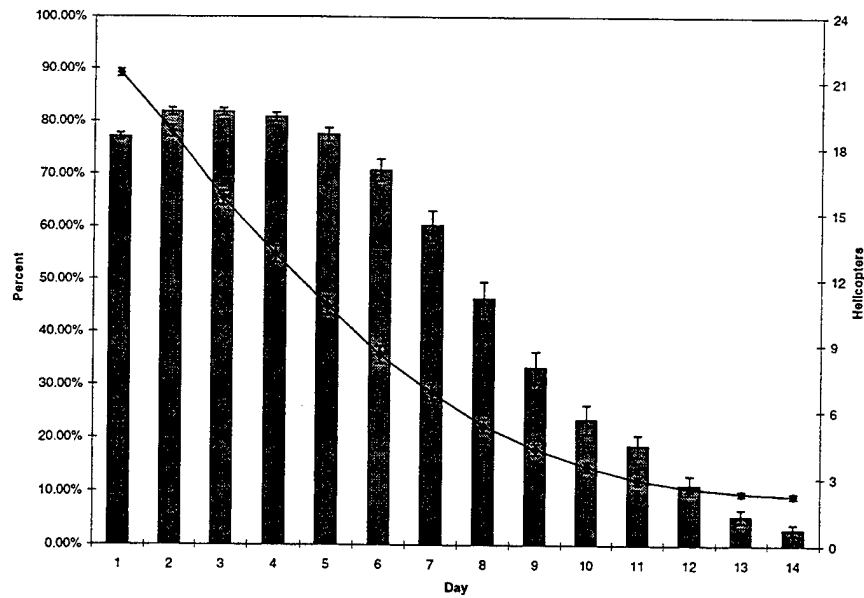


Figure 29. MOEs with 300-Hour Maintenance Policy for Model with a Non-homogeneous Failure Rate Process. Case I from Table 10 that shows the effects of 300 hours between scheduled maintenance activities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 9.

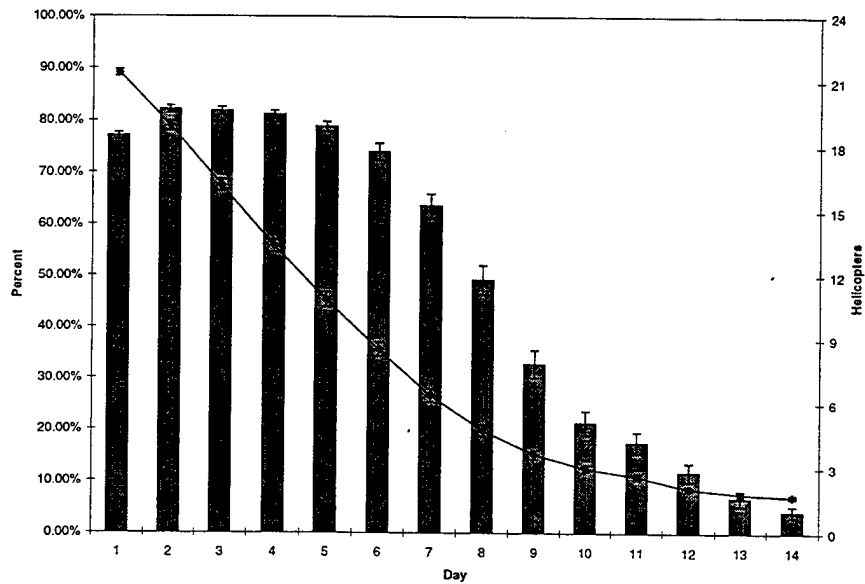


Figure 30. MOEs with 400-Hour Maintenance Policy for Model with a Non-homogeneous Failure Rate Process. Case II from Table 10 that shows the effects of 400 hours between scheduled maintenance activities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 10.

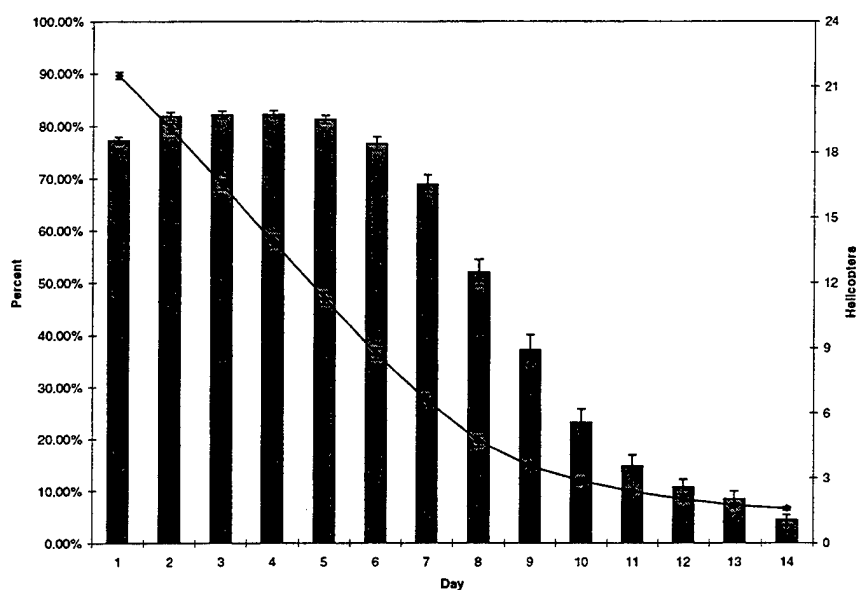


Figure 31. MOEs with 500-Hour Maintenance Policy for Model with a Non-Homogeneous Failure Rate Process. Case III from Table 10 that shows the effects of 500 hours between scheduled maintenance activities on the mean percent coverage and the mean number of surviving helicopters. This graph can be compared to the iid times between failures in Figure 11.

C. SENSITIVITY ANALYSIS FOR FAILURE-RATE AGING

The intensity function of the non-homogeneous Poisson process is determined by the numerical values assigned to λ_1 and λ_2 in Equation V-1. The intensity function of the process refers to the rapidity at which the expected number of failures per unit time changes from the initial time until the final time. In this case, the initial time is $T_0 = 0.0$, respectively the final time is $T_S = 300.0$ hours. These times correspond to a brand-new helicopter with an instantaneous failure rate equal to λ_1 , and a helicopter just entering scheduled maintenance with an instantaneous failure rate equal to $\lambda_1 + 2\lambda_2 T_S$, respectively. The value for λ_1 is the initial failure rate for the helicopter, while the value for λ_2 represents the effect of aging on the helicopter's failure rate. Therefore, the lower the initial rate, the faster the rate function will have to increase (the larger λ_2 must be) to

result in a ATBMAF of 8.5 hours, as used in this analysis. Note that λ_2 is the “age effect;” the larger the value of λ_2 , the greater the aging effect. Other functions can be used to induce sharper age dependence (Crowder, 1991).

This section examines the effect that different intensity functions, with the same calculated ATBMAF, have on the MOEs. The cases chosen for comparison are shown below in Table 11.

	λ_1	λ_2
Case I	0	3.92157×10^{-4}
Case II	0.1	5.8824×10^{-5}
Case III	0.117647	1.96078×10^{-10}

Table 11. Description of Aging Process for Model with a Non-homogeneous Failure Rate Process.

Note that Case I illustrates a maximum aging effect, Case II an intermediate aging effect, and Case III a minimum aging effect (comparable to iid Weibull with shape parameter one, i.e., exponential).

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Mean Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the differing Poisson process intensity functions on the MOEs. Figure 32, Figure 33, and Figure 34 show the results for the different intensity functions. The effects of the different aging models can be seen in how soon the mean percent coverage of the NAI begins to decline. Case I ($\lambda_1 = 0$) begins to reduce mean coverage after six days while for Case II and Case III mean coverage reduction begins after 4 or 5 days. There is also a negligible difference in the number of helicopters surviving at the end of each day. This is a result of little change in the mean number of failures experienced per campaign for each case examined. The values for the mean number of failures per campaign are 78.28, 78.07, and 80.52 for Case I, Case II, and Case III respectively. This corresponds to losing an average of 8 helicopters (10% of the mission-affecting failures) due to fatal mission-affecting failures. The mean number of helicopters shot down was about the same for each case as well. This results in

approximately the same total attrition rate for the helicopters in each case. Therefore, some of the differences in mean percent coverage of the NAI can be attributed to the rate at which the failures occur due to the different aging processes. The model used for the aging process does not have a strong age effect as can be seen by the low values used for λ_2 . Even with this low age effect, differences can be seen in the percent coverage of the NAI. If an aging model with a stronger age effect were used, even greater differences in the percent coverage would be expected. Hence, the rate of aging is a parameter that affects the MOEs and should be addressed.

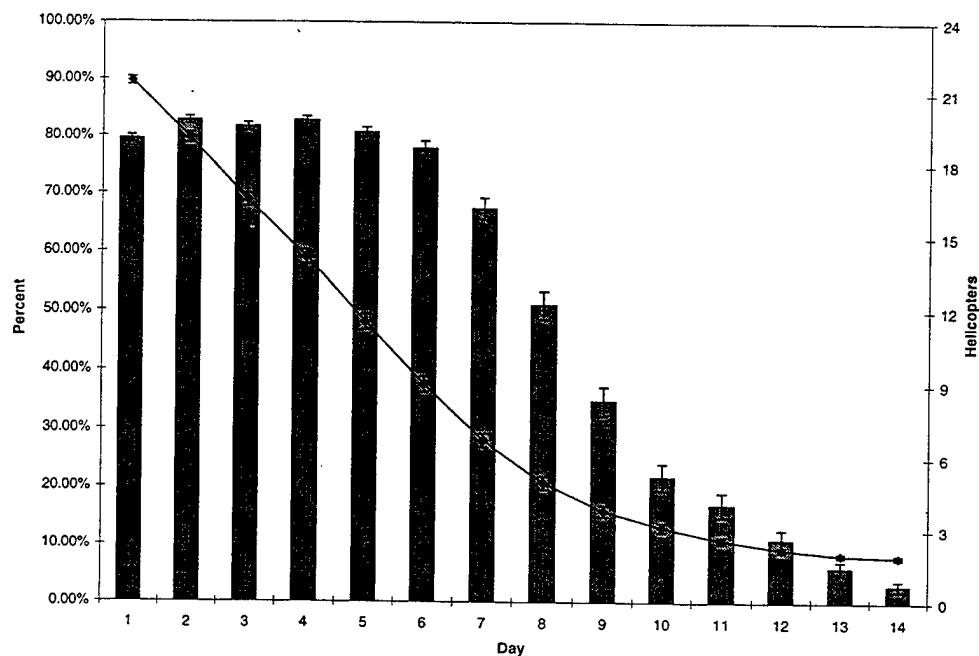


Figure 32. MOEs for Case I of the Varying Rate Functions. Case I from Table 11 that shows the effects of aging on the mean percent coverage and the mean number of helicopters surviving with an initial rate of failure set to zero and the mean number of failures over 300 flight hours equal to 300/8.5.

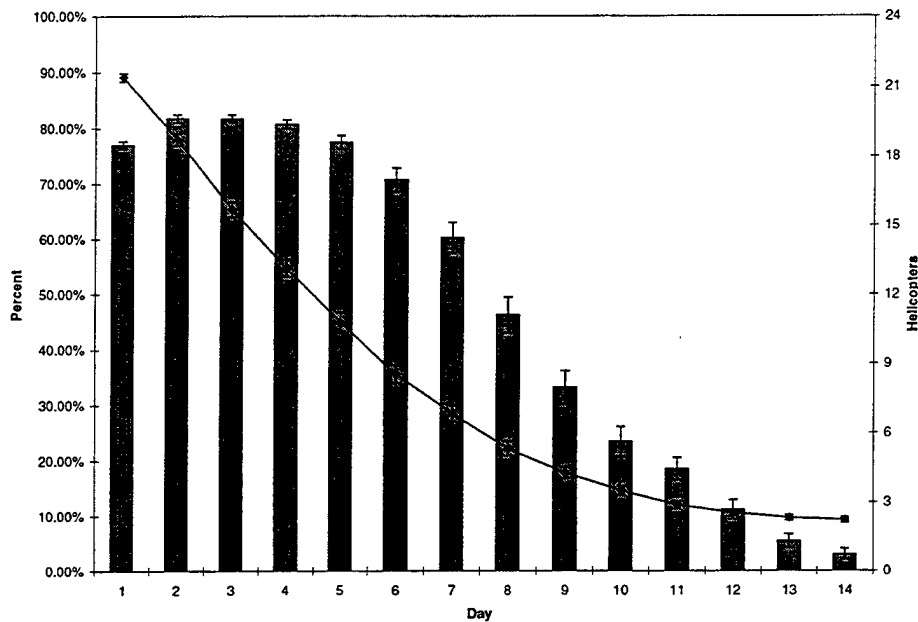


Figure 33. MOEs for Case II of the Varying Rate Functions. Case II from Table 11 that shows the effects of aging on the mean percent coverage and the mean number of helicopters surviving with an initial rate function set equal to 0.1 and the mean number of failures over 300 hours equal to $300/8.5$.

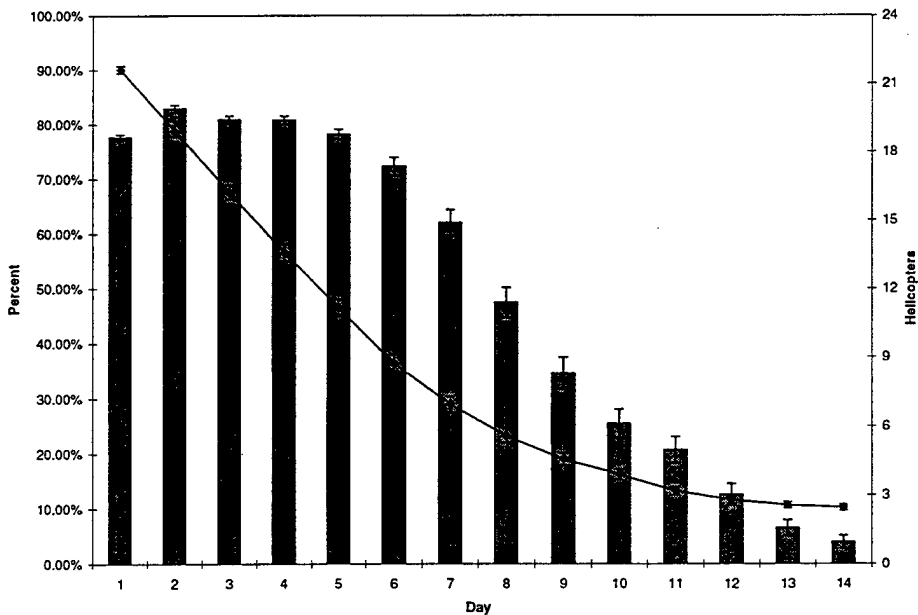


Figure 34. MOEs for Case III of the Varying Rate Functions. Case III from Table 11 that shows the effects of aging on the mean percent coverage and the mean number of helicopters surviving with a negligible aging effect, an initial failure rate set equal to 0.117647 and the mean number of failures over 300 hours equal to $300/8.5$.

D. SENSITIVITY ANALYSIS FOR AVERAGE TIME BETWEEN MISSION-AFFECTING FAILURES

This section examines the effect that different average times between mission-affecting failures have on the MOEs. The cases chosen for observation are shown below in Table 12.

	λ_1	λ_2	Average Time between Mission-Affecting Failures: $\left(\frac{300}{\lambda_1(300) + \lambda_2(300)^2} \right)$
Case I	0.01	7.50980×10^{-4}	4.25 Hours
Case II	0.01	3.5824×10^{-4}	8.5 Hours
Case III	0.01	1.62745×10^{-4}	17.0 Hours

Table 12. Description of ATBMAF for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒ 24	Number of Helicopters
⇒ 160	Speed of Helicopters (knots)
⇒ 300	Time between Scheduled Maintenance Actions (flight hours)
⇒ 40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒ 80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒ 1	Repair Facilities
⇒ 1	Scheduled Maintenance Facilities
⇒ 1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒ 0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒ 144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒ 0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different ATBMAF on the MOEs. Figure 35, Figure 36, and

Figure 37 show the results for each of the different ATBMAF. The average time between mission-affecting failures has a dramatic effect on both the mean percent coverage of the NAI per day and the mean number of helicopters surviving at the end of each day. As the ATBMAF increases, on the average fewer failures are experienced during the campaign, which results in several areas of performance of the system improving. With fewer failures, more helicopters are able to successfully complete an entire mission without having to return to home base for repairs. This results in more and longer times on station for each helicopter pair, thus improving the mean percent coverage of the Named Area of Interest. The diminished mean number of failures also results in less time being spent in the repair facility and more helicopters being available to perform the assigned mission. Also as fewer failures are experienced, fewer crashes (modeled as 10% of the number of MAF) occur. This results in a lower total attrition rate for the helicopters during the campaign. Thus, the ATBMAF needs to be well monitored during actual field-testing. It may well increase as failure modes are discovered and rectified. Response of this parameter to environmental influences must also be tested and monitored.

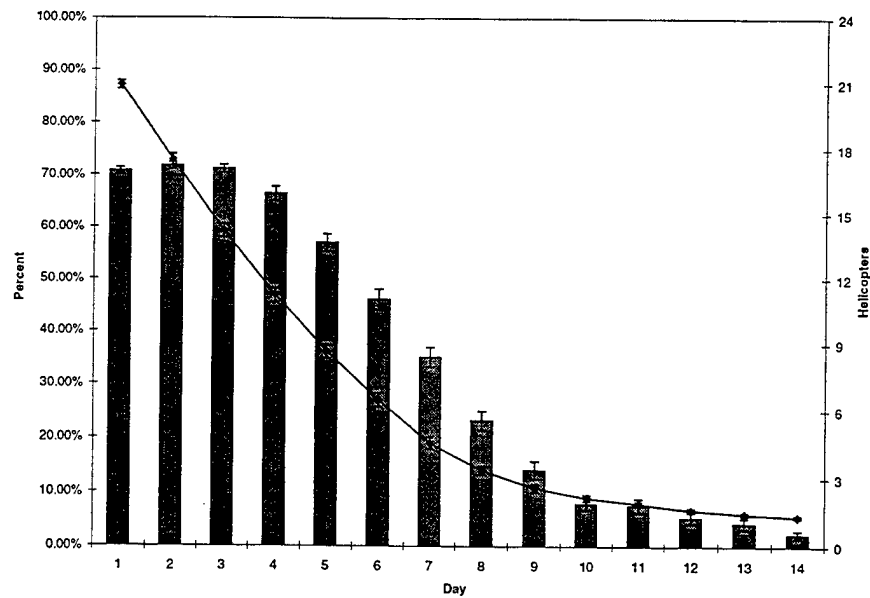


Figure 35. MOEs with ATBMAF equal to 4.25 Hours for Model with a Non-homogeneous Failure Rate Process. Case I from Table 12 that shows the effects with an ATBMAF equal to 4.25 hours on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 12.

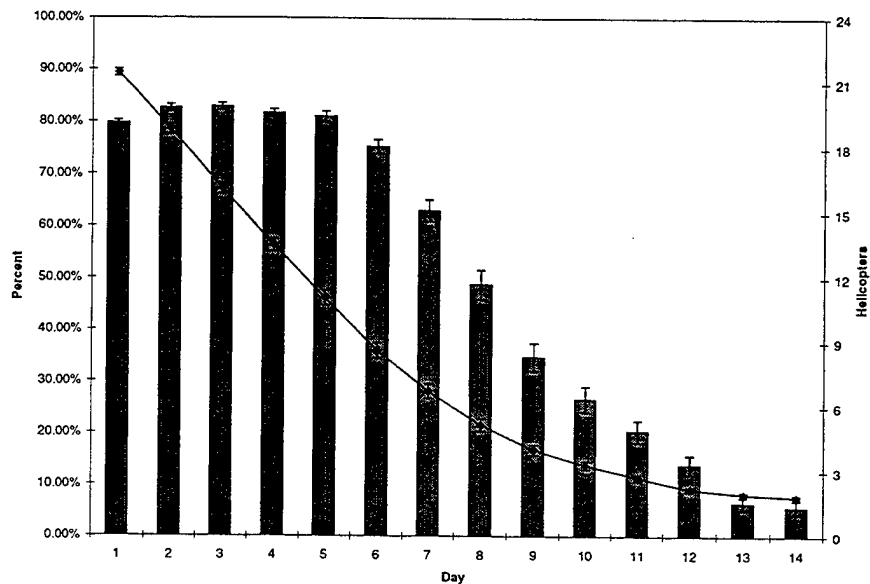


Figure 36. MOEs with ATBMAF equal to 8.5 hours for Model with a Non-homogeneous Failure Rate Process. Case II from Table 12 that shows the effects with an ATBMAF equal to 8.5 hours on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 13.

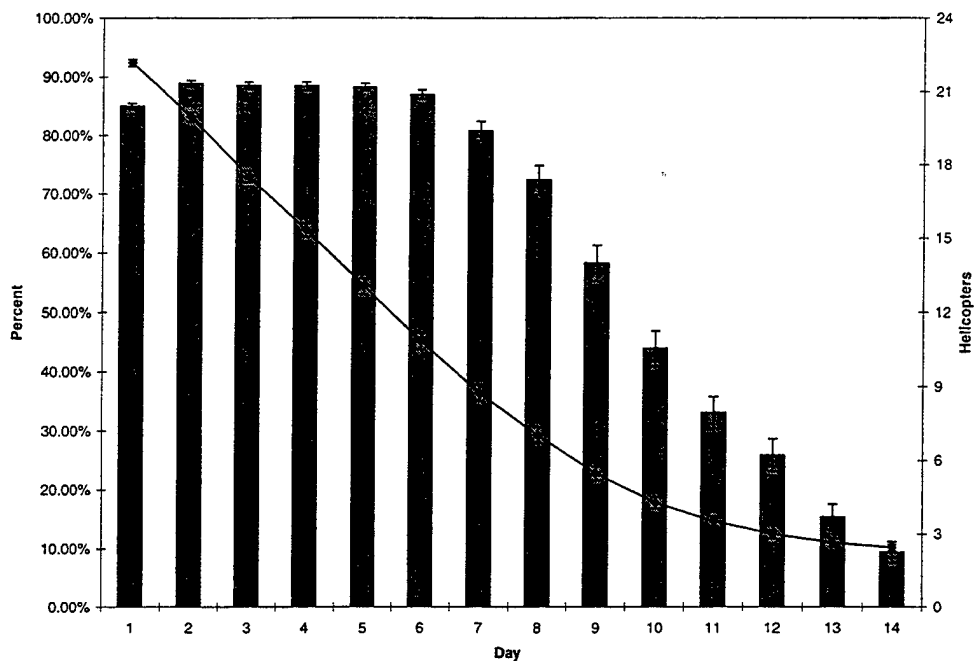


Figure 37. MOEs with ATBMAF equal to 17.0 Hours for Model with a Non-homogeneous Failure Rate Process. Case III from Table 12 that shows the effects with an ATBMAF equal to 17.0 hours on the mean percent coverage and the mean number of helicopters remaining. This graph can be compared to the iid times between failures in Figure 14.

E. SENSITIVITY ANALYSIS OF OVERHAUL TIMES

The overhaul time is that amount of time needed to complete scheduled maintenance on a helicopter and return it to service. It is being modeled with a uniform distribution specified by the minimum and maximum times to complete the scheduled maintenance. This section examines the effects of different overhaul times on the MOEs.

The cases chosen for comparison are listed below in Table 13.

	Minimum Overhaul Time	Maximum Overhaul Time
Case I	48 Hours	96 Hours
Case II	96 Hours	144 Hours
Case III	144 Hours	192 Hours

Table 13. Description of Overhaul Times for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	0.1	λ_1 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different overhaul times on the MOEs. In each case, one scheduled maintenance facility was available for overhaul. Figure 38, Figure 39, and Figure 40 show the results for the different overhaul times. The effect of the different overhaul times begins to show up after four days. The longer overhaul times result in fewer helicopters being available once they reach their flight hour limit since they are now sitting on the ground waiting for the maintenance facility to begin the overhaul. This results in fewer helicopters flying the assigned mission, and thus less mean coverage of the NAI being provided. The longer overhaul times do result in more helicopters surviving at the end of the campaign. This is once again the result of helicopters being backed up in the maintenance facility, which results in fewer helicopters flying missions, and thus fewer helicopter crashes and lower attrition due to enemy action.

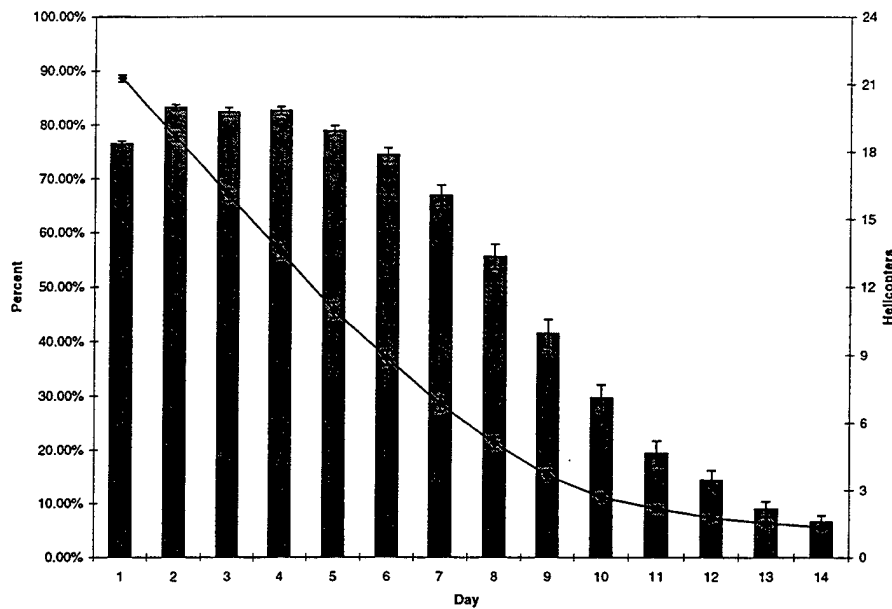


Figure 38. MOEs with Short Overhaul Times for Model with a Non-homogeneous Failure Rate Process. Case I from Table 13 that shows the effects of a short overhaul time on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 15.

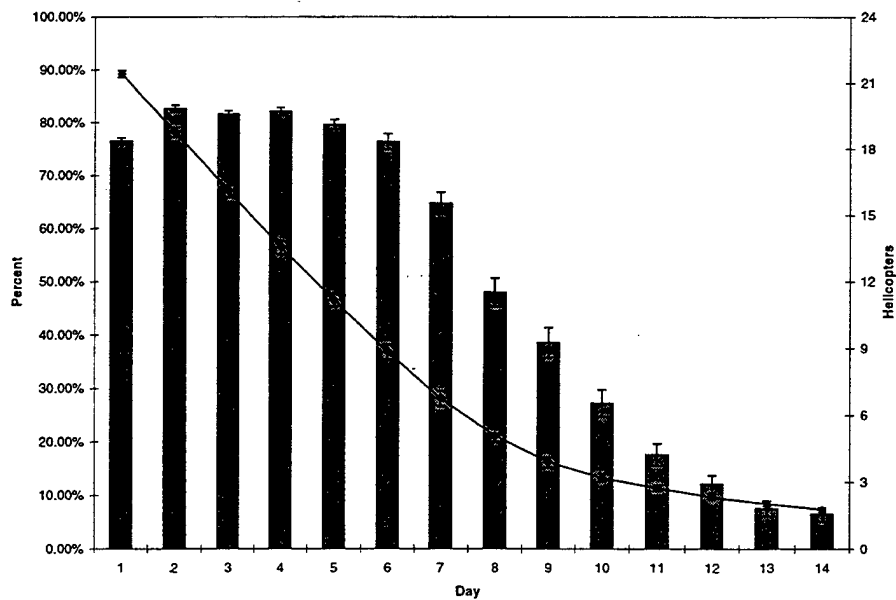


Figure 39. MOEs with Medium Overhaul Times for Model with a Non-homogeneous Failure Rate Process. Case II from Table 13 that shows the effects of a medium overhaul time on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 16.

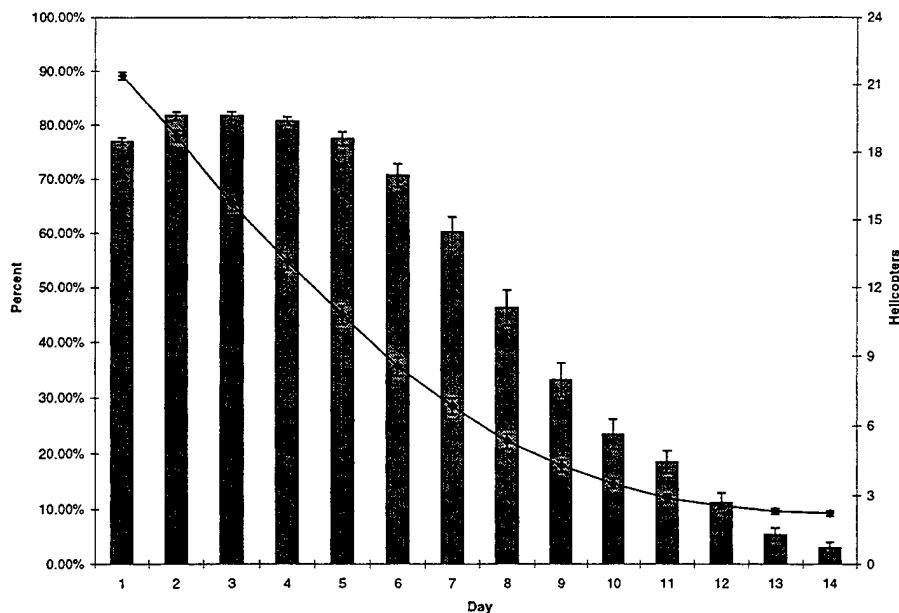


Figure 40. MOEs with Long Overhaul Times for Model with a Non-homogeneous Failure Rate Process. Case III from Table 13 that shows the effects of a long overhaul time on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 17.

F. SENSITIVITY ANALYSIS OF THE EFFECT OF CHANGING NUMBERS OF SCHEDULED MAINTENANCE FACILITIES

This section examines the effect that different numbers of scheduled maintenance facilities have on the MOEs. A scheduled maintenance facility is one for which the maintenance manager directs helicopters that require overhaul. The helicopters are initially setup such that their entrance into the maintenance facility is periodically staggered. The cases chosen for comparison are shown below in Table 14.

	Number of Scheduled Maintenance Facilities
Case I	1
Case II	2
Case III	4

Table 14. Description of the Number of Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	0.1	λ_1 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different numbers of scheduled maintenance facilities on the MOEs. Figure 41, Figure 42, and Figure 43 show the results for each of the different numbers. The results show that as the number of scheduled maintenance facilities increases, the helicopters are able to maintain a higher percentage of coverage later in the campaign. In the short term, the number of maintenance facilities has very little effect. As time progresses and more helicopters are sent in for overhaul, the number of scheduled maintenance facilities has a large impact. On the last day of the campaign, mean coverage more than doubled from 3% with one scheduled maintenance facility to over 7% percent for just one additional facility and to nearly 10% with an additional three facilities. This does take a toll on the number of helicopters remaining at the end of the campaign since fewer helicopters are waiting in the maintenance facilities and more are

returned to conduct the assigned mission in a timely manner. These helicopters are once again subjected to attrition from enemy action and crashes.

If these effects are to be seen during actual testing, the tests will need to be of long enough duration, and tests should not be conducted with helicopters that have all just completed an overhaul. The helicopters should be similar to those that would be used in the field, which have staggered flight hours to facilitate staggered overhauls.

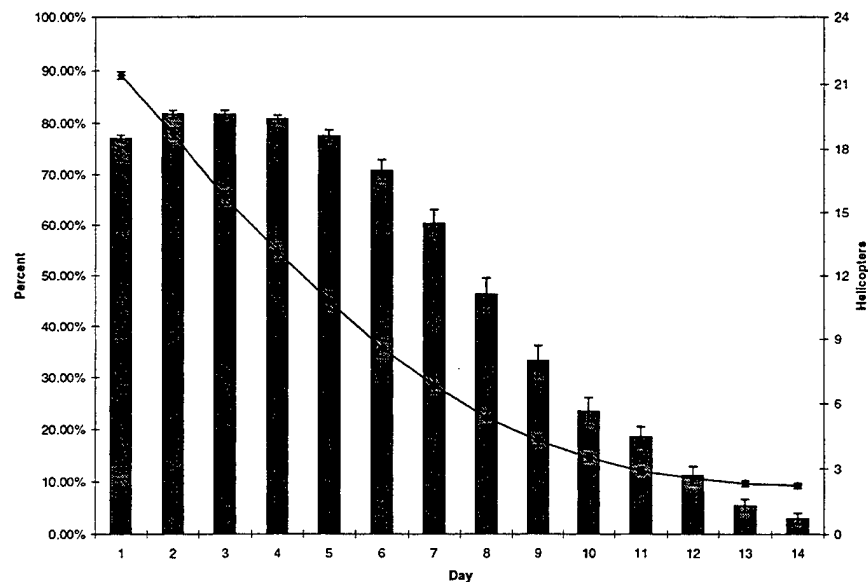


Figure 41. MOEs with One Scheduled Maintenance Facility for Model with a Non-homogeneous Failure Rate Process. Case I from Table 14 that shows the effects of one scheduled maintenance facility on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 18.

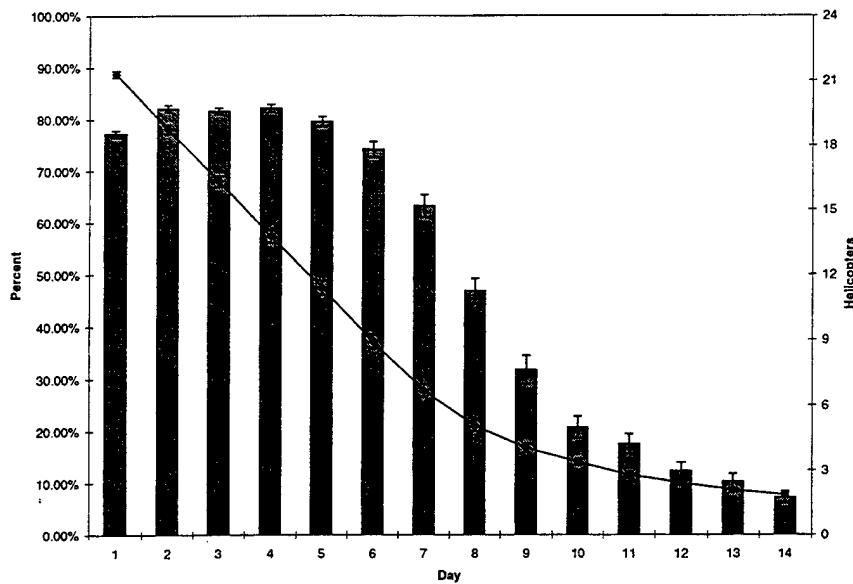


Figure 42. MOEs with Two Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process. Case II from Table 14 that shows the effects of two scheduled maintenance facilities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to the iid times between failures in Figure 19.

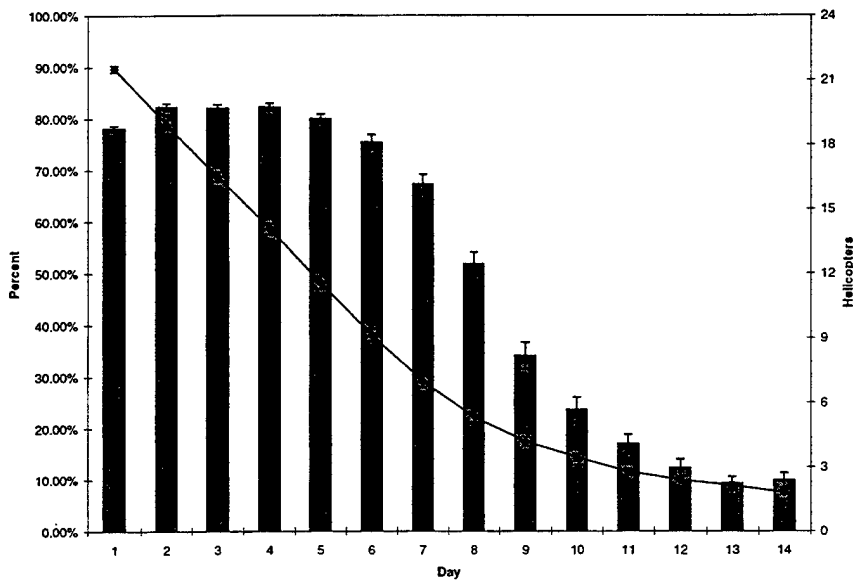


Figure 43. MOEs with Four Scheduled Maintenance Facilities for Model with a Non-homogeneous Failure Rate Process. Case III from Table 14 that shows the effects of four scheduled maintenance facilities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 20.

G. SENSITIVITY ANALYSIS FOR THE NUMBER OF REPAIR FACILITIES

This section examines the effect that different numbers of repair facilities have on the MOEs. A repair facility is one in which the maintenance manager directs helicopters that have experienced a MAF and need to be repaired. The repair facility also conducts helicopter turnaround tasks (rearming and refueling). The repair facilities in this analysis operate using a priority maintenance policy that selects the helicopter in the repair facility with the shortest repair/turnaround time to be serviced first. The cases chosen for observation are shown below in Table 15.

	Number of Repair Facilities
Case I	1
Case II	2
Case III	4

Table 15. Description of the Number of Repair Facilities for Model with a Non-homogeneous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	0.1	λ_1 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different numbers of repair facilities on the MOEs. Figure 44, Figure 45, and Figure 46 show the results for each of the different numbers of repair facilities. The results show that the number of repair facilities has little effect on either of the MOEs. This is because of a sufficient number of helicopters at the beginning of the campaign, and attrition of helicopters during the campaign. Even if the single repair facility case has a queue of helicopters, it is able to complete the repairs prior to the repair backlog causing a detrimental problem. The current repair rate is too high to be influential.

Once again, the reader is reminded that for the parameters chosen for these cases, the repair facilities were never challenged. For the 3 cases observed, the mean number of non-fatal mission-affecting failures experienced per campaign was 70.75. This means that on average there were approximately 5.05 MAF that needed to be repaired. Using the mean time to repair of 1.0 hours, the repair facility was busy repairing a mission-affecting failure on average just over 5 hours per day. The average time needed to rearm and refuel all 24 helicopters using a mean turnaround time of 0.25 hours is 6 hours. Even if all 24 helicopters need to be reamed and refueled on any given day, the average time that the repair facility is busy is just over 11 hours per day.

The cases analyzed are far from stretching the limits of one repair facility, let alone two or four. More analysis needs to be done in this area by looking at longer repair times or fewer helicopters. In such cases the reduction in force size due to one or two helicopters being in the repair facility may dramatically affect the MOEs.

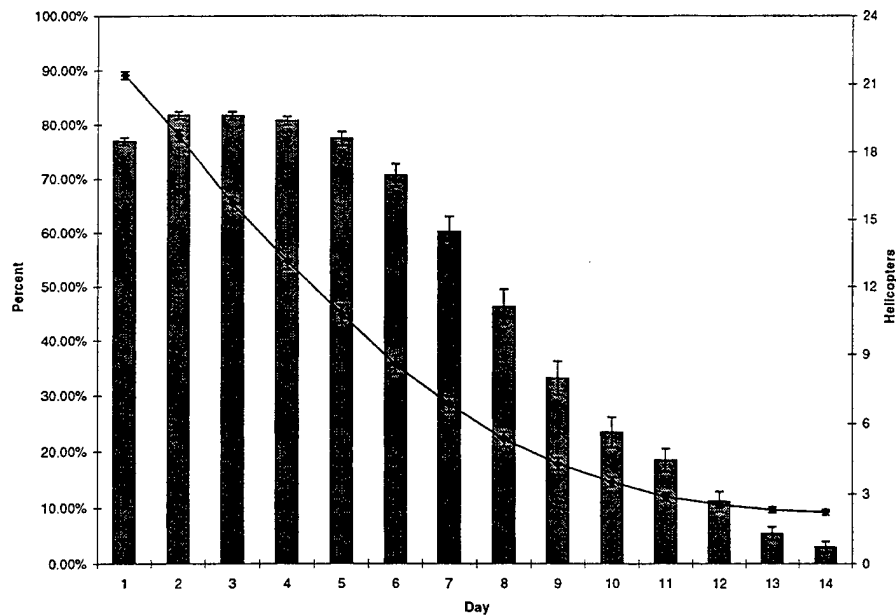


Figure 44. MOEs with a Single Repair Facility for Model with a Non-homogeneous Failure Rate Process. Case I from Table 15 that shows the effects of a single repair facility on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 21.

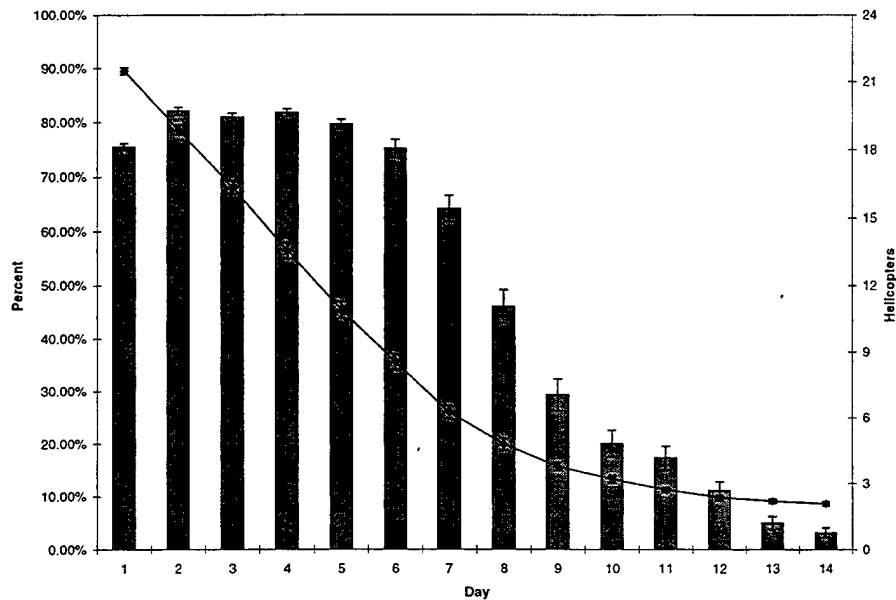


Figure 45. MOEs with Two Repair Facilities for Model with a Non-homogeneous Failure Rate Process. Case II from Table 15 that shows the effects of two repair facilities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 22.

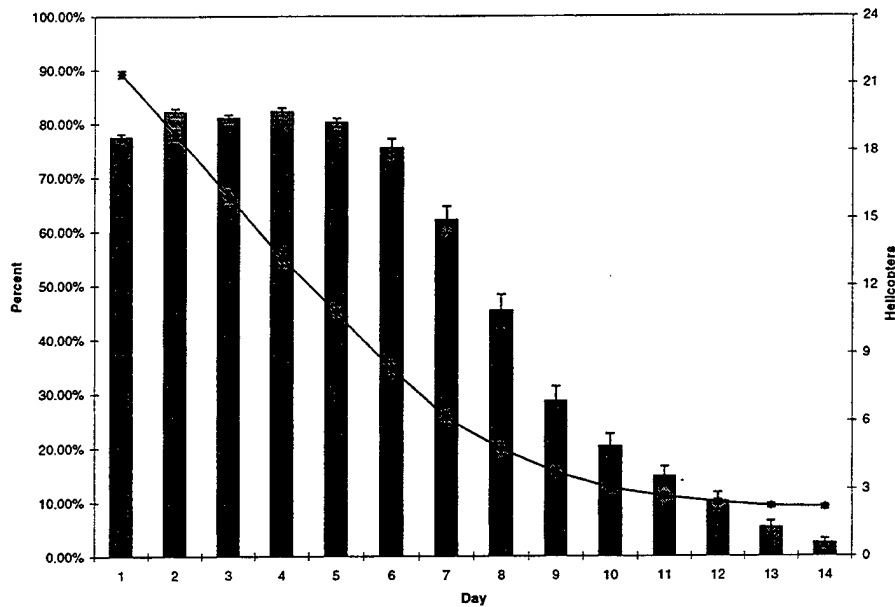


Figure 46. MOEs with Four Repair Facilities for Model with a Non-homogeneous Failure Rate Process. Case III from Table 15 that shows the effects of four repair facilities on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 23.

H. SENSITIVITY ANALYSIS FOR PRIORITY MAINTENANCE

Priority maintenance is the maintenance policy of determining the helicopter in the repair queue with the shortest repair/turnaround time and conducting repairs or services on this helicopter first. If the priority maintenance policy is not in effect, the repair system operates on a first-come, first-served, basis. This section examines the effects of the two different maintenance policies on the MOEs. The cases chosen are shown below in Table 16.

	Priority Maintenance
Case I	TRUE
Case II	FALSE

Table 16. Description of Priority Maintenance Policies for Model with a Non-homogenous Failure Rate Process.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	2	Scheduled Maintenance Facilities
⇒	2	Repair Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	0.1	λ_1 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	5.8824e-5	λ_2 (Mean Time between Mission-Affecting Failures = 8.5 hours)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe the effects of the different maintenance policies on the MOEs. Figure 47 and Figure 48 show the results for each of the different policies. As expected from the previous section, there is very little difference between the results for the two different maintenance policies. The mean numbers of surviving helicopters are comparable throughout the campaign, as is the mean percent coverage per day of the NAI. There is essentially no difference between the two policies as far as the two observed MOEs are concerned since the repair facilities are not being challenged.

As previously discussed in Section G on page 80 the cases analyzed do not test the repair facilities at its limits. Here again the repair facility spends on average just over 5 hours per day performing repairs. In order to see the effects of priority maintenance, the repair facility must first be tested near its limits. This can be accomplished by increasing

the number of failures or by increasing the average amount of time necessary to complete a repair of a mission-affecting failure.

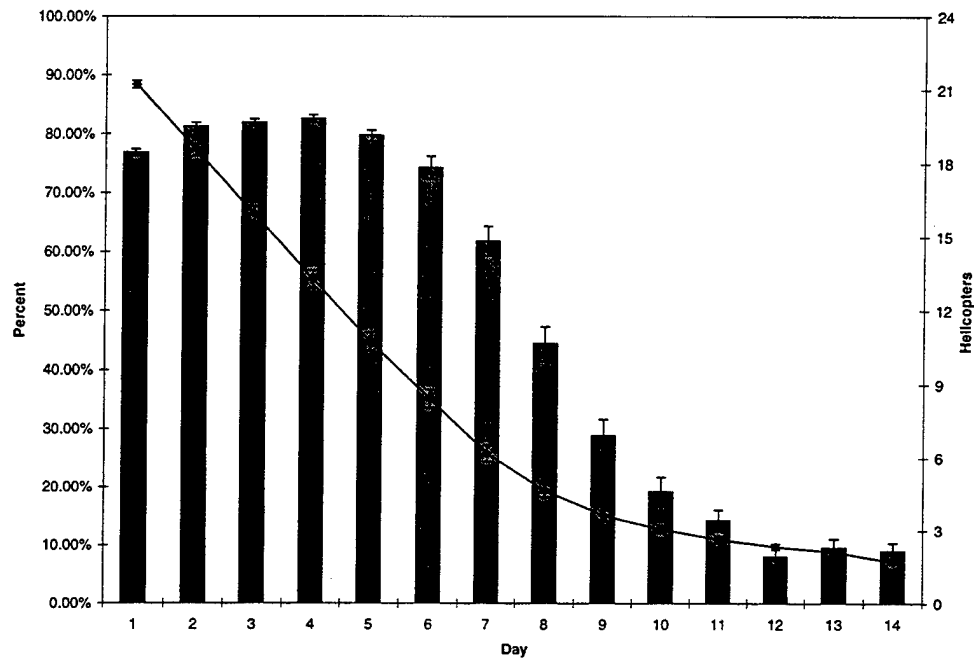


Figure 47. MOEs with Priority Maintenance for Model with a Non-homogeneous Failure Rate Process. Case I from Table 16 that shows the effects of priority maintenance on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 24.

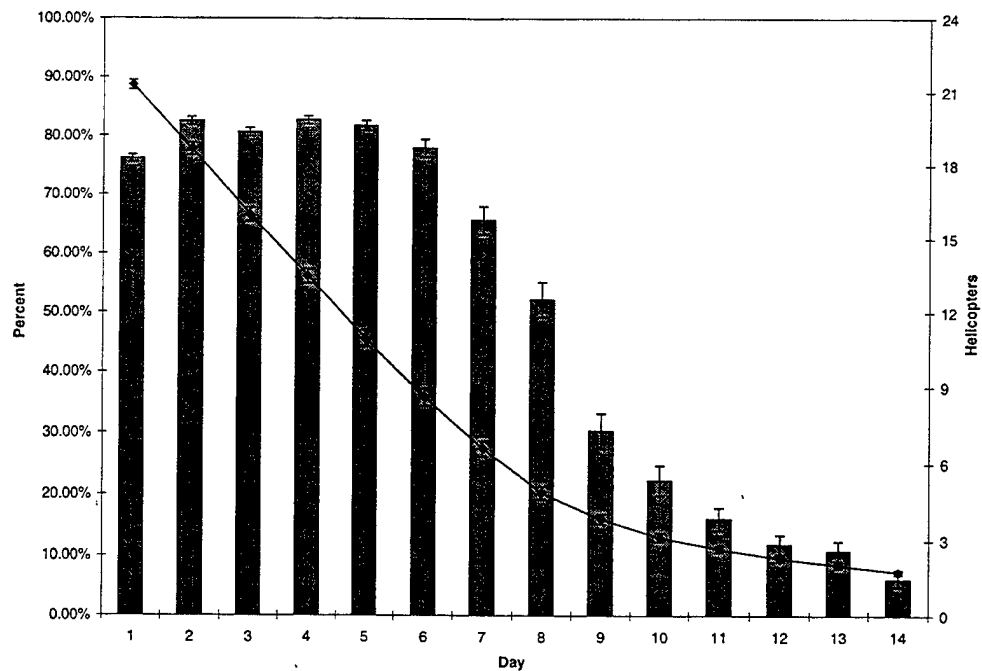


Figure 48. MOEs with First-Come, First-Served, Maintenance for Model with a Non-homogeneous Failure Rate Process. Case II from Table 16 that shows the effects of non-priority maintenance on the mean percent coverage and the mean number of helicopters surviving. This graph can be compared to iid times between failures in Figure 25.

I. SUMMARY ANALYSIS FOR THE NON-HOMOGENEOUS POISSON (INCREASING FAILURE RATE) FUNCTION

This chapter focused on the behavior of the MOEs with the underlying distribution for the mission-affecting failures as a non-homogeneous Poisson Process that represents the aging of equipment by decreasing the time between failures as age increases. This results in more failures per unit time as the equipment ages. The dominant sensitivities from the analysis were once again the vulnerability of the helicopters, and the mean time between mission-affecting failures. The aging effect, as modeled here, did not produce any drastic changes in the MOEs. This was expected since the aging effect (λ_2) is such a small number (on the order of 10^{-5}) for most cases. Other

aging models can have a more influential effect. The lesson for OT&E is to monitor time-between-failure data to detect the extent of an aging effect.

VI. ADDITIONAL COMPARISONS OF SIMULATIONS

The MOEs displayed in this chapter are the mean percent coverage per day of the NAI and the mean number of helicopter surviving at the end of each day. The 25th, 50th, and 75th percentiles for each of the MOEs appear in Appendix D. Appendix D also displays for a campaign the mean number of MAF, mean number of fatal failures, and mean number of helicopters shot down. The mean repair and turnaround time, mean number of missions started, probability of returning to base safely, mean time spent in the high threat regions, mean survival time of individual helicopters, and the mean number of helicopters in the repair system for each campaign are also displayed in Appendix D.

A. COMARISON OF THE MODEL WITH IID TIMES BETWEEN FAILURES AND THE MODEL WITH A NON-HOMOGENEOUS POISSON FAILURE RATE

This section compares the model with independent identically distributed times between mission-affecting failures to a model with a non-homogeneous Poisson Failure Rate process. The cases chosen are shown in Table 17.

	Parameters
Model with iid Times between Failures	Shape = 1.0, Scale = 8.5
Model with Non-homogeneous Poisson Failures	$\lambda_1 = 0.1, \lambda_2 = 5.8824 \times 10^{-5}$

Table 17. Description of Models being Compared.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to observe compare the effects of the two separate models. Figure 49 and Figure 50 show the results of the simulations for comparison. There is not much difference between the output for the two models. This is an expected result since the aging effects are not very strong in the non-homogeneous Poisson failure time model. As the strength of the aging effect decreases (λ_2 approaches zero), the non-homogeneous Poisson failure time model approaches the model with iid times between failure, here an exponential distribution. The Weibull distribution with a shape parameter of one is also an exponential distribution. This explains why there is very little difference between the two models shown.

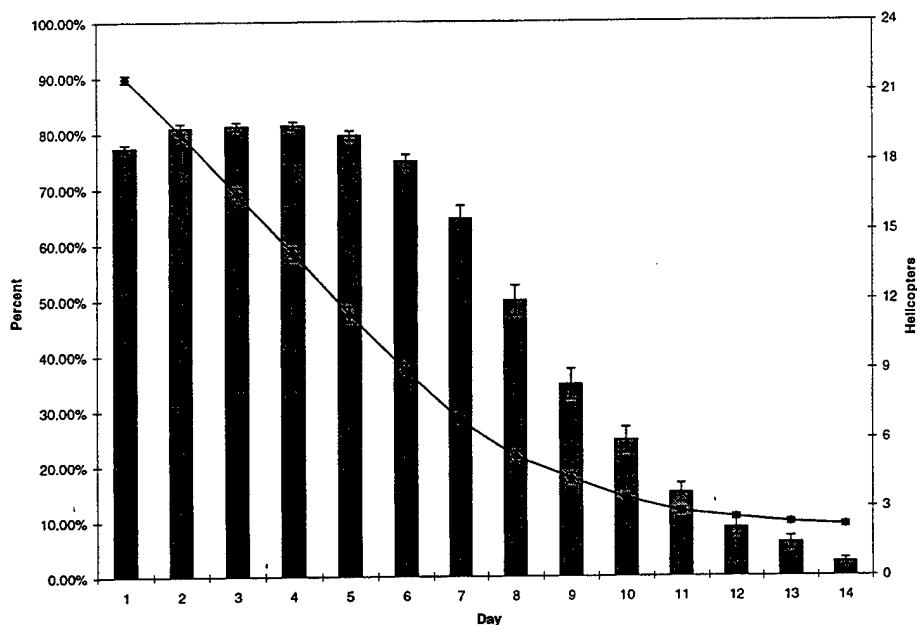


Figure 49. MOEs for the Model with iid Times between Mission-Affecting Failures. This graph shows the effects on the results of the simulation for the model using a Weibull distribution to generate times between mission-affecting failures.

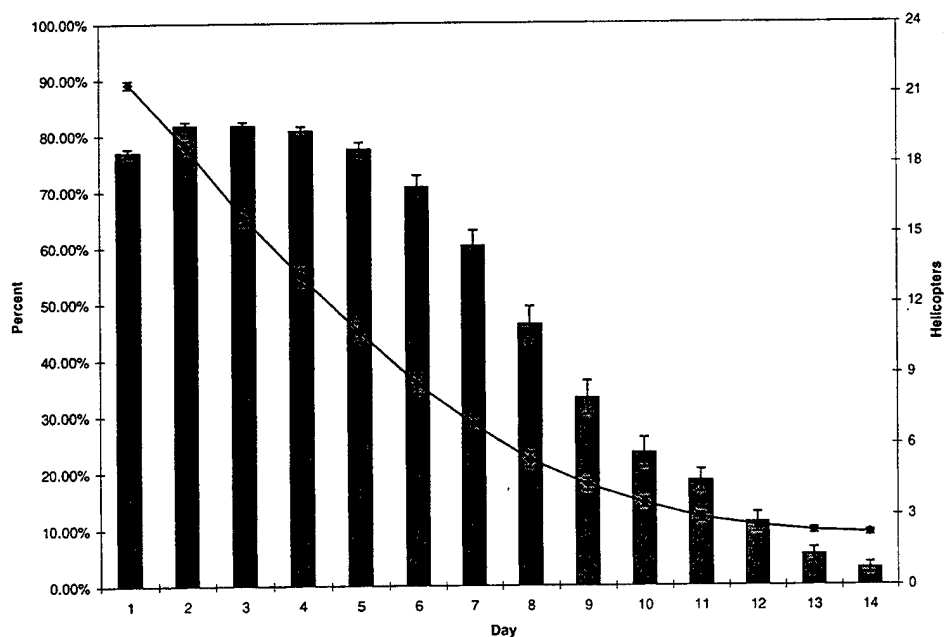


Figure 50. MOEs for Model with a Non-homogeneous Failure Rate Process. This graph shows the effects on the results for the model using a non-homogeneous Poisson process to generate times between mission-affecting failures.

B. ANALYSIS OF A LOWER FATALITY RATE FOR MISSION-AFFECTING FAILURES

Recent analysis of historical data for the percentage of mission-affecting failures resulting in a fatality has resulted in an estimate of approximately 1% vice 10% as has been modeled previously. This section compares the two different percentages for fatal mission-affecting failures. The cases chosen for comparison are shown below in Table 18.

	% of Mission-Affecting Failures Resulting in Fatalities
Case I	10%
Case II	1%

Table 18. Description of the Percentage of Mission-Affecting Failures that are Fatal.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	160	Speed of Helicopters (knots)
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	40	High-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	80	Low-Threat Vulnerability (Mean Time until a Helicopter is Shot Down in Region) (hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF

One hundred runs of the simulation were conducted for a two-week campaign to compare the results for the different percentages of fatal mission-affecting failures. Figure 51 and Figure 52 show the results of the simulations for the different percentages of mission-affecting failures resulting in fatalities. The graphs show that with the lower percentage of mission-affecting failures resulting in fatalities, the helicopters are able to provide increased coverage for a longer period of time. With 1% of the mission-affecting failures ending in a fatality, the helicopters are able to maintain a mean percent coverage of the NAI greater than 80% for a week. The mean number of helicopters does not decline as rapidly for the 1-percent case either. At the end of the 2-week campaign the mean number of helicopters surviving is 4.22 while still maintaining a mean percent coverage per day of almost 24%. The percentage of mission-affecting failures ending fatally needs to be addressed and considered during an operational test. A variation in this parameter can produce dramatic effects on the performance of the system being evaluated.

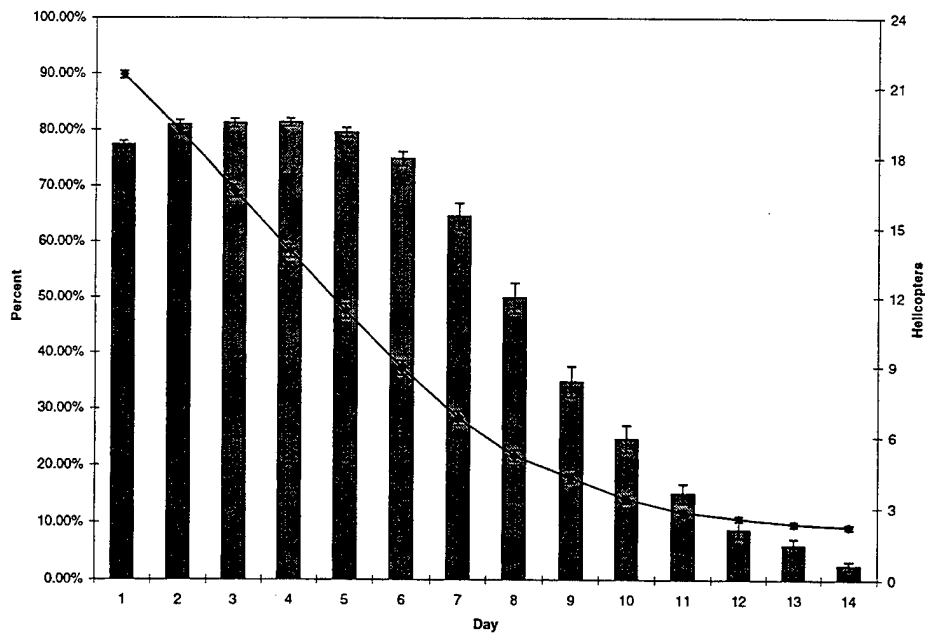


Figure 51. MOEs with 10% of Mission-Affecting Failures Resulting in Fatalities. Case I from Table 18 that shows the effects for 10% of mission-affecting failures resulting in fatalities on the mean percent coverage and the mean number of helicopters surviving.

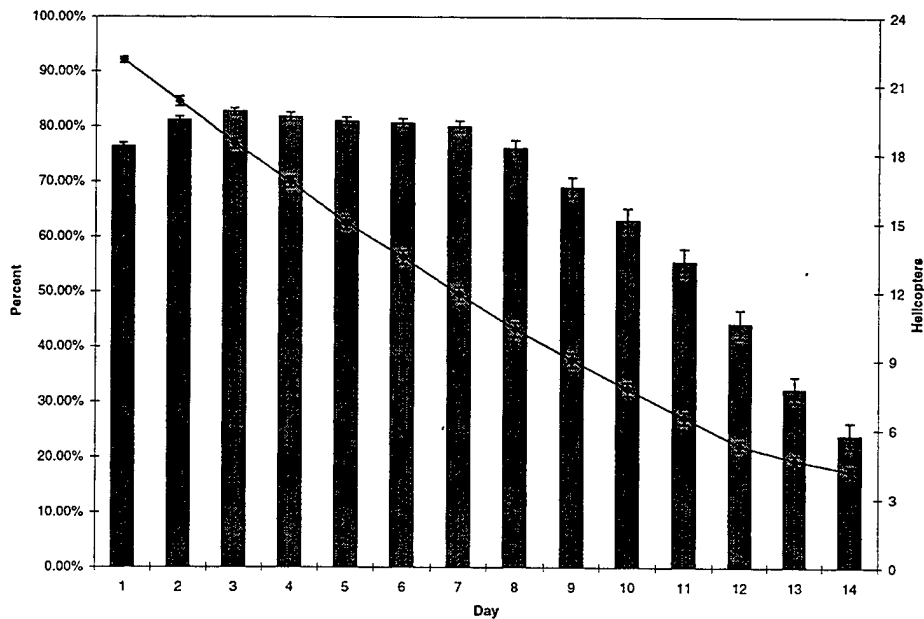


Figure 52. MOEs with 1% of Mission-Affecting Failures Resulting in Fatalities. Case II from Table 18 that shows the effects with 1% of mission-affecting failures resulting in fatalities on the mean percent coverage and the mean number of helicopters surviving.

C. COMPARISONS BETWEEN THE COMANCHE AND THE KIOWA WARRIOR

The RAH-66 Comanche is being acquired to replace the OH-58D Kiowa Warrior. A big question that is always asked when purchasing a new weapon system to replace an older system is, "How does the new system compare to the old system?" Using the simulation, and changing the parameters to fit those of the Kiowa Warrior, a comparison between the two weapon systems can be made.

In performing these comparisons, the assumption was made that the Comanche was twice as stealthy as the Kiowa Warrior. This results in the vulnerability rates for the Comanche being half that of the Kiowa Warrior. It was assumed for the simulation that except for the speed and vulnerability of the helicopters the other parameters are the same for the two helicopters. The different parameters for each helicopter are shown below in Table 19.

	Speed	Mean Time until a Helicopter is Shot Down while in a Low Vulnerability Region	Mean Time until a Helicopter is Shot Down while in a High Vulnerability Region
Comanche	160 Knots	320 Hours	160 Hours
Kiowa Warrior	110 Knots	160 Hours	80 Hours

Table 19. Description of Differences between Two Helicopter Systems.

The other inputs, which remain constant, are as follows:

Numerical Illustration

⇒	24	Number of Helicopters
⇒	300	Time between Scheduled Maintenance Actions (flight hours)
⇒	1	Repair Facilities
⇒	1	Scheduled Maintenance Facilities
⇒	1	Mean Time to Repair a Failure (hours-Exponentially Distributed)
⇒	0.25	Mean Time of Helicopter Turnaround (hours-Exponentially Distributed)
⇒	144-192	Minimum/Maximum Time to Complete Scheduled Maintenance (hours-Uniformly Distributed)
⇒	8.5	Mean Time between Mission-Affecting Failures (hours)
⇒	1.0	Shape of Weibull Distribution Modeling MAF
⇒	0.1	Probability of a failure being fatal (Crash)

One hundred runs of the simulation were conducted for a two-week campaign to compare the effects on the MOEs for the two different helicopters. Figure 53 and Figure 54 show the results of the simulations. It is apparent that the Comanche helicopter outperforms the Kiowa Warrior in this scenario. The Kiowa Warrior is able to maintain mean coverage of the NAI above 50% for about 6 days, while the Comanche is able to maintain mean coverage of the NAI above 50% for over 13 days. During the last week of the campaign, the Kiowa Warrior provides very little mean coverage, while the Comanche is able to provide nominal mean coverage that never drops below 12%. Another large difference between the two helicopters is the mean number of helicopters surviving. The Comanche finished the campaign with a mean of 3.66 helicopters surviving, while the Kiowa Warrior finished with a mean of 2.53 helicopters. This may not seem like a big difference; but in the last week, the Comanche on average, lost almost as many helicopters as the Kiowa Warrior was able to keep alive. The Comanche still finished the campaign with a greater mean number of helicopters surviving than did the Kiowa Warrior.

The reader is cautioned about placing too much emphasis on this one scenario. The simulation operates both helicopters according to the same tactics, but in reality there is nothing that say the helicopters must be operated in the same manner to accomplish the mission. It is possible that other tactics may be employed by the Kiowa Warrior that would allow it to outperform the Comanche. This is just one scenario to illustrate the use of the simulation to aid in side-by-side testing of platforms.

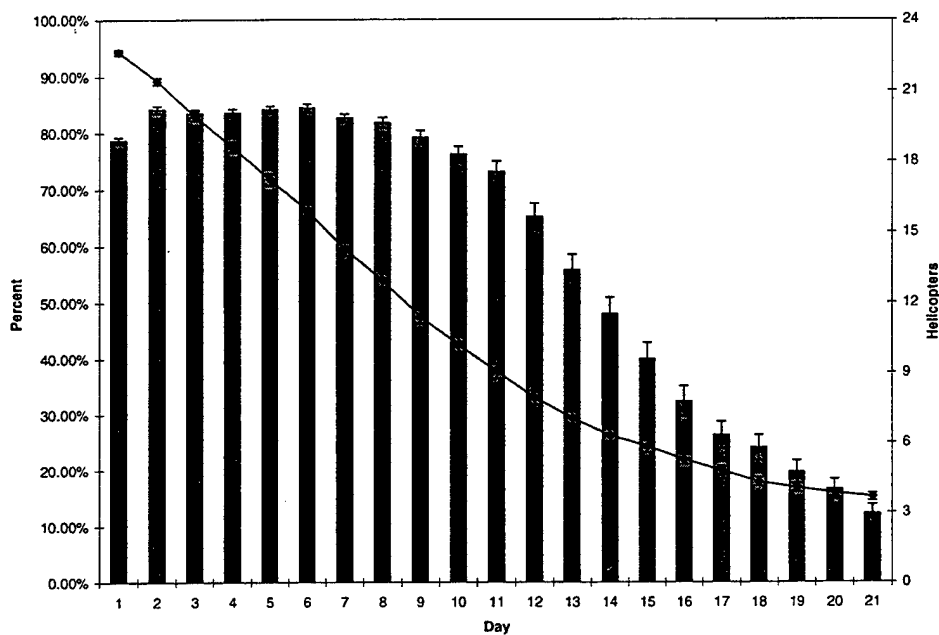


Figure 53. MOEs for the Comache Helicopter. This graph show the results of a simulation for the Comanche helicopter for a three-week campaign.

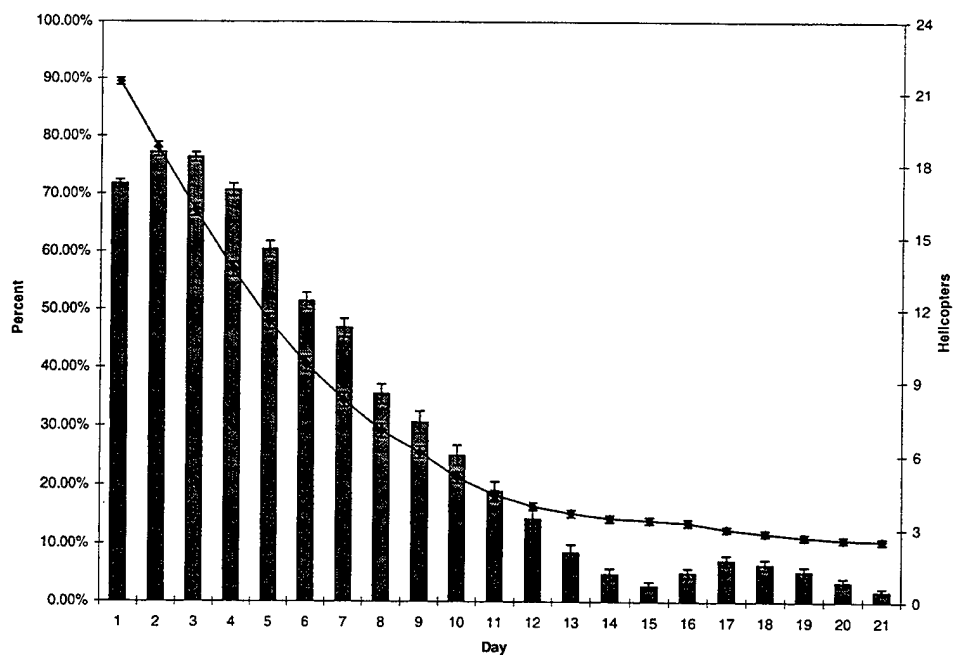


Figure 54. MOEs for the Kiowa Warrior Helicopter. This graph shows the results of a simulation for the Kiowa Warrior helicopter for a three-week campaign.

VII. CONCLUSIONS AND RECOMMENDATIONS

A. SUMMARY OF ANALYSIS

The analysis of the RAH-66 Comanche produced several insights about the operation and maintenance of the reconnaissance system. The insights gained are not just Comanche-specific, but rather can be extended to a variety of mobile reconnaissance systems.

A few of the parameter changes examined resulted in large variations in the measures of effectiveness for both models used in the analysis. The vulnerability of the reconnaissance platforms proved to have the largest effect on the MOEs in both models. Another parameter that resulted in dramatic changes in the output was the mean time between mission-affecting failures. The model utilizing independent identically distributed times between mission-affecting failures also indicated that the type of failures (i.e., infant or wear out) experienced was an important issue that should be addressed by T&E decision-makers. The previously mentioned parameters should all be addressed during actual field testing of the Comanche helicopter. The results produced changed dramatically for each variation of the parameters. These parameters and the physical and operational effects that they represent should be further analyzed and scrutinized to more accurately determine their effects on the operation and maintenance of the platform and the entire system.

Other parameters, such as the time between scheduled maintenance activities, the number of scheduled maintenance facilities, the overhaul times, and the aging effects

produced slight variations in the MOEs. These parameters deserve additional analysis. It is possible that the results observed for them are a result of the scenario chosen to represent a plausible mission for the analysis. Under another set of circumstances and mission characteristics, these parameters are likely to produce completely different results. The new results and conclusions may well indicate that the parameters do need to be addressed during operational testing.

Additionally, more analysis must be done on those parameters such as the number of repair facilities and priority maintenance, which did not produce any noticeable effect on the MOEs. The scenarios and/or other parameters should be adjusted so that the model is stressed with respect to the parameters being observed. Under new conditions and stresses, these parameters may prove to be interesting and warrant additional consideration in operational testing.

B. RECOMMENDATIONS

1. Model Improvement

Several improvements and additions to the simulation model can be incorporated for future studies. The current model only examines some of the aspects of moving the reconnaissance assets to and from a Named Area of Interest. An improvement would be to incorporate an analysis of events occurring while a helicopter pair reconnoiters the NAI. This should include an analysis of the sensors carried onboard the reconnaissance platforms by explicitly including the sensors in the model to represent sensing, detection, and identification of enemy units. Additional improvements include providing the ability

for armed reconnaissance platforms to react to a threat while transiting to and from the NAI, as well as incorporating a means for monitoring several NAIs at once.

2. Further Studies and Analysis

Current ongoing studies continue to analyze the capabilities and limitations of the RAH-66 Comanche helicopter. Future studies conducted, as a follow on to this thesis, will provide additional relevant information that may be incorporated into or even amplify the results of current studies. Additional study and analysis is needed concerning the sensor packages that are being incorporated into the Comanche helicopter. Specific items of study would include sensor failures (which are incorporated in the MTBMAF in this study), the capabilities of individual sensors, the combined capabilities of multiple sensors, the effects of any redundancy that may be incorporated into the sensor systems, and the interaction between the sensors and the platform. Additionally, the ability of a platform to communicate information obtained from its sensors to other assets working in conjunction with it, as well as commanders and other units in need of the acquired information, should also be studied using modeling and simulation. Any operation that employs a reconnaissance asset is also open to studies of the type described here.

C. CONCLUSIONS

This thesis has demonstrated the use of a simple, event-step, stochastic simulation to identify influential parameters involved in operating and maintaining a mobile reconnaissance system. Through the conduct of sensitivity analysis by varying input parameters to observe the effects on the output, influential parameters (and distributional

forms) were investigated. The influential parameters determined should be monitored and scrutinized during Operational Tests of the platform of interest.

The simulation was exercised by conducting sensitivity analysis on several input parameters that correspond to actual operational parameters for the RAH-66 Comanche helicopter. The analysis performed with the simulation can be used to aid in the preparation of the Test and Evaluation Master Plan (TEMP) and conduct of the Operational Test and Evaluation of the Comanche helicopter. Two hypothetical distribution models were used to represent the times between mission-affecting failures to show the versatility that can easily be incorporated into a simulation designed for use on a personal computer.

In addition to the above-mentioned application, the simulation can also be used to assist in the conduct of side-by-side testing of competing reconnaissance platforms by manipulating the input parameters to correspond to the competing platforms. Another possible application for its use would be to analyze the capabilities of different sized units to provide information for force structure decisions.

List of References

Carter, T., 1.2.2.8.4 "Plan Operational Test & Evaluation", Defense Acquisition Deskbook, 18 Dec 1998.

Coyle, P. E., presentation at Modeling and Simulation Conference, Huntsville, Alabama, May 13, 1998, [www.dote.osd.mil/pubs.html]. Date Accessed: 25 October 1999.

Crowder, M. J., and others, *Statistical Analysis of Reliability Data*, Chapman & Hall, 1991.

DOD 5000.2-R, "Mandatory Procedures for MDAPs and MAIS Acquisition Programs", 11 May 1999.

DoD Directive 5141.2, "Director of Operational Test and Evaluation", 17 January 1989.

Feller, W. (1967), *An Introduction to Probability Theory and Its Applications*, Vol. 1, John Wiley & Sons, Inc., New York

Gaver, D. P., "Planning and Conducting T&E", [<http://web.nps.navy.mil/~orfacpag/resumePafes/gaver/planning.htm>], Date Accessed: 25 October 1999.

Hartman, James K., Parry, Sam H., Caldwell, William J., *Aggregated Combat Modeling*, 7 December 1992.

Heath, G. D., *Simulation Analysis of Unmanned Aerial Vehicles (UAV)*, Master's Thesis, Operations Research Department, Naval Postgraduate School, Monterey, California, June 1999.

Law, A. M. and Kelton (1991), *Simulation Modeling and Analysis*, 2nd ed., McGraw-Hill, Inc.

O'Bryan, James F., *M&S Facing Reality*, presentation at Francis Scott Key ITEA Chapter, Aberdeen Proving Ground, Maryland, 16 July 1998, [[http://www.dote.osd.mil/lfte/articles/MSREAL/MSREAL.HTM#Table of Contents](http://www.dote.osd.mil/lfte/articles/MSREAL/MSREAL.HTM#Table%20of%20Contents)], Date Accessed: 30 October 1999.

Ross, Sheldon M., *Introduction to Probability Models*, 6th ed., Academic Press, 1997.

Stoneman, J. G., *Operational Analysis of the Sustainability of a Mobile Military Platform*, Master's Thesis, Operations Research Department, Naval Postgraduate School, Monterey, California, September 1998.

Stork, Kirk A., *Sensors in Object Oriented Discrete Event Simulation*, Master's Thesis, Operations Research Department, Naval Postgraduate School, Monterey, California, September 1996.

[<https://www.msrr.dms0.mil/KeywordMain.htm>], Date Accessed: 15 November 1999.

APPENDIX A: ANALYTICAL MODELS FOR COMPARISON

In order to check the validity of the simulation model, a comparison was made to analytical models developed by Professor Patricia A. Jacobs. The analytical models calculate the expected time spent by an individual helicopter over the high-threat region given that it entered the high-threat region, and the probability of an individual helicopter returning to its home base given that it started a mission. Exponential distributions were assumed for all times to failures and repairs.

Parameters:

λ = Rate of all Mission-affecting Failures

λ_0 = Rate of Non-fatal Mission-affecting Failures

λ_f = Rate of Fatal Mission-affecting Failures

κ_0 = Kill Rate over Ingress Route (attrition and crashes)—Low Threat Region

κ_1 = Kill Rate over Egress Route (attrition and crashes)—Low Threat Region

κ_2 = Kill Rate in High Threat Area (attrition and crashes)—High Threat Region

τ_0 = Ingress Time (hours)

τ_1 = Egress Time (hours)

τ_2 = Time in High Threat Region (hours)

In order to compare the analytical models to the simulation, the values for each of the parameters are set equal to the corresponding value in the simulation. The rate of non-fatal mission-affecting failures (λ_0) is equal to the percentage of mission-affecting failures that are non-fatal (here assumed to be 90%) multiplied by the mission-affecting failure rate ($\lambda = 1/8.5$). The fatal mission-affecting failure rate is calculated in the same fashion. The kill rates for each region are calculated by taking the inverse of the mean time until an individual helicopter is shot down in the respective region. The values for each of the parameters are listed below.

$\lambda = 0.1176$	Rate of all Mission-affecting Failures
$\lambda_0 = 0.1059$	Rate of Non-fatal Mission-affecting Failures
$\lambda_f = 0.01176$	Rate of Fatal Mission-affecting Failures
$\kappa_0 = 0.0125$	Kill Rate over Ingress Route (attrition)—Low Threat Region
$\kappa_1 = 0.0125$	Kill Rate over Egress Route (attrition)—Low Threat Region
$\kappa_2 = 0.025$	Kill Rate in High Threat Area (attrition)—High Threat Region
$\tau_0 = 0.5675$	Ingress Time (hours)
$\tau_1 = 0.4156$	Egress Time (hours)
$\tau_2 = 2.0169$	Time in High Threat Region (hours)

Conditional Expected Time Over High Threat Region|Given the High Threat Region Was Entered =

$$\left[\frac{(1 - \exp(-(\lambda + \kappa_2)\tau_2))}{(\lambda + \kappa_2)} \right]$$

Equation (A-1)

Probability of Mission Survival =

$$\begin{aligned}
& \left[\frac{\lambda_0}{\lambda + \lambda_f + 2\kappa_0} \left(1 - \exp\left(-\left(\lambda + \lambda_f + 2\kappa_0\right)\tau_0\right) \right) \right] \\
& \quad \text{Probability that a mission - affecting failure occurs} \\
& \quad \text{during ingress and platform returns to base.} \\
& + \left[\exp(-(\lambda + \kappa_0)\tau_0) \frac{\lambda_0}{\lambda + \kappa_2} \exp(-(\lambda_f + \kappa_1)\tau_1) (1 - \exp(-(\lambda + \kappa_2)\tau_2)) \right] \\
& \quad \text{Probability that a mission - affecting failure occurs in} \\
& \quad \text{the high threat region and platform returns to base.} \\
& + \left[\exp(-(\lambda + \kappa_0)\tau_0) \exp(-(\lambda + \kappa_2)\tau_2) \exp(-(\lambda_f + \kappa_1)\tau_1) (1 - \exp(-\lambda_0\tau_1)) \right] \\
& \quad \text{Probability that a mission - affecting failure occurs} \\
& \quad \text{during egress and platform returns to base.} \\
& + \left[\exp(-(\lambda + \kappa_0)\tau_0) \exp(-(\lambda + \kappa_2)\tau_2) \exp(-(\lambda + \kappa_1)\tau_1) \right] \\
& \quad \text{Probability that no events occur during the mission flight.}
\end{aligned}$$

Equation (A-2)

The results from the simulation and the analytical models are shown below in Table 20 and add credibility to the validity of the simulation results. In the simulation helicopters move via waypoints when no failures occur, but when a failure occurs, the helicopter returns to the home base via the most direct route. Thus the time it takes to leave an area because of a failure will be somewhat less than the time it took to get into the area. Therefore, and as expected, the simulated probability of return to the home base will be slightly greater than that for the analytical model.

The simulated expected time over the high threat region is slightly higher than the analytical model because of an assumption made in the analytical model. If a helicopter fails while in the high threat region, it immediately and instantaneously moves to the egress route, which is located in a low threat region. The simulation must (realistically) fly each helicopter out of the high threat region if it experiences a mission-affecting failure. This additional time in the high threat region for the simulation model accounts for the difference in the expected time over the high-threat region between the two models.

	Simulation	Analytical Model
Probability of Returning to Home Base given a Helicopter Launch	0.927 (0.0046)	0.918
Expected Time Over High-Threat Region during a Mission given High-Threat Region was Entered	1.774 (0.005) Hours	1.753 Hours

Table 20. Comparison of Simulation and Analytical Models.

APPENDIX B: SIMULATION DATA OUTPUT FOR WEIBULL DISTRIBUTION

The following tables list extended output results from each of the simulations conducted for this thesis: They summarize measures of variability between hypothetical campaigns (100 campaigns/replications).

	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
Day	25%	50%	75%					25%	50%	75%
1	72.42%	78.04%	81.99%	0.63%	77.37%	21.56	0.16	21	22	23
2	75.31%	80.70%	86.65%	0.79%	80.96%	19.2	0.22	17	20	21
3	77.08%	80.97%	86.26%	0.72%	81.28%	16.59	0.27	15	17	18
4	77.41%	82.14%	85.61%	0.70%	81.38%	14.01	0.28	13	14	16
5	74.75%	80.94%	84.77%	0.85%	79.60%	11.4	0.33	9	12	14
6	69.67%	77.67%	84.12%	1.26%	74.92%	8.96	0.31	7	9	11
7	52.69%	71.45%	82.37%	2.36%	64.64%	6.79	0.30	4	6.5	9
8	33.47%	53.14%	73.72%	2.69%	49.92%	5.21	0.24	3	5	7
9	9.66%	33.02%	57.20%	2.74%	34.83%	4.27	0.20	3	4	6
10	0.00%	20.66%	39.82%	2.36%	24.72%	3.39	0.16	2	3	5
11	0.00%	7.78%	26.86%	1.69%	15.09%	2.83	0.13	2	2	4
12	0.00%	0.00%	14.33%	1.41%	8.83%	2.57	0.11	2	2	3
13	0.00%	0.00%	6.97%	1.15%	6.09%	2.35	0.11	1.75	2	3
14	0.00%	0.00%	0.00%	0.71%	2.56%	2.23	0.10	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.28		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.1		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.67		
Mean Repair and Turnaround Time per Entry into the Repair System								0.511009	0.004458	
Mean Missions Started per campaign of 14.0 Days								150.66		
Prob of Returning to Base Safely given started a mission								0.927751		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.3114		
Mean Time in High Threat Region per Entry								1.597238	0.003787	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								260.12		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								131.9227	1.925418	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.091719	0.03096	

Table 21. Data for Figure 3, Figure 9, Figure 13, Figure 17, Figure 18, and Figure 21.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	62.45%	67.38%	71.47%	0.67%	67.23%	20.13	0.20	19	20	22
2	76.72%	81.24%	85.18%	0.66%	80.79%	16.95	0.24	15	17	19
3	76.53%	81.95%	86.66%	0.79%	81.30%	14.1	0.29	12	14	16
4	76.05%	81.81%	87.55%	1.03%	80.31%	11.27	0.32	9	11	13
5	66.04%	77.83%	85.36%	1.32%	76.31%	8.81	0.31	7	8.5	11
6	49.99%	67.47%	82.95%	1.96%	65.86%	6.87	0.29	5	7	8.25
7	40.94%	59.34%	73.31%	2.57%	55.59%	5.46	0.26	3	5	7
8	19.13%	42.22%	65.14%	2.94%	41.18%	4.29	0.20	3	4	5
9	0.00%	29.71%	48.07%	2.68%	29.64%	3.59	0.18	2	3	5
10	0.00%	13.69%	33.88%	2.14%	18.86%	2.93	0.15	2	3	4
11	0.00%	1.08%	25.66%	1.77%	13.05%	2.52	0.13	2	2	3
12	0.00%	0.00%	8.54%	1.57%	8.58%	2.26	0.11	1	2	3
13	0.00%	0.00%	0.00%	1.24%	5.29%	2.1	0.10	1	2	3
14	0.00%	0.00%	0.00%	1.24%	4.06%	1.98	0.09	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								95.52		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								9.42		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								12.6		
Mean Repair and Turnaround Time per Entry into the Repair System								0.558162	0.005323	
Mean Missions Started per campaign of 14.0 Days								147.21		
Prob of Returning to Base Safely given started a mission								0.925209		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								15.89311		
Mean Time in High Threat Region per Entry								1.617756	0.003979	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								235.78		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								113.8934	1.943627	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.714299	0.063173	

Table 22. Data for Figure 4.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	83.46%	86.29%	89.31%	0.47%	86.22%	21.92	0.14	21	22	23
2	79.37%	84.62%	89.03%	0.67%	84.23%	19.47	0.22	18	19	21
3	76.60%	81.54%	84.66%	0.66%	81.18%	16.59	0.26	15	17	18
4	77.53%	81.87%	85.44%	0.66%	81.19%	13.95	0.29	12	14	16
5	74.62%	80.87%	84.82%	0.93%	79.05%	11.29	0.31	9.75	11.5	13
6	69.28%	76.72%	82.05%	1.56%	73.07%	8.86	0.32	7	9	10.25
7	54.21%	65.29%	78.98%	2.13%	63.33%	6.86	0.31	5	6	9
8	31.54%	45.83%	71.16%	2.60%	47.47%	5.2	0.23	3.75	5	7
9	9.39%	34.76%	47.67%	2.46%	33.08%	4.2	0.18	3	4	5
10	5.06%	22.03%	35.77%	1.93%	22.51%	3.41	0.15	2.75	3	4
11	0.00%	13.73%	31.95%	1.81%	17.84%	2.85	0.13	2	3	4
12	0.00%	0.00%	16.42%	1.52%	10.09%	2.54	0.12	2	2	3
13	0.00%	0.00%	0.00%	1.12%	5.28%	2.43	0.11	2	2	3
14	0.00%	0.00%	0.00%	0.92%	3.66%	2.29	0.11	2	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								75.14		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.46		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.25		
Mean Repair and Turnaround Time per Entry into the Repair System								0.49884	0.004345	
Mean Missions Started per campaign of 14.0 Days								146.93		
Prob of Returning to Base Safely given started a mission								0.926121		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.42838		
Mean Time in High Threat Region per Entry								1.611129	0.003711	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								259.62		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								132.5984	1.913532	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.978329	0.027694	

Table 23. Data for Figure 5.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	75.31%	78.74%	82.50%	0.55%	78.72%	22.64	0.11	22	23	23
2	79.88%	83.64%	89.02%	0.64%	84.25%	21.42	0.15	20	21.5	23
3	79.72%	84.47%	87.62%	0.67%	83.52%	19.93	0.20	19	20	21
4	79.22%	83.58%	87.53%	0.66%	83.65%	18.6	0.22	17	19	20
5	80.09%	84.93%	88.70%	0.63%	84.20%	17.22	0.26	16	17	19
6	80.61%	84.95%	89.36%	0.65%	84.48%	15.91	0.27	14	16	18
7	77.43%	83.75%	87.70%	0.71%	82.69%	14.28	0.29	12	15	16
8	76.03%	84.19%	88.75%	0.93%	81.83%	12.95	0.30	11	13	15
9	75.73%	81.72%	86.81%	1.20%	79.25%	11.41	0.30	10	11	13
10	67.23%	79.61%	86.23%	1.43%	76.22%	10.21	0.32	8	10	13
11	65.08%	78.36%	87.22%	1.89%	73.18%	9.06	0.31	7	9	11
12	52.96%	71.22%	83.70%	2.35%	65.18%	7.93	0.32	5	8	10
13	36.51%	63.37%	79.22%	2.76%	55.79%	7.05	0.28	5	7	9
14	28.05%	53.70%	71.22%	2.95%	48.04%	6.31	0.27	4	6	8
15	12.27%	39.98%	67.14%	2.92%	39.98%	5.83	0.25	4	5	7
16	0.00%	33.79%	51.29%	2.73%	32.38%	5.27	0.22	4	5	6
17	0.00%	28.64%	41.33%	2.44%	26.34%	4.78	0.19	3.75	5	6
18	0.00%	23.40%	41.20%	2.25%	24.11%	4.31	0.18	3	4	5
19	0.00%	13.96%	36.14%	2.04%	19.71%	4.05	0.17	3	4	5
20	0.00%	11.18%	34.04%	1.81%	16.65%	3.83	0.17	3	4	5
21	0.00%	0.00%	27.47%	1.66%	12.23%	3.66	0.17	3	3	5
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								143.01		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								14.14		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								6.2		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509688	0.003339	
Mean Missions Started per campaign of 21.0 Days								259.82		
Prob of Returning to Base Safely given started a mission								0.960858		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								31.16501		
Mean Time in High Threat Region per Entry								1.651637	0.002742	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								452.86		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								236.6388	3.227454	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.328528	0.032346	

Table 24. Data for Figure 6.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.26%	77.98%	81.99%	0.61%	77.78%	22.23	0.13	22	22	23
2	77.83%	82.36%	86.50%	0.63%	82.10%	20.21	0.18	19	20	21
3	79.50%	82.69%	87.91%	0.63%	83.28%	18.3	0.23	17	18	20
4	78.25%	82.98%	87.49%	0.66%	82.65%	16.42	0.26	15	17	18
5	79.80%	83.47%	87.27%	0.63%	83.54%	14.75	0.31	13	16	17
6	78.68%	82.76%	85.60%	0.79%	81.71%	12.94	0.32	11	13	15.25
7	75.82%	82.32%	86.99%	0.93%	80.81%	11.19	0.33	9	11.5	14
8	69.12%	81.18%	86.92%	1.73%	75.11%	9.54	0.35	7	10	12
9	53.06%	71.11%	82.34%	2.16%	66.79%	8.29	0.34	6	8	11
10	41.12%	68.94%	81.11%	2.69%	59.86%	6.98	0.31	4.75	7	8.25
11	32.20%	49.69%	66.00%	2.59%	48.75%	5.91	0.29	4	6	7
12	22.52%	41.76%	60.87%	2.72%	41.59%	5.04	0.26	3	5	6
13	0.00%	31.73%	44.02%	2.65%	30.30%	4.42	0.22	3	4	6
14	0.00%	23.48%	41.20%	2.40%	23.67%	3.99	0.18	3	4	5
15	0.00%	0.00%	32.37%	2.14%	15.96%	3.56	0.16	2	4	4.25
16	0.00%	0.00%	15.08%	1.80%	10.25%	3.45	0.15	2	3.5	4
17	0.00%	0.00%	14.14%	1.37%	9.78%	3.16	0.14	2	3	4
18	0.00%	0.00%	20.60%	1.61%	11.12%	2.96	0.14	2	3	4
19	0.00%	0.00%	19.10%	1.57%	10.78%	2.75	0.14	2	3	4
20	0.00%	0.00%	2.87%	1.19%	6.24%	2.6	0.13	1	3	3
21	0.00%	0.00%	0.00%	1.24%	5.16%	2.52	0.13	1	2.5	3
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								115.05		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								11.46		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								10.02		
Mean Repair and Turnaround Time per Entry into the Repair System								0.50974	0.003723	
Mean Missions Started per campaign of 21.0 Days								210.64		
Prob of Returning to Base Safely given started a mission								0.949013		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								24.97815		
Mean Time in High Threat Region per Entry								1.636928	0.003079	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								366.22		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								191.8066	3.016142	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.025909	0.028804	

Table 25. Data for Figure 7.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	71.56%	75.89%	80.66%	0.62%	75.85%	21.36	0.16	20	21	23
2	76.67%	81.54%	86.05%	0.67%	81.53%	18.79	0.21	17.75	19	20
3	78.51%	82.15%	86.24%	0.66%	81.76%	16.31	0.24	15	16.5	18
4	77.38%	82.63%	86.28%	0.66%	82.27%	13.69	0.27	12	13.5	16
5	76.31%	80.91%	84.86%	0.90%	79.63%	11.06	0.31	9	11	12.25
6	67.40%	76.61%	83.77%	1.21%	74.04%	8.57	0.29	7	8	10
7	57.03%	67.23%	78.90%	1.86%	64.99%	6.62	0.29	4	6	8
8	34.28%	45.29%	69.84%	2.42%	49.70%	5.15	0.27	3	4	6.25
9	8.56%	29.04%	43.10%	2.52%	30.64%	4.18	0.23	3	4	5
10	0.00%	12.60%	34.15%	2.44%	20.82%	3.46	0.18	2	3	4
11	0.00%	11.99%	27.83%	1.90%	16.43%	2.85	0.14	2	3	3
12	0.00%	0.00%	16.51%	1.47%	9.49%	2.53	0.11	2	2	3
13	0.00%	0.00%	0.00%	1.18%	5.36%	2.34	0.10	2	2	3
14	0.00%	0.00%	0.00%	0.92%	2.87%	2.27	0.10	2	2	3
15	0.00%	0.00%	0.00%	0.96%	3.37%	2.2	0.09	2	2	3
16	0.00%	0.00%	0.00%	0.65%	2.35%	2.1	0.09	1	2	3
17	0.00%	0.00%	6.87%	0.86%	4.38%	1.95	0.09	1	2	2
18	0.00%	0.00%	6.87%	1.18%	6.21%	1.78	0.09	1	2	2
19	0.00%	0.00%	7.14%	1.08%	5.61%	1.59	0.08	1	1	2
20	0.00%	0.00%	0.00%	0.99%	3.52%	1.51	0.08	1	1	2
21	0.00%	0.00%	0.00%	0.79%	2.52%	1.47	0.08	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								84.26		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								8.35		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								14.18		
Mean Repair and Turnaround Time per Entry into the Repair System								0.510947	0.004387	
Mean Missions Started per campaign of 21.0 Days								155.77		
Prob of Returning to Base Safely given started a mission								0.927682		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								17.84127		
Mean Time in High Threat Region per Entry								1.596653	0.003724	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								268.18		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								142.676	2.600398	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								0.735119	0.019189	

Table 26. Data for Figure 8.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	73.47%	77.22%	80.99%	0.61%	77.04%	21.55	0.14	21	22	23
2	75.89%	81.20%	86.61%	0.69%	81.56%	19.07	0.23	18	19	21
3	77.70%	82.31%	85.88%	0.63%	81.70%	16.34	0.28	14	16	18
4	77.63%	82.30%	87.31%	0.63%	81.98%	14.11	0.31	12	14	16
5	77.50%	83.35%	86.54%	0.86%	81.25%	11.37	0.35	9	11	13
6	71.23%	79.90%	86.02%	1.39%	76.52%	9.04	0.36	6	9	11
7	56.51%	71.63%	82.35%	2.12%	66.23%	6.95	0.33	4	7	9
8	39.57%	57.98%	71.72%	2.51%	52.83%	5.05	0.27	3	5	7
9	0.00%	36.03%	57.20%	2.79%	34.84%	3.87	0.23	2	3	5
10	0.00%	15.04%	37.63%	2.42%	21.94%	3.17	0.19	2	3	4
11	0.00%	6.87%	30.81%	2.03%	16.60%	2.63	0.16	2	2	3
12	0.00%	0.00%	17.36%	1.69%	11.17%	2.24	0.13	1	2	3
13	0.00%	0.00%	6.87%	1.29%	6.89%	1.91	0.10	1	2	2
14	0.00%	0.00%	0.00%	0.98%	2.89%	1.81	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.88		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.04		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.15		
Mean Repair and Turnaround Time per Entry into the Repair System								0.50788	0.004401	
Mean Missions Started per campaign of 14.0 Days								153.54		
Prob of Returning to Base Safely given started a mission								0.927739		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.58288		
Mean Time in High Threat Region per Entry								1.603058	0.003761	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								263.24		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								129.881	1.87038	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.093224	0.031916	

Table 27. Data for Figure 10.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25.00%	50.00%	75.00%					25.00%	50.00%	75.00%
1	72.15%	75.62%	80.30%	0.57%	76.50%	21.56	0.17	21	22	23
2	77.50%	81.47%	85.51%	0.65%	81.16%	18.85	0.22	18	19	20
3	79.32%	84.37%	87.32%	0.61%	83.39%	16.29	0.26	15	17	18
4	76.34%	81.35%	86.49%	0.70%	81.46%	13.85	0.30	12	14	16
5	78.24%	81.62%	86.66%	0.80%	81.57%	11.53	0.34	9	12	14
6	72.69%	81.26%	86.66%	1.35%	77.53%	9.09	0.35	7	9.5	11
7	56.88%	72.51%	81.29%	1.97%	67.17%	7.05	0.33	5	7	9
8	36.38%	62.34%	74.56%	2.62%	54.78%	5.04	0.30	3	5	6.25
9	18.89%	40.74%	61.57%	2.75%	39.87%	3.69	0.23	2	3	5
10	0.00%	24.99%	41.78%	2.64%	25.99%	2.84	0.17	2	2	4
11	0.00%	0.00%	28.37%	1.98%	14.21%	2.33	0.13	1	2	3
12	0.00%	0.33%	21.54%	1.56%	11.47%	1.89	0.11	1	2	3
13	0.00%	0.00%	7.82%	1.31%	7.48%	1.62	0.09	1	1	2
14	0.00%	0.00%	0.00%	1.02%	3.44%	1.51	0.07	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								83.77		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.27		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.22		
Mean Repair and Turnaround Time per Entry into the Repair System								0.508949	0.004364	
Mean Missions Started per campaign of 14.0 Days								156.1		
Prob of Returning to Base Safely given started a mission								0.927963		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.90625		
Mean Time in High Threat Region per Entry								1.601394	0.003719	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								268.36		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								128.1642	1.825705	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.124213	0.032688	

Table 28. Data for Figure 11.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	60.90%	65.27%	68.60%	0.69%	65.25%	20.61	0.19	19	21	22
2	64.50%	68.77%	74.98%	0.80%	69.66%	17.17	0.27	15	18	19
3	63.95%	68.87%	76.21%	0.92%	69.41%	14.02	0.30	12	14	16
4	50.06%	63.21%	69.33%	1.31%	60.02%	10.86	0.32	8	11	13
5	39.04%	49.89%	61.59%	1.52%	48.84%	8.2	0.30	6	8	11
6	26.25%	42.32%	52.53%	1.74%	39.87%	6.38	0.28	4	6	8
7	20.76%	32.68%	43.97%	1.75%	31.04%	4.86	0.24	3	5	6.25
8	1.06%	22.83%	36.15%	1.68%	22.07%	3.9	0.22	2	4	5
9	0.00%	10.34%	26.87%	1.83%	15.54%	3.2	0.18	2	3	4
10	0.00%	1.82%	14.94%	1.43%	9.96%	2.7	0.15	2	2	3
11	0.00%	0.00%	9.38%	1.20%	7.10%	2.17	0.12	1	2	3
12	0.00%	0.00%	0.41%	1.15%	4.54%	1.97	0.10	1	2	3
13	0.00%	0.00%	0.00%	0.89%	3.17%	1.83	0.09	1	2	2
14	0.00%	0.00%	0.00%	0.73%	2.64%	1.74	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								121.22		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								12.06		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								10.2		
Mean Repair and Turnaround Time per Entry into the Repair System								0.678439	0.005747	
Mean Missions Started per campaign of 14.0 Days								137.56		
Prob of Returning to Base Safely given started a mission								0.91909		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								11.80142		
Mean Time in High Threat Region per Entry								1.363013	0.004639	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								207.8		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								110.3635	1.851948	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								2.322277	0.109045	

Table 29. Data for Figure 12.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	78.39%	83.27%	86.60%	0.53%	82.45%	21.87	0.12	21	22	23
2	85.20%	89.58%	91.70%	0.52%	88.89%	19.77	0.18	18	20	21
3	85.45%	88.90%	92.68%	0.50%	88.89%	17.51	0.23	16	17	19
4	84.58%	89.65%	93.40%	0.64%	88.87%	15.42	0.27	14	15	17
5	85.80%	89.81%	92.63%	0.59%	89.24%	13.11	0.29	11	13	15
6	81.93%	87.53%	92.32%	0.72%	86.87%	10.87	0.32	8.75	11	12.25
7	77.46%	87.21%	91.93%	1.48%	82.49%	8.79	0.34	6	9	11
8	65.53%	81.06%	88.29%	2.13%	73.38%	6.79	0.31	4.75	6	8
9	35.50%	59.20%	82.16%	2.98%	55.23%	5.45	0.26	3.75	5	7
10	10.24%	42.62%	61.63%	3.07%	40.44%	4.21	0.22	2.75	4	5
11	0.70%	30.99%	45.63%	2.75%	30.97%	3.5	0.16	2	3	4
12	0.00%	6.14%	36.60%	2.16%	17.48%	2.92	0.13	2	3	4
13	0.00%	0.00%	16.02%	1.71%	10.14%	2.65	0.11	2	3	3
14	0.00%	0.00%	0.00%	1.31%	5.96%	2.48	0.10	2	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								47.91		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								4.76		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								16.76		
Mean Repair and Turnaround Time per Entry into the Repair System								0.39834	0.003481	
Mean Missions Started per campaign of 14.0 Days								156.63		
Prob of Returning to Base Safely given started a mission								0.931303		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								20.99556		
Mean Time in High Threat Region per Entry								1.742852	0.003101	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								289.12		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								146.0683	1.985407	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.714974	0.018502	

Table 30. Data for Figure 14.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.48%	76.59%	80.63%	0.60%	76.19%	21.39	0.16	20	21	23
2	76.71%	81.23%	86.23%	0.71%	81.32%	18.64	0.23	17	19	20
3	78.07%	82.68%	86.70%	0.67%	82.22%	15.66	0.30	14	16	18
4	77.78%	82.77%	87.21%	0.86%	81.66%	13.08	0.32	11	13	15
5	72.44%	80.54%	85.53%	1.16%	77.84%	10.31	0.35	7.75	11	13
6	64.38%	75.36%	81.85%	1.84%	69.67%	8.14	0.36	5	8	11
7	42.35%	66.58%	80.96%	2.43%	61.19%	6.12	0.32	4	5.5	8
8	30.27%	50.46%	70.34%	2.63%	48.75%	4.54	0.27	2.75	4	6
9	16.64%	34.54%	54.37%	2.59%	36.02%	3.36	0.21	2	3	4
10	0.68%	24.63%	37.12%	2.37%	25.58%	2.5	0.17	1	2	3
11	0.00%	6.24%	30.86%	2.03%	16.12%	1.92	0.13	1	2	2
12	0.00%	0.00%	21.60%	1.78%	11.23%	1.66	0.10	1	1	2
13	0.00%	0.00%	13.90%	1.60%	9.18%	1.41	0.08	1	1	2
14	0.00%	0.00%	0.00%	1.22%	5.96%	1.22	0.06	1	1	1
Total Runs							100			
Mean Number of MAF per Campaign of 14.0 Days							81.73			
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days							8.2			
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days							14.58			
Mean Repair and Turnaround Time per Entry into the Repair System							0.511008		0.004428	
Mean Missions Started per campaign of 14.0 Days							151.77			
Prob of Returning to Base Safely given started a mission							0.924952			
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days							17.32763			
Mean Time in High Threat Region per Entry							1.593956		0.003789	
Scheduled Time in High Threat Region							2.01686			
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days							260.9			
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days							121.0823		1.772463	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days							1.077279		0.033694	

Table 31. Data for Figure 15.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.66%	76.36%	79.95%	0.63%	76.25%	21.46	0.16	21	22	23
2	76.65%	81.82%	85.74%	0.66%	80.99%	18.63	0.23	17	19	20
3	77.34%	81.23%	86.87%	0.66%	81.75%	16.21	0.28	14	16	18
4	77.59%	82.45%	86.12%	0.72%	81.71%	13.25	0.33	11	13	15.25
5	75.23%	81.03%	85.38%	1.04%	79.27%	10.67	0.35	8	11	13
6	64.48%	77.39%	82.44%	1.68%	72.07%	8.36	0.33	6	8	11
7	45.49%	68.89%	80.16%	2.29%	63.16%	6.53	0.31	4	6	8.25
8	30.57%	50.15%	72.14%	2.55%	49.25%	5.06	0.27	3	4	7
9	13.60%	33.41%	54.11%	2.59%	36.03%	3.96	0.23	2	3	5
10	0.00%	22.51%	37.39%	2.42%	24.84%	3.29	0.20	2	3	4
11	0.00%	2.38%	25.79%	2.00%	14.23%	2.69	0.16	2	2	3
12	0.00%	0.00%	12.88%	1.68%	9.70%	2.34	0.13	1	2	3
13	0.00%	0.00%	9.48%	1.35%	7.55%	2.09	0.11	1	2	3
14	0.00%	0.00%	7.87%	1.07%	5.94%	1.79	0.10	1	1	2.25
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.38		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.08		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.13		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509968	0.004	
Mean Missions Started per campaign of 14.0 Days								151.22		
Prob of Returning to Base Safely given started a mission								0.926564		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.33481		
Mean Time in High Threat Region per Entry								1.594861	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								260.86		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.1746	1.901	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.079734	0.038	

Table 32. Data for Figure 16.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	71.43%	77.62%	81.28%	0.69%	76.26%	21.61	0.15	21	22	23
2	76.10%	80.81%	84.38%	0.61%	80.43%	18.88	0.23	18	19	21
3	79.39%	82.31%	85.98%	0.59%	82.45%	16.18	0.27	15	16	18
4	77.88%	82.17%	87.14%	0.77%	81.74%	13.59	0.32	12	14	15.25
5	75.13%	81.72%	85.72%	1.18%	78.71%	11.24	0.34	9	11	14
6	69.68%	79.68%	85.74%	1.64%	75.32%	9.03	0.34	7	9	11
7	47.93%	69.15%	81.05%	2.15%	64.13%	6.91	0.32	4	7	9
8	33.65%	51.96%	73.17%	2.62%	50.40%	5.35	0.28	3	5	7
9	7.55%	34.33%	53.63%	2.63%	34.51%	4.23	0.23	3	4	5
10	0.00%	25.79%	40.54%	2.43%	26.56%	3.53	0.19	2	3	4.25
11	0.00%	13.78%	30.03%	2.02%	19.20%	2.76	0.15	2	2.5	4
12	0.00%	0.00%	25.19%	1.68%	12.97%	2.39	0.14	1	2	3
13	0.00%	0.00%	13.73%	1.55%	9.09%	2.1	0.12	1	2	3
14	0.00%	0.00%	14.64%	1.33%	8.76%	1.79	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								83.4		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.27		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.94		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509845	0.004	
Mean Missions Started per campaign of 14.0 Days								154.93		
Prob of Returning to Base Safely given started a mission								0.928322		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.75947		
Mean Time in High Threat Region per Entry								1.601756	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								266.1		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								130.541	1.91	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.098508	0.027	

Table 33. Data for Figure 19.

		Coverage				Helicopters				
		Percentiles							Percentiles	
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	71.34%	76.90%	80.91%	0.70%	76.03%	21.42	0.14	20	22	22
2	77.89%	81.94%	86.21%	0.64%	82.26%	18.69	0.22	17	19	20.25
3	77.71%	83.19%	87.40%	0.68%	82.29%	16.15	0.26	14	16	18
4	77.57%	82.21%	86.23%	0.74%	81.00%	13.72	0.29	12	14	16
5	77.66%	82.54%	87.08%	0.94%	80.91%	11.31	0.29	10	11	13.25
6	68.10%	78.67%	84.82%	1.35%	75.52%	9.15	0.30	7	10	11
7	56.90%	70.37%	81.02%	1.98%	66.41%	7.07	0.28	5	7	9
8	31.31%	51.81%	72.60%	2.64%	50.34%	5.21	0.25	3	5	7
9	3.84%	31.73%	50.37%	2.56%	31.11%	4.18	0.20	3	4	5
10	0.00%	16.13%	34.13%	2.28%	21.70%	3.41	0.16	2	3	4
11	0.00%	13.73%	28.78%	1.79%	17.43%	2.92	0.14	2	3	4
12	0.00%	2.02%	25.20%	1.77%	13.60%	2.53	0.11	2	3	3
13	0.00%	2.76%	20.02%	1.41%	10.95%	2.18	0.11	1	2	3
14	0.00%	2.86%	16.21%	1.51%	10.64%	1.81	0.10	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								83.17		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.3		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.89		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509319	0.004	
Mean Missions Started per campaign of 14.0 Days								154.84		
Prob of Returning to Base Safely given started a mission								0.928345		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.73118		
Mean Time in High Threat Region per Entry								1.610461	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								264.24		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								130.4998	1.933	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.110804	0.030	

Table 34. Data for Figure 20.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.58%	77.66%	81.73%	0.59%	77.67%	21.65	0.16	21	22	23
2	76.97%	82.93%	86.96%	0.72%	82.26%	19.02	0.22	17.75	19	20
3	77.46%	81.82%	88.22%	0.73%	82.00%	16.23	0.26	14	16	18
4	76.62%	82.02%	87.11%	0.71%	81.84%	13.49	0.34	11	13.5	16
5	75.62%	80.95%	86.63%	0.81%	80.57%	10.82	0.38	7.75	11	13
6	68.89%	79.71%	83.88%	1.87%	73.22%	8.41	0.37	6	8	11
7	48.26%	71.80%	82.02%	2.90%	61.40%	6.46	0.34	4	5	9
8	13.24%	46.43%	78.38%	3.31%	45.58%	5.26	0.31	3	4	8
9	0.00%	26.30%	65.03%	3.27%	32.52%	4.11	0.23	3	3	5
10	0.00%	8.64%	44.81%	2.88%	24.23%	3.41	0.18	2	3	4
11	0.00%	3.14%	26.62%	2.26%	16.01%	2.8	0.15	2	2.5	3
12	0.00%	0.00%	12.82%	1.78%	9.73%	2.5	0.14	2	2	3
13	0.00%	0.00%	0.00%	1.48%	5.72%	2.33	0.12	2	2	3
14	0.00%	0.00%	0.00%	1.20%	3.56%	2.24	0.11	2	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								80.74		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.02		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.74		
Mean Repair and Turnaround Time per Entry into the Repair System								0.513323	0.005	
Mean Missions Started per campaign of 14.0 Days								148.63		
Prob of Returning to Base Safely given started a mission								0.926798		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.13487		
Mean Time in High Threat Region per Entry								1.605892	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								256.08		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								129.3895	1.924	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.486483	0.013	

Table 35. Data for Figure 22.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	72.38%	77.14%	81.40%	0.61%	76.71%	21.28	0.16	21	21.5	22
2	77.20%	82.20%	86.69%	0.74%	81.72%	18.71	0.22	17	19	20
3	77.09%	81.36%	86.54%	0.63%	81.78%	16.2	0.27	15	16	18
4	75.70%	80.79%	85.56%	0.70%	81.06%	13.52	0.31	11	14	16
5	75.99%	82.03%	86.37%	1.06%	80.23%	11.04	0.34	9	11	13
6	74.65%	78.65%	83.60%	1.72%	74.50%	8.39	0.31	6	9	10.25
7	53.17%	76.68%	82.33%	2.62%	65.61%	6.37	0.32	4	6	8
8	23.83%	52.20%	75.72%	3.11%	48.23%	4.62	0.25	3	4	6
9	0.00%	25.05%	47.15%	2.83%	29.70%	3.68	0.22	2	3	5
10	0.00%	6.87%	27.50%	2.47%	18.77%	2.98	0.17	2	3	4
11	0.00%	0.05%	23.09%	2.07%	14.24%	2.55	0.13	2	2	3
12	0.00%	0.00%	10.93%	1.59%	8.64%	2.28	0.11	1	2	3
13	0.00%	0.00%	0.00%	1.06%	3.29%	2.12	0.11	1	2	3
14	0.00%	0.00%	0.00%	0.46%	1.10%	2.06	0.11	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								79.26		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.89		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.05		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509588	0.004	
Mean Missions Started per campaign of 14.0 Days								147.76		
Prob of Returning to Base Safely given started a mission								0.925758		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								16.88499		
Mean Time in High Threat Region per Entry								1.597319	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								253.7		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								126.432	1.882	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.416127	0.008	

Table 36. Data for Figure 23.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.56%	76.47%	80.01%	0.59%	75.86%	21.51	0.15	20	22	23
2	77.01%	81.18%	87.07%	0.77%	81.48%	18.81	0.19	18	19	20
3	78.55%	82.01%	86.77%	0.69%	82.19%	16.21	0.24	14	16	18
4	78.78%	82.72%	87.14%	0.61%	82.52%	13.58	0.29	11	13.5	16
5	75.87%	81.18%	85.18%	0.81%	80.25%	10.82	0.33	8.75	11	13.25
6	75.33%	81.11%	85.80%	1.63%	76.76%	8.42	0.33	6	8	11
7	55.03%	71.47%	81.99%	2.45%	65.51%	6.22	0.29	4	6	8
8	28.24%	48.07%	71.18%	2.73%	47.68%	4.79	0.25	3	4	6
9	0.00%	27.88%	47.91%	2.79%	30.52%	3.88	0.20	3	3	5
10	0.00%	14.37%	41.76%	2.36%	21.74%	3.22	0.15	2	3	4
11	0.00%	10.98%	28.57%	1.78%	16.07%	2.65	0.13	2	3	3
12	0.00%	0.00%	20.60%	1.66%	11.19%	2.25	0.10	2	2	3
13	0.00%	0.00%	18.02%	1.35%	9.96%	1.95	0.08	1	2	2
14	0.00%	0.00%	9.14%	1.16%	6.61%	1.71	0.07	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.1		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.02		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.27		
Mean Repair and Turnaround Time per Entry into the Repair System								0.508082	0.004	
Mean Missions Started per campaign of 14.0 Days								152.05		
Prob of Returning to Base Safely given started a mission								0.926702		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.45606		
Mean Time in High Threat Region per Entry								1.599456	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								261.93		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.0269	1.876	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.491271	0.011	

Table 37. Data for Figure 24.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	72.73%	76.49%	80.36%	0.58%	76.49%	21.41	0.17	20	22	23
2	76.39%	80.97%	85.53%	0.67%	81.20%	18.78	0.22	17	19	20
3	77.54%	81.89%	86.63%	0.62%	82.01%	15.99	0.29	14	16	18
4	76.36%	83.29%	87.98%	0.75%	82.19%	13.4	0.32	11	13.5	16
5	76.43%	81.60%	87.06%	1.05%	80.75%	11.03	0.34	8	11	13.25
6	73.21%	79.85%	84.24%	1.33%	77.17%	8.55	0.34	6	8	11
7	54.30%	74.18%	83.22%	2.30%	65.38%	6.45	0.31	4	6	9
8	30.72%	54.23%	78.78%	3.01%	50.70%	5.08	0.26	3	4	7
9	0.00%	30.75%	55.42%	3.05%	33.44%	4.02	0.21	3	4	5
10	0.00%	15.79%	40.66%	2.59%	23.49%	3.26	0.16	2	3	4
11	0.00%	10.46%	27.46%	1.81%	15.38%	2.7	0.12	2	3	3.25
12	0.00%	0.00%	19.18%	1.56%	10.41%	2.38	0.11	2	2	3
13	0.00%	0.00%	16.14%	1.37%	8.97%	2.08	0.10	1	2	3
14	0.00%	0.00%	7.17%	1.25%	6.56%	1.91	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								82.96		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.2		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.89		
Mean Repair and Turnaround Time per Entry into the Repair System								0.510884	0.004	
Mean Missions Started per campaign of 14.0 Days								153.39		
Prob of Returning to Base Safely given started a mission								0.927994		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.60338		
Mean Time in High Threat Region per Entry								1.601278	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								263.84		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.6001	1.906	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.51488	0.011	

Table 38. Data for Figure 25.

APPENDIX C: SIMULATION DATA OUTPUT FOR NON-HOMOGENEOUS FAILURE RATE PROCESS

The following tables list extended output results from each of the simulations conducted for this thesis: They summarize measures of variability between hypothetical campaigns (100 campaigns/replications).

	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
Day	25%	50%	75%					25%	50%	75%
1	74.57%	79.58%	82.59%	0.66%	78.30%	22.49	0.14	22	23	23
2	81.00%	85.00%	88.61%	0.66%	84.47%	21.11	0.19	20	21	22
3	79.75%	84.45%	88.15%	0.62%	83.61%	19.72	0.23	19	20	22
4	80.23%	85.21%	89.54%	0.66%	84.53%	18.31	0.26	17	18.5	20
5	79.30%	83.59%	88.17%	0.68%	83.11%	16.89	0.27	15	17	19
6	78.30%	82.66%	87.81%	0.72%	82.99%	15.44	0.29	14	15	18
7	78.29%	82.50%	87.99%	0.74%	82.62%	14.09	0.31	12	14	16.25
8	77.35%	83.72%	87.52%	1.05%	80.89%	12.7	0.33	10.75	13	15.25
9	74.99%	82.98%	87.00%	1.27%	79.48%	11.33	0.33	9	11	14
10	68.50%	79.83%	87.05%	1.65%	75.95%	10.05	0.32	8	10	12.25
11	64.70%	73.88%	80.79%	1.76%	70.46%	9.03	0.33	7	9	11
12	53.62%	73.13%	81.83%	2.35%	66.28%	8.08	0.32	6	8	10
13	41.99%	61.48%	79.10%	2.49%	57.60%	7.04	0.31	5	7	9
14	32.84%	48.11%	70.47%	2.73%	47.69%	6.21	0.28	4	6	8
15	16.55%	37.63%	59.82%	2.82%	38.79%	5.58	0.26	4	5	7
16	0.00%	27.47%	42.45%	2.49%	28.14%	5.1	0.23	3	4.5	6
17	0.00%	29.20%	43.30%	2.52%	27.03%	4.77	0.21	3	4	6
18	0.00%	22.57%	38.31%	2.24%	24.53%	4.37	0.20	3	4	6
19	0.00%	18.19%	36.55%	2.06%	20.67%	3.96	0.17	3	4	5
20	0.00%	0.00%	33.82%	1.94%	15.02%	3.73	0.17	3	3	5
21	0.00%	0.00%	24.36%	1.79%	11.70%	3.57	0.16	3	3	4
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								144.12		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								14.34		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								6.09		
Mean Repair and Turnaround Time per Entry into the Repair System								0.512936	0.003354	
Mean Missions Started per campaign of 21.0 Days								258.6		
Prob of Returning to Base Safely given started a mission								0.960499		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0 Days								30.95233		
Mean Time in High Threat Region per Entry								1.651085	0.002744	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								449.92		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								233.5836	3.25317	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.329924	0.035045	

Table 39. Data for Figure 26.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	74.91%	78.29%	82.41%	0.63%	78.37%	22.51	0.14	22	23	24
2	78.34%	84.61%	88.17%	0.66%	83.85%	20.64	0.22	19.75	21	22
3	79.71%	83.37%	87.96%	0.62%	83.30%	18.72	0.27	17	19	20.25
4	78.35%	83.21%	86.73%	0.65%	82.36%	16.84	0.32	15	17	19
5	77.50%	82.28%	87.36%	0.71%	82.73%	14.87	0.34	13	16	17
6	75.28%	80.35%	86.50%	1.04%	79.59%	13.14	0.37	11	14	15
7	73.69%	81.09%	85.65%	1.39%	78.26%	11.5	0.40	9	12	14
8	68.67%	77.18%	85.72%	2.02%	72.39%	10.03	0.39	7	10	13
9	57.59%	77.50%	84.18%	2.26%	68.36%	8.57	0.37	6	8.5	11
10	46.10%	69.65%	80.23%	2.55%	60.81%	7.37	0.35	5	7	9.25
11	32.75%	53.21%	75.88%	2.82%	51.55%	6.16	0.32	4	6	8
12	21.75%	39.95%	71.92%	2.97%	44.53%	5.16	0.29	3	4	7
13	0.00%	29.52%	52.93%	2.92%	32.53%	4.44	0.25	3	4	6
14	0.00%	21.16%	43.17%	2.66%	25.33%	4	0.23	2	4	5
15	0.00%	0.00%	34.23%	2.54%	18.90%	3.66	0.19	2	3	4.25
16	0.00%	0.00%	28.41%	2.12%	15.17%	3.38	0.18	2	3	4
17	0.00%	0.00%	24.55%	1.77%	12.88%	3.12	0.16	2	3	4
18	0.00%	12.75%	25.75%	1.65%	14.68%	2.88	0.15	2	3	4
19	0.00%	0.00%	26.16%	1.60%	11.70%	2.62	0.14	1	2	3.25
20	0.00%	0.00%	10.86%	1.40%	7.51%	2.48	0.13	1	2	3
21	0.00%	0.00%	0.00%	1.00%	4.26%	2.37	0.13	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								118.94		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								11.7		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								9.93		
Mean Repair and Turnaround Time per Entry into the Repair System								0.51207	0.003693	
Mean Missions Started per campaign of 21.0 Days								216.25		
Prob of Returning to Base Safely given started a mission								0.949988		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								25.55777		
Mean Time in High Threat Region per Entry								1.633693	0.003041	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								375.46		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								195.1438	2.969122	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.068534	0.034144	

Table 40. Data for Figure 27.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.61%	77.36%	81.97%	0.62%	76.93%	21.55	0.16	20	22	23
2	77.32%	81.43%	86.80%	0.69%	81.82%	18.78	0.22	17	19	21
3	76.46%	80.82%	85.83%	0.69%	80.72%	16.01	0.27	14	16	18
4	77.06%	81.60%	86.14%	0.70%	81.90%	13.35	0.30	11	13	15
5	74.44%	80.87%	85.48%	1.04%	78.98%	10.83	0.31	9	11	12.25
6	70.08%	77.57%	84.78%	1.33%	75.47%	8.48	0.30	6	8	11
7	53.50%	68.55%	78.93%	2.09%	64.12%	6.49	0.29	4	6	8.25
8	22.58%	49.66%	68.11%	2.77%	45.46%	5.07	0.23	3	5	7
9	5.15%	34.02%	50.76%	2.63%	33.22%	4.18	0.20	3	4	5
10	0.00%	26.02%	41.20%	2.37%	25.90%	3.47	0.17	2	3	5
11	0.00%	13.73%	34.33%	1.93%	18.83%	2.83	0.13	2	3	4
12	0.00%	0.00%	24.10%	1.66%	11.57%	2.46	0.11	2	2	3
13	0.00%	0.00%	6.24%	1.25%	5.98%	2.26	0.11	2	2	3
14	0.00%	0.00%	0.00%	0.66%	2.29%	2.17	0.11	1	2	3
15	0.00%	0.00%	0.00%	0.63%	1.98%	2.11	0.10	1	2	3
16	0.00%	0.00%	0.00%	0.61%	1.87%	2.07	0.10	1	2	2.25
17	0.00%	0.00%	0.90%	0.90%	4.12%	1.94	0.10	1	2	2
18	0.00%	0.00%	7.52%	1.02%	5.51%	1.73	0.09	1	1	2
19	0.00%	0.00%	0.00%	1.10%	4.56%	1.64	0.09	1	1	2
20	0.00%	0.00%	0.00%	0.97%	3.72%	1.55	0.09	1	1	2
21	0.00%	0.00%	0.00%	0.83%	3.04%	1.46	0.09	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								83.12		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								8.32		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								14.22		
Mean Repair and Turnaround Time per Entry into the Repair System								0.506872	0.004373	
Mean Missions Started per campaign of 21.0 Days								155.67		
Prob of Returning to Base Safely given started a mission								0.927603		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								17.95225		
Mean Time in High Threat Region per Entry								1.602641	0.003705	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								268.84		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								141.4759	2.589713	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								0.734868	0.019681	

Table 41. Data for Figure 28.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	73.17%	76.84%	81.77%	0.67%	77.05%	21.4	0.17	20.75	22	23
2	78.68%	82.56%	86.07%	0.69%	81.78%	18.73	0.25	17	19	21
3	78.33%	80.96%	85.63%	0.69%	81.77%	15.7	0.32	14	16	18
4	76.21%	81.39%	86.38%	0.78%	80.79%	13.14	0.37	11	13	16
5	73.64%	78.89%	86.38%	1.26%	77.50%	10.79	0.42	8	11	14
6	63.92%	77.97%	84.51%	2.10%	70.76%	8.55	0.39	5	9	12
7	47.30%	67.79%	80.75%	2.81%	60.26%	6.84	0.36	4	7	9
8	6.87%	55.46%	73.21%	3.22%	46.29%	5.33	0.31	3	5	7
9	0.00%	34.51%	57.71%	3.03%	33.24%	4.28	0.25	2	4	6
10	0.00%	10.13%	41.24%	2.69%	23.48%	3.51	0.20	2	3	4.25
11	0.00%	15.14%	34.38%	2.01%	18.54%	2.89	0.17	2	3	4
12	0.00%	0.00%	19.17%	1.77%	11.22%	2.55	0.14	1	2	3
13	0.00%	0.00%	0.00%	1.22%	5.49%	2.33	0.12	1	2	3
14	0.00%	0.00%	0.00%	0.98%	3.05%	2.23	0.11	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14:0 Days								78.07		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.82		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.95		
Mean Repair and Turnaround Time per Entry into the Repair System								0.505559	0.00445	
Mean Missions Started per campaign of 14.0 Days								147.2		
Prob of Returning to Base Safely given started a mission								0.926053		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.0081		
Mean Time in High Threat Region per Entry								1.607571	0.003777	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								253.92		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								129.0415	1.956605	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.052113	0.037308	

Table 42. Data for Figure 29, Figure 33, Figure 40, Figure 41, and Figure 44.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.19%	76.79%	81.26%	0.64%	77.05%	21.39	0.15	20	22	22
2	77.55%	82.97%	86.75%	0.67%	82.15%	18.96	0.22	18	19	21
3	76.60%	81.86%	86.39%	0.72%	81.85%	16.21	0.26	15	16	18
4	76.44%	82.22%	85.62%	0.74%	81.14%	13.38	0.29	11	13	16
5	73.38%	80.00%	85.97%	0.99%	78.84%	10.88	0.35	9	11	13
6	67.39%	78.46%	84.28%	1.63%	74.02%	8.55	0.34	6	9	11
7	56.35%	70.31%	80.20%	2.29%	63.63%	6.39	0.31	4	6	8.25
8	33.58%	49.22%	74.11%	2.81%	49.23%	4.75	0.26	3	4	6.25
9	3.56%	30.24%	57.38%	2.70%	32.81%	3.64	0.20	2	3	5
10	0.00%	13.73%	34.78%	2.35%	21.26%	2.99	0.16	2	3	4
11	0.00%	7.86%	34.38%	2.06%	17.45%	2.61	0.13	2	2	3
12	0.00%	2.05%	16.91%	1.73%	11.75%	2.05	0.11	1	2	3
13	0.00%	0.00%	6.87%	1.41%	6.77%	1.82	0.09	1	2	2
14	0.00%	0.00%	0.00%	1.05%	4.18%	1.7	0.08	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								79.86		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.96		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.34		
Mean Repair and Turnaround Time per Entry into the Repair System								0.507085	0.004426	
Mean Missions Started per campaign of 14.0 Days								150.3		
Prob of Returning to Base Safely given started a mission								0.925815		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.31263		
Mean Time in High Threat Region per Entry								1.594655	0.003804	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								260.56		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								126.1536	1.84997	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.062289	0.035139	

Table 43. Data for Figure 30.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.22%	77.20%	81.01%	0.62%	77.33%	21.51	0.16	20	22	23
2	77.32%	81.60%	86.54%	0.76%	81.90%	19.1	0.22	17.75	19	21
3	77.67%	82.32%	87.33%	0.73%	82.16%	16.53	0.23	15	17	18
4	77.86%	82.38%	86.24%	0.69%	82.22%	13.9	0.27	12	14	15
5	77.29%	82.66%	86.51%	0.77%	81.29%	11.28	0.28	10	11	13
6	71.50%	79.40%	84.36%	1.32%	76.69%	8.74	0.28	7	9	11
7	60.84%	74.88%	82.09%	1.90%	68.87%	6.61	0.27	5	7	9
8	33.37%	55.33%	73.95%	2.52%	51.98%	4.7	0.24	3	4	6
9	8.82%	36.27%	56.59%	2.90%	37.22%	3.55	0.18	2	3	5
10	0.00%	13.69%	41.93%	2.65%	23.21%	2.87	0.15	2	3	3
11	0.00%	0.00%	28.52%	2.12%	14.81%	2.38	0.11	2	2	3
12	0.00%	0.00%	21.27%	1.46%	10.79%	2.02	0.10	1	2	3
13	0.00%	0.00%	12.19%	1.54%	8.45%	1.76	0.09	1	2	2
14	0.00%	0.00%	0.00%	1.05%	4.43%	1.59	0.07	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								82.21		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.18		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.23		
Mean Repair and Turnaround Time per Entry into the Repair System								0.50807	0.00438	
Mean Missions Started per campaign of 14.0 Days								154.04		
Prob of Returning to Base Safely given started a mission								0.927259		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.7887		
Mean Time in High Threat Region per Entry								1.603188	0.003694	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								266.3		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.4619	1.824358	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.113123	0.028968	

Table 44. Data for Figure 31.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	75.65%	79.73%	83.60%	0.60%	79.54%	21.53	0.16	21	22	23
2	79.42%	82.55%	87.60%	0.66%	82.83%	19.14	0.23	18	19	21
3	77.28%	82.17%	87.08%	0.68%	81.70%	16.53	0.26	15	17	19
4	77.59%	82.22%	88.20%	0.72%	82.77%	14.18	0.28	12.75	14	16
5	75.60%	80.80%	85.65%	0.84%	80.71%	11.55	0.31	9.75	11.5	14
6	73.01%	81.37%	85.64%	1.28%	77.90%	9.04	0.31	7	9	11
7	58.09%	72.08%	80.15%	1.84%	67.36%	6.74	0.28	5	7	8
8	36.77%	51.78%	68.73%	2.31%	50.98%	4.98	0.26	3	5	7
9	11.71%	37.26%	53.34%	2.42%	34.85%	3.81	0.22	2	3.5	5
10	0.00%	18.30%	35.67%	2.28%	21.82%	3.13	0.20	2	3	4
11	0.00%	7.61%	28.82%	2.12%	16.93%	2.6	0.14	2	2	3
12	0.00%	0.00%	21.22%	1.68%	10.98%	2.22	0.10	2	2	3
13	0.00%	0.00%	6.87%	1.16%	6.08%	1.99	0.09	1	2	3
14	0.00%	0.00%	0.00%	0.90%	3.03%	1.91	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								78.28		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.67		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.42		
Mean Repair and Turnaround Time per Entry into the Repair System								0.499622	0.004377	
Mean Missions Started per campaign of 14.0 Days								151.43		
Prob of Returning to Base Safely given started a mission								0.927062		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.66401		
Mean Time in High Threat Region per Entry								1.61119	0.00375	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								263.12		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								130.1922	1.862963	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.043132	0.03002	

Table 45. Data for Figure 32.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	74.21%	76.94%	81.00%	0.53%	77.67%	21.63	0.16	20.75	22	23
2	79.10%	83.37%	86.12%	0.69%	82.94%	18.92	0.24	17	19	21
3	77.74%	81.28%	84.69%	0.69%	80.95%	16.24	0.31	14	16	19
4	75.58%	81.85%	86.02%	0.74%	80.82%	13.59	0.37	11	13	17
5	74.70%	80.03%	84.69%	0.89%	78.22%	11.17	0.38	8	11	14
6	66.31%	77.88%	83.52%	1.67%	72.38%	8.75	0.38	6	8.5	11.25
7	44.88%	68.65%	80.03%	2.38%	62.10%	6.95	0.35	4.75	6	9
8	28.09%	48.96%	70.21%	2.77%	47.50%	5.58	0.30	3.75	5	7
9	4.89%	34.75%	63.21%	2.87%	34.63%	4.57	0.26	3	4	6
10	0.00%	21.16%	40.56%	2.66%	25.50%	3.9	0.23	2	4	4.25
11	0.00%	13.73%	34.17%	2.35%	20.74%	3.18	0.18	2	3	4
12	0.00%	0.00%	19.46%	1.97%	12.59%	2.79	0.15	2	3	3
13	0.00%	0.00%	0.00%	1.48%	6.56%	2.57	0.14	2	2	3
14	0.00%	0.00%	0.00%	1.17%	4.01%	2.46	0.13	2	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								80.52		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.03		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.51		
Mean Repair and Turnaround Time per Entry into the Repair System								0.507964	0.004445	
Mean Missions Started per campaign of 14.0 Days								150.68		
Prob of Returning to Base Safely given started a mission								0.928524		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.4107		
Mean Time in High Threat Region per Entry								1.605289	0.003744	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								260.3		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								132.8203	1.990931	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.092635	0.03709	

Table 46. Data for Figure 34.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	67.03%	71.09%	75.25%	0.64%	70.74%	20.93	0.18	20	21	22
2	68.02%	72.27%	76.39%	0.63%	71.77%	17.5	0.25	16	18	19.25
3	66.48%	71.33%	76.07%	0.75%	71.15%	14.23	0.31	12	15	16
4	59.35%	67.40%	76.69%	1.33%	66.43%	11.25	0.33	9	11	13.25
5	44.75%	62.08%	70.77%	1.66%	57.01%	8.66	0.32	6.75	9	11
6	31.63%	43.81%	62.06%	1.98%	46.06%	6.48	0.30	4	7	9
7	25.44%	35.61%	47.97%	1.86%	35.04%	4.57	0.25	3	4	6
8	7.60%	23.97%	35.46%	1.74%	23.23%	3.37	0.20	2	3	4
9	0.00%	8.42%	22.32%	1.64%	14.07%	2.59	0.17	2	2	3
10	0.00%	0.00%	12.46%	1.22%	7.94%	2.16	0.14	1	2	2
11	0.00%	0.00%	13.28%	1.28%	7.60%	1.9	0.11	1	2	2
12	0.00%	0.00%	6.87%	1.01%	5.35%	1.62	0.09	1	1	2
13	0.00%	0.00%	0.00%	0.97%	4.35%	1.46	0.07	1	1	2
14	0.00%	0.00%	0.00%	0.71%	2.29%	1.33	0.06	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								118.18		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								11.67		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								11		
Mean Repair and Turnaround Time per Entry into the Repair System								0.656172	0.006	
Mean Missions Started per campaign of 14.0 Days								141.33		
Prob of Returning to Base Safely given started a mission								0.919798		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								12.63148		
Mean Time in High Threat Region per Entry								1.390877	0.005	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								217.96		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								109.0396	1.741	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								2.046475	0.084	

Table 47. Data for Figure 35.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	76.57%	79.92%	82.58%	0.55%	79.75%	21.45	0.16	21	22	23
2	78.38%	82.56%	88.19%	0.68%	82.66%	18.85	0.22	18	19	20
3	78.16%	82.54%	87.33%	0.68%	82.89%	16.14	0.25	15	16	18
4	76.85%	82.07%	85.79%	0.69%	81.67%	13.51	0.30	11	14	16
5	77.87%	81.01%	87.30%	1.02%	81.00%	11.07	0.33	9	11	14
6	70.17%	77.79%	84.80%	1.33%	75.29%	8.64	0.35	6	9	11
7	48.51%	68.84%	79.30%	2.08%	63.05%	6.75	0.33	4	7	9.25
8	27.57%	53.51%	73.47%	2.81%	48.84%	5.18	0.28	3	5	7
9	3.45%	34.84%	53.42%	2.76%	34.72%	4.03	0.24	2	3.5	5
10	0.00%	27.07%	43.03%	2.48%	26.57%	3.32	0.19	2	3	4.25
11	0.00%	17.36%	36.85%	2.12%	20.38%	2.74	0.14	2	3	4
12	0.00%	1.83%	26.36%	1.83%	13.90%	2.2	0.11	1	2	3
13	0.00%	0.00%	9.49%	1.17%	6.47%	1.97	0.10	1	2	2
14	0.00%	0.00%	0.00%	1.25%	5.73%	1.84	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								80.21		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.88		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.28		
Mean Repair and Turnaround Time per Entry into the Repair System								0.504024	0.004425	
Mean Missions Started per campaign of 14.0 Days								152.32		
Prob of Returning to Base Safely given started a mission								0.927258		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.8017		
Mean Time in High Threat Region per Entry								1.611135	0.003693	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								265.18		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								128.6829	1.893625	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.048617	0.031614	

Table 48. Data for Figure 36.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	81.59%	85.51%	88.44%	0.50%	85.04%	22.18	0.14	22	22	23
2	85.36%	88.23%	92.95%	0.52%	88.93%	19.97	0.20	19	20	21
3	84.67%	88.52%	92.31%	0.55%	88.64%	17.51	0.24	16	17	19
4	84.15%	89.14%	92.42%	0.65%	88.51%	15.34	0.27	14	15.5	17
5	84.84%	89.08%	92.71%	0.62%	88.31%	13.06	0.31	11	13	15.25
6	84.10%	87.62%	91.61%	0.80%	87.05%	10.84	0.33	9	11	13
7	76.26%	84.73%	90.96%	1.65%	80.79%	8.74	0.34	6	9	11
8	60.07%	81.69%	89.19%	2.46%	72.40%	7.04	0.31	5	7	9
9	41.25%	59.10%	83.20%	3.03%	58.29%	5.48	0.28	3	5	7
10	23.30%	43.23%	71.01%	2.93%	43.97%	4.28	0.23	3	4	6
11	9.27%	30.37%	48.28%	2.66%	33.16%	3.54	0.20	2	3	5
12	0.00%	20.60%	43.35%	2.78%	25.94%	3.01	0.17	2	3	4
13	0.00%	0.00%	29.89%	2.20%	15.40%	2.66	0.16	1.75	2	3
14	0.00%	0.00%	13.73%	1.83%	9.42%	2.46	0.14	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								47.76		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								4.77		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								16.77		
Mean Repair and Turnaround Time per Entry into the Repair System								0.394097	0.003	
Mean Missions Started per campaign of 14.0 Days								160.09		
Prob of Returning to Base Safely given started a mission								0.932725		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								21.58729		
Mean Time in High Threat Region per Entry								1.749848	0.003	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								296.08		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								146.9172	1.983	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.717077	0.019	

Table 49. Data for Figure 37.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.14%	77.08%	80.19%	0.54%	76.49%	21.27	0.15	20	21	23
2	79.74%	83.54%	86.79%	0.57%	83.30%	18.68	0.21	17	19	20
3	77.93%	82.91%	87.23%	0.82%	82.45%	16.08	0.26	14	16	18
4	77.56%	82.99%	87.03%	0.75%	82.68%	13.56	0.30	12	13.5	16
5	73.51%	80.21%	84.22%	0.90%	78.96%	10.98	0.33	9	11	14
6	68.92%	75.41%	83.15%	1.30%	74.48%	8.88	0.33	6	9	11
7	56.51%	72.23%	82.26%	1.95%	66.92%	6.85	0.32	4	7	9
8	41.20%	59.56%	73.17%	2.28%	55.57%	5.12	0.27	3	5	7
9	21.56%	41.09%	62.32%	2.56%	41.53%	3.68	0.22	2	3	5
10	6.14%	31.89%	43.84%	2.42%	29.72%	2.7	0.17	1	2	3
11	0.00%	10.42%	34.07%	2.33%	19.40%	2.18	0.13	1	2	3
12	0.00%	0.98%	27.89%	1.84%	14.39%	1.77	0.10	1	1	2
13	0.00%	0.00%	16.19%	1.41%	9.06%	1.54	0.08	1	1	2
14	0.00%	0.00%	6.93%	1.25%	6.63%	1.35	0.07	1	1	1
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								84.02		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.35		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.3		
Mean Repair and Turnaround Time per Entry into the Repair System								0.505856	0.004	
Mean Missions Started per campaign of 14.0 Days								158.3		
Prob of Returning to Base Safely given started a mission								0.928459		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								18.29522		
Mean Time in High Threat Region per Entry								1.604257	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								273.7		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								125.698	1.821	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.118063	0.031	

Table 50. Data for Figure 38.

	Coverage					Helicopters				
	Percentiles							Percentiles		
Day	25%	50%	75%	se	Percent Coverage	Surviving Helos	se	25%	50%	75%
1	72.68%	76.14%	81.66%	0.59%	76.56%	21.42	0.15	20	22	22.25
2	77.63%	82.90%	87.84%	0.67%	82.71%	18.77	0.23	17	19	20.25
3	76.67%	80.57%	85.82%	0.67%	81.61%	16.09	0.26	15	16	18
4	76.84%	82.37%	88.52%	0.73%	82.18%	13.54	0.30	12	14	15.25
5	74.32%	81.64%	85.18%	0.92%	79.68%	11.18	0.30	9.75	12	13
6	70.08%	80.77%	87.26%	1.48%	76.45%	8.84	0.33	7	9	11
7	53.03%	68.90%	80.43%	2.08%	64.81%	6.75	0.33	4	6	9
8	25.27%	51.17%	69.43%	2.72%	48.02%	5.09	0.28	3	5	7
9	13.22%	36.93%	60.51%	2.80%	38.63%	3.91	0.22	2	4	5
10	0.00%	27.00%	46.99%	2.53%	27.32%	3.2	0.18	2	3	4
11	0.00%	7.84%	32.00%	2.04%	17.65%	2.74	0.15	2	2	4
12	0.00%	0.00%	23.07%	1.66%	12.18%	2.32	0.11	1	2	3
13	0.00%	0.00%	7.68%	1.38%	7.65%	2.04	0.11	1	2	3
14	0.00%	0.00%	6.87%	1.26%	6.56%	1.77	0.09	1	1.5	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.72		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.17		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.06		
Mean Repair and Turnaround Time per Entry into the Repair System								0.504628	0.0049	
Mean Missions Started per campaign of 14.0 Days								154.71		
Prob of Returning to Base Safely given started a mission								0.928156		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.80353		
Mean Time in High Threat Region per Entry								1.605006	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								266.22		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								128.6419	1.897	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.100086	0.034	

Table 51. Data for Figure 39.

	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
Day	25%	50%	75%					25%	50%	75%
1	73.29%	77.63%	81.23%	0.61%	77.25%	21.31	0.15	20	22	22
2	78.27%	81.29%	85.79%	0.64%	82.14%	18.75	0.20	17	19	20
3	77.83%	81.89%	85.78%	0.61%	81.67%	16.33	0.24	15	16	18
4	76.88%	81.48%	87.75%	0.74%	82.19%	13.76	0.30	13	14	15.25
5	75.76%	81.15%	86.56%	0.98%	79.56%	11.4	0.33	9	12	13
6	68.29%	78.07%	84.68%	1.54%	74.19%	8.93	0.33	7	9	10
7	51.46%	70.13%	79.60%	2.17%	63.24%	6.68	0.29	5	6	8.25
8	32.33%	48.07%	66.92%	2.41%	46.90%	5.06	0.25	3	5	6
9	2.54%	30.13%	50.09%	2.72%	31.80%	4.04	0.19	3	4	5
10	0.00%	17.60%	34.50%	2.12%	20.81%	3.39	0.15	2	3	4
11	0.00%	11.75%	30.12%	1.96%	17.62%	2.79	0.12	2	2.5	4
12	0.00%	3.31%	22.90%	1.69%	12.39%	2.42	0.11	2	2	3
13	0.00%	0.00%	20.27%	1.49%	10.38%	2.1	0.09	1	2	3
14	0.00%	0.00%	9.99%	1.18%	7.34%	1.87	0.09	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								80.64		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.13		
Mean Repair and Turnaround Time per Entry into the Repair System								0.507015	0.004	
Mean Missions Started per campaign of 14.0 Days								151.42		
Prob of Returning to Base Safely given started a mission								0.926925		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.44083		
Mean Time in High Threat Region per Entry								1.60081	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								261.48		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								129.8026	1.911	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.073486	0.032	

Table 52. Data for Figure 42.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	74.83%	78.41%	81.99%	0.53%	78.14%	21.53	0.16	21	22	23
2	77.59%	82.20%	85.99%	0.69%	82.27%	18.94	0.22	18	19	21
3	77.27%	82.04%	87.66%	0.67%	82.12%	16.51	0.23	15	16.5	18
4	78.83%	81.74%	87.49%	0.70%	82.30%	14.08	0.25	13	14	16
5	75.75%	81.01%	86.14%	0.89%	80.00%	11.57	0.29	10	12	13.25
6	70.59%	79.98%	84.96%	1.51%	75.45%	9.15	0.28	7	9	11
7	60.49%	72.05%	81.04%	1.95%	67.31%	7	0.25	5.75	7	8.25
8	35.49%	53.50%	69.07%	2.27%	51.85%	5.34	0.24	4	5	7
9	13.73%	31.74%	49.63%	2.56%	34.13%	4.2	0.22	3	4	5
10	0.00%	18.37%	34.78%	2.40%	23.68%	3.45	0.18	2	3	4
11	0.00%	10.62%	28.95%	1.89%	16.98%	2.78	0.14	2	3	4
12	0.00%	1.10%	26.69%	1.66%	12.37%	2.41	0.12	2	2	3
13	0.00%	0.00%	18.34%	1.33%	9.30%	2.14	0.12	1	2	3
14	0.00%	0.00%	19.08%	1.41%	9.93%	1.82	0.10	1	2	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								83.13		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.25		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.93		
Mean Repair and Turnaround Time per Entry into the Repair System								0.507812	0.004	
Mean Missions Started per campaign of 14.0 Days								155.34		
Prob of Returning to Base Safely given started a mission								0.928608		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.90018		
Mean Time in High Threat Region per Entry								1.599778	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								268.54		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								131.7001	1.910	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.105218	0.030	

Table 53. Data for Figure 43.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	71.02%	75.76%	79.60%	0.60%	75.53%	21.47	0.15	21	22	23
2	77.34%	82.90%	87.23%	0.70%	82.09%	18.88	0.22	17	19	20
3	75.87%	81.21%	85.78%	0.67%	81.00%	16.35	0.29	15	17	18
4	77.48%	82.28%	86.33%	0.66%	81.79%	13.57	0.36	12	14	16
5	76.27%	81.35%	84.93%	0.83%	79.71%	10.91	0.37	8	11	14
6	71.58%	79.11%	85.82%	1.67%	75.18%	8.55	0.36	5	9	11
7	50.32%	72.09%	83.49%	2.41%	64.23%	6.25	0.30	4	6	9
8	16.22%	46.77%	77.28%	3.14%	46.08%	4.79	0.25	3	4	6
9	0.00%	18.45%	54.58%	3.03%	29.37%	3.77	0.19	2	3	4.25
10	0.00%	6.63%	31.87%	2.55%	20.08%	3.2	0.17	2	3	4
11	0.00%	5.45%	31.31%	2.25%	17.34%	2.71	0.12	2	2.5	3
12	0.00%	0.00%	22.80%	1.63%	11.18%	2.36	0.11	2	2	3
13	0.00%	0.00%	0.00%	1.21%	5.04%	2.19	0.10	1	2	3
14	0.00%	0.00%	0.00%	0.89%	3.20%	2.08	0.09	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								79.28		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.94		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.98		
Mean Repair and Turnaround Time per Entry into the Repair System								0.508803	0.004	
Mean Missions Started per campaign of 14.0 Days								147.97		
Prob of Returning to Base Safely given started a mission								0.925931		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.04725		
Mean Time in High Threat Region per Entry								1.595438	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								256.44		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.994	1.895	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.477403	0.012	

Table 54. Data for Figure 45.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.10%	77.79%	81.78%	0.59%	77.54%	21.42	0.15	21	21	23
2	77.56%	82.53%	87.04%	0.67%	82.16%	18.74	0.21	17	19	20
3	75.76%	81.83%	85.94%	0.67%	81.04%	16	0.25	15	16	18
4	77.99%	82.21%	87.51%	0.72%	82.29%	13.23	0.32	11	13	15.25
5	76.25%	80.48%	84.79%	0.79%	80.23%	10.85	0.33	9	11	13
6	70.59%	79.89%	86.11%	1.67%	75.52%	8.32	0.34	5	8	11
7	51.06%	69.29%	81.76%	2.52%	62.23%	6.15	0.29	4	5	8
8	22.67%	45.01%	73.24%	2.92%	45.42%	4.78	0.23	3	4	6
9	0.00%	27.00%	46.05%	2.75%	28.69%	3.75	0.16	3	3	4
10	0.00%	14.44%	30.77%	2.35%	20.35%	3.05	0.15	2	3	4
11	0.00%	6.79%	31.29%	1.87%	14.79%	2.68	0.13	2	2.5	3
12	0.00%	0.00%	20.24%	1.64%	10.27%	2.42	0.12	2	2	3
13	0.00%	0.00%	0.00%	1.16%	5.42%	2.25	0.10	1.75	2	3
14	0.00%	0.00%	0.00%	0.79%	2.47%	2.2	0.10	1.75	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								78.55		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.89		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.91		
Mean Repair and Turnaround Time per Entry into the Repair System								0.507351	0.004	
Mean Missions Started per campaign of 14.0 Days								147.53		
Prob of Returning to Base Safely given started a mission								0.926117		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								16.95767		
Mean Time in High Threat Region per Entry								1.595765	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								255.04		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								126.6131	1.900	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.414009	0.009	

Table 55. Data for Figure 46.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.99%	77.33%	81.39%	0.59%	76.89%	21.22	0.15	20	21	22
2	76.98%	81.93%	85.47%	0.66%	81.27%	18.56	0.24	17	19	21
3	78.38%	81.61%	86.81%	0.62%	81.97%	15.95	0.30	14	16	18
4	77.72%	82.63%	86.78%	0.63%	82.63%	13.29	0.35	11	14	16
5	76.34%	81.55%	84.51%	0.93%	79.77%	10.77	0.37	8	11	13
6	70.93%	77.27%	85.35%	1.91%	74.31%	8.45	0.37	6	8	11
7	48.99%	69.90%	79.39%	2.52%	61.81%	6.2	0.34	4	5.5	8
8	23.54%	46.43%	69.36%	2.89%	44.46%	4.67	0.27	3	4	6
9	0.00%	26.06%	51.26%	2.79%	28.87%	3.64	0.21	2	3	4
10	0.00%	6.87%	32.70%	2.52%	19.20%	3.07	0.16	2	3	4
11	0.00%	5.93%	28.12%	1.84%	14.29%	2.65	0.14	2	2.5	3
12	0.00%	0.00%	12.19%	1.38%	8.06%	2.34	0.12	1	2	3
13	0.00%	0.00%	15.08%	1.54%	9.58%	2.13	0.11	1	2	3
14	0.00%	0.00%	13.73%	1.35%	9.06%	1.73	0.09	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								78.8		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.89		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.38		
Mean Repair and Turnaround Time per Entry into the Repair System								0.506629	0.004	
Mean Missions Started per campaign of 14.0 Days								148.8		
Prob of Returning to Base Safely given started a mission								0.925168		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.05889		
Mean Time in High Threat Region per Entry								1.594413	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								256.78		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								125.4098	1.891	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.47881	0.011	

Table 56. Data for Figure 47.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	71.59%	76.56%	80.47%	0.59%	76.20%	21.29	0.19	20	22	23
2	77.79%	81.60%	86.75%	0.70%	82.58%	18.67	0.25	17	19	21
3	75.75%	80.79%	85.78%	0.71%	80.70%	15.99	0.28	14	16	18
4	77.62%	82.78%	87.35%	0.67%	82.75%	13.48	0.30	11.75	13.5	15
5	75.88%	82.90%	88.37%	0.85%	81.80%	10.95	0.34	9	11	13
6	74.25%	81.40%	86.51%	1.52%	77.93%	8.61	0.35	7	9	11
7	53.93%	74.58%	82.20%	2.37%	65.65%	6.6	0.31	4	6	9
8	32.57%	58.72%	74.91%	2.94%	52.23%	4.88	0.25	3	5	7
9	0.00%	28.37%	50.35%	2.88%	30.39%	3.86	0.20	2	3.5	5
10	0.00%	14.05%	37.68%	2.41%	22.35%	3.14	0.16	2	3	4
11	0.00%	6.87%	30.78%	1.84%	16.10%	2.68	0.13	2	3	3
12	0.00%	0.00%	20.43%	1.61%	11.87%	2.3	0.12	1	2	3
13	0.00%	0.00%	20.60%	1.63%	10.84%	2.04	0.11	1	2	3
14	0.00%	0.00%	6.87%	1.22%	6.16%	1.76	0.09	1	1	2
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.28		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.13		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								14.11		
Mean Repair and Turnaround Time per Entry into the Repair System								0.50595	0.004	
Mean Missions Started per campaign of 14.0 Days								153.26		
Prob of Returning to Base Safely given started a mission								0.927444		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.68068		
Mean Time in High Threat Region per Entry								1.60466	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								264.44		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								127.0618	1.893	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								0.510185	0.013	

Table 57. Data for Figure 48.

APPENDIX D: SIMULATION DATA OUTPUT FOR ADDITIONAL COMPARISONS

The following tables list extended output results from each of the simulations conducted for this thesis: They summarize measures of variability between hypothetical campaigns (100 campaigns/replications).

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.42%	78.04%	81.99%	0.63%	77.37%	21.56	0.16	21	22	23
2	75.31%	80.70%	86.65%	0.79%	80.96%	19.2	0.22	17	20	21
3	77.08%	80.97%	86.26%	0.72%	81.28%	16.59	0.27	15	17	18
4	77.41%	82.14%	85.61%	0.70%	81.38%	14.01	0.28	13	14	16
5	74.75%	80.94%	84.77%	0.85%	79.60%	11.4	0.33	9	12	14
6	69.67%	77.67%	84.12%	1.26%	74.92%	8.96	0.31	7	9	11
7	52.69%	71.45%	82.37%	2.36%	64.64%	6.79	0.30	4	6.5	9
8	33.47%	53.14%	73.72%	2.69%	49.92%	5.21	0.24	3	5	7
9	9.66%	33.02%	57.20%	2.74%	34.83%	4.27	0.20	3	4	6
10	0.00%	20.66%	39.82%	2.36%	24.72%	3.39	0.16	2	3	5
11	0.00%	7.78%	26.86%	1.69%	15.09%	2.83	0.13	2	2	4
12	0.00%	0.00%	14.33%	1.41%	8.83%	2.57	0.11	2	2	3
13	0.00%	0.00%	6.97%	1.15%	6.09%	2.35	0.11	1.75	2	3
14	0.00%	0.00%	0.00%	0.71%	2.56%	2.23	0.10	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								81.28		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								8.1		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.67		
Mean Repair and Turnaround Time per Entry into the Repair System								0.511009	0.004	
Mean Missions Started per campaign of 14.0 Days								150.66		
Prob of Returning to Base Safely given started a mission								0.927751		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.3114		
Mean Time in High Threat Region per Entry								1.597238	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								260.12		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								131.9227	1.925	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.091719	0.031	

Table 58. Data for Figure 49, and Figure 51.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	73.17%	76.84%	81.77%	0.67%	77.05%	21.4	0.17	20.75	22	23
2	78.68%	82.56%	86.07%	0.69%	81.78%	18.73	0.25	17	19	21
3	78.33%	80.96%	85.63%	0.69%	81.77%	15.7	0.32	14	16	18
4	76.21%	81.39%	86.38%	0.78%	80.79%	13.14	0.37	11	13	16
5	73.64%	78.89%	86.38%	1.26%	77.50%	10.79	0.42	8	11	14
6	63.92%	77.97%	84.51%	2.10%	70.76%	8.55	0.39	5	9	12
7	47.30%	67.79%	80.75%	2.81%	60.26%	6.84	0.36	4	7	9
8	6.87%	55.46%	73.21%	3.22%	46.29%	5.33	0.31	3	5	7
9	0.00%	34.51%	57.71%	3.03%	33.24%	4.28	0.25	2	4	6
10	0.00%	10.13%	41.24%	2.69%	23.48%	3.51	0.20	2	3	4.25
11	0.00%	15.14%	34.38%	2.01%	18.54%	2.89	0.17	2	3	4
12	0.00%	0.00%	19.17%	1.77%	11.22%	2.55	0.14	1	2	3
13	0.00%	0.00%	0.00%	1.22%	5.49%	2.33	0.12	1	2	3
14	0.00%	0.00%	0.00%	0.98%	3.05%	2.23	0.11	1	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 14.0 Days								78.07		
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days								7.82		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days								13.95		
Mean Repair and Turnaround Time per Entry into the Repair System								0.505559	0.004	
Mean Missions Started per campaign of 14.0 Days								147.2		
Prob of Returning to Base Safely given started a mission								0.926053		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days								17.0081		
Mean Time in High Threat Region per Entry								1.607571	0.004	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days								253.92		
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days								129.0415	1.957	
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days								1.052113	0.037	

Table 59. Data for Figure 50.

Coverage						Helicopters				
Day	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	72.62%	76.27%	80.91%	0.60%	76.41%	22.1	0.13	21	22	23
2	76.74%	81.25%	85.17%	0.65%	81.15%	20.3	0.20	19	20	22
3	78.81%	82.06%	87.48%	0.61%	82.75%	18.46	0.21	17	19	20
4	77.58%	82.56%	86.47%	0.77%	81.77%	16.79	0.23	15	17	18
5	76.75%	80.51%	85.46%	0.69%	80.97%	15.02	0.28	13	15	17
6	76.47%	81.33%	86.46%	0.81%	80.63%	13.53	0.29	12	14	16
7	75.25%	81.10%	86.82%	1.01%	80.02%	11.9	0.31	10	12	14
8	73.10%	79.10%	85.32%	1.42%	76.15%	10.37	0.32	8	10	13
9	58.88%	73.80%	81.95%	1.84%	68.99%	9.02	0.32	7	9	11
10	49.05%	68.69%	79.39%	2.16%	63.08%	7.76	0.30	5.75	7	10
11	38.90%	58.31%	77.18%	2.45%	55.47%	6.52	0.26	4	6	8
12	24.94%	43.59%	65.67%	2.55%	44.20%	5.31	0.22	4	5	6
13	17.96%	34.06%	45.89%	2.30%	32.32%	4.69	0.20	3	4	6
14	0.00%	18.86%	36.16%	2.32%	23.96%	4.22	0.19	3	4	5
Total Runs							100			
Mean Number of MAF per Campaign of 14.0 Days							110.14			
Mean Number of Fatal Failures (Crashes) per Campaign of 14.0 Days							1			
Mean Number of Helicopters Lost to Enemy Action per Campaign of 14.0 Days							18.78			
Mean Repair and Turnaround Time per Entry into the Repair System							0.531692	0.004		
Mean Missions Started per campaign of 14.0 Days							204.53			
Prob of Returning to Base Safely given started a mission							0.950562	9.55E-04		
Mean Time in High Threat Region per Helicopter per Campaign of 14.0Days							23.56841			
Mean Time in High Threat Region per Entry							1.603748	0.003		
Scheduled Time in High Threat Region							2.01686			
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 14.0 Days							352.7			
Mean Survival Time of Individual Helicopters per Campaign of 14.0 Days							175.7121	2.243		
Mean Number of Helicopters in Repair System per hour per Campaign of 14.0 Days							1.706844	0.047		

Table 60. Data for Figure 52.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	75.31%	78.74%	82.50%	0.55%	78.72%	22.64	0.11	22	23	23
2	79.88%	83.64%	89.02%	0.64%	84.25%	21.42	0.15	20	21.5	23
3	79.72%	84.47%	87.62%	0.67%	83.52%	19.93	0.20	19	20	21
4	79.22%	83.58%	87.53%	0.66%	83.65%	18.6	0.22	17	19	20
5	80.09%	84.93%	88.70%	0.63%	84.20%	17.22	0.26	16	17	19
6	80.61%	84.95%	89.36%	0.65%	84.48%	15.91	0.27	14	16	18
7	77.43%	83.75%	87.70%	0.71%	82.69%	14.28	0.29	12	15	16
8	76.03%	84.19%	88.75%	0.93%	81.83%	12.95	0.30	11	13	15
9	75.73%	81.72%	86.81%	1.20%	79.25%	11.41	0.30	10	11	13
10	67.23%	79.61%	86.23%	1.43%	76.22%	10.21	0.32	8	10	13
11	65.08%	78.36%	87.22%	1.89%	73.18%	9.06	0.31	7	9	11
12	52.96%	71.22%	83.70%	2.35%	65.18%	7.93	0.32	5	8	10
13	36.51%	63.37%	79.22%	2.76%	55.79%	7.05	0.28	5	7	9
14	28.05%	53.70%	71.22%	2.95%	48.04%	6.31	0.27	4	6	8
15	12.27%	39.98%	67.14%	2.92%	39.98%	5.83	0.25	4	5	7
16	0.00%	33.79%	51.29%	2.73%	32.38%	5.27	0.22	4	5	6
17	0.00%	28.64%	41.33%	2.44%	26.34%	4.78	0.19	3.75	5	6
18	0.00%	23.40%	41.20%	2.25%	24.11%	4.31	0.18	3	4	5
19	0.00%	13.96%	36.14%	2.04%	19.71%	4.05	0.17	3	4	5
20	0.00%	11.18%	34.04%	1.81%	16.65%	3.83	0.17	3	4	5
21	0.00%	0.00%	27.47%	1.66%	12.23%	3.66	0.17	3	3	5
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								143.01		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								14.14		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								6.2		
Mean Repair and Turnaround Time per Entry into the Repair System								0.509688	0.003	
Mean Missions Started per campaign of 21.0 Days								259.82		
Prob of Returning to Base Safely given started a mission								0.960858		
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								31.16501		
Mean Time in High Threat Region per Entry								1.651637	0.003	
Scheduled Time in High Threat Region								2.01686		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								452.86		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								236.6388	3.227	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.328528	0.032	

Table 61. Data for Figure 53.

Day	Coverage					Helicopters				
	Percentiles			se	Percent Coverage	Surviving Helos	se	Percentiles		
	25%	50%	75%					25%	50%	75%
1	67.49%	72.24%	76.31%	0.67%	71.77%	21.48	0.15	20.75	22	22.25
2	72.25%	78.33%	81.82%	0.73%	77.27%	18.75	0.21	18	19	20
3	69.94%	77.87%	81.88%	0.82%	76.37%	16.14	0.26	14	17	18
4	63.77%	72.35%	77.96%	1.08%	70.71%	13.66	0.30	11	13.5	16
5	51.67%	60.91%	70.67%	1.41%	60.44%	11.5	0.32	9	11	14
6	44.95%	51.68%	61.45%	1.45%	51.49%	9.73	0.31	7	10	12
7	38.72%	45.57%	58.11%	1.62%	46.83%	8.26	0.29	6	8	10
8	22.74%	34.34%	47.61%	1.69%	35.45%	7.02	0.28	5	7	9
9	17.23%	30.12%	43.44%	1.90%	30.65%	6.14	0.25	4	6	8
10	9.65%	23.60%	34.86%	1.73%	25.05%	5.11	0.23	3	5	6
11	0.01%	18.18%	25.86%	1.66%	18.96%	4.41	0.19	3	4	5
12	0.00%	8.93%	23.12%	1.63%	14.28%	3.94	0.16	3	4	5
13	0.00%	0.00%	17.91%	1.39%	8.55%	3.66	0.15	3	3	4
14	0.00%	0.00%	1.78%	1.00%	4.84%	3.45	0.14	3	3	4
15	0.00%	0.00%	0.00%	0.70%	2.83%	3.37	0.14	2.75	3	4
16	0.00%	0.00%	9.48%	0.79%	5.06%	3.27	0.14	2	3	4
17	0.00%	2.03%	12.92%	0.92%	7.16%	3.01	0.12	2	3	4
18	0.00%	0.00%	12.92%	0.90%	6.49%	2.84	0.13	2	3	3
19	0.00%	0.00%	11.54%	0.83%	5.27%	2.69	0.13	2	3	3
20	0.00%	0.00%	0.00%	0.75%	3.45%	2.58	0.12	2	2	3
21	0.00%	0.00%	0.00%	0.55%	1.89%	2.53	0.12	2	2	3
Total Runs								100		
Mean Number of MAF per Campaign of 21.0 Days								119.93		
Mean Number of Fatal Failures (Crashes) per Campaign of 21.0 Days								11.97		
Mean Number of Helicopters Lost to Enemy Action per Campaign of 21.0 Days								9.5		
Mean Repair and Turnaround Time per Entry into the Repair System								0.516965	0.004	
Mean Missions Started per campaign of 21.0 Days								213.48		
Prob of Returning to Base Safely given started a mission								0.947545	0.001	
Mean Time in High Threat Region per Helicopter per Campaign of 21.0Days								19.79818		
Mean Time in High Threat Region per Entry								1.362338	0.002	
Scheduled Time in High Threat Region								1.569978		
Mean Number of Times Individual Helicopters entered High Threat Region per Campaign of 21.0 Days								348.78		
Mean Survival Time of Individual Helicopters per Campaign of 21.0 Days								164.2024	3.049	
Mean Number of Helicopters in Repair System per hour per Campaign of 21.0 Days								1.705343	0.069	

Table 62. Data for Figure 54.

INITIAL DISTRIBUTION LIST

1. Defense Technical Information Center..... 2
8725 John J. Kingman Rd., STE 0944
Ft. Belvoir, VA 22060-6218

2. Dudley Knox Library..... 2
Naval Postgraduate School
411 Dyer Road
Monterey, CA 93943-5000

3. Professor Donald P. Gaver 1
Code OR/Gv
Naval Postgraduate School
Monterey, CA 93943-5101

4. Professor Patricia A. Jacobs 1
Code OR/Jc
Naval Postgraduate School
Monterey, CA 93943-5101

5. Professor Arnold H. Buss 1
Code OR/Bu
Naval Postgraduate School
Monterey, CA 93943-5101

6. Dr. Ernest Seglie..... 1
Science Advisor
Director, Operational Test & Evaluation
1700 Defense, The Pentagon
Washington, DC 20301-1700

7. COL Wayland E. Parker..... 3
DOT&E
Room 1C730
The Pentagon
Washington, DC 20301-1700

8. Dean DeWolfe 1
Institute for Defense Analysis
1801 Beauregard Street
Alexandria, VA 22311-1772

9. Dr. Arthur Fries 1
Institute for Defense Analysis
1801 Beauregard Street
Alexandria, VA 22311-1772
10. LT Kevin J. Schmidt 2
201 S. Court St.
Elk Point, SD 57025