

Precision CMOS Clock Oscillator for HI-G Applications

Presented by
Fred Mirow
Chief Engineer
Micro Oscillator,
Inc.

Co Author
Dick Mabry
AFRL/MNMF
Eglin AFB

WEB SITE:

MICRO-OSCILLATOR.COM

Report Documentation Page

Report Date 16Apr2001	Report Type N/A	Dates Covered (from... to) -
Title and Subtitle Precision CMOS Clock Oscillator for HI-G Applications	Contract Number	
	Grant Number	
	Program Element Number	
Author(s) Mirow, Fred; Mabry, Dick	Project Number	
	Task Number	
	Work Unit Number	
Performing Organization Name(s) and Address(es) Micro Oscillator, Inc.	Performing Organization Report Number	
Sponsoring/Monitoring Agency Name(s) and Address(es) NDIA (National Defense Industrial Association) 211 Wilson BLvd., Ste. 400 Arlington, VA 22201-3061	Sponsor/Monitor's Acronym(s)	
	Sponsor/Monitor's Report Number(s)	
Distribution/Availability Statement Approved for public release, distribution unlimited		
Supplementary Notes Proceedings from The 45th Annual Fuze Conference, 16-18 April 2001 Sponsored by NDIA, The original document contains color images.		
Abstract		
Subject Terms		
Report Classification unclassified	Classification of this page unclassified	
Classification of Abstract unclassified	Limitation of Abstract UU	
Number of Pages 23		

Summary of Discussion


- ◆ MOI-1000 CLOCK OSCILLATOR
- ◆ COMPARISON OF OSCILLATOR TYPES
- ◆ SBIR AF98-220
- ◆ MOI-2000 CLOCK OSCILLATOR
- ◆ Proposed 32.7KHZ Oscillator
- ◆ Summary & Recap

MOI-1000 Clock Oscillator

- *Smallest*
- *Fastest Turn On*
- *Most Rugged*
- *Lowest Power*



OSCILLATOR CIRCUIT

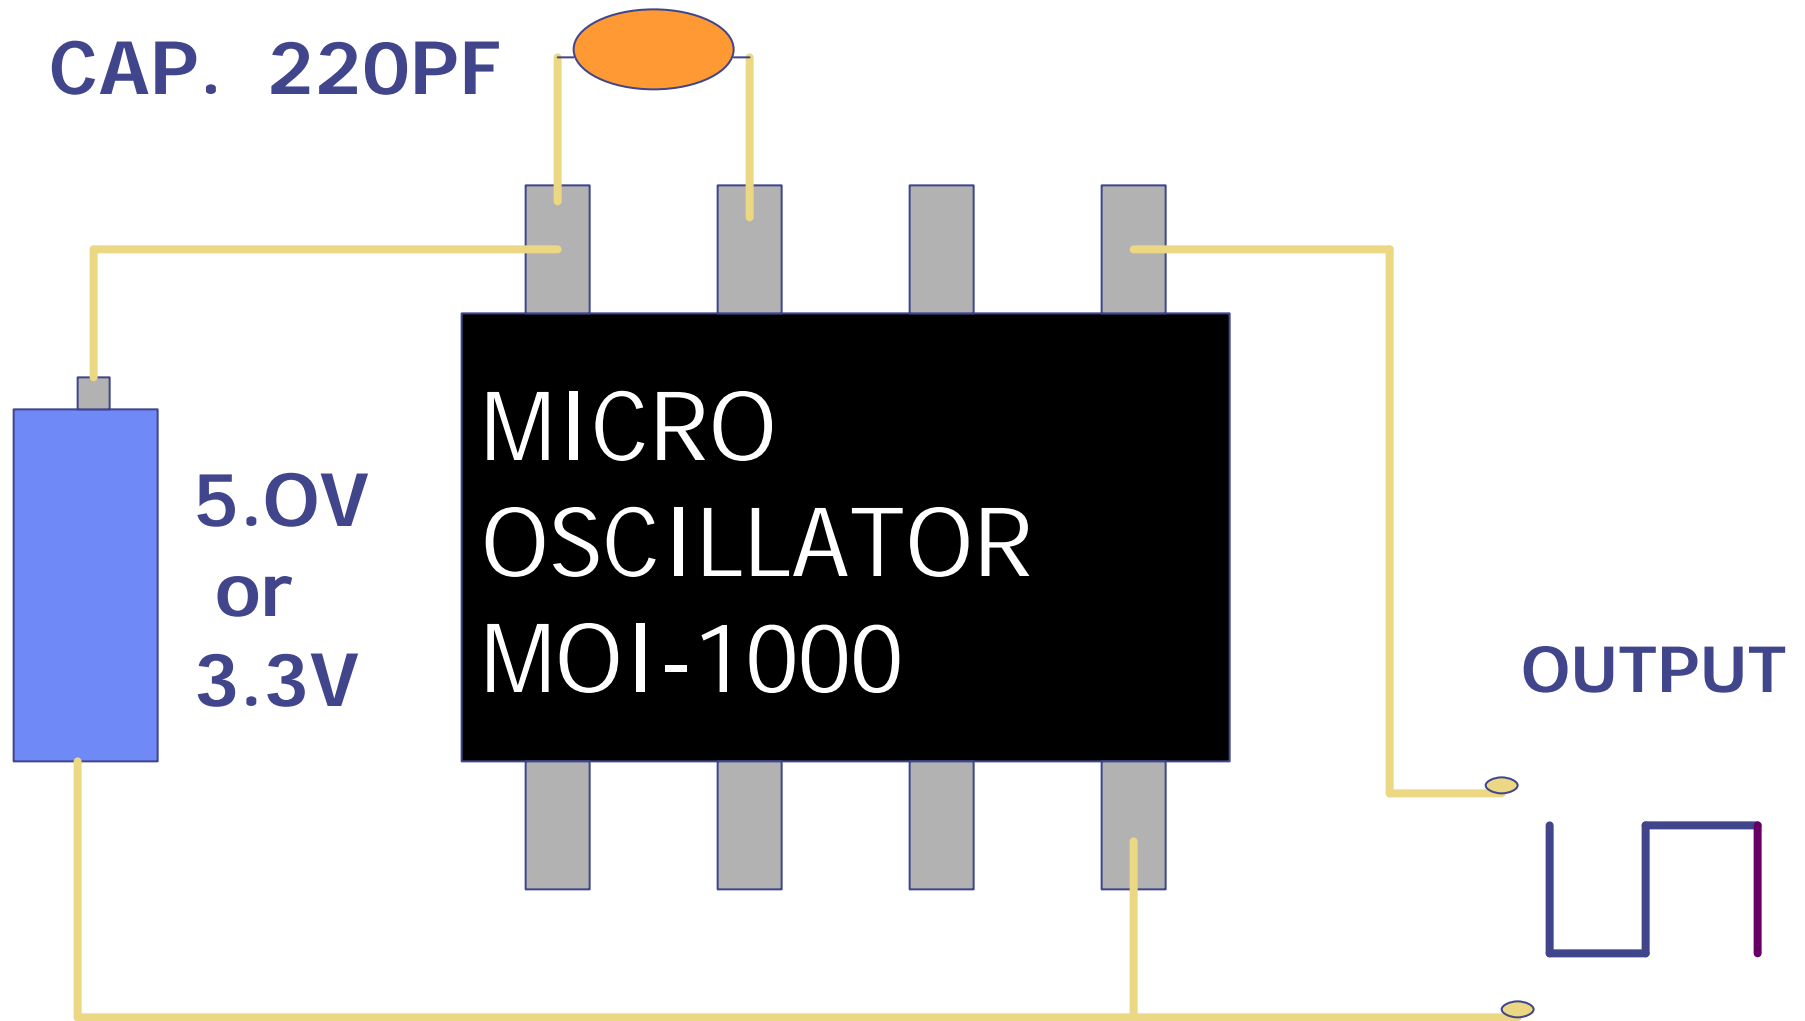


MOI-1000 SPECIFICATION

CMOS IC


SIZE		1.7 X .9 MM
FREQUENCY		16, 20, 24 MHz
FREQUENCY ACCURACY (Temp. & Voltage, Etc.)		
INDUSTRIAL TEMP		0.5%
MILITARY TEMP		1.0%
OPERATING POWER	(5.0V)	25 mW
	(3.3V)	10 mW
OUTPUT, SQUARE WAVE SYMMETRY		55/45%
SHOCK, OPERATIONAL		> 80,000 G
PACKAGE		SO-8, MSO-8 or Bare Die

MOI-1000 ACCELERATION TEST (UNIT OPERATING)

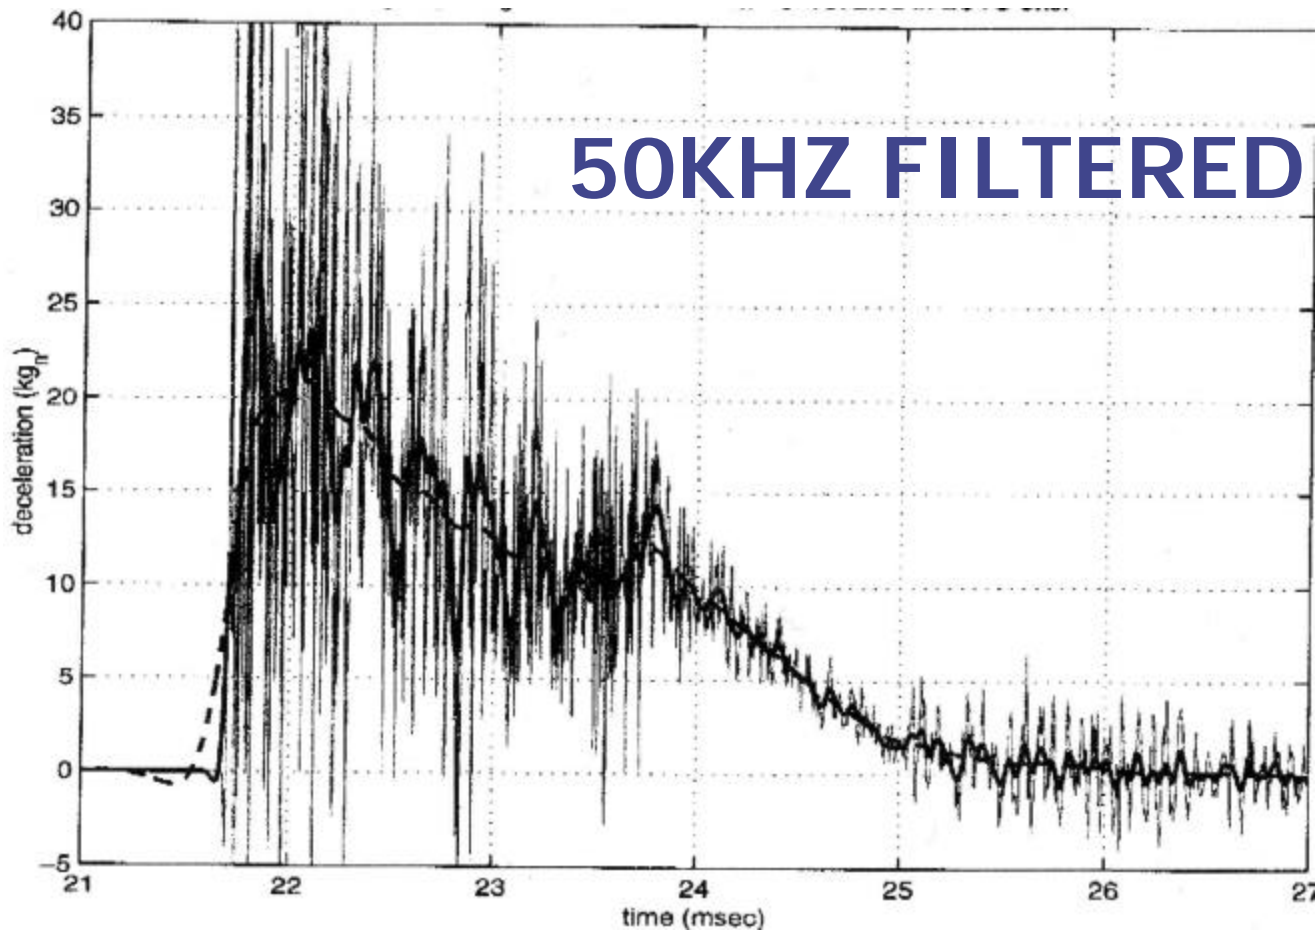


155 MM HOWITZER, CONCRETE WALL
PLOT CURTESY OF AFRL/MNMF

MOI-1000 ACCELERATION TEST (UNIT OPERATING)


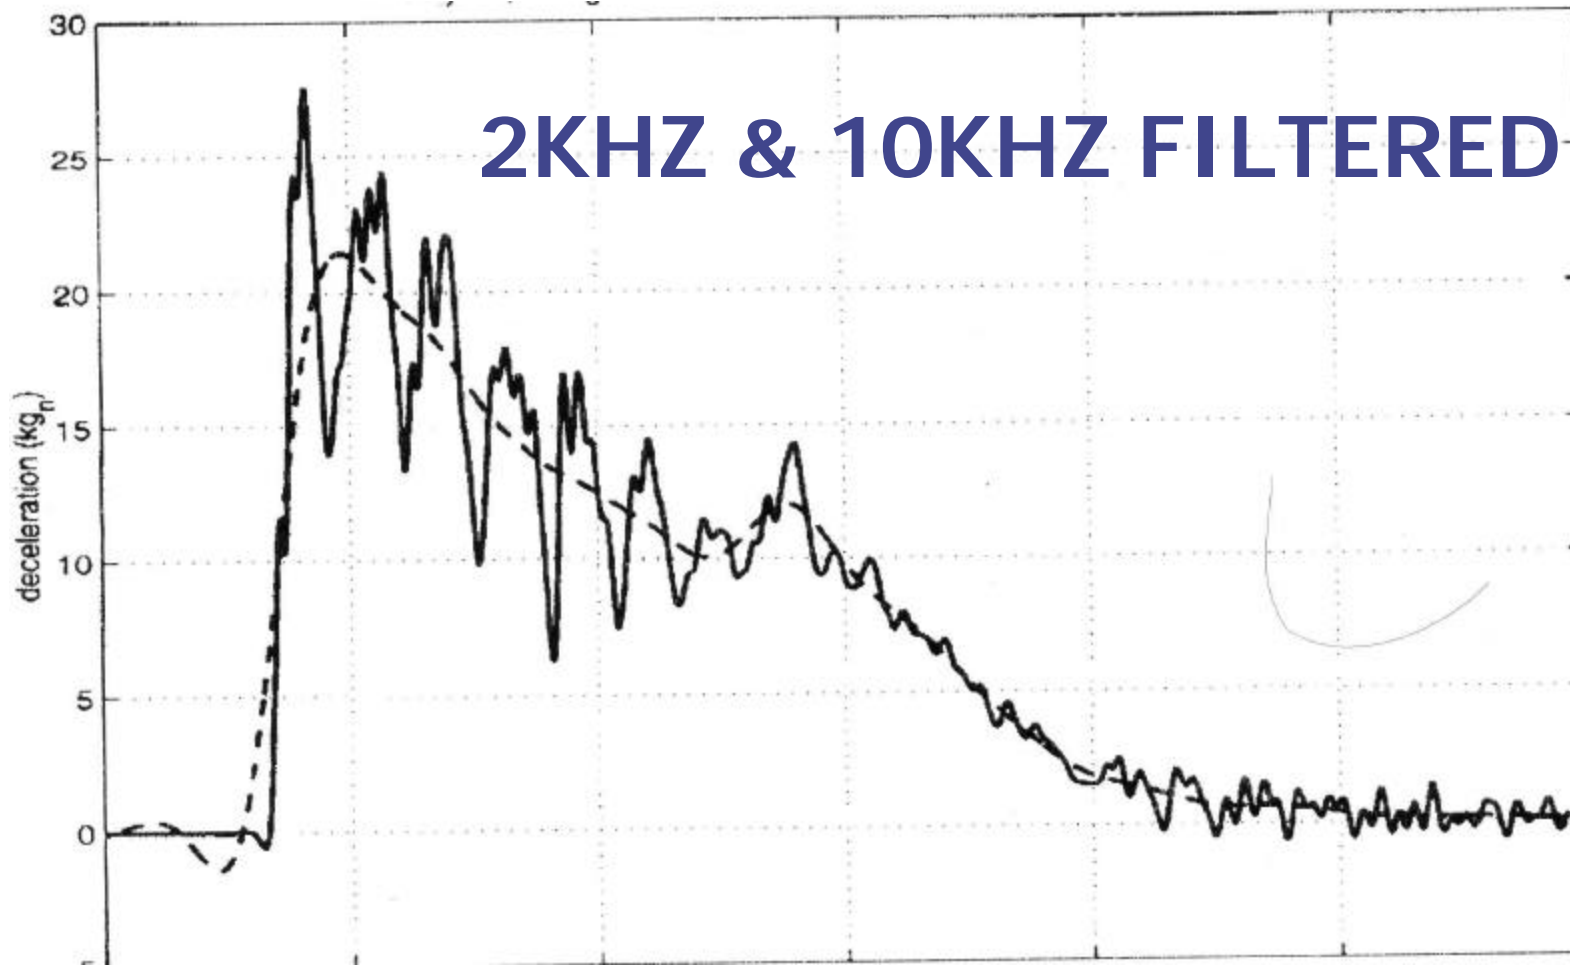


**155 MM HOWITZER, CONCRETE WALL
PLOT CURTESY OF AFRL/MNMF**

MOI-1000 CLOCK OSCILLATOR SYSTEM BLOCK DIAGRAM

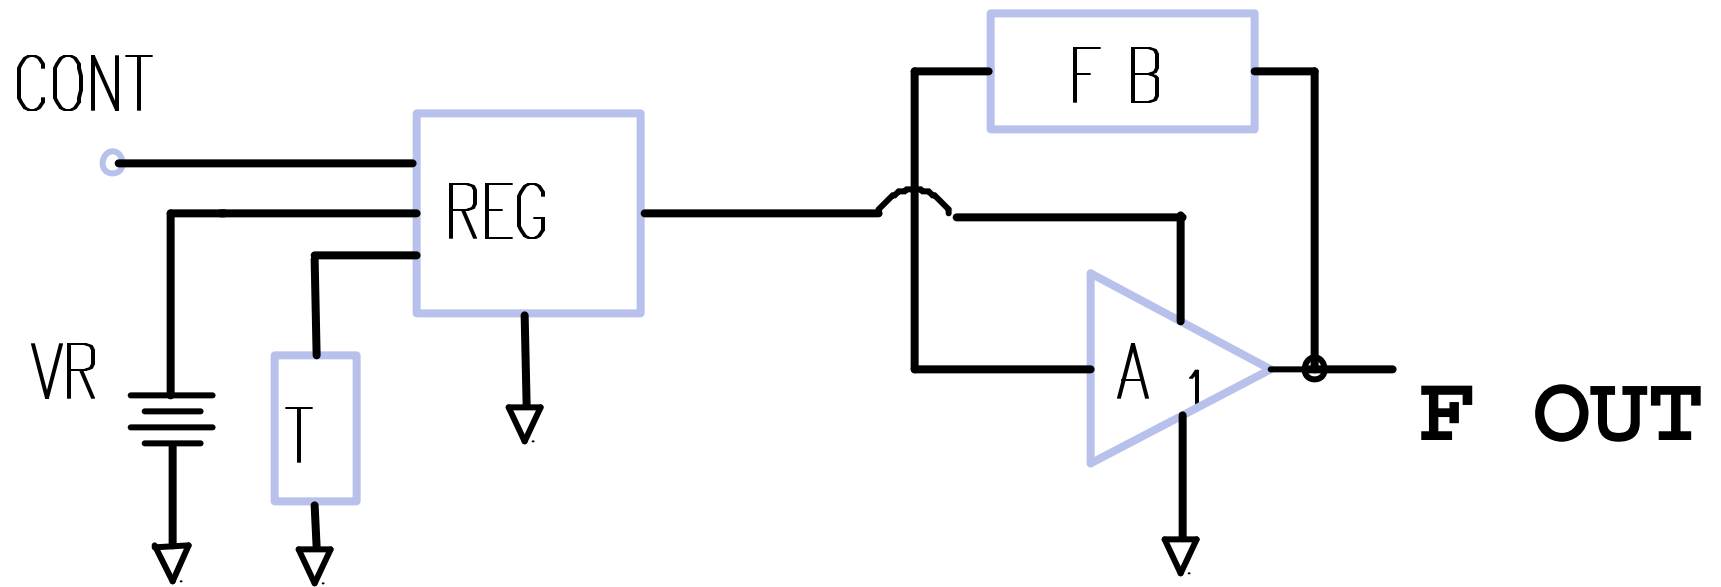

PROPAGATION DELAY TIME VARIATIONS

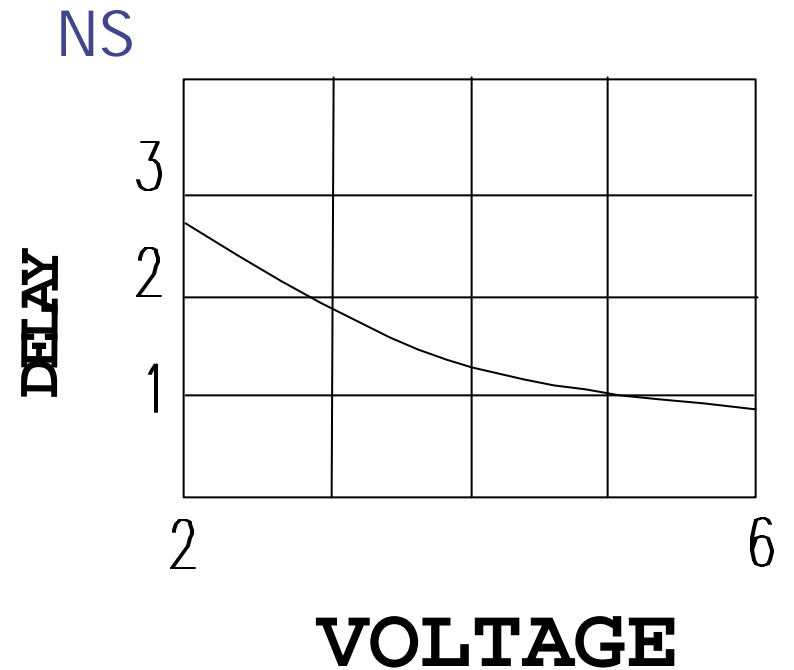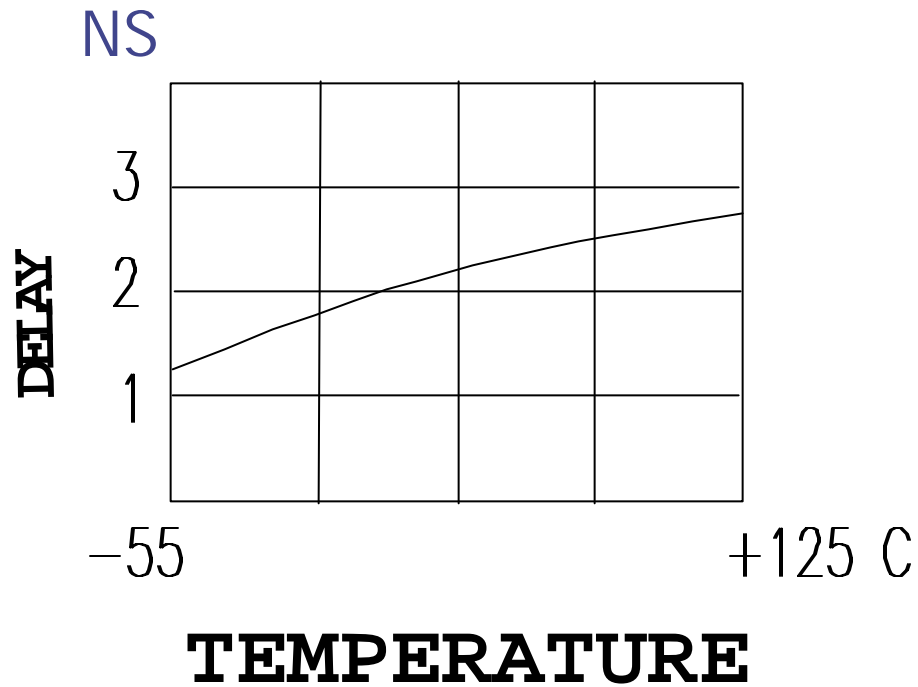

CLOCK OSCILLATOR COMPARISON CHART

	MICRO OSCILLATOR	CRYSTAL CLOCK	CERAMIC RESONATOR
FREQ. TOL.	MEDIUM	HIGH	MEDIUM
SIZE (mm)	.9 x 1.7	5 x 7	2.8 x 6.5
HYBRID	YES	NO	NO
RUGGEDNESS	VERY HIGH	LOW	MEDIUM

MOI-1000 ADVANTAGES

- 1: COMPLETE CLOCK OSCILLATOR
- 2: SMALL SIZE, BARE DIE OR S0-8
- 3: NO START UP PROBLEMS
- 4: NO FREQUENCY JUMPING
- 5: 3.3 V OR 5.0 V AVAILABLE
- 6: +/- 0.5% TOLERANCE INDUSTRIAL
- 7: +/- 1.0% TOLERANCE MILITARY

MOI-1000 DISADVANTAGES

- 1: NOT AS ACCURATE AS CRYSTAL

EXISTING APPLICATIONS

PROGRAMMABLE PROJECTILE FUZE

CRITICAL REQUIREMENTS MET-

OPERATIONAL IN HIGH G ENVIRONMENT

FAST TURN ON TIME

BARE DIE FOR HYBRID PACKAGING

LOW OPERATING POWER

HARD TARGET FUZING

CRITICAL REQUIREMENTS MET-

OPERATIONAL IN HIGH G ENVIRONMENT

LOW OPERATING POWER

SBIR AF98-220

PURPOSES:

1) IMPROVE MOI-1000:


REDUCED OPERATING POWER
WIDER FREQUENCY RANGE

2) DEVELOP 32.7KHZ VERSION

SBIR TIMER BASE SYSTEM SPECIFICATION

	SYSTEM 1	SYSTEM 2
VOLTAGE	5V +/-5%	3.3V +/-5%
CURRENT	1 MA MAX	1 MA MAX
FREQ. TOL.	+/-1% ABSOLUTE	+/-1% ABSOLUTE
FREQ. RANGE SINGLE FREQ.	14.0 TO 20.0 MHZ	3.5 TO 5.0 MHZ
OPERATING TEMP.	-55 TO 125 °C	-55 TO 125 °C
OUTPUT DRIVE	2 HC CMOS	2 HC CMOS

MOI-2000 CLOCK OSCILLATOR SYSTEM BLOCK DIAGRAM

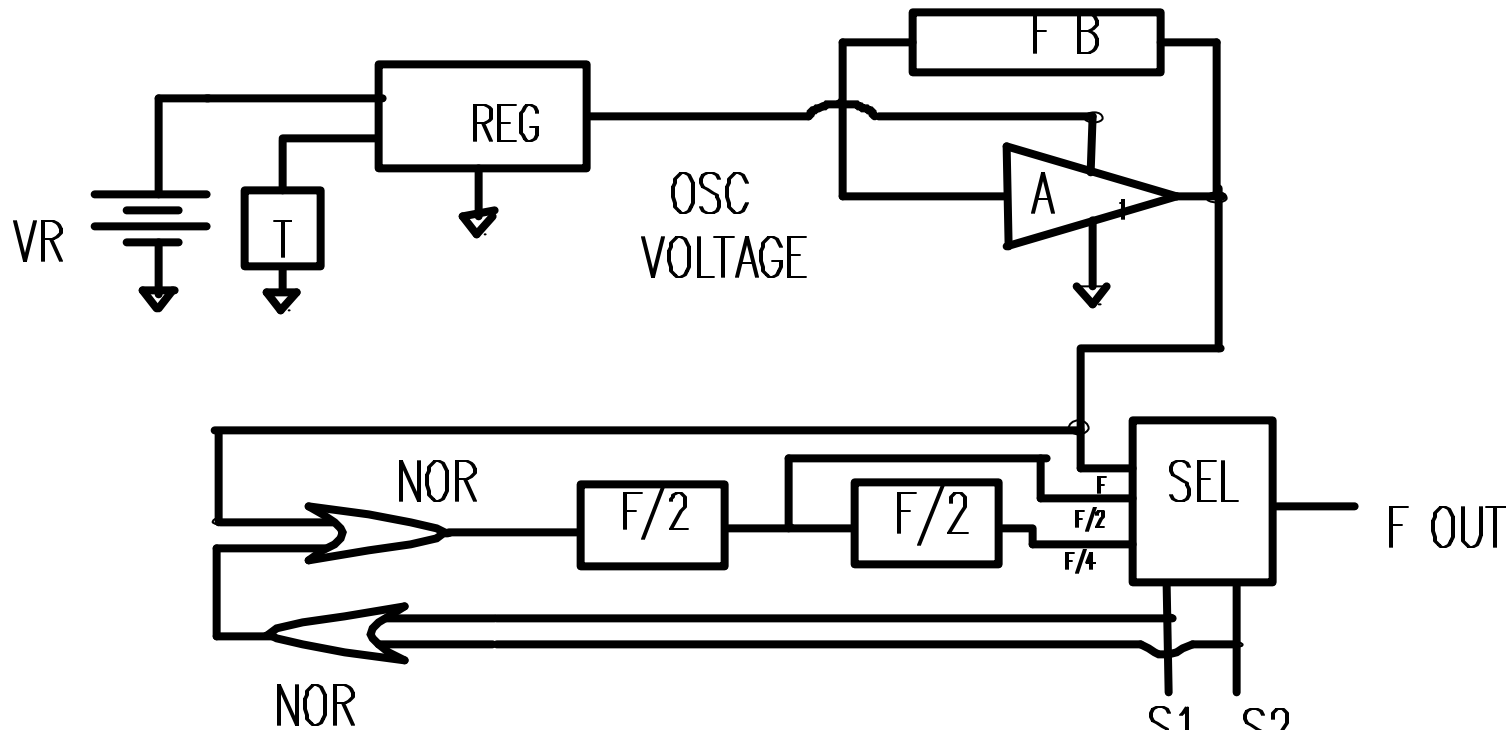

S1	S2	F OUT
0	0	F
1	0	F/2
0	1	F/4

COMPARISON
OF
MOI-1000 TO MOI-2000

MOI-1000

MOI-2000

FREQ.

14 to 24MHz

4 to 20 MHz

CURRENT

5.0 VOLTS

5mA

1.6mA

3.3 VOLTS

3mA

1ma

TOL.


+/-1%

+/-1%


MOI-2000 PREPRODUCTION MEASURED PERFORMANCE

VOLTAGE	5	3.3
CURRENT	2.2 Ma	1.4 Ma
FREQUENCY	16 MHz	10 MHz
FREQ. TOL. -55 - 125°C	± 1.0%	± 1%


MOI-2000 OSCILLATOR OUTPUT 3.3V 12PF LOAD, 53/47% DUTY CYCLE

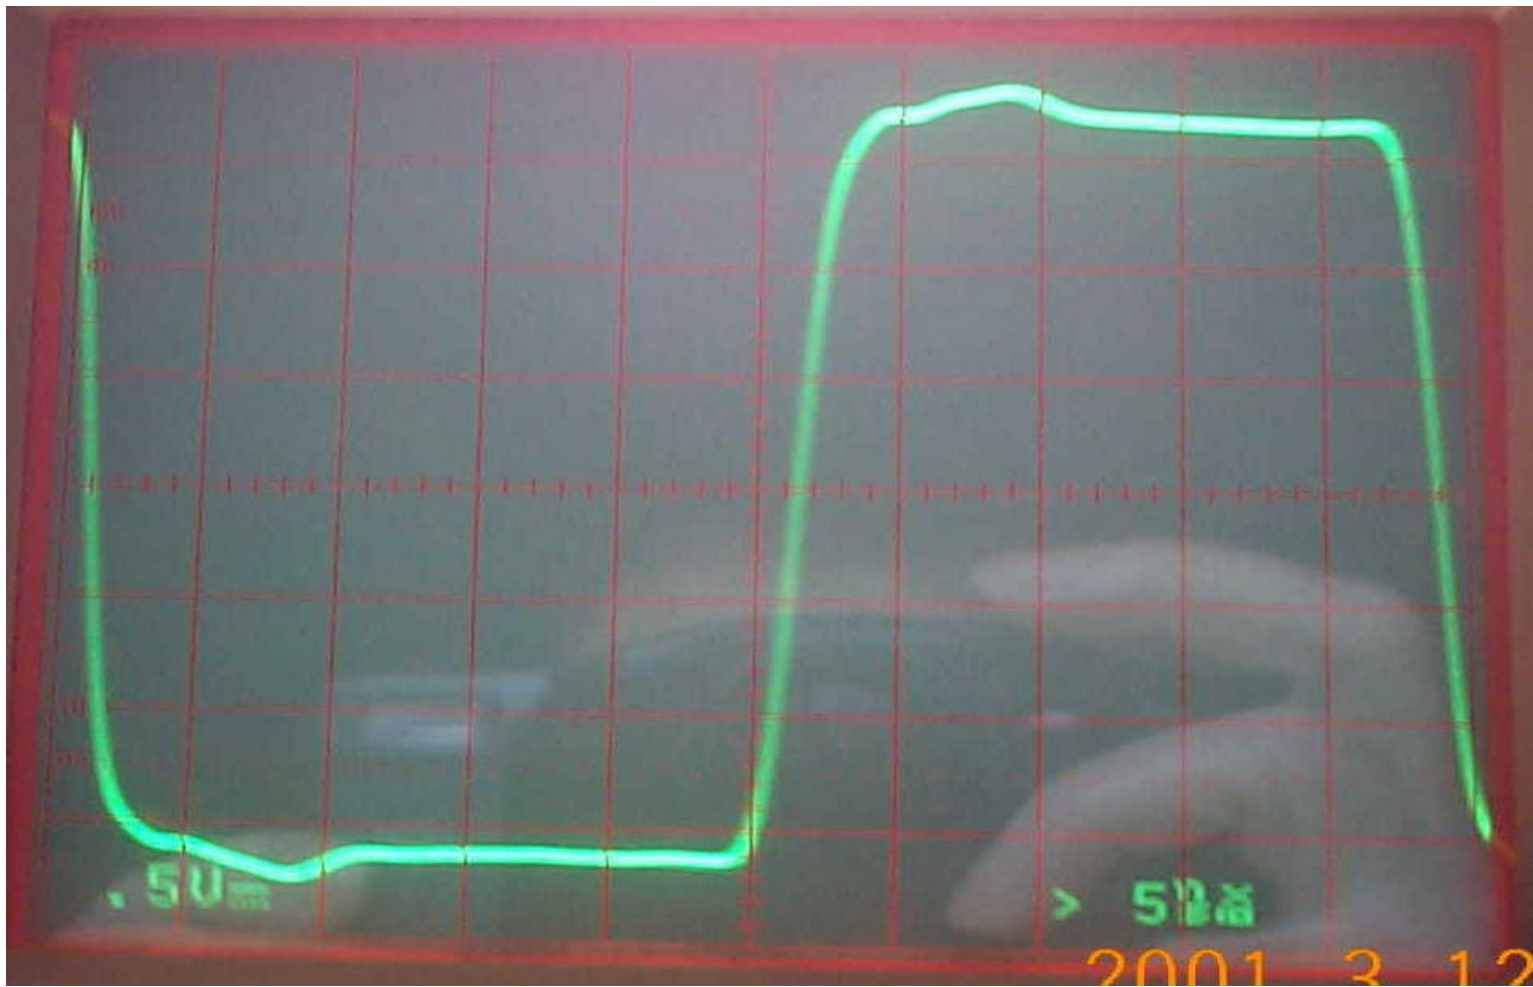

MOI-2000 OSCILLATOR OUTPUT
3.3V 12PF LOAD, 2 NSEC/DIV

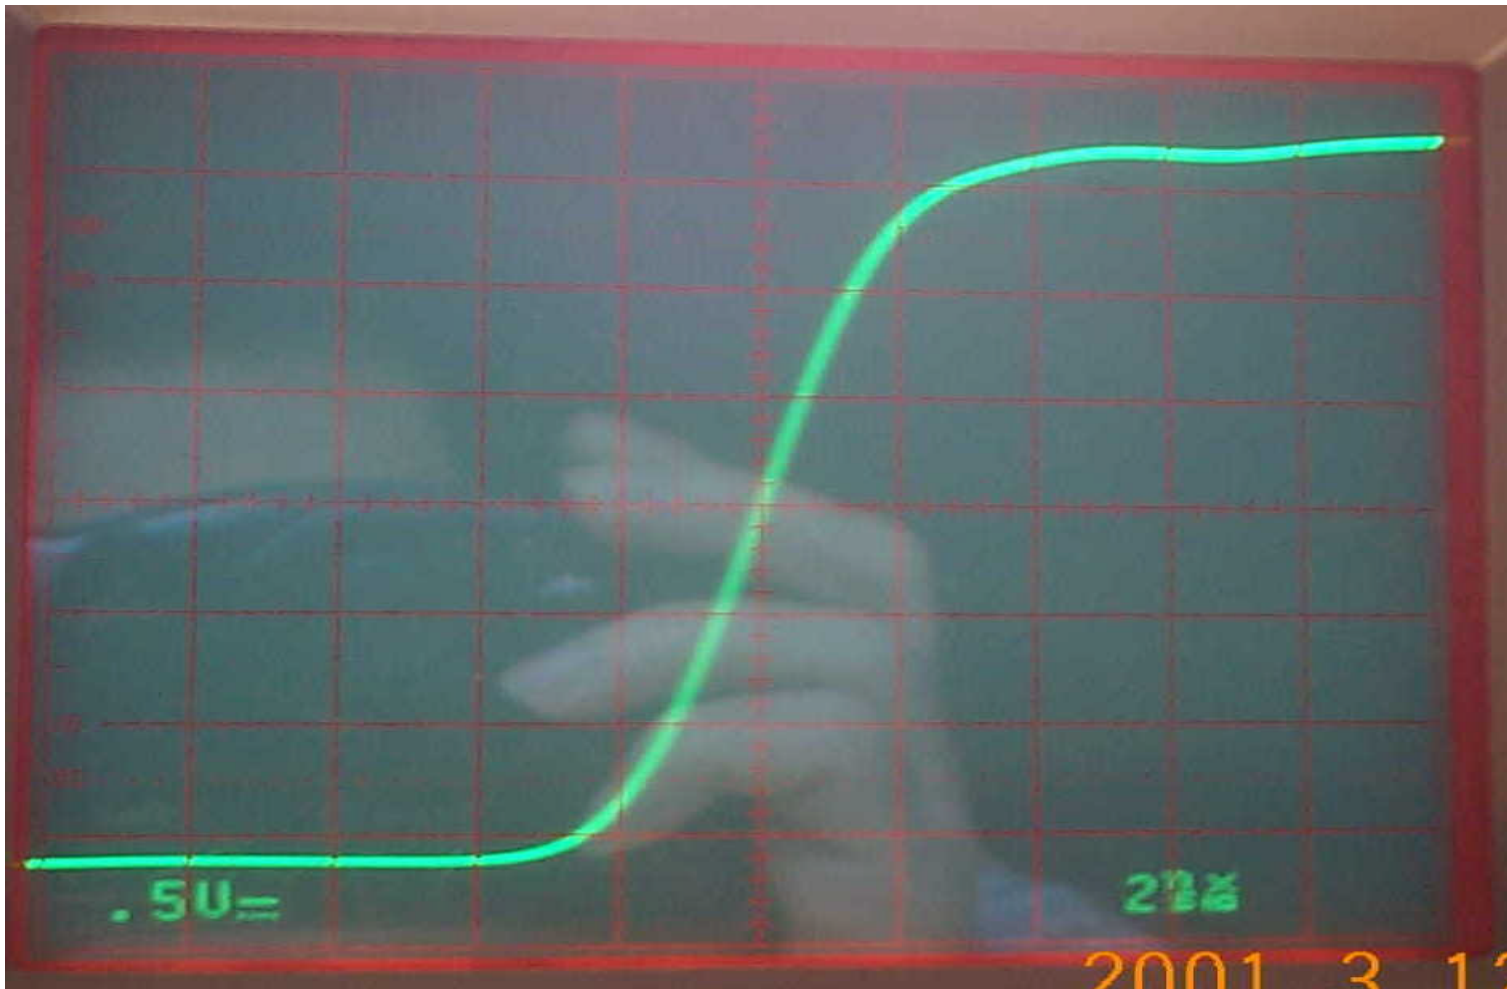

MOI-2000 OSCILLATOR OUTPUT DELAYED 3.3V 12PF LOAD

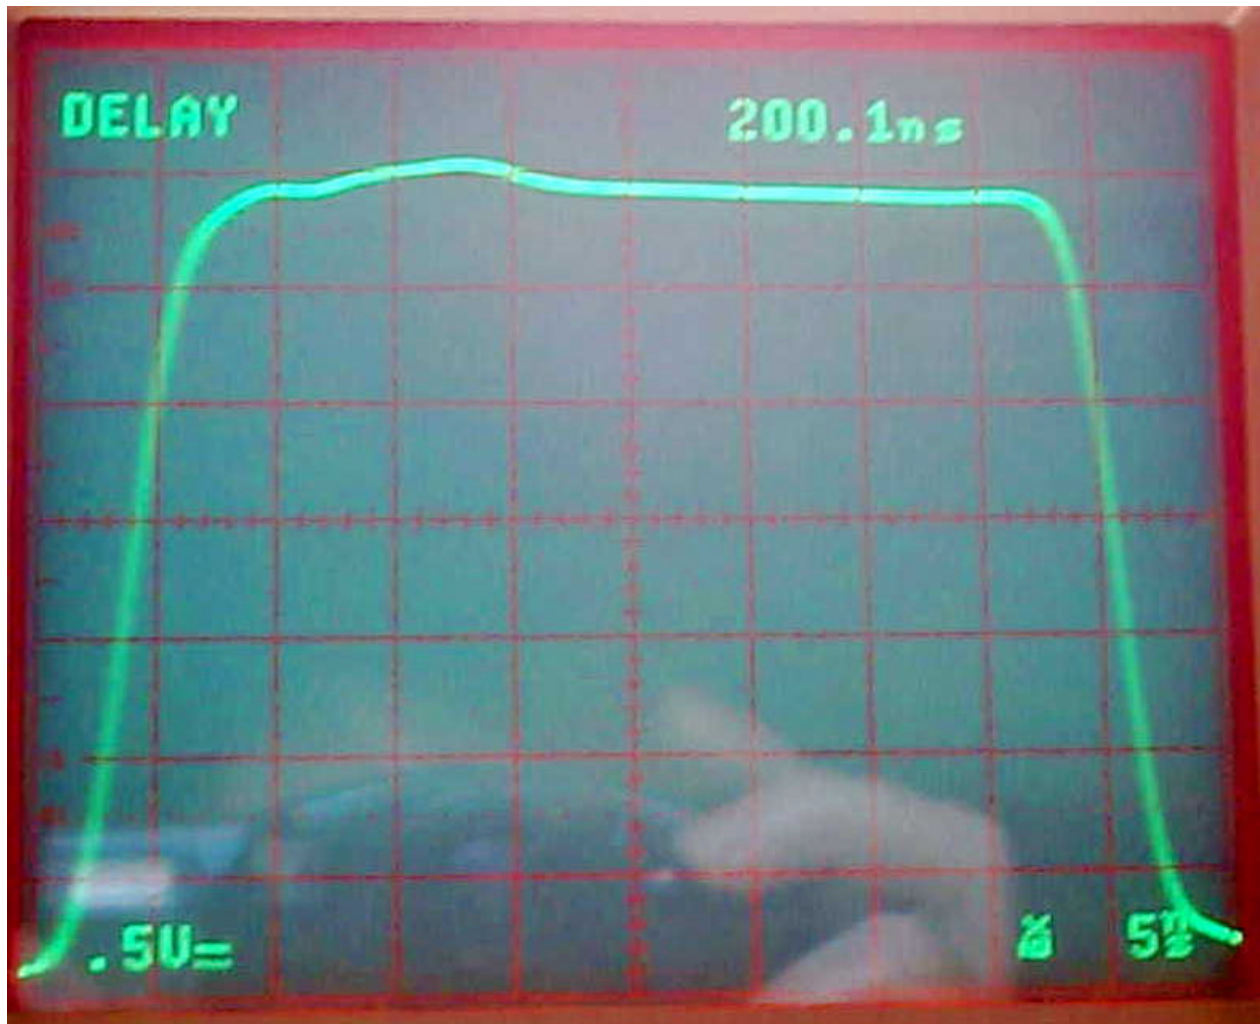

32.7 KHz TIME BASE SYSTEM SBIR SPECIFICATION

Operating Voltage	3.3v or 5V 5%
Operating Current	0.2 ma max
Frequency Tol.	+/- 1%
Frequency	32.7 KHz
Operating Temp.	-55 to 125 c
Package	S0-8

OSCILLATOR AVAILABILITY SCHEDULE

MOI-2000

5V

JULY 2001

3.3V

NOW

32 .7KHz

JULY 2002

Summary & Recap

MOI-1000

5 YEARS OF PROVEN
PERFORMANCE IN
HI-G APPLICATIONS

MOI-2000

SAME PROVEN TECHNOLOGY AS
MOI-1000 AT A MUCH LOWER
OPERATING POWER LEVEL