



Crew integration & Automation Testbed and Robotic Follower Programs

Bruce Brendle

Team Leader, Crew Aiding & Robotics Technology

Email: brendleb@tacom.army.mil
(810) 574-5798 / DSN 786-5798
Fax (810) 574-8684

U.S. Army Tank-Automotive RD&E Center (TARDEC)
Vetronics Technology Area
(AMSTA-TR-R, Mailstop 264)
Warren, MI 48397-5000

30 May 2001

UNCLASSIFIED


Tank-automotive & Armaments
COMmand

Report Documentation Page

Report Date 30May2001	Report Type N/A	Dates Covered (from... to) -
Title and Subtitle Crew integration & Automation Testbed and Robotic Follower Programs	Contract Number	
	Grant Number	
	Program Element Number	
Author(s) Brendle, Bruce	Project Number	
	Task Number	
	Work Unit Number	
Performing Organization Name(s) and Address(es) U.S. Army Tank-Automotive RD&E Center (TARDEC) Vetronics Technology Area (AMSTA-TR-R, Mailstop 264) Warren, MI 48397-5000	Performing Organization Report Number	
	Sponsor/Monitor's Acronym(s)	
Sponsoring/Monitoring Agency Name(s) and Address(es) NDIA (National Defense Industrial Association) 211 Wilson Blvd., Ste. 400 Arlington, VA 22201-3061	Sponsor/Monitor's Report Number(s)	
	Distribution/Availability Statement Approved for public release, distribution unlimited	
Supplementary Notes Proceedings from 2001 Vehicle Technologies Symposium - Intelligent Systems for the Objective Force 29-31 May 2001 Sponsored by NDIA, The original document contains color images.		
Abstract		
Subject Terms		
Report Classification unclassified	Classification of this page unclassified	
Classification of Abstract unclassified	Limitation of Abstract UU	
Number of Pages 11		



TARDEC Crew Reduction Efforts



FY93

FY96

FY98

FY00

FY04

FY06

Crewman's Associate Simulation



System Integration (Lab)

Vehicle Tech Demo #1 (VTT)

Vehicle Tech Demo #2 (CAT ATD)

Two Man Transition Future Combat System

Baseline Developed

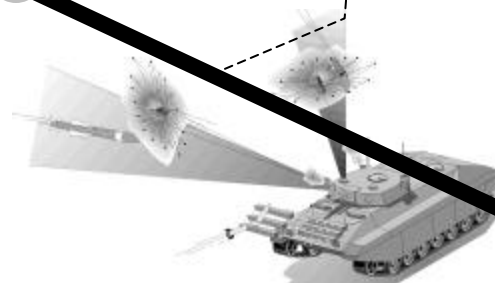

“Evolving Technologies for Reduced Crew Operation”




Crew integration and Automation Testbed



- Objectives:
 - ▶ Demonstrate the crew interfaces, automation, and integration technologies required to operate and support future combat vehicles.
 - ▶ Demonstrate crew stations enabling two-crew operation of multi-mission capable, C-130 transportable systems required for the objective force of the Army.
- Status:
 - ▶ In Year #2 of 4-Year ATD Program
 - ▶ Active Crew Task Analysis IPT between MMBL, ARL and TARDEC
 - ▶ Active Architecture IPT with STO/ATD Managers
 - ▶ SMI Working Group Approved with Future Combat Systems




Crew integration and Automation Testbed

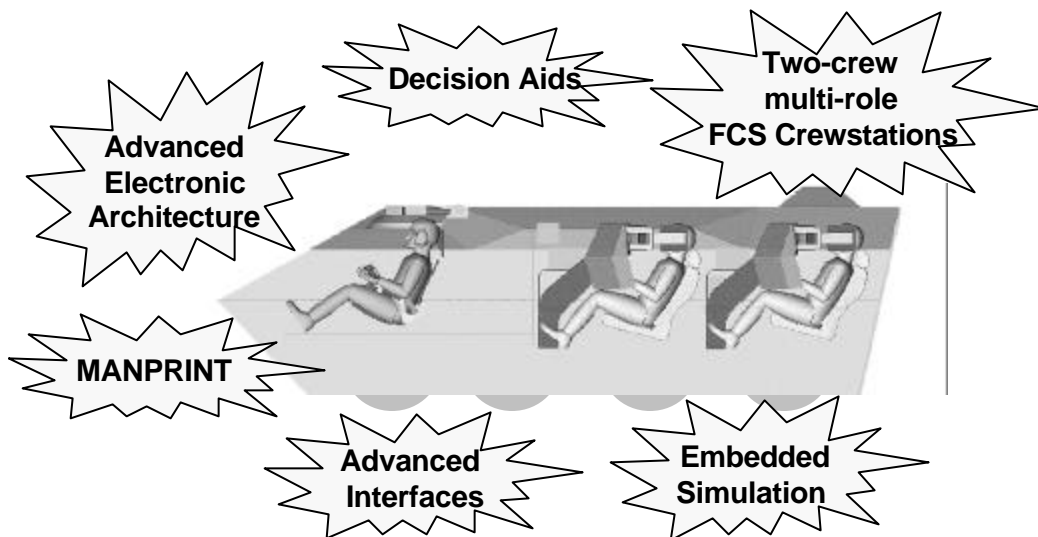

Concept Vehicle Shown with Onboard Safety Driver

Demonstrate the crew interfaces, automation, and integration technologies required to operate and support Future Combat Systems

Pacing Technologies:

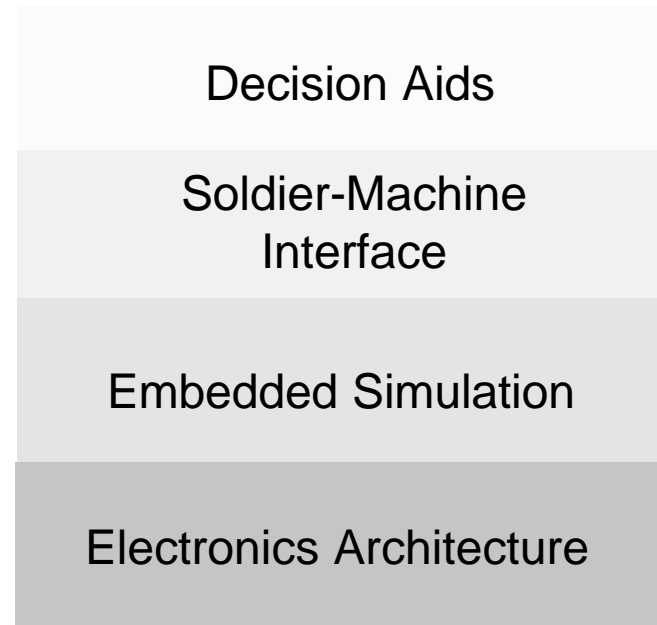

Warfighter Payoffs:

- Enhanced performance, and survivability of the crew.
- Potential for reduced crew size (smaller, more transportable vehicles with lower logistics).
- Mission rehearsal capability



CAT ATD Exit Criteria




- Increase crew task efficiency, or reduce the number of crew personnel.
 - ▶ Cover 100% of fight (19K), scout (19D), & carrier (11M) crew tasks with additional tasks of controlling UAV's and UGV's performed with two crew members.
- In-Vehicle crew training capability.
 - ▶ Provide mixed, live-virtual simulation of vehicle in training exercises
- Increase software reuse.
 - ▶ Package 500K SLOC for reuse through APIs
- Increase architecture performance.
 - ▶ Provide 1000 Hz control loop for critical real-time tasks



CAT Workload IPT


Process and Product Schedule

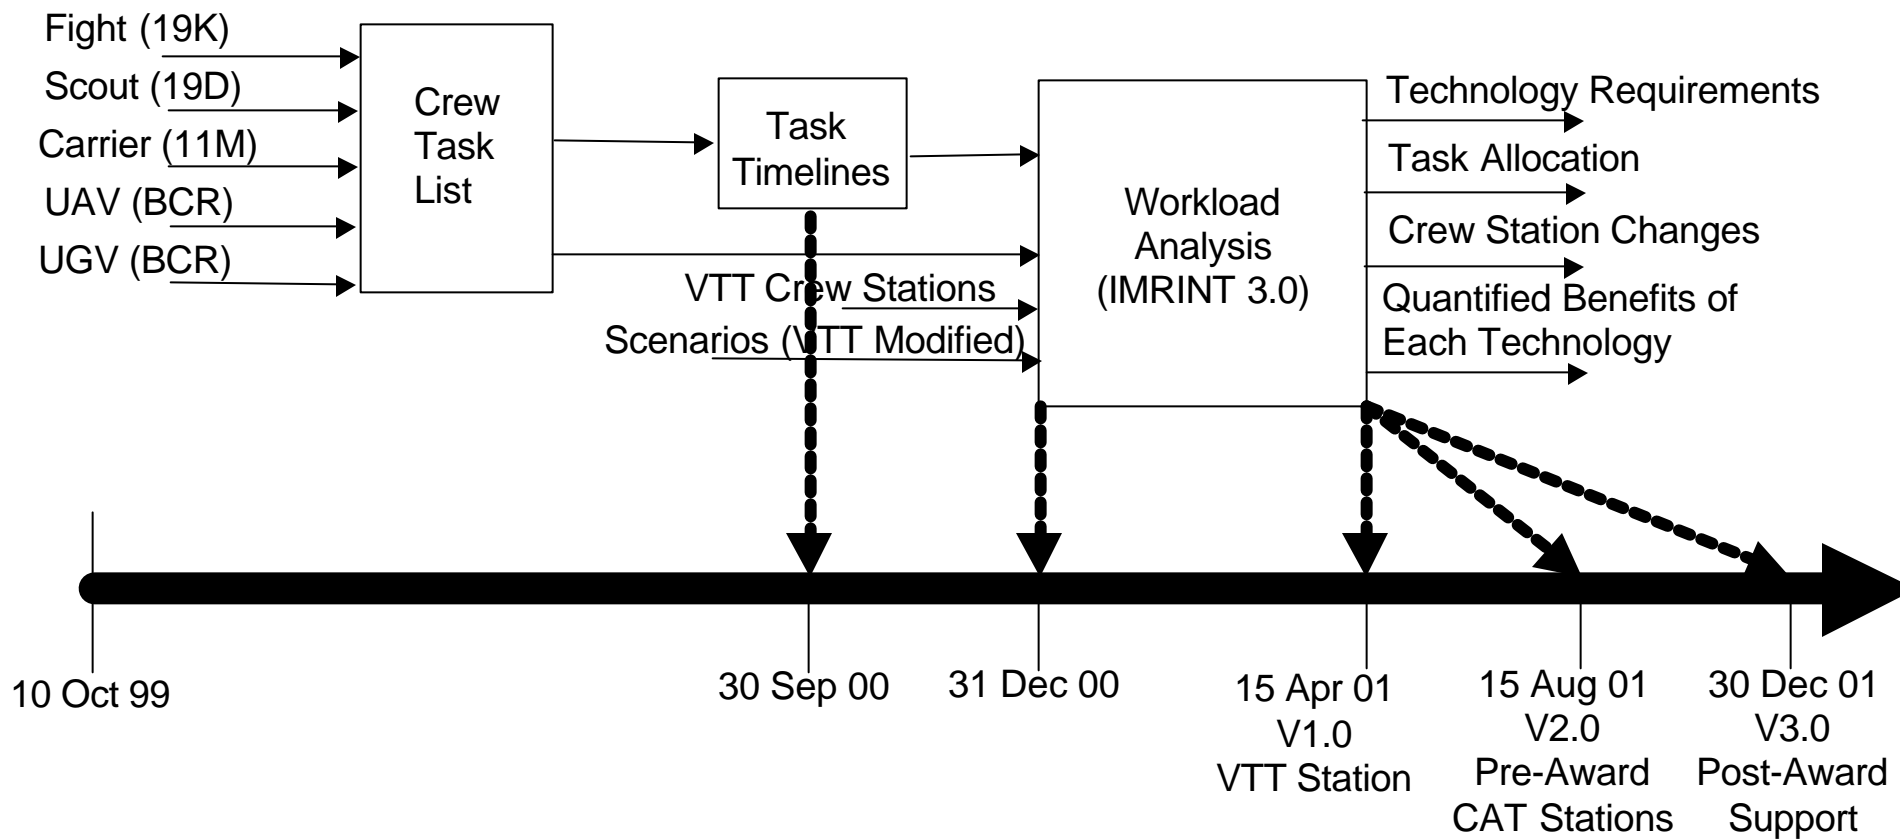

UAV - Unmanned Arial Vehicle
UGV - Unmanned Ground Vehicle



Robotic Follower (RF) Evolution

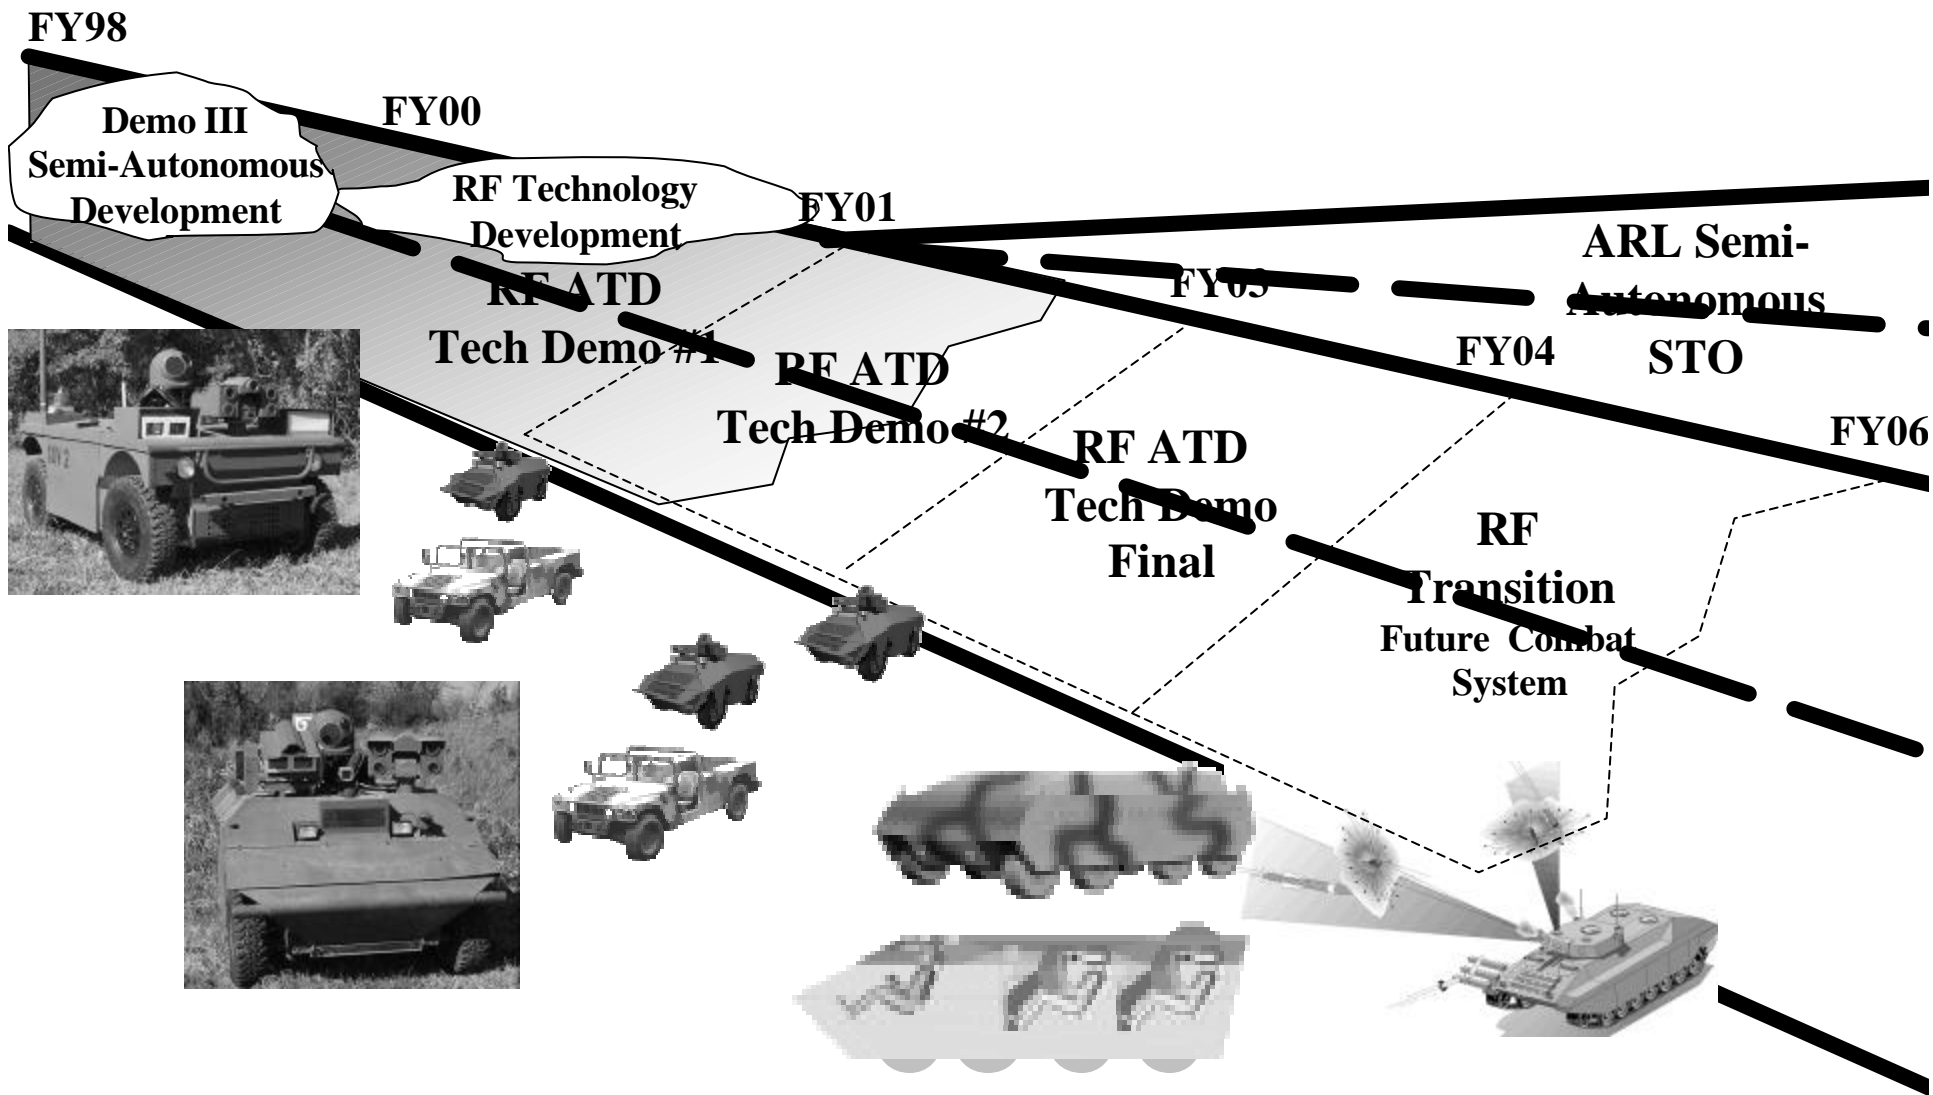




Robotic Follower ATD



- Objectives:
 - ▶ Develop, integrate and demonstrate the technology required to achieve unmanned follower capabilities for future land combat vehicles.
 - ▶ Maturation & demonstration of robotics technology required for early insertion into Future Combat Systems.
- Status:
 - ▶ In Year #1 of 5-Year ATD Program
 - ▶ Cooperative Program with Army Research Laboratory
 - ▶ Active Architecture IPT with STO/ATD Managers
 - ▶ Customer: TRADOC System Manager for Future Combat Systems



Robotic Follower ATD

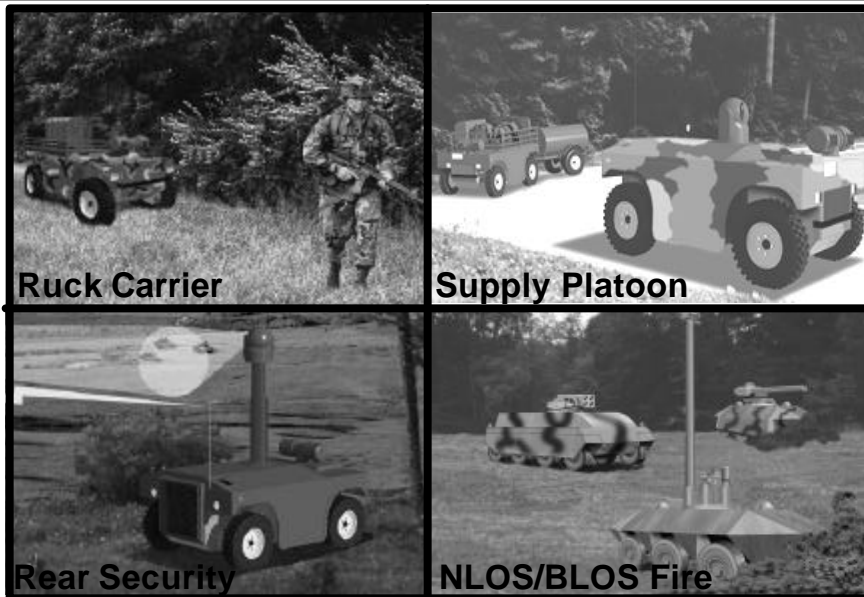

Mature & Demonstrate Robotics Technology Required for Early Insertion into FCS

Pacing Technologies:

Semiautonomous Perception

Soldier-Robot Interface

Intelligent Situational Behavior

Leader-Follower Technology

Solution Approach

- Manned leader “proofs” path to reduce perception & intelligence requirements
- Rapidly mature & integrate perception technology to enable higher speed & enhanced decision making capabilities
- Successively demonstrate maturing capability for FCS



Robotic Follower Exit Criteria



Metric	Speed on Primary Road - (kph)	Speed X-Country - (kph)	Range - (km)	Max Time Delay - (hrs)	Separation - (m)	Obstacle Detection - (m)
Definition	Sustained speed on paved or improved road with firm base. Followers to stay in proper lane starting in 2003.	Open & rolling, highly trafficable for equivalent manned system.	Distance follower can travel using onboard intelligence.	Time between lead vehicle and follower vehicles crossing same piece of terrain	Distance between the lead and following vehicles, dependent on communication range and latency.	Size of non-engineered or camouflaged obstacles system can detect.
Current (Demo IIIb)	30	15	160	1	Min: 50 Max: 500	Positive: .5 Negative: 1x2x2
April, 2003¹ (XUV chassis)	55	30	160	12	Min: 20 Max: 2 km	Positive: .3 Negative: 1x2x2
END ATD	Minimum	65	160	24	Min: 10 Max: 5 km	Positive: .3 Negative: 1x2x2
	Goal	100	750	24	Min: 1 Max: 200 km	Positive: .3 Negative: 1x1x1

¹ Difference between achieved performance in 2003 and End ATD will be demonstrated via modeling & simulation.



Robotic Follower

Development and Test Environment

