



**Shock Experiment Results of the
DFuze 8-Channel Inertial Sensor
Suite That Contains Commercial
Magnetometers and Accelerometers**

**Bradford S. Davis
Michael B. Hamilton
David J. Hepner**

ARL-MR-532

April 2002

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Shock Experiment Results of the DFuze 8-Channel Inertial Sensor Suite That Contains Commercial Magnetometers and Accelerometers

Bradford S. Davis
David J. Hepner
Weapons and Materials Research Directorate, ARL

Michael B. Hamilton
Naval Surface Warfare Center, Dahlgren Division

Abstract

This report describes shock experiments performed on a 1.4-inch (35.56-mm) diameter double-sided board that contains an inertial sensor suite (ISS) in support of the ongoing U.S. Army Research Laboratory diagnostic fuze (DFuze). The DFuze represents a high-g projectile-borne measurement system for obtaining in-bore and in-flight ballistic data that significantly contribute toward the design, development, failure diagnostics, and aerodynamics determination of artillery or other projectiles. The ISS uses several commercial off-the-shelf micro-electro-mechanical systems accelerometers, magnetometers, and optical sensors used for determining estimates of the projectile's body orientation, axial acceleration, radial acceleration, and roll rate. During the ground experiments, ISS boards were encapsulated within a specially designed fixture and shocked while powered in various orientations to simulate high-g set-back, set-forward, and balloting launch conditions. Post-shock performance of each sensor was then obtained to determine bias offset, scale factor errors, and shock survivability. The shock experiments were performed on a high velocity and acceleration shock machine at Aberdeen Proving Ground, Maryland. As a result of these experiments, the ISS boards have been g-qualified to at least a 19-kg launch acceleration while powered. The ISS boards will be used in ongoing DFuze flight experiments in support of the following Navy and Army developmental projectile programs: Extended Range Guided Munitions, Advanced Gun System, Autonomous Naval Support Round, XM982 Excaliber, and Tank Extended Range Munition Kinetic Energy XM1007. To date, 30 ISS boards have been flight tested without any failures.

ACKNOWLEDGMENTS

The authors would like to thank each person by name who supported the inertial sensor suite (ISS) board shock experiments. Mr. Charles Mitchell, formerly of Dynamic Sciences Incorporated (DSI), is greatly appreciated for fabricating the shock experiment fixtures. Mr. Rex Hall, of Geo-Centers, is thanked for his schematic capture work and board layout support during the design of the inertial sensor suite in conjunction with National Aeronautics and Space Administration (NASA) Wallops Island and the NASA sounding rocket operations contract. Mr. Edward Bukowski, of DSI, Mr. Nathaniel Hundley, of DSI, and James Spangler, of the U.S. Army Research Laboratory, are all thanked for their technical support which included population and encapsulation of the ISS boards. Mr. Robert Solouff, of Analog Devices, is also thanked for supplying the ADXL78 and ADXL278 accelerometers before they were released for commercial sale.

INTENTIONALLY LEFT BLANK

Contents

1.	Introduction	1
2.	DFuze ISS Board Shock Experiment	3
3.	DFuze ISS Board Shock Experiment Results	4
3.1	Magnetometer (HMC1023) Survivability	6
3.2	Accelerometer (ADXL250) Survivability	7
3.3	Accelerometer (ADXL78) Survivability	8
3.4	Accelerometer (SDI1210) Survivability	10
3.5	Accelerometer (ADXL278 and SDI1210) Survivability	10
4.	Conclusions	14
	References	17
	Distribution List	19
	Report Documentation Page	23
	Figures	
1.	DFuze ISS Board	2
2.	DFuze Showing ISS Board Orientation Relative to Launch Conditions	2
3.	Shock Experiment Fixture	3
4.	Encapsulated ISS Board in Fixture	3
5.	Set-back Orientation	4
6.	Balloting Orientation	4
7.	Shock Table Coordinate System	4
8.	Shock Pulse Wave Form From 13,000-g Set-back Orientation Shock Experiment	5
9.	Expanded View of Shock Pulse Wave Form	5
10.	Sketch of ADXL250 Shock Experiment Configuration	7
11.	ADXL250 Output During Shock Experiment No. 2	9
12.	ADXL250 Output During Shock Experiment No. 3	9
13.	X-ray of ADXL250 After All Shock Experiments	11
14.	Sketch of ADXL278/SDI1210 Shock Experiment Configuration	11
15.	SDI1210 Output During Shock Experiment No. 2	13
16.	SDI1210 Output During Shock Experiment No. 3	13
17.	SDI1210 Output During Shock Experiment No. 4	14

Tables

1.	13,000-g Set-back Orientation Shock Experiment Results	6
2.	15,000-g Balloting Orientation Shock Experiment Results	6
3.	20,000-g Set-forward Orientation Shock Experiment Results	6
4.	ADXL250 Shock Experiment Results	8
5.	SDI1210 Shock Experiment Results	12
6.	ADXL278 Shock Experiment Results	12

SHOCK EXPERIMENT RESULTS OF THE DFUZE 8-CHANNEL INERTIAL SENSOR SUITE THAT CONTAINS COMMERCIAL MAGNETOMETERS AND ACCELEROMETERS

1. Introduction

Recent high-g shock experiments were performed on the inertial sensor suite (ISS) of the diagnostic fuze (DFuze) by the Weapons and Materials Research Directorate of the U.S. Army Research Laboratory (ARL), Aberdeen Proving Ground, Maryland, with support from a guest researcher from the Naval Surface Warfare Center (NSWC), Dahlgren Division. DFuze is a patented (US6349652) high-g projectile-borne measurement system for obtaining in-bore and in-flight ballistic data (i.e., accelerations, angular rates, and angular orientations) that significantly contribute toward the design, development, failure diagnostics, and aerodynamics determination of artillery or other projectiles. The DFuze predecessors have been providing critical measurement data that have immensely helped many Army programs such as Sense and Destroy Armor [1]. DFuze is comprised of g-qualified miniature sensors, microelectronics, signal and power-conditioning printed circuit boards (PCBs), on-board data acquisition, telemetry components, mechanical hardware, and a power supply as described by Hepner and Borgen [2]. As technology improves, smaller, more robust, and higher performance DFuze components replace the older ones. These components come from the commercial sector, ARL's internal research and development, and from specialized development programs such as the tri-service Hardened Subminiature Telemetry and Sensor System program sponsored by the Army's Simulation Training and Instrumentation Command [3, 4, 5].

The latest version of the ISS board is a two-sided 1.4-inch (35.56-mm) diameter PCB (see Figure 1) that contains commercial off-the-shelf (COTS) micro-electro-mechanical systems (MEMS) and other sensors for obtaining in-flight ballistic data. The sensors include a Honeywell HMC1023 three-axis magnetometer for determining body orientation relative to the earth's magnetic field, a Silicon Designs SDI1210 single-axis accelerometer for determining body-fixed axial acceleration along the trajectory, an Analog Devices ADXL250 or ADXL278 dual-axis accelerometer for determining body-fixed radial acceleration, four Analog Devices ADXL78 single-axis accelerometers used as an accelerometer only (AO) ring for determining body-fixed roll rate, and an Analog Devices AD22100SR temperature sensor used for temperature compensation of the inertial measurement unit. Four ARL-patented solar likeness indicating transducer (SLIT) optical sensors are part of the DFuze sensor suite but only the signal conditioning is situated on the ISS board. The SLIT sensors are situated on the DFuze's exterior and are further described in Hepner, Hollis, and Mitchell [6]. The processed solar data provide body orientation relative to the sun. A body-fixed coordinate system (I, J, and K) was assigned to the ISS board as displayed in Figure 1 (+I direction means positive axial

acceleration, +J direction means positive radial acceleration, and +K means positive radial acceleration 90 degrees counterclockwise from +J axis).

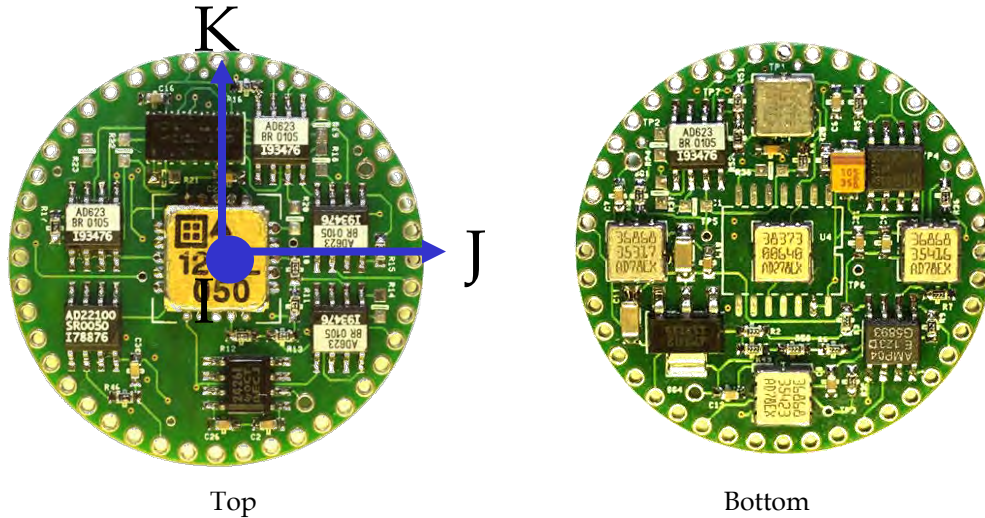


Figure 1. DFuze ISS Board.

Within the DFuze, the ISS board is oriented so that the components on top of the board experience g-loading into the board and those components on the bottom experience g-loading away from the board during launch (see Figure 2). The ISS board is situated within an aluminum body, approximately 3.6 inches (91.44 mm) from the nose tip. Shock experiments were arranged so that the individual sensor components could be qualified for their ability to survive artillery level gun launch. For example, the Navy's Extended Range Guided Munition (ERGM) has a maximum set-back acceleration level of 12,500 g (in which g = the acceleration of gravity). Balloting loads are typically 10% of set-back loads, and set-forward loads are typically 20% of set-back levels. This report describes how the experiments were performed and presents the results.

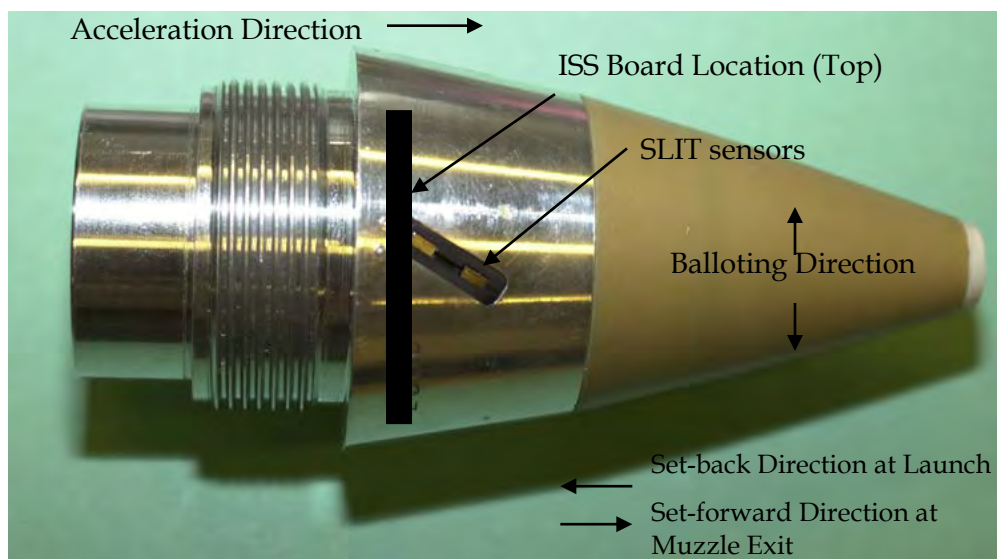


Figure 2. DFuze Showing ISS Board Orientation Relative to Launch Conditions.

2. DFuze ISS Board Shock Experiment

The shock experimentation of the new DFuze ISS board was performed to determine the survivability and post-shock performance of the sensors and associated electronics to a simulated gun launch while the sensors were powered during the shock event. It is important to note that the artillery-level shock experimentation will far exceed the maximum recommended shock acceleration as specified by each sensor's manufacturer for survivability. Davis, Brown, Myers, and Hollis [7] had g-qualified several COTS MEMS sensors during ground and flight experiments for earlier versions of the ISS board. A specially designed experimental fixture, as seen in Figure 3, was fabricated to allow the sensor package to be mounted in any of three different orientations. The three orientations thus allowed shock experimentation with the top of the board facing up (orientation in which the board will experience a set-back load), bottom of the board facing up (orientation in which the board will experience a set-forward load), and top of the board facing horizontal (orientation in which the board will experience a balloting load).

In preparation for the shock experiments, a single ISS board was wired so that it could be externally powered and each individual sensor could be monitored via its own color-coded wire. The ISS board was then encapsulated within the fixture, as shown in Figure 4. The fixture containing the encapsulated ISS board was then mounted on ARL's IMPAC66 high velocity and acceleration shock machine. Two of the three orientations are shown in Figures 5 and 6. The shock machine used high-pressure gas to raise or lower a drop table on command. Once the table was at the desired height, an elastic cord assisted in pulling the drop table toward an anvil that is covered with mitigation material for high-g shock simulations. Shocks as great as 30,000 g are achievable. Deceleration was measured by a reference accelerometer (PCB Piezotronics model 350-821) mounted directly on the drop table. An 8-channel analog-to-digital data acquisition system comprised of National Instruments hardware and Labview software was used to record the data. A body-fixed right-handed coordinate system (X, Y, and Z) was also established for the shock table, as displayed in Figure 7 (+X means that the sense axis of the unit undergoing test is aligned with the shock acceleration direction; +Y or +Z means that the sense axis of the unit undergoing test is perpendicular to the shock acceleration).



Figure 3. Shock Experiment Fixture.

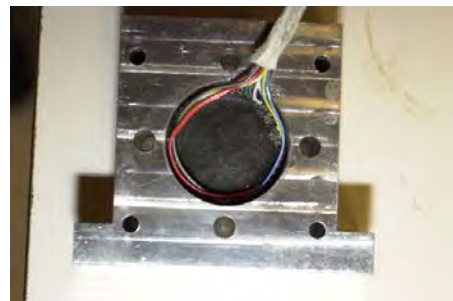


Figure 4. Encapsulated ISS Board in Fixture.

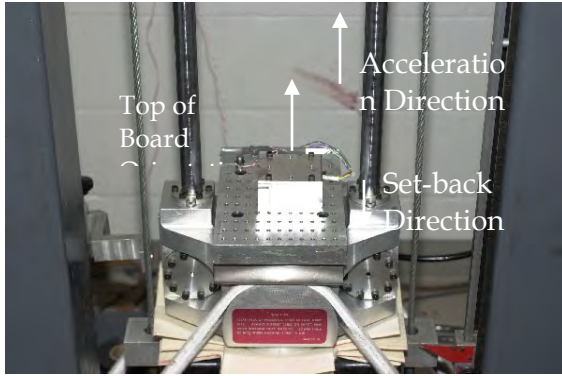


Figure 5. Set-back Orientation.

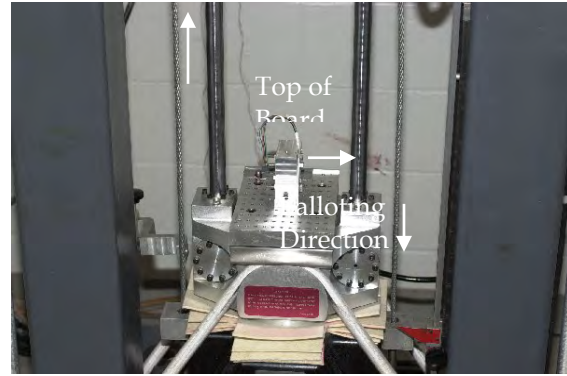


Figure 6. Balloting Orientation.

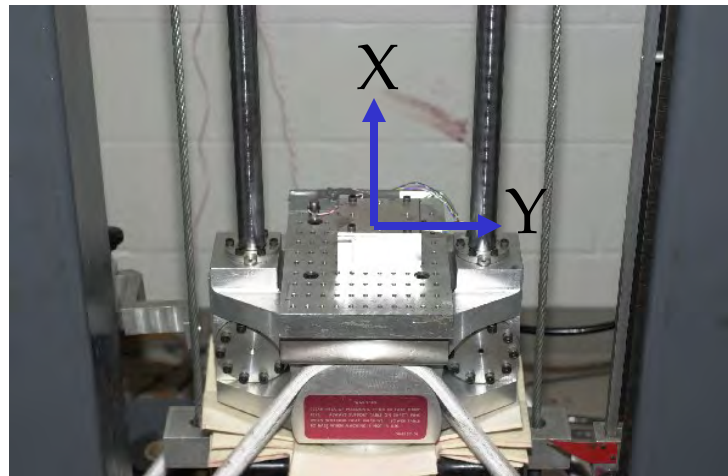


Figure 7. Shock Table Coordinate System.

3. DFuze ISS Board Shock Experiment Results

For these experiments, four felt pads, each 0.25 inch (6.35 mm) thick, were used as the mitigation material. The first shock experiment performed was in the set-back orientation at a level of 13,000 g. The shock machine was dropped at a height of 22 inches (55.9 cm) to achieve a maximum nominal 13,000-g shock magnitude with an initial pulse duration of 0.1 ms. The initial shock pulse is followed by smaller shock pulses that gradually dissipate. An example of the shock pulse waveform is shown in Figure 8 and is expanded to show more detail in Figure 9. Although typical shock pulses for artillery projectiles last between 15 and 25 ms, with an amplitude between 10,000 and 20,000 g, and have a shape resembling a half sine wave, the shock experienced by the table is a cursory evaluation and is easily performed. Our experience is that a shock table acceleration of the same magnitude as a launch acceleration is actually much harsher on the device. This is attributable to the high frequency nature of the shock. The second shock experiment performed was in the balloting orientation at a nominal level of 15,000 g. A third shock experiment was performed in the set-forward orientation at a

nominal level of 20,000 g. We achieved the set-forward orientation by mounting the fixture on its other side. The change in bias and scale factor errors of each sensor was measured before and after each shock as shown in Tables 1 through 3.

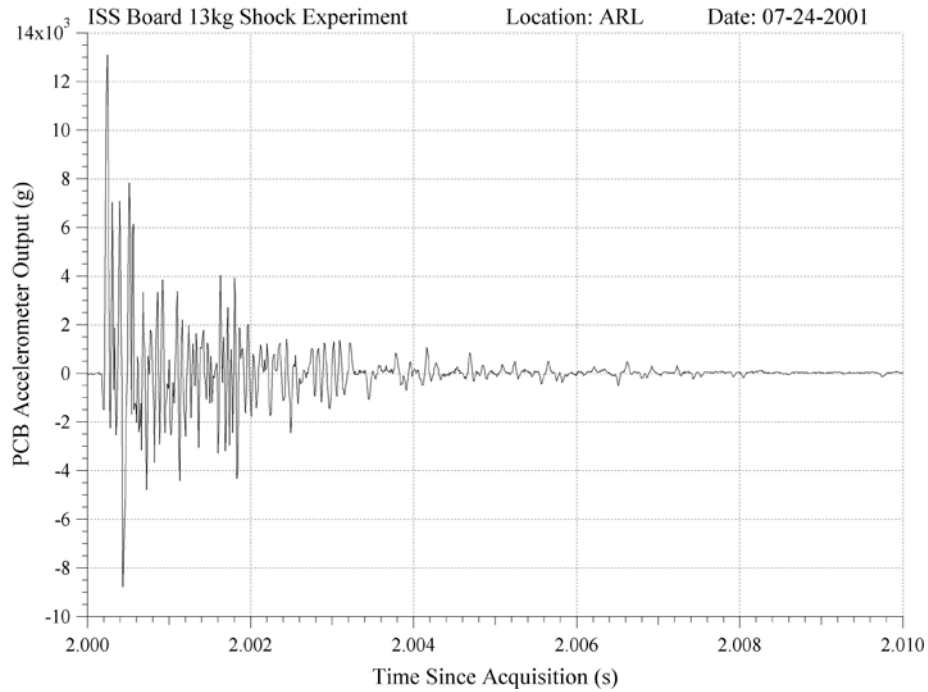


Figure 8. Shock Pulse Wave Form From 13,000-g Set-back Orientation Shock Experiment.

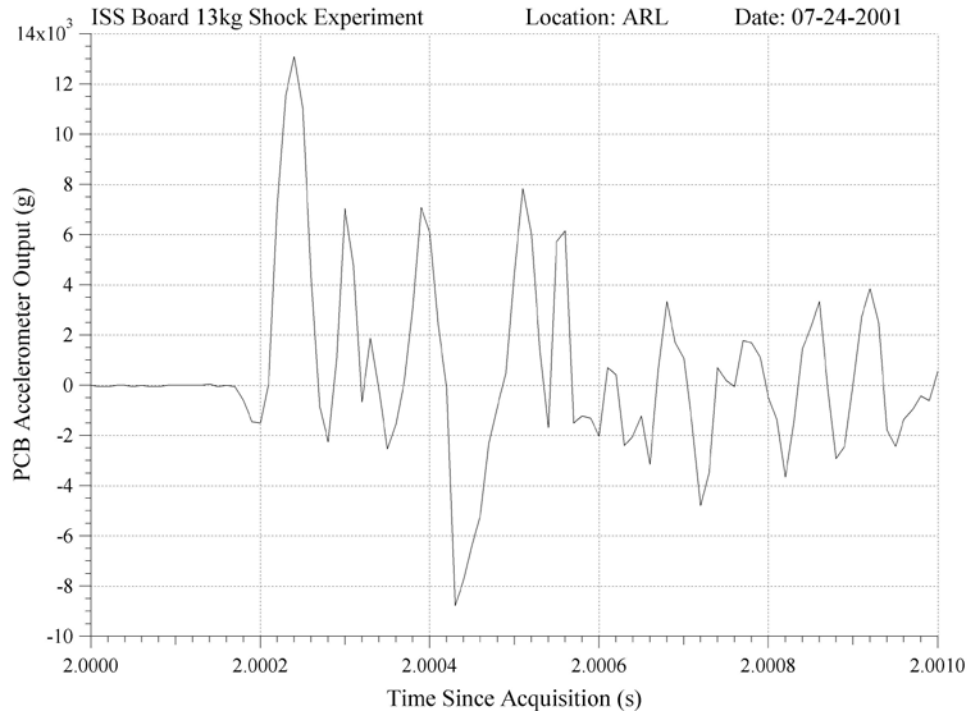


Figure 9. Expanded View of Shock Pulse Wave Form.

Table 1. 13,000-g Set-back Orientation Shock Experiment Results

Sensor	Sense Axis	Chip Orientation	Before Shock Bias (V)	After Shock Bias (V)	Before Shock Scale Factor	After Shock Scale Factor	Δ Bias	Δ Scale Factor (percent)	Comments
HMC1023	+J	Top	2.84	2.82	1.73 V/G	1.7 V/G	0.012 G	-1.76	
	+K	Top	3.41	3.46	1.94 V/G	1.92 V/G	0.026 G	-1.03	
	+I	Top	2.80	2.82	1.87 V/G	1.87 V/G	0.011 G	0	
ADXL250	-J	Bottom	2.483	2.493	35 mV/g	35 mV/g	0.286 g	0	
	+K	Bottom	2.506	2.508	35 mV/g	35 mV/g	0.057 g	0	
SDI1210	+I	Top	2.524	2.511	200 mV/g	200 mV/g	-0.065 g	0	
AO Ring		Bottom	1.004	1.007	Unknown	Unknown	0.003 V	Unknown	

Table 2. 15,000-g Balloting Orientation Shock Experiment Results

Sensor	Sense Axis	Chip Orientation	Before Shock Bias (V)	After Shock Bias (V)	Before Shock Scale Factor	After Shock Scale Factor	Δ Bias	Δ Scale Factor (percent)	Comments
HMC1023	+J	Top	2.82	2.82	1.7 V/G	1.72 V/G	0 G	1.18	
	+K	Top	3.46	3.47	1.92 V/G	1.96 V/G	0.005 G	2.5	
	+I	Top	2.82	2.81	1.87 V/G	1.87 V/G	0.005 G	0	
ADXL250	-J	Bottom	2.493	2.102	35 mV/g	35 mV/g	11.18 g	0	Large Bias Shift Not Operational
	+K	Bottom	2.508	4.057	35 mV/g	Unknown	Unknown	Unknown	
SDI1210	+I	Top	2.511	2.032	200 mV/g	200 mV/g	2.395 g	0	Large Bias Shift
AO Ring		Bottom	1.007	0.553	Unknown	Unknown	0.454 V	Unknown	Bias Shift

Table 3. 20,000-g Set-Forward Orientation Shock Experiment Results

Sensor	Sense Axis	Chip Orientation	Before Shock Bias (V)	After Shock Bias (V)	Before Shock Scale Factor	After Shock Scale Factor	Δ Bias	Δ Scale Factor (percent)	Comments
HMC1023	+J	Top	2.82	2.81	1.72 V/G	1.72 V/G	0.006 G	0	
	+K	Top	3.47	3.48	1.96 V/G	1.96 V/G	0.005 G	0	
	+I	Top	2.81	2.84	1.87 V/G	1.87 V/G	0.016 G	0	
ADXL250	-J	Bottom	2.102	3.523	35 mV/g	35 mV/g	40.6 g	0	Large Bias Shift Large Bias Shift
	+K	Bottom	4.057	2.497	Unknown	35 mV/g	-44.57 g	0	
SDI1210	+I	Top	2.032	1.088	20 mV/g	200 mV/g	4.722 g	0	
AO Ring		Bottom	0.553	0.448	Unknown	Unknown	0.105 V	Unknown	

3.1 Magnetometer (HMC1023) Survivability

After each shock experiment, the bias and scale factor of each axis of the HMC1023 three-axis magnetometer was checked in a single-axis Helmholtz coil. The Helmholtz coil was able to cancel the local earth's magnetic field and to simulate a known field. The bias and scale factor, while exposed to the known magnetic field, was relatively the same before and after all shocks (see Tables 1 through 3). Since these devices are being used for measurement instrumentation purposes, small biases and scale factor errors are tolerated and can be corrected in the post-processing of the data. Therefore, since the magnetometer survived the 13,000-g set-back orientation shock, the 15,000-g balloting

shock, and the 20,000-g set-forward shock without being compromised, the magnetometer would be recommended for artillery level flight conditions.

3.2 Accelerometer (ADXL250) Survivability

Although the ADXL250 survived the 13,000-g shock in the set-back orientation without large changes in scale factor or bias, it experienced non-operation of Y-axis and a large bias shift of the X-axis during the balloting orientation shock experiment. The Y-axis was producing 4V after the 15,000-g shock event. However, the Y-axis was operational after the 20,000-g set-forward shock event and returned to its original pre-experiment bias. This anomaly in operation led to additional experimentation on this device.

For the additional experiments, two ADXL250s were mounted on two separate evaluation boards. These boards were then encapsulated into the shock fixture with one device facing up and one facing down (see Figure 10). The ADXL250s were shocked a total of eight times with shock levels that ranged from 8,000 to 22,000 g in a randomized fashion (see Table 4). Since the scale factor did not seem to be affected by shock in the previous shock data, the scale factor was not measured after each shock. Only the bias and sensor operation characteristics were measured during these additional experiments.

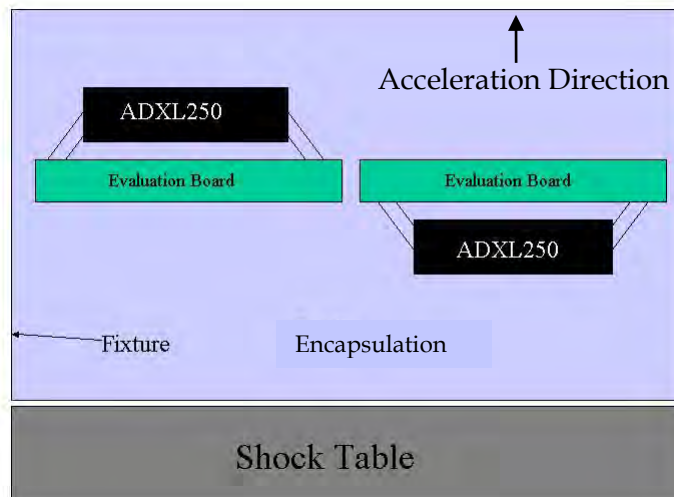


Figure 10. Sketch of ADXL250 Shock Experiment Configuration.

The ADXL250 that was on the bottom of the board and facing down still had a problem. It was intermittent in its operation, as described in Experiments 2 and 3 of Table 4, as seen in Figures 11 and 12. When oriented in this manner, the ADXL250 experienced an initial force that pulled its proof mass away from its die substrate during the set-back acceleration. An attempt to determine the cause of the non-operation was made by X-raying the ISS board. However, the only determination that could be made from the X-rays was that the solder joints to the die were still intact (see Figure 13). For a complete investigation, the sensors would need to be extracted from the encapsulation and examined under a scanning electron microscope. To date, no plans have been made

for this investigation. The ADXL250, when mounted on the top of the board and facing up, did not experience any large bias shifts or non-operation.

Table 4. ADXL250 Shock Experiment Results

Shock No.	Max Shock Level (g)	Sense Axis and Orientation	Shock Table Orientation	Before Shock Bias (V)	After Shock Bias (V)	Δ Bias (V)	Δ Bias (g)	Comments
1	13943	+K Top	+Z	2.521	2.522	-0.001	0	
		-J Top	+Y	2.351	2.351	0	0	
		-K Bottom	-Z	2.454	2.445	0.009	0	
		+J Bottom	-Y	2.493	2.503	-0.01	0	
2	18920	+K Top	+Z	2.521	2.542	-0.021	-0.52	Not Operational
		-J Top	+Y	2.351	2.351	0.000	0	
		-K Bottom	-Z	2.445	0.087	2.358		
		+J Bottom	-Y	2.503	2.505	-0.002	-0.05	
3	21040	+K Top	+Z	2.54	2.524	0.016	0.40	Operational
		-J Top	+Y	2.35	2.352	-0.002	-0.05	
		-K Bottom	-Z	0.087	2.504	-2.417	-60.43	
		+J Bottom	-Y	2.505	2.507	-0.002	-0.05	
4	17042	+K Top	+Z	2.526	2.526	0	0	
		-J Top	+Y	2.352	2.351	0.001	0.02	
		-K Bottom	-Z	2.458	2.457	0.001	0.03	
		+J Bottom	-Y	2.508	2.507	0.001	0.02	
5	20046	+K Top	+Z	2.527	2.520	0.007	0.18	Large Bias Shift
		-J Top	+Y	2.351	2.351	0	0	
		-K Bottom	-Z	2.452	2.755	-0.303	-7.58	
		+J Bottom	-Y	2.507	2.509	-0.002	-0.05	
6	21549	+K Top	+Z	2.521	2.507	0.014	0.35	Not Operational Not Operational
		-J Top	+Y	2.351	2.351	0	0	
		-K Bottom	-Z	2.755	4.963	-2.208		
		+J Bottom	-Y	2.509	0.077	2.432		
7	8075	+K Top	+Z	2.507	2.507	0	0	Not Operational Not Operational
		-J Top	+Y	2.351	2.351	0	0	
		-K Bottom	-Z	4.952	4.952	0		
		+J Bottom	-Y	0.076	0.076	0		
8	13755	+K Top	+Z	2.507	2.536	-0.029	-0.72	Not Operational Operational
		-J Top	+Y	2.351	2.349	0.002	0.05	
		-K Bottom	-Z	4.952	0.087	4.865		
		+J Bottom	-Y	0.076	2.499	-2.423	-60.58	

3.3 Accelerometer (ADXL78) Survivability

The four Analog Devices ADXL78 single-axis accelerometers representing the AO ring were also facing down (experiencing an initial force that pulled the proof mass away from the die substrate) in the 13,000-g set-back orientation shock experiment. These accelerometers survived the set-back orientation shock with no problems (see Table 1). In the balloting orientation, the AO ring experienced a 0.454-V bias shift (see Table 2). In the set-forward shock experiment, the bias shifted 0.105 V (see Table 3). Although the

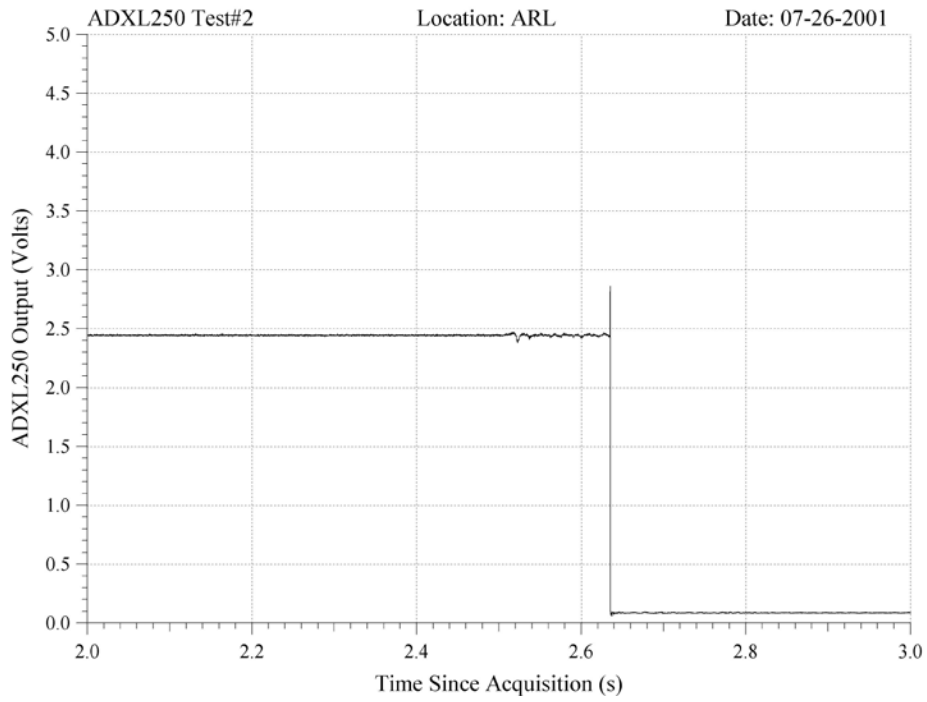


Figure 11. ADXL250 Output (-K-axis bottom) During Shock Experiment No. 2.

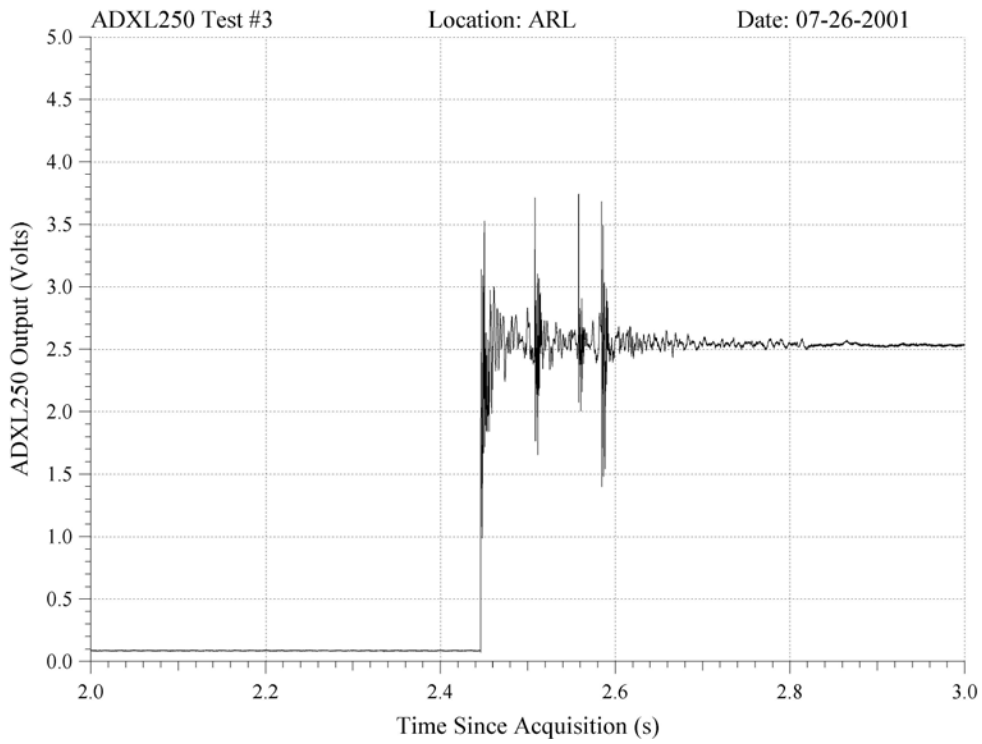


Figure 12. ADXL250 Output (-K-axis bottom) During Shock Experiment No. 3.

scale factor was not determined after each test, the AO ring was exercised for functionality. It functioned after each experiment. It was determined that since the 15,000-g balloting shock was much greater than would ever be seen in actual artillery-level flight conditions.

3.4 Accelerometer (SDI1210) Survivability

The Silicon Devices SDI1210 single-axis accelerometer seemed to survive the 13,000-g set-back shock event (see Table 1). The sensor did have problems handling the 15,000-g balloting and 20,000-g set-forward shock events (see Tables 2 and 3). The 20,000-g set-forward shock event is much higher than would be seen in normal gun firings. The purpose of the experiment in this orientation was to determine if the board could be installed in the opposite direction (so that the top became the bottom and vice versa) for future flight experiments. Since the SDI1210 also had problems in the set-forward orientation, further experimenting was performed. The additional experimentation is discussed in the next section.

3.5 Accelerometer (ADXL278 and SDI1210) Survivability

Since the ADXL250 experienced anomalies when oriented upside down, experiments were planned to see if the ADXL278 could be used as its replacement or if the ISS board could be flipped. For these experiments, two ISS boards were used with an ADXL278 and a SDI1210 mounted on each board. These boards were then wired and encapsulated inside the fixture, with one ADXL278 and one SDI1210 pointing up and one each facing down (see Figure 14). The fixture was then mounted onto the drop table and shocked a total of seven times (five times in the set-back orientation and two times in the balloting orientation) with increasing shock levels. Tables 5 and 6 show the tabulated results of these shock experiments for the SDI1210 and ADXL278. Since the scale factor did not seem to be affected by the shock in the previous experiments, the scale factor was not measured after each shock. Therefore, the sensor bias and operation were the only characteristics measured during these additional experiments.

The SDI1210 single-axis accelerometer survived the initial 19,000-g shock when it was oriented on the top and on the bottom of the ISS board. Upon subsequent shock experiments, a large bias shift occurred for the SDI1210 mounted on the bottom of the board and then to the SDI1210 mounted on top of the board until both devices were no longer operational. The accelerometer facing downward experienced a small bias shift after the second shock experiment (see Figure 15), a large bias shift after the third shock experiment (see Figure 16), and completely failed after the fourth shock experiment (see Figure 17). The accelerometer on top of the ISS board had a large bias shift after the fourth shock experiment and failed completely after the fifth shock experiment. No data were obtained for the accelerometers in the balloting orientation since both were no longer operational during Experiments 6 and 7.

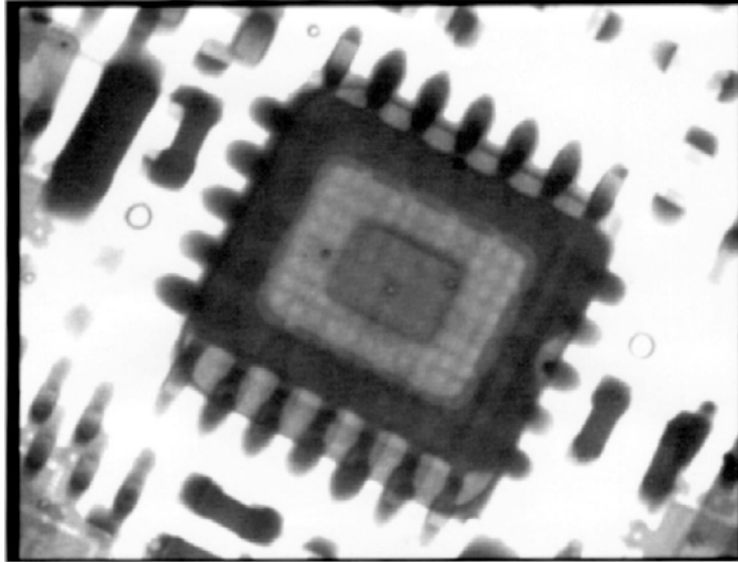


Figure 13. X-ray of ADXL250 After All Shock Experiments.

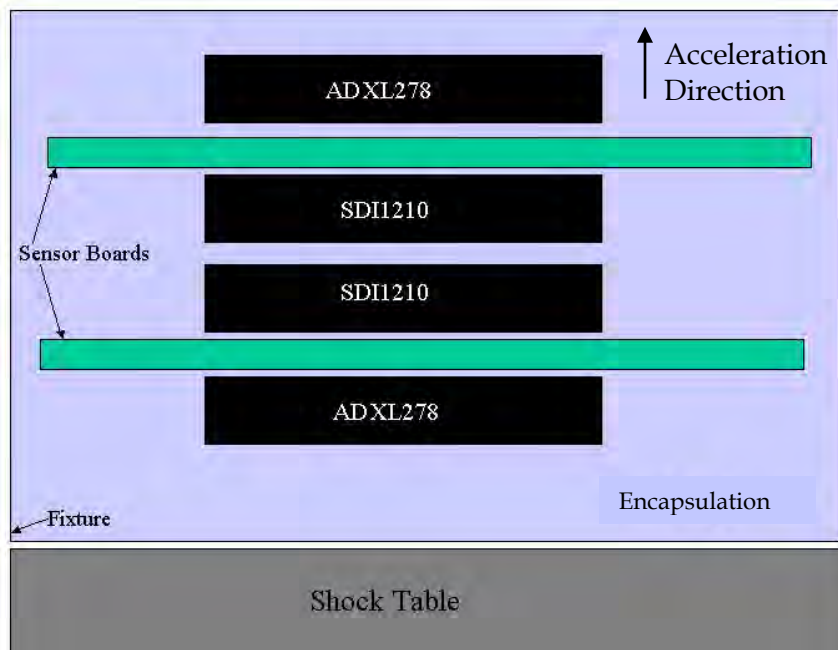


Figure 14. Sketch of ADXL278/SDI1210 Shock Experiment Configuration.

The ADXL278 two-axis accelerometer survived when it was mounted on the top or on the bottom of the board in both the set-back and balloting shock orientations to the maximum 32,000-g shock level. There seemed to be no bias shifts larger than 1 g until the fifth shock experiment at a 30,000-g shock level. It is not known how successive shocks affect the device structure. As a result of this set of experiments, the ADXL278 was recommended for artillery-level flight conditions and was qualified to a 30,000-g shock level.

Table 5. SDI1210 Shock Experiment Results

Shock No.	Max Shock Level (kg)	Sense Axis and Orientation	Shock Table Orientation	Before Shock Bias (V)	After Shock Bias (V)	Δ Bias (V)	Δ Bias (g)	Comments
1	19000	+I Top	+X	2.700	2.700	0.000	0	
		-I Bottom	-X	2.340	2.320	0.020	0.10	
2	16995	+I Top	+X	2.704	2.701	0.003	0.01	
		-I Bottom	-X	2.369	2.159	0.210	1.00	
3	21408	+I Top	+X	2.702	2.681	0.021	0.10	Large Bias Shift
		-I Bottom	-X	2.148	1.185	0.963	4.59	
4	25915	+I Top	+X	2.683	3.409	-0.726	-3.46	Large Bias Shift Not Operational
		-I Bottom	-X	1.187	0	1.187		
5	29999	+I Top	+X	3.432	0	3.432		Not Operational Not Operational
		-I Bottom	-X	0	0			
6	13098	+I Side	+Y	0	0			Not Operational Not Operational
		-I Side	-Y	0	0			
7	32159	+I Side	+Y	0	0			Not Operational Not Operational
		-I Side	-Y	0	0			

Table 6. ADXL278 Shock Experiment Results

Shock No.	Max Shock Level (g)	Sense Axis and Orientation	Shock Table Orientation	Before Shock Bias (V)	After Shock Bias (V)	Δ Bias (V)	Δ Bias (g)	Comments
1	19000	+K Top	+Z	2.500	2.500	0	0	
		-J Top	+Y	2.480	2.480	0	0	
		-K Bottom	-Z	2.490	2.490	0	0	
		+J Bottom	-Y	2.500	2.500	0	0	
2	16995	+K Top	+Z	2.500	2.502	-0.002	-0.07	
		-J Top	+Y	2.480	2.480	0.000	0	
		-K Bottom	-Z	2.489	2.486	0.003	0.10	
		+J Bottom	-Y	2.505	2.514	-0.009	-0.30	
3	21408	+K Top	+Z	2.501	2.519	-0.018	-0.60	
		-J Top	+Y	2.478	2.478	0	0.00	
		-K Bottom	-Z	2.485	2.484	0.001	0.03	
		+J Bottom	-Y	2.511	2.510	0.001	0.03	
4	25915	+K Top	+Z	2.519	2.520	-0.001	-0.03	
		-J Top	+Y	2.478	2.470	0.008	0.27	
		-K Bottom	-Z	2.484	2.470	0.014	0.47	
		+J Bottom	-Y	2.510	2.494	0.016	0.53	
5	29999	+K Top	+Z	2.520	2.518	0.002	0.07	
		-J Top	+Y	2.470	2.469	0.001	0.03	
		-K Bottom	-Z	2.470	2.511	-0.041	-1.37	
		+J Bottom	-Y	2.494	2.498	-0.004	-0.13	
6	13098	+K Side	+X	2.555	2.544	0.011	0.37	
		-J Side	+Y	2.479	2.479	0	0	
		-K Side	-X	2.485	2.484	0.001	0.03	
		+J Side	-Y	2.496	2.496	0	0	
7	32159	+K Side	+X	2.544	2.545	-0.001	-0.03	
		-J Side	+Y	2.479	2.479	0	0	
		-K Side	-X	2.485	2.485	0	0	
		+J Side	-Y	2.496	2.497	-0.001	-0.03	

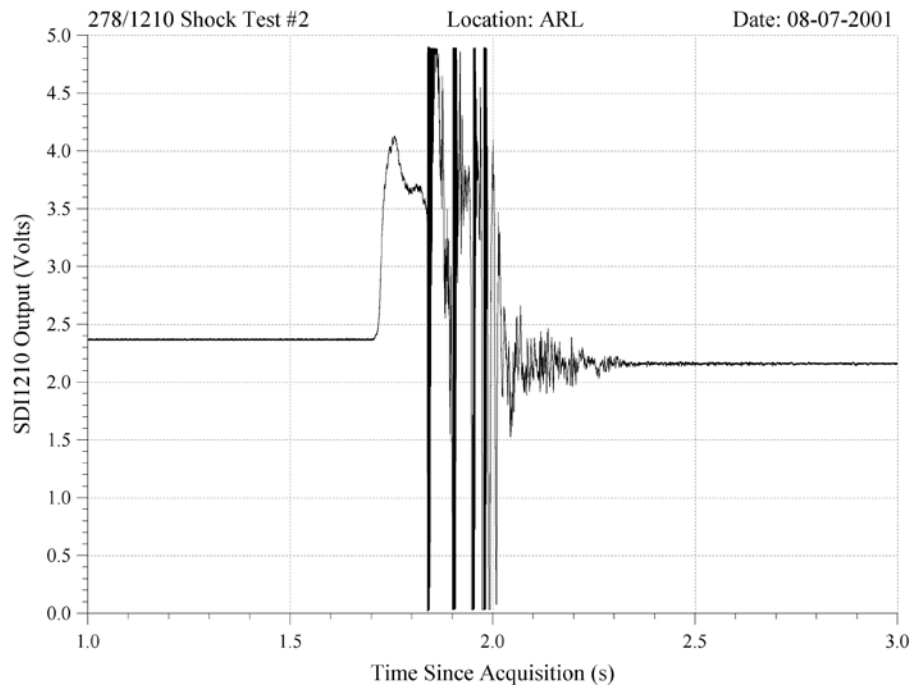


Figure 15. SDI1210 Output (-I-axis bottom) During Shock Experiment No. 2.

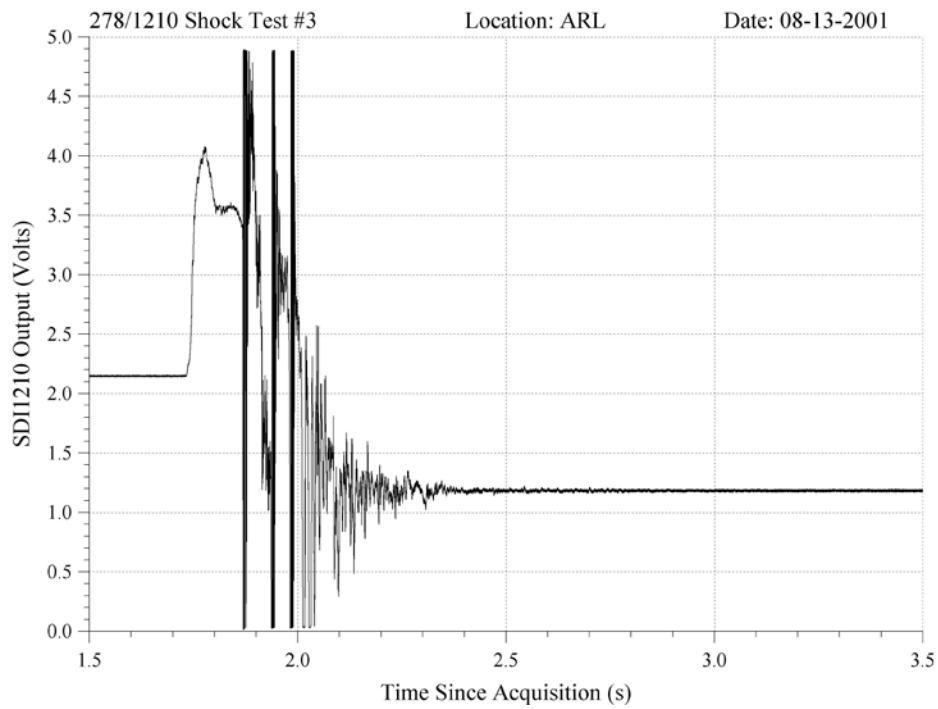


Figure 16. SDI1210 Output (-I-axis bottom) During Shock Experiment No. 3.

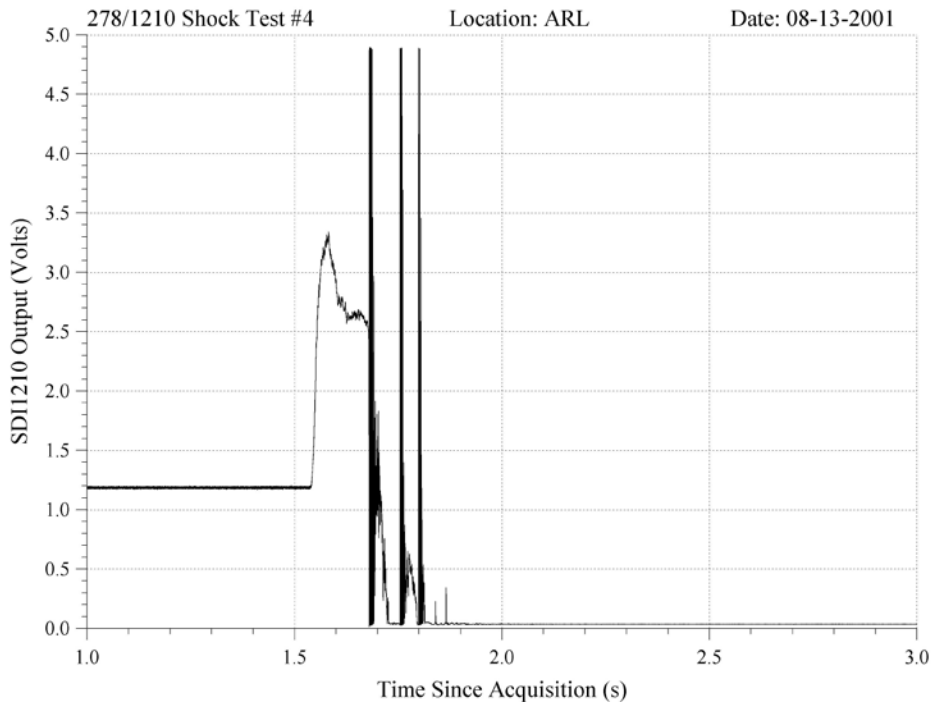


Figure 17. SDI1210 Output (-I-axis bottom) During Shock Experiment No. 4.

4. Conclusions

The results from the shock experiments are summarized as follows: ADXL78 and ADXL278 survived when mounted on the top or bottom of the board after repeated shock accelerations to a 32,000-g magnitude without serious performance degradation; SDI210 survived a 19,000-g shock in the set-back orientation once without scale factor or bias errors and eventually failed after repeated shocks; HMC1023 survived the 13,000-g set-back shock, 15,000-g balloting shock, and 20,000-g set-forward shock; and the ADXL250, when oriented on top of the board, survived a 21,000-g shock but when oriented on the bottom of the board, only survived a set-back acceleration of 14,000 g. The ADXL250 also had performance trouble when shocks occurred in the balloting and set-forward orientation. As a result of these shock experiments, the ISS board was g-qualified to a minimum of 19,000 g if the ADXL278's are used. If the ADXL250's are used instead of the ADXL78's, the g-qualification decreases to at least 14,000 g. Some of the failures occurred when the devices were subjected to extremely high shocks in the balloting and set-forward orientation. These are unlikely to occur in artillery-level launches but are possible for tank or small caliber projectiles. The authors feel that the ISS has a good chance to survive launch conditions exceeding 30,000 g since the set-forward and balloting loads would be estimated to be 6,000 g and 3,000 g, respectively.

The authors feel that the recent shock experiments of the ISS boards have provided an adequate level of g-qualification for a successful evaluation of the current Navy and Army projectiles undergoing development. Recently, DFuzes have been purchased by NSWC for flight experiments in support of the Navy's ERGM, Advanced Gun System, and Autonomous Naval Support Round programs. The harshest of these launch conditions required the DFuze to survive a 15,000-g launch acceleration while powered. Recent flight data from these experiments have shown that the ISS boards survived the high-g launch conditions and transmitted excellent data from each sensor without any performance degradation. To date, 30 ISS boards have been flight tested without any failures. Twenty-five DFuzes were flown on large caliber projectiles and five DFuzes that had been re-configured were flown on small caliber projectiles. If a customer would want to perform a flight experiment exceeding 30,000 g, more realistic air or rail gun ground experimentation could be implemented to verify survivability before flight. DFuzes have also been purchased by the U.S. Army Tank-Automotive and Armaments Command, Armament Research Development and Engineering Center, to support the Army's XM982 Excaliber program.

INTENTIONALLY LEFT BLANK

References

1. Davis, B.S., and D.J. Hepner, *Yawsonde and Microelectromechanical Systems (MEMS) Accelerometer Data of the M898 Sense and Destroy Armor (SADARM) Projectile During Flight Performance Tests (FPTs) II, II, and IV*, ARL-MR-417, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, September 1998.
2. Hepner, D.J., and G. Borgen, *A High-G Flight Experiment of a Field-Programmable Gate Array (FPGA) Pulse Code Modulation (PCM) Encoder*, 46th ISA, Bellvue, WA, May 2000.
3. Burke, L.W., E. Bukowski, C. Newnham, N. Scholey, W. Hoge, and Z. Ye, *HSTSS Battery Development for Missile and Ballistic Telemetry Applications*, ARL-MR-477, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, May 2000.
4. Davis, B.S., J.A. Condon, and T.G. Brown, *Flight Demonstration Results of an Inertial Measurement Unit and Global Positioning System Translator Telemetry System*, ARL-TR-2630, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, November 2001.
5. Muller, P.C., *PCM Encoders - U.S. Army PCM Encoder Development*, HSTSS Symposium, Denver, CO, August 2001.
6. Hepner, D.J., M.S.L. Hollis, and C.E. Mitchell, *Yawsonde Technology for the Jet Propulsion Laboratory (JPL) Free-Flying Magnetometer (FFM) Program*, ARL-TR-1610, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, July 1998.
7. Davis, B.S., T.G. Brown, C.R. Myers, and M.S.L. Hollis, *Ground and Flight Testing of Microelectromechanical Systems (MEMS) Sensors for the Commercial Technology Insertion Program (CTIP)*, ARL-MR-384, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, January 1998.

INTENTIONALLY LEFT BLANK

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	ADMINISTRATOR DEFENSE TECHNICAL INFO CENTER ATTN DTIC OCA 8725 JOHN J KINGMAN RD STE 0944 FT BELVOIR VA 22060-6218	1	CDR US ARMY TACOM ARDEC ATTN AMSTA AR QAC M BOMUS PICATINNY ARSENAL NJ 07806-5000
1	DIRECTOR US ARMY RESEARCH LABORATORY ATTN AMSRL CS AI R REC MGMT 2800 POWDER MILL RD ADELPHI MD 20783-1197	3	CDR US ARMY TACOM ARDEC ATTN AMSTA AR FSF T S CHUNG M AMORUSO AMSTA AR FSF D C PEREIRA PICATINNY ARSENAL NJ 07806-5000
1	DIRECTOR US ARMY RESEARCH LABORATORY ATTN AMSRL CI LL TECH LIB 2800 POWDER MILL RD ADELPHI MD 207830-1197	6	CDR US ARMY TACOM ARDEC ATTN AMSTA AR FSP S PEARCY AMSTA AR FSP G S DEFEO P GRANGER D CARLUCCI R WERKO AMSTA AR FSP E A BAHIA PICATINNY ARSENAL NJ 07806-5000
1	DIRECTOR US ARMY RESEARCH LABORATORY ATTN AMSRL D D SMITH 2800 POWDER MILL RD ADELPHI MD 20783-1197	2	CDR US ARMY TACOM ARDEC ATTN AMSTA AR FS A WARNASCH AMSTA AR FSA K CHIEFA PICATINNY ARSENAL NJ 07806-5000
4	CDR US ARMY TACOM ARDEC ATTN AMSTA AR CCF A C ROBINSON M D'ONOFRIO W KONICK B CHRISTOPHERSON 2800 POWDER MILL RD ADELPHI MD 20783-1197	5	CDR US ARMY TACOM ARDEC ATTN AMSTA AR CCH A R CARR M LUCIANO G KOLASA M PALATHINGAL D VO PICATINNY ARSENAL NJ 07806-5000
8	DIRECTOR US ARMY RESEARCH LABORATORY ATTN AMSRL SE RL M DUBEY B PIEKARSKI AMSRL SE S J EIKE AMSRL SE SA J PRICE AMSRL SE SS LADAS A EDELSTEIN D FLIPPEN AMSRL SE EE Z SZTANKAY 2800 POWDER MILL RD ADELPHI MD 20783-1197	2	CDR US ARMY TACOM ARDEC ATTN AMSTA AR CCL B R MAZESKI D AHMAD PICATINNY ARSENAL NJ 07806-5000
1	DIRECTOR US ARMY RESEARCH LABORATORY ATTN AMSRL WM MB A FRYDMAN 2800 POWDER MILL RD ADELPHI MD 20783-1197	1	CDR US ARMY TACOM ARDEC ATTN AMSTA AR RMP N GRAY PICATINNY ARSENAL NJ 07806-5000
1	US ARMY CECOM RDEC ATTN AMSEL RD C2 CS J VIG FORT MONMOUTH NJ 07703-5601	1	CDR US ARMY TACOM ARDEC ATTN AMSTA AR CCL A E REMFER PICATINNY ARSENAL NJ 07806-5000
		1	CDR US ARMY TACOM ARDEC ATTN SFAE GCSS BM R KOWALSKI PICATINNY ARSENAL NJ 07806-5000
		1	CDR US ARMY TACOM ARDEC ATTN SFAE GCSS ARMS C GRASSANO PICATINNY ARSENAL NJ 07806-5000
		1	DARPA/MTO ATTN W TANG 3701 N FAIRFAX DRIVE ARLINGTON VA 22203-1714

NO. OF
COPIES ORGANIZATION

8 CDR NAVAL SURF WARFARE CTR
 ATTN G33 J FRAYSSE G32 ELLIS
 G34 H WENDT M HAMILTON
 G61 LARACH D HAGEN
 A EVANS B52 M ABAIE
 17320 DAHLGREN ROAD
 DAHLGREN VA 22448-5100

7 CDR NAVAL SURF WARFARE CTR
 INDIAN HEAD DIV
 ATTN CODE 40P3 D GARVICK
 CODE 4420F L FAN
 CODE 4110C K JOHNSON
 CODE 433 V CARLSON
 CODE 4420 P SMITH
 CODE 4120 M. WILMOTH
 CODE 410A C PARAS
 101 STRAUSS AVE
 INDIAN HEAD MD 20640-5035

1 CDR NAVAL SURF WARFARE CTR
 DAHLGREN DIV
 ATTN CODE 40D J BLANKENSHIP
 6703 WEST HIGHWAY 98
 PANAMA CITY FL 32407-7001

1 IDA
 SCIENCE AND TECH DIV
 ATTN H LAST
 1801 N BEAUREGARD ST
 ALEXANDRIA VA 22311-1772

2 CDR OFC OF NAVAL RSCH
 ATTN CODE 333 J GOLDWASSER
 P MORRISSON
 800 N QUINCY ST RM 507
 ARLINGTON VA 22217-5660

1 CDR AFRL/MNMF
 ATTN S ROBERSON
 306 W EGLIN BLVD STE 219
 EGLIN AFB FL 32542-6810

2 CDR NAWC WEAPONS DIV
 ATTN G BORGEN D POWELL
 CODE 543200E BLDG 311
 POINT MUGU CA 93042-5000

3 CDR NAVAL AIR WARFARE CTR
 WEAPONS DIVISION
 ATTN CODE C3923 S GATTIS
 CODE C3904 D SCOFIELD
 S MEYERS
 CHINA LAKE CA 93555-6100

NO. OF
COPIES ORGANIZATION

4 PROGRAM MANAGER ITTS
 STRICOM
 ATTN AMFTI EL D SCHNEIDER
 R COLANGELO
 R CARPENTER
 C GOODWIN
 12350 RESEARCH PKWY
 ORLANDO FL 32826-3276

1 DIRECTOR
 US ARMY RTTC
 ATTN STERT TE F TD R EPPS
 REDSTONE ARSENAL AL 35898-8052

1 CDR US ARMY
 YUMA PROVING GROUND
 ATTN STEYP MT AT A A HOOPER
 YPG AZ 85365-9110

10 CDR US ARMY AMCOM
 ATTN AMSAM RD MG NC P RUFFIN
 J BAEDER V LEFEVRE
 AMSAM RD MG IP G HUTCHESON
 AMSAM RD WS DP TD S BURGETT
 C LEWIS C ROBERTS
 B ROBERTSON
 AMSAM RD WS ID P ASHLEY
 T HUDSON
 REDSTONE ARSENAL AL 35898-5247

1 TEST ARTICLE PREP DEP
 NAWCAD CODE 540000A R FAULSTICH
 BLDG 1492 UNIT 1
 PATUXENT MD 20670-1456

1 CDR US ARMY
 ATTN STEYP TD ATO A HART
 YPG AZ 85365-9106

1 ARROW TECH ASSOCIATES
 ATTN W HATHAWAY
 1233 SHELburne RD STE 8
 SOUTH BURLINGTON VT 05403

1 ALLIANT DEFENSE
 ATTN A GAUZENS
 PO BOX 4648
 CLEARWATER FL 33758-4648

1 LOCKHEED/MARTIN-SANDERS
 ATTN M CARLSON
 NCA1-2078 95 CANAL ST
 NASHUA NH 03061-0868

<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>	<u>NO. OF</u> <u>COPIES</u>	<u>ORGANIZATION</u>
2	ALLIANT TECHSYSTEMS ATTN C CANDLAND R DOHRN 600 SECOND ST NE HOPKINS MN 55343-8384	1	UC BERKELEY ATTN A PISANO DEPT OF MECH ENG 5101-B ETCHEVERRY HALL BERKELEY CA 94720-1740
2	SAIC ATTN J DISHON G PHILLIPS 16701 W BERNARDO DR SAN DIEGO CA 92127	1	SUNY ATTN R MARCHAND DEPT OF MATHEMATICS & COMPUTER SCIENCE FREDONIA NY 14063
1	SAIC ATTN J GLISH 8500 NORMANDALE LAKE BLVD SUITE 1610 BLOOMINGTON MN 55437-3828	3	GEORGIA TECH RSCH INST COBB CO RSCH FACILITY ATTN J MCMICHAEL A LOVAS D PAREKH 7220 RICHARDSON RD SMYRNA GA 30080
1	SAIC ATTN M PALMER 1410 SPRING HILL RD STE 400 MCLEAN VA 22102	1	GEORGIA INST OF TECH SCHOOL OF AEROSPACE ENG ATTN A CALISE 270 FERST DR ATLANTA GA 30332-0150
1	SYSTEMS PLANNING CORP ATTN M MOSES 1429 QUINCY ST ARLINGTON VA 22207	2	ANALOG DEVICES ATTN B SULLOFF S LEWIS 21 OSBORN ST CAMBRIDGE MA 02139-3556
2	ROCKWELL COLLINS ATTN M JOHNSON R MINOR 350 COLLINS RD NE CEDAR RAPIDS IA 52498	1	ANALOG DEVICES ATTN R MEISENHELDER 804 WOBURN ST WILMINGTON MA 01887-3462
1	SWALES AEROSPACE ATTN Q LAM 5050 POWDER MILL RD BELTSVILLE MD 20705	1	HONEYWELL ATTN MN14-3B35 M CARUSO 12001 STATE HIGHWAY 55 PLYMOUTH MN 55441
1	UCLA ATTN J JUDY 68 -121 ENGINEERING IV BOX 951594 LOS ANGELES CA 90095-1594	1	AEROVIRONMENT ATTN C MIRALLES 4685-3H INDUSTRIAL ST SIMI VALLEY CA 93063
1	JOHNS HOPKINS UNIV APPLIED PHYSICS LABORATORY ATTN W D'AMICO 1110 JOHNS HOPKINS RD LAUREL MD 20723-6099	1	ROCKWELL SCIENCE CTR ATTN I GOLDBERG PO BOX 1085 THOUSAND OAKS CA 91358
5	CHLS STARK DRAPER LAB ATTN J CONNELLY J SITOMER R POLUTCHKO T EASTERLY A KOUREPENIS F HARRISON 555 TECHNOLOGY SQUARE CAMBRIDGE MA 02139-3563	1	SILICON DESIGNS ATTN J COLE 1445 NW MALL ST ISSAQUAH WA 98027

NO. OF
COPIES ORGANIZATION

1 CDR NAVSEA
 ATTN M SIMMS
 CODE 6024 BLDG 2940W
 CRANE IN 47522

ABERDEEN PROVING GROUND

2 DIRECTOR
 US ARMY RESEARCH LABORATORY
 ATTN AMSRL CI LP (TECH LIB)
 BLDG 305

2 DIR USARL
 ATTN AMSRL WM T ROSENBERGER
 AMSRL WM B A HORST
 BLDG 4600

10 DIR USARL
 ATTN AMSRL WM BA D LYON
 J CONDON B DAVIS
 T HARKINS D HEPNER
 G KATULKA D LYON
 P MULLER P PEREGINO
 A THOMPSON T BROWN
 BLDG 4600

6 DIR USARL
 ATTN AMSRL WM BC P PLOSTINS
 J GARNER B GUIDOS
 J NEWILL P WEINACHT
 J DESPIRITO
 BLDG 390

3 DIR USARL
 AMSRL WM BF J LACETERA
 H EDGE T HAUG
 BLDG 390

2 DIR USARL
 AMSRL WM RP C SHOEMAKER
 J BORNSTEIN
 BLDG 1121

2 DIR USARL
 ATTN AMSRL WM MB C HOPPEL
 ATTN AMSRL WM MC R ADLER
 BLDG 4600

6 DIR USARL
 ATTN AMSRL WM T B BURNS
 ATTN AMSRL WM TC R COATES
 W DEROSSET R MUDD
 AMSRL WM TD F GREGORY
 N GNIAZOWSKI
 BLDG 309

NO. OF
COPIES ORGANIZATION

4 CDR US ARMAMENT RD&E CTR
 ATTN AMSTA AR FST T R LIESKE
 J WHITESIDE J MATTS
 F MIRABELLE
 BLDG 120

1 CMDR USA DTC
 ATTN CSTE DTC TTM J SCHNELL
 RYAN BLDG

1 CDR ATC
 ATTN K MCMULLEN
 BLDG 359

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE April 2002	3. REPORT TYPE AND DATES COVERED Final	
4. TITLE AND SUBTITLE Shock Experiment Results of the DFuze 8-Channel Inertial Sensor Suite That Contains Commercial Magnetometers and Accelerometers		5. FUNDING NUMBERS PR: 1L162618AH80	
6. AUTHOR(S) Davis, B.S. (ARL); Hamilton, M.B. (NSWC); Hepner, D.J. (ARL)		8. PERFORMING ORGANIZATION REPORT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Weapons & Materials Research Directorate Aberdeen Proving Ground, MD 21005-5066		10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARL-MR-532	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Weapons & Materials Research Directorate Aberdeen Proving Ground, MD 21005-5066		11. SUPPLEMENTARY NOTES	
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This report describes shock experiments performed on a 1.4-inch (35.56-mm) diameter double-sided board that contains an inertial sensor suite (ISS) in support of the ongoing U.S. Army Research Laboratory diagnostic fuze (DFuze). The DFuze represents a high-g projectile-borne measurement system for obtaining in-bore and in-flight ballistic data that significantly contribute toward the design, development, failure diagnostics, and aerodynamics determination of artillery or other projectiles. The ISS uses several commercial off-the-shelf micro-electro-mechanical systems accelerometers, magnetometers, and optical sensors used for determining estimates of the projectile's body orientation, axial acceleration, radial acceleration, and roll rate. During the ground experiments, ISS boards were encapsulated within a specially designed fixture and shocked while powered in various orientations to simulate high-g set-back, set-forward, and balloting launch conditions. Post-shock performance of each sensor was then obtained to determine bias offset, scale factor errors, and shock survivability. The shock experiments were performed on a high velocity and acceleration shock machine at Aberdeen Proving Ground, Maryland. As a result of these experiments, the ISS boards have been g-qualified to at least a 19-kg launch acceleration while powered. The ISS boards will be used in ongoing DFuze flight experiments in support of the following Navy and Army developmental projectile programs: Extended Range Guided Munitions, Advanced Gun System, Autonomous Naval Support Round, XM982 Excaliber, and Tank Extended Range Munition Kinetic Energy XM1007. To date, 30 ISS boards have been flight tested without any failures.			
14. SUBJECT TERMS accelerometer inertial measurement unit shock tests high-g acceleration sensors		15. NUMBER OF PAGES 30	
17. SECURITY CLASSIFICATION OF REPORT Unclassified		16. PRICE CODE	
18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	