

USAARL Report No. 2004-10

# Tactile Situation Awareness System Flight Demonstration Final Report

by B. J. McGrath, Naval Aerospace Medical Research Laboratory; A. Estrada, USAARL; M. G. Braithwaite, Headquarters Director Army Aviation; A. K. Raj, Institute for Human and Machine Cognition; and A. H. Rupert, Naval Aerospace Medical Research Laboratory

REPRODUCED FROM  
BEST AVAILABLE COPY



Aircrew Health and Performance Division

March 2004

Approved for public release, distribution unlimited.

U.S. Army  
Aeromedical Research  
Laboratory

U  
S  
A  
A  
R  
L

## Notice

### Qualified requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), 8725 John J. Kingman Road, Suite 0944, Fort Belvoir, Virginia 22060-6218. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

### Change of address

Organizations receiving reports from the U.S. Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

### Disposition

Destroy this document when it is no longer needed. Do not return it to the originator.

### Disclaimer

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

### Human use

Human subjects participated in these studies after giving their free and informed voluntary consent. Investigators adhered to AR 70-25 and USAMRMC Reg 70-25 on Use of Volunteers in Research.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE March 2004	3. REPORT TYPE AND DATES COVERED Final		
4. TITLE AND SUBTITLE Tactile Situation Awareness System Flight Demonstration Final Report		5. FUNDING NUMBERS		
6. AUTHOR(S) McGrath, B.J.; Estrada, A.; Braithwaite, M. G.; Raj, A.K.; Rupert, A.H.				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Aerospace Medical Research Laboratory, Pensacola, FL 32508 U.S. Army Aeromedical Research Laboratory, Fort Rucker, AL 36362 Headquarters, Director Army Aviation, Middle Wallop, Hampshire, UK SO20 8DY Institute for Human and Machine Cognition, University of West Florida, Pensacola, FL 32507		8. PERFORMING ORGANIZATION REPORT NUMBER USAARL 2004-10		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Medical Research and Materiel Command, 504 Scott Street, Fort Detrick, MD 21702-5012  Naval Aerospace Medical Research Laboratory, Pensacola, FL 32508		10. SPONSORING / MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES This report is a joint and cooperative effort of DOD, United Kingdom, university and industrial teams.				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release, distribution unlimited		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) The Joint Strike Fighter (JSF) -Tactile Situation Awareness System (TSAS) flight demonstration project originated at the NASA Johnson Space Center and the Naval Aerospace Medical Research Laboratory with funding provided from the JSF Program Office. The JSF-TSAS project was conceived as a short-duration technology maturation and flight demonstration program. The JSF Flight Systems Integrated Product Team (IPT) provided overall project management and funding throughout the demonstration effort. The project integrated a tactile display, F-22 cooling vest, and GPS/INS technologies into a single synergistic system in a UH-60 helicopter. A 10-event test operation was conducted to demonstrate the utility of this advanced human-machine interface. Four demonstration pilots were selected to fly the flight events.  Summary results showed that TSAS technologies have the potential to increase pilot situational awareness and reduce pilot workload when using the tactile display, especially during simulated shipboard operations in Instrument Meteorological Conditions (IMC). Prototype hardware development showed that tactile displays could be integrated into existing flight gear. The test pilots successfully performed all maneuvers with degraded outside visual cues, relying on tactile cues for the necessary information. Using TSAS, pilots demonstrated improved control of aircraft during complex flight conditions.				
14. SUBJECT TERMS Joint Strike Fighter, Tactile Situation Awareness System, global positioning system, inertial navigation system, situational awareness, instrument meteorological conditions			15. NUMBER OF PAGES 43	16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED			18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	
19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED		20. LIMITATION OF ABSTRACT SAR		

## Acknowledgements

The JSF TSAS project was a true team effort involving numerous military, academic, and industry organizations. The JSF TSAS project participants are listed below.

- National Aeronautics and Space Administration-Johnson Space Center provided concept origination and computer hardware.
- University of Sydney provided aeronautical engineering, flight test engineering and project management support.
- Joint Strike Fighter provided program management and fiscal support.
- Naval Aerospace Medical Research Laboratory provided TSAS laboratory testing facilities, system integration facilities, flight hardware fabrication and US Navy test pilots.
- United States Army Aeromedical Research Laboratory provided the UH-60 aircraft and US Army pilots, prepared the documentation for aircraft modification approval and flight clearances, conducted ground testing to verify flight readiness, and made available the UH-60 simulator for TSAS integration and pilot training. Special thanks to MAJ Steven Gilreath, MAJ Cynthia Lamb and DAC Larry Woodrum.
- The US Navy Coastal Systems Station-Dahlgren Division (Panama City, FL) developed the tactor laboratory hardware, provided fiscal management support, and provided all TSAS logistical support.
- University of West Florida developed TSAS software and designed and integrated the flight-worthy TSAS hardware.
- Naval Air Station Pensacola provided flight test and range support.
- Office of Naval Research provided fiscal management support.
- Jackson Foundation provided project management support.
- Princeton University provided tactile expertise.
- Massachusetts Institute of Technology and Tulane University provided expertise in helicopter handling qualities modeling and analysis.
- Carleton Technologies, under CSS contract, supplied and supported the pneumatic tactor, model 2856-A0, and the ground-based pneumatic tactor driver system.
- Engineering Acoustics Inc., under ONR SBIR contract, supplied and supported the electromagnetic tactor, AT-96.
- Audiological Engineering, under ONR contract, supplied the electromagnetic tactor, Tactaid.
- Unitech Research Inc., under CSS contract, supplied the electrical tactor, Audiotact.
- Lockheed-Martin/Mustang Survival, under CSS contract, supplied the F-22 cooling vest.
- Boeing North American, Inc., Autonetics & Missile Systems Division, under CSS contract, supplied and supported the MIGITS II GPS/INS.

## Table of contents

	<u>Page</u>
Introduction .....	1
System description and integration.....	4
UH-60 aircraft .....	5
Foggles.....	6
TSAS NP-1 sensor .....	7
TSAS NP-1 hardware.....	8
TSAS NP-1 software .....	9
JSF TSAS tactor locator system .....	10
Carleton Technologies pneumatic tactor.....	11
Tactor selection .....	12
JSF TSAS tactile algorithm .....	13
Simulator testing.....	15
Tactor control laboratory system.....	16
Flight simulator.....	18
Simulator results.....	19
Test plan.....	21
TSAS evaluation flight.....	21
Human factors metrics.....	23
Data recording.....	24
Data reduction.....	24
Flight test results.....	24
Situation awareness.....	25
Workload.....	26
Pilot comments .....	26
Flight data.....	28
Discussion.....	37
F-22 cooling vest.....	38
Conclusions/recommendations .....	39
References.....	40
Acronyms .....	42

## Table of contents (continued)

### List of tables

	<u>Page</u>
Table 1. JSF TSAS simulator testing.....	20
Table 2. JSF TSAS test event matrix. ....	21
Table 3. JSF TSAS evaluation flight test plan. ....	22
Table 4. Modified China Lake situational awareness scale.....	23
Table 5. TSAS Video Debrief Interview. ....	24
Table 6. Situation awareness pilot ratings.....	25

### List of figures

Figure 1. Types of spatial disorientation accidents (from Braithwaite et al. 1997).....	1
Figure 2. TSAS Concept.....	2
Figure 3. Research programs related to the JSF TSAS project.....	3
Figure 4. JSF TSAS NP-1 architecture. ....	5
Figure 5. USAARL UH-60 research aircraft.....	6
Figure 6. UH-60 chin bubble with opaque plastic lining. ....	7
Figure 7. JSF TSAS NP-1 Software Architecture.....	10
Figure 8. JSF TSAS tactor locator system. ....	11
Figure 9. TSAS demonstration pilot showing TSAS tactor locator system.....	11
Figure 10. Carleton Technologies model 2856-A0 pneumatic tactor.....	12
Figure 11. JSF TSAS tactile array. ....	14
Figure 12. JSF TSAS tactor pulse pattern.....	15
Figure 13. FP1 Simulated shipboard take-off (Phases C and D).....	29
Figure 14. FP1 Simulated shipboard landing (Phases C and D). ....	30
Figure 15. FP2 Simulated shipboard take-off (Phases C and D).....	31
Figure 16. FP2 Simulated shipboard landing (Phases C and D). ....	32
Figure 17. FP3 Simulated shipboard take-off (Phases C and D).....	33
Figure 18. FP3 Simulated shipboard landing (Phases C and D). ....	34
Figure 19. FP4 Simulated shipboard take-off (Phases C and D).....	35
Figure 20. FP4 Simulated shipboard landing (Phases C and D). ....	36

## Introduction

In a survey of 970 US Army rotary-wing mishaps from 1987-1995 (Durnford et al., 1995; Braithwaite, Groh, and Alvarez, 1997), 30% of the mishaps were considered to have had spatial disorientation as a major or contributory factor. On average, spatial disorientation costs the US Army 14 lives and \$58 million each year. When classifying these mishaps by phase of flight, 25% of spatial disorientation mishaps occurred during drift and/or descent in hover, which was the second largest group of all mishaps (Figure 1). Hovering flight is distinctive to vertical landing and take-off aircraft such as helicopters and the AV8B Harrier. The importance of spatial disorientation and countermeasures for this phase of flight is critical for safe operations of the next generation vertical landing and take-off aircraft, such as the Joint Strike Fighter variant for the United States Marine Corps and the Royal Air Force.

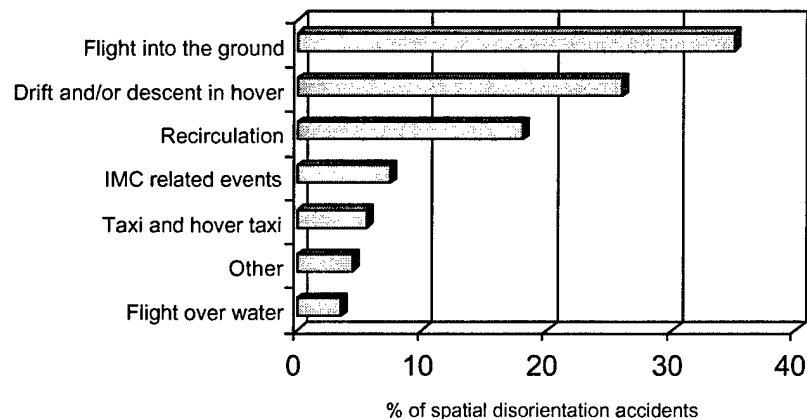


Figure 1. Types of spatial disorientation accidents (from Braithwaite, Groh, and Alvarez, 1997).

When considering spatial disorientation mishaps in vertical landing and take-off aircraft, one must remember that instrumentation in these aircraft have come from the traditional fixed-wing aircraft. New instrumentation designed for the hover phase of flight has been restricted to the development of symbology on MultiFunction Displays (MFDs) and Helmet Mounted Displays (HMDs). This has provided a partial solution but has not eliminated the problem of spatial disorientation in hover flight. Even though information to assist orientation during hover is presented in the Integrated Helmet and Display Sighting System (IHADSS) of the AH-64 helicopter, often it is not interpreted correctly or is even ignored (Braithwaite, Groh, and Alvarez, 1997). There is a critical need for the development of new instrumentation to provide drift and/or descent cues during hovering flight.

The Tactile Situation Awareness System (TSAS<sup>1</sup>) is an advanced flight instrument that uses the sensory channel of touch to provide situation awareness information to pilots (Rupert, Guedry, and Reshke, 1994; Rupert, Mateczun, and Guedry, 1990). The TSAS concept is shown in Figure 2. The

<sup>1</sup> Pronounced Tee - Sas.

TSAS system accepts data from various aircraft sensors and presents this information via tactile stimulators or “tactors” integrated into flight garments. TSAS has the capability of presenting a variety of flight parameter information, including, attitude, altitude, velocity, navigation, acceleration, threat location, and/or target location.

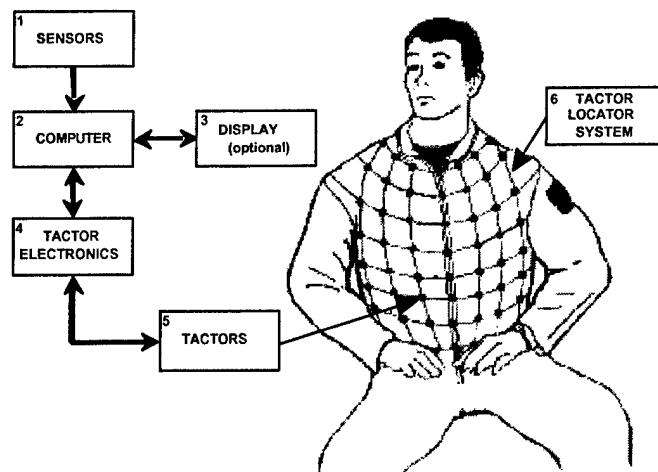


Figure 2. TSAS Concept

Using TSAS, test demonstration pilots have demonstrated improved navigation during complex mission conditions. The tactile display has been shown to increase situational awareness (SA) and provide the opportunity to devote more time to other instruments and systems when operating in task saturated conditions. The TSAS system reduced user workload and thus has the potential to increase mission effectiveness. TSAS has the capability of providing a wide variety of mission parameter information, for example: attitude, altitude, navigation, threat location, and targets. TSAS, integrated with visual and audio display systems, will provide critical information at the right time via the underutilized sensory channel of touch, and represents the next generation of human systems interface (Rupert et al., 1996; Raj et al., 1998b; Griffin et al., 2001).

The Joint Strike Fighter (JSF) technology maturation program sponsored the TSAS research team to integrate tactile and sensor technologies to demonstrate the operational utility of an advanced human systems interface for hover operations in reduced visibility.

The JSF program was chartered to enable the development and production of a next-generation strike aircraft for the US Air Force, US Marine Corps, US Navy, United Kingdom, and allied nations. The JSF technology maturation program conducted a series of analyses and demonstrations aimed at laying the foundation for mature, affordable technologies and other concepts in support of the JSF aircraft. The JSF Flight Systems Integrated Product Team (FSIPT) is a multi-service, multi-agency, group of government and industry representatives, working together to develop safe, reliable, affordable flight systems technologies that meet the aviator needs for the JSF. The FSIPT includes traditional,

advanced, and integrated subsystems, and cockpit/aircrew systems (Haven and Smith, 1996). The FSIPT managed and participated in the JSF TSAS flight demonstration.

The JSF TSAS project was conceived as a short-duration technology integration and flight demonstration program. The JSF TSAS project was not intended to conduct basic research, but rather to integrate and demonstrate technologies that had previously been developed. Figure 3 shows the historical research programs relevant to JSF TSAS.

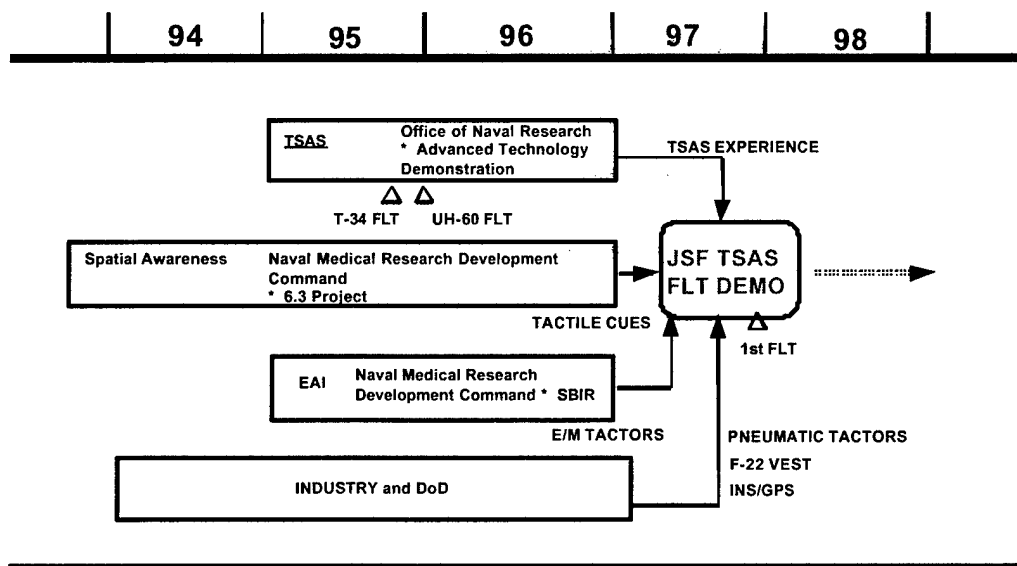


Figure 3. Research programs related to the JSF TSAS project.

The focus of the JSF TSAS flight demonstration project was to demonstrate reduced pilot workload and enhanced situation awareness during hover operations in poor visibility conditions with the use of TSAS, and to provide insight into the impact of TSAS technologies on a single-seat aircraft. The specific objectives of the JSF TSAS flight demonstration program were to demonstrate:

- The potential for TSAS technology to reduce pilot workload and enhance situation awareness during hover and transition to forward flight.
- That a pilot using TSAS can effectively hover and transition to forward flight in a vertical lift aircraft with degraded outside visual cues.
- The feasibility of integrating tactile instrument technology into military flight garments.

The JSF TSAS flight demonstration project integrated an array of tactors, F-22 cooling vest, and Global Positioning System/Inertial Navigation System (GPS/INS) technologies into a single system in a UH-60 helicopter. A 10-event test operation was conducted to demonstrate the utility of this advanced human-machine interface for performing hover operations in a single-seat Vertical/Short Take Off and Landing (V/STOL) aircraft. The first flight of the TSAS-modified UH-60 was 9 September 1997, and 10 flight test events were successfully completed by 19 September 1997. The methods, results and discussion for the JSF TSAS flight demonstration project are presented in this report.

The successful achievement of JSF TSAS project objectives required the use of a dual station vertical lift aircraft with associated flight test support that would allow timely completion of the project within a fixed budget. The TSAS planning team established demonstrator aircraft criteria that were used in evaluating a variety of candidate flight test aircraft. Use of these criteria resulted in the decision to use the UH-60 aircraft at the United States Army Aeromedical Research Laboratory (USAARL) located at Fort Rucker, Alabama, that provided a complete flight demonstration package at the lowest cost. Benefits of using the USAARL UH-60 aircraft included:

- Dual-seat capability enabling the addition of a safety pilot, who doubled as an instructor pilot, to provide real-time assistance to TSAS demonstration pilots.
- Previous integration and test experience with tactile instruments (Raj et al., 1998a).
- Aircraft availability.
- Low integration and flying time costs.
- Testing the TSAS tactile instrument in a harsh environment.

The USAARL flight test facility also provided multiple benefits including:

- Complete on-site aircraft modification and maintenance, and avionics hardware and software test capability.
- On-site flight test planning, data collection and analysis, and reporting capability.
- The availability of United States Army helicopter pilots.
- Motion-based UH-60 simulator.

The JSF TSAS flight demonstration project integrated an array of pneumatic vibro-tactile tactors, an F-22 cooling vest, and GPS/INS technologies into a single system in a UH-60 helicopter. A 10-event test operation was conducted to demonstrate the utility of this advanced human-machine interface for performing hover operations.

#### System description and integration

The following sections describe the test aircraft, TSAS, and integration requirements, including ground-based testing systems. The components that made up the TSAS system were integrated into the UH-60 as shown in Figure 4. The TSAS system took data from a commercial off-the-shelf (COTS) GPS/INS, as well as from the aircraft itself, to calculate the helicopter velocity. This information was displayed via pneumatically driven tactors mounted in an F-22 cooling vest. The tactors were arrayed around the torso in eight columns. Location of the tactor on the torso was used to indicate direction of helicopter drift, and tactor activation pulse pattern was used to indicate magnitude of the helicopter drift. The TSAS tactor display used in this flight test was designated NP-1.

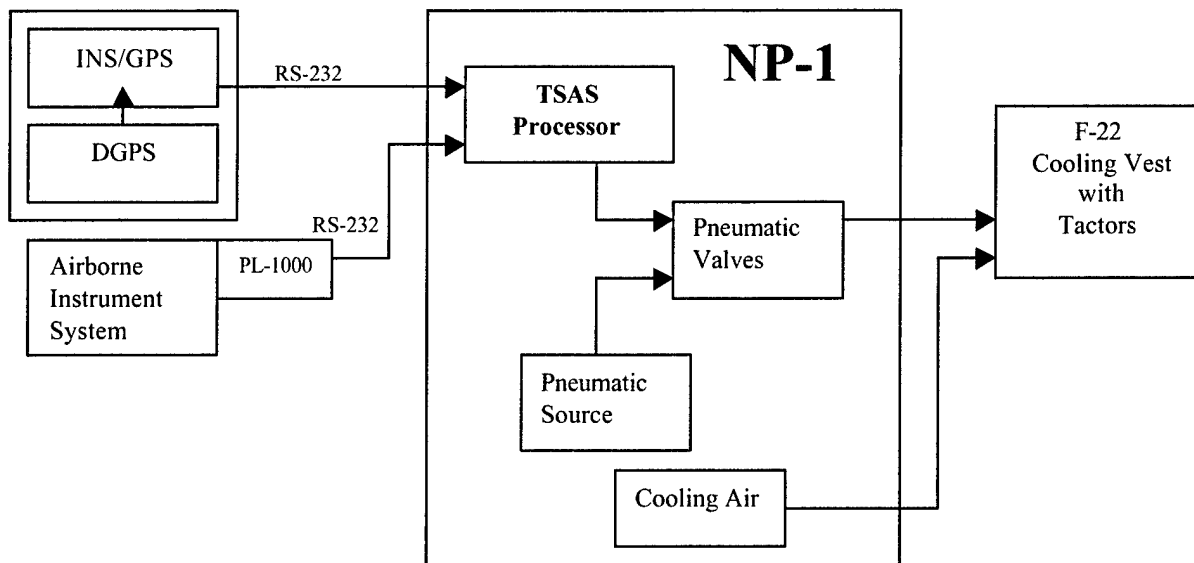


Figure 4. JSF TSAS NP-1 architecture.

#### UH-60 aircraft

The USAARL UH-60 research aircraft (Figure 5) is a twin turbine engine, single rotor, semi-monocoque fuselage, rotary-wing helicopter manufactured by the Sikorsky Aircraft Company. The aircraft is designed to operate with a crew of three: pilot, copilot, and crew chief. In that original configuration, it can carry 11 combat equipped soldiers. The primary mission of the aircraft is the transport of troops, supplies, and equipment. Other missions include training, mobilization, and concept development, as well as medical evacuation and disaster relief.

The main rotor system has four blades that are constructed of titanium and fiberglass. Two T700-GE-700 engines supply propulsion. The UH-60 has a nonretractable landing gear system consisting of two main landing gear and a tail wheel. The max gross weight of the aircraft is 22,000 pounds. The pilot and copilot have controls for flying the aircraft. The aircraft is fully instrument rated at either pilot's station. The aircraft is equipped with an Automatic Flight Control System (AFCS), which enhances the stability and handling qualities of the helicopter.



Figure 5. USAARL UH-60 research aircraft.

The USAARL research aircraft (Figure 5) has been fitted with a custom-made Airborne Instrumentation System (AIS). Flight parameters can be derived from the main aircraft systems to provide an indication of flying performance, and input ports are also available for monitoring physiological data from a suitably equipped pilot. The data can be recorded on-board or relayed via telemetry directly to the ground. The flight parameter data can also be converted to RS-232 data to drive on-board devices such as TSAS. Equipment installed in the USAARL UH-60A included the:

- 115 Volt 60 Hz AC inverter that supplied power to the TSAS NP-1.
- AIS that supplied analog data from the aircraft instruments.
- PL-1000 that digitized the AIS data and transmitted these data over an RS-232 serial communications port to the TSAS NP-1 computer.

### Foggles

To reduce outside visual cues and simulate Instrument Meteorological Conditions (IMC), the TSAS demonstration pilots were required to wear "foggles." Foggles are standard Army issue aviator glasses with a semi-opaque film (Ryser Optik, St. Gallen, Switzerland ~0.1) applied to the upper two thirds of the glass lens. This reduced the pilot's outside visual acuity to 20/200 while maintaining inside visual acuity at 20/20. To further reduce outside visual cues, the chin bubble was also covered with an opaque plastic lining to prevent the pilot from receiving visual motion cues by looking down (Figure 6).



Figure 6. UH-60 chin bubble with opaque plastic lining.

#### TSAS NP-1 sensor

To provide aircraft performance data to the tactile display, a GPS/INS system with Differential GPS (DGPS) corrections was integrated with the UH-60 and TSAS. The GPS/INS was a Boeing-North American, Model C-MIGITS-II that was connected to a Ball Aerospace, Model AN496C passive patch antenna with a 150 mm conical ground plane. The DGPS corrections were provided by a US Coast Guard differential beacon receiver, Starlink, Inc., Model DNAV-212G with a +AMBA-4 Antenna.

Boeing North America, Inc., Autonetics and Missile Systems Division, has developed the C-MIGITS-II GPS/INS Tactical System using the latest solid state inertial sensor technology integrated with advanced GPS engines. The C-MIGITS II contains a five channel, coarse/acquisition code, L1 frequency GPS engine, and a digital Quartz IMU. The two subsystems are integrated using a Kalman filter process to produce a small, lightweight, synergistic guidance, navigation and control system. These proven off-the-shelf products integrated into one package translate into affordability and low risk. C-MIGITS II provides all essential guidance, navigation and control data, including three-dimensional position and velocity, precise time, attitude, heading, angular rate, and acceleration.

Many guidance and control problems in the past have been addressed with stand-alone INS or GPS solutions; however, the inherent characteristics of each system do not provide an ideal guidance, navigation and control solution. By properly integrating the INS and GPS systems, the strengths of one can offset the deficiencies of the other. An INS is generally characterized as a self-contained, autonomous navigator, whose position and velocity outputs will degrade over time. Alternatively, the GPS, which is generally described as a navigator relying on external satellite signals, produces high accuracy solutions and is time independent. When the two systems are combined, the GPS/INS system will limit the INS error growth, and provide a continuous navigation solution when GPS signals are not available. In addition, high-speed attitude, velocity, angular rate, and acceleration are available at accuracies not achievable by GPS alone.

The DGPS receiver, Starlink DNAV-212, contains a Starlink MRB-2A differential beacon that provides the differential corrections to the C-MIGITS II. The MRB-2A provides reliable fully automatic DGPS beacon selection. The MRB-2A beacon receiver uses two channels to ensure that the automatically selected beacon is providing reliable DGPS correction data. Channel one continuously tracks the selected beacon and outputs the correction data for the C-MIGITS II. Channel two continuously scans the beacon frequency range, measuring each of the receivable beacon signals. If and when a new signal with better performance is detected, channel one will switch to it.

DGPS works by placing a high performance GPS receiver (reference station) at a known location. Since the receiver knows its exact location, it can determine the errors in the satellite signals. It does this by measuring the ranges to each satellite using the signals received and comparing these measured ranges to the actual ranges calculated from its known position. The difference between the measured and calculated range is the total error. The error data for each tracked satellite is formatted into a correction message and transmitted to GPS users. The correction message format follows the standard established by the Radio Technical Commission for Maritime Services, Special Committee 104 (RTCM-SC 104). These differential corrections are then applied to the GPS calculations, thus removing most of the satellite signal error and improving accuracy. The level of accuracy obtained for a C-MIGITS II with DGPS is 2.5 meters for position and 0.025 meter/sec for velocity.

#### TSAS NP-1 hardware

The tactor control hardware NP-1 was developed and tested in the three months prior to the flight test. This interface relied heavily on COTS components due to the short timeline. Emphasis on individual component ruggedization and electromagnetic shielding minimized system integration time for placement in the harsh environment of a rotary-wing aircraft. The Naval Aerospace Medical Research Laboratory (NAMRL) Engineering Prototype Facility, and the USAARL Biomedical Technology Fabrication Shop developed and fabricated components of the TSAS NP-1 hardware, and Coastal Systems Station (CSS), Panama City, Florida, and University of West Florida, Institute for Human and Machine Cognition (UWF-IHMC) provided COTS component procurement support.

The TSAS controller, a Pentium-based ruggedized portable computer manufactured by Kontron Elektronik GmbH, Model IP Lite CW5, received flight information from the UH-60 AIS and the C-MIGITS via RS-232 serial ports, and custom software determined which tactors should be activated to indicate a given velocity. The software then activated the appropriate digital lines that control the tactors via a National Instruments Model PC-DIO-96 digital I/O board. These digital instructions provide the control signals to the pneumatic control solenoid valves (Amatrix Corp., model MK 754.8XTD424.B03) via dedicated valve speed-up circuitry (Amatrix Corp., model UDB 8010). This set up allows individual solenoids to switch at up to 200 Hz. Each tactor connects to two valves, one connects to a positive pressure source, and the other connects to a negative pressure source.

The differential positive and negative pressure sources are created and maintained by a Medo USA, Inc., model VP0625UL, compressor/vacuum pump connected to two accumulator/manifolds (one for high pressure, one for low pressure). A manual bleed valve attached to each accumulator/manifold controlled the airflow through the accumulator, allowing pressure levels to be set at approximately  $\pm 13.8$  kPa. Polyurethane tubing connects the manifolds to the solenoid valves for distribution to the individual tactors.

In addition, the NP-1 carried a Carleton Life Support Technologies, model 100C1183-1, blower that provides ventilation to the pilot via the Tactor Locator System (TLS). A 3 VDC battery-pack on the NP-1 provided backup power to the C-MIGITS II to maintain the last position in memory, therefore reducing satellite acquisition time on start-up. A 115 VAC, 60 Hz power, supply pass-through outlet on the plate powered a video camcorder for flight documentation.

#### TSAS NP-1 software

The UWF-IHMC was tasked with developing the TSAS software, and they provided the material for this section. The TSAS software was implemented in C++ on a QNX real time operating system, and may be separated into four components as shown in Figure 7. The sensor modules are responsible for providing information about the real world to the TSAS controller. The TSAS controller module feeds the input to one of many algorithms. The algorithms can be selected and controlled by the operator using a Graphical User Interface (GUI). Based upon the input, the algorithm sends commands to the TSAS driver to activate tactors. The TSAS driver executes any commands received from the TSAS controller and generates the necessary electrical signals that feed to the TSAS hardware. The TSAS driver also receives feedback information from the TSAS electronics, which is sent back to the TSAS controller. Currently, this feedback information provides notification about tactor failures. The TSAS GUI module provides a graphical user interface to the test operator.

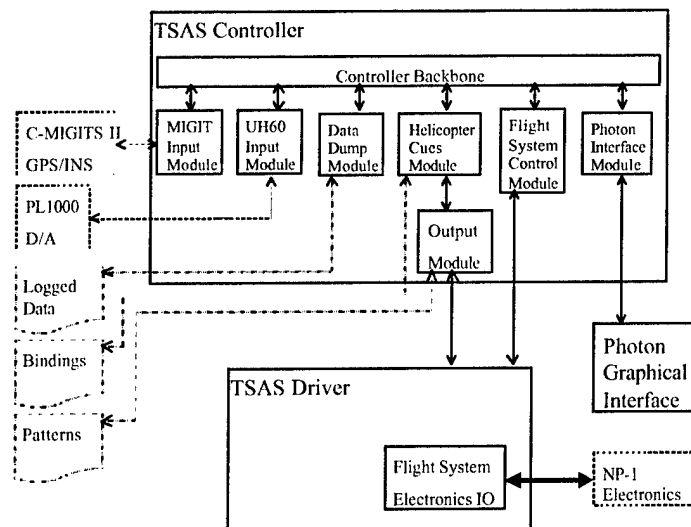


Figure 7. JSF TSAS NP-1 software architecture

#### JSF TSAS tactor locator system

The TLS for the JSF flight demonstration consisted of an off-the-shelf F-22 cooling-heating coverall garment assembly (Figure 8: Mustang Survival, Inc., model CMU-31/P). The garment was modified to place an array of 22 pneumatic tactors (Carleton Technologies, model 2856-A0) within its structure. Both the pneumatic tactor umbilical and the ventilation air hose terminate in quick disconnect connectors to allow rapid unencumbered egress of the pilot in case of emergency. The tactor array consists of eight columns of two tactors, plus six additional spare tactors, three on the front and three on the back. The TLS tactor columns fall on the front, front-left, left, back-left, back, back-right, right, and front-right of the demonstration pilot to provide directional information in 45° increments. The TSAS TLS was worn on the torso over an undershirt, and underneath the flight suit as shown in Figure 9.

**BEST AVAILABLE COPY**

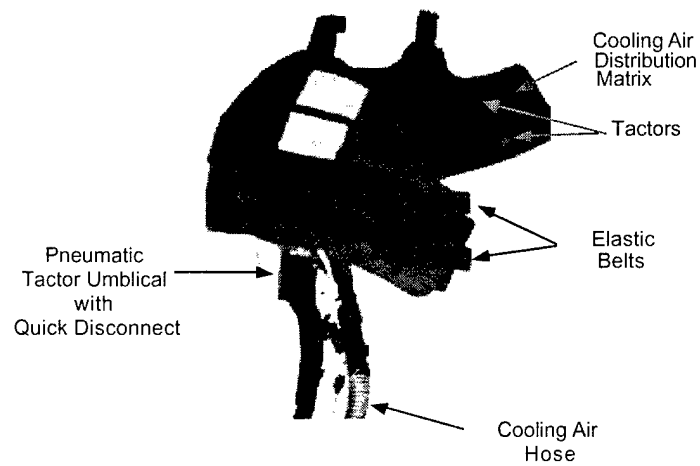


Figure 8. JSF TSAS tactor locator system.



Figure 9. TSAS demonstration pilot showing TSAS tactor locator system.

**Carleton Technologies pneumatic tactor**

The Carleton Technologies pneumatic tactor, model 2856-A0 (Figure 10) consists of a hemispherical shaped molded plastic shell with a diameter of 31mm. A latex membrane covers the concave area of the shell. The air supply tubing (2.4mm ID 4.0mm OD) attaches to the topside of the tactor. Oscillatory compressed air is driven into the tactor that forces the latex membrane to vibrate. A strong tactile sensation is achieved when the tactor membrane vibrates at 50 Hz. Tactor weight was 2g.

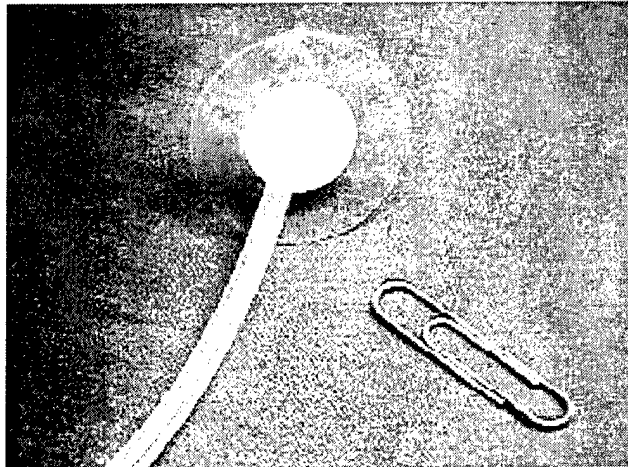


Figure 10. Carleton Technologies model 2856-A0 pneumatic tactor.

#### Tactor selection

There are primarily three types of tactors available: electromagnetic, pneumatic, and direct electrical stimulation. For this JSF TSAS flight demonstration effort, four companies were identified that were able to deliver a state-of-art tactor.

Audiological Engineering produces a vibro-mechanical tactor (Tactaid) that uses an electromagnetic system that vibrates the entire tactor case. This produces a diffuse tactile sensation. This tactor was small and lightweight and was used extensively in laboratory testing when a high number of tactors were required. The Tactaid had been used previously in a helicopter flight demonstration to display secondary flight information (Raj et al., 1998b), however its diffuse tactile sensation was deemed unsuitable for primary flight information during JSF TSAS laboratory testing.

Engineering Acoustics, Inc. (EAI) produces a vibro-mechanical electromagnetic tactor (AT-96) with an indent button contacting the skin. This produces a localized tactile sensation. This tactor has excellent frequency and amplitude control and was used extensively in laboratory testing. However, its large individual size and high weight coupled with a low intensity tactile sensation deemed it unsuitable for actual flight testing. Based on JSF TSAS laboratory testing feedback, EAI have produced an improved tactor (C2) that overcomes many of the limitations of the AT96. This tactor would be suitable for future flight testing.

Unitech Research produces a direct electrical tactor (Audiotact). These tactors produce a strong intensity tactile sensation in a small lightweight tactor. However, the range between absolute threshold and pain is very small, and moreover, this dynamic range of usability varies with skin environmental conditions including sweating. What feels like a strong tactile signal changes to a painful sensation due to the skin sweating. Unitech Research proposes the use of an electrolyte gel to minimize the tactile sensation variation with skin environmental conditions. The gel worked well in the laboratory, but was deemed impractical for actual flight. The electrocutaneous tactor is an emerging technology with

benefits in size, weight and strength of tactile sensation but was not sufficiently mature for the JSF TSAS flight demonstration. Due to its superiority in size and weight, further development to overcome the sensation range limitations is warranted.

Carleton Technologies Inc. produces a pneumatic vibro-mechanical tactor (model 2856-A0) [previously described]. These tactors are robust, lightweight and produce a strong intensity tactile sensation. Laboratory evaluation demonstrated that the pneumatic tactor, modified to use a nitrile rather than latex membrane, was the most suitable tactor available for the JSF TSAS flight demonstration.

#### JSF TSAS tactile algorithm

Using helicopter handling qualities theory, and simulator testing described in the following section, an adequate tactile algorithm to meet project goals was developed. Tactile algorithm is defined as the tactor positions, pulse or activation patterns, carrier frequencies, waveforms and amplitudes chosen to display a particular aircraft flight parameter. Tactor pulse pattern is defined as the rate of turning the tactor on and off. It is separate from the carrier frequency, which represents the vibration frequency of the tactor when the tactor is on. For example, the pneumatic tactor has a fixed carrier frequency or vibration of 50 Hz, but the tactor can be turned on and off once per second, thus the pulse pattern is 1 Hz, separate from the carrier frequency.

The development of new instrumentation to provide drift and/or descent cues during hovering flight is required to improve the safety of flight and reduce pilot workload, especially in degraded visual conditions. When visual cues degrade, considerable additional pilot workload is required for low speed and hover tasks (Aeronautical Design Standard ADS-33D, 1994; Hoh and Mitchell, 1996). The UH-60 aircraft used for this flight demonstration, like most modern V/STOL aircraft, is equipped with an AFCS that enhances the hover stability and handling qualities. However, the pilot must still visually perceive very small drift velocities in order to perform low speed and hover flight operations (Hoh and Mitchell, 1996). In addition, mishap statistics show that for safe hover operations the critical factor is undetected drift, and this accounts for 25% of spatial disorientation mishaps in helicopters (Figure 1). Therefore, helicopter drift velocities were deemed the most important tactile cue for safe hover flight maneuvers.

Hovering is a maneuver in which the helicopter is maintained in nearly motionless flight over a reference point at a constant altitude and heading. Control corrections by the pilot need to be applied smoothly with constant pressure rather than abrupt movements. Stopping and stabilizing a helicopter requires lead-generation control inputs. For example, if the helicopter is moving right, a slight amount of left pressure on the cyclic will stop the right movement. Before the helicopter stops, left pressure must be released or the helicopter will come to a stop, and then move to the left. Failure to allow for the aircraft lag will result in over-controlling (US Department of Transportation, 1978). To determine the correct amount of pressure and to maintain lead generation on the controls during hover operations, the helicopter pilot must detect small changes in velocity. Therefore, the helicopter rate of change of velocity cues was also deemed necessary to perform a stable hover. In degraded visual conditions, such as a smooth surface at night, it is very difficult to hover, because the spatial resolution to see small

changes in velocity is not available, and even the best pilots over-control and get into pilot induced oscillations.

As described earlier, the pneumatic tactor was selected due to its lightweight and strong tactile sensation. The pneumatic tactor activation was fixed at the amplitude and carrier frequency ( $\pm 13.8$  kPa square wave at 50 Hz) to provide the strongest tactile sensation. The fixed tactor amplitude, waveform and frequency allowed only tactor position and pulse pattern as the tactor stimulus variables that could be used to display aircraft flight parameters.

To display the horizontal velocity vector using a tactile instrument, the components of the velocity were separated, and then displayed using the available different tactile qualities. Tactor location was used to indicate helicopter velocity direction, and tactor activation pulse pattern was used to indicate velocity vector magnitude.

For horizontal velocity direction, a tactor would be activated at a location corresponding to the velocity direction. For example, if the helicopter was moving left, two tactors on the left side would activate (Figure 11, column 7, green tactors); if the helicopter was moving forward, two tactors on the abdomen would activate (Figure 11, column 1, yellow tactors); and if the helicopter was moving right and forward, the two 45 degree front-right tactors would activate (Figure 11, column 2, orange tactors). Both tactors in each column fire simultaneously to provide a strong intensity tactile sensation and to provide redundancy in the event of a tactor failure. Having redundancy at each tactor location was deemed necessary to minimize the risk of a “missed tactor.”

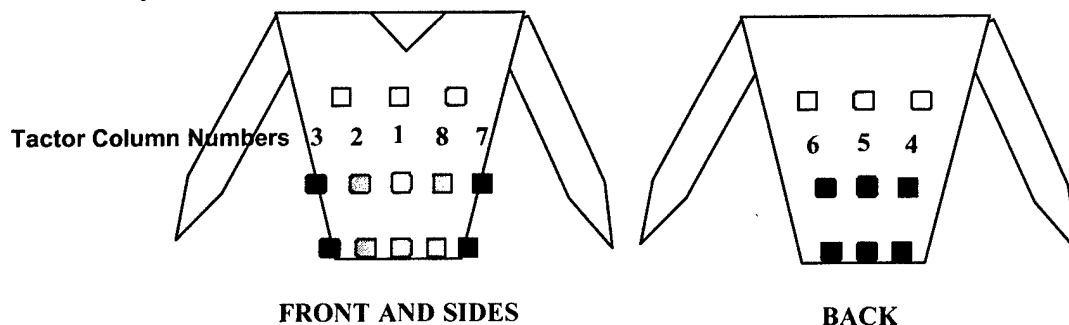


Figure 11. JSF TSAS tactile array.

Geldard (1960), and Sachs, Miller, and Grant (1980) reported that only three tactor amplitude intensities are easily determined. Therefore, to display horizontal velocity magnitude, three tactor activation pulse patterns were used as shown in Figure 12. For example, if the helicopter was drifting in the range 0.3 to 0.7 m/sec, the tactor would activate at 1 pulse per second. If the helicopter was moving in the range greater than 0.7 to 2.0 m/sec, the tactor would activate at 4 pulses per second, and if the helicopter was moving greater than 2.0 m/sec, the tactor would activate at 10 pulses per second.

In summary, if the helicopter was moving at 0.5 m/sec to the left, the two tactors located on the left side of the torso would activate at 1 pulse per second.

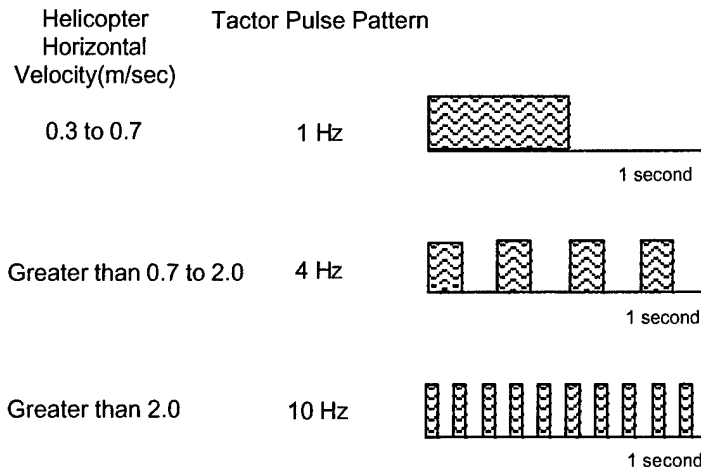


Figure 12. JSF TSAS tactor pulse pattern.

As described earlier, rate of change of velocity cues is also needed by pilots to stabilize a helicopter in degraded visual conditions. Using the tactor display algorithm described above, the pilots were able to receive rate of change of velocity cues using the tactile instrument. As perceived by the helicopter pilot, the rate of change of velocity is an important variable and in a subtle, but significant, way is different from the classical definition of acceleration. For example, if the helicopter is drifting to the left and is slowing down, the acceleration vector is directed towards the right, while the velocity vector is to the left. To maintain a stable and safe hover using the tactile instrument, the pilot needs to know that the helicopter is drifting to the left and is slowing down. Therefore tactile cues to represent velocity and rate of change of velocity should only be on the left side of the body. During preliminary development of the tactile algorithm in the simulator described below, displaying an acceleration cue on the right while still drifting to the left was shown to confuse the pilot and render the tactile algorithm unintuitive.

Using the time or rate that the frequency of the tactor pulse pattern increased or decreased, the pilot was able to infer rate of change of velocity cues. For example, if no tactors were activated, and then the left tactors were activated at 1 Hz and quickly were followed by activation at 4 Hz, the pilot was able to infer that the helicopter was not only moving to the left, but also that the helicopter was accelerating. This rate of change of velocity cues was not as instantly intuitive as the velocity cues, however, all pilots learned to recognize and interpret the rate of change of velocity cues during their first UH-60 simulator session.

#### Simulator testing

A series of UH-60 simulator sessions were conducted prior to the flight demonstration using the Tactor Control Laboratory System (TCLS) and the UH-60 simulator at USAARL. The objectives of the UH-60 simulator sessions were to:

- Develop and evaluate the tactile algorithm to meet project goals.
- Train pilots in using tactile cues in hover operations.
- Evaluate the safety of the JSF TSAS evaluation flight test plan (Table 3).

During each UH-60 simulator session, each pilot was asked to make quantitative comments related to the simulator session goals of algorithm development and flight test plan evaluation. Due to time and funding limitations set by the sponsor, Joint Strike Fighter, the simulator sessions were not intended to be a scientific optimization of tactile displays, but a prototyping tool to achieve the goal of a successful flight demonstration. Therefore, no quantitative flight performance data were recorded from these simulator sessions.

### Tactor control laboratory system

The CSS was tasked to build a system capable of evaluating an exceptionally wide range of tactile stimulation devices and scenarios. It was designed for use solely in the laboratory environment of NAMRL and USAARL with maximum flexibility, minimal development time and cost, and the ability to support a variety of tactor types. CSS provided material for this section.

Functional requirements were:

- An 80 tactor drive capability.
- Six independent waveforms available.
- All tactors individually driven.
- A 30 V-30 A max drive requirement.
- Local control with remote control via Ethernet interface.
- Allow future capability for diagnostic testing.
- Support real-time operating conditions.

The TCLS was designed to simulate potential operational scenarios in a laboratory environment and allow extensive experimentation with a broad range of stimulus characteristics and patterns. There exist a large number of conceptual approaches to tactile stimulation in aerospace conditions, and these approaches have not been exhaustively evaluated for suitability or merit. The TCLS was intended to be a laboratory tool that would allow evaluation of conceptual approaches to tactile displays and guide the development of TSAS implementations. Specifically, the TCLS would evaluate the most appropriate characteristics of the excitation waveform, such as wave shape (sine, square, triangle, etc.), amplitude, frequency, pulse pattern, and how the individual tactor excitations may be used in concert with other tactors to best convey the desired information. Consequently, the primary functions of the TCLS are to:

- Provide a powerful computer to interface with various sensor systems, process sensor input, and execute patterns of tactor excitation.
- Respond to sensor input and change tactor excitation patterns in real time.
- Allow dynamic variation of the excitation waveforms used for each tactor.
- Provide a means of visually verifying the excitation waveforms currently being used.

The TCLS is controlled by a Pentium-based computer that is equipped with multiple special-purpose signal processing Metrabyte boards (Keithley Instruments, Cleveland, OH), including three waveform generators, two digital I/O cards generators, and an analog-to-digital converter generator. The computer/controller first initializes the six available waveforms and defines the patterns of tactor excitation that will be used during the session. It then collects sensor input, analyses the data,

determines which, if any, tactor excitation pattern is required, and sends the necessary information to the custom portion of the system. The custom components use a Versa Module Europa (VME) computer backplane to link various analog and digital circuitry necessary to energize individual tactors on cue.

On the Metrabyte/VME interface board, the control information is converted from the unique cabling used by the Metrabyte cards to standard cabling more readily accessible to the VME components. The control information is then passed to the logic boards, where the information is decoded to select specific waveforms and energize the tactor. Next, the driver boards amplify the signals and supply enough current to drive the tactors at optimal power levels. These amplified signals are routed through the remapping panel and the VME/TLS interface board. The high power signals leave the lab system via connectors on the front door of the rack, and traverse an umbilical cable to the TLS, where individual tactors fire according to the predetermined patterns.

Each logic/driver pair controls up to 16 tactors. The five pairs allow a maximum capability of  $5 \times 16 = 80$  tactors, typically arranged with 64 tactors in an  $8 \times 8$  matrix on the torso, and up to 16 auxiliary tactors located, as required, elsewhere. The output of each logic/driver pair corresponds to two rows of tactors. The TLS, on the other hand, is designed and assembled in columns, for increased reliability and ease of use. The remapping board and the associated VME/TLS interface board provide the transformation between rows and columns, such that individual rows may be included or excluded at will. This allows the system to independently drive two 40 tactor TLSs simultaneously (sharing the same 6 waveforms), for even more flexibility in research. The system most readily supports tactors with a 30V-peak drive requirement but may be used to simulate the electrical interface of other tactor types, such as pneumatic tactors. Furthermore, two basic driver types are currently available through plug-in modules on the driver boards' Field Effect Transistor (FET) (unipolar): drivers for typical battery-powered tactors that operate unidirectional, and op amp (bipolar) drivers for powered tactors that operate bidirectionally about a neutral position. The system was designed for ease of use and maximum versatility and can readily incorporate alternative tactor types with minimal impact to the basic design.

The TCLS components were installed in a 19-inch rack on wheels. The primary components consist of the following:

Off-the-shelf hardware –

- Computer/controller
- Industrial rack-mount PC
- Pentium 200 MHz processor
- SVGA video card
- Metrabyte arbitrary waveform generator, dual outputs [3 each for a total of 6 waveforms]
- Metrabyte digital I/O, 96 output [2 each for a total of 192 outputs]
- Metrabyte analog to digital converter, 64 inputs
- Rack-mount 17" monitor
- Keyboard & mouse
- Switching power supplies, 1 KW, constant current/voltage [2 each]
- UPS, 1400 VA, rack mount

- Oscilloscopes, dual channel [3 each for a total of 6 displayed channels]
- VME chassis with logic power supply

Custom hardware developed –

- Tactor decoders, signal selectors and drivers
- Logic boards, for decoding and signal selection [5 each]
- Driver boards, for signal amplification and drive current [5 each]
- PET plug-in modules [80 each]
- Op Amp plug-in modules [80 each]
- Metrabyte/TLS interface board
- VME/TLS interface board and remapping panel

### Flight simulator

The UH-60 flight simulator is a six-degree-of-freedom motion-based device designed for training aviators in the use of the UH-60 Black Hawk helicopter. The device consists of a simulator compartment containing a cockpit with pilot and copilot stations, instructor operator (IO) station and an observer station. The simulator is equipped with a visual system that simulates natural environment surroundings. A central computer system controls the operation of the simulator complex. The simulator is used to provide training in aircraft control, cockpit preflight procedures, instrument flight operations, visual flight operations, sling load operations, external stores subsystems, night vision goggles training, and nap-of-the-earth flight.

The simulator compartment houses the cockpit and IO station. Within the cockpit are all the controls, indicators, and panels located in the aircraft. Controls that are not functional are physically present to preserve the appearance of a realistic configuration. Loudspeakers are located in the simulator compartment to simulate audio cues. Each of the pilot's seats is vibrated individually to simulate both continuous and periodic oscillations and vibrations experienced by the crew during normal and emergency flight conditions and maneuvers. However, these vibrations are isolated from the IO and observer stations.

The simulator compartment is mounted on a 150 cm six degree-of-freedom motion system consisting of a moving platform assembly driven and supported from below by six identical hydraulic actuators. The motion system provides combinations of pitch, roll, yaw, lateral, longitudinal, and vertical movement. Motion of the simulator compartment can be controlled to simulate motion due to pilot inputs as well as those resulting from rotor operation, turbulence, and changes in aircraft centre-of-gravity, as well as emergency conditions and system malfunctions. All motions, except pitch, are washed out to the neutral position after the computed acceleration has reached zero. Pitch attitude is maintained as necessary to simulate sustained longitudinal acceleration cues. Motion can be frozen at any instant and the simulator has the ability to be programmed into a crash override mode where motion can continue despite impact with the ground or other obstacles.

The pilot and copilot stations are provided with forward, left, and right side window displays. The visual generation system consists of two separate functional areas. The first is the visual display system that presents the wide-angle-collimating video image to the crew. The digital image generator system is a full-colour visual display that provides imagery for day, night, and dusk scenes, as well as replicating the effects of the searchlight/landing light on the visual displays.

The computer system consists of a central processing unit and five auxiliary processing units. Visual displays are controlled by digital image generator inputs that are modified by inputs from other units such as the simulator navigation/communication identification subsystem, instructional subsystem, and air vehicle subsystems. The navigation and communication identification subsystem provides position data for the aircraft that the simulator is replicating. The instructional subsystem forwards information that detail the visual environment, scene lighting, and target paths through the database, target status, and landing light status. The air vehicle subsystem sends information relevant to the aircraft position rates, altitude, and attitude. All of these inputs are stored in the shared memory of the main simulator control computer.

#### Simulator results

In the two weeks prior to the flight demonstrations, five pilots participated in 16 simulator sessions (Table 1). Four of these pilots subsequently flew the actual flight demonstrations. As shown in Table 1, the first simulator session for each pilot was used to learn how to use the tactile cues to fly the aircraft and evaluate the JSF TSAS flight test plan. Subsequent flights were used to develop and evaluate the tactile algorithm and provide further training using tactile cues.

Table 1. JSF TSAS simulator testing.

Date	Flight	Pilot	Algorithm	Flight Goals	Comments/Results
02Sep97	01	CL	0.2/0.7/2.0	TSAS Familiarization Test Plan Evaluation	Test Plan OK
02Sep97	02	PM	0.2/0.7/2.0	TSAS Familiarization Test Plan Evaluation	Test Plan OK
03Sep97	03	AE	0.2/0.7/2.0	TSAS Familiarization Test Plan Evaluation	Test Plan OK Increases SA
03Sep97	04	PM	0.3/0.7/2.0	Evaluate Algorithm	Sensation of front tactors not good Prefers 0.3/0.7/2
03Sep97	05	CL	0.3/0.7/2.0	Evaluate Algorithm	Null is better
04Sep97	06	PM	0.3/0.7/2.0	Training Session	Tactor fit not good Missed forward tactors
04Sep97	07	AE	No Tactors	Test Plan Evaluation Without TSAS	No idea, Violent crash Tasks impossible on visual instruments alone
04Sep97	08	CL	0.3/0.7/2.0	Training Session	Tactors not good on right side
04Sep97	09	AE	0.3/0.7/2.0	Test Plan Evaluation With TSAS	Completed all tasks as opposed to SIM07
05Sep97	10	PM	0.3/0.7/2.0	Training Session	F/B o.k. L/R weak
05Sep97	11	CL	0.3/0.7/2.0	Training Session	
10Sep97	12	SG	0.2/0.7/2.0	TSAS Familiarization Test Plan Evaluation	Test Plan OK
10Sep97	13	CL	0.2/0.7/2.0	Re-check Algorithm Training Session	
11Sep97	14	SG	0.3/0.7/2.0	Training Session	
11Sep97	15	CL	0.3/0.7/2.0	Re-check Algorithm Training Session	Prefers 0.3/0.7/2
11Sep97	16	JB	0.3/0.7/2.0	TSAS Familiarization Test Plan check-out	

From these simulator sessions, the tactile algorithm shown in Figures 11 and 12 was considered adequate to meet project goals, and the JSF TSAS evaluation flight test plan (Table 3) was considered a safe and realistic evaluation for the TSAS tactile display.

### Test plan

Four pilots, three from the US Army, and one test pilot from the US Navy, participated in the flight demonstrations in the USAARL UH-60 aircraft, with approximately two flights per pilot. The series of flight tests included:

System Function Test. These two flights occurred at USAARL, Ft. Rucker, Alabama, and these flights checked system integration, TSAS functionality and GPS/INS signal accuracy.

Pilot Familiarization. Three of the pilots flew a flight that acquainted them with the operation of TSAS in actual flight. The fourth pilot, who functioned as the safety pilot for all the flights and who had previous experience with TSAS, did not require a pilot familiarization flight. These flights occurred at USAARL, Ft. Rucker, Alabama.

TSAS Evaluation. These five aircraft flights occurred at NAS Pensacola, Pensacola, Florida, and assessed the performance of TSAS in reducing workload and improving situation awareness in difficult flight conditions. Table 2 represents the JSF TSAS test event matrix.

Table 2. JSF TSAS test event matrix.

<b>Flight</b>	<b>Pilot</b>	<b>Purpose</b>	<b>Location</b>
1	CL	System Function	USAARL
2	SG	System Function	USAARL
3	SG	Pilot Familiarization	USAARL
4	JB	Pilot Familiarization	USAARL
5	CL	Pilot Familiarization	USAARL
6	CL	TSAS Evaluation	NAS Pensacola
7	JB	TSAS Evaluation	NAS Pensacola
8	CL	TSAS Evaluation	NAS Pensacola
9	SG	TSAS Evaluation	NAS Pensacola
10	AE	TSAS Evaluation	NAS Pensacola

#### TSAS evaluation flight

This flight consisted of typical visual meteorological conditions (VMC) and simulated IMC (foggles and obscured chin bubble) hover phases followed by an IMC ship operations phase with TSAS on and TSAS off (Table 3) in the UH-60 helicopter. Data from these flights were used to evaluate the effectiveness of TSAS.

Table 3. JSF TSAS evaluation flight test plan.

Task	Maneuver	Time	ALT (FT AGL)
A: VMC Hover Phase		(TSAS ON):	
1.	Stationary In Ground Effect (IGE) hover	120sec	10
2.	Left 180-degree hovering turn	hover 20s after	10
3.	Forward hover for 100 ft	hover 20s after	10
4.	Rearward hover for 100 ft	hover 20s after	10
5.	Left sideward hover for 50 ft	hover 20s after	10
6.	Right sideward hover for 50 ft	hover 20s after	10
7.	Ascent to Out of Ground Effect (OGE)	hover 20s after	70
8.	Stationary OGE hover	120sec	70
9.	Forward hover for 100 ft	hover 20s after	70
10.	Rearward hover for 100 ft	hover 20s after	70
11.	Right 180-degree hovering turn	hover 20s after	70
12.	Left sideward hover for 50 ft	hover 20s after	70
13.	Right sideward hover for 50 ft	hover 20s after	70
14.	Descent to IGE	hover 20s after	10
15.	Land		
B: IMC Hover Phase		("Foggles" ON, TSAS ON):	
16.	Stationary IGE hover	120sec	10
17.	Forward hover for 100 ft	hover 20s after	10
18.	Right 180 degree hovering turn	hover 20s after	70
19.	Left sideward hover for 50 ft	hover 20s after	10
20.	Ascent to OGE	hover 20s after	70
21.	Stationary OGE hover	120sec	70
22.	Descent to IGE	hover 20s after	10
23.	Land		
C. IMC Simulated Ship Operations Phase		("Foggles" ON, TSAS ON)	
24.	Ascent to IGE hover		10
25.	Left sideward hover for 50 ft		10
26.	Ascent to OGE hover		70
27.	Takeoff to translational flight		200
28.	Approach to OGE Hover		70
29.	Descent to IGE hover		10
30.	Right sideward hover for 50 ft		10
31.	IGE hover		10
32.	Land		

D. IMC Simulated Ship Operations Phase		("Foggles" ON, TSAS OFF)
33.	Ascent to IGE hover	10
34.	Left sideward hover for 50 ft	10
35.	Ascent to OGE hover	70
36.	Takeoff to translational flight	200
37.	Approach to OGE Hover	70
38.	Descent to IGE hover	10
39.	Right sideward hover for 50 ft	10
40.	IGE hover	10
41.	Land	NOTE: Safety pilot flew traffic pattern to arrive on final leg in OGE hover.

#### Human factors metrics

##### Situation awareness

Situation awareness ratings were collected as dependent variables. No situation awareness metric existed that fit the precise needs of the task of hovering a vertical lift aircraft in reduced outside visual conditions. A metric was adapted from the China Lake Situation Awareness (CLSA) scale (Adams, 1998). The modified CLSA was a criterion-driven metric that estimated subjective situation awareness and each pilot rated each phase of the flight during the flight debrief (Table 4).

Table 4. Modified China Lake situational awareness scale.

SITUATION AWARENESS SCALE VALUE	INTERPRETATION
Very Good 1	<ul style="list-style-type: none"> <li>• Full Knowledge of Aircraft Energy State/Mission</li> <li>• Full Ability to Anticipate/Accommodate Trends</li> </ul>
Good 2	<ul style="list-style-type: none"> <li>• Full Knowledge of Aircraft Energy State /Mission</li> <li>• Partial Ability to Anticipate/Accommodate Trends</li> <li>• No Task Shedding</li> </ul>
Adequate 3	<ul style="list-style-type: none"> <li>• Full Knowledge of Aircraft Energy State/Mission</li> <li>• Saturated Ability to Anticipate/Accommodate Trends</li> <li>• Some Shedding of Minor Tasks</li> </ul>
Poor 4	<ul style="list-style-type: none"> <li>• Fair Knowledge of Aircraft Energy State/Mission</li> <li>• Saturated Ability to Anticipate/Accommodate Trends</li> <li>• Shedding of All Minor Tasks as well as Many not Essential to Flight Safety/Mission Effectiveness</li> </ul>
Very Poor 5	<ul style="list-style-type: none"> <li>• Minimal Knowledge of Aircraft Energy State/ Mission</li> <li>• Oversaturated Ability to Anticipate/Accommodate Trends</li> <li>• Shedding of All Tasks not Absolutely Essential to Flight Safety/Mission Effectiveness</li> </ul>

## Video debrief

Each pilot was debriefed via an interview after his or her TSAS effectiveness flight. Table 5 represents the interview questions.

Table 5. TSAS video debrief interview.

- Was the F-22 cooling suit comfortable?
- Any suggestions for improvement of the F-22 cooling suit fit?
- Could you feel the tactors?
- Was the tactor signal intensity strong enough?
- Could you comment on tactor intensity during tactical conditions?
- Was the tactile information intuitive?
- Was the tactile sensation annoying?
- Please comment on workload during IMC shipboard operations?
- Any suggestions for improvements of the tactors and/or tactile information?
- Any further comments?

## Data recording

The TSAS NP-1 computer recorded the aircraft performance data from the C-MIGITS GPS/INS, selected aircraft instruments (altimeter), and the tactor activation for all flights. Video documentation of flight activities included two internal cameras; one view over the pilot's shoulder, and one out the front windshield. For TSAS Evaluation flights at NAS Pensacola, video from the ground was recorded and video telemetry of the over the pilot's shoulder camera was added. The video telemetry system was added to allow visiting JSF personnel to view in-flight video of the TSAS Evaluation flights and consisted of a Broadcast Microwave Services, Inc., Model TBT-200-155T system on the aircraft and a video monitor on the ground. Audio communications between the safety pilot and the tower and from the aircrew were collected on all flights on the video recorders.

## Data reduction

Flight data reduction consisted of converting the binary data log files stored by the TSAS NP-1 processor to ASCII format. The resultant ASCII data files contained 60 channels of data, which are converted to MatLab format variables after digital filtering with a zero phase 12th order Butterworth low pass (0.5Hz) filter. GPS data required conversion from World Geodetic Survey (WGS-84) latitude and longitude to Universal Transverse Mercator (UTM) Easting and Northing (ft).

## Flight test results

Flight testing was conducted in accordance with the test plan described in Section 4.3. Phases A and B were flown with TSAS on to demonstrate the use of TSAS in VMC and IMC hover conditions.

Phases C and D were simulated shipboard landings flown with TSAS on and off respectively, to evaluate the effectiveness of TSAS. Three of the four pilots flew similar flight events to enable comparison of results. For TSAS Evaluation flight FP5, the pilot did not perform phase B, IMC hover phase, and phase D, TSAS off IMC shipboard operations due to time constraints. However, the FP5 test pilot did perform the TSAS on IMC shipboard operations (Phase C). Due to the incomplete data set for FP5, the situation awareness pilot ratings and flight data from FP5 are not included in the analysis, however workload and subjective comments are included. Flight 3 (FP3) was the official JSF TSAS flight demonstration for invited guests.

#### Situation awareness

Table 6 details the results of the situation awareness metric for the TSAS Evaluation flights. All pilots reported improved situation awareness during TSAS on IMC shipboard operations (Phase C) vs. TSAS off IMC shipboard operations (Phase D).

Table 6. Situation awareness pilot ratings.

Flight	Pilot	A1	A2	B1	B2	C	D
		VMC Hover TSAS On		IMC Hover TSAS On		Shipboard TSAS On	Shipboard TSAS Off
FP1	CL	1	1	2	2.5	2.0	5
FP2	JB	1	1	2	2	2.0	4
FP3	CL	1	1	2	2	1.5~2.0	5
FP4	SG	1	1	2	2	1.5	4

During phase D, TSAS off IMC shipboard operations, all project pilots reported either a fair or minimal knowledge of the aircraft state with saturated ability to anticipate trends. One pilot commented, "I had no idea what was happening" and another, "I would not attempt this maneuver in these conditions." In contrast, during phase C, TSAS on IMC shipboard operations, all project pilots reported a full knowledge of the aircraft state with a partial ability to anticipate trends.

One of the pilots commented that "(I) noticed while flying simulated shipboard maneuvers that I could fly *safer*, I had more cues." Another pilot commented "(I) noticed at the high hover I depended on the tactors more due to the reduced visibility. I could feel the tactors before I could detect visual cues of movement." Both these comments reflect the importance of the addition of tactile cues to the traditional visual cues in maintaining situation awareness. All demonstration pilots reported that the maintenance of situation awareness during reduced visual conditions was enhanced with TSAS.

## Workload

During the debriefs, all pilots reported reduced workload during Phase C as compared to Phase D. The knowledge of aircraft velocity and rate of change of velocity without looking at a visual instrument permitted the pilot to concentrate on other instruments such as the altimeter and mission tasks, thereby reducing workload. The tactile instrument reduced pilot workload by providing the opportunity to devote more time to other instruments and systems when flying in task saturated conditions. These effects can substantially increase mission effectiveness.

Two of the demonstration pilots commented "We could've used this in Desert Storm." One of the demonstration pilots, at the JSF TSAS flight demonstration, stated that TSAS, without any further development, would be preferable to the status quo. Another commented, "I noticed that a pilot's capability was increased with TSAS."

## Pilot comments

- Was the F-22 cooling suit comfortable?

All pilots reported that the F-22 cooling vest was comfortable. However, two of the pilots remarked that the vest was restrictive and that they had difficulty taking a deep breath.

- Any suggestions for improvement of the F-22 cooling suit fit?

The addition of an adjustable elastic panel on both sides of the vest would permit a greater range of chest movement.

- Could you feel the tactors?

All pilots reported that they could feel the tactors all the time.

- Was the tactor intensity of signal strong enough?

All pilots reported tactor intensity strong enough in the vibration environment of a helicopter.

- Could you comment on tactor intensity during tactical conditions?

One pilot responded, "In high stress environment, where there is sensory overload, or with high threat situations, stronger tactile sensations would be more appropriate. Even stronger tactile sensations for critical altitude alert signals would be very important."

Another commented "I see that in Army tactical situations, personally hovering over snow, where helicopter drift is very hard to detect, that the TSAS suit would make flight safer and easier to fly. The TSAS vest could be the difference between success and a mishap."

"Tactically, when using Night Vision Goggles (NVG) and hovering over an oil rig, over a catwalk. Since Blackhawk is 65 ft wingtip to wingtip, I sit 20 ft behind that, and troops are 10 ft behind me. Very important to know helicopter movement while troops are rappelling, jumping off, getting on. Crew chief in the back can say move forward and with the vest I can tell if I move forward."

“In combat, while firing mini-guns, the flash is blinding, NVG goggles turn off and I have a loss of vision. The suit could let me know if I am drifting, and which direction that I am moving.”

“In combat, while taking incoming fire flying or hovering low to the ground, flash from missile blast, explosions gunfire and loss of vision is present. The suit could again let me know what the helicopter is doing all this time in relation to the ground or hazards.”

- Was the tactile information intuitive?

All pilots responded that the tactile information was very intuitive. Comments included:

“No thinking.”

“I didn’t have to think.”

“(TSAS) design gave ‘solid indications’ of drift.”

“Frequency signal strength variations to identify the amount of helicopter drift was very helpful.”

- Was the tactile sensation annoying?

All pilots responded that the tactile sensation was not annoying or distracting.

- Please comment on workload during IMC shipboard operations?

All pilots responded that workload was reduced.

- Any suggestions for improvements of the tactors and/or tactile information?

1. Position Cue:

“I would add the ability to pinpoint my location at will. Then I can tell if there are changes from that personally set point. Pinpointing is very important for control (of) the helicopter, while rappelling, hoisting or hovering over water.”

“I would like to add that with the TSAS suit aircraft position is known (communicated) without verbally saying it between pilots and crew chief could be in the loop as well.”

“Have a pinpoint set control, set at will. While hovering, set it then I can use that point as a reference point for off loading troops via repelling, fast roping, or egress.”

2. Altitude Information:

“I would suggest adding something to give altitude information. Maybe on the left arm - controls of collective position. (1) rate of descent, (2) rate of ascent, (3) change in descent, (4) change in ascent and (5) altitude. While flying following terrain. Keeping above obstacles, but not over 100 feet where threats are.”

“Altitude control factor, while flying with a minimum and a maximum attitude on approach on arm and identifying drift up or down.”

- Any further comments?

Other comments included:

“In multi-flight scenario, fatigue sets in, air crew coordination is decreased, minor task capability is reduced, the suit would counteract this. Especially cases of NVG flights, over water, or while shipboard hovering.”

“In training with NVG, student is flying all by themselves. Instructor with the suit on can monitor correctness of the flight path of the student (following directions, drift, etc.) while checking the radio or other instruments.”

“Student can tell what direction they are moving while flying.”

“Administratively or in a controlled environment, non-verbal communication with the crew is possible (i.e. buzzing each other to report all ready, or wait or emergency).”

#### Flight data

Using TSAS, pilots demonstrated improved control of aircraft during complex flight maneuvers. The awareness of aircraft velocity over the ground or “drift” without looking at a visual instrument was the biggest advantage of TSAS. This is illustrated in Figures 13 through 20, which contain data for the four pilots (Table 6). Looking at the top of the flight data figures (Figures 13 through 20), there are two red plots that show the aircraft path with TSAS ON (Phase C), the top left is a 3D view and the top right is an overhead view. At the bottom of the flight data figures (Figures 13 through 20), there are two blue plots that show the aircraft path with TSAS OFF (phase D) in both 3D and overhead views. The orientation of the helipad icon (H) indicates the heading of the helicopter at the beginning of the maneuver. For the 3D view, the helicopter is facing away from the reader, and in the overhead view the nose of the helicopter is orientated to the top of the page. Wind direction is shown as a gray arrow. The maneuver for the simulated shipboard take-off is described above, and consists of an ascent to IGE hover, followed by a left sideward hover for 50ft, then ascent to OGE hover and transition to forward flight. The maneuver for the simulated shipboard landing is described above, and consists of a descent from OGE to IGE hover, followed by a left sideward hover for 50ft, stabilize at an IGE hover and then land. The safety pilot was responsible for verbally instructing the demonstration pilot on the sequence of maneuvers. The intended maneuver is shown as a dashed black arrow in the overhead and 3D views.

Figure 13 displays the data for the simulated shipboard take-off with TSAS ON and TSAS OFF for evaluation flight, FP1. Looking at Figure 13, the pilot during TSAS ON initially drifts rearward during ascent to In-Ground Effect (IGE) hover. Aware of this drift the pilot stops the rearward drift during the IGE hover and then moves leftward in the correct direction to the Out of Ground Effect (OGE) hover. Minimal horizontal drift of less than 10 ft occurs during the OGE hover and the pilot departs on the correct takeoff heading. With TSAS OFF, the aircraft initially drifts to the right during the ascent to IGE, and then drifts rearward during the leftward hover, and during the ascent to OGE. These drifts are undetected and uncorrected by the pilot and the aircraft ends up 40 ft behind the correct takeoff point.


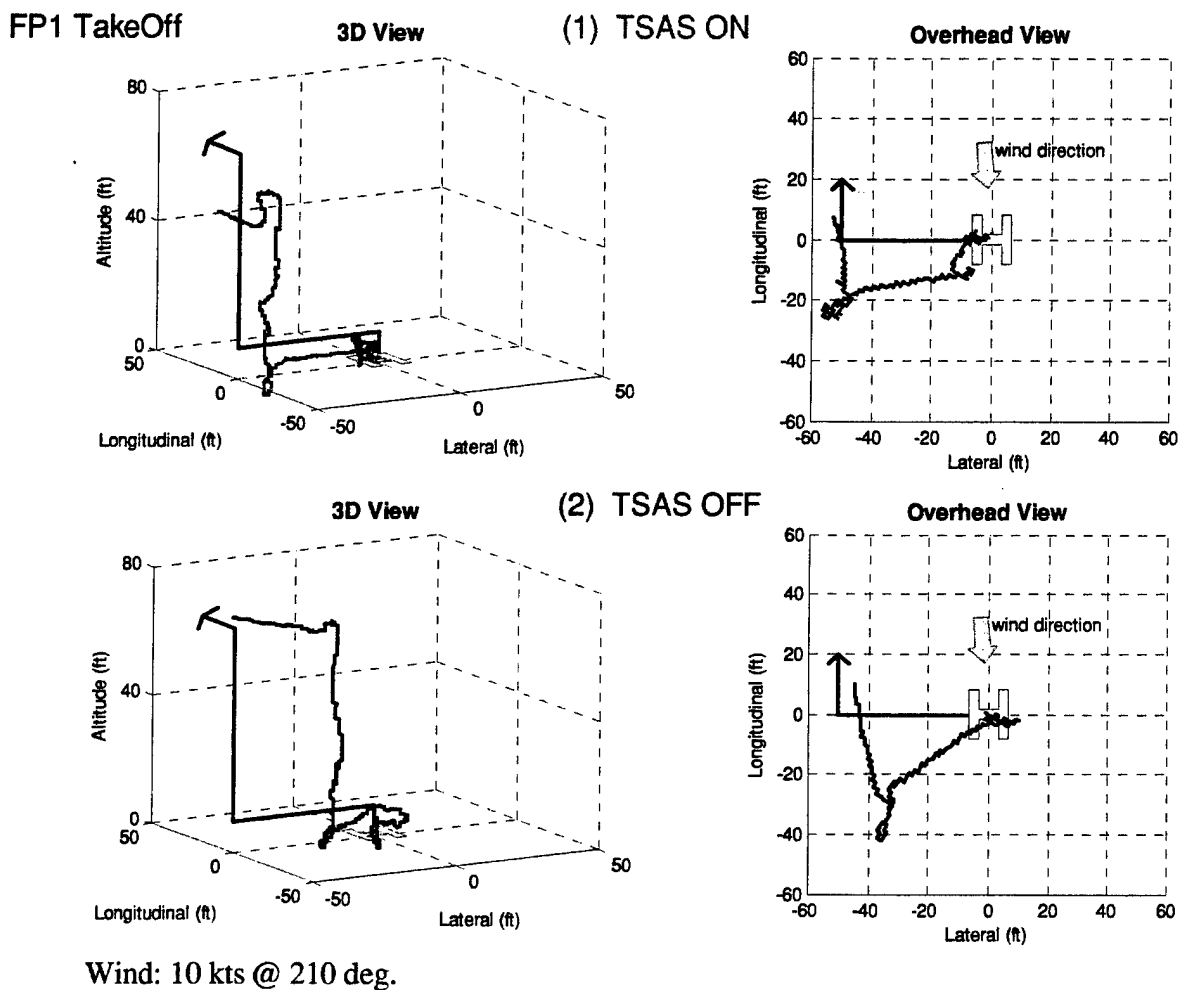


Figure 13. FP1 simulated shipboard take-off (phases C and D).

Figure 14 displays the data for the simulated shipboard landing with TSAS ON and TSAS OFF for FP1 evaluation flight. With TSAS ON, the pilot performs a safe correct landing under the guidance of the safety pilot (Figure 14, red plots). With TSAS OFF, the pilot does not perform a safe landing and the safety pilot takes control of the aircraft during this maneuver (Figure 14, blue plots).

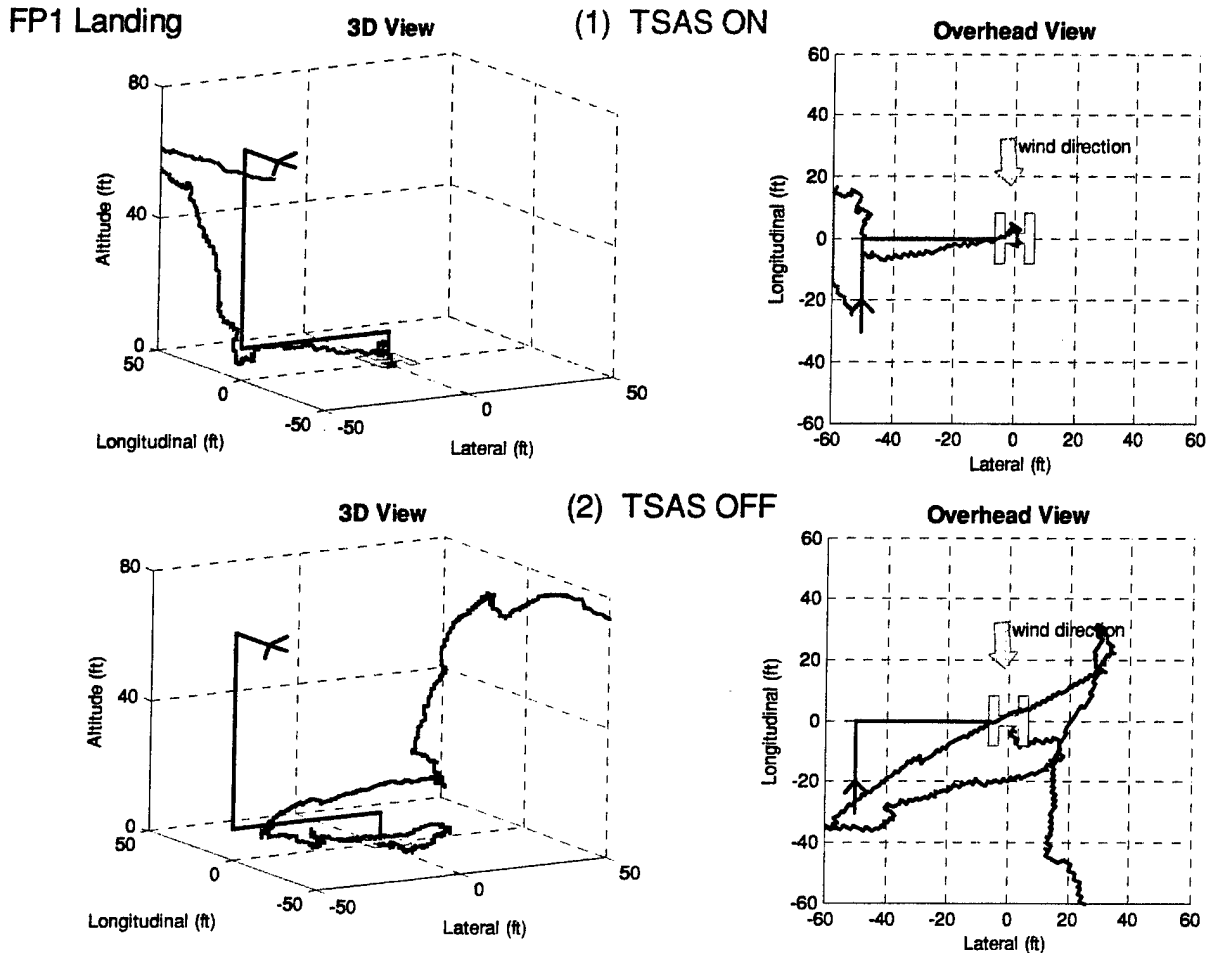

Wind: 10 kts @ 210 deg.

Figure 14. FP1 simulated shipboard landing (phases C and D).

Figure 15 displays the data for the simulated shipboard take-off with TSAS ON and TSAS OFF for evaluation flight FP2. Looking at the red plots in Figure 15, the pilot with TSAS ON initially drifts right while ascending to IGE hover. Aware of this drift, the pilot compensates for the right drift and moves left the correct amount to clear the simulated deck. No horizontal drift occurs during the OGE hover and the pilot departs on the correct takeoff heading. With TSAS ON, the pilot performs a safe, correct shipboard take-off. With TSAS OFF, the aircraft drifts forward during the ascent to IGE hover, the rightward hover, and during the ascent to OGE hover. Also the helicopter drifts right during the ascent to OGE hover. These drifts are undetected and uncorrected by the pilot and the aircraft ends up 70 ft to the right and 70 ft in front of the correct takeoff location. The pilot in FP2 does not perform a safe, controlled shipboard take-off with TSAS OFF.

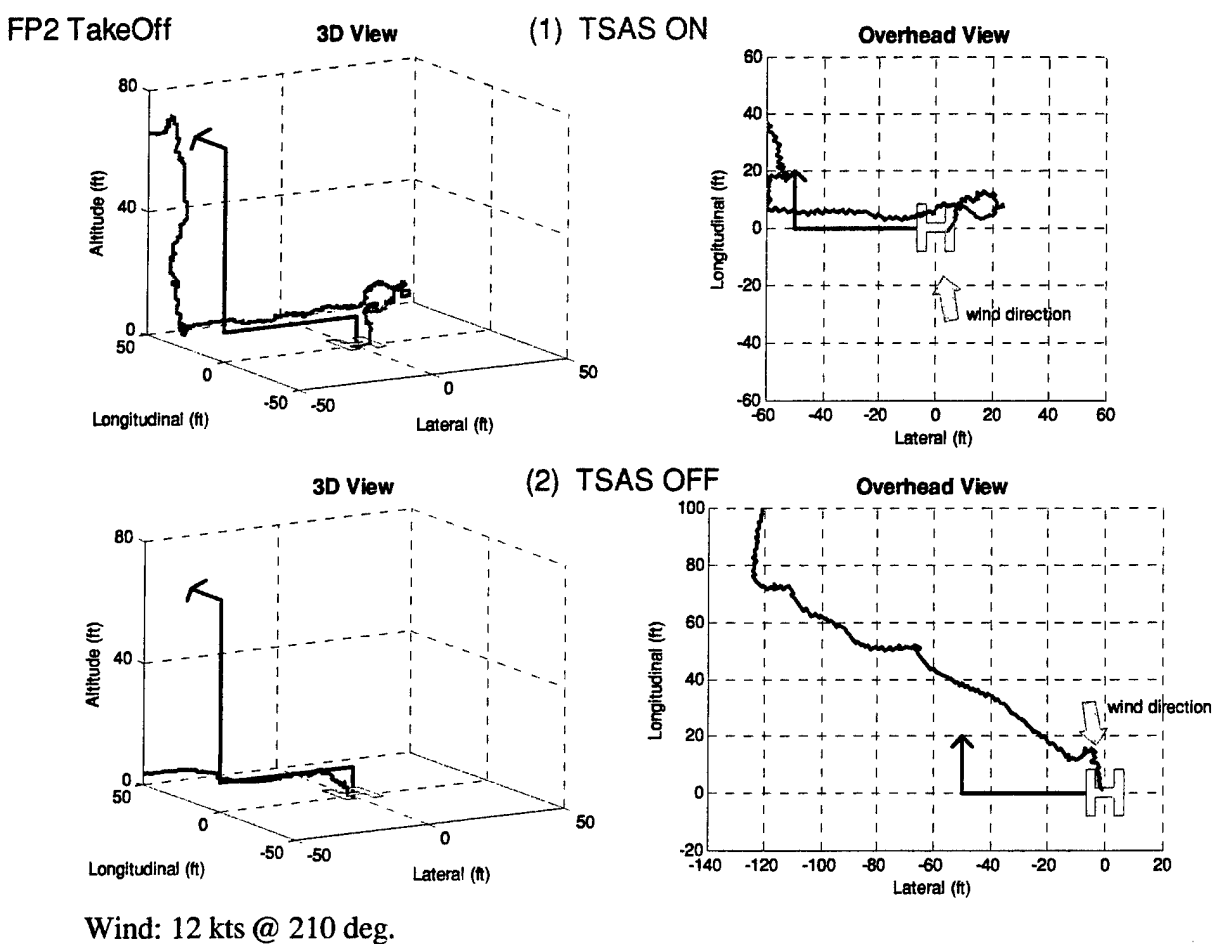


Figure 15. FP2 simulated shipboard take-off (phases C and D).

Note that the heading direction was changed from TSAS ON to TSAS OFF so that the take-off and landing were into the wind. In order to facilitate comparisons, the charts were normalized.

Figure 16 displays the data for the simulated shipboard landing with TSAS ON and TSAS OFF for FP2 evaluation flight. With TSAS ON, the pilot performs a safe landing following the guidance of the safety pilot (Figure 16, red plots). The descent to IGE hover is vertical with horizontal drifts of approximately 10 ft. With TSAS OFF, the pilot does not detect the forward drift during descent from OGE to IGE and during the IGE hover before the leftward hover. This undetected and uncorrected forward drift is approximately 50 ft.

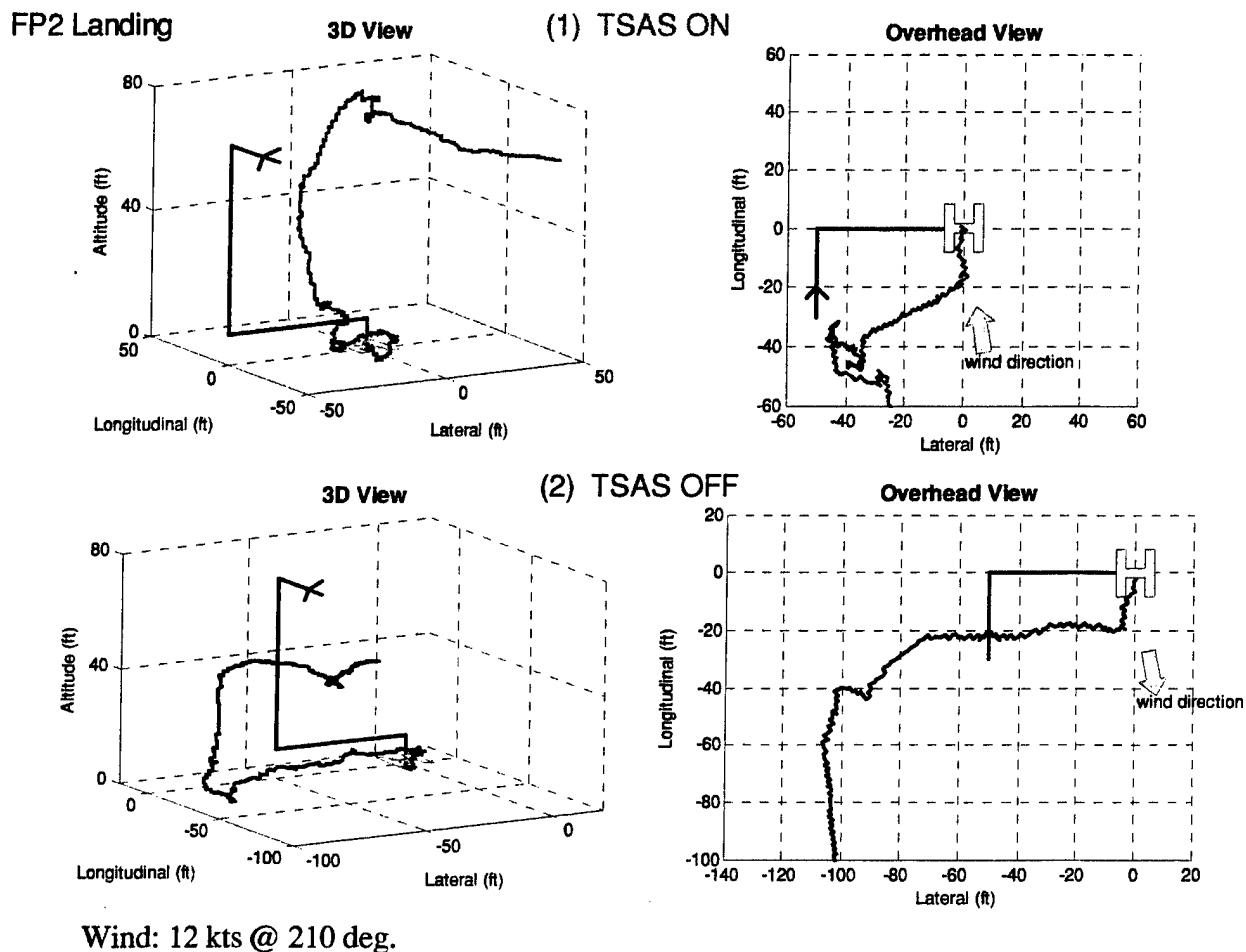


Figure 16. FP2 simulated shipboard landing (phases C and D).

Note that the heading direction was changed from TSAS ON to TSAS OFF so that the take-off and landing were into the wind. In order to facilitate comparisons, the charts were normalized.

Figure 17 displays the data for the simulated shipboard take-off with TSAS ON and TSAS OFF for evaluation flight FP3. The TSAS ON takeoff is qualitatively the least accurate of the TSAS ON take-offs. However, the pilot is aware of a rearward drift and performs the leftward hover of 50 ft to achieve a safe clearance from the simulated deck. A safe transition to forward flight is achieved. With TSAS OFF, the pilot performs a fairly accurate maneuver until the aircraft drifts right 50 ft during the OGE hover. This undetected rightward drift prior to the transition to forward flight results in inadequate lateral clearance from the simulated deck, and in a real shipboard situation would result in a mishap.

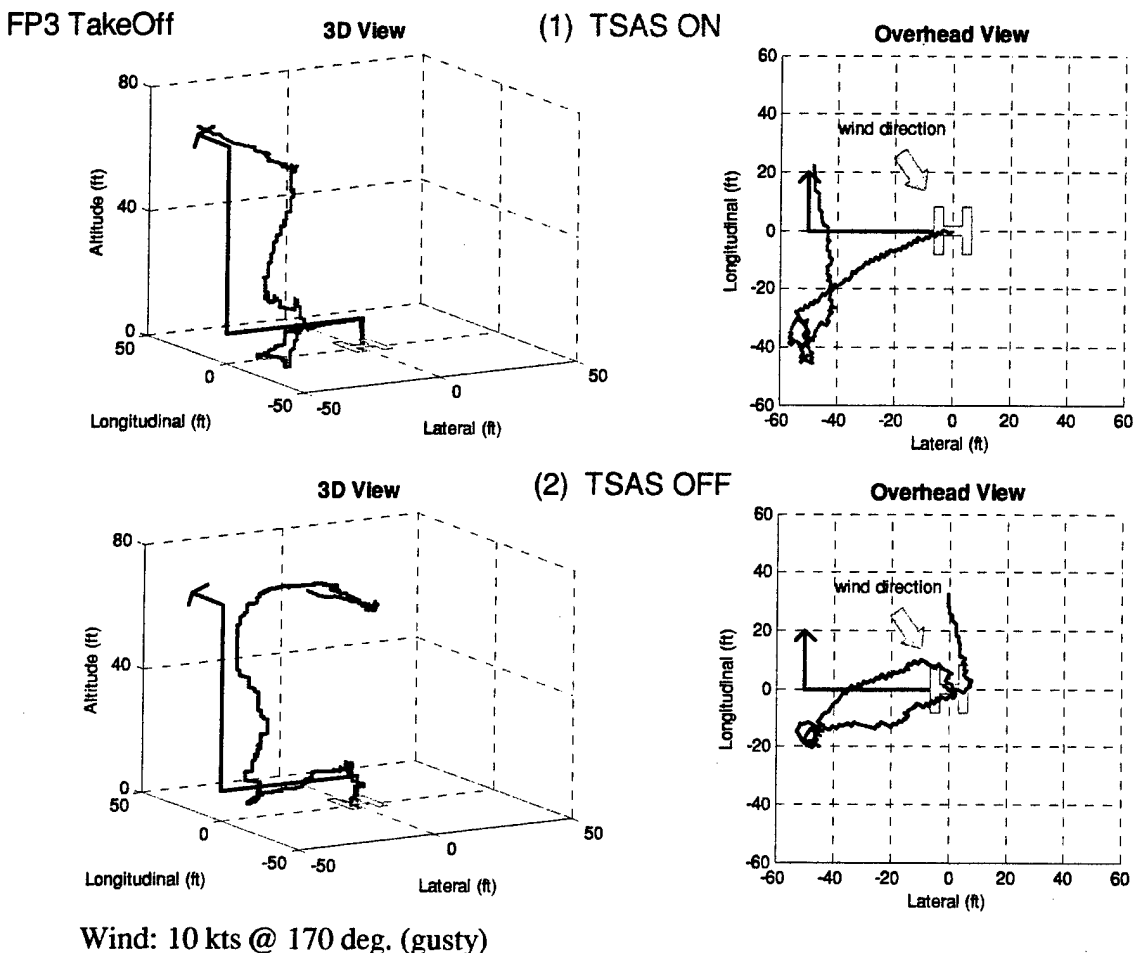


Figure 17. FP3 simulated shipboard take-off (phases C and D).

The pilot in FP3 does not perform a safe, correct controlled shipboard take-off with TSAS OFF. Knowledge of the aircraft drift during hovering is critical for safe flight.

Figure 18 displays the data for the simulated shipboard landing with TSAS ON and TSAS OFF for FP3 evaluation flight.


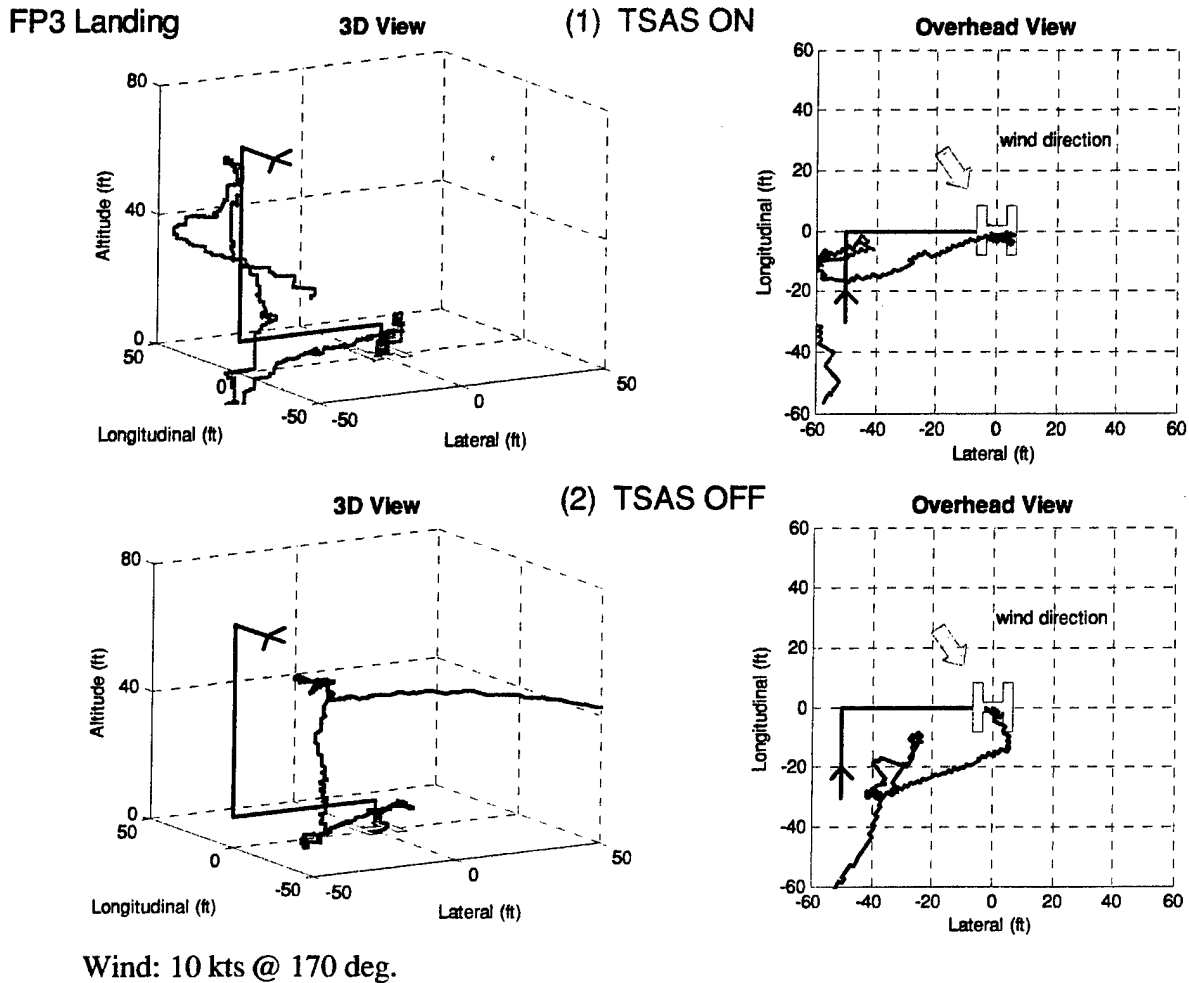


Figure 18. FP3 simulated shipboard landing (phases C and D).

With TSAS ON, the pilot performs a safe landing following the guidance of the safety pilot (Figure 18, red plots). The descent to IGE hover is vertical with a leftward drift followed by a correction to the right. A straight rightward hover in IGE completes the landing. With TSAS OFF, the pilot does not detect a rearward drift of approximately 20 ft during the OGE hover. As seen in other landings, when TSAS was OFF, undetected drifts occurred.

Figure 19 displays data from the simulated shipboard take-off for TSAS Evaluation flight FP4, for both TSAS ON and TSAS OFF. For both TSAS ON and OFF, the pilot initially drifts right while ascending to IGE hover. With TSAS OFF, this drift is neither sensed nor corrected and increases to approximately 20 ft (Figure 19, blue plot bottom right). The pilot then performs the left sideward hover. With TSAS OFF, the left sideward hover is in the correct direction, however, the undetected rightward drift prior to the left hover results in inadequate lateral clearance from the simulated deck. In addition, with TSAS OFF, the aircraft drifts aft during ascent to OGE, undetected by the pilot. With TSAS OFF, the pilot does not perform a safe controlled shipboard take-off. With TSAS ON, the pilot performs the left hover but drifts rearward, however, aware of this backward drift, the pilot corrects by moving forward on the ascent to OGE hover (Figure 19, red plot top right). While maintaining the OGE hover, the pilot drifts to the right, however, aware of this rightward drift, the pilot departs in a forward and leftward direction (Figure 19, top right). Similar to the pilot in FP1, FP2 and FP3 with TSAS ON, the pilot performed a safe, controlled and accurate shipboard take-off.

#### FP4 TakeOff

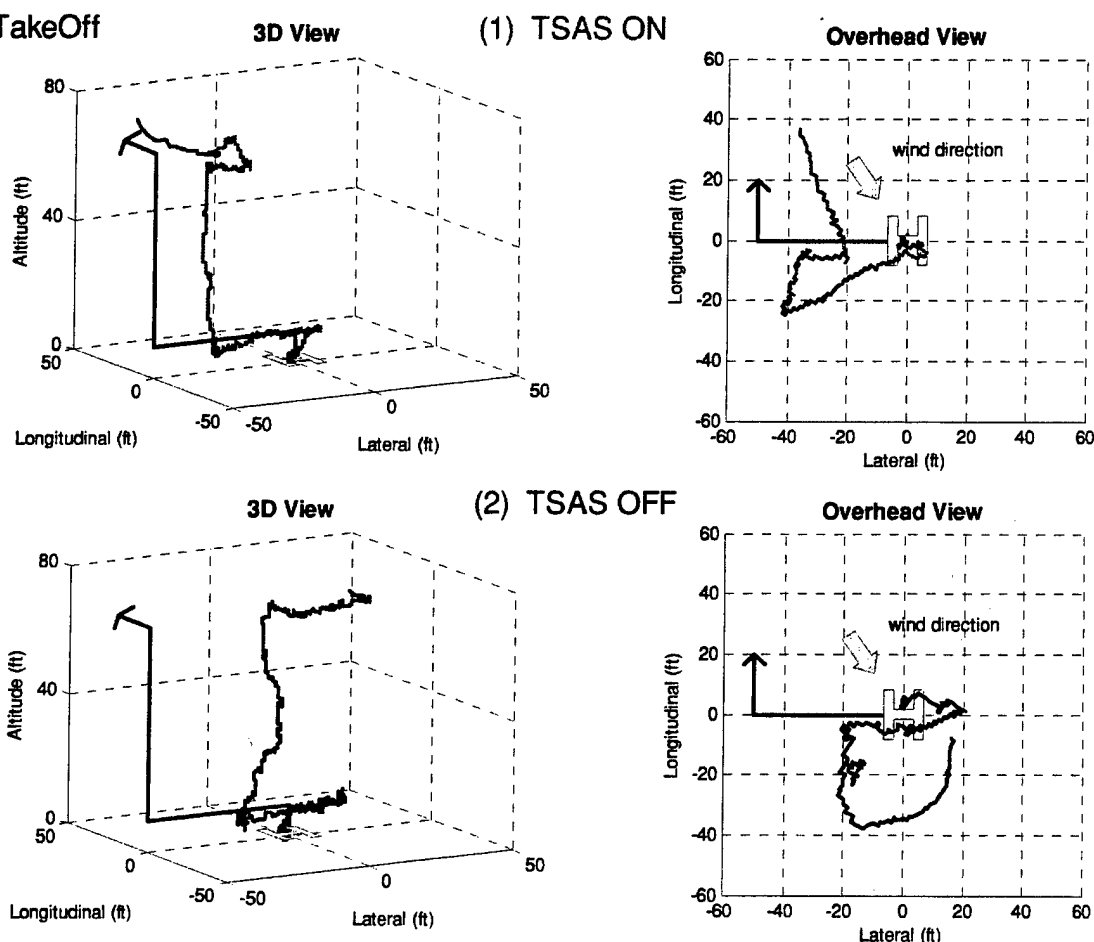


Wind: 10 kts @ 180 deg.

Figure 19. FP4 simulated shipboard take-off (phases C and D).

Figure 20 displays the data for the simulated shipboard landing with TSAS ON and TSAS OFF for FP4 evaluation flight. Similar to the FP2 flight, the pilot with TSAS ON performs a safe landing following the guidance of the safety pilot (Figure 20, red plots). The descent to IGE hover is vertical with horizontal drifts approximately 10 ft. With TSAS OFF, the pilot does not detect the rightward drift during descent from OGE to IGE and during the IGE hover before the rightward hover. This undetected and uncorrected rightward drift is approximately 60 ft.

#### FP4 Landing

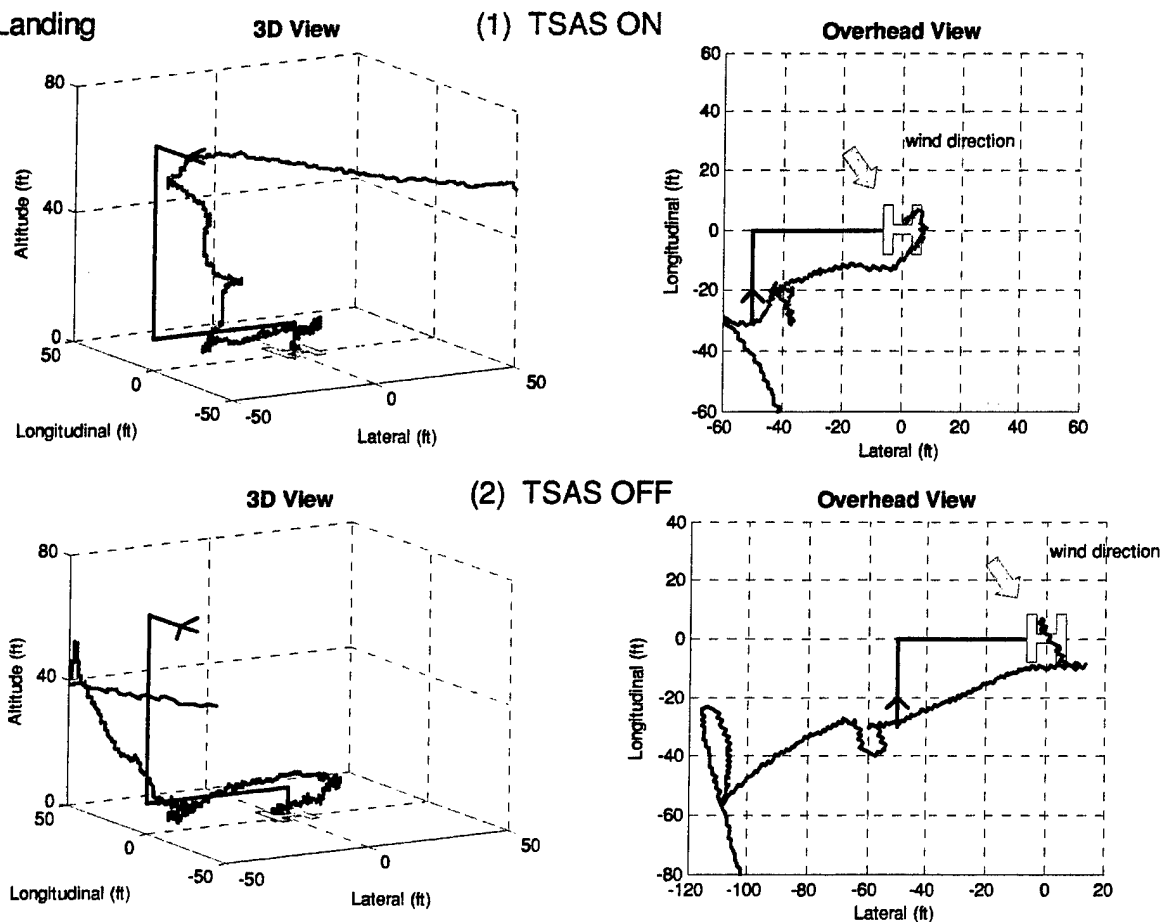

Wind: 10 kts @ 190 deg.

Figure 20. FP4 simulated shipboard landing (phases C and D).

## Discussion

The JSF TSAS flight demonstration fulfilled project test objectives and demonstrated that a tactile instrument could provide increased mission effectiveness and survivability in V/STOL strike aircraft. Results from the JSF TSAS flight demonstration have shown that TSAS technologies have the potential to increase pilot situation awareness and reduce pilot workload, especially during complex flight conditions in poor visibility. Using TSAS, pilots demonstrated enhanced control of hover maneuvers, relying on tactile cues for the necessary information.

The awareness of aircraft movement over the ground or “drift” without looking at a visual instrument was the most important feature of the JSF TSAS tactile instrument. An undetected drift of a helicopter or V/STOL aircraft whilst hovering can lead to a spatial disorientation mishap resulting in a serious and costly problem in terms of lives lost, aircraft lost and mission failure. With the increasing use of night vision devices, the problem will only increase in magnitude. The JSF TSAS tactile instrument using an F-22 cooling vest and lightweight pneumatic tactors was optimized for hover conditions in poor visibility. By providing horizontal drift information, the pilots were able to spend more time visually attending to other displays, including the altimeter for altitude control. This ability to spend more time visually on other visual displays and using the tactile instrument for horizontal drift resulted in reports of increased situation awareness and reduced workload. During IGE hover in VMC, the pilots used the tactile cues as a secondary source of drift information, again resulting in reports of increased situation awareness and reduced workload. During OGE hover in VMC, particularly in areas of limited contrast such as the helipad from which this demonstration was performed, the visual detection of drift becomes harder due to the loss of close, clear visual cues and to the characteristics of height-depth perception illusion (Headquarters, Department of the Army. 2000). The tactile display was able to provide the necessary drift information that allowed the pilot to spend more time visually on other instruments and outside the cockpit. The TSAS tactile display permitted the pilot to concentrate on mission tasks, thereby reducing workload. The relationship between situation awareness and performance is not direct, but can be foreseen. In general, it is expected that poor performance will occur when situation awareness is incomplete or inaccurate (Endsley, 1995). With decreased pilot workload and enhanced situation awareness, TSAS increases the potential for improved performance of an aviator. Improved performance in military aircraft translates to improved survivability and mission capability. These effects can increase mission effectiveness.

With the tactile cues provided by the TSAS tactile instrument, pilots were able to demonstrate improved control of aircraft during complex flight conditions in VMC and IMC conditions. Even though the flight demonstrations were very successful in demonstrating that tactile instruments can solve operational problems, one must be cautioned in overusing the tactile instrument by trying to provide too much information, thus diminishing the capability of the display. This is especially important with the current tactor and TLS technology. When the pilot felt a tactile sensation with the JSF TSAS hover display, only one aircraft variable was being communicated (velocity) and the position on the body corresponded to the direction of that velocity, and the intensity of the sensation corresponded to the magnitude. This was a simple, easy-to-interpret tactile algorithm that used current tactor and TLS technology to solve a critical aviation problem and improve the safety of flight.

These results confirm the previous findings in a T-34 flight demonstration in that a tactile display provides excellent warning of deviation from a desired state or null condition (McGrath et al., 1998). By using the appropriate tactile algorithm (tactor location with maximal separation and strong tactile intensity) intuitive 3D direction and magnitude information can be provided.

A few technical problems related to the sensor hardware were encountered during the test program. As mentioned previously, strong emphasis was placed on the use of COTS equipment, which led to the selection of civilian GPS and DGPS units. The GPS unit had strict antenna requirements, which precluded the use of the installed military aircraft GPS antenna. The DGPS unit received US Coast Guard beacon signals from Mobile, Alabama, that proved intermittent at Ft. Rucker, Alabama, approximately 100 miles away. Utilizing a dedicated passive civilian GPS antenna and moving closer to Mobile (NAS Pensacola) solved these two problems, but the use of a military GPS unit with P-Code (as would be the case in a fleet deployed TSAS) would also eliminate those two problems. No other significant technical difficulties were encountered during the flight test program.

#### F-22 cooling vest

One of the major breakthroughs of the JSF TSAS project was the use of the F-22 cooling vest as the TLS. The F-22 cooling vest solved both engineering and human factors/acceptability concerns for a TLS. First, the F-22 cooling vest TLS was lightweight and snug fitting when properly worn, and inflated slightly when connected to the cooling ambient air, which ensured a constant contact pressure of the pneumatic tactors on the torso. Coupled with the reduced weight of the pneumatic tactor compared to the “pager motor” tactor used in the previous two TSAS military aviation test projects (Raj et al., 1998a; Raj et al., 1998b), the pilots did not report any lost tactor sensation. Two of the larger pilots commented that additional elastic would improve the comfort even more. From a human factors perspective, the F-22 vest was exceptional because the pilots wanted to wear it. The circulating cooling air climate control was appreciated by all pilots and was instrumental in overcoming the very important aviator culture criticism that “I don’t want to wear another piece of equipment.” This is a very real problem as the modern aviator is tasked to carry/wear a large amount of equipment. Without aviator acceptance, the tactile instrument will be limited in its development.

The F-22 cooling suit was a vest (Figure 9) that provided a good fit around the torso. This coverage of the torso was more than adequate for the presentation of helicopter horizontal velocity. It allowed the placement of two tactors in each direction, thus providing increased stimulation and redundancy – a very critical feature in aviation. To expand the role of the vest to include orientation information during forward flight (perhaps presented as a single tactor or a collection of tactors in the direction of down, as demonstrated in previous TSAS test projects) an expanded coverage vest is required to include the upper torso region. The current vest does not provide a snug fit sufficient to maintain tactor contact with the body in the upper torso (chest and back).

### Conclusions/recommendations

The TSAS flight demonstration exceeded project test objectives and demonstrated that a tactile display could provide increased mission effectiveness and survivability in V-STOL strike aircraft.

TSAS technologies have shown the potential to increase pilot SA and reduce pilot workload, especially during complex flight conditions. Using TSAS, pilots demonstrated enhanced control of hover maneuvers, including transitions to and from forward flight in degraded visual conditions, relying on tactile cues for the necessary information. The awareness of aircraft movement over the ground or "drift" without looking at a visual instrument was the most important feature of TSAS. The tactile display provided the opportunity to devote more time to other instruments and systems when flying in task saturated conditions. TSAS permitted the pilot to concentrate on mission tasks, thereby reducing workload. These effects can substantially increase mission effectiveness.

Previous flight test programs also have proven the effectiveness of tactile displays in normal flight regimes (straight and level flight, standard rate turns, ground-controlled approaches and unusual attitude recoveries) in both fixed and rotary wing aircraft. Overall, TSAS flight demonstrations have shown that a tactile display can decrease pilot workload, enhance pilot SA, and increase the potential for survivability and lethality.

To achieve a complete solution to the problem of spatial awareness mishaps, tactile instruments must be integrated with advanced visual displays and audio systems into a synergistic situation awareness instrument. This integrated solution represents the basis for the next-generation human-machine interface for military and commercial aircraft. Development of mode-switching software mechanisms for the tactile instrument will also be applicable to advanced HMD and 3D audio displays. The mode-switching software must be adaptive and "smart" about which information to present; and how, when, what, and where to provide that information. The switching software will facilitate the eventual integration of visual, audio, and tactile displays into a situation awareness display that will provide the right combination of information at the right time by the right sensory channel(s).

To fully realize the potential of TSAS, the further development, testing, and evaluation of the following technology areas and the human factors implications need to be pursued:

- Integration of tactile instruments with helmet mounted displays and 3D audio displays.
- Significant improvement in tactor technology.
- Tactor integration with flight garments.
- Miniaturization of all TSAS components.
- Improve JSF hover tactile algorithm to include altitude and position cues.
- Development of "smart" software to enable intelligent switching between various modes of situation awareness information.

## References

Adams, S. 1998. Practical considerations for measuring situational awareness. The application of tactile cues to enhance situation displays. 3<sup>rd</sup> Ann Symp Exhibition on Situational Awareness in the Tactical Air Environment (pp. 157-162). Patuxent River, MD.

Aeronautical Design Standard ADS-33D-PRF USAATC/AVRDEC. 1994. Handling qualities requirements for military rotorcraft. St Louis, MO: US Army Aviation and Troop Command.

Braithwaite, M. G., Douglass, P. K., Durnford, S. J., and Lucas, G. 1998. The hazard of spatial disorientation during helicopter flight using night vision devices. Aviat Space Environ Med, 69(11):1038-1044.

Braithwaite, M. G., Groh, S., and Alvarez, E. A. 1997. Spatial disorientation in U.S. Army helicopter accidents: An update of the 1987-92 survey to include 1993-95. Fort Rucker, AL: U.S. Army Aeromedical Research Laboratory. USAARL Report 97-13.

Durnford, S. J., Crowley, J. S., Rosado, N. R., Harper, J., and DeRoche, S. 1995. Spatial disorientation: A survey of U.S. Army helicopter accidents 1987-92. Fort Rucker, AL: U.S. Army Aeromedical Research Laboratory. USAARL Report 95-25.

Endsley, M. R. 1988. Design and evaluation for situation awareness enhancement. Proc Hum Factors Soc 32<sup>nd</sup> Ann Meeting (pp. 97-101). Santa Monica, CA: Human Factors and Ergonomics Society.

Endsley, M. R. 1995. Toward a theory of situation awareness in dynamic systems. Hum Factors, 37(1):32-64.

Geldard, F. A. 1960. Some neglected possibilities of communication. Science, 131, 1583-1588.

Griffin, M., Pera, L., Cabrera, L., and Moore, B. 2001. Operational Assessment of the Tactile Situational Awareness System Final Report. HQ AFSOC/XPT, Hurlburt Field, FL. AFSOC Project No. 99-060.

Haven, R., and Smith, R. 1996. Joint Advanced Strike Technology Integrated Helmet Audio-Visual System Demonstration Final Report. Joint Strike Fighter Program Office, December 1996.

Headquarters, Department of the Army. 2000. Aeromedical Training for Flight Personnel. Washington, DC. Field Manual No 3-04.301(1-301).

Hoh, R. H., and Mitchell, D. G. 1996. Handling-qualities specification – a functional requirement for the flight control system. In: MB Tischler (Ed.), Advances in aircraft flight control. (pp 3-33) London: Taylor & Francis.

McGrath, B. J., Suri, N., Carff, R., Raj, A. K., and Rupert, A. H. 1998. The role of intelligent software in spatial awareness displays. 3<sup>rd</sup> Ann Symp Exhibition on Situational Awareness in the Tactical Air Environment (pp. 143-152). Patuxent River, MD.

Raj, A. K., McGrath, B. J., Rochlis, J., Newman, D. J., and Rupert, A. H. 1998a. The application of tactile cues to enhance situation displays. 3<sup>rd</sup> Ann Symp Exhibition on Situational Awareness in the Tactical Air Environment (pp. 77-84). Patuxent River, MD.

Raj, A. K., Suri, N., Braithwaite, M. G., and Rupert, A. H. 1998b. "The Tactile Situation Awareness System in Rotary Wing Aircraft: Flight Test Results," In: Proceedings of the RTA/HFM Symposium on Current Aeromedical Issues in Rotary Wing Operations, 19-22 October 1998, pp. (16) 1-7.

Rupert, A. H., Guedry, F. E., and Reshke, M. F. 1994. The use of a tactile interface to convey position and motion perceptions. In Virtual interfaces: Research and applications, Lisbon, Portugal, Oct 18-22, 1993. AGARD CP-541:20-11 to 20-75. Neuilly Sur Seine, France: Advisory Group for Aerospace Research and Development.

Rupert, A. H., Mateczun, A.J., and Guedry, F. E. 1990. Maintaining spatial orientation awareness. In Situational Awareness in aerospace operations, Copenhagen Denmark, 2-6 Oct 1990. AGARD CP-478:21-1 to 21-5. Neuilly Sur Seine, France: Advisory Group for Aerospace Research and Development.

Sachs, R. M., Miller, J. D., and Grant, K. W. 1980. Perceived magnitude of multiple electrocutaneous pulses. Percept. Psychophys. 28(3):255-262.

US Department of Transportation. 1978. Basic helicopter handbook. Advisory Circular 61-13B, US Department of Transportation, Federal Aviation Administration. Oklahoma City, Oklahoma.

## Acronyms

The following lists alphabetically the acronyms used in this thesis.

ADS	Aeronautical Design Standard
AFCS	Automatic Flight Control System
AFSOC	Air Force Special Operations Command
AGL	Above Ground Level
AIS	Airborne Instrument System
CLSA	China Lake Situation Awareness
COTS	Commercial-Off-The-Shelf
CSS	Coastal Systems Station
DGPS	Differential Global Positioning System
EAI	Engineering Acoustics, Inc.
FET	Field Effect Transistor
FSIPT	Flight Systems Integrated Product Team
GCA	Ground Controlled Approach
GPS	Global Positioning System
GPS/INS	Global Positioning System/Inertial Navigation System
GUI	Graphical User Interface
HMD	Head Mounted Display
HUD	Heads-Up Display
IGE	In-Ground Effect
IHADSS	Integrated Helmet and Display Sighting System
IMC	Instrument Meteorological Conditions
INS	Inertial Navigation System
INS/GPS	Inertial Navigation System/ Global Positioning System
IO	Instructor Operator
JSF	Joint Strike Fighter
MFD	MultiFunction Displays
MSL	Mean Sea Level
NAMRL	Naval Aerospace Medical Research Laboratory
NATOPS	Naval Air Training and Operating Procedures Standardization
NASA	National Aeronautics and Space Administration
NAWC-AD	Naval Air Warfare Center – Aircraft Division
NVD	Night Vision Device
NVG	Night Vision Goggle
OGE	Out of Ground Effect
ONR	Office of Naval Research
RTCM-SC 104	Radio Technical Commission for Maritime Services, Special Committee 104
SA	Situational Awareness
SBIR	Small Business Innovative Research

SV-2	Survival Vest – 2
TCLS	Tactor Control Laboratory System
TLS	Tactor Locator System
TSAS	Tactile Situation Awareness System
US	United States
USAARL	United States Army Aeromedical Research Laboratory
USD	Unrecognised Spatial Disorientation
UTM	Universal Transverse Mercator
UWF-IHMC	University of West Florida, Institute for Human and Machine Cognition
VMC	Visual Meteorological Conditions
VME	Versa Module Europa
V/STOL	Vertical Short Take Off and Landing
WGS	World Geodetic Survey