## **Building-Level Functionality Assessment**

## ERDC/CERL Technical Note TN-06-2

**Overview.** ASTM International defines *building performance* as the in-service functioning of a building for a specified use (ASTM E1480-92). The term refers to how effectively, safely, and efficiently a building performs its mission at any time during its life cycle. A building's performance state, which changes during time in service, is reflected by two different indicators: the physical condition state and the functionality state. The *physical condition state* relates to a facility's general 'physical fitness,' independent of its mission, as it deteriorates due to routine aging, excessive or abusive use, or poor maintenance. The *functionality state* relates to the facility's suitability to function as intended and required for the mission. The functionality state is distinct from, and determined independently from, the physical condition state. Condition-based metrics such as the Condition Index (CI) have been used by the Army for decades, but a companion index of functionality was not developed at the same time. However, in order to fully describe a building's fitness for changing missions over its entire life cycle, a quantitative and objective Functionality Index (FI) is needed.

**Building-level assessment.** Inappropriate building layout, poorly chosen materials or equipment, code violations, etc., interfere with a building's capability to support its mission requirements. Changes in functionality may be driven by factors such as changing user requirements, revised building codes, or growing obsolescence of materials and technology. For example, a motor pool facility may lose functionality upon the introduction of a new generation of vehicle that is much larger or heavier than previous versions. That functionality loss may be qualitatively described through the presence of characteristics that make a building less suitable for its mission than a new one specifically constructed for the same mission. A qualitative value for loss of function is established by identifying what percentage of the building does not suit the mission well and determining the degree of adverse impact created by those characteristics.

**Functionality categories and indexing.** A building-level functionality assessment and indexing approach captures both *qualitative* issues and *quantitative* functionality-loss metrics that affect facility performance. This approach considers 14 comprehensive functionality categories, listed below, that relate to user requirements, technical obsolescence, codes, laws, and regulations:


<i>Location</i> – suitability of building location to mission performance					
Building Size/Configuration – suitability of building size and layout for the mission					
Structural Adequacy – capability of structure to support seismic, wind, snow, and mission-related loads					
Access – capability of building to support entry, navigation, and egress as required by mission					
ADA – level of compliance with the American with Disabilities Act					
AT/FP – compliance with DoD antiterrorism/force protection requirements					
Building Services - suitability of power, plumbing, telecom, security, and fuel distribution systems					
<i>Comfort</i> – suitability of temperature, humidity, noise, and lighting for facility occupants					
Efficiency/Obsolescence - addresses energy efficiency, water conservation, and HVAC zoning issues					
Environmental/Life-Safety – addresses issues such as asbestos abatement, lead paint, air quality, fire protection					
Missing/Improper Components – availability and suitability of components necessary to support the mission					
Aesthetics – suitability of interior and exterior building appearance for the mission					
Maintainability – ease of maintenance for operational equipment					

Cultural Resources - historic significance and integrity issues that impact utilization and modernization

Report Documentation Page					Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.						
1. REPORT DATE JAN 2006				3. DATES COVERED		
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER		
Building-Level Functionality Assessment				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Engineer Research and Development Center Vicksburg, MS				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited						
13. SUPPLEMENTARY NOTES The original document contains color images.						
14. ABSTRACT						
15. SUBJECT TERMS						
16. SECURITY CLASSIFIC	17. LIMITATION OF	18. NUMBER	19a. NAME OF			
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	ABSTRACT SAR	OF PAGES 2	RESPONSIBLE PERSON	

Standard Form 298 (Rev. 8-98) Prescribed by ANSI Std Z39-18 Each top-level category includes subordinate topics that help to quantify functionality. To establish FI reference values for all topics under every category, facility management and technical experts were tasked to evaluate the functionality implications of various scenarios in terms of impact on mission and percentage of the facility negatively affected. The facility experts rated the functionality impacts of each scenario on a scale of 1 – 100 points similar to that used in condition indexing. The results of their work were aggregated and analyzed to develop a deduct rating curve for every issue covered under the 14 top-level functionality categories. When these deduct values are used in the field to develop a building functionality score, the resulting FI strongly reflects the objective expertise of experienced facility specialists. This new, objective functionality metric is a practical tool for evaluating the capabilities of a facility inventory to support both current and proposed future missions.

The FI also serves as an execution metric. The life-cycle functionality graph below shows how modernization requirements may be easily identified when the FI falls below a minimum threshold standard defined by policy and mission.

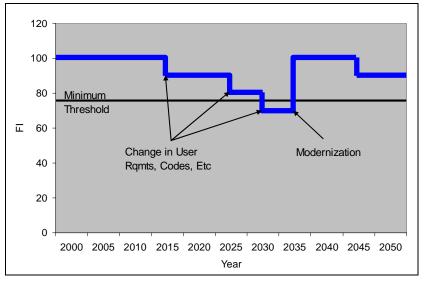

Functionality Index changes over a building's life cycle.

Benefits of the FI. Because the FI is based on objective expertise, it provides an impartial metric for justifying modernization needs. Used in conjunction with the CI, the FI can help decision-makers develop short- and long-range facility work plans based on sound investment strategies, mission priorities, and budget constraints. These tools can clarify the various implications of facility rehabilitation or reutilization versus demolition and new construction. The FI has been incorporated in the BUILDER<sup>™</sup> Engineered Management System, and both FI and CI data can be used in BUILDER<sup>™</sup> simulations to show the future impact of proposed sustainment, restoration, and modernization decisions. ERDC-CERL has applied for a U.S. patent on the Functionality Index and Assessment Process.

Points of Contact: Lance R. Marrano, Civil Engineer ERDC-CERL lance.r.marrano@erdc.usace.army.mil 217-373-4465

Michael N. Grussing, Civil Engineer ERDC-CERL michael.n.grussing@erdc.usace.army.mil 217-398-5307



US Army Corps of Engineers. Engineer Research and Development Center