



“3-DIMENSIONAL RETARDING WALLS AND FLOW IN THEIR VICINITY”

K. Atılgan TOKER

**Engineering Department, Internal Ballistic Group, Roketsan A. Ş.
Elmadağ, Ankara, Turkey**

M. Halûk AKSEL

**Middle East Technical University, Department of Mechanical Engineering
06531 Ankara, Turkey**

H. Tuğrul TINAZTEPE

**Engineering Department, Internal Ballistic Group, Roketsan A. Ş.
Elmadağ, Ankara, Turkey**

Report Documentation Page

*Form Approved
OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 22 JUN 2004	2. REPORT TYPE N/A	3. DATES COVERED -	
4. TITLE AND SUBTITLE 3-Dimensional Retarding Walls and Flow In Their Vicinity		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Engineering Department, Internal Ballistic Group, Roketsan A. &#350;, Elmada&#287;, Ankara, Turkey		8. PERFORMING ORGANIZATION REPORT NUMBER	
		10. SPONSOR/MONITOR'S ACRONYM(S)	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
		12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited	
13. SUPPLEMENTARY NOTES See also ADM001793, International Symposium on Energy Conversion Fundamentals Held in Istanbul, Turkey on 21-25 June 2005., The original document contains color images.			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	UU
			18. NUMBER OF PAGES 19
			19a. NAME OF RESPONSIBLE PERSON



Contents



- Introduction
 - Surface Regression
 - Interface Capturing
 - Flow Solvers
 - Test Cases
 - Conclusion
-



Introduction

Solid Rocket Motor (SRM) mission design requires the performance prediction of the motor until burnout.

The experimentation cost is very high due to manufacturing of SRM and due to the instrumentations required. Therefore before any product design is completed for experimentation, it should be investigated in details by [internal aerodynamic](#) solutions for minimum design correction.

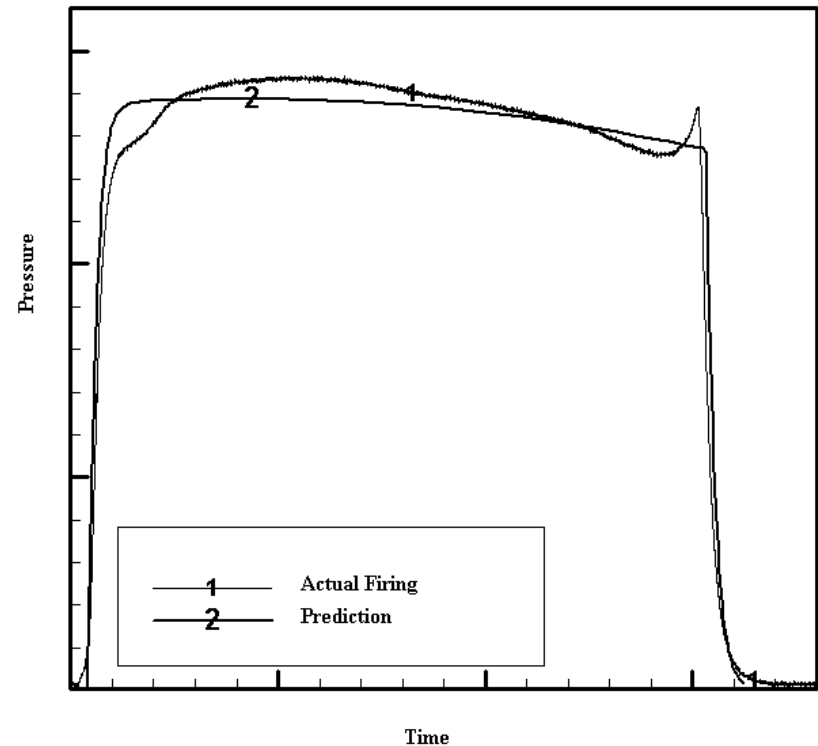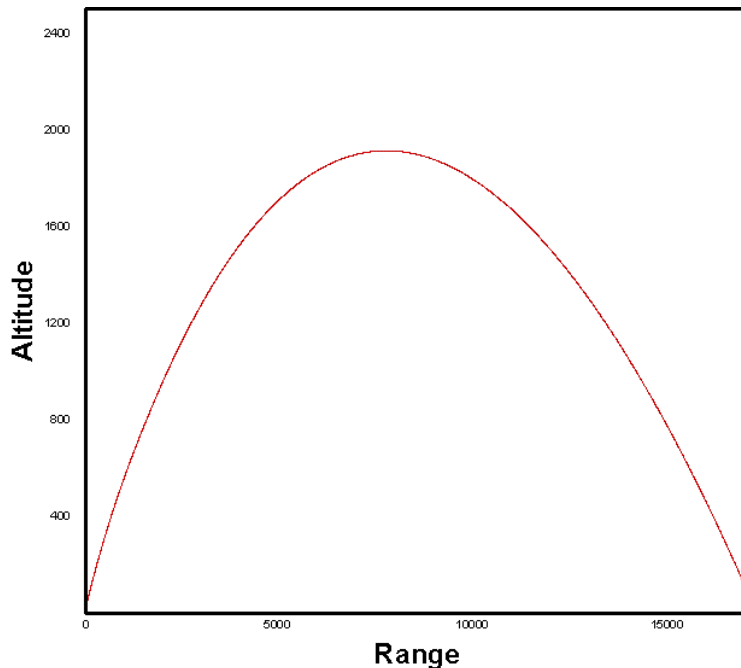


Introduction

The internal aerodynamic solution for SRM is complicated with nearly every aspect of Computational Fluid Dynamics' (CFD) topics. The full SRM solution requires:

1. High Speed Turbulence Modelling
2. Combustion
3. Two-phase Flows
4. Acoustics

In addition to complexity of physics, the control volume in which the flow solutions will be carried out is not constant.

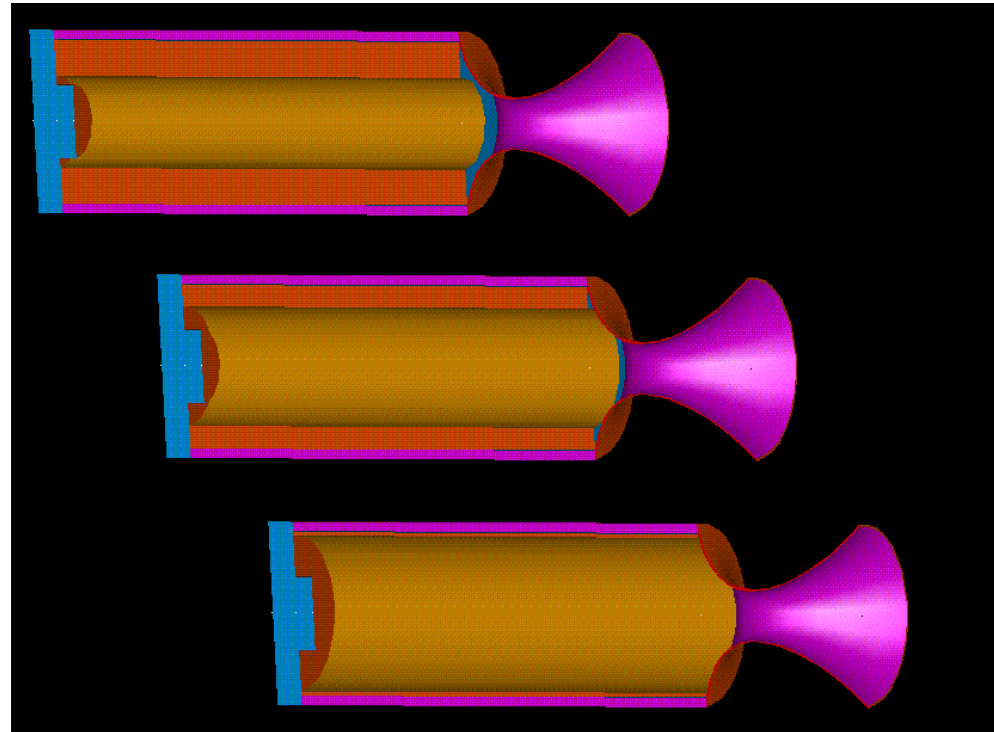

As the combustion continues the grain surface moves towards the propellant, thus increasing the flow volume. The CFD solutions require unsteady flow solutions.



Introduction



In this project the regression of combusting surface of solid propellant in rocket motors is investigated by using a fully 3-dimensional method which is called the “**Fast Marching Method (FMM)**”.

The FMM is capable of following the surface regression under local rate variations by itself. However the aim is to use a varying burn rate under the effects of pressure and velocity. Different flow solvers are coupled with the FMM.

At each time step the FMM will generate mesh files for the solver and obtain fluid properties and therefore the burn rate.

Surface Regression

The fluid-propellant interface moves in the normal direction to the surface. The speed of the motion is dependent upon the rate of burn of the propellant which is dependent upon the properties of the internal flow.

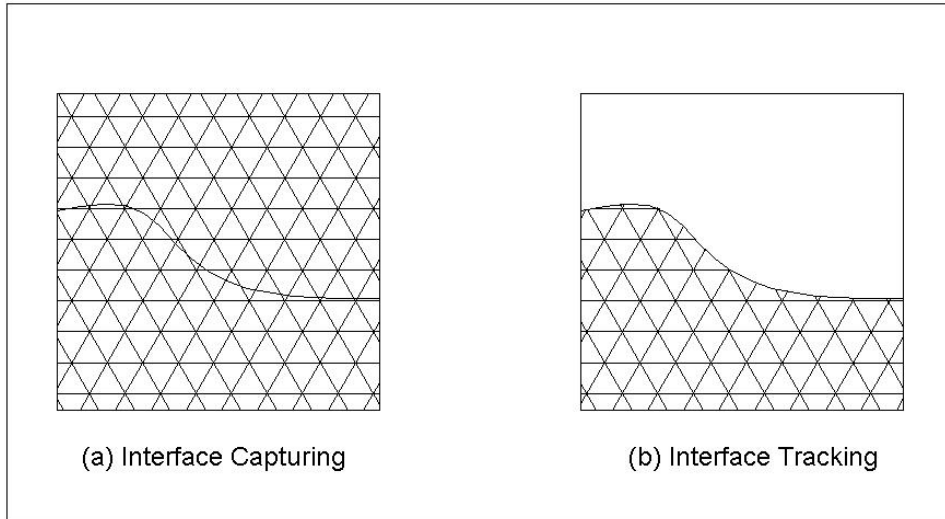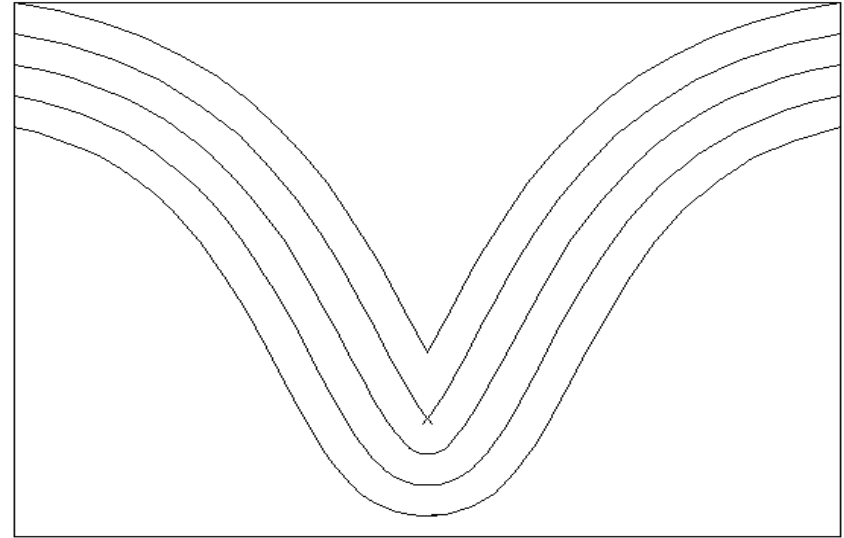

The interface can be located either by tracking the interface (Lagrangian) or by capturing (Eulerian) on stationary mesh. The FMM method is of Eulerian type.



Surface Regression

Fast Marching Methods (FMM) are numerical algorithms for solving the nonlinear Eikonal Equation on a Cartesian mesh.

$$\|\nabla u(x)\| = F(x) \quad \text{in } \Omega, \quad F(x) > 0 \quad \text{General Eikonal Equation}$$

$$u = g(x) \quad \text{on } \Gamma$$



$$\|\nabla T(x)\| = \frac{1}{r_b(x)} \quad \text{in } \Omega, \quad r_b(x) > 0 \quad \text{Our Form of Equation}$$

$$T = 0 \quad \text{on } \Gamma$$

where r_b is the burn rate and T is the time of arrival of the burn surface.




Surface Regression

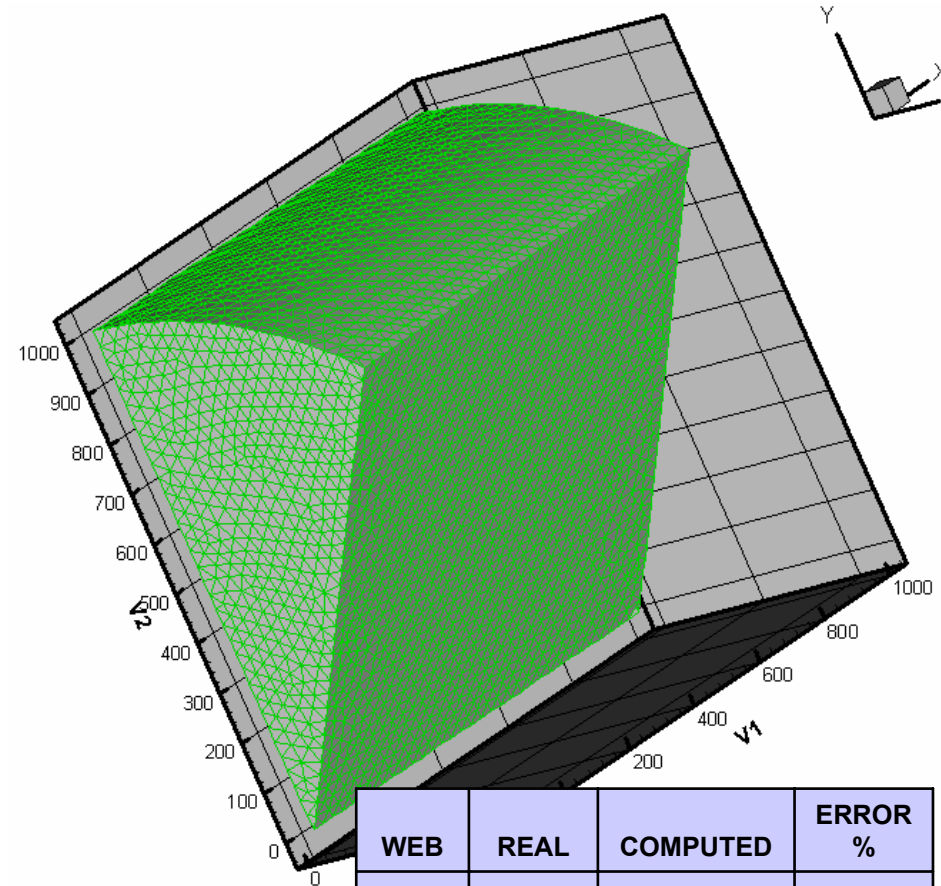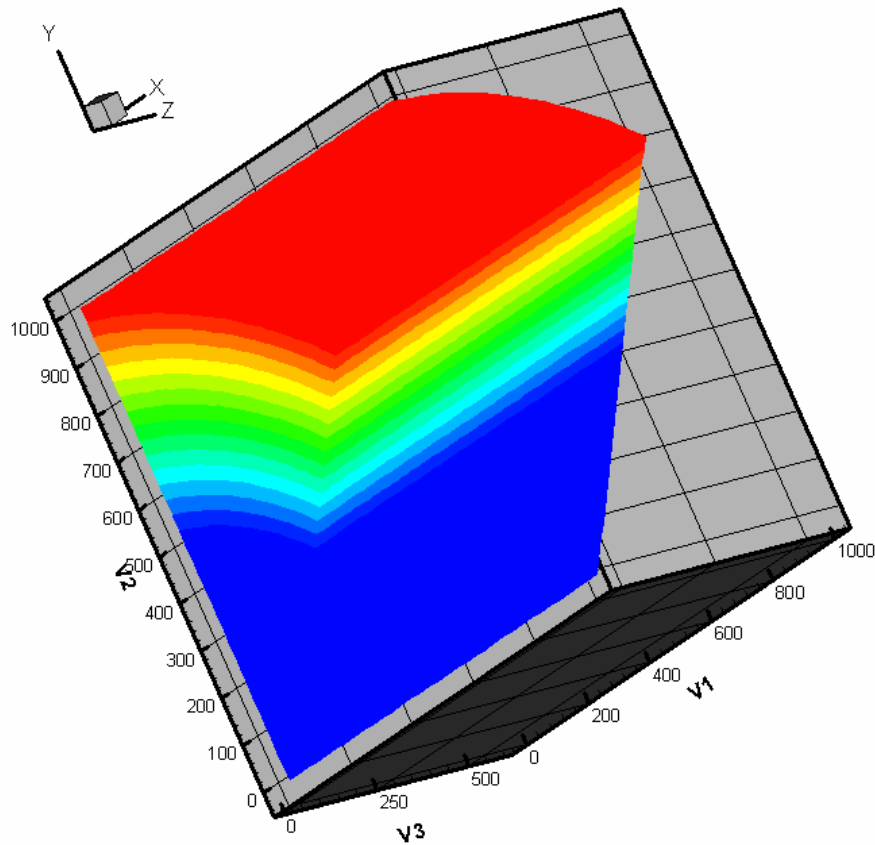


WEB	REAL	COMPUTED	ERROR %
100	376991	376959	0.00849
200	439822	439914	0.02092
300	502654	502795	0.02805
400	565486	565679	0.03413

Interface Capturing


1. T_0 is not inside the element.
2. $T_D > T_0 > T_C > T_B > T_A$ - The interface is a triangular element.
3. $T_D > T_C > T_0 > T_B > T_A$ - The interface is a quadrilateral element.
4. $T_D > T_C > T_B > T_0 > T_A$ - The interface is a triangular element.

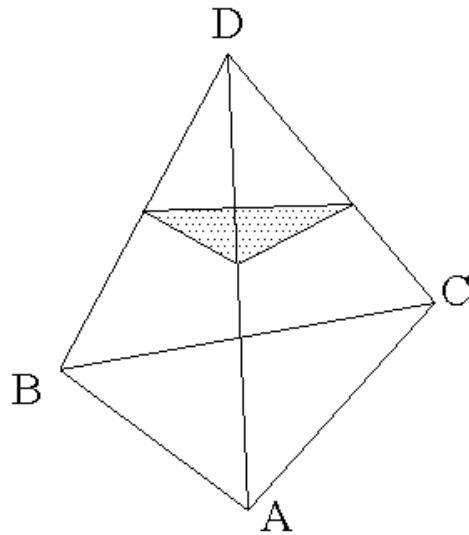

(a)

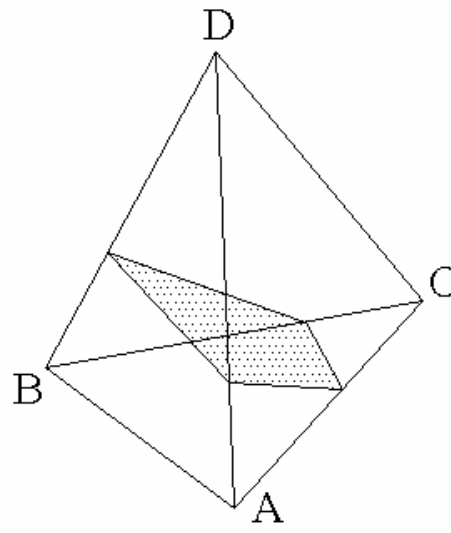

(b)

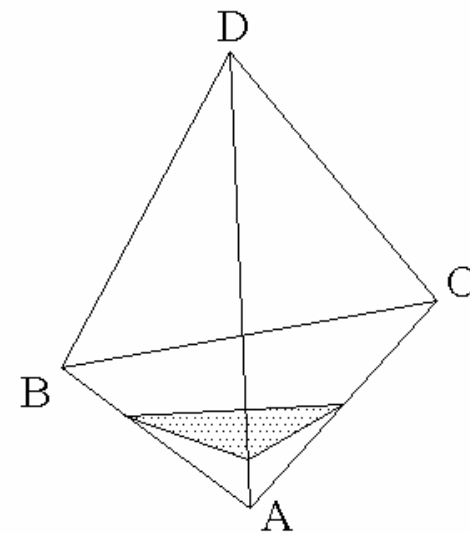

(c)



Interface Capturing

There are **five** choices at this instant how this captured interface will be used.

1. Find the interface area vs web and supply this data to 0-dimensional solver.
2. Find the interface perimeter at stations along the motor vs web and supply this data to 1-dimensional solver.
3. Capture the 3-dimensional mesh and leave the interface elements as they are and supply this mesh to 3-dimensional hybrid solver.
4. Capture the 3-dimensional mesh and at the interface insert new tetrahedron elements and supply this mesh to 3-dimensional tetrahedron solver.
5. Capture the 3-dimensional mesh and at the interface move inner nodes to the boundary and supply this mesh to 3-dimensional tetrahedron solver.




Flow Solver

3-D FLOW SOLVER

- Euler, Internal, Finite Volume Solver
- Hybrid Mesh
- Explicit, RK4
- 2nd order accurate in space.
- Calculation of Flux: Upwind, SW, WL, Roe
- Boundary Conditions: Mass flux inlet, pressure exit, wall, symmetry




Flow Solver

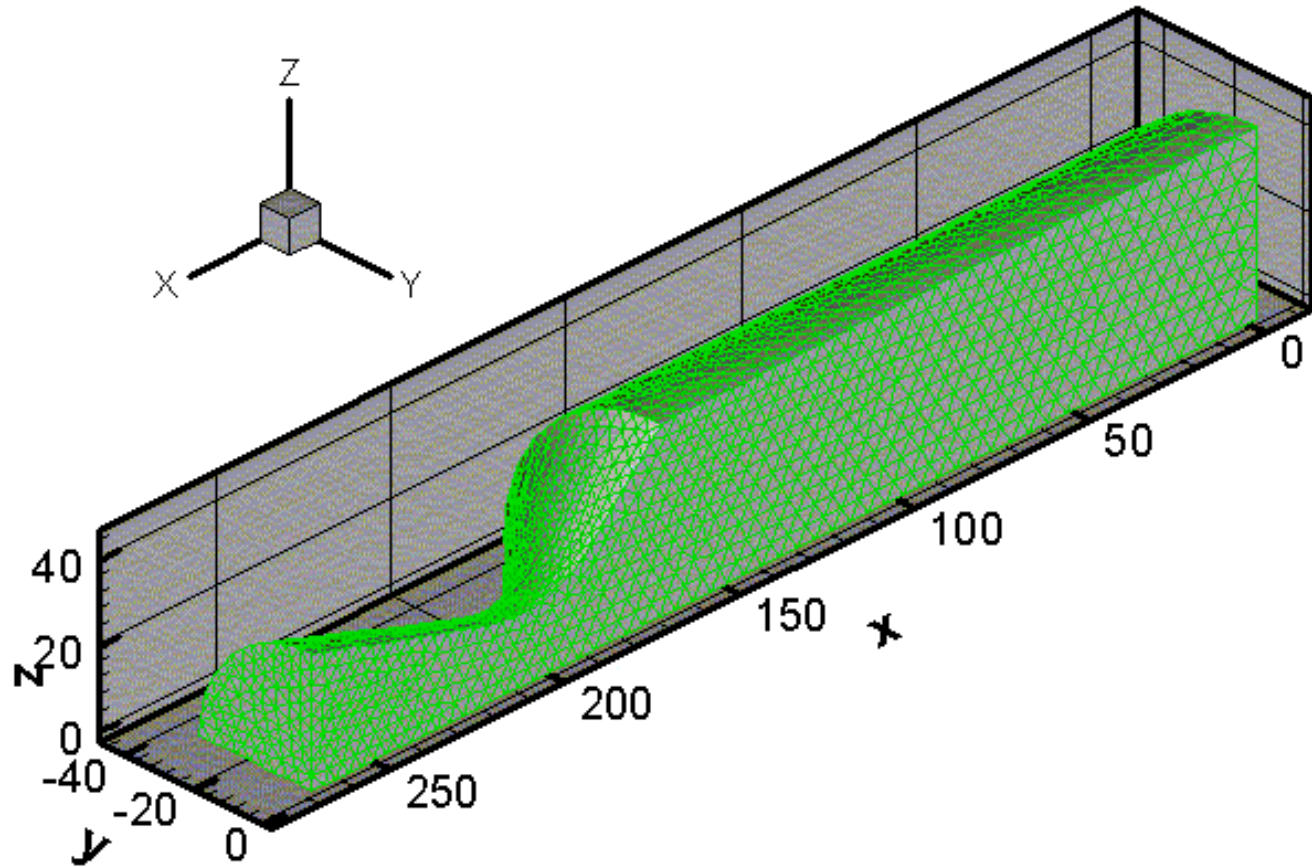




Flow Solver

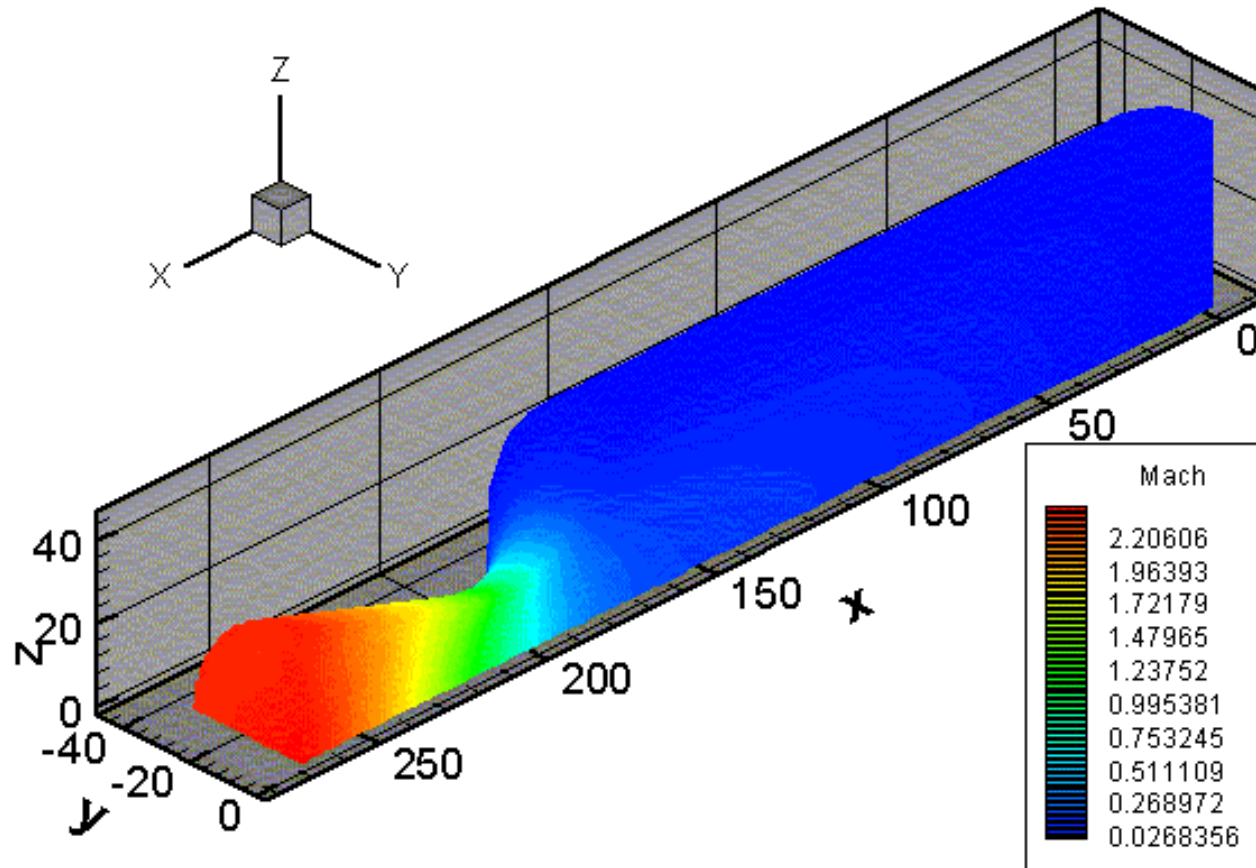




Flow Solver-3

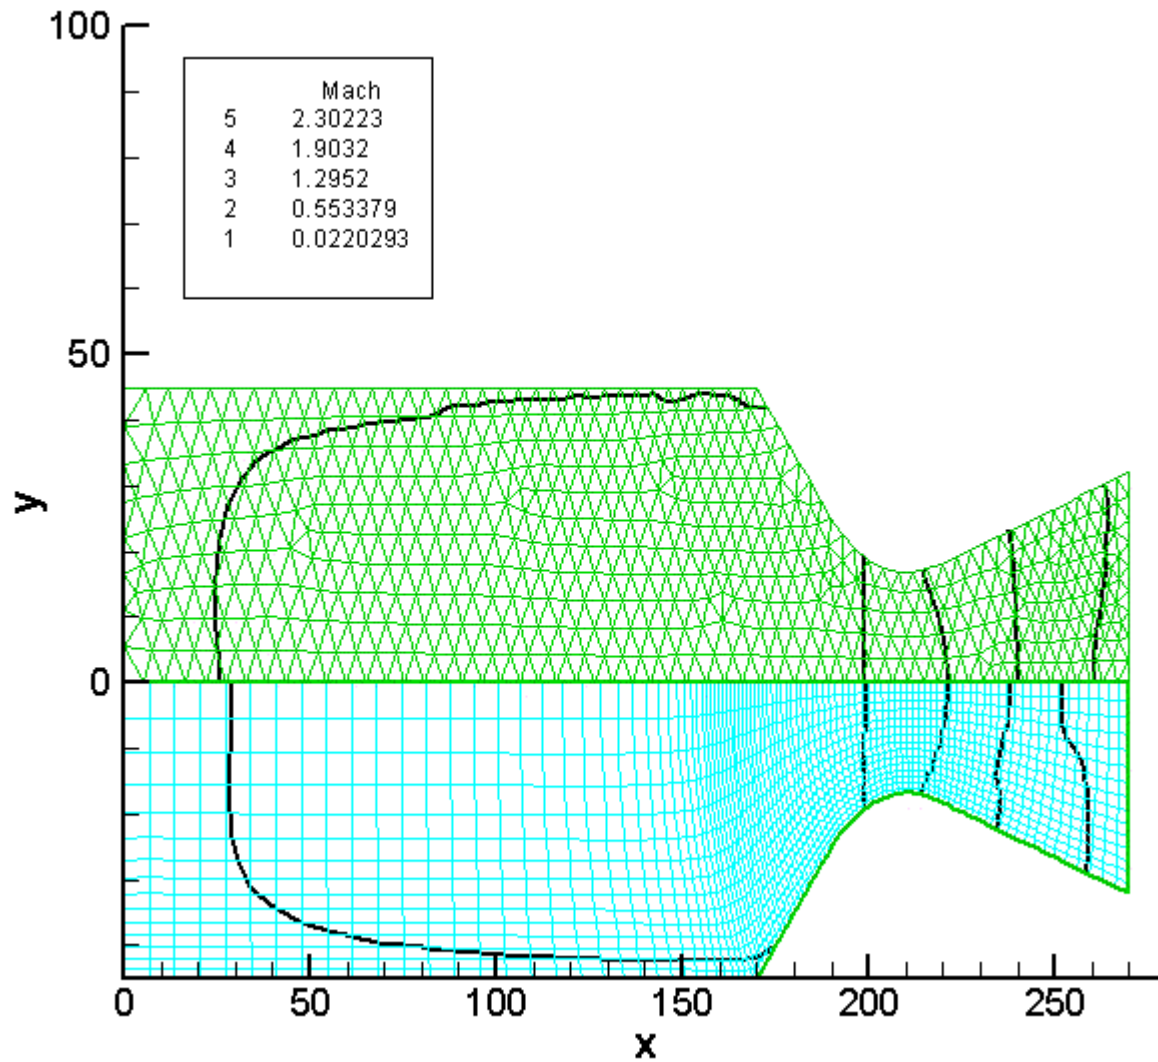





Test Case - 1

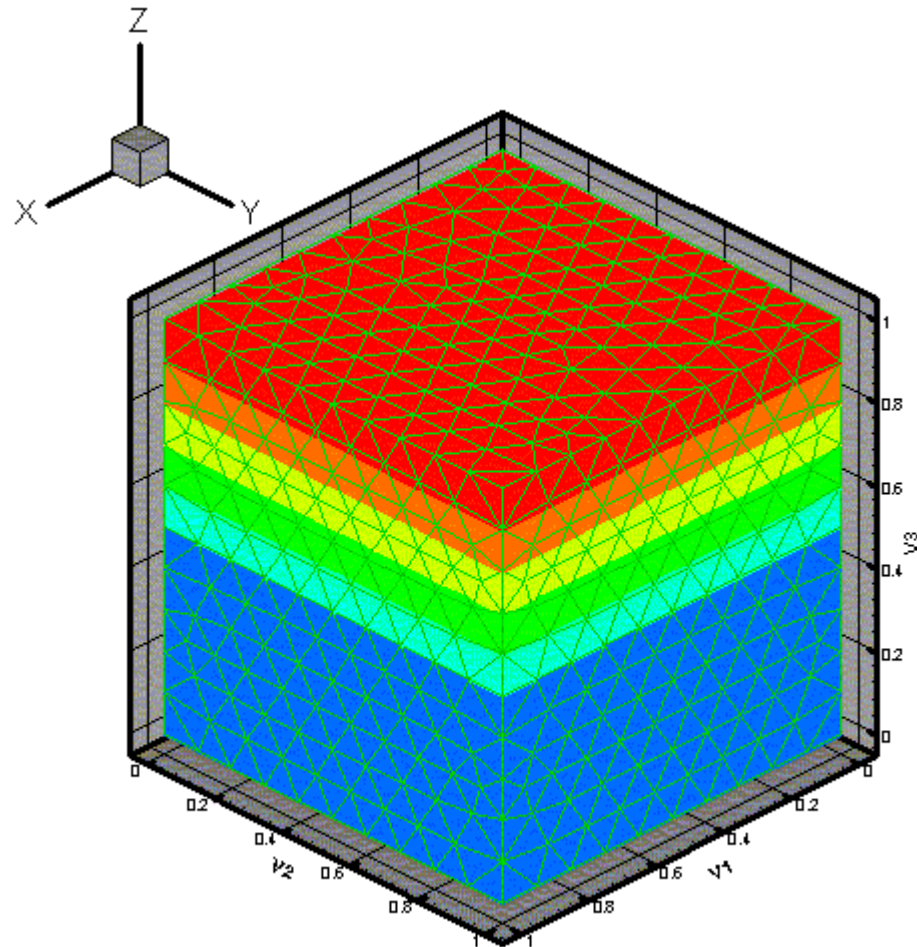


Test Case - 1

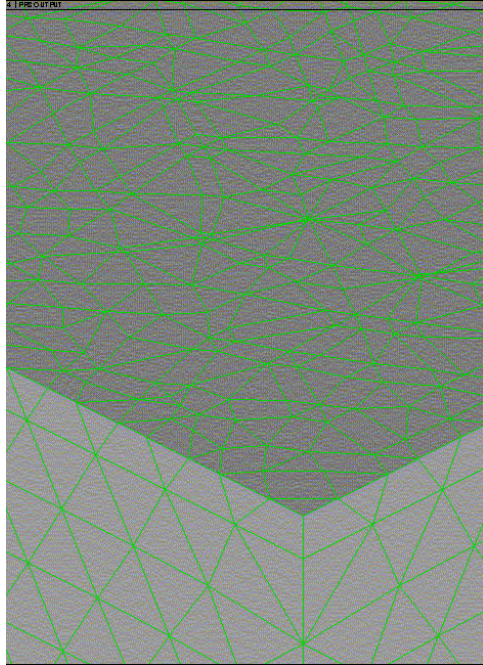

Hybrid Mesh

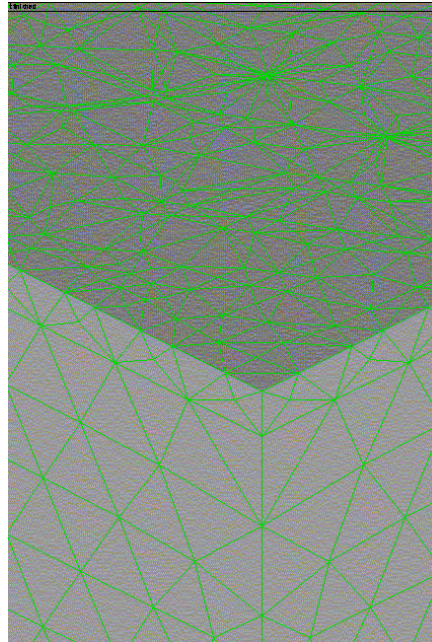

Sliced elements are converted
into Tetrahedrons

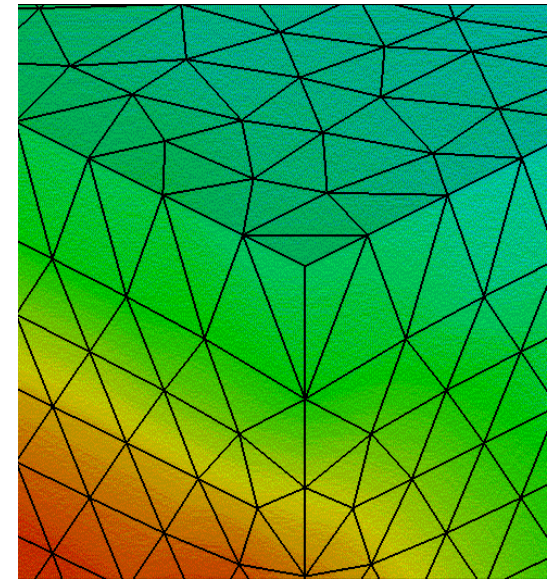



Moving inner nodes to interface




Test Case - 1

PR-5

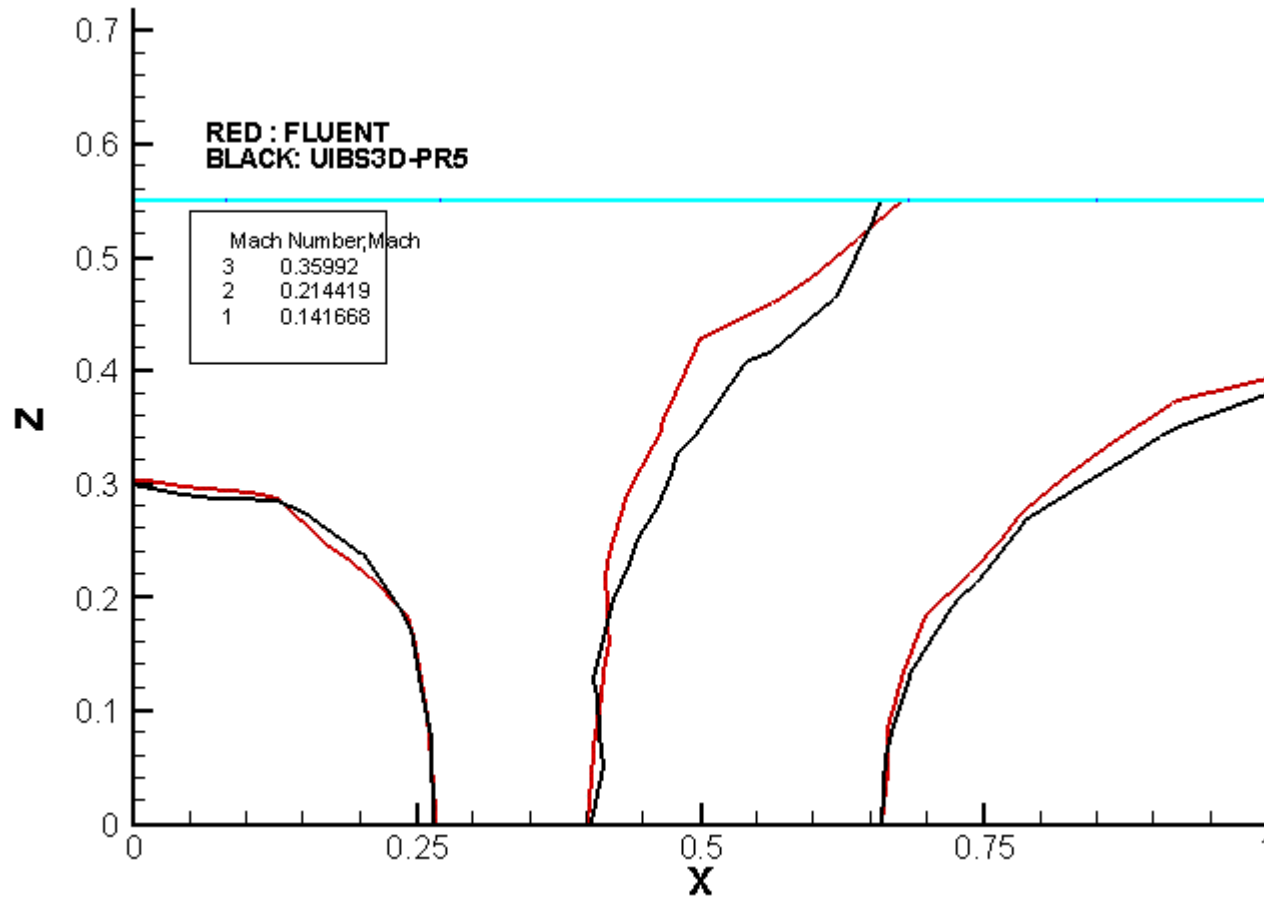

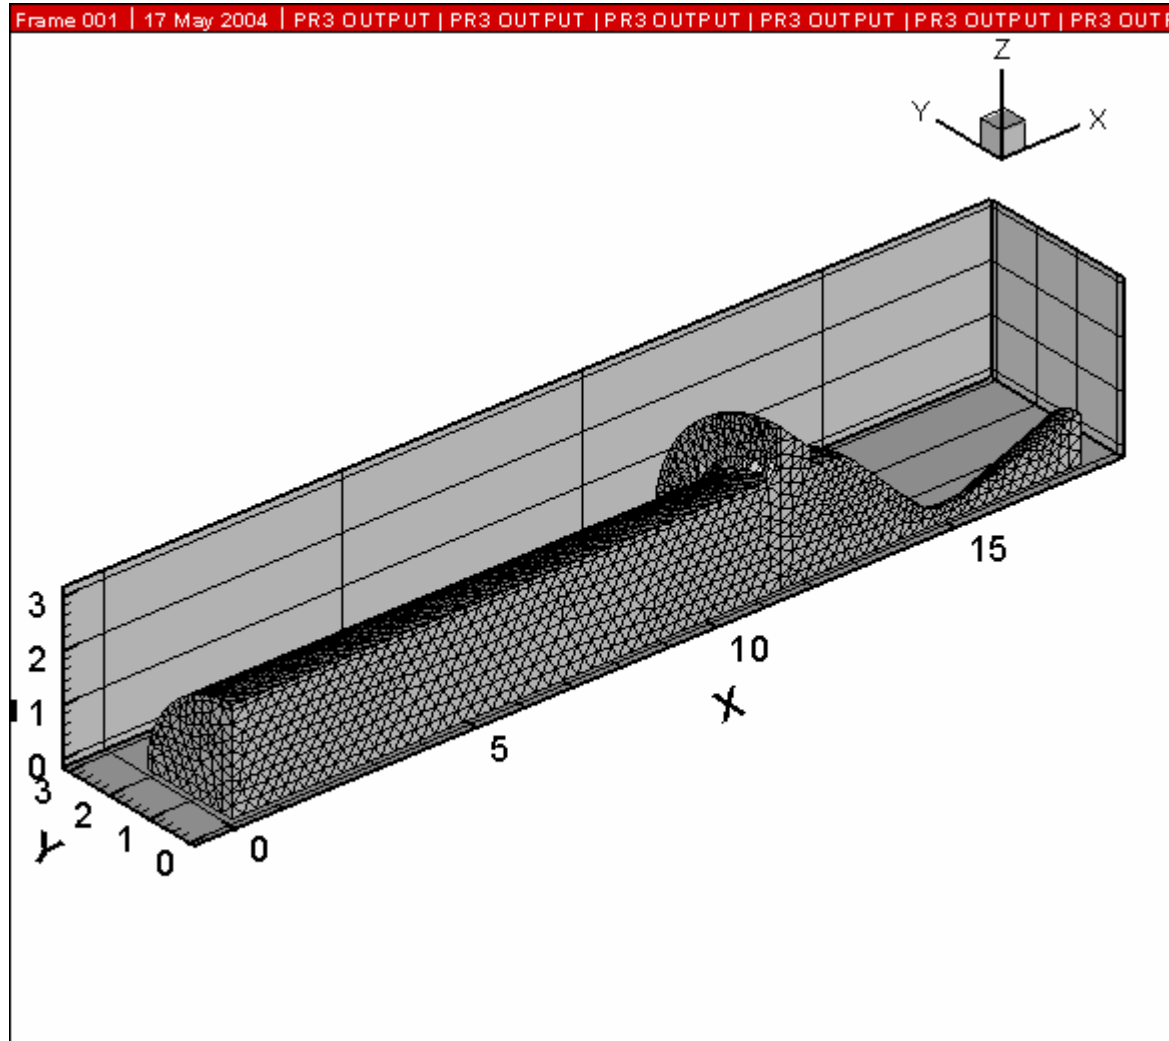

Test Case - 2

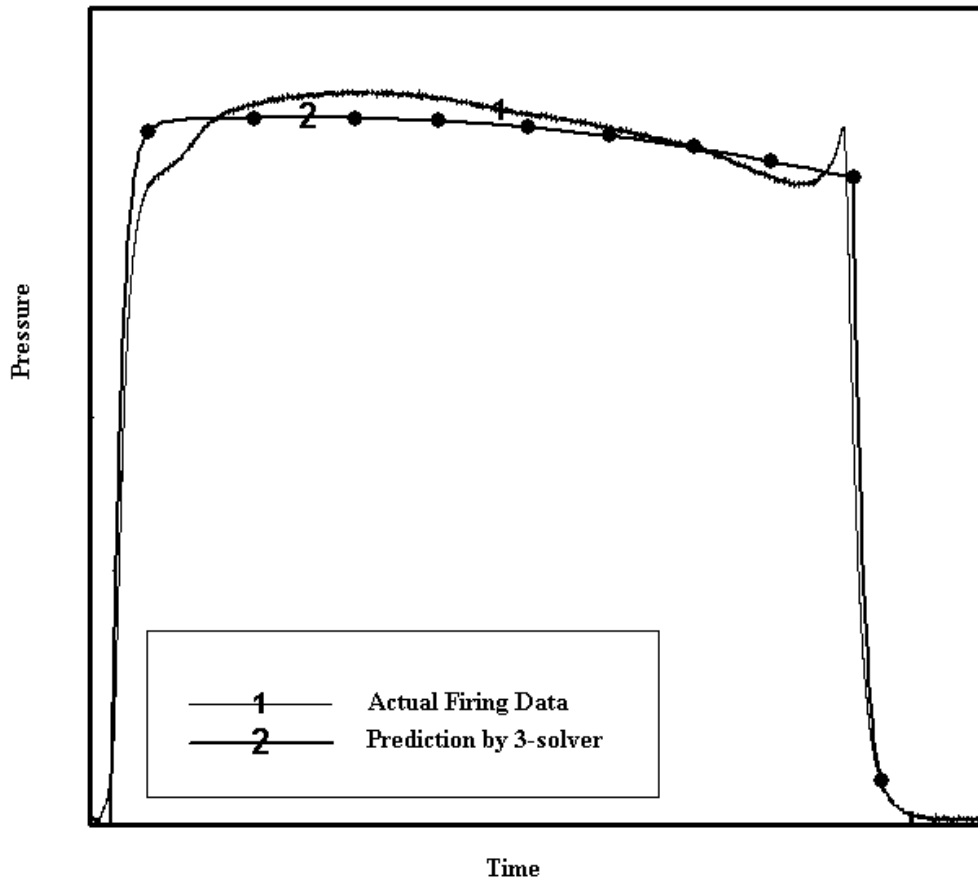

The results are obtained by constant propellant burn rate assuming inviscid ideal gas flow.