

Simultaneous Determination of Source Wavelet and
Velocity Profile Using Impulsive Point-Source
Reflections from a Layered Fluid¹

by

K. Bube², P. Lailly³, P. Sacks⁴,
F. Santosa⁵ and W.W. Symes⁶

Technical Report 87-17, June 1987

Acknowledgement. The initial work was carried out at Cornell University under the auspices of the SRO-III project on inverse problems sponsored by ONR. We are grateful to the directors of that project, Professors Y.-H. Pao and L. Payne, for their encouragement and support.

¹This research was supported by the Office of Naval Research under contracts N00014-83-K0051 and N00014-85-K0725, by National Science Foundation grants DMS-84-03148 and 86-03164 and by AFOSR 84-0252.

²Department of Mathematics, University of California, Los Angeles, California 90024, USA.

³Institut Francais du Petrol, B.P. 311, 92506 Rueil-Malmaison Cedex, France.

⁴Department of Mathematics, Iowa State University, Ames, IA 50011, USA.

⁵Department of Mathematical Sciences, University of Delaware, Newark, DE 19716, USA.

⁶Department of Mathematical Sciences, Rice University, Houston, TX 77251, USA.

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE JUN 1987	2. REPORT TYPE	3. DATES COVERED 00-00-1987 to 00-00-1987	
4. TITLE AND SUBTITLE Simultaneous Determination of Source Wavelet and Velocity Profile Using Impulsive Point-Source Reflections from a Layered Fluid		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Computational and Applied Mathematics Department ,Rice University,6100 Main Street MS 134,Houston,TX,77005-1892		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited			
13. SUPPLEMENTARY NOTES			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	
			18. NUMBER OF PAGES 44
			19a. NAME OF RESPONSIBLE PERSON

Abstract.

The determination of source signature is a major calibration problem in reflection seismology. This "deconvolution" problem is conventionally approached by way of statistical methods, by direct measurement, or by the location of a clean reflection in an otherwise quiet part of a reflection section. We show that a quasi-impulsive, isotropic point source may be recovered simultaneously with the velocity profile from reflection data over a layered fluid, in linear (perturbation) approximation. Our approach is completely deterministic, and does not depend on the presence of an isolated reflection in a quiet part of the section, as we illustrate with a numerical example. After describing the algorithm and a numerical implementation, we give a complete mathematical treatment, which shows that our estimates of source wavelet and velocity profile are stable in a certain sense. Because of this stability property we conjecture that our approach to simultaneous estimation of source and medium parameters actually applies to a much broader class of models than that treated here.

1. Introduction.

A major calibration problem in reflection seismology is that of source-signature identification. The seismic section depends not just on the mechanical structure of the earth, the elucidation of which is the aim of reflection seismology, but also on the time dependence and spatial distribution of the seismic energy source. The separation of these two factors (earth structure, energy source) is often regarded as a deconvolution problem ("source-signature deconvolution") and is commonly attacked with statistical tools (predictive deconvolution, ARMA modeling, maximum likelihood estimation), which aim simultaneously to suppress other sorts of seismic "noise" (notably multiple reflections). These widely-used methods have been criticized as being based on unwarranted assumptions about both source and earth structure (Ziolkowski, 1984). An alternate method of source calibration is actual measurement of the direct wave, or use of a strong reflection in an otherwise relatively quiet part of the section.

In this paper we investigate the possibility that the time-dependence of an isotropic point-source might be determined directly (and deterministically) from the section, even when no isolated reflection event can be located. In effect, we ask whether the source parameters can be determined simultaneously with the earth model. We show that, under some restrictions, the answer is "yes."

This possibility of codetermination of source and velocity arises from the different dependence of their data influence on offset: that is, the effects of changing the source wavelet, respectively the velocity structure, *move out and scale differently*. These effects may be separated algebraically; there results an equation linking the data section with the velocity, sampled at several different, but related, depths. The wavelet has been eliminated from this relation altogether. Once the velocity has been determined, the wavelet may be extracted easily. On the other hand, functional-delay equations, such as the one we derive here for the velocity, are not commonplace in the mathematics of seismology, and it is not entirely obvious that such equations can be solved in a reasonable sense. Accordingly we give a complete theoretical treatment, ensuring that solutions can be found computationally as well. We implement an algorithm based on our theoretical developments, and show by numerical illustration that wavelet and velocity may indeed be

separately determined even when their influence is coexistent in time.

To derive this result, we have imposed some hypotheses on both the earth model and the energy source. Those concerning the earth model are:

- (M1) that the earth structure varies only with depth (layered medium);
- (M2) that the earth is a linearly elastic fluid, with only the sound velocity varying with position (depth);
- (M3) that the variation of sound velocity with depth is somewhat smooth.

Concerning the source, we have assumed that

- (S1) the spatial distribution of the source is point-like, to adequate approximation;
- (S2) the source radiation pattern is isotropic, so that the source is described by a single function of time (wavelet);
- (S3) the source wavelet is quasi-impulsive, i.e. differs from the Dirac delta function by a square-integrable function.

None of these assumptions (with the possible exception of (S1)) is valid for an accurate model of the typical seismic reflection experiment: The earth is non-layered and inhomogeneous on interesting length scales and supports shear (as well as compressional) waves. Also the seismic source often has an anisotropic radiation pattern, and (most important) is bandlimited (not close to delta).

It seems clear that most of these assumptions could be relaxed, at least to some extent. The most important and involved step is the introduction of non-impulsive sources. It is plausible on the basis of velocity analysis (and is carefully justified on theoretical grounds in Santosa and Symes (1986)) that bandlimited point-source data (with known source) determine a layered velocity structure, provided that the target structure is sufficiently rich in reflectors (thus is sufficiently *non-smooth*). We expect to be able to combine these bandlimited inversion ideas with those presented in this paper to codetermine bandlimited sources as well. We will further discuss the

extent to which the restrictions M1-M3 and S1-S3 might be relaxed in the concluding section.

We note that Canadas and Kolb (1986) give numerical evidence that the velocity and source wavelet (and, to some extent, the density) of a layered fluid may be recovered from simulated seismic reflection data. They do not, however, give a theoretical justification for their procedure. Ramm (1987) has given a theoretical result for quasi-impulsive sources, which differs from ours in that it makes use of the low-frequency (rather than high-frequency) asymptotics of the response, hence is intrinsically restricted to the quasi-impulsive case.

The book by Lavrent'ev *et al.* (1986) has recently come to our attention (January 1988). In Section 2.2 the authors consider a problem similar to that studied here. Their work is similar to ours in that they also find that the recovery of first-order perturbations in medium and source parameters hinges on the solution of a multiplicative-delay equation like (3.2) below. It differs from ours in that they do not use the plane-wave decomposition, and restrict their attention to perturbations about a homogeneous background model.

The model described above is quantified in the following boundary value problem, connecting

$\rho(\mathbf{x})$	- fluid density
$\lambda(\mathbf{x})$	- bulk modulus
$\mathbf{u}(\mathbf{x}, t)$	- particle displacement field
$f(t)$	- source wavelet:

$$\rho(\mathbf{x}) \frac{\partial^2 \mathbf{u}}{\partial t^2}(\mathbf{x}, t) = \nabla(\lambda(\mathbf{x}) \nabla \cdot \mathbf{u}(\mathbf{x}, t))$$

$$\text{in } \{(\mathbf{x}, t): x_3 > 0\}$$

$$\lambda(\mathbf{x}) \nabla \cdot \mathbf{u}(\mathbf{x}, t) = -f(t) \delta(x_1, x_2)$$

$$\text{for } x_3 = 0$$

$$\mathbf{u}(\mathbf{x}, t) \equiv 0, \quad t \ll 0$$

We write $z = x_3$, and note that (M1) is stated $\rho = \rho(z)$, $\lambda = \lambda(z)$. We assume that $\lambda \equiv \text{const.}$, so that $c(z) = \lambda^{\frac{1}{2}} \rho(z)^{-\frac{1}{2}}$ parameterizes the medium (M2).

We remark that this is not a significant restriction: the problem of simultaneous determination of ρ and λ from known (and impulsive) source data is well understood (see e.g. Santosa and Symes (1987) and other work cited there). Extension of our present results to this more general

case is routine. We have chosen to present the result for $\lambda \equiv \text{const.}$ merely to avoid obscuring the novelty of the present paper with irrelevant complexities.

The hypothesis (S3) is that

$$f(t) = \delta(t) + f_1(t)$$

with f_1 square-integrable. Causality is expressed by the requirement that $f_1(t) = 0$, $t < 0$ and we also assume that $f_1(t) \equiv 0$, $t \geq t_{\max}$. Consequently, f defines an invertible convolution operator (on $L^2[0, T]$ for any $T > 0$).

We idealize the seismogram as the surface trace of the vertical displacement field $u = (u_x, u_y, u_z)$ viewed as a function of the velocity profile c and the wavelet f :

$$s[c, f] = u_z(z = 0).$$

We shall use the commonplace notation of $\delta(\cdot)$ to denote perturbations of (\cdot) ; the distinction from the Dirac delta function will be clear from the context in which it is used. Our main result concerns the *perturbational seismogram* $\delta s[c, f]$, which is the result of first-order perturbation of the velocity profile and source wavelet:

$$\delta s[c, f] = \delta u_z(z = 0)$$

where the perturbation field δu satisfies

$$\rho \frac{\partial^2 \delta u}{\partial t^2} = \nabla \nabla \cdot \delta u - \delta \rho \frac{\partial^2 u}{\partial t^2}$$

$$\nabla \cdot \delta u = -\delta f(t) \delta(x_1, x_2)$$

$$\delta u \equiv 0 \quad t \ll 0$$

and $\delta \rho = -2 \delta c \cdot c^{-3}$.

Our main result may be stated:

The velocity profile and source wavelet perturbations δc , δf are uniquely determined by the perturbational point-source seismogram δs , under hypotheses M1-M9 and S1-S9.

Note that we do *not* assume the presence of an isolated reflector. Thus the influences of δf and δc are coexistent in time. Nonetheless they can be recovered separately. In our view, it is this feature which makes the present result interesting despite the severe restrictions imposed on our model.

This result concerns the perturbational (“variable-background Born approximation”) problem. The technique is constructive, and estimates δc , δf in terms of δs . It seems clear that regularity results similar to those explained in Symes (1986b, c) could be combined with the conclusions presented here to yield unique determination of f and c from s . Such matters will be discussed elsewhere.

We begin the study of this problem by transforming the point-source seismogram to a plane-wave (p -tau) section, and determining its structure, in Section 2. We use this structural information in Section 3 to derive a constructive procedure for separate determination of source and velocity perturbations. We suggest numerical techniques for the solution of least-squares formulations of the inverse problems and present the results of numerical experiments based on one of the possible implementations, in Section 4. These experiments were performed by Paul Sacks at Iowa State University. Section 5 contains the proofs of the main mathematical result and of several technical lemmas needed in Section 3. We end the paper with a discussion of possibilities for relaxing the restrictions, and extending the scope, of our results (Section 6).

2. Structure of the Perturbational Seismogram.

Our main tool in this paper is the *plane-wave decomposition*: since the coefficients are independent of time and of the horizontal coordinates, the Radon integral

$$\iint dx dy u(x, y, z, t + p \cdot x)$$

produces for each p a field satisfying a system of partial differential equations in z, t . In fact, we are only interested in a finite depth interval $0 \leq z \leq z_{\max}$, so without loss of generality we assume that

$$0 < c_* \leq c(z) \leq c^*, \quad 0 \leq z$$

for suitable constants c_* , c^* . In Santosa and Symes (1985, Appendix) it is shown that for sufficiently small p , the plane-wave component of normal displacement

$$U(z, \tau, p) = \iint dx dy u_z(x, y, z, \tau + px)$$

solves the boundary value problem

$$\begin{aligned} (\rho - \lambda p^2) \frac{\partial^2 U}{\partial \tau^2} - \lambda \frac{\partial^2 U}{\partial z^2} &= 0 \\ -\lambda \frac{\partial U}{\partial z}(0, \tau, p) &= f(\tau) \\ U &\equiv 0, \quad \tau \ll 0. \end{aligned} \tag{2.1}$$

Recall that the wave velocity is given by $c(z) = \lambda^{\frac{1}{2}} \rho^{-\frac{1}{2}}(z)$. After normalization, we may assume for the rest of the paper that $\lambda \equiv 1$, so that the mechanics are described by c alone.

The equation (2.1) is hyperbolic only so long as $c|p| < 1$ (*precritical slowness*). We define

$$z_{\max}(p) = \sup\{z: c(z')p < 1 \text{ for } 0 \leq z' < z\}$$

and consider (2.1) and related equations only in the slab $\{(z, t): 0 \leq z < z_{\max}(p)\}$ for each p .

We note that the Radon transform integral given above must in general be modified by the introduction of a mute or cutoff for large but still precritical p . For a suitable choice of mute, the components still satisfy the plane-wave equation (2.1) up to an error which may be controlled by the techniques presented here: see Santosa and Symes (1987).

The plane-wave seismogram (p -tau section) S is the surface ($z = 0$) time history of the plane wave normal displacement fields

$$S[c, f](\tau, p) = U(0, \tau, p).$$

The topic of our paper is the “inverse” problem:

Given a measurement of G of plane-wave reflection data, find a velocity-source pair (c, f) for which

$$S[c, f](\tau, p) := U(0, \tau, p) = G(\tau, p).$$

This formulation supposes implicitly that the (τ, p) -pairs at which the data G is given are precritical for the sought velocity profile c , which presumption is itself a nonlinear constraint on c .

Now it is natural to think that any feasible measurement G would be contaminated by error, hence might not fit any model exactly. Accordingly, it is popular to replace the "exact inverse" problem above by a best-fit formulation. A common choice of error measure is the mean square, which leads to the least squares inverse problem:

Find c, f to minimize

$$\iint d\Omega(\tau, p) |S[c, f](\tau, p) - G(\tau, p)|^2$$

where $d\Omega$ is a measure (i.e. possibly nonuniform weight, continuous covariance matrix).

In this paper we shall limit our weights to those of the form

$$d\Omega(\tau, p) = d\tau d\mu(p).$$

Thus time points are uniformly weighted in each trace ($p = \text{const.}$), but we allow the traces to be weighted according to the measure $d\mu(p)$. For example, if $d\mu(p) = dp$, then all traces are uniformly weighted (over the domain of integration), whereas if $d\mu(p)$ is a finite sum of point masses, then the error measure above is concentrated on the corresponding finite set of traces.

The problem stated above is nonlinear. To begin our study in this paper we shall assume that the velocity is a sum of a (smooth, slowly varying) background velocity c and a (possibly rapidly varying) perturbation δc . We make a similar assumption concerning the source, i.e. that it is the sum of a background wavelet $f = \delta + f_1$, f_1 square-integrable, and a perturbation δf . We shall study the corresponding perturbation δS in the seismogram, which depends linearly on δc , δf .

Formally, to first order, the result of perturbing the velocity profile $c \leftarrow c + \delta c$ and the source wavelet $f \leftarrow f + \delta f$ is to perturb the plane-wave field U by a field δU satisfying

$$\begin{aligned} \left(\frac{1}{c^2} - p^2 \right) \frac{\partial^2 \delta U}{\partial \tau^2} - \frac{\partial^2 \delta U}{\partial z^2} &= \frac{2\delta c}{c^3} \frac{\partial^2 U}{\partial \tau^2} \\ - \frac{\partial \delta U}{\partial z}(0, \tau, p) &= \delta f(\tau) \\ \delta U &\equiv 0, \quad \tau < 0. \end{aligned} \tag{2.2}$$

The perturbational seismogram δS is the surface value of δU :

$$\delta S(\tau, p) = \delta U(0, \tau, p).$$

Presumably $S[c + \delta c, f + \delta f] \approx S[c, f] + \delta S$. Conditions under which this is true, i.e. δS is actually the derivative of S are discussed in Symes (1986a).

To understand the structure of the perturbational seismogram δS , we now introduce asymptotic approximations for the various fields. There will result an expansion of δS , which is of crucial importance to what follows.

As mentioned in the introduction, we consider in this paper only deconvolvable source wavelets f : that is, we assume that the convolution operator with kernel f has a bounded inverse on $L^2[0, T]$ for any $T > 0$. It is sufficient (but not necessary) that the Fourier transform $\hat{f}(\omega)$ have a uniformly bounded reciprocal. (Of course, we make no such restrictions on δf .) Since (with the obvious notation)

$$S_f = f * S_\delta$$

we could in principle apply the convolution inverse of f to the seismogram, and to the perturbational seismogram. This amounts to replacing δf by $(f^*)^{-1}\delta f$, and f by δ , in all of the above equations.

The field U is now the plane-wave impulse-response. As is well-known, this field possesses a progressing wave expansion: see Courant and Hilbert (1962, Chapter 6) for generalities and Symes (1981, Section 2) for computation of the present example. We obtain

$$U(z, \tau, p) = v(0, p)^{\frac{1}{2}} v(z, p)^{\frac{1}{2}} H(\tau - T(z, p)) + R(z, \tau, p) \tag{2.3}$$

where

$$v(z, p) = \frac{c(z)}{\sqrt{1 - c^2(z)p^2}}$$

is the plane-wave vertical wave velocity,

$$T(z, p) = \int_0^z \frac{dz'}{v(z', p)}$$

is the vertical travel time for the plane-wave at slowness p , H is the Heaviside unit step function, and R is a continuous remainder term. This expansion and others like it depend for their validity on the existence of sufficiently many derivatives of c , which we assume. See the concluding section for a little discussion of this point.

To derive the promised expansion of δS , first consider the case $\delta f \equiv 0$. Then a Green's identity argument, detailed in Santosa and Symes (1987, Section 5) results in the expansion, expressed in terms of $\gamma := \delta \log c = \delta c / c$

$$\delta S |_{\delta f=0}(\tau, p) = v(0, p) \{ (1 - c^2 p^2)^{-1} \gamma \} (Z(\tau, p)) + \mathbf{K}_c \gamma(\tau, p) \quad (2.4)$$

where $c_0 = c(0)$ and \mathbf{K}_c is an operator of Volterra type:

$$\mathbf{K}_c \gamma(\tau, p) = \int_0^{Z(\tau, p)} dz k_c(p, \tau, z) \gamma(z)$$

with continuous kernel k_c , and $Z(\tau, p)$ is the inverse of the two-way travel time:

$$z \equiv Z(2T(z, p), p).$$

On the other hand, a perturbation in $f (= \delta)$ gives the solution of the inhomogeneous problem

$$\left[\left(\frac{1}{c^2} - p^2 \right) \frac{\partial^2}{\partial \tau^2} - \frac{\partial^2}{\partial z^2} \right] \delta U = 0$$

$$\frac{\partial \delta U}{\partial z} \Big|_{z=0} = -\delta f$$

$$\delta U \equiv 0, \quad \tau < 0$$

which is in turn the convolution of δf with the solution of the same problem, but with δf replaced by (Dirac) δ . We recognize that the latter problem is identical to (2.1) with $f = -\delta$, so

$$\delta S |_{\delta c=0} = \delta f * U |_{z=0}.$$

Using the progressing wave expansion we see that this is proportional to the integrated wavelet

$$\phi(\tau) = \int_0^\tau \delta f$$

up to an error given by a Volterra operator on ϕ . Introducing the velocity trace

$$V(\tau, p) = \frac{\partial U}{\partial \tau}(0, \tau, p)$$

we can re-write the above relation as

$$\delta S |_{\delta c=0} = V * \phi \tag{2.5}$$

and $V(\tau, p) = v(0, p)\delta(\tau) + (\text{continuous error})$ is an invertible (on L^2) τ -convolution kernel, known from the reference seismogram.

Combining (2.5) and (2.4) we get

$$\delta S(\tau, p) = V^* \phi(\tau, p) - v(0, p)\{(1 - c^2 p^2)^{-1} \gamma\}(Z(\tau, p)) + \mathbf{K} \gamma(\tau, p). \tag{2.6}$$

Observe that V^* has a simple convolution inverse

$$V_1(\tau, p) = v(0, p)^{-1}\delta(\tau) + k_1(\tau, p),$$

where k_1 is continuous and causal for each p . We shall use this fact in the algorithm in Section 4.

3. Separation of Wavelet and Velocity Perturbations

It is evident from (2.6) that the p -dependence (“moveout” and scaling) of δf and δc , as they appear in δS , are different. In this section, we draw a consequence: that both δf and δc may be determined from δS .

We do not address the *quality* of this determination here, or even the precise conditions under which it holds. We want the reader to be aware of the limitations of such formal analysis: it gives no insight whatsoever into the effectiveness of any algorithms developed to exploit the theoretical observation. Such insight can only be gained by a rigorous (i.e. correct and complete)

analysis, which we give in Section 5.

In keeping with the formal approach of this section, we will drop all “Volterra” terms (i.e. \mathbb{K} in (2.6)) as negligible. The sense in which this is actually true is explained in Section 5.

Thus (2.6) becomes

$$\delta S \approx v(0, p) \left(\phi(\tau) - \left[(1 - c^2 p^2)^{-1} \gamma \right] \left(Z(\tau, p) \right) \right).$$

(Here we have used the remark at the end of Section 2, writing $V(\tau, p) \approx v(0, p) \delta(z)$.)

Thus, except for scale, ϕ appears without any p -dependence at all. Accordingly, form the auxiliary data set

$$\begin{aligned} G(\tau, p_1, p_2) &= v(0, p_1)^{-1} \delta S(\tau, p_1) - v(0, p_2)^{-1} \delta S(\tau, p_2) \\ &= \left[(1 - c^2 p_2^2)^{-1} \gamma \right] (Z(\tau, p_2)) - \left[(1 - c^2 p_1^2)^{-1} \gamma \right] (Z(\tau, p_1)). \end{aligned}$$

Suppose that $p_1 > p_2$. Then $v(z, p_1) > v(z, p_2)$ for all z , so the p_1 -wave reaches any given depth earlier than the p_2 -wave. Accordingly,

$$\alpha(z, p_1, p_2) := Z(2T(z, p_1), p_2) < z. \quad (3.1)$$

The transformed auxiliary data set

$$\tilde{G}(z, p_1, p_2) := (1 - c^2(z) p_1^2) G(2T(z, p_1), p_1, p_2)$$

is the left-hand side in the functional equation for γ :

$$\tilde{G}(z, p_1, p_2) = \gamma(z) + \beta(z, p_1, p_2) \gamma(\alpha(z, p_1, p_2)) \quad (3.2)$$

where

$$\beta(z, p_1, p_2) = (1 - c^2(z) p_1)(1 - c^2(\alpha(z, p_1, p_2))^2 p_2^2)^{-1}.$$

Because of the “delay” inequality (3.1), the equation (3.2) gives $\gamma(z)$, for any z , as a combination of the data \tilde{G} and the value of γ at some *shallower* $z' (< z)$. Thus it would seem reasonable that γ would be entirely determined if we know $\gamma(z)$ for some very shallow near surface layer $0 \leq z \leq z_*$, for then we could work our way downward, using (3.2) recursively, to obtain γ at any depth. Thus some restriction on the behaviour of γ near $z = 0$ would allow us to determine γ .

While this is true, it is unnecessary to restrict γ near the surface, because of the properties of the coefficients α and β . This result is somewhat technical, and will be given in detail in Section 5.

In sum, the functional equation (3.2) determines $\gamma(z)$ (without any restrictions). Then $\gamma(z)$ may be substituted in (2.6), which may then be solved for $\phi(\tau)$ (for any p). Thus both $\gamma(z)$ and $\phi(\tau)$ are determined.

In the next section, we consider the algorithmic implications of this observation.

4. Numerical Solution of the Inverse Problem.

In this section we show how the considerations of Section 3 yield an iterative algorithm for solution of the least-squares inverse problem in the (τ, p) domain, and discuss its implementation for a special case.

Thus we attempt to minimize, for a given (p, τ) data set g ,

$$J(c, f) := \|S(c, f) - g\|_{\mu}^2 = \int d\mu(p) \int_0^{T_{\max}(p)} d\tau |S - g|^2 \quad (4.1)$$

in the notation of Section 3. In fact, we assume here that on $T_{\max}(p) \equiv T$ and that the domain of integration consists of precritical (τ, p) pairs for all velocity profiles to be constructed during the iteration. This assumption *a priori* restricts the velocity profiles and allows us to use only a minimal set of "safely precritical" data. Obviously relaxation of these restrictions would be desirable. For some discussion see Santosa and Symes (1987), Sections 2 and 7.

From (2.6) we can write

$$DS [c, \delta](\delta c, \delta f) = \mathbf{E}(\phi, \gamma) + \mathbf{K}(\phi, \gamma) \quad (4.2)$$

where

$$DS [c, \delta](\delta f, \delta c) = \delta S$$

is the directional derivative of the seismogram S ,

$$\mathbf{E}(\phi, \gamma)(\tau, p) = v(0, p) \left\{ \phi(\tau) + \left[(1 - c^2 p^2)^{-1} \gamma \right] (Z(p, \tau)) \right\}$$

and \mathbf{K} is a Volterra-type integral operator with continuous kernel.

We shall suppose that the wavelet is a slowly-varying perturbation of δ :

$$f(\tau) = \delta(z) + f_1(z)$$

where $f_1(z)$ is square-integrable, as mentioned in the introduction. Thus the integrated wavelet ϕ is continuous for $\tau \geq 0$, and satisfies

$$\lim_{\tau \rightarrow 0^+} \phi(\tau) = 1.$$

Then, since

$$DS[c, f](\delta c, \delta f) = f * DS[c, \delta](\delta c, (f^*)^{-1} \delta f)$$

in fact $DS[c, f](\delta c, \delta f)$ is given by the same expression (4.2), where \mathbf{K} is modified to include convolution by the square-integrable part of f .

The Gauss-Newton method for minimizing $J(c, f)$ updates a current estimate (c_c, f_c) by solving a linear least-squares problem:

$$c_+ = c_c + \delta c, \quad f_+ = f_c + \delta f$$

where $(\delta c, \delta f)$ minimizes

$$\|DS[c_c, f_c](\delta c, \delta f) - (g - S[c_c, f_c])\|_{\mu}^2. \quad (4.3)$$

The minimizer of (4.3) satisfies the *normal equations*

$$\begin{aligned} DS[c_c, f_c]^* DS[c_c, f_c](\delta c, \delta f) \\ = DS[c_c, f_c]^*(g - S[c_c, f_c]) \end{aligned} \quad (4.4)$$

where DS^* is the *adjoint* of DS (regarded as a linear map acting on (ϕ, γ)) from $L^2[0, T] \times L^2[0, Z] \rightarrow L^2([0, T] \times \text{supp } d\mu, d\tau d\mu(p))$.

Since \mathbf{K} in (4.2) is Volterra, it represents a small perturbation if Z, T are small enough. This suggests replacing DS and DS^* in (4.4) with the simpler operators \mathbf{E} and \mathbf{E}^* , with the latter given by

$$\mathbf{E}'\Phi = (\mathbf{E}'_{\phi}\Phi, \mathbf{E}'_{\gamma}\Phi)$$

$$\mathbf{E}'_{\phi}\Phi(\tau) = \int d\mu(p) v(0,p) \Phi(\tau, p)$$

$$\mathbf{E}'_{\gamma}\Phi(z) = 2 \int d\mu(p) \frac{v(0,p)\Phi(2T(z,p), p)}{v(z,p)(1-c^2(z)p^2)}$$

It follows from the heuristics of Section 3 and the estimates in Section 5 that $\mathbf{E}'\mathbf{E}$ is invertible -- in fact positive definite -- and \mathbf{E} and \mathbf{E}' are easy to evaluate. Thus the modified normal equations

$$\mathbf{E}'\mathbf{E}(\phi, \gamma) = \mathbf{E}'(g - S[c, f_c]) \quad (4.5)$$

are uniquely solvable, and an iterative method like conjugate gradients should be quite efficient.

In rough outline, the resulting algorithm is: repeat until convergence

- (1) compute the seismogram $S[c, f]$;
- (2) solve the modified normal equations (4.5) for ϕ, γ ;
- (3) update $c \leftarrow ce^{\gamma}$, $f \leftarrow f + \phi$; go to (1)

Essentially the same approach (replace DS by \mathbf{E}) is used with success by Sacks and Santosa (1987) in recovering c alone (they consider the "consistent" case and solve a functional equation but the idea is very similar).

Since the replacement $DS \leftarrow \mathbf{E}$ involves only a small change for τ and z small, we would expect this algorithm to behave like the Gauss-Newton iteration near $\tau = z = 0$. The estimates of Section 3, which show that DS is bounded below, would suffice to show that the Gauss-Newton algorithm is convergent if S were differentiable. Unfortunately, differentiability of S requires more constraints on c than we have included here -- essentially, c must be relatively smooth. The reasons for this, and a convergence-inducing regularization of the least-squares problem, are discussed in Symes (1986c). Granted that this regularization has been implemented, either by restricting the class of admissible c 's or by adding a penalty term to J , Gauss-Newton will converge and thus so will the modified algorithm given above.

We will now consider a special case of this procedure. More general examples will be explored elsewhere.

We take (for $p_1 > p_2 \geq 0$)

$$d\mu(p) = \delta(p - p_1) + \delta(p - p_2)$$

which amounts to choosing for our data exactly two plane-wave traces. Now we should have “just enough” data to solve the problem: two time series to determine two time series. In fact, a minor modification of the discussion of Section 3 leads to the conclusion that, for appropriate z and τ intervals, the mapping

$$\begin{pmatrix} \phi \\ \gamma \end{pmatrix} \mapsto \begin{pmatrix} \mathbf{E}(\phi, \gamma)(p_1, \cdot) \\ \mathbf{E}(\phi, \gamma)(p_2, \cdot) \end{pmatrix}$$

is invertible (as is the analogous map with \mathbf{E} replaced by $DS[c, f]$). It follows that \mathbf{E}^* is invertible as well, so the modified normal equations (4.5) are (in this special case) equivalent to

$$\mathbf{E}(\phi, \gamma) = g - S[c, f] \quad (4.6)$$

which is an approximation to

$$DS[c, f](\delta c, \delta f) = g - S[c, f]. \quad (4.7a)$$

Now (4.7) defines the Newton update for the functional equation

$$S[c, f] = g \quad (4.7b)$$

so we would expect iterative use of (4.6) to yield an approximate solution of this functional equation, rather than merely a least-squares solution. This is precisely the analogue of the algorithm presented in Sacks and Santosa (1986).

The prescription for solving (4.6) is actually given in Sections 3 and 5; in outline, repeat until convergence the following steps:

- (i) Create the auxiliary data set

$$G(\tau) = V_1 * (g - S[c, f])(\tau, p_1) - V_1 * (g - S[c, f])(\tau, p_2) \quad (4.8a)$$

where V_1 is the convolution inverse of the (current) velocity trace;

- (ii) Create the auxiliary data set

$$\tilde{G}(z) = (1 - c(z)^2 p_1^2) G(2T(z, p_1));$$

- (iii) Solve for γ the functional equation

$$\tilde{G}(z) = \gamma(z) + \beta(z) \gamma(\alpha(z)) =: (\mathbb{I} + \mathbb{II}) \gamma(z) \quad (4.8b)$$

where

$$\alpha(z) = Z(2T(z, p_1), p_2) \quad (4.9)$$

$$\beta(z) = \frac{1 - c(z)^2 p_1^2}{1 - c^2(\alpha(z)) p_2^2}$$

using the Neumann series

$$(\mathbb{I} + \mathbb{II})^{-1} \simeq \sum_{n=0}^{\infty} (-\mathbb{II})^n \quad (4.10)$$

the convergence of which is guaranteed by the properties of α and β and by Lemma 1 of Section 5.

- (iv) Compute ϕ from the relation

$$\begin{aligned} V_1 * \left\{ (g - S[c, f])(\tau, p_1) v(0, p) \left[(1 - c^2 p_1^2)^{-1} \gamma \right] (Z(\tau, p_1)) \right\} \\ = \phi(\tau); \end{aligned}$$

- (v) Update c and f :

$$c \leftarrow c e^\gamma$$

$$f \leftarrow f + \phi'.$$

Remark. These steps may be simplified further by noticing that $V_1(\tau, p) = v(0, p)^{-1} \delta(\tau) + k_1(\tau, p)$, as noted earlier, so that the convolution $V_1 *$ may be replaced by multiplication with $v(0, p)^{-1}$ at the cost of another (“Volterra”) error of the type we are already ignoring. This was also done in Section 3.

We have implemented a single step of this procedure. We compute the plane-wave seismogram $S[c, f]$ using a standard leapfrog finite-difference method, applied to the first-order system

equivalent to the wave equation, in which the velocity is one of the dependent variables. These and other functions were represented by grid-functions on suitable space-time grids.

To obtain the unknown $\delta c(z)$ we must compute the function $\tilde{G}(z)$, defined in (4.8a, b), then evaluate the series (4.10). The compositions with travel-time, and with the depth change-of-coordinates (4.9), are computed using piecewise linear interpolation, the accuracy of which is compatible with that of the difference scheme. We replaced convolution with V by its discrete version:

$$(V * \phi)(\tau_j) \sim \sum_i \Delta\tau V_{j-i} \phi_i$$

and deconvolution by V (i.e. convolution with V_1) with the solution of this triangular system by back-substitution.

A synthetic example of this procedure is presented in Figures 1-5. Figure 1 shows the reference velocity c and the velocity to be recovered $c + \delta c$, and Figure 2 shows the corresponding reference and perturbed wavelets. for the two slownesses we chose $p_2 = 0$ and $p_1 = .4$. In Figure 3 we show $S[c, f](\tau, p_i)$, $i = 1, 2$ and $g(\tau, p_i) = S[c + \delta c, f + \delta f](\tau, p_i)$, $i = 1, 2$.

The velocity perturbation δc is computed as discussed above; it was necessary to use three terms in the series (4.10). The resulting estimate of $c + \delta c$ is displayed in Figure 4, along with the exact velocity profile. Finally, the exact and recovered wavelets are shown in Figure 5.

We emphasize that this example illustrates our contention that the source wavelet (perturbation) may be recovered even without the presence of a strong, clean reflection in an otherwise quiet part of the section. In this example, the perturbations δc and δf yield trace perturbations δs which are completely time-coincident.

Note that in the interesting special case that $c(z) \equiv 1$, $f(t) = \delta(t)$, the above procedure simplifies substantially, since $S[c, f]$ can then be computed exactly.

Since this procedure approximates one step of Newton's method for the functional equation (4.7b), we would expect the accuracy to degrade as δc becomes larger. To illustrate this degradation, we show in Figure 6 the perturbed surface traces $S[c + \delta c, f + \delta f]$ for $p_2 = 0$, $p_1 = .4$ and for δc and δf representing 1% of the "energy" (L^2 -norm) of c and f . The recovered wavelets and

velocity are compared with the targets in Figures 7 and 8. Figures 9, 10, and 11 repeat this comparison for 10% perturbations δc and δf .

5. Estimation of the Wavelet and Velocity Perturbations.

Our aim in this section is to show that the differential section δS dominates the perturbations $\gamma = \delta \log c$ and $\phi = \int \delta f$:

$$\|\phi\|^2 + \|\gamma\|^2 \leq C \|\delta S\|^2$$

where the vertical bars denote appropriate L^2 -norms. Such estimates are necessary to ensure stable linear estimation of δc and δf , and also form the heart of the construction of nonlinear least-squares estimators for c and f .

Our derivation will be constructive, and will justify a computational technique which we explored in the last section, as well as the heuristics of Section 3.

Recall that

$$V_1(\tau, p) = \frac{1}{v(0, p)} \delta(\tau) + k_1(\tau, p)$$

is the convolutional inverse of $V(\tau, p)$, with k_1 continuous and causal. From the structure of V_1 , and the expansion for δS in (2.6), the auxiliary data (Section 3) must have the form

$$\begin{aligned} G(\tau, p_1, p_2) = & (1 - c^2 p_1)^{-1} \gamma(Z(\tau, p_1)) \\ & - (1 - c^2 p_2)^{-1} \gamma(Z(\tau, p_2)) + \mathbf{K}_1 \gamma(\tau, p_1, p_2), \end{aligned} \quad (5.1)$$

where \mathbf{K}_1 is an integral operator with piecewise continuous kernel $k_1(p_1, p_2, \tau, z)$ supported in $\{0 \leq z \leq \max(Z(\tau, p_1), Z(\tau, p_2))\}$. This last term was dropped in Section 3.

We have already indicated that when $p_1 > p_2$,

$$\alpha(z, p_1, p_2) = Z(2T(z, p_1), p_2) < z.$$

We will now quantify this inequality.

The quantity $\alpha(z, p_1, p_2)$ is crucial to the argument which follows: it gives the depth reached by a wave traveling at the slower wave speed $v(\cdot, p_2)$ in the two-way time taken by a wave traveling at the faster wave speed $v(\cdot, p_1)$ to reach depth z . thus it represents the "spatial delay" caused by replacing the (faster) $v(\cdot, p_1)$ by the (slower) $v(\cdot, p_2)$. We shall assume that we consider only pairs (τ, p) for which $z = Z(\tau, p)$ satisfies

$$\frac{1}{c^2(z')} - p^2 \geq \Delta^2 \quad \text{for } 0 \leq z' \leq z \quad (5.2)$$

for some fixed $\Delta > 0$. Denote by $z_{\max}(p)$ the largest z for which (5.2) holds.

To take into account the possibly finite duration of the p - τ traces ($0 \leq \tau \leq T_{\max}(p)$), set

$$z_{\max}(p) = \min(\bar{z}_{\max}(p), Z(T_{\max}(p), p)).$$

(Note that $\bar{z}_{\max}(p) = \infty$, for instance, for $p = 0$, if c is bounded on $0 \leq z < \infty$ and $T_{\max}(0) = \infty$).

Correspondingly, set

$$\tau_{\max}(p) = 2 T(z_{\max}(p), p).$$

Then for $0 \leq z < z_{\max}(p)$ a little algebra yields

$$T(z, p_2) \geq \left(1 + \frac{c_*^2}{2} (p_1^2 - p_2^2)\right) T(z, p_1),$$

whence

$$\begin{aligned} z - Z(2T(z, p_1), p_2) &\geq c_* \left[T(z, p_2) - T(z, p_1) \right] \\ &\geq \frac{c_*^3}{2} (p_1^2 - p_2^2) T(z, p_1) \\ &\geq \frac{c_*^3 \Delta}{2} (p_1^2 - p_2^2) z. \end{aligned}$$

Thus

$$\alpha(z, p_1, p_2) \leq \alpha^* (p_1, p_2) z \quad (5.3)$$

with $\alpha^* = 1 - \frac{1}{4} c_*^3 \Delta (p_1^2 - p_2^2) < 1$. Similarly, it is easy to see that $\alpha' \geq \alpha_* > 0$ for some α_*

independent of z, p .

Recall the definition of $\tilde{G}(z, p_1, p_2)$ and its representation (3.2):

$$\begin{aligned}\tilde{G}(z, p_1, p_2) &= (1 - c^2(z)p_1^2) G(2T(z, p_1), p_1, p_2) \\ &= \gamma(z) + \beta(z, p_1, p_2) \gamma(\alpha(z, p_1, p_2)) + \mathbf{K}_2 \gamma(z, p_1, p_2)\end{aligned}\quad (5.4)$$

where \mathbf{K}_2 is another integral operator with piecewise continuous kernel $k_2(p_1, p_2, z, z')$ supported in $\{0 \leq z' \leq z\}$, and

$$\beta(z, p_1, p_2) = (1 - c^2(z)p_1^2)(1 - c^2(\alpha(z, p_1, p_2))p_2^2)^{-1}.$$

(Thus (5.4) is the precise statement of which (3.2) is an approximation.) Note that

$$\beta(0, p_1, p_2) = \frac{1 - c^2(0)p_1^2}{1 - c^2(0)p_2^2} < 1. \quad (5.5)$$

Now it follows from (5.3), (5.4), (5.5) and Lemma 3 below that

$$\begin{aligned}\|\gamma\|_{L^2[0, z_{\max}(p_1)]} &\leq C_1 \|\tilde{G}(\cdot, p_1, p_2)\|_{L^2[0, z_{\max}(p_1)]} \\ &\leq C_2 \|G(\cdot, p_1, p_2)\|_{L^2[0, r_{\max}(p_1)]} \\ &\leq C_3 \{ \|\delta S(\cdot, p_1)\|_{L^2[0, r_{\max}(p_1)]} \\ &\quad + \|\delta S(\cdot, p_2)\|_{L^2[0, r_{\max}(p_2)]} \}.\end{aligned}\quad (5.6)$$

From the foregoing calculations and the statement of Lemma 3, the constants C_1, C_2, C_3 evidently depend on c_* , Δ , and $p_1^2 - p_2^2 > 0$.

To express the dependence of δc and δf on the entire precritical p -tau section, choose a positive measure $d\mu$ and set

$$\|\delta S\|_{\mu}^2 = \int_0^{p_{\max}} d\mu(p) \int_0^{\tau_{\max}(p)} d\tau |\delta S(\tau, p)|^2.$$

Thus $\|\cdot\|_{\mu}^2$ is a weighted mean-square error measure. For example, if we choose $d\mu(p) = dp$ (Lebesgue measure), the all p -tau traces are weighted uniformly, whereas choosing $d\mu(p)$ to be a linear combination of point masses has the effect of selecting a discrete set of slownesses.

Now suppose that for some $\epsilon > 0$,

$$\{(p_1, p_2): |p_1 - p_2| \geq \epsilon\} \cap (\text{supp } d\mu \times \text{supp } d\mu) \neq \emptyset.$$

Let $p_{\min} = \inf\{|p| : p, p + \epsilon \in \text{supp } \mu\}$. Then from (3.6) follows immediately the estimate

$$\begin{aligned} & \|\gamma\|_{L^2[0, z_{\max}(p_{\min})]}^2 \\ & \leq C_4 \int_{|p_1 - p_2| > \epsilon} d\mu(p_1) \int d\mu_2(p_2) \int_0^{\max\{\tau_{\max}(p_1), \tau_{\max}(p_2)\}} d\tau |G(\tau, p_1, p_2)|^2 \\ & \leq C_5 \|\delta S\|_{\mu}^2 \end{aligned} \quad (5.7)$$

where C_4 and C_5 depend on G and μ as well.

Perhaps a refined analysis of these constants is possible, in the spirit of Santosa and Symes (1987).

Finally, with γ known, ϕ can be extracted from any of the components via (2.6), whence estimates for ϕ follow immediately.

To complete this section we give estimates needed above, which establish the invertibility on L^2 of operators of the form

$$\mathbf{I} + \mathbf{\Pi} + \mathbf{K}$$

where $\mathbf{\Pi}$ is multiplicative-delay:

$$\mathbf{\Pi}u(z) = \beta(z) u(\alpha(z)),$$

with $\alpha(z) \leq \alpha^* < 1$, $0 \leq z \leq 1$ and \mathbf{K} is an integral operator of Volterra type

$$\mathbf{K}u(z) = \int_0^z d\zeta k(z, \zeta) u(\zeta).$$

For convenience we restrict our attention to the scalar case. Analogous results for vector-valued functions follow from trivial modifications of the proofs. We begin with the case $k \equiv 0$.

Lemma 1. *Suppose that $\alpha, \beta \in C^1[0, 1]$ satisfy*

- (1) $\alpha(0) = 0$
- (2) *for some α_*, α^* with $0 < \alpha_*, \alpha^*$ and $\alpha^* < 1$,*

$$\left. \begin{array}{l} \alpha'(z) \geq \alpha^* \\ \alpha(z) \leq \alpha^* z \end{array} \right\} 0 \leq z \leq 1$$

$$(3) \quad \beta(0)(\alpha'(0))^{-\frac{1}{p}} < 1.$$

Then for any $\mu < 1$, the operator $\mathbb{T}: L^p[0, 1] \rightarrow L^p[0, 1]$ defined by

$$\mathbb{T}u(z) = \beta(z) u(\alpha(z))$$

satisfies

$$\|\mathbb{T}^N\|_p \leq \mu$$

for some N depending on $\|\alpha\|_{C^1[0,1]}$, $\|\beta\|_{C^1[0,1]}$, α^* , α^* , $\beta(0)(\alpha'(0))^{-\frac{1}{p}}$, and μ .

Proof. Define sequences α_n, β_n in $C^1[0, 1]$ by

$$\left. \begin{array}{l} \alpha_0(z) = z \\ \alpha_1(z) = \alpha(z) \\ \alpha_n(z) = \alpha(\alpha_{n-1}(z)) \end{array} \right\} \text{for } 0 \leq z \leq 1, \quad n > 1$$

$$\alpha_{-1}(z) = \alpha^{-1}(z) \quad \text{for } 0 \leq z \leq \alpha(1)$$

$$\alpha_{-n}(z) = \alpha_{-n+1}(\alpha_{-1}(z)) \quad \text{for } 0 \leq z \leq \alpha_n(1), \quad n > 1$$

$$\left. \begin{array}{l} \beta_1(z) = \beta(z) \\ \beta_n(z) = \beta(z) \beta_{n-1}(\alpha(z)) \\ = \prod_{k=0}^{n-1} \beta(\alpha_k(z)) \end{array} \right\} \text{for } 0 \leq z \leq 1, \quad n > 1$$

Then

$$\mathbb{T}^n u(z) = \beta_n(z) u(\alpha_n(z)).$$

Note that

$$\alpha_n(z) \leq \alpha^* \alpha_{n-1}(z) \leq \cdots \leq (\alpha^*)^n z, \quad 0 \leq z \leq 1$$

so that $\alpha_n(1) \leq (\alpha^*)^n \rightarrow 0$ as $n \rightarrow \infty$. Choose δ so that for $0 \leq z \leq \delta$,

$$\beta(z)(\alpha'(z))^{-\frac{1}{p}} \leq \frac{1}{2} \left[1 + \beta(0)(\alpha'(0))^{-\frac{1}{p}} \right] =: \lambda < 1$$

and select n so that $(\alpha^*)^n \leq \delta$.

Note that

$$\begin{aligned}\alpha_n' &= \alpha' \cdot \alpha_{n-1} \cdot \alpha_{n-1}' \\ &= \dots = \prod_{k=0}^{n-1} \alpha' \cdot \alpha_k\end{aligned}$$

Note also that if $z \in [0, \alpha_k(1)]$, then

$$\alpha_j \cdot \alpha_{-k}(z) = \alpha_{j-k}(z), \quad j = 0, 1, 2, \dots$$

Thus

$$\begin{aligned}\|T^N u\|_p^p &= \int_0^1 dz |\beta_N u \cdot \alpha_N|^p \\ &= \int_0^{\alpha_N(1)} \frac{|\beta_N \cdot \alpha_{-N}|^p}{\alpha_N' \cdot \alpha_{-N}} |u|^p \\ &= \int_0^{\alpha_N(1)} \left[\prod_{k=0}^{N-1} \frac{|\beta \cdot \alpha_{k-N}|^p}{\alpha' \cdot \alpha_{k-N}} \right] |u|^p\end{aligned}\tag{5.8}$$

Set

$$C := \|\beta(\alpha')^{-\frac{1}{p}}\|_\infty^n$$

Then

$$\prod_{k=0}^{n-1} \frac{|\beta \cdot \alpha_{k-N}|^p}{\alpha' \cdot \alpha_{k-N}} \leq C^p\tag{5.9}$$

on $[0, \alpha_N(1)]$. Also note that, if $z \in [0, \alpha_N(1)]$ and $k \geq n$, $\alpha_{k-N}(z) = \alpha_{k-N}(\alpha_N(w)) = \alpha_k(w) \leq \delta$ for some $w \in [0, 1]$. Thus

$$\begin{aligned}\frac{|\beta \cdot \alpha_{k-N}|^p}{\alpha' \cdot \alpha_{k-N}}(z) &\leq \lambda^p \\ \text{for } k \geq n, \quad 0 \leq z \leq \alpha_N(1).\end{aligned}\tag{5.10}$$

Taken together, (5.8), (5.9), and (5.10) imply that

$$\|\mathbb{T}^N\|_p^p \leq C^p \lambda^{(N-n)p} \|u\|_p^p$$

for $N \geq n$. If

$$N \geq n + \frac{\log C - \log \mu}{(-\log \lambda)}$$

then

$$\|\Pi^N u\|_p \leq \mu \|u\|_p$$

as required. Clearly C, λ and n depend on the stated quantities.

We now consider operators of "Volterra" form, that is,

$$\mathbf{K}u(z) = \int_0^z d\zeta k(z, \zeta) u(\zeta).$$

As is well known, for continuous kernels k , such operators have spectral radius zero as operators on L^p . See e.g. Widom (1969), p. 9-11.

Actually, slightly less than continuity is required. We consider operators K defined by kernels k , possibly matrix-valued, for which the function

$$\tilde{k}(z) = k(\cdot, z)$$

lies in $C^0([0, 1], L^2[0, 1])$ with the property that $\text{supp } \tilde{k}(z) \subset [z, 1]$, $0 \leq z \leq 1$.

Note that the Volterra property is equivalent to the statement that

$$\text{supp } u \subset [z_1, 1] \Rightarrow \text{supp } \mathbf{K}u \subset [z_1, 1].$$

Lemma 2. Suppose that $k \in C^0([0, 1]; L^2[0, 1])$ satisfies $\text{supp } \tilde{k}(z) \subset [z, 1]$ and define for $u \in L^2[0, 1]$

$$\mathbf{K}u = \int_0^1 dz \tilde{k}(z) u(z) \in L^2[0, 1].$$

Then for any positive $\mu < 1$ there exists a positive integer N depending on

$$\sup_{0 \leq z \leq 1} \|\tilde{k}(z)\|_{L^2[0,1]}$$

and on μ , for which

$$\|\mathbf{K}^N\|_2 < 1.$$

Proof. (This is a small modification of standard argument. See e.g. Widom (1969).) Define the iterated kernels \tilde{k}_n by

$$\bar{k}_1 = \bar{k}$$

$$\bar{k}_n(z_1) = \int dz \bar{k}_{n-1}(z) k(z, z_1) \quad n = 2, 3, 4 \dots$$

One easily verifies that $\bar{k}_n \in C^0([0, 1]; L^2[0, 1])$. Because of the observation preceding the statement of the lemma, $\text{supp } \bar{k}_n(z) \subset [z, 1]$ as well.

Note that

$$\begin{aligned} \|\bar{k}_2(z_1)\| &= \int dz \bar{k}_1(z) k(z, z_1) \\ &= \left\| \int_{z_1}^1 dz \bar{k}(z) k(z, z_1) \right\| \\ &\leq \int_{z_1}^1 dz \|\bar{k}(z)\| |k(z, z_1)| \\ &\leq C \int_{z_1}^1 dz |k(z, z_1)| \\ &\leq C^2 (1 - z_1)^{\frac{1}{2}} \end{aligned}$$

where we have written $C = \sup_{0 \leq z \leq 1} \|\bar{k}(z)\|$. Assume that $\|\bar{k}_j(z)\| \leq \frac{C^{2j} (1-z)^{\frac{j}{2}}}{(j!)^{\frac{1}{2}}}$,

$j = 1, 2, \dots, n$. In general,

$$\begin{aligned} \|\bar{k}_{n+1}(z_1)\| &\leq \int_{z_1}^1 dz \|\bar{k}_n(z)\| |k(z, z_1)| \\ &\leq \frac{C^{n+1}}{(n!)^{\frac{1}{2}}} \int_{z_1}^1 dz (1-z)^{\frac{n}{2}} |k(z, z_1)| \\ &\leq \frac{C^{n+1}}{(n!)^{\frac{1}{2}}} \left(\int_{z_1}^1 dz (1-z)^n \right)^{\frac{1}{2}} \|\bar{k}(z_1)\| \\ &= \frac{C^{n+2}}{((n+1)!)^{\frac{1}{2}}} (1-z_1)^{n+\frac{1}{2}}. \end{aligned}$$

Thus $\|\bar{k}^n\| < 1$ for large n , as desired.

q.e.d.

Lemma 3.

Suppose that k is a Volterra kernel as described in Lemma 2, and \mathbb{T} is a multiplicative delay operator defined by scalars α, β obeying the conditions of Lemma 1. then

$$\mathbb{I} + \mathbb{T} + \mathbb{K}$$

is invertible: in particular, for some $\epsilon > 0$ depending on the quantities described in Lemmas 1 and 2,

$$\|(\mathbb{I} + \mathbb{T} + \mathbb{K}) u\| \geq \epsilon \|u\|$$

for $u \in L^2[0, 1]$.

Proof. The convergence of the Neumann series for $\mathbb{I} + \mathbb{T}$ in operator norm is a consequence of Lemma 1. Thus $(\mathbb{I} + \mathbb{T})^{-1}\mathbb{K}$ is a bounded operator on $L^2[0, 1]$, given by a kernel

$$\tilde{k}_1(z) = (\mathbb{I} + \mathbb{T})^{-1}\tilde{k}_0(z).$$

The Volterra property of \tilde{k}_1 follows from the delay property ($\alpha < 1$) of \mathbb{T} , and an estimate for k_1 in $C^0([0, 1]; L^2[0, 1])$ follows directly from Lemma 1 as well. Thus

$$\begin{aligned} \|(\mathbb{I} + \mathbb{T} + \mathbb{K}) u\| &= \|(\mathbb{I} + \mathbb{T})(\mathbb{I} + (\mathbb{I} + \mathbb{T})^{-1}\mathbb{K}) u\| \\ &\geq \epsilon_1 \|(\mathbb{I} + (\mathbb{I} + \mathbb{T})^{-1}\mathbb{K}) u\| \\ &\geq \epsilon \|u\| \end{aligned}$$

by the application of Lemma 2.

q.e.d.

6. Discussion.

In this section we discuss briefly the consequences of weakening the hypotheses M1-M3, S1-S3 stated in Section 1, which underlay our arguments but which are unacceptably restrictive for practical application.

The extension of the perturbational results to nonlayered background media is straightforward, to some extent, so long as the background is smooth. In some sense the literature on migration is concerned exactly with this extension: for some recent, mathematically correct results for the fixed f case see Beylkin (1985) and Rakesh (1986). Results analogous to those presented here

should be achievable in this context. The (full) nonlinear nonlayered problem is much more difficult; for some limited results see Sacks and Symes (1985), Symes (1986a).

The isotropic elasticity model is the general choice for the "premium" model level; see e.g. Tarantola (1984). Some results on the determination of a layered elastic medium from various point-source data sets may be found in Clarke (1984), Yagle and Levy (1986), Carazzone (1986), and Sacks and Symes (1987). On the other hand, at least transverse, and possibly more general, anisotropy is evident in reflection data in some locales (Thomsen (1986)); Coen and Meadows (1985) give some results concerning anisotropic elastic inversion. We see no difficulty in extending the results reported here to these more general layered models.

The smoothness question is quite interesting and is presently inadequately understood. Symes (1986c) gives a review of the extent to which smoothness constraints can be relaxed for a single-plane-wave, layered medium problem, and Sacks and Symes (1985) gives some idea of the difficulties which arise in the study of several-dimensional problems in the presence of limited smoothness. An analytic approach to the nonlinear problem requires that this issue be addressed, as perturbations and backgrounds must then be regarded as having the same degree of smoothness. On the other hand, nonsmoothness may have very favorable consequences, as will be discussed below in relation to band-extrapolation, and must certainly be regarded as a feature of the actual parameter distributions in earth materials.

As mentioned in the introduction, the point-source assumption seems adequate for reflection seismology on physical grounds. On the other hand, common land and marine energy sources are strongly anisotropic. To some extent this feature might be modeled by a multipole source term, and the moment tensor components recovered by a generalization of our technique. This seems an important matter for further work.

Perhaps the most unrealistic assumption of our work is S3 (quasi-impulsive nature of sources): it is simply violently wrong. Typical reflection seismic sources have significant energy content in the range 4-60 Hz, at best. Thus a reasonable isotropic point-source model should involve a very non-impulsive wavelet.

In the last several years, considerable numerical evidence has emerged to support the contention that bandlimited point-source data does determine layered velocity profiles by least-squares data fitting: see for example McAulay (1985) and Kolb, Collino, and Lailly (1986). Santosa and Symes (1986) give a comprehensive analysis of this problem, and show that success of the least-squares approach is crucially dependent on

- (i) sufficient (precritical) aperture and
- (ii) sufficient reflector density, i.e. sufficient *lack of smoothness*.

Thus the nonsmooth distribution of parameters may have as a positive consequence the feasibility of seismic inversion.

We believe that the ideas of this paper and those of Santosa and Symes (1986) might be synthesized to obtain codetermination of velocity profiles and bandlimited point-sources, under appropriate conditions. In support of this conjecture we cite the numerical experiments of Canadas and Kolb (1986) who solved this problem numerically *via* least-squares data fitting.

FIGURE CAPTIONS

1. Reference and perturbed velocity profiles for first set of experiments (Figures 1 - 5).
2. Reference and perturbed wavelets for first set of experiments.
3. Reference and perturbed traces for $p = 0.0, 0.4$.
4. Comparison of exact and recovered velocity profiles from data of Figure 3.
5. Comparison of exact and recovered wavelets from data of Figure 3.
6. Perturbed traces, $p = 0.0, 0.4$; 1% *r.m.s.* perturbation in $c(z), f(t)$. Reference traces same as in Figure 3.
7. Comparison of exact and recovered wavelets from data of Figure 6.
8. Comparison of exact and recovered velocity profiles from data of Figure 6.
9. Perturbed traces, $p = 0.0, 0.4$; 10% *r.m.s.* perturbation in $c(z), f(t)$. Reference traces same as in Figure 3.
10. Comparison of exact and recovered wavelets from data of Figure 9.
11. Comparison of exact and recovered velocity profiles from data of Figure 9.

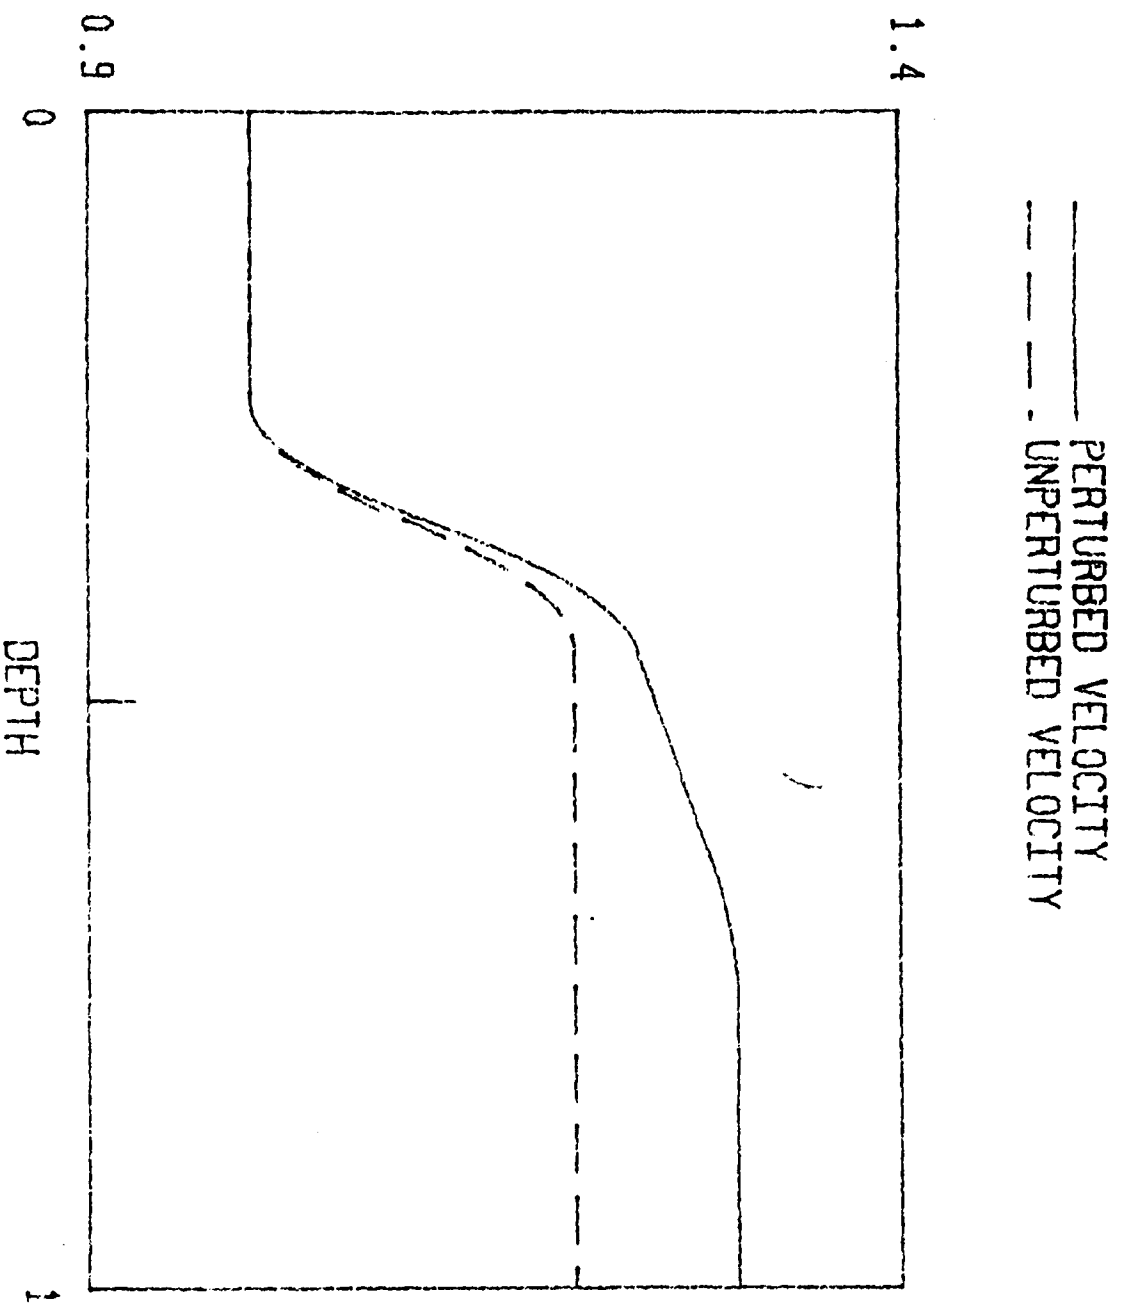
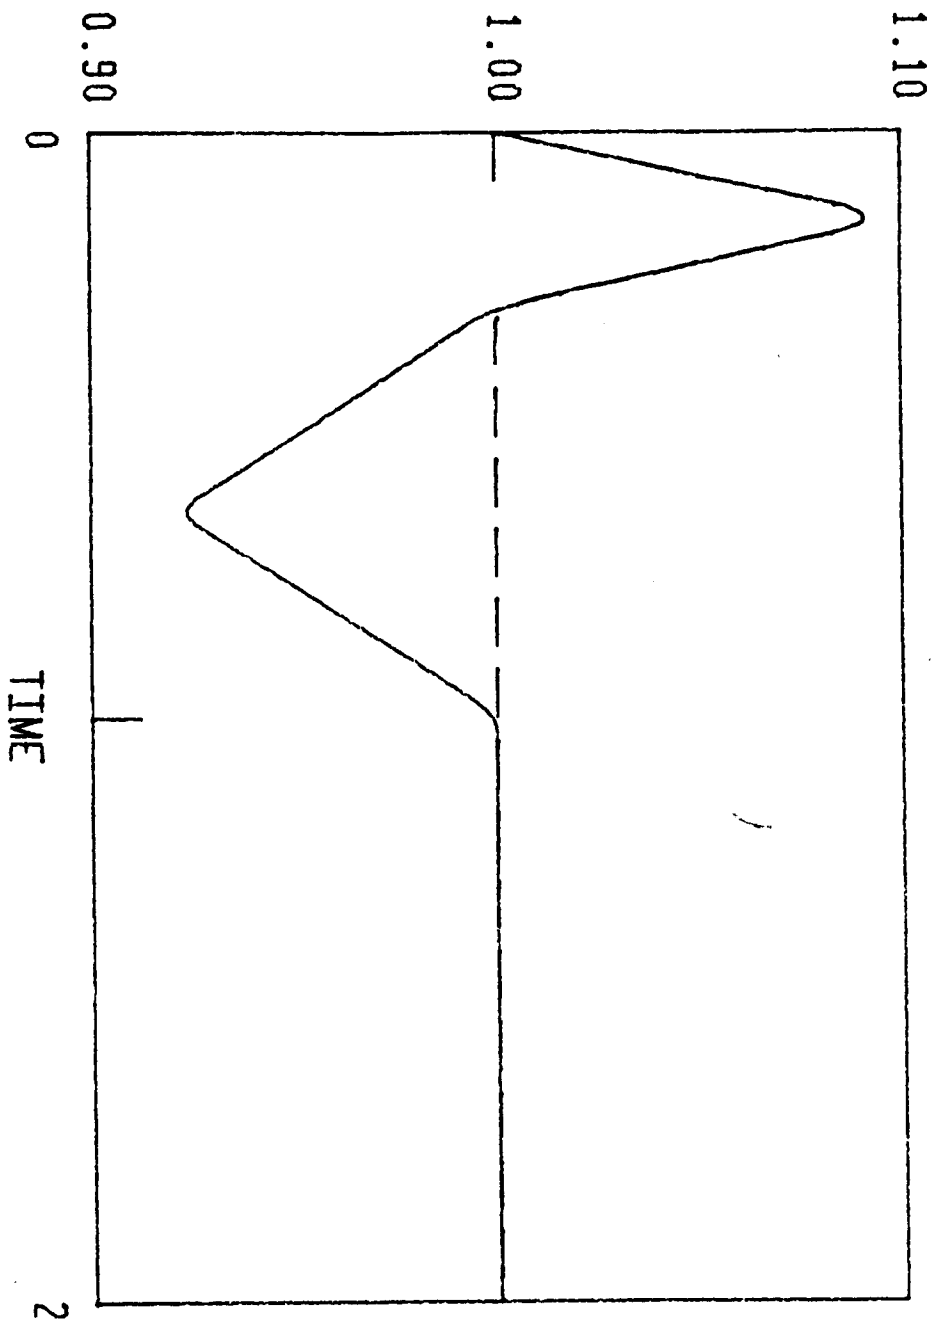


Figure 1

— PERTURBED WAVELET
- - - UNPERTURBED WAVELET



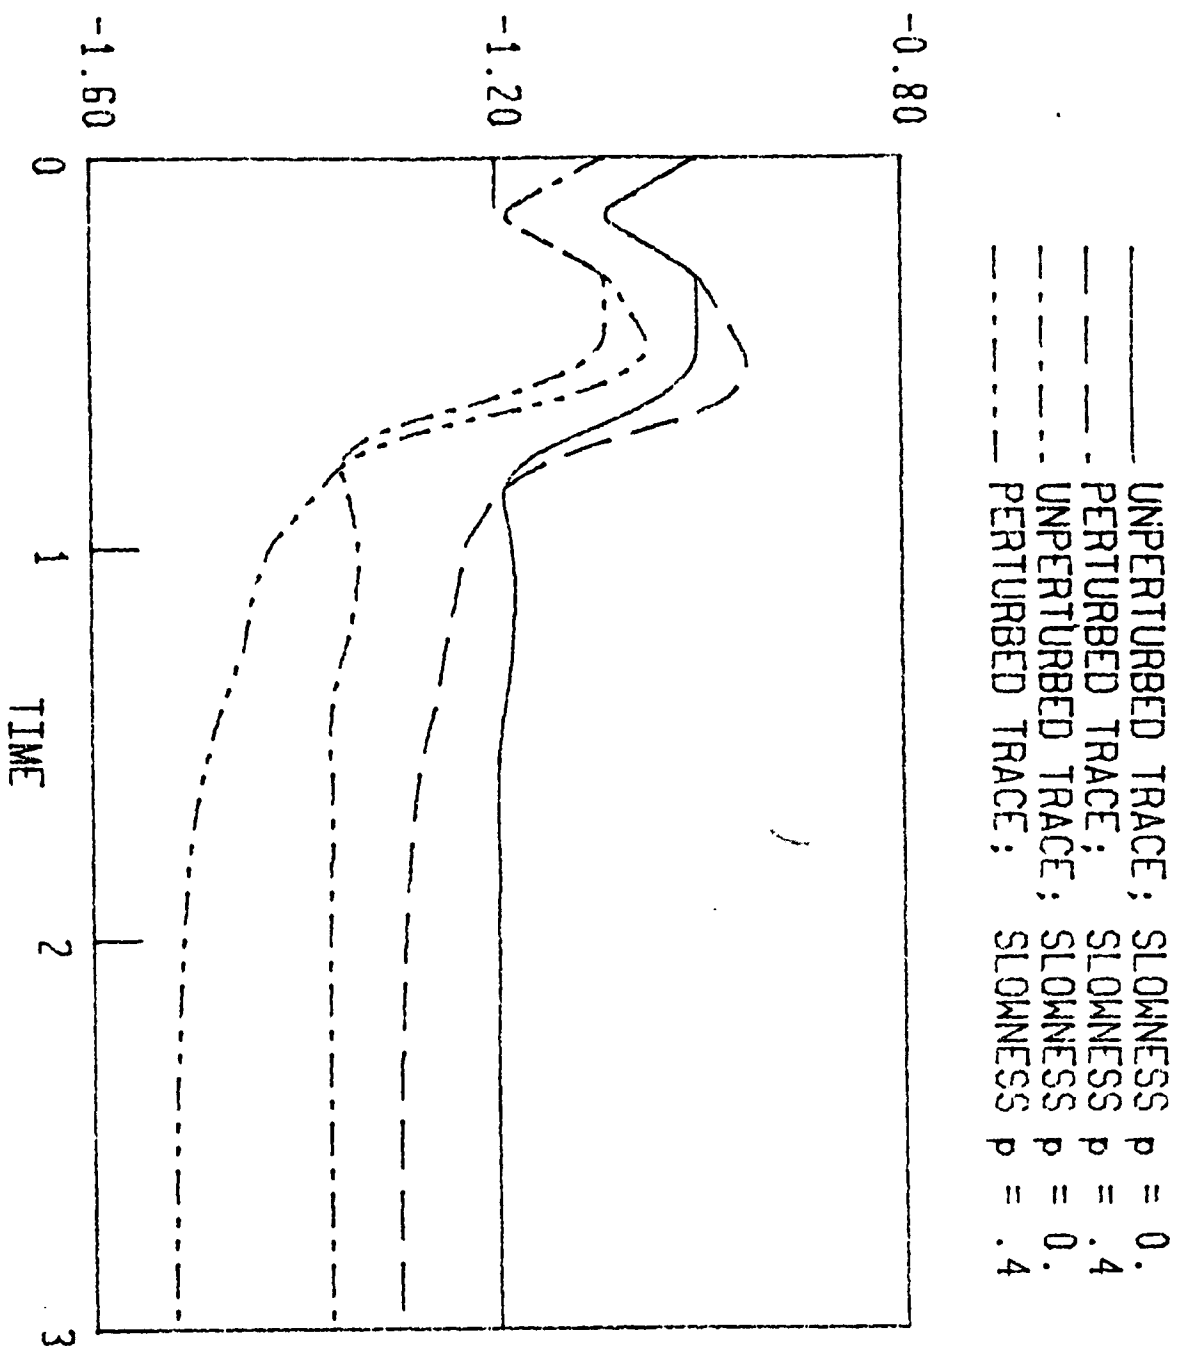


Figure 2

--- PERTURBED VELOCITY
— RECOVERED VELOCITY

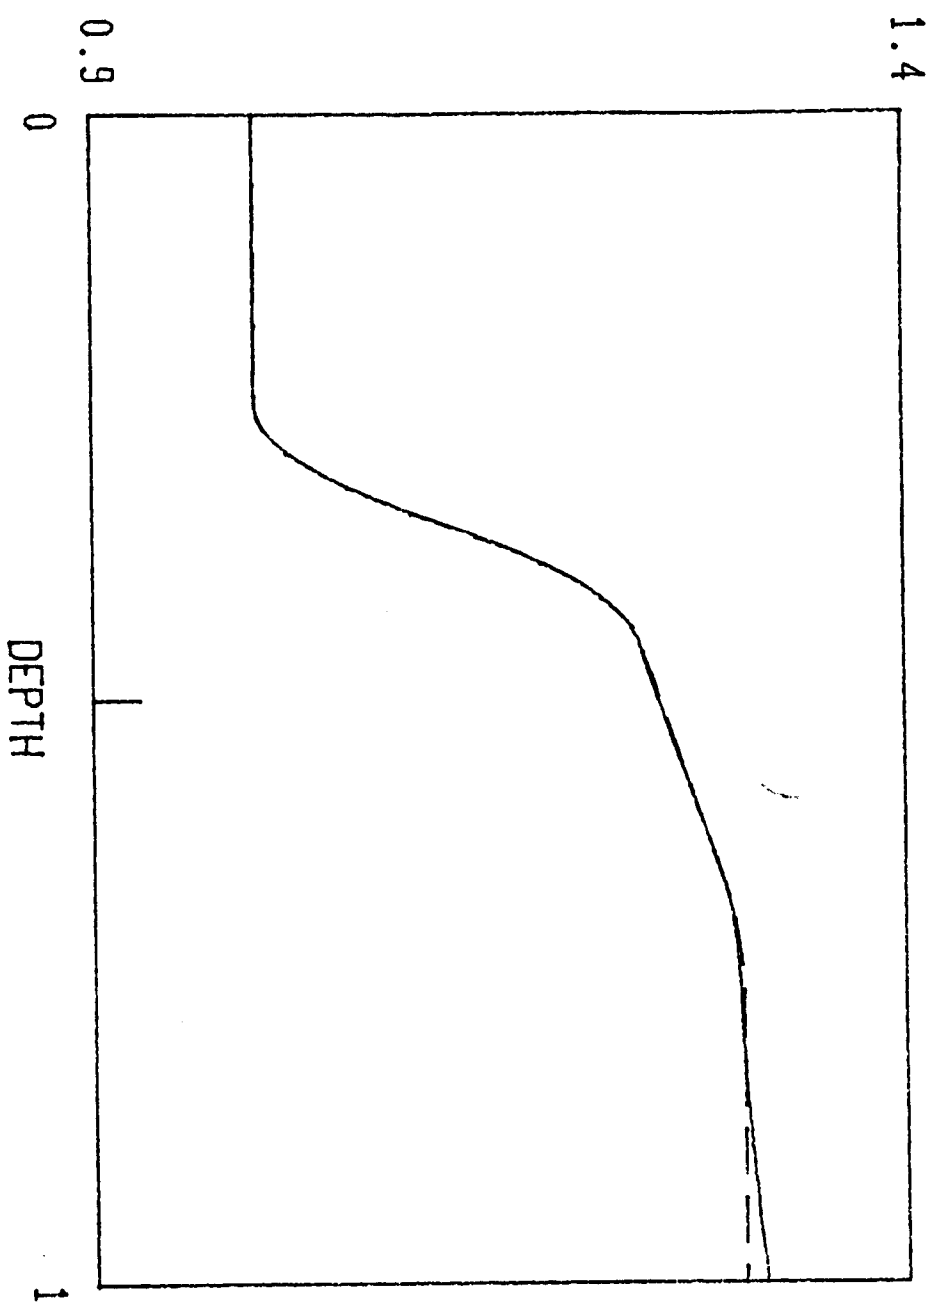


Figure 41

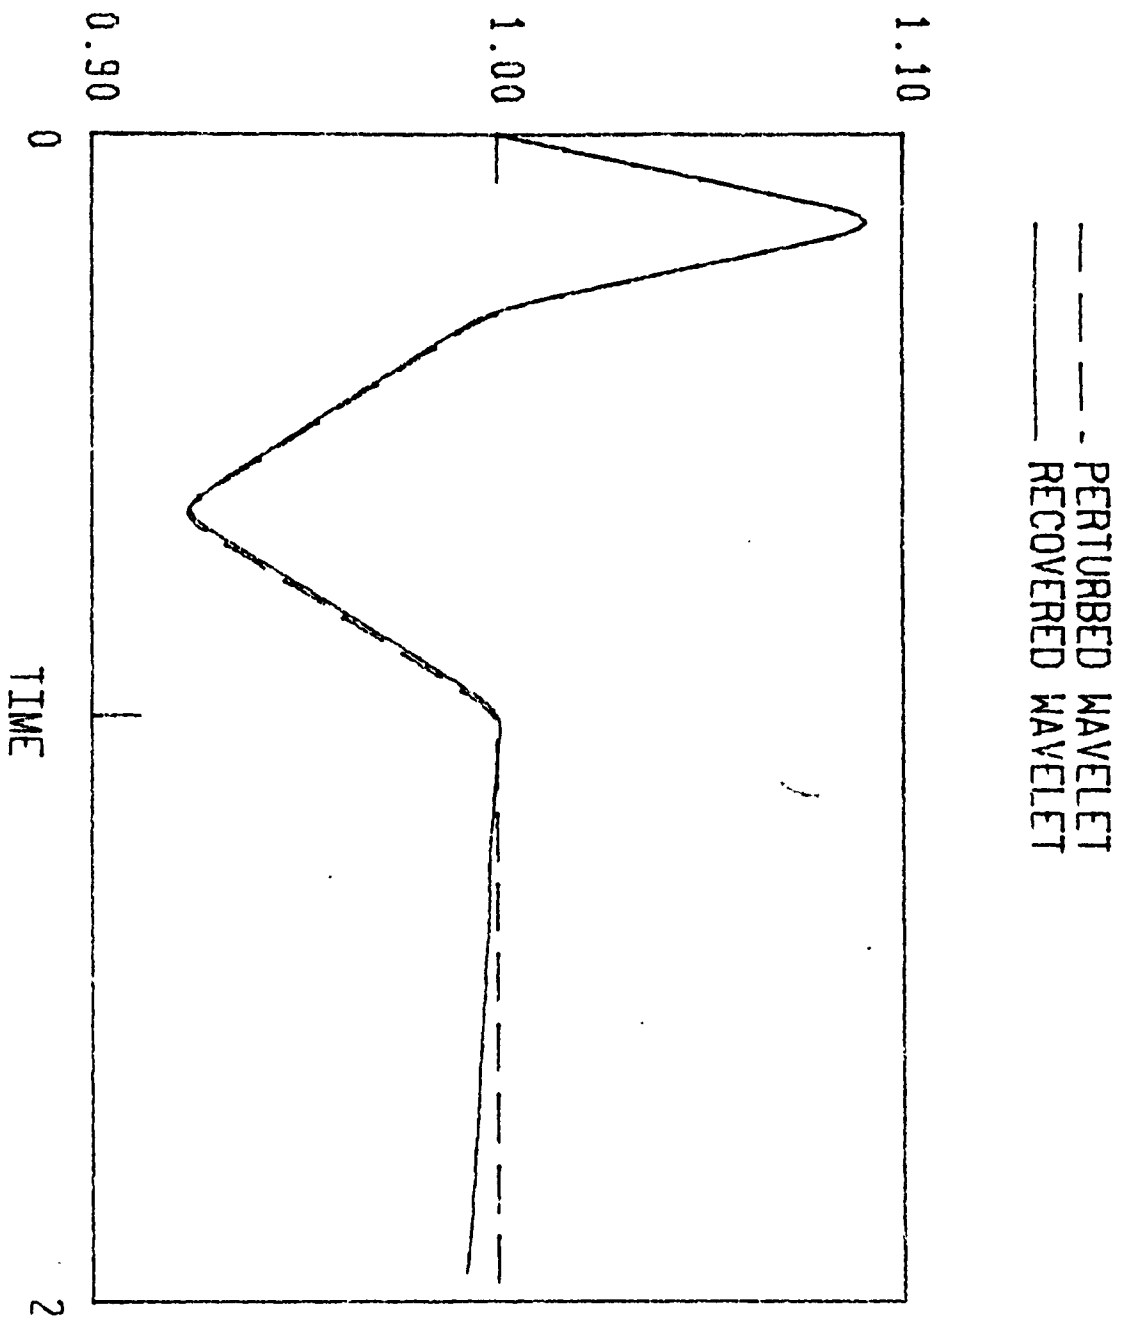


Figure 5


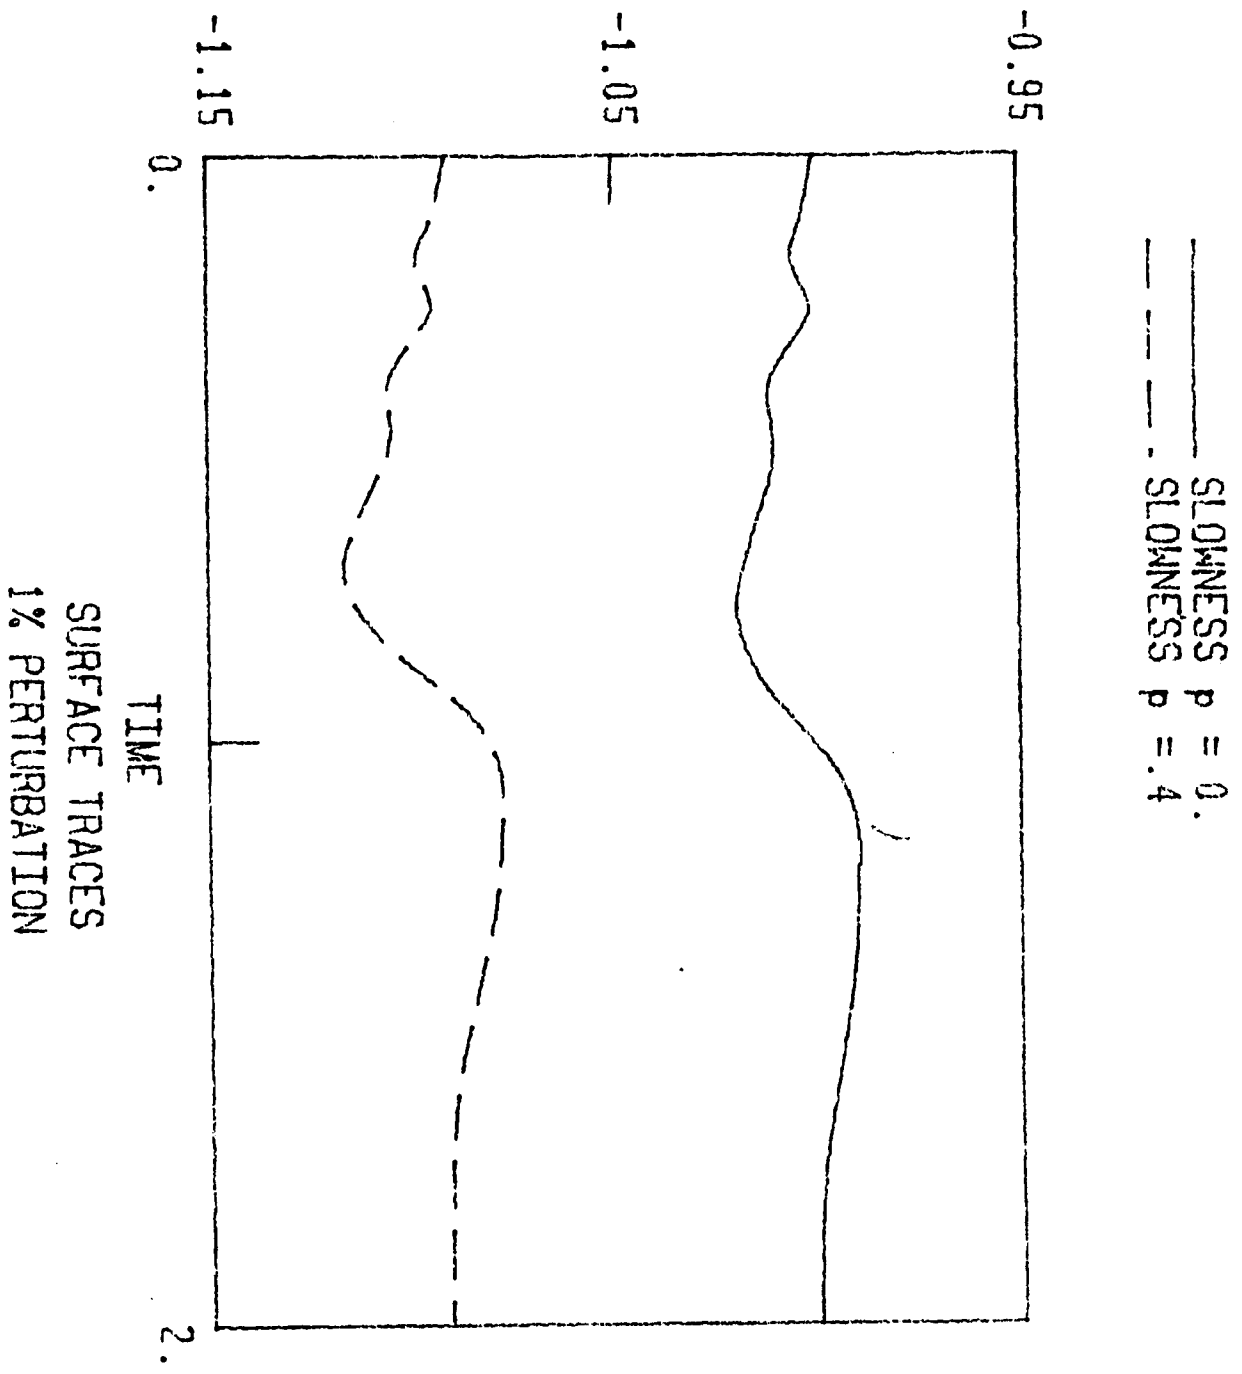



Figure 6

COMPUTED SOLUTION
EXACT WAVELET

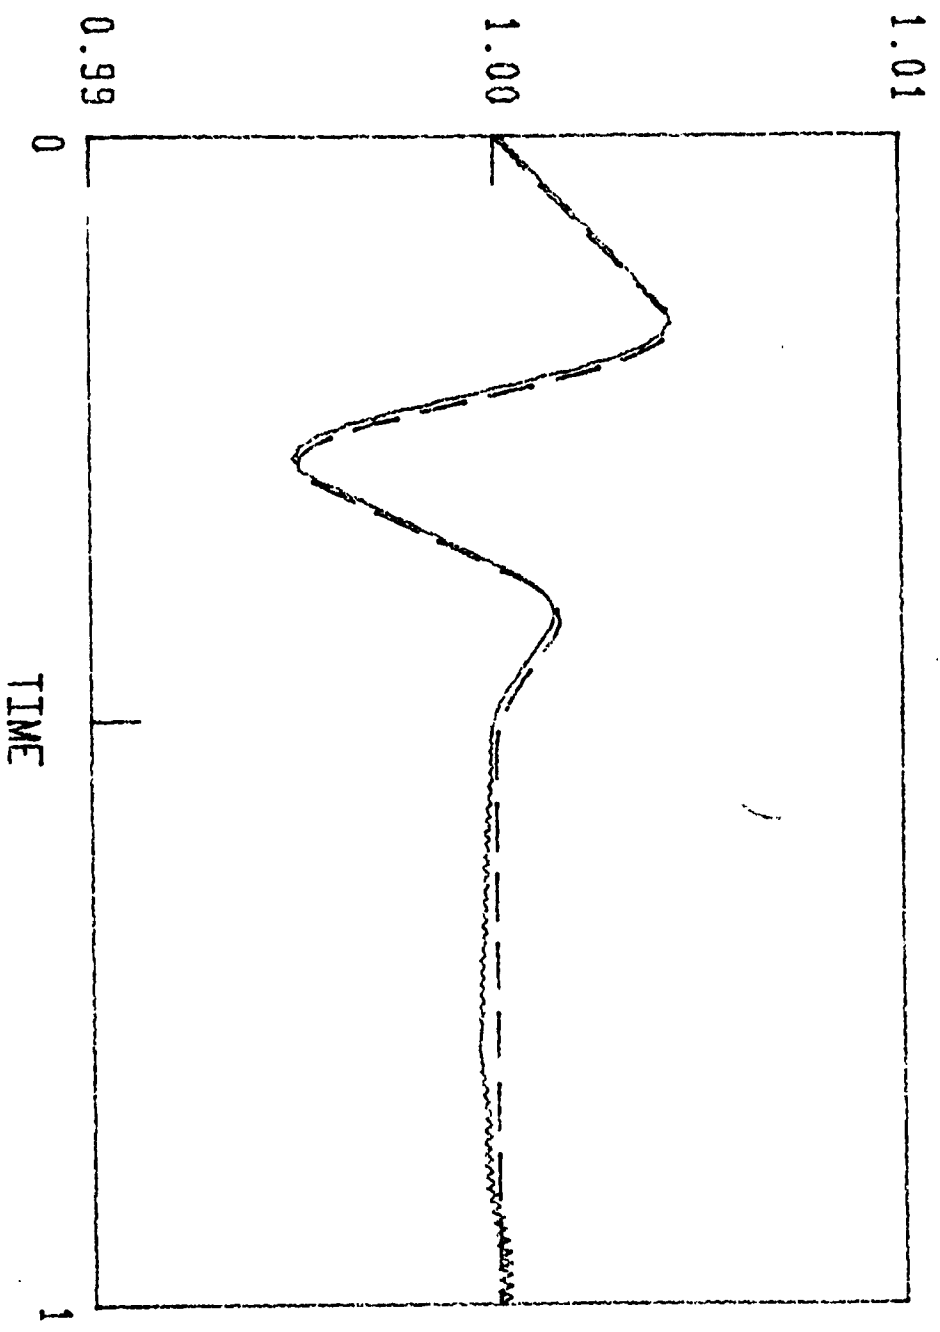

1% PERTURBATION

COMPUTED SOLUTION
EXACT VELOCITY PROFILE

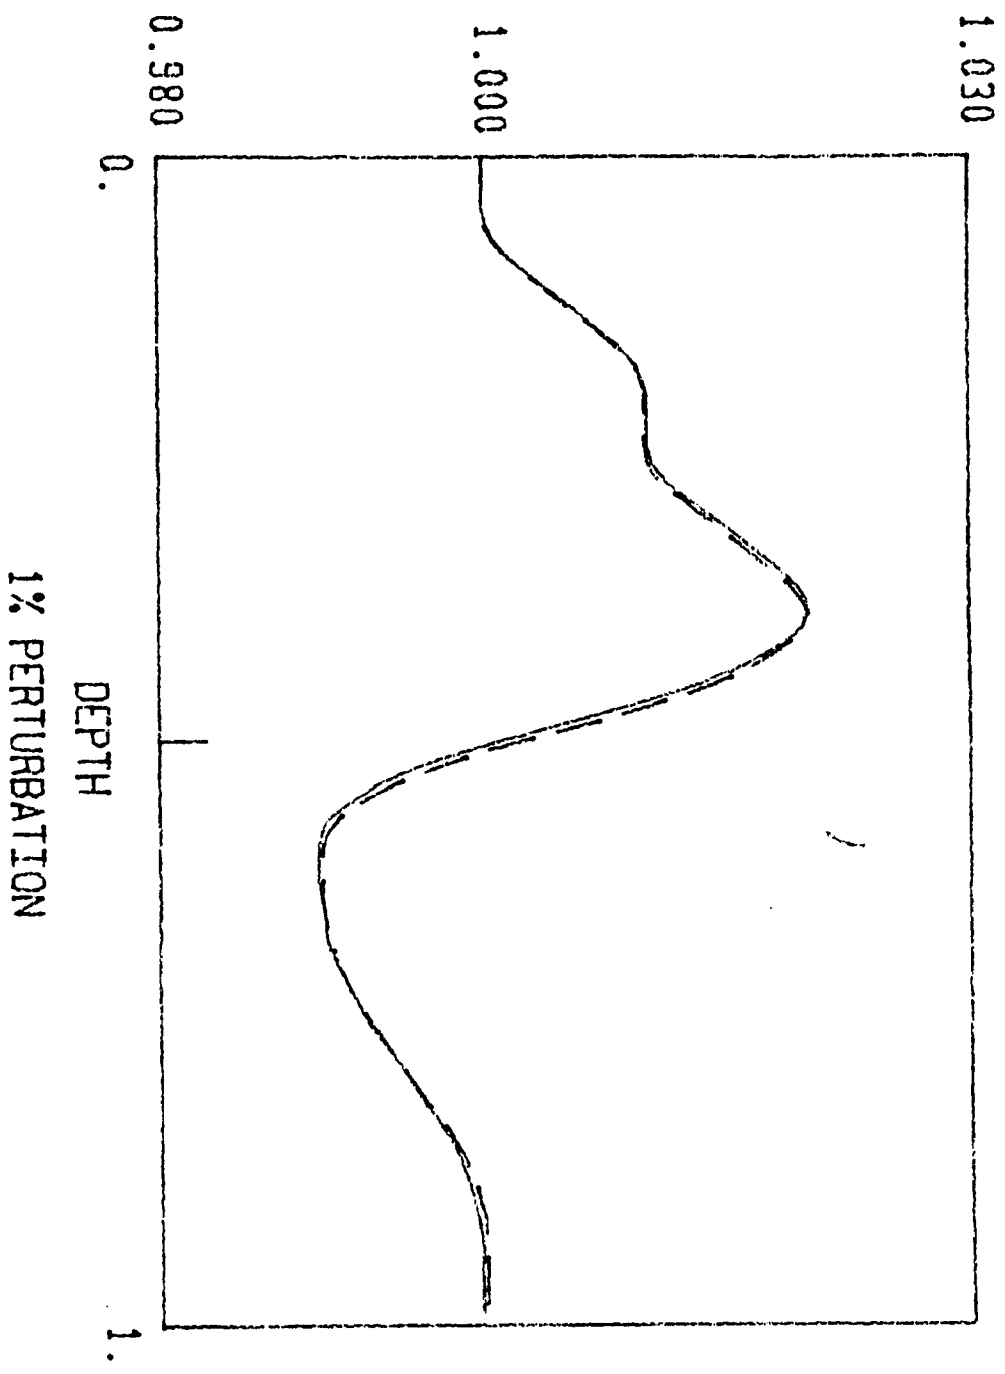

1% PERTURBATION

DEPTH

Figure 3


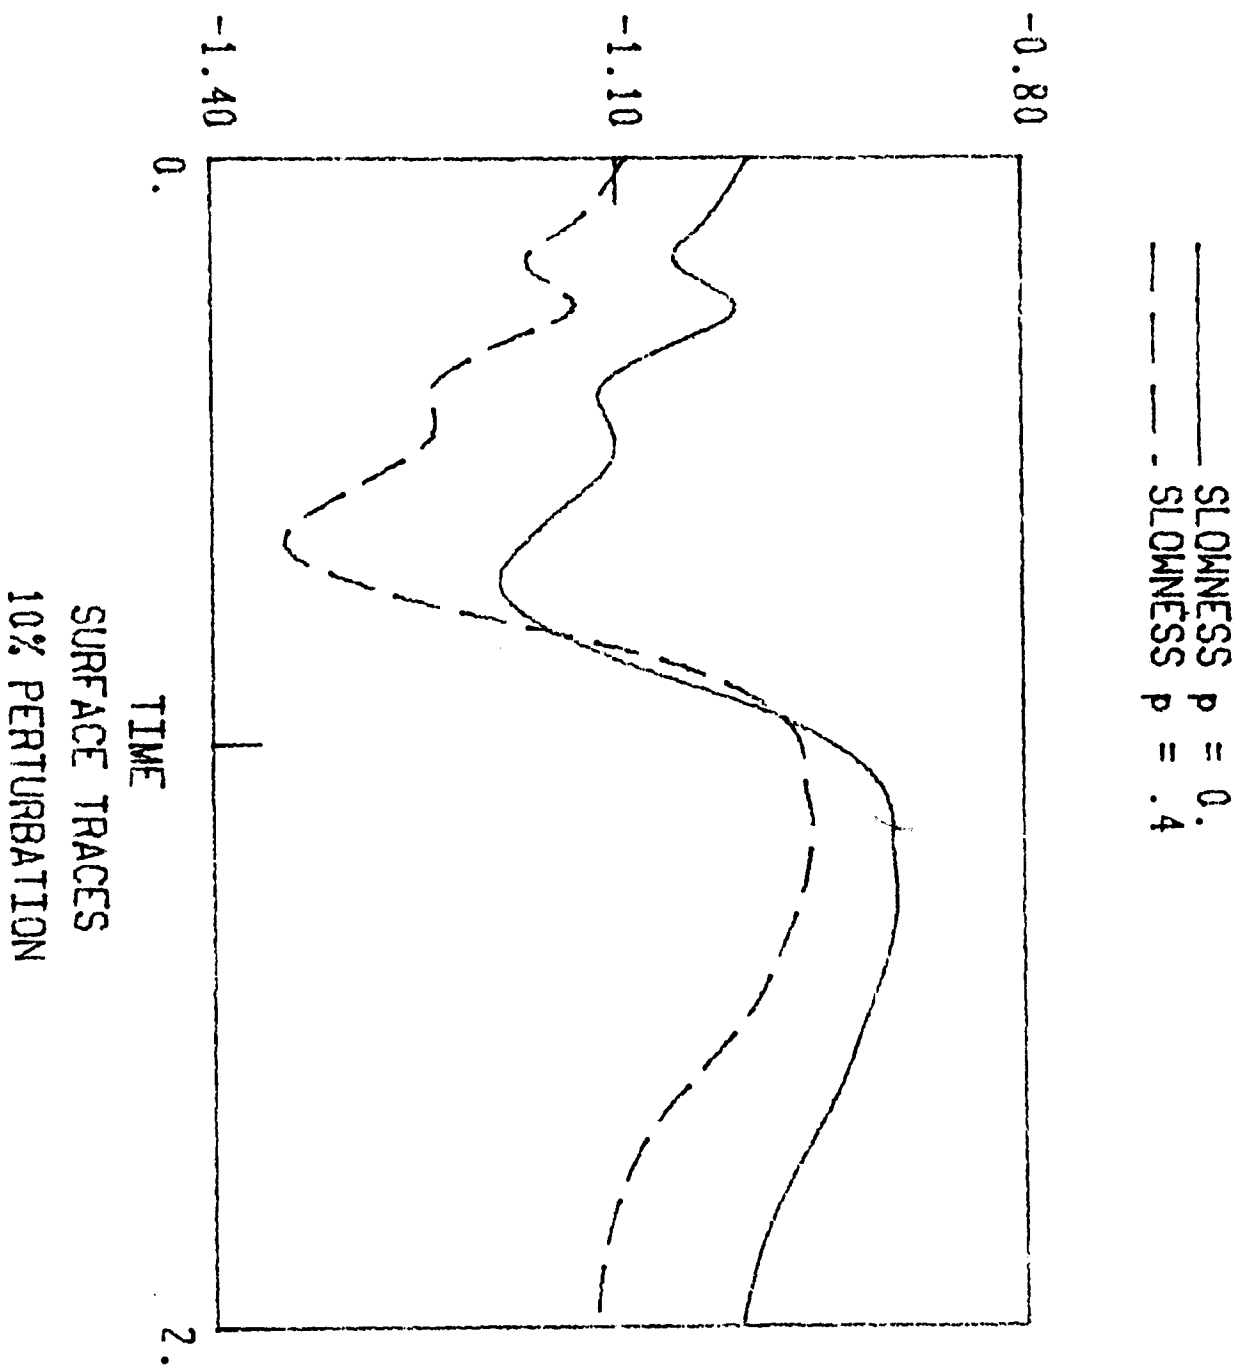


Figure 9

COMPUTED SOLUTION
EXACT WAVELET

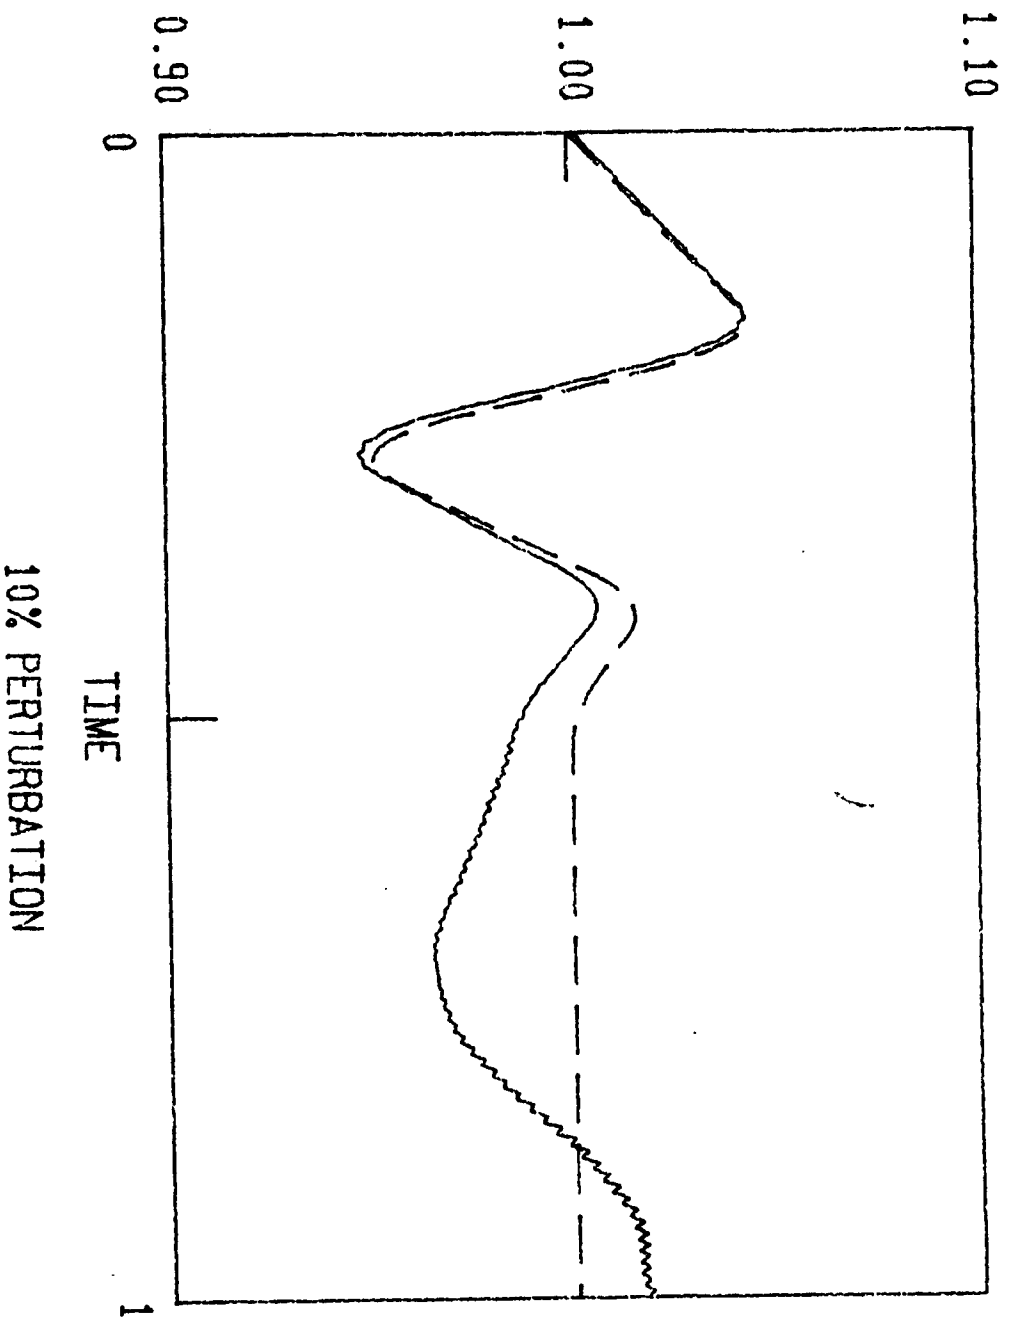

10% PERTURBATION

COMPUTED SOLUTION
EXACT VELOCITY PROFILE

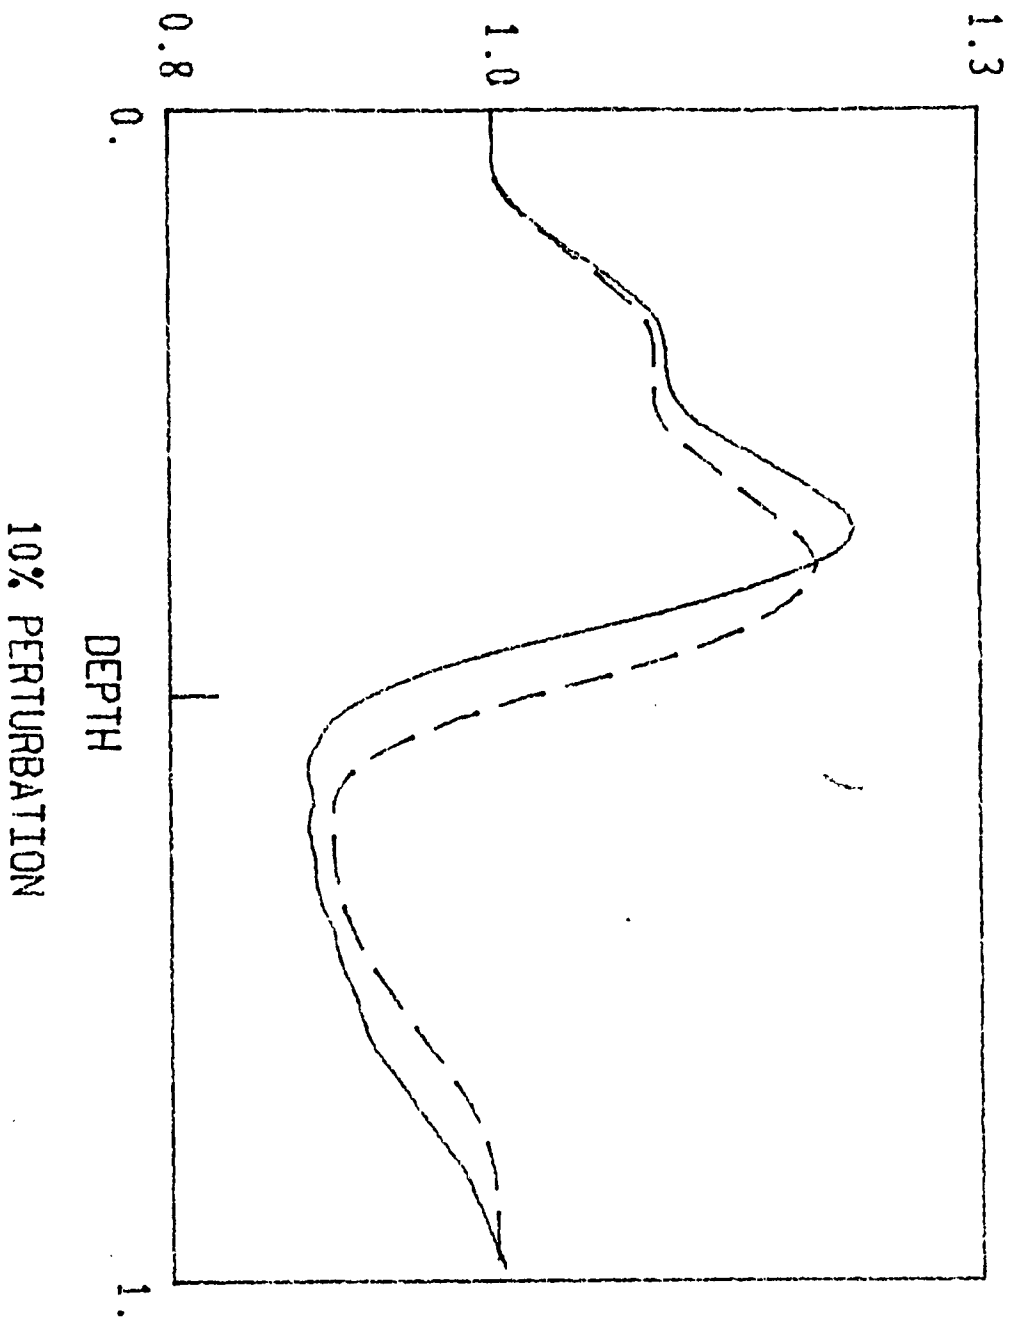


Figure 11