

Ground Mobility M&S Technology Development and Application

Patrick Nunez

US Army RDECOM TARDEC Ground Vehicle Simulation Laboratory (GVSL)

Patrick.Nunez@us.army.mil

Keywords:

Mobility, Multibody Dynamics, Terramechanics, Real-time Simulation, Warfighter Machine Interface

ABSTRACT: *The US Army's High-Fidelity Ground Platform and Terrain Mechanics Modeling (HGTM) Science and Technology Objective (STO) (IV.GC.2003.01) is developing methods to facilitate the creation and application of high fidelity, real-time, ground platform mobility and terrain models. The models are applicable to warfighter in the loop virtual experiments investigating methods of mitigating the effects of motion on soldier performance, for the development and evaluation of conceptual manned and unmanned ground platform dynamic performance and mobility, and as a component of embedded simulation and training systems. This paper provides an overview of the HGTM STO vehicle and terrain M&S technology development effort and a description of the application of the STO products.*

1. Background

The High-Fidelity Ground Platform and Terrain Mechanics Modeling (HGTM) Science and Technology Objective (STO) is a collaboration between the US Army Research Development and Engineering Command (RDECOM) and the US Army Corps of Engineer Engineering Research and Development Center (ERDC). It involves four organizations; RDECOM Tank Automotive Research Development and Engineering Center (TARDEC), RDECOM Army Research Laboratory (ARL), ERDC Geotechnical Structures Laboratory (GSL), and ERDC Cold Regions Research and Engineering Laboratory (CRREL). The purpose of the HGTM STO is to develop real-time ground platform mobility and terrain M&S technologies and to employ those technologies towards human performance experiments that investigate methods of mitigating the effects of motion on human performance. The main proponents are the US Army Training and Doctrine Commands (TRADOC) Unit of Action Maneuver Battlelab (UAMBL) at Ft. Knox, KY. and the Maneuver Support Center (MANSCEN) at Ft. Leonard Wood, MS. The primary customers are military ground platform technology developers and weapon system designers.

The four year program started in October 2002. The first year consisted of detailed planning of specific capabilities, baselining current vehicle modeling capabilities, a validation effort of current terrain capabilities for vibration predictions [1], and the identification of methods of mitigating the negative effects of motion on warfighter performance. The second year consisted of a set of experiments quantifying the effects of motion on human performance[2], initial investigation of mitigation

effects[3], and an initial implementation of a real-time, physics-based vehicle-terrain interface[4]. In addition, during the first two years, models were applied within the context of an embedded simulation system used to develop crew station technologies, as the high-fidelity ground mobility component for two distributed simulation environments being developed to support distributed experimentation and testing for the US Army's Future Combat System (FCS) [5, 6], and within an FCS Lead System Integrator (LSI) experiment comparing direct and indirect driving.

The final two years will consist of continued development of the core vehicle and terrain modeling technologies and further investigation of motion mitigation techniques. The application of the STO products will continue with experimentation in support of external military technology developers, and with the application of the STO products within Army and joint service distributed simulation architecture development and experimentation.

2. HGTM STO Technology Development

The work being performed under the HGTM STO falls under three pacing technologies; vehicle modeling, terrain modeling, and the mitigation of motion effects. TARDEC is responsible for vehicle model development, terrain database elevation profile enhancements, and the refinement of an immersive motion simulation environment. ARL is responsible for defining motion mitigation effects and providing human experiment design and analysis capabilities. GSL is responsible for the characterization of soils, their effect on mobility, and complex obstacle modeling. CRREL is responsible for all season

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 20 SEP 2004	2. REPORT TYPE N/A	3. DATES COVERED -			
4. TITLE AND SUBTITLE Ground Mobility M&S Technology Development and Application		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) Patrick Nunez		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) USATACOM 651 E 11 Mile Road Warren, MI 48397-5008		8. PERFORMING ORGANIZATION REPORT NUMBER 14239			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S) TACOM TARDEC			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 10	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

environments - the effects of snow and freezing and thawing terrain.

The HGTM STO concentrates specifically on real-time modeling and simulation capabilities that support experimentation and analysis using embedded systems including humans (commanders, drivers, and robotic system operators), software (situational awareness software, power system control algorithms, and autonomous navigation systems), and hardware (crew station devices, hybrid power supply systems, and gun turret systems). Higher resolution models that are not capable of real-time execution and lower resolution models that allow large numbers of ground platform entities to be simulated are considered briefly in order to ensure a consistency of vehicle mobility predictions across multiple resolutions.

2.1. Vehicle & Terrain Modeling

2.1.1 High-Resolution Real-Time Models

The goal of the HGTM STO in terms of vehicle models is to provide a vehicle or technology developer with a way to evaluate how effective the design is when employed within an operational environment. Traditionally, vehicle designers work in the world of high-resolution constructive engineering simulations where the human aspect and the operating environment are difficult to quantify. Physical laws that govern subsystem performance may be accurately simulated, but the actual usage of the aggregated system is grossly approximated and the non-deterministic behavior of the human and psychological effects on the human are usually not considered.

In order to fully bring the human operator into a simulation, real-time operation is required. In order to bring design level models into real-time simulations, complicated systems of equations must be solved in an efficient manner. The goal of the HGTM STO is to develop vehicle modeling constructs and equation solution algorithms that allow complex models to be employed within a real-time environment.

Modeling the operating environment in high-fidelity requires a large scale effort and the deployment of a host of subject matter experts that are not traditionally available to the typical vehicle component or subsystems designer. This is solved through distributed simulations that identify subject matter experts in the various functions of weapon systems, allow them to work in their area of expertise, and then connect their models using network protocols. The HGTM STO developers are working with RDECOM, TRADOC, the Army Test and Evaluation Center (ATEC) and with other services in order to include a

full high-fidelity battlefield context to simulation experiments.

The HGTM STO emphasizes mobility, so the drive train, suspension, tire/track, and terrain models are the primary component models being advanced (Figure 1).

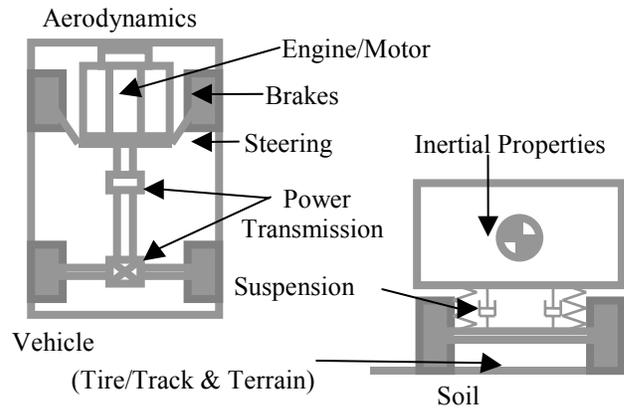


Figure 1 Typical Automotive Systems in HGTM STO Models

2.1.2 Composable Models

Most real-time vehicle models developed today for vehicle design applications consist of highly optimized systems of equations that represent vehicles with a generally constant topology. Specifically, they are developed by the automotive industry and consist of four-wheel vehicles with traditional drive trains and steering systems operating over hard surfaces. Military ground platforms must operate over widely varied terrains, which results in a large set of possible wheeled and tracked configurations to deliver power to the ground.

In the traditional method of developing real-time ground vehicle models, a basic vehicle configuration is developed, the equations of motion are identified, the resulting set of equations are examined in great detail, and solution methods are developed that are highly optimized. Models of different vehicles are developed by modifying parameters in the optimized model, which works well if the same basic topological structure exists between the models. This parameterized approach does not work well, however, for the military situation where the vehicle configurations are widely varied. The challenge is to develop a means to model components to a high level of resolution and create methods to connect the various components into a system level model in a way that optimizations are automatically included. In other words, the HGTM STO is developing the means to develop optimized composable models.

Interfaces are being defined between components and subsystems that allow a vehicle modeler to easily create new models. The basic philosophy is to develop separate component or subsystem models and define interface methods that mirror the physical interfaces, yet are transparent to the model developer.

2.1.3 Continuous Resolution Terrain Elevation

HGTM STO experiments required that the human operator be subjected to motion that is representative of real-world operations. The primary motion platform used in motion experiments is able to handle 2G maximum transient acceleration signals with a 3 dB frequency of 40 Hz. In order to fully utilize the hardware capabilities, the vehicle models should provide vibration motion up to that range. Typical vehicle models do not predict such vibration levels, and typical military digital terrains do not contain elevation profiles of sufficient resolution to excite models up to that range. In order to solve this problem, the HGTM STO includes an effort to develop a continuous, analytical description of a terrain profile that statistically represents the real world terrain [7]. Spline functions are overlaid the lower resolution terrain surface polygons with the end result that the digital terrain contains sufficient spectral content to drive the vehicle models. In essence, bumps are sprinkled on large polygonal surfaces (Figure 2). The vehicle models then act as filters, just like the real systems, that transmit the energy to the motion simulator which then imparts the energy to the occupant.

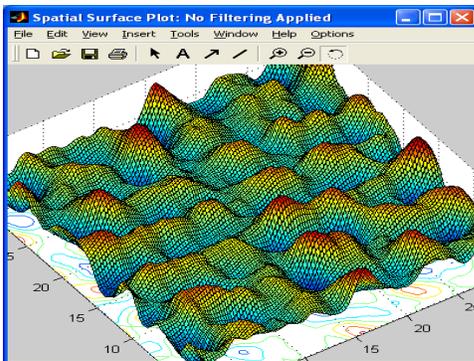


Figure 2: Continuous Resolution Elevation Profile [8]

2.1.4 Physics-Based Real-Time Terramechanics

The interaction between a mobile ground platform and a deformable terrain surface is perhaps the most important aspect of ground mobility to model

accurately for off-road vehicles. Ironically, it is also the most difficult and the least understood in terms of deterministic physics-based modeling methods. The tire is a complex force generating device; terrain is a complex, deformable boundary condition. Predicting the interaction between the tire and deformable terrain presents a significant technical challenge. The same arguments apply for tracked vehicle systems.

The single most challenging aspect of the HGTM STO is to predict this interaction, and to do so within the constraints of real-time simulation. In addition, it is desirable to be able to define a modular interface between the vehicle and the terrain that allows the vehicle models and the terrain models to be developed independently and in a conceptually separated manner. The approach is similar to the concept of separating the subsystems and components that make up a vehicle mobility system using interfaces that parallel physical interfaces.

The general theory used in the HGTM STO development is that a vehicle contact patch flows over the terrain with a given pressure and velocity distribution. The patch is divided into nodes with associated areas. The entire patch travels with a given velocity and each node contains a pressure, area, and slip velocity. The initial implementation of predicting the forces between the tire and terrain uses the WES numeric, developed by the GSL, which is based upon laboratory soil bin tests, and CRREL winter traction equations developed from experimental data [9]. Future work will consider three-dimensional lumped parameter models of the terrain [10].

2.1.5 Deformable Terrain Effects

The vibration response of a vehicle is influenced by the profile of the terrain. The forces that generate locomotion and direction are influenced by the terrain surface characteristics. Deformable terrain influences the entire spectrum of vehicle response – vibration, forward acceleration, top speed, braking, turning capability, and directional stability.

The terramechanics methods described above to predict the forces between the tire/track and the terrain also result in a calculation of the tire/track sinkage into the terrain. The value is retained as a “delta-z” layer throughout the simulation (Figure 3). This allows rearward traction elements to experience the deformation created by forward traction elements, follow-on vehicles to experience the beat up terrain from forward vehicles, and small vehicles to experience the ruts created by large vehicles. In addition, the terrain surface characteristics are

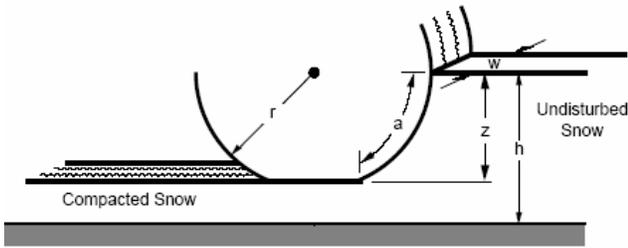


Figure 3: Terrain Deformation - Sinkage in Snow [9]

modified with trafficking [11]. As a side benefit, once a method is developed that allows for run-time modification of terrain characteristics, the effects of weather are able to be added to the simulation.

2.1.6 Complex Obstacles and Urban Mobility

Urban terrain, from a ground platform mobility point of view, is a set of complex obstacles along with some multi-elevation surfaces (including building interiors with steps). The basic building blocks of the STO – high-resolution vehicle models and terrain elevation profiles, along with collision detection and response and the negotiation of obstacles, will be assembled together in order to study ground maneuver in urban operations.

The HGTM methods being developed for obstacle negotiation consider three situations. The first is a static, nondeformable obstacle being traversed (or impacted) by a dynamic vehicle. This is an extension of the vehicle-terrain interface, along with collision detection and response capabilities. The second case involves movable objects. The HGTM STO approach to this problem is to set up various obstacles in a real world situation, attempt to move the obstacles with real vehicles, and measure the force required to move the obstacle. These experiments will then result in a set of parametric equations that will be used for movable obstacles. The third and most challenging case of obstacle negotiation is deformable obstacles. The approach of the HGTM STO to this problem will be a combined structural mechanics solution and experimental relation solution. Structural solutions will be employed where force-deformation relations are known. Experimental data will be used for other cases, such as rubble piles, with the, as yet unsolved, problem being the characterization of the rubble pile (or, in a general sense, the characterization of the deformable obstacle).

2.2. Motion Effects Mitigation

The third M&S pacing technology that the HGTM STO involves the use of the mobility models within human experimentations to examine the effects of

motion on warfighter performance. Mitigation techniques being considered for investigated involve both “machine” modifications (ground platform chassis and suspension design, visual devices such as virtual windows and artificial horizons, three dimensional audio, a variety of operator control devices and displays) and “man” modifications (autogenic training techniques and self-efficacy methods) where the warfighter is taught ways to be more aware of his actual performance and to control his behavior internally to reduce the negative effects of motion. This paper addresses the vehicle and terrain modeling aspects of the HGTM STO and leaves further discussion of motion mitigation techniques to a future paper.

3. Application of HGTM STO Products

3.1. Distributed Mobility Model Component

The vehicle and terrain models being developed under the STO are used for internal warfighter in the loop experiments, but are extensible for use as semi-automated forces or as robotic platform models. The basic vehicle and terrain models, with embedded driver models are packaged with a well-defined external interface (Figure 6, next page) that allows them to function as a high-fidelity mobility component of a larger simulation. This product is called the Vehicle Dynamics and Mobility Server (VDMS) [12].

VDMS entities are controlled via desired speed and heading instructions, a series of waypoints (route), or tele-operation commands (brake, throttle, steer, and gear). VDMS may operate stand-alone, or it may be used within a distributed simulation environment and used to update ground platform mobility state values. The stand-alone version provides an off-line analytical tool and is used within the HGTM STO Verification & Validation (V&V) process. The distributed version is being used in the RDECOM Modeling Architecture for Technology Research and Experimental (MATREX) and the Development Test Center (DTC) Virtual Proving Ground (VPG) projects (Figure 4).



Figure 4 VDMS Executing Hard Brake and Turning for DTC VPG Operations[6]

Replacing the driver models within VDMS with real embedded autonomous navigation system (ANS) software allows VDMS to replicate unmanned ground vehicles. For use in the development and evaluation of robotic vehicle concepts, the ground vehicle models may be connected to terrain sensor models (or provided with equivalent data) and integrated with embedded sensor fusion and autonomous control algorithms. This could include either real-time or high-resolution models depending on the particular experiment or whether the sensor fusion or autonomous control algorithms require real-time systems.

HGTM STO developers are searching for ANS software and sensor models in order to demonstrate the capability for robotic system development.

The current application of VDMS is to establish a method of improving the resolution and fidelity of the ground vehicle models that are used in computer generated forces, when needed (Figure 5). This task primarily involves either a large number of computer processors or a significantly reduced order model that is consistent with the real-time and high-resolution

models (which should be consistent with each other). High performance computing facilities are used by the STO developers to execute vehicle models, and multiprocessor capabilities are being used in order to

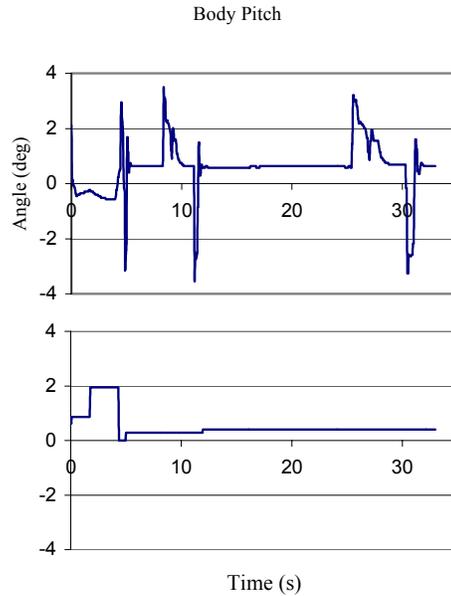


Figure 5 Comparison of VDMS and OneSAF Test Bed Pitch Motion

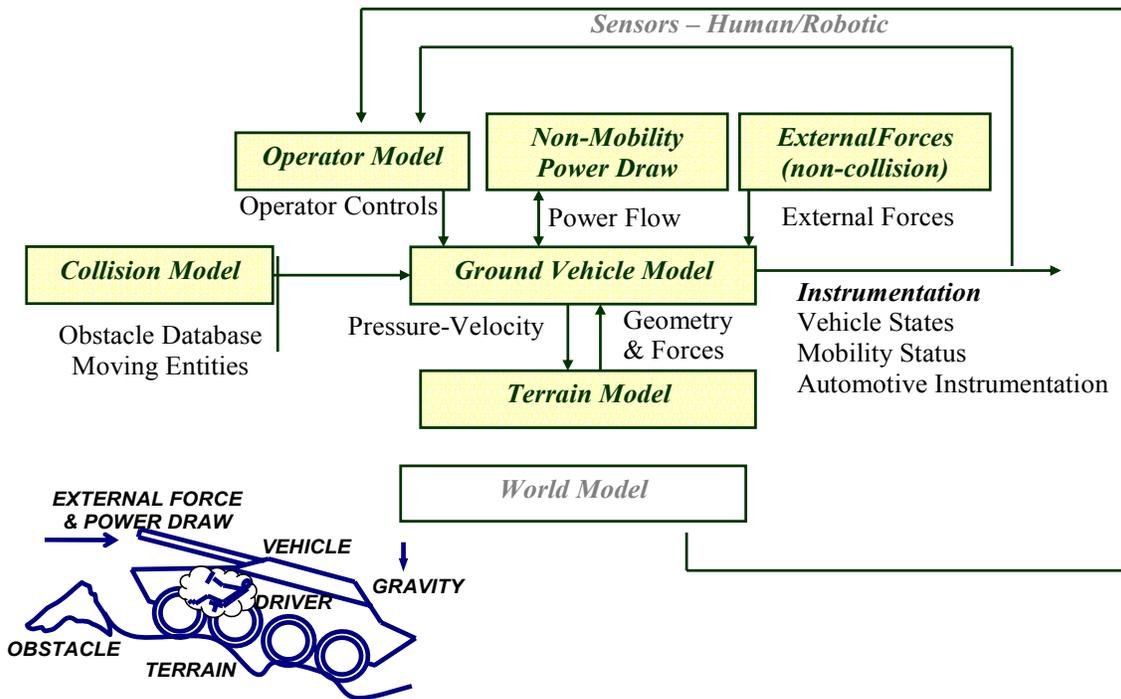


Figure 6 VDMS Interfaces

execute large numbers of ground platform entities within a distributed environment. It should be noted that higher resolution models are not always required, and when not required, the complications associated with increasing resolution are not always worth the effort.

3.2. Warfighter Machine Interfaces & Vehicle Design for Improved Human Performance

The high fidelity motion simulators combined with the vehicle and terrain models generated by the HGTM STO are used within the scope of the HGTM STO towards the quantification and evaluation of human performance within a motion environment [13]. Once these measurements are possible within a controlled laboratory environment, vehicle design efforts that take into account the human aspect of the vehicle system are possible at the total system level. Design efforts include the warfighter machine interface in terms of display devices, information contained in the displays, operator controls, and three-dimensional audio.

From a total system perspective, design efforts also include the vehicle suspension system and how the vehicle dynamic characteristics affect human performance. These types of studies are possible within the context of HGTM STO, since the models are capable of design level of detail.

The HGTM experimentation plan addresses two issues directly of concern to the US Army's FCS – on-the-move operations and size and weight constraints of crew station design. The first issue addresses problems related to operations that occur in a dynamic environment that previously occurred in a stationary environment - or at operating tempos significantly less than what is expected of FCS. The second issue directly impacts the design of the crew station in terms of display and control devices.

Experiments of this type are usually examined through the use of training simulators or existing real systems that surrogate future systems. Training simulators are constrained by the idea that they will generally be expected to be employed as embedded packages on the future systems and, as such, are limited in the amount of computational hardware and resources that may be utilized. This creates the need to trade the amount of resolution available within the modeled environment, resulting in vehicle models are not sufficient for design-level trade studies.

Existing systems that surrogate the future conceptual systems are constrained in the sense that the surrogated system is, by definition, not the future system and by

the requirement that a real world environment (typically a proving ground or operational test site) must be used to operate the surrogated system. Also, the possibility of performing trade studies on the design of the platform itself is lost due to the employment of already existing hardware.

Through the use of a high-resolution, controlled, laboratory environment - unrestricted by typical on-board computational resources - and the links to distributed simulation environments, the experimental capability provided by the HGTM STO products allow FCS system designers to explore design concepts and estimate the operational utility of the system design through the linkage of engineering models and operational simulations.

Specific experiments already executed or planned for the remainder of the HGTM STO include:

1. Occupant reach and tactile operation in a dynamic environment
2. Influence of vehicle design (active, semi-active, passive) on driver, gunner, commander performance[14]
3. Influence of display type (flat panel versus head mounted display) on driver and/or commander performance
4. Influence of display device field of view on driver performance
5. Teleoperation of a robotic vehicle from a moving platform and methods of mitigating motion sensory mismatch effects on the operator[15]
6. Methods of control for multiple robotic assets including mobility, surveillance, and targeting tasks
7. Use of three-dimensionally audio effects and speech recognition technologies towards enhancing system control
8. Methods of various levels of adaptive automation towards control of robotic platforms.

3.3. Army Power Budget Model and Power System Duty Cycle Experiments

The HGTM STO developers are working with the Power and Energy Hardware in the Loop Systems Integration Laboratory STO and the Pulse Power for FCS STO developers in order to develop what is known as the Army Power Budget Model [16]. The Army Power Budget Model will integrate dynamic models and hardware components of power producing systems (i.e. hybrid power train systems), a hybrid set of dynamic and static power consumption models and hardware components (i.e. mobility, survivability, lethality, C4ISR subsystems), and a library of mission profiles (duty cycles) to which future military vehicles

will be subjected. The integrated set of models will be designed to provide both a desktop analysis capability and a distributed simulation capability.

Future vehicle platforms will not only serve typical mobile combat and tactical functions, but will also serve as a mobile power source for the future force. In order to effectively design a power management system for the US Army's Future Combat System, accurate estimates of power loads throughout the complete range of operations are required. Little data exists on power flows involved in current military operations and less data exists on the power requirements of a FCS vehicle. What is known of FCS operations to date has been determined from inventive thinking combining concepts of operations and extrapolation of the current state of technology. New concepts and force structures have been investigated using modeling and simulation.

The HGTM STO products will be used to estimate mission profiles, or duty cycles, using constructive and virtual simulations. Data from RDECOM and TRADOC simulation experiments will be used to estimate the power requirements during future army operations. The experiments will involve FCS operations of movement to contact and decisive operations. Three simulations will be employed for this project.

The first duty cycle will come from Combined Arms and Support Task Force Evaluation Model (CASTFOREM). An FCS scenario will be executed using CASTFOREM and the activity of each vehicle will be examined. The actions of these vehicles during the simulation will be identified as the first duty cycle developed under this project.

The second set of duty cycles will be developed through the extraction of data from a TRADOC warfighter exercise. Similar to the CASTFOREM experiment, the "activity" of a select set of vehicles will be examined and the power consumption associated with mobility, lethality, survivability, and battle command will be examined to develop a duty cycle.

The third duty cycle estimate will come from a simulation experiment that will connect a virtual systems integration laboratory in Warren, MI to a hybrid power train hardware systems integration laboratory in Santa Clara, CA, thereby involving significant hardware components and embedded software control systems. VDMS will provide mobility functions with the power train components

being provided through a connection to the Santa Clara, CA systems integration laboratory. VDMS will operate within a TARDEC developmental crew station with an embedded simulation system used to represent non-mobility systems and the external environment. Unlimited power will be available for non-mobility systems in order to determine power requirements.

The three sets of experiments range from broad-scoped with large numbers of low resolution entity models to narrow-scoped with small numbers of high resolution entities. The end goal of these experiments is to provide mission profiles, or duty cycles, to be used within the desktop version of the Army Power Budget Model. Then, an optimized power management algorithm will be developed and the third experiment will be rerun without the assumption of unlimited power for non-mobility systems in order to evaluate the effectiveness of the control algorithm towards meeting the power requirements.

3.4. Virtual Evaluation Suite (VES)

The off-line, stand alone version of VDMS described above will be used both as an analysis tool to evaluate vehicle designs and as the core V&V tool for HGTM STO developed models. Since VDMS is flexible in how it is controlled, a wide set of simulated test conditions may be set up and executed.

This is a tool is called the Vehicle Evaluation Suite (VES) [17]. The goal of this project is to create a virtual evaluation course that contains a full spectrum of automotive performance tests over geographically distant terrains and under various weather conditions. Standard output reports and full design and performance characteristic sheets will be automatically generated. The VES is a test bed within which the vehicle modeling technologies developed under the STO are tested and evaluated.

Five sets of test suites are planned at this stage;

1. Interface Compliance/Common Problem Test Suite: check the vehicle model interface compliance and common problems
2. Vehicle dynamics suite: evaluates typical vehicle stability, handling, and ride and shock quality
3. Soft-soil Mobility suite: evaluates soft-soil capabilities in varying soils and soil conditions
4. Obstacle suite: evaluates obstacle negotiations including gaps and walls and complex obstacle groupings
5. Power train suite: evaluates propulsion system performance (acceleration and braking) and fuel consumption/power management.

3.5. Unmanned Ground Vehicle Demonstrations

HGTM STO developers are developing a series of demonstrations in order to set timelines for technology development efforts and to demonstrate capabilities [18]. The demonstration is based upon manned/unmanned vehicle scenarios specifically intended to mimic the Robotic Follower (RF) mission. The scenario includes one manned vehicle and four robotic vehicles operating in two configurations – a “pull” and a “push” configuration. Each Integration threshold adds a capability package to the HGTM simulations, most of which were previously discussed in this paper. The final integration threshold goal includes all STO developed vehicle and terrain modeling technologies and inserts them into a large scale distributed simulation environment involving the robotic system configurations operating within an urban environment.

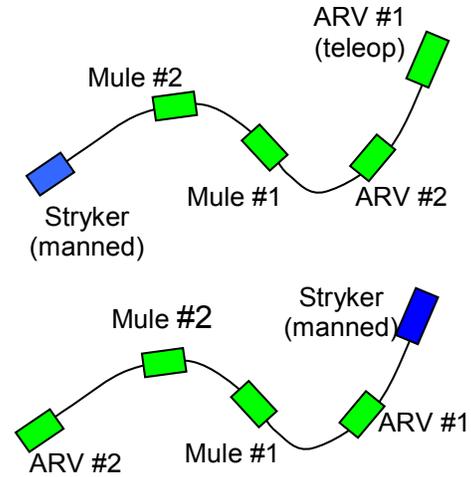


Figure 7 “Push” (Top) and “Pull” (Bottom) Configuration of Robotic Convoy

Table 1 HGTM STO Integration Thresholds

Vehicle Models	Collision Detection & Response	Terrain Query	Database	Robotics	Network Interoperation
Stryker	None	Coarse Elevation	OpenFlight	None	Internal
+ARV		+Continuous Elevations	+Open Flight with Improved Soil Properties	Blind/Dumb followers	
+ Mule		+Terramechanics			
		+Deformable			
INTEGRATION THRESHOLD #1 (Vehicle-Terrain Interface)					
	Vehicle -Terrain		Open Flight with Trees & Buildings		
	+ Vehicle-Solid				
	+ Vehicle-Vehicle				
	+Vehicle – Movable				
	+Vehicle – Deformable		+Deformable Object		
INTEGRATION THRESHOLD #2 (Collisions)					
				Coarse Robotic Monitor & Control	
				Embedded Autonomous Navigation System (ANS)	
				+ Inter-'bot comms	
				+Teleop Override “Push” & “Pull” configuration	
INTEGRATION THRESHOLD #3 (Robotics)					
			CTDB		HLA position reporting
			OTF		+ OTB Monitoring
			Multi-Elevations & Complex Obstacles		HLA interface to VDMS
INTEGRATION THRESHOLD #4 (URBAN TERRAIN + HLA)					
+MCS	External Entities	Shared Terrain	Terrain Server	External Sensors Models	Long-Distance Distributed Simulation
+RS&V					
INTEGRATION THRESHOLD #5 (CAPSTONE)					

4. Simulation and Simulator Validity Measurements

The ultimate goal of the HGTM STO is to provide models of FCS ground platform conceptual chassis & suspension designs – and mock-ups of crew station designs - with a resolution/reconfigurability that is sufficient for an engineer to perform design trade studies (and for the government to provide an objective evaluation of the conceptual design) within a controlled laboratory environment. The ultimate metric by which the HGTM STO should be measured is the extent that the tools developed by the STO developers are successful in achieving this goal, along with the extent that measured human performance is improved through motion mitigation techniques.

The method by which such a task is measured is not straight forward, however. The validation efforts of the HGTM STO are two-fold. First is a bottoms-up approach in which each component of the simulation is compared to a real-world referent and the degree to which the simulation differs from the referent is both measured and the source of error is identified.

The second method of simulator validation is an “end effect” method that directly identifies how well STO experiments capture human performance effects. A simulation experiment is created that, to the greatest extent possible, recreates a real world experiment. The human subject’s performance on a given task is measured during both the simulated experiment and the real experiment and, again, a comparison is made. In addition, the HGTM STO validation methods for the human experiments also consider longer lasting effects on human performance. Immediately upon completing the main task within a vehicle, a set of questions and fairly simple tasks are performed by the subject. The identical set of questions and tasks are used for both the real world experiment and the simulated experiments, and the results of the two situations are compared.

5. References

- [1] Lamb, Reid, Truong, Weller, “Virtual Proving Ground Terrain Validation”, NDIA Intelligent Vehicle Systems Symposium, Paper IVSS-2002-MAS-04, June 2002.
- [2] Meldrum, Paul, McDowell, Smyth, “CAT-ATD/RMS Driving FOV Experiment: Preliminary Results and Lessons Learned”, NDIA Intelligent Vehicle Systems Symposium, Paper IVSS-2004-MAS-01, June 2004.
- [3] McDowell, “Performance decrements associated with sensory-mismatch: Driving decrements associated with a disparity between simulated visual scenes and simulated vehicle motion”, Draft Human Use Protocol, spring 2004.
- [4] Nunez, Nham, Lee, Richmond, Ahlvin, Weller, Lamb, “Vehicle Terrain Interface Application Programming Interface Specification”, Aug 2004.
- [5] Nunez, “Vehicle Dynamics and Mobility Server (VDMS) Verification and Validation Plan”, U.S. Army RDECOM TERDEC, Ground Vehicle Simulation Laboratory. 8 August 2003.
- [6] Docimo, Hinkle, Sauerborn, “Vehicle Dynamics in the Virtual Proving Ground (VPG) Synthetic Environment Integrated Testbed (SEIT), Simulation Interoperability Workshop, Paper 04S-SIW-034, spring 2004.
- [7] Reid, A., “Development of a High-resolution Virtual Terrain to Support the Development and Testing of Intelligent Systems”, Paper IVSS-2002-MAS-04, NDIA Intelligent Vehicle Systems Symposium, Traverse City, MI, June 2002.
- [8] Morrison, Romano, Reid, Gorsich, “High-Frequency Terrain Content and Surface Interactions for Off-Road Simulations”, SAE Commercial Vehicle Engineering Congress & Exhibition Technical Program, Paper 04TB-128, Fall 2004
- [9] Richmond, Jones, Creighton, Ahlvin, “Estimating Off-Road Ground Contact Forces for Real Time Motion Simulator”, SAE Commercial Vehicle Engineering Congress & Exhibition Technical Program, Paper 04TB-122, Fall 2004.
- [10] Creighton, Daniel C.; Walker, Robert E., “A Two-Dimensional Vehicle-Media Interaction Model for Wheeled Vehicles”, presented at the Wheels and Tracks Symposium, Royal Military College of Science, Shrivvenham, Swindon, UK, 9-11 Sep 1998
- [11] Shoop, Coutermarsh, Reid, “All-Season Virtual Test Site for a Real-Time Vehicle Simulator”, SAE Commercial Vehicle Engineering Congress & Exhibition Technical Program, Paper 04TB-127, Fall 2004.
- [12] Brudnak, Nunez, Reid, “Real-time, Distributed Ground Vehicle Dynamics and Mobility Simulation”, SAE World Congress and Exposition, Paper 2002-01-1178, March 2002.
- [13] McDowell, Nunez, Paul, “Virtual Simulation Experiments in a Six DOF Motion Environment for the Evaluation of C2 on the Move and Human Robot Interfaces”, Army Science Conference Summary Document, Dec 2004.

- [14] Zywiol, Oldaugh, "NLOC/MCS Experiment Overview", experiment summary document, 19 April 2004 (limited distribution).
- [15] Hill, Stachowiak, Tauson, "Soldier Performance in the Enclosed Compartment of a Moving Vehicle, Proceedings of NATO Symposium: Habitability of Combat and Transport Vehicles: Noise, Vibration and Motion, Oct 2004.
- [16] Nunez, "Power & Energy / HGTM Integrated M&S", Kickoff Meeting Read-ahead Document, July 2004.
- [17] Nunez, Reid, Jones, Shoop, "A Virtual Evaluation Suite for Military Ground Vehicle Dynamic Performance and Mobility", SAE Truck and Bus Exposition, Paper 2002-01-3049, Nov 2002.
- [18] Brudnak, "STO IV.GC.2003.01 FY04 Demonstration Scenario" (Draft), spring 2004.

6. Author Biographies

Patrick Nunez is a mechanical engineer and a member of the TARDEC Ground Vehicle Simulation Laboratory. He has been worked in the area of real-time simulation for eight years.