

AFRL-RW-EG-TP-2009-7029

Optic Flow for Enhanced Navigation and Seeker Exploitation (OFFENSE)

Jimmy E. Touma
Air Force Research Laboratory
Munitions Directorate
AFRL/RWGI
Eglin AFB, FL 32542-6810



March 2009

TECHNOLOGY MILESTONE

This paper has been submitted to AFRL to be published in the AFRL Technology Milestone. The author is a U.S. Government employee working within the scope of his/her position. Therefore, this is a work of the U.S. Government and is not subject to copyright in the United States.

This paper is published in the interest of the scientific and technical information exchange. Publication of this paper does not constitute approval or disapproval of the ideas or findings.

DISTRIBUTION A: Approved for public release; distribution unlimited.
Approval Confirmation 96 ABW/PA # 05-13-08-256; dated 13 May 2008.

AIR FORCE RESEARCH LABORATORY, MUNITIONS DIRECTORATE

■ Air Force Material Command ■ United Air States Force ■ Eglin Air Force Base

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) 24-03-2009		2. REPORT TYPE Interim Report		3. DATES COVERED (From - To) March 2007 - March 2009	
4. TITLE AND SUBTITLE Optical Flow for Enhanced Navigation and Seeker Exploitation				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62602F	
				5d. PROJECT NUMBER 2068	
6. AUTHOR(S) Jimmy E Touma				5e. TASK NUMBER 30	
				5f. WORK UNIT NUMBER 46	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Munitions Directorate AFRL/RWGI Eglin AFB, FL 32542-6810				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-RW-EG-TP-2009-7029	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Munitions Directorate AFRL/RWGI Eglin AFB, FL 32542-6810				10. SPONSOR/MONITOR'S ACRONYM(S) AFRL-RW-EG	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) Same as Block 8	
12. DISTRIBUTION/AVAILABILITY STATEMENT DISTRIBUTION A: Approved for public release; distribution unlimited. Approval Confirmation 96 ABW/PA # 05-13-08-256; dated 13 May 2008.					
13. SUPPLEMENTARY NOTES See 'cover page' for pertinent metadata information.					
14. ABSTRACT Modern navigation systems rely heavily on the Global Positioning System (GPS) to correct inertial measurement unit (IMU) error drifts. However, due to unreliability of GPS in certain scenarios, there is a great desire to create an inexpensive navigation solution to augment GPS based navigation. Vision-aided navigation is such a solution where information from captured imagery can supplement inexpensive on-board IMUs in bounding navigational errors that arise from IMU drifts. Optical flow information obtained from this imagery allows for the evaluation of structure-from-motion, motion-from-structure, and egomotion.					
15. SUBJECT TERMS Optical Flow, sensor fusion					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON Jimmy E Touma
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (Include area code)

AFRL/RWG Tech Milestone

Optic Flow For Enhanced Navigation and Seeker Exploitation (OFFENSE)

Jimmy E Touma

May 6, 2008

GPS plays an important role in the guidance and navigation of small munitions and UAVs by providing positional updates which bounds the drift of the onboard inertial navigation system (INS). However, GPS is susceptible to jamming and is unreliable or unavailable in urban canyons and indoors. To mitigate GPS loss, AFRL/RWG is investigating an innovative approach based on all source adaptive fusion of any available information encompassing passive imaging data, digital elevation terrain data, IMU/GPS, altimeters, and star tracker. The approach provides continuous navigation through a non-GPS environment and yields an improved navigation in the presence of GPS. Moreover, the approach provides reduced target location error and also moving target indication.

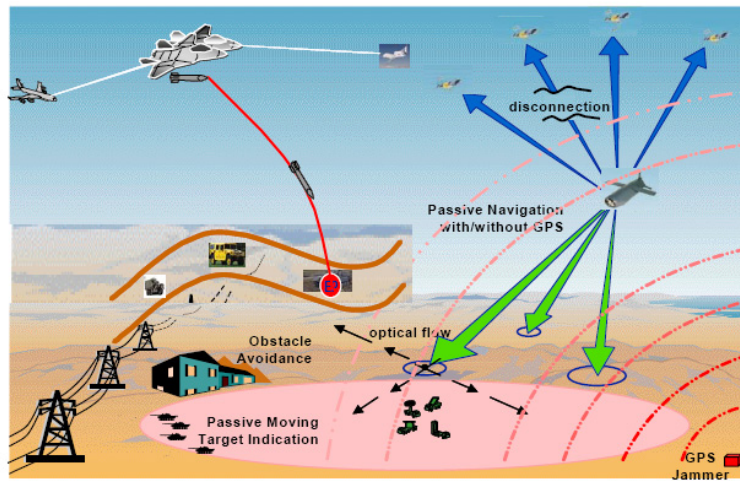


Figure 1: Video-based Navigation has a Wide Range of Applications.

There is a critical need to provide fully autonomous robust navigation capability in GPS jamming or signal interruption environment. The US Air force, Navy, and Army are keenly interested in such capability to reduce the vulnerability of GPS navigation that can be to either deliberately or unintentionally interrupted. The field of computer vision has witnessed many approaches for computing ego-motion which estimates an observer's movement (sensor or biological organism) from optical flow measurements. Optical flow is defined as "the apparent motion of the brightness patterns". The optical flow is characterized by a field of 2-D velocity vectors which are the projections of the 3-D velocity vectors of the surface points onto the image plane. The 2-D velocity vectors are derived from sequences of images which can then be used to infer the

3-D velocity of the imaging platform. Since the optical flow is a projection of a 3-D velocity vector onto a 2-D image plane, there is an inherent ambiguity in inferring the 3-D velocity. The observed optical flow therefore needs to be fused with other measurements such as depth to remove the ambiguity and to provide an estimate of the 3-D velocity vector of the imaging platform. Knowing the observer velocity vector and the last GPS position estimate will enable, in theory, navigation in non-GPS environment. Using only optical flow measurements for navigation in non-GPS environment encounters difficulties due to the variation of depth across the image field and the presence of noise in the sequence of images. Other approaches combine precision radar sensors with digital terrain elevation databases to serve as a back-up to the GPS system. Such approaches require high-level of accuracies of digital terrain data and radar sensor.

An innovative approach developed by Northrop Grumman and the AFRL Munitions Directorate, working to adaptively fuse in real-time all available navigation data such as IMU/GPS, altimeters, star tracker, passive imaging sensor, and digital elevation database. The integration of passive imaging sensors has some important advantages. Foremost, the sensors are completely passive, and can operate in an environment where the GPS signal may be difficult to receive. Secondly, the sensors are immune to disruptions in the radio spectrum. The proposed approach has been implemented and demonstrated high quality navigation performance.