

Compact Reliable Robust (CORE) Power System for Auxiliary Power Applications

Mehdi Namazian, Kenneth Lux,
Guha Venkataraman, William Elder,
and Archana Bhalerao

Altex Technologies Corporation
244 Sobrante Way
Sunnyvale, CA 94086

Dan Maslach and
Kevin Centeck

U.S. Army Tank-Automotive
Research, Development, and
Engineering Center (TARDEC)
Warren, Michigan 48397

ABSTRACT

Under support from TARDEC, an effort to develop a 10 kW_e compact reliable robust power system for combat-vehicle applications is well underway. This system operates on battlefield-spec JP-8 to provide silent auxiliary power for the vehicle. The reformer converts JP-8 into a hydrogen rich reformat. The power system combines the reformer with a High-Temperature PEM (HTPEM) fuel-cell stack that retains the quick startup time of a PEM fuel-cell stack while dramatically improving the tolerance to fuel impurities to levels closer to that of SOFC stacks. The paper covers the power system development with the emphasis on the 300-hour demonstration of the 10 kW_e reformer operating on JP-8 and its current integration with the fuel cell to produce the 10 kW_e power system for 1000 hour demonstration and delivery to TACOM.

INTRODUCTION

A fuel-cell based power system can meet the Army's ground-vehicle APU demands while maintaining silent-watch capability. The main challenges in developing such an APU are 1) conversion of JP-8 to an ultra-low-sulfur hydrogen-rich reformat and 2) utilization of a robust fuel-cell stack that can undergo rapid startup. Under TARDEC support, the development team has overcome these challenges in developing a complete 10-kW_e JP-8-to-power solution.

Under Segment I, which ran from May 2006 to May 2008, the team developed and demonstrated the compact reliable robust reformer that converts JP-8 to an ultra-low-sulfur hydrogen-rich reformat, thus overcoming the first challenge noted above. The reformer meets the requirements listed in Table 1.

Under Segment II, the Altex-led team is integrating the reformer with CEP's robust High-Temperature PEM (HTPEM) fuel-cell stack to produce the 10-kW_e JP-8 driven APU system. The 160°C operating temperature of the HTPEM fuel-cell stack retains the quick startup time of a PEM fuel-cell stack and its robustness while dramatically improving its tolerance to fuel impurities – closer to levels for SOFC stacks. This tolerance has been demonstrated by JP-8-to-power tests, of which some are presented in this paper. Also, the stack robustness has been demonstrated by thousands of hours of field tests conducted by CEP on pre-production natural-gas-fired systems.

This system is being fabricated for delivery to TARDEC after a 1,000 hour demonstration. This paper summarizes the

results of Segment I and some of the activities of Segment II.

The power system builds upon and contributes to the proven desulfurizer and reformer systems that have been delivered for independent testing. Presented in Figure 1a is a photograph of a SOFC reformer that was delivered to Army Research Laboratory (ARL). Presented in Figure 1b is a photograph of the 2 kW_e reformer for HTPEM that was delivered to CERDEC. The combination of the experience gained from delivering these reformers, the use of a HTPEM fuel-cell stack, and transitioning to a microprocessor-based control system enables the production of a compact and robust JP-8-driven APU system that can start within half hour from cold conditions.

Table 1: TARDEC Segment I requirements.


Parameter	Key Requirements
Power Capability	10 kW _e (net) 28 VDC ± 2 VDC
Application	Operational brass board
Fuel	JP-8
Fuel Sulfur Content	400-3000 ppm _w
Fuel Aromatics	10-14%
Turn-Down Ratio	10:1
Operating Temperature	Ambient 'lab' temperatures
Durability	300 hours
Start Up Time	30 minutes
Reformat Flow	12-120 SLPM H ₂
Reformat Sulfur Level	Less than 1 ppmv

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 17 AUG 2009	2. REPORT TYPE N/A	3. DATES COVERED -			
4. TITLE AND SUBTITLE Compact Reliable Robust (CORE) Power System for Auxiliary Power Applications		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) Mehdi Namazian; Kenneth Lux; Guha Venkataraman; William Elder; Archana Bhalariao; Dan Maslach; Kevin Centeck		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Altex Technologies Corporation 244 Sobrante Way Sunnyvale, CA 94086		8. PERFORMING ORGANIZATION REPORT NUMBER 20077			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000		10. SPONSOR/MONITOR'S ACRONYM(S) TACOM/TARDEC			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) 20077			
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT Under support from TARDEC, an effort to develop a 10 kWe compact reliable robust power system for combat-vehicle applications is well underway. This system operates on battlefield-spec JP-8 to provide silent auxiliary power for the vehicle. The reformer converts JP-8 into a hydrogen rich reformat. The power system combines the reformer with a High-Temperature PEM (HTPEM) fuel-cell stack that retains the quick startup time of a PEM fuel-cell stack while dramatically improving the tolerance to fuel impurities to levels closer to that of SOFC stacks. The paper covers the power system development with the emphasis on the 300-hour demonstration of the 10 kWe reformer operating on JP-8 and its current integration with the fuel cell to produce the 10 kWe power system for 1000 hour demonstration and delivery to TACOM.					
15. SUBJECT TERMS Presented at NDIAs Ground Vehicle Systems Engineering and Technology Symposium (GVSETS), 17 22 August 2009, Troy, Michigan, USA					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

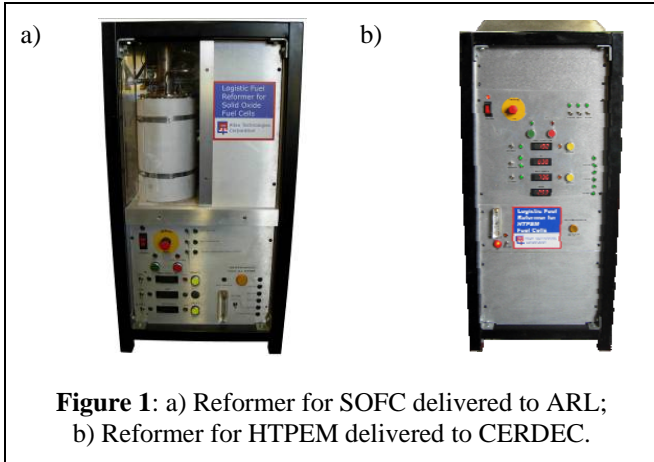

Reformer Development and Testing

To control the risk of converting the JP-8 fuel to a hydrogen-rich reformat, the reformer consists of two subsystems, a fuel preprocessor (FPP) and a fuel processor (FP). Each subsystem is designed to attack specific issues with reforming the fuel [1,2,3,4]. The FPP removes sulfur and the majority of carbon-producing compounds in the fuel and diverts them to a burner to produce heat needed by the reformer system. The FP converts the FPP-cleaned fuel into a reformat suitable for use in a HTPEM fuel-cell stack.

During Segment I of the program the materials needed for the FPP and FP were identified and/or developed followed by qualification for the full-scale system. Sample data from these material-qualification activities are presented in Figure 2. Presented in Figure 2a are data from the qualification of the regenerable adsorbent that is used in the FPP. This material was continuously improved to meet the program targets and, as shown, the material met the system target for at least 300 system-hours. Presented in Figure 2b are data from the qualification of the main catalysts utilized in the FP for nearly 600 hours.

Similar to material development, the system components were developed, qualified, and integrated to produce the 10-kW_e reformer. As per program requirements, the system was demonstrated for 300 hours following a test plan that was developed with TARDEC.

Tests were conducted using TARDEC-supplied JP-8. These fuels included a baseline fuel with 525 ppm_w sulfur and a high-sulfur fuel with 625 ppm_w sulfur. Table 2 lists key characteristics of these fuels. It should be noted that this system is designed to operate on field-spec JP-8 that can contain up to 3,000 ppm of sulfur. However, during Segment I, no source of JP-8 with higher sulfur content was identified in US. A source of JP-8 with 2,700 ppm_w sulfur has been identified, and the system will be tested with this fuel during Segment II of the program. Segment I tests of the reformer included rigorous shakedown, load-variation, turn-down,

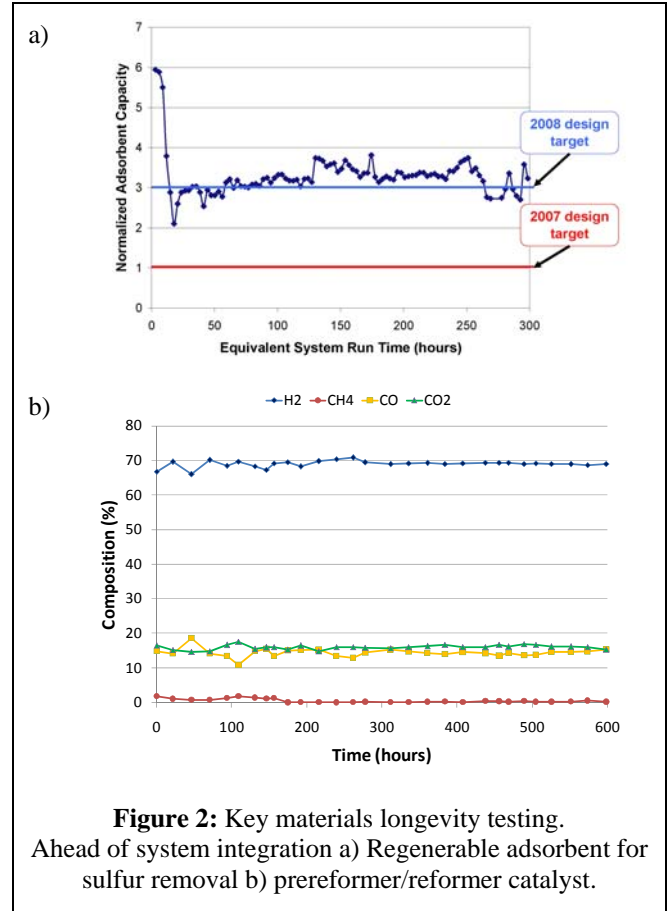


Figure 2: Key materials longevity testing. Ahead of system integration a) Regenerable adsorbent for sulfur removal b) prereformer/reformer catalyst.

and longevity tests. In particular, the system demonstrated full-scale operation (10 kW_e) and over 10:1 turn-down (<1 kW_e).

Presented in Figure 3 are the longevity test data. The data are plotted as the equivalent fuel-cell power corresponding to the flow of H₂ produced by the reformer over the 300-hour longevity test. The data presented in Figure 3b are the inlet fuel sulfur and the reformat composition (H₂ and CO). As shown, during the first 50 hours the system was tested on JP-8 with 625 ppm_w of sulfur followed by 250 hours of testing on the baseline JP-8 fuel with 525 ppm_w of sulfur. Despite the differences in the level of sulfur in the parent fuel and the planned load variation, the reformer produces a constant composition of 75% H₂ and 1% CO. This composition is compatible with the CEP HTPEM fuel cell.

Table 2. JP-8 properties used to demonstrate the reformer

TARDEC-Supplied Fuel	Sulfur (ppm _w)	Total aromatics (Mass %)	Poly-aromatics (Mass %)
Baseline JP-8	525	20.5	1.9
High-Sulfur JP-8	624	19.0	2.0

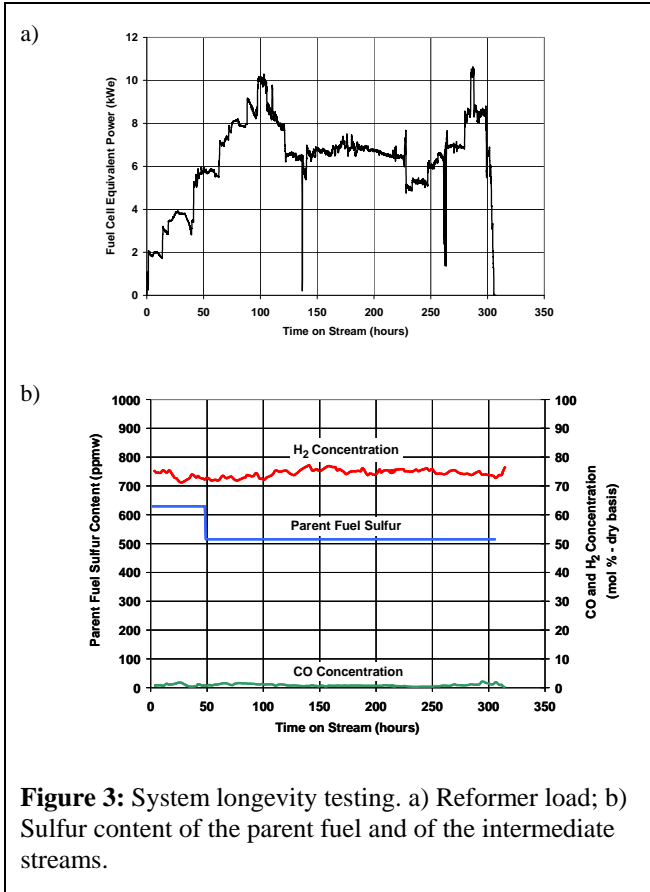


Figure 3: System longevity testing. a) Reformer load; b) Sulfur content of the parent fuel and of the intermediate streams.

As shown in Figure 3a, the unit was started at a load of 2 kW_e and increased stepwise to 10 kW_e for the first 100 hours of testing. It was then brought down to a baseline load level of 6-7 kW_e. The system was operated at the baseline load level for about 100 hours (between hours 125 and 225). The unit was paused briefly at around 135 hours due to an unrelated facility-maintenance activity. What appears to be noise in the data at around 260 hours is transient-load testing.

The data from this transient-load testing are presented in Figure 4. This test, based on the original test plan, was to demonstrate the turndown from baseline load (6-7 kW_e) down to a low-level load (0.5 kW_e) within a timeframe of about 30 minutes. As shown in Figure 4, the first three cycles were performed at a rapid frequency of about 5 minutes. The time for the FP system to ramp up from about 0.5 kW_e to 7 kW_e was about 2 minutes. The other 5 cycles were performed at a slower, controlled rate, taking about 25 minutes to ramp up from a low-level load to the baseline-level load. This test demonstrates the rapid response of the system and the potential to match fast load-following requirements when the reformer is operated with the HTPEM fuel-cell stack. These data along with data from

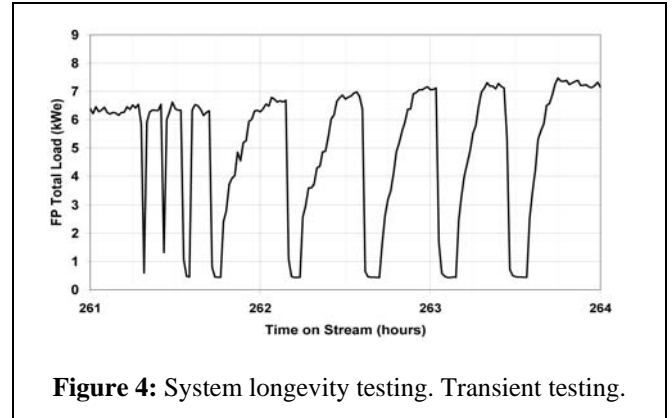


Figure 4: System longevity testing. Transient testing.

other tests demonstrate that the reformer is capable of over 10:1 turndown ratio.

These successful tests demonstrated that the reformer meets the TARDEC requirements and can convert JP-8 to a hydrogen-rich reformat stream suitable for generating power in a HTPEM fuel-cell stack.

System Power Development and Testing

Upon successful demonstration of the reformer and conclusion of the Segment I, Segment II was initiated. Under this segment, the reformer is being integrated with the fuel-cell stack. These activities include control-system development and miniaturization, BOP selection and qualification, water-recovery-system integration for water-neutral operation, and thermal integration for an efficient heat recovery. For example, all of the selected pumps and blowers have been qualified for at least 1,500 hours, and the control system is being miniaturized by transitioning to a microprocessor-based control system. Sample data from a fuel-pump-qualification test are presented in Figure 5.

The power system is water neutral. To this end, a water recovery system (WRS) has been developed that recovers the needed water for its water neutrality. To be water neutral the WRS has to recover 75% of the water exiting the stack. Presented in Figure 6 are data that demonstrate that the WRS

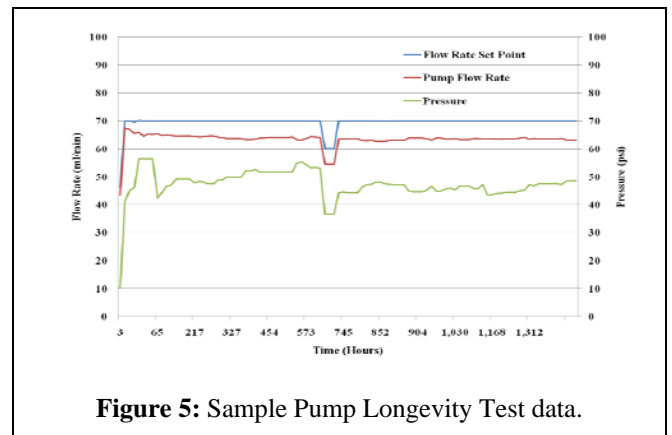


Figure 5: Sample Pump Longevity Test data.

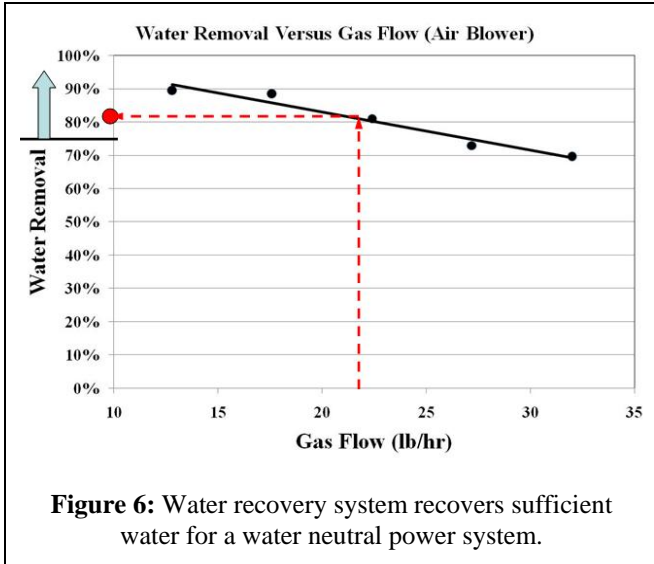


Figure 6: Water recovery system recovers sufficient water for a water neutral power system.

recovers over 80% of the water. The WRS is being integrated into the power system.

Before full integration of the stack, a short stack and the full stack have been operated with the reformer operating on JP-8 and other fuels to cover several power programs. Initial testing demonstrated steady power generation from JP-8 for over 50 hours with a 0.5-kW_e short stack. The data presented in Figure 7 show stack power and the reformate CO level. These data show that the fuel-cell stack exhibited no degradation of performance and that the HTPEM fuel-cell stack allows production of consistent power from a reformate stream with as much as 1% CO and 0.1-0.5 ppm sulfur. Similarly, the reformer has been used to qualify a 5-kW_e stack delivered by CEP.

This stack has been tested on reformate made from JP-8, diesel, and biodiesel in the reformer. The data in Figure 8 shows sample results from operation on diesel fuel. These

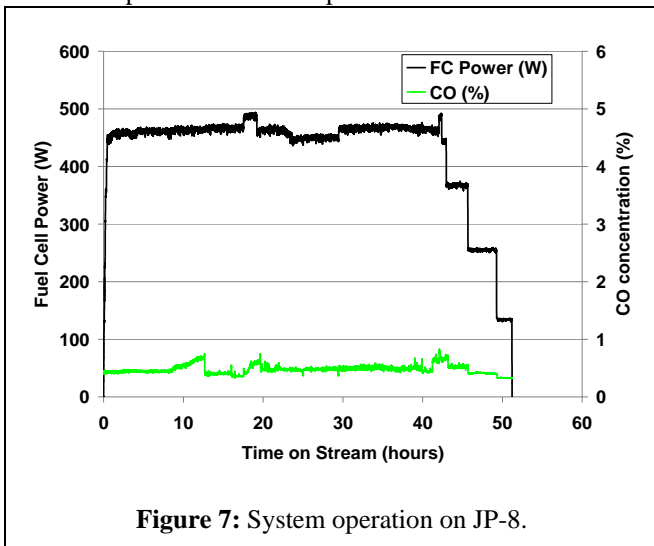


Figure 7: System operation on JP-8.

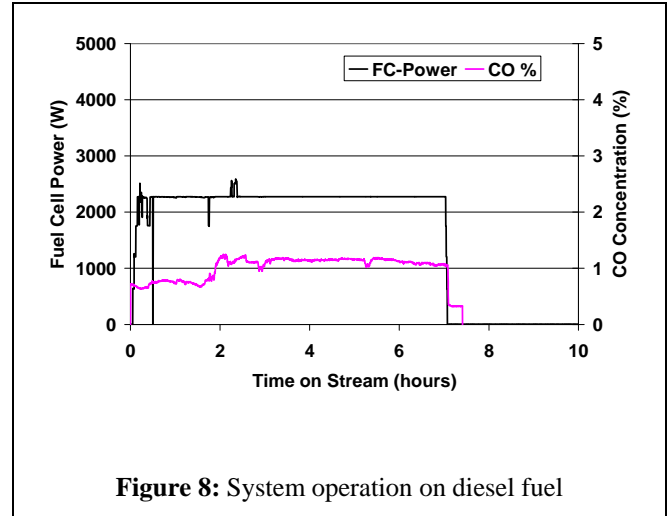


Figure 8: System operation on diesel fuel

tests show that the reformer can operate on a variety of logistic fuels.

The tests discussed above and others not discussed here are leading to the full integration of the power system, the 1,000-hour demonstration of JP-8-to-power, and delivery of the system to TARDEC for independent testing.

Summary and Conclusions

The 10-kW_e reformer was demonstrated for 300 hours on TARDEC-supplied JP-8 with over 10:1 turn down and consistent production of reformate with 75% hydrogen and around 1% CO. This reformer is being integrated with a fast starting and robust HTPEM fuel-cell stack for producing the 10 kW_e power APU for delivery to TARDEC after a 1,000-hour demonstration test. As such, the two challenges discussed in the introduction have been overcome making a fuel cell based Ground Vehicle APU realizable.

Acknowledgment

This work was supported by TARDEC under contract number W56HZV-06-C-0344. Views expressed are those of authors and not necessarily of the funding agencies.

REFERENCES

- [1] Namazian, M., *et al.*, Fuel Cell Seminar Abstracts, 2007, pp 310-313.
- [2] Namazian, M. *et al.*, Fuel Cell Seminar Abstracts, 2006, pp 253-256.
- [3] Sethuraman, S. *et al.*, Fuel Cell Seminar Abstracts, 2005, pp 101-104.
- [4] Venkataraman, G. *et al.*, Fuel Cell Seminar Abstracts, 2005, pp 109-112.