

Report Documentation Page

Form Approved
OMB No. 0704-0188

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 2008	2. REPORT TYPE	3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Enhancement of Electrical Properties by Tailoring Nanoparticles in Holmium-doped YBa₂Cu₃O_{7-d} Superconductors		5a. CONTRACT NUMBER	
		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory, 4555 Overlook Avenue SW, Washington, DC, 20375		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)	
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited			
13. SUPPLEMENTARY NOTES			
14. ABSTRACT			
15. SUBJECT TERMS			
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)
			18. NUMBER OF PAGES 3
			19a. NAME OF RESPONSIBLE PERSON

Enhancement of Electrical Properties by Tailoring Nanoparticles in Holmium-doped $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ Superconductors

R.L. Holtz,¹ R. Goswami,² and G. Spanos¹

¹Materials Science and Technology Division

²SAIC

Background: High-temperature superconducting (HTS) tape and wire are promising for high power density shipboard motor and generator applications. There is a need, however, for improving the performance and stability of these materials in high magnetic fields in order to fully exploit this technology. The Naval Research Laboratory, with our extensive expertise and sophisticated capabilities for microstructural analysis, has been approached by and is working closely with several HTS wire processing groups, including HTS manufacturers American Superconductor Corporation and Metal Oxide Technologies Incorporated, as well as the U.S. Air Force Research Laboratory, to understand the basic relationships between microstructure and performance of HTS tapes.

Flux Pinning in Superconductors: Magnetic flux penetrates a Type II superconductor in the form of “vortices,” which consist of circulating currents surrounding the flux. If these vortices move, an effective resistance is created, which degrades the critical current density and the transition temperature of the superconductor. If the vortices are prevented from moving, by “pinning” them, this enhances the critical current. This mechanism is suggested in Fig. 4, which depicts a slab of superconductor under the actions of a current and a magnetic field. The presence of flux pinning centers, such as second phase particles, for example, results in a pinning force that inhibits vortex motion. Pinning centers are most effective when the size and spacing is comparable to that of the vortices, on the order of 10 to 100 nm; hence, dense dispersions of nanoparticles in that size range provide very effective flux pinning.

Nanoparticles in YBCO: Figure 5(a) shows a transmission electron microscopy (TEM) image of a distribution of nanoparticles in the size range of 10 to 100 nm in an HTS coating of composition $\text{YBa}_2\text{Cu}_3\text{O}_7$ (YBCO) doped with holmium (Ho:Y ratio 1:1). This particular specimen was submitted to NRL for analysis by American Superconductor Corporation. The HTS coating is formed by high-rate metal-organic deposition and subsequent heat treatment. NRL determined that two types of nanoparticles, $(\text{Y}_x\text{Ho}_{1-x})_2\text{O}_3$ and Cu-Ba-Ho-Y (exact stoichiometry yet to be determined), are formed during the deposition process. Figure 5(b)

shows one partially faceted $(\text{Y}_x\text{Ho}_{1-x})_2\text{O}_3$ particle, and Fig. 5(c) is a high-resolution TEM image of the interface between the matrix and a nanoparticle, showing that it is crystallographically not fully coherent. Figure 5(d) shows a TEM image of several nanoparticles in another Ho-doped YBCO specimen. The dark lobes around the particles are due to strain fields. The results indicate that the nanoparticles are associated with relatively large strain fields, and it is these strain fields that likely provide the pinning force for the vortices. NRL also has found that nanoparticles formed in YBCO films also can stabilize other defects such as twin boundaries, antiphase boundaries, stacking faults, intergrowth, and plane buckling, all of which result in additional contributions to vortex pinning.¹

Crystallographic Twins: Crystallographic twin boundaries, i.e., grain boundaries of relatively good atomic fit between regions of different (but symmetrical) crystallographic orientation, provide extra pinning, although they are less effective than nanoparticles. It is known that (110) twins (twins whose boundaries lie parallel to a (110) direction in the crystals) form during transformation from the tetragonal to the orthorhombic phase, as the material is cooled from high processing temperatures. Figure 6(a) shows a Ho-doped YBCO specimen with a large number of (110) transformation twins (the linear features), in addition to a high density of nanoparticles. By correlating the density and sizes of the nanoparticles and the twins with the critical current density of the HTS specimens, and studying these features as a function of excess holmium content, the optimum composition for tailoring critical current retention in magnetic fields is found. NRL also has identified an interesting interaction between nanoparticles and twin boundaries. Figure 6(b) provides a high-resolution TEM image of twin boundaries that appear to be bent in the vicinity of a nanoparticle, presumably due to the presence of the strain field around the nanoparticle. Investigation of this observation is continuing.

Significance: Basic understanding of the effects of different kinds of flux-pinning features in superconducting coatings, such as nanoparticles and twins, allows the tailoring of the superconductor performance of HTS wire in magnetic fields. In particular, in superconducting motor and generator coils, there are substantial magnetic fields perpendicular to the superconducting tape, which produce a very large suppression of the critical current in the YBCO. With the controlled addition of flux-pinning nanoparticles, twin boundaries, and other defects through holmium doping of YBCO, the critical current under perpendicular fields is substantially improved, reducing the amount of super-

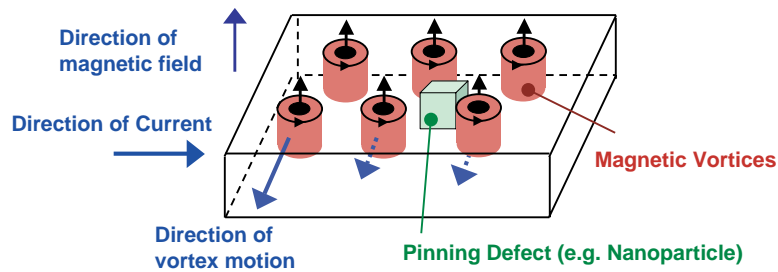


FIGURE 4
A schematic diagram illustrating the concept of pinning of the vortices by nanoparticles embedded in the superconductor.

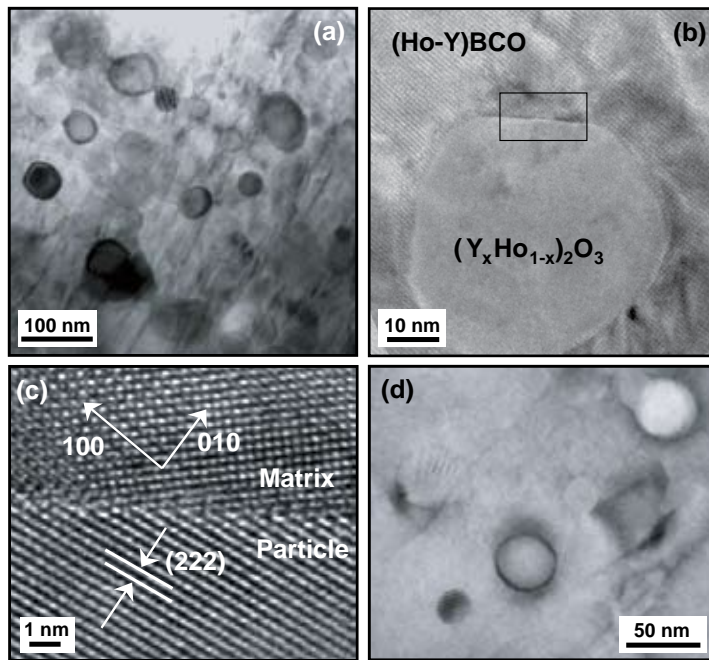


FIGURE 5
(a) A bright-field transmission electron microscopy (TEM) image showing the nanoparticles in the superconducting matrix in a Ho-doped YBCO sample. (b) A high-resolution TEM (HRTEM) image showing a coarse $(Y_xHo_{1-x})_2O_3$ particle. (c) A higher magnification HRTEM image showing that the particle/matrix interface of the coarse particle, obtained from the rectangular box in (b), is not fully coherent. (d) A fine particle showing the dark lobes around the particle suggesting that the particle is associated with a strain field.

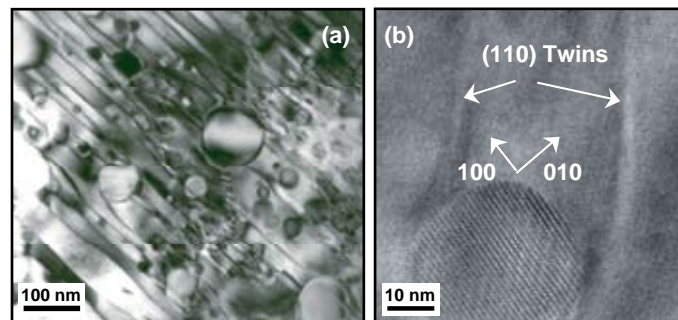


FIGURE 6
(a) A bright-field TEM image near the [001] zone of the superconducting matrix showing nanoparticles embedded in the matrix for a Ho-doped YBCO sample (lower Ho concentration than specimen of Fig. 5). Note the (110) twins. (b) HRTEM image showing the (110) twins. Note the apparent bending of twins close to the particle. Such bending could result from the interaction of strain fields present close to the particle and the twins.

conducting wire needed, and thus reducing both the size and the cost of the devices.

[Sponsored by NRL and ONR]

Reference

¹R. Goswami, R.L. Holtz, M.W. Rupich, W. Zhang, and G. Spanos, "Effect of Holmium Additions on Microstructures in $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$," *Acta Materialia* 55, 6746-6753 (2007) and references therein. ★