

# **Tactical Environmental Processor At-Sea Demonstration**

Hank Owen , Principal Investigator  
Lockheed Martin Government Electronic Systems  
199 Borton Landing Road  
Moorestown, NJ 08057  
Phone: 609-722-7303; Fax 609-722-4074  
EMAIL: [henry.s.owen@lmco.com](mailto:henry.s.owen@lmco.com)

Award # N00014-98-2-0001

## **LONG-TERM GOALS**

The long-term goal of this program is to develop radar-based remote environmental needed for safe and effective naval operations in the littoral region. This includes accurate spectral measurements of the environment, including land, sea and environmental “clutter”, and timely volumetric measurements of radar propagation conditions.

With the application of advanced signal processing techniques, a tactical Navy radar such as the AN/SPY-1 radar can provide accurate, real time weather information to benefit a variety of units in the battle group. SPY-1 provides the sensitivity and flexibility to integrate a secondary capability of weather surveillance, with minimal impact on the primary role of tactical surveillance. This can be accomplished through an auxiliary environmental signal processor that operates in parallel with the tactical system. Such a processor could provide real-time performance improvements to the SPY-1 radar as well as valuable environmental information to be disseminated for the support of fleet operations.

## **OBJECTIVES**

The goal of the TEP As-Sea Demonstration is to demonstrate the results of technology developed in the previous land-based SPY-1 Weather Experiment as applied to a shipboard environment using a near-real-time Tactical Environmental Processor (TEP). The accuracy of the radar meteorological data collected aboard ship will be characterized, and the data will be disseminated to enable studies of the benefits of a real-time environmental sensing capability.

Specific objectives of this program are as follows:

- to further investigate the discrimination of sea clutter, volume clutter and land clutter in the littoral environment and over open ocean;
- to make available radar environmental data that could support future post mission analysis with a goal of reducing false track initiations, enhanced weapon system performance through clutter environment characterization and improved waveform selection, and improved clutter lock loop performance;
- to demonstrate the feasibility of a COTS-based scaleable signal processor to perform near-real time environmental processing on a ship without interfering with normal radar operations;
- to apply advanced signal processing algorithms, incorporating pulse compression and doppler tolerant sidelobe suppression, in an operational environment;
- to make meteorological surveillance data available to shipboard personnel in an operational environment; and

# Report Documentation Page

Form Approved  
OMB No. 0704-0188


Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>1998</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-1998 to 00-00-1998</b>	
4. TITLE AND SUBTITLE <b>Tactical Environmental Processor At-Sea Demonstration</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Lockheed Martin Government Electronic Systems, 199 Borton Landing Road, Moorestown, NJ, 08057</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>See also ADM002252.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>5</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

- to collect and make available radar environmental data that could be used for future or concurrent research into meteorological techniques and modeling.

## **APPROACH**

The Tactical Environmental Processor system is illustrated in figure 1. It consists of a data tap from a tactical radar (the SPY-1 B/D radar), an Auxiliary Environmental Signal Processor (AESP), a Display and Control Subsystem, and a data archiving capability. It collects data from the SPY-1 signal processor via a passive data tap, processes the data in near-real time, and displays the resulting measurements of reflectivity (intensity), radial velocity, and spectrum spread (an indicator of turbulence and shear).

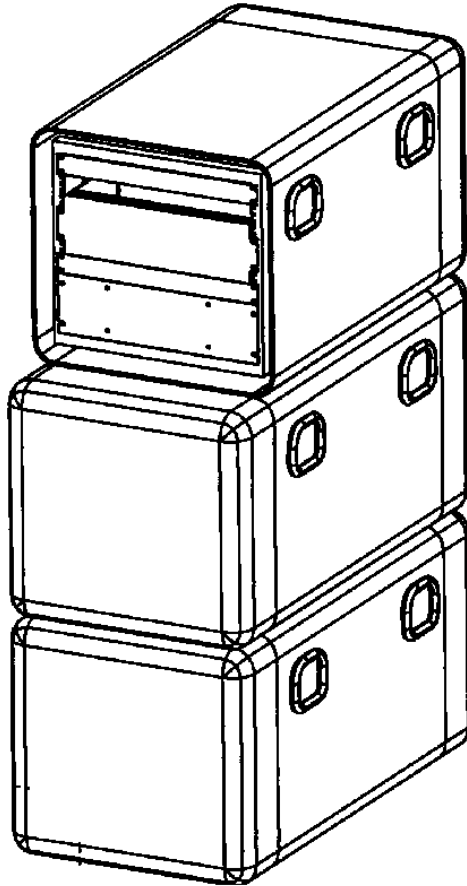

*Figure 1: Tactical Environmental Processor Block Diagram*

The AESP is contained within an enclosure within the radar equipment room, next to the SPY-1 B/D signal processor. The Display and Control Subsystem (DCS) is hosted in the AESP workstation in the radar equipment room which produces displays and acts as an interface to the AESP. The DCS also contains a remote monitor to allow for display of the processed data in CIC. AESP operator interface is conducted at the AESP workstation. This workstation is used for demonstration purposes only. For final product operation, the display and control features required for the AESP will be incorporated in existing SPY-1 B/D consoles. Operation of an end-item AESP system will not require any additional consoles or personnel.

The at-sea demonstration will be conducted onboard USS O’Kane (DDG-77). Several data sets will be collected during the at-sea demonstration, planned for the fall of 1999, as summarized in Table 2. Included in this demonstration are validation data sets that will be conducted in coastal regions within the coverage of a NEXRAD radar. Extracted spectral moments will be compared to NEXRAD Level II data for processing validation. An experiment team, consisting of LM/GES engineers and Pennsylvania State University meteorological consultants will formulate and review the data collection plan.

<b>Data Collection Event</b>	<b>Special Operational Requirements</b>
<b>Spectral Moment Validation</b>	<b>Yes</b>
<b>SPY-1 Track Performance Analysis</b>	<b>No</b>
<b>Weather Environmental Analysis</b>	<b>No</b>
<b>Duct Detection Analysis</b>	<b>Yes</b>
<b>Full Wind Map Retrieval</b>	<b>No</b>
<b>Wind Profile</b>	<b>No</b>
<b>Marine Boundary Layer Analysis</b>	<b>Yes</b>
<b>Surface Clutter Analysis</b>	<b>No</b>

*Figure 2: TEP At-Sea Data Collection Events*

**WORK COMPLETED**

The program was authorized in February 1998. During FY98, the following tasks were completed:

- TEP performance requirements were generated and captured in the Systems Requirements Document. The driving operational requirements were documented in the TEP Concept of Operations. Together, these form the basis for the TEP Demonstration System architecture and its operation during the At-Sea Demonstration.
- Algorithm descriptions were created to provide a baseline for implementation of the signal processor firmware.
- The operational and functional requirements for the Auxiliary Environmental Signal Processor (AESP) and the Display and Control System (DCS) were completed.
- The Real-Time Interface was designed and built, and early risk retirement testing completed at the CSED Site to verify proper interfacing to the SPY-1 Radar Control Computer.
- A set of Test Objectives were generated to outline the testing to be performed during the at-sea demonstration.

**RESULTS**

Specific results and conclusions will not be available for this program until after completion of the at-sea demonstration during the Fall of 1999. Intermediate results during FY98 include the creation of a viable COTS-based architecture capable of performing the signal processing necessary for the environmental sensing function. Although not yet built and tested, this architecture establishes the viability of this technology for transition to a fleet installation aboard ship. The early build and test of the real-time interface demonstrated the feasibility of interfacing a COTS architecture to the legacy SPY-1 radar signal processor, which was never designed for use in this fashion.

## **IMPACT/APPLICATIONS**

Local real-time weather surveillance offers many benefits to the U.S. Navy. With local forecasting using TEP data, the forecast lag time can be decreased from as much as 12 hours to as little as 2 hours. Knowledge of precipitation and winds in the vicinity of air operations can significantly increase the efficiency and safety of those operations. The ability to detect cloud layers would also be of benefit to the coordination of air operations, which are affected by varying visibility conditions. The ability to monitor real time weather conditions can also provide improvements in the performance of tactical sensors through effective waveform and pulse repetition frequency (PRF) selection, and by aiding in the removal of undesirable clutter tracks which correlate to weather return. This could increase radar sensitivity by as much as 10dB, and decrease the utilization of radar resources dedicated to clutter management by as much as 50%.

This project provides several significant commercial (non-DoD) benefits. Several technological advancements demonstrated in this project are directly applicable to the NEXRAD radar system as upgrades. They include advanced surface clutter filtering techniques (such as the Matrix Clutter Filtering technique that will be used in this project), application of coded waveforms to boost system sensitivity, and implementation of spectral processing techniques (instead of pulse-pair processing) to offer more robust spectral characterization of weather events.

The combination of phased array technology and rapid scan processing techniques used with the SPY-1 B/D have direct benefit to both National Weather Service and Federal Aviation Administration research in preparation for future meteorological radar systems. Although these concepts have been discussed in the research environment, this project provides a full operational demonstration of advanced concepts, providing measures of real performance for this type of system to support future NWS & FAA efforts.

The third major benefit is the extension of NWS meteorological surveillance to the large expanses of ocean that are currently not observed with NWS radars. With the Tactical Environmental Processor technology, other existing maritime and Navy radars can be used to provide currently unavailable meteorological radar data for improving of forecast lead time and accuracy. Although satellites, aircraft, ships, and buoys provide some data over the oceans, the detailed lower altitude data provided by NEXRAD radars is missing.

## **TRANSITIONS**

The TEP At-Sea Demonstration program will establish the basis for transition of the advanced clutter mapping capability into the SPY-1 radar and other Naval radars. We will also continue to work with Navy Labs and academia, including Penn State University and MIT Lincoln Labs, to provide over-ocean radar data suitable for incorporation into meteorological models. This data will provide a basis for through-the-sensor measurements that can enable local Nowcasts and Forecasts, and can help advance research into areas such as radar assimilation, dual-doppler wind retrieval, and propagation assessment.

## **RELATED PROJECTS**

Although not directly addressed within the scope of the current project, there exist a number of closely related projects within the Navy and academia which can benefit from the radar-based environmental data generated to date, and the data soon to be generated as part of the At-Sea Demonstration. We are

in contact with Dr. Qin Xu at NRL regarding their on-going efforts to retrieve full wind field information from radial velocity measurements and to assimilate radar data with numeric models. Other related efforts include the Remote Refractivity Sensing Project led by Ted Rogers at NRaD, the NRL Onboard Model Development efforts, and the Penn State University initiatives to assimilate radar data with propagation models.

## **REFERENCES**

“SPY-1 Weather Experiment Final Report”, 31 October 1997, Lockheed Martin document number NS-L-TWR-T-2004

“SPY-1 Weather Experiment Final Report Supplement”, 31 October 1997, Lockheed Martin document number NS-L-TWR-T-2005

“Cooperative Agreement between the Office of Naval Research and Lockheed Martin Corporation”, 19 January 1998, Agreement Number N00014-98-2-0001

“Tactical Environmental Processor Annual Program Plan”, 9 March 1998

“Tactical Environmental Processor System Design Document”, 1 May 1998

“Tactical Environmental Processor Concept of Operations”, 24 July 1998

## **PUBLICATIONS**

None

## **PATENTS**

None

## **IN-HOUSE/OUT-OF-HOUSE RATIOS**

Percent of work by Gov't Organization (“In-House “): 0%

Percent of work by Academic or Commercial Organizations (“Out-of-House “): 100%