

## Evaluation Parameters for 360-Degree Situational Awareness Systems on Military Ground Vehicles

Thomas Mikulski  
RDECOM TARDEC IGS

## Report Documentation Page

*Form Approved*  
*OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>12 AUG 2010</b>	2. REPORT TYPE <b>N/A</b>	3. DATES COVERED <b>-</b>			
4. TITLE AND SUBTITLE <b>Evaluation Parameters for 360-Degree Situational Awareness Systems on Military Ground Vehicles</b>		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S) <b>Thomas Mikulski</b>		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>US Army RDECOM-TARDEC 6501 E 11 Mile Rd Warren, MI 48397-5000, USA</b>		8. PERFORMING ORGANIZATION REPORT NUMBER <b>21126</b>			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S) <b>TACOM/TARDEC</b>			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) <b>21126</b>			
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release, distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>Presented at NDIAs Ground Vehicle Systems Engineering and Technology Symposium (GVSETS), 17 22 August 2009, Troy, Michigan, USA, The original document contains color images.</b>					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>SAR</b>	18. NUMBER OF PAGES <b>21</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

- 360-Degree Situational Awareness (360 SA) Systems Offer Great Capabilities to Warfighters in the Field
  - Increase Combat Effectiveness
  - Increase Warfighter Safety



- To Transition 360 SA Systems to the Field, Operationally Relevant Requirements Must Be Developed
- 360 SA Requirements Must Be Based Upon a Relevant Set of Evaluation Parameters in the Following Areas:
  - Vehicle-Mounted Visual Sensors
  - Data Transmission Systems
  - In-Vehicle Displays
  - Intelligent Cuing Technologies
  - Human Factors Considerations



- In 2008, CERDEC NVESD Worked with Industry to Build 360 (H) x 90 (V) Distributed Aperture System (DAS)
  - 33 Sensors: De-Warped, Stitched, and Fused in Real-Time
  - Color Day, Image Intensified, and Uncooled Infrared Imagers
- Integrated Onto the M2 Bradley Fighting Vehicle
  - Increased Soldier SA When Compared to Baseline Vehicle
  - Important Limitations:
    - Required Substantial Computational Capabilities
    - Cost-Prohibitive in Production

- IMOPAT ATO<sup>1</sup> Established to Develop Cost-Effective 360 SA System for Ground Combat Vehicle (GCV)
  - **Objective:** Limit Per-Unit Cost to Ease Transition into the Field
  - Included Capabilities:
    - High-Resolution Sensors and Displays
    - Advanced Warfighter-Machine Interfaces (WMI)
    - Automated Control and Threat Cuing Algorithms
    - Occupant Workload Management Systems






Experimental Platforms



Fielded Systems

<sup>1</sup> Improved Mobility and Operational Performance through Autonomous Technologies Army Technology Objective

- Visual Sensors Are Fundamental Components of 360 SA
  - *Detect, Recognize, and Identify* Threats from Safe Distance
  - Used to Augment Other Sensors Upon Vehicle
- A Single Sensor Cannot Tend to Sometimes-Conflicting Requirements of Complete 360 SA System
  - Thus, Vehicle-Mounted 360 SA Systems Are *Designed in Layers* to Account for Conflicting Requirements

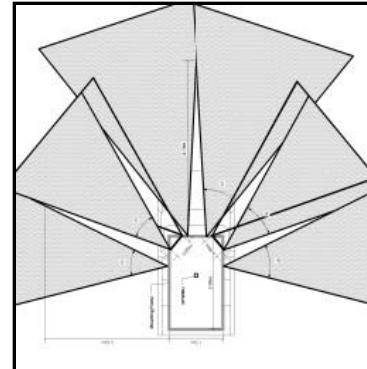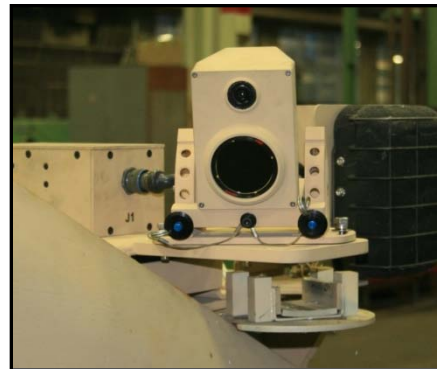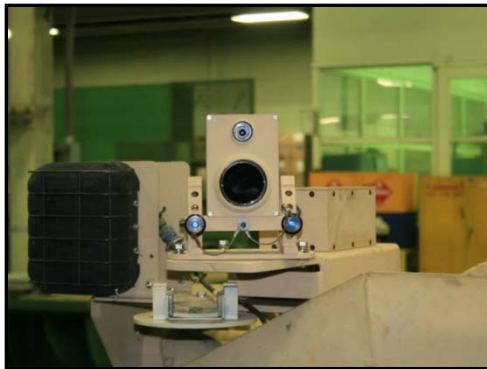

- **Detection Layer**
  - Set of Fixed, Wide FOV Sensors That Offer Simultaneous 360-Degree Coverage of Surrounding Environment
- **Interrogation Layer**
  - Set of High-Resolution, Narrow FOV Sensors That Interrogate Threats Discovered in Detection Layer
- **Broad-Area SA Layer**
  - Video Communication with Unmanned Aerial Systems (UASs), Unmanned Ground Vehicles (UGVs), and Other Assets



- ***Simultaneous Field of View***: The FOV That a 360 SA System Concurrently Obtains Across All Sensors Upon Vehicle
- ***Sensor Field of View***: FOV of Single Sensor in 360 SA System
  - Fundamental Trade-Off Between *Sensor FOV* and *Range Performance*
- ***Range Performance***: The Maximum Distance of a Target from Imager At Which an Observer Can Conduct Discrimination Task
- ***Ground Intercept***: The Nearest Intercept of a Sensor's Cone of Vision with the Ground

- Data Transmission Systems Transfer Information from One Component of 360 SA System to Another
  - Example: *Visual Sensor to In-Vehicle Display*
- Analog Systems Provide Acceptable *Reliability, Ease of Integration, and Latency*
  - Drawbacks: Limited *Resolution & Video Processing Capabilities*



- 360 SA Systems Aim to Adopt Digital Video Architectures
  - New Limitations: Greater *Bandwidth* and *Latency* Constraints
- Despite Limitations, Digital Video Offers Opportunities to Provide Advanced Capabilities:
  - Discriminate Threats via Intelligent Cuing Technologies
  - Identify Potential Improvised Explosive Devices
  - Record Visual Sensor Information for Future Analysis
  - Share Video Information with Other Battlefield Resources

# Data Transmission Systems [Evaluation Parameters]

## ROBOTIC SYSTEMS

Camera Type	Resolution	Frame Rate	Bits / Sec
LWIR	640x480	30	73,728,000
LWIR	1024x768	30	330,301,440
Color VGA	640x480	30	221,184,000
NTSC (Square)	640x480	30	221,184,000
NTSC (Rect.)	720x480	30	248,832,000
Color XGA	1024x768	30	566,231,040
720p HDTV	1280x720	30	663,552,000
Color Video	1280x960	30	884,736,000
Color SXGA	1280x1024	30	943,718,400
Color UXGA	1600x1200	30	1,382,400,000
1080p24	1920x1080	24	1,194,393,600
1080p HDTV	1920x1080	30	1,492,992,000

- **Bandwidth:** The Amount of Information That Can Flow Between Components of a Given 360 SA System
- **Latency:** Delay from the Moment Event Is Captured by a Sensor to the Moment It Appears on an In-Vehicle Display
  - Should Be Below *80 Milliseconds*

- In-Vehicle Displays Are Vital Components of 360 SA
  - Display Warfighter-Machine Interface to Vehicle Occupants
  - Provide Interface to 360 SA Video Sensor Imagery
  - Provide Interface to Vehicle Diagnostic and Management Functions
- Display Resolution Must Match or Exceed Sensor Resolutions
  - Advanced Sensors Cannot Be Fully Utilized Without Adequate Displays



- **Screen Size:** The Physical Dimensions of the In-Vehicle Display
  - Constrains the Capabilities of the Warfighter-Machine Interface
- **Screen Resolution:** The Number of Pixels within the Vertical and Horizontal Components of the In-Vehicle Display
  - Must At Least Match the Resolution of Vehicle-Mounted Sensors
- **Brightness and Contrast:** Must Be Chosen to Maximize Warfighter Ability to Visualize Sensor Imagery
  - Brightness: The Maximum Luminance of In-Vehicle Display
  - Contrast: The Ratio of Brightest to Darkest Color That Display May Produce

- Intelligent Cuing Technologies Aim to Minimize Cognitive Load Upon Warfighters:
  - Draw Warfighters' Attention to Potential Enemy Combatants, Improvised Explosive Devices, and Other Battlefield Threats
  - Classify the *Threat Level* of Detected Objects
  - Identify Road Edges or Traversable Off-Road Terrains



- Intelligent Technologies Are Often Unreliable
  - Inherently Based Upon Statistical Methods
  - Rely Upon Noisy Sensors in Unstructured Environments
- Intelligent Systems Require High Computational Capabilities
  - Directly Impacts *Latency Requirements*



- ***Probability of Correct Detection:*** The Probability That a System Correctly Detects the Event for Which It Was Designed
  - *Perfect Detection Unrealistic*
  - Yet, Cannot Be So Low As to Render System **Ineffective**
- ***False Alarm Rate:*** The Rate at Which a System Misrepresents a Non-Event as an Event for Which It Was Designed
  - *Perfect False Alarm Rate Unrealistic*
  - Yet, Cannot Be So High As to Render System **Unreliable**
- ***Computational Load:*** The Computational Capabilities Required to Drive Intelligent Cuing Algorithm
  - Must Minimize Burden on *Support Systems* and Maintain *Latency Requirements*

- Cognitive Load Must Be Minimized through Effective WMIs
  - WMIs Provide Access to 360 SA Capabilities
  - Must Be *Simple to Use*
- Human Factors Research Has Brought About Development of Standard Metrics to Assess WMI Effectiveness
  - Helps to Ascertain the *Ease* and *Quickness* with Which the Warfighter Interacts with 360 SA System



- **Probability of Correct Identification:** Represent the User's Ability to Correctly Identify a Target in a Given Environment
  - Constraints: Environmental Stressors, Visual Display Characteristics, Decision Aids, and User Training Modules
- **Glance Time:** The Time a User Needs to Visually Sample a Scene through the WMI
- **Movement Time:** The Time a User Needs to Manipulate a Control Within the WMI
- **Reaction Time:** The Time Elapsed Between the Onset of Warfighter Stimulus and His Response



360/90 Day/Night  
Near-Field Sensor Coverage



Advanced Crew Stations



Integration Platform



Occupant Monitoring

## Goals



Develop *Indirect Vision* and *Drive by Wire* Systems that Provide Electro-Optic Indirect Vision Based **Local Situational Awareness** and **Mobility Capabilities** At or Above the Performance Levels of Direct Vision Mechanical Drive Systems and to Enhance High-Definition Cognition Technologies to Dynamically Manage Workload to Increase Operational Performance on Future Platforms.

## Objective

TARDEC-Led IMOPAT ATO Contains CERDEC-NVESD, ARL-HRED, and NSRDEC as Joint Partners to Mature *Visual Sensor Suites*, *Human Integration*, and *Assisted Mobility Technologies* in Three Phases of Evolution:

- Baseline: Establish Initial *Indirect Vision Driving (IVD)* and *360-Degree Local Situational Awareness (LSA)* Capabilities.
- Enhanced: Increase IVD and LSA Capabilities.
- Advanced: Integrated State-of-the-Art IVD and LSA System that Provides “Secure Mobility Capability”.

- 360 SA Systems Upon Other Vehicle Platforms Have Similar *Designs, Characteristics, and Requirements*
  - Yet Generally, Development Efforts Are **Largely Independent**
- Years of Trial and Experimentation Have Promoted *Standard 360 SA Design Practices*
  - Increased Collaboration Between Technical and Military Operational Experts Now Required to Develop Standard Requirements

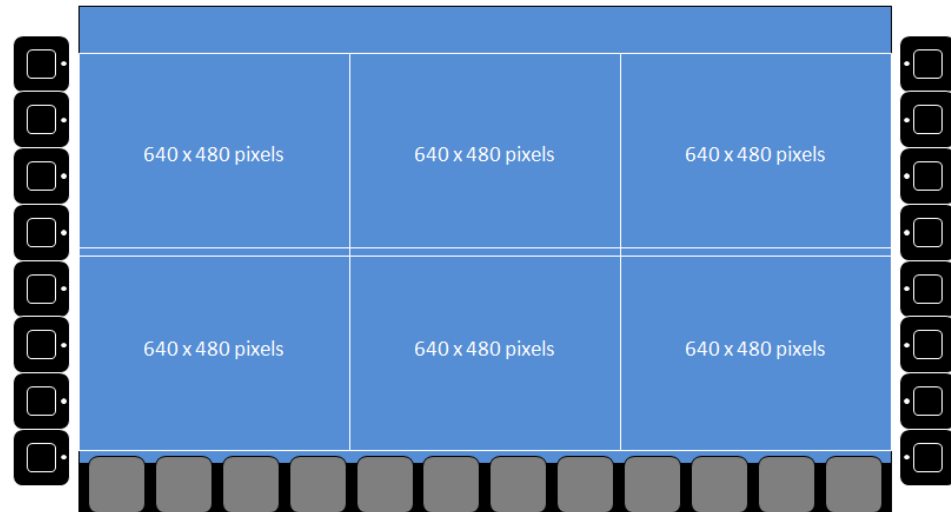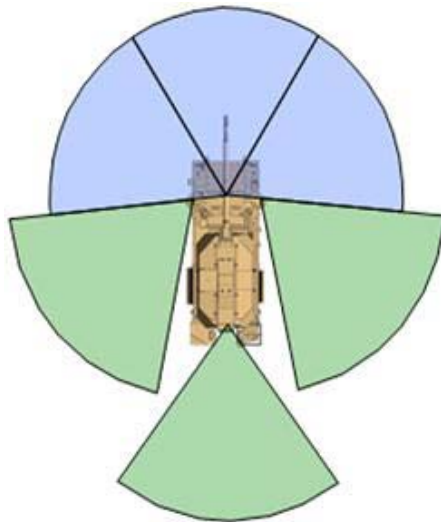



Questions?



**ROBOTIC  
SYSTEMS**

**Thomas Mikulski**

RDECOM TARDEC IGS

E-Mail: [thomas.mikulski@us.army.mil](mailto:thomas.mikulski@us.army.mil)