

Multibeam Mapping of the Uncertainty of the Seafloor in the Southern East China Sea

Brian R. Calder

Center for Coastal and Ocean Mapping
University of New Hampshire, Durham NH 03824
Phone: (603) 862 0526 E-Mail: brc@ccom.unh.edu

Larry Mayer

Center for Coastal and Ocean Mapping
University of New Hampshire, Durham NH 03824
Phone: (603) 862 2516 E-Mail: larry@ccom.unh.edu

Award Number: N00014-08-1-0786 / N00014-08-M-0244

LONG-TERM GOALS

The long-term goal of the Quantifying, Predicting and Exploiting Uncertainty DRI is to understand and exploit (if possible) the fundamental acoustic, oceanographic, bathymetric and geoacoustic uncertainties of the tactical naval environment, and demonstrate how they may be exploited tactically or strategically in an Exercise Area. Focussing on the seabed, our goals are to understand the fundamental tactical and strategic uncertainty of the bathymetric and geoacoustic environment, and develop methods for their representation, visualization, computation and manipulation in a manner consistent with models of sonar performance estimation and prediction.

OBJECTIVES

The scientific objectives of the UNH team are:

1. Understand the sources and magnitudes of bathymetric and geoacoustic uncertainty in the Southern East China Sea Exercise Area, and their implications for acoustic modelling in the field experiment.
2. Develop a framework methodology for expression of user-relevant uncertainty in the bathymetric and geoacoustic context.
3. Develop appropriate representation/visualization techniques for the uncertainty models developed.
4. Provide continually updated “best available” estimates of bathymetry, backscatter and uncertainty models to the QPE technical group.

APPROACH

Due to requirements for data control via a Limited Distribution statement, the work covered here was administratively split between grant N00014-08-1-0786 and contract N00014-08-M-0244. We describe here, for convenience, the approach and other details for both instruments.

Bathymetry and geoacoustic uncertainty are primary drivers in the acoustic propagation problem, defining one of the complex boundary conditions for the ocean waveguide. The roles of the two

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2008		2. REPORT TYPE Annual		3. DATES COVERED 00-00-2008 to 00-00-2008	
4. TITLE AND SUBTITLE Multibeam Mapping Of The Uncertainty Of The Seafloor In The Southern East China Sea				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of New Hampshire,Center for Coastal and Ocean Mapping,Durham,NH,03824				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES code 1 only					
14. ABSTRACT The long-term goal of the Quantifying, Predicting and Exploiting Uncertainty DRI is to understand and exploit (if possible) the fundamental acoustic, oceanographic, bathymetric and geoacoustic uncertainties of the tactical naval environment, and demonstrate how they may be exploited tactically or strategically in an Exercise Area. Focussing on the seabed, our goals are to understand the fundamental tactical and strategic uncertainty of the bathymetric and geoacoustic environment, and develop methods for their representation, visualization, computation and manipulation in a manner consistent with models of sonar performance estimation and prediction.					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

components can often be complementary, however, with bathymetry being very significant in areas of complex and steep relief, and geoacoustic uncertainty being significant in otherwise undistinguished bathymetric environments (Holland, 2006). Both, however, are typically poorly sampled spatially and temporally in most tactical environments, although they can be well characterized when sampling is done. Understanding the variability of the unobserved, therefore, is critical to characterizing and exploiting the uncertainties that are significant for the tactical environment.

We have previously developed and adapted algorithms for characterization of high-density bathymetric data [Hare *et al.*, 1995; Calder & Mayer, 2003], and proposed methods for characterization of low-density data [Calder, 2006; Goff *et al.*, 2006], and our approach to the fundamental uncertainty of the bathymetric data will follow these methods. In particular, starting with a high-resolution bathymetric dataset in a target area, sub-sampled to resemble the data density more typically achieved with tactical surveys and then reprocessed to give estimates everywhere, we hypothesize that the *ab initio* estimated uncertainty of the data can be calibrated, allowing an important check on our current production models in the Southern East China Sea Exercise Area. This will, moreover, allow us to determine the likely observability of small bathymetric features (e.g., sand ridges [Liu *et al.*, 2000]) that might be present and significant.

The uncertainty of unobserved geoacoustic features, e.g., mud volcanoes or pock-marks [Yin *et al.*, 2003] (which are often associated with the presence of gas in the sediment, and the effusion of gas into the watercolumn), is much less well defined. Information on the likely occurrence in the area and the effects of such features on the acoustic propagation path are sparse, although we will utilize backscatter data from all available high-density multibeam surveys to attempt some assessment of this. We hypothesize, however, that while deterministic information on the locations of geoacoustically active features is unlikely to ever be available, a stochastic description of their mean effect might be effective in an uncertainty-augmented acoustic propagation scheme. We are therefore developing suitable spatial statistical models, based on the inferred acoustic groundtruth from backscatter and other pilot-program observations, to allow for such incorporation, and the visualization and representation techniques to allow them to be fully exploited.

The sources for all of our research under this program are high-density bathymetric, acoustic backscatter and watercolumn observations; these data are also essential for planning and development of the field experiment. The opportunity for new data collection being limited, we have assembled the dataset from public and government databases, and continue to add new data as observations are made during the pilot and field experiments. Coarse bathymetric products suitable for public release can then be made as required and published on the QPE website, and specialized products are made on request; we continue to maintain a geospatial database for the data, including visualization products. Limitations on distribution of data from some sources mandate that high-resolution bathymetric and backscatter products cannot be publicly distributed. These data are maintained separately, and products are released only as required (to qualified recipients).

WORK COMPLETED

Database Assembly & Product Creation: We have considerably increased the contents of the raw data holdings for the Southern East China Sea Exercise Area during the reporting period, primarily with the inclusion of a publicly available low-resolution surface grid for bathymetry, and several Limited Distribution high-resolution (multibeam raw data) datasets containing both bathymetry and acoustic backscatter data. We have produced, for general use within the QPE DRI, various versions of

the low-resolution data, including derived products such as overlays interpreting the data, and profiles through the data to assist with planning for the pilot program. All public products have been made available for the QPE website. Bathymetric and backscatter products from the Limited Distribution data have also been constructed for use consistent with the “Distribution D” statement under which it was supplied. We have also solicited further data from other QPE investigators by providing locations in which new observations would be beneficial.

Spatial Models for Unobserved Variability: We have developed a preliminary model for unobserved objects using the example of bathymetric features to bootstrap the process, and the metric of grounding probability to illustrate their usage.

RESULTS

Publicly Available Data: An example of the publicly available data is shown in Figure 1, illustrating the shelf-edge near the Mien Hua Canyon complex, and the associated Exercise Area box. The data shows some complexity in the shelf edge, but suffers from artifacts in the construction of the grid provided as source, which limit the utility to planning rather than analysis. Typical products, such as the poster-sized planning chart shown in Figure 2 were also developed, including profiles derived from the same source for use in planning the pilot study.

Spatial Models for Unobserved Variability: An example of the output of the current model is shown in Figure 7. Here, marked spatial (non-homogeneous, Poisson) point process models [Cressie, 1993] are used to model the rate of unobserved bathymetric features, with the mark distributions modeling the height of the unobserved features. A simple metric of probability of grounding is used to illustrate a spatially averaged summary based on stochastic descriptions of the plausible effects of these models rather than deterministic knowledge of all of the data. The effects of the mark distributions on the observed clearance are modeled (Figure 8), showing that the marks are only significant where other data is lacking (e.g., in the deeper water); effects such as update of the local posterior distribution due to time-sequences of observation and local-to-global mappings of probability are also included in the model. A similar process applied to geoacoustic data rather than bathymetric data would be used to interpret their effects on acoustic propagation uncertainty.

IMPACT/APPLICATIONS

The availability of high-resolution bathymetric and acoustic backscatter data allows for the development of better bathymetric uncertainty estimates and acoustic backscatter mosaics to inform the planning and operational aspects of the current DRI as well as in the general tactical environment. These also allow for calibration of sparse uncertainty models in bathymetry, and for the potential identification of geoacoustically active features in backscatter, leading to improved modeling of such effects. Development of flexible stochastic descriptions of bathymetric and geoacoustic phenomena that are frequently unobservable with available tactical measurement technologies provides for methods that may account for their effect within acoustic propagation models which are uncertainty-augmented.

RELATED PROJECTS

None

REFERENCES

Calder, B. R., 2006, On the Uncertainty of Archive Hydrographic Datasets, *IEEE J. Oceanic Eng.*, 31(2), pp 249-265.

Calder, B. R. and Mayer, L. A., 2003, Automatic Processing of High-Rate, High-Density Multibeam Echosounder Data, *Geochem., Geophys., and Geosys. (G3)*, 4(6), DOI 10.1029/2002GC000486.

Cressie, N. A. C., 1993, *Statistics for Spatial Data*, Wiley, ISBN: 0-471-00255-0.

Fonseca, L. and Calder, B., 2005, GeoCoder: An Efficient Backscatter Map Constructor. *Proc. US. Hydrographic Conference 2005*, San Diego, CA.

Goff, J., Jenkins, C. and Calder, B. R., 2006, Maximum a Posteriori Resampling of Noisy, Spatially Correlated Data, *Geochem., Geophys. and Geosys. (G3)*, 7(8), DOI 10.1029/2006GC001297.

Hare, R., Godin, A. and Mayer, L., 1995, Accuracy Estimation of Canadian Swath (Multi-Beam) and Sweep (Multi-Transducer) Sounding Systems, Tech. Rep., Canadian Hydrographic Service, Ottawa, Ont.

Holland, C., 2006, Mapping seabed variability: Rapid surveying of coastal regions, *J. Acoust. Soc. Am.*, 119(3), pp. 1373-1387.

Liu, Z.-X., S. Berne, Y. Saito, G. Lericolais, and T. Marsett (2000). *Quaternary Seismic Stratigraphy and Paleoenvironments on the Continental Shelf of the East China Sea*. *J. Asian Earth Sci.*, 18, 441-452.

Yin, P., S. Berne, P. Vagner, B. Lobrieu and Z. Liu (2003). *Mud Volcanoes at the Shelf Margin of the East China Sea*. *Mar. Geo.*, 194, 135-149.

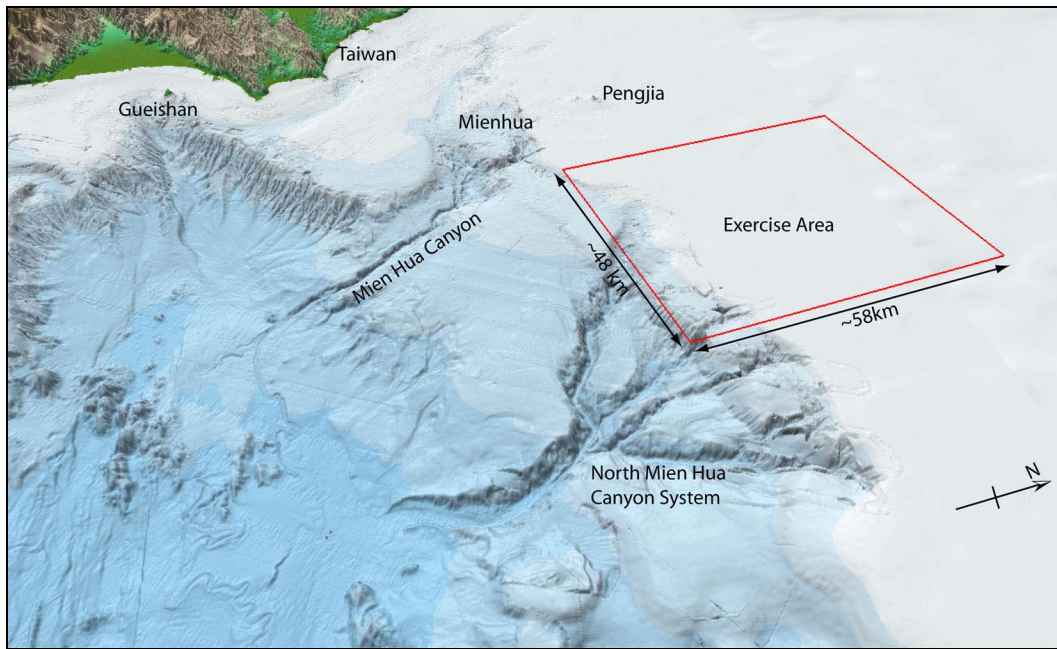


Figure 1: Perspective overview of the publicly available bathymetry with Exercise Area box (vertical exaggeration $\times 6$). The gridded source data has a number of artifacts that make it suitable only for planning, but still shows sufficient detail in the target area to be useful.

ONR Quantifying, Predicting and Exploiting Uncertainty DRI
 Bathymetry of DRI Experiment Area
 Northwest Pacific, Taiwan and Vicinity

Mercator Projection (Central Meridian 123° E, True Scale 25° N)
 Vertical Datum: MSL Horizontal Datum: WGS-84

Source & Treatment

The original data for this plot were apparently derived from a number of different sources, including Multibeam and Singlebeam Echosounders and possibly other non-acoustic measurements; some areas where data were not available have been subjected to interpolation using a smoothing surface spline. The original source had no metadata associated with it, so the method of construction is not well controlled. The data were gridded using unprojected (i.e., geographic) coordinates, and are therefore subject to venetate and anisotropic grid resolution.

This plot was constructed by re-projecting the original grid nodes individually into Mercator projection with central meridian at 123° E and true scale at 25° N, and then regridding using a simple weighted average. Two data sources were available, one at approximately

100m and another at approximately 500m resolution; the higher resolution data were used in preference, and the lower resolution data were used elsewhere (as marked on the plot). After gridding, the data were artificially shaded using a sun direction of 315° in order to highlight the relief, and then converted into imagery for plotting; a separate copy of the grid was contoured at 50m intervals for the plot.

The perspective images below the main plot were constructed using the shaded relief 3D objects from the vertage points indicated in the main plot. A vertical exaggeration of 4x was used; the contours are at 50m intervals to match those in the main plot.

Caveats in Data Interpretation

Due to the source and provenance of the data, it is impossible to say much about the details of depths represented with any real certainty.

Users should employ caution in close interpretation of the data, since there are a number of artifacts due to the original grid's construction which are evident as edges, sharp changes in gradient, small gaps, marks, and other potentially interpretable features that are not expected to be observed in the field. In particular, users should carefully examine any area of interest for evidence of sudden reduction in resolution and/or decrease in observed roughness of bathymetry, which typically indicates that the data has been constructed using the smoothing spline based on the observations around the edges of the area, rather than from actual observations.

This is particularly evident on the shallow shelf area around the majority of the Experiment Area selected for the DRI, which shows significantly lower variability than is evidenced in other observations.

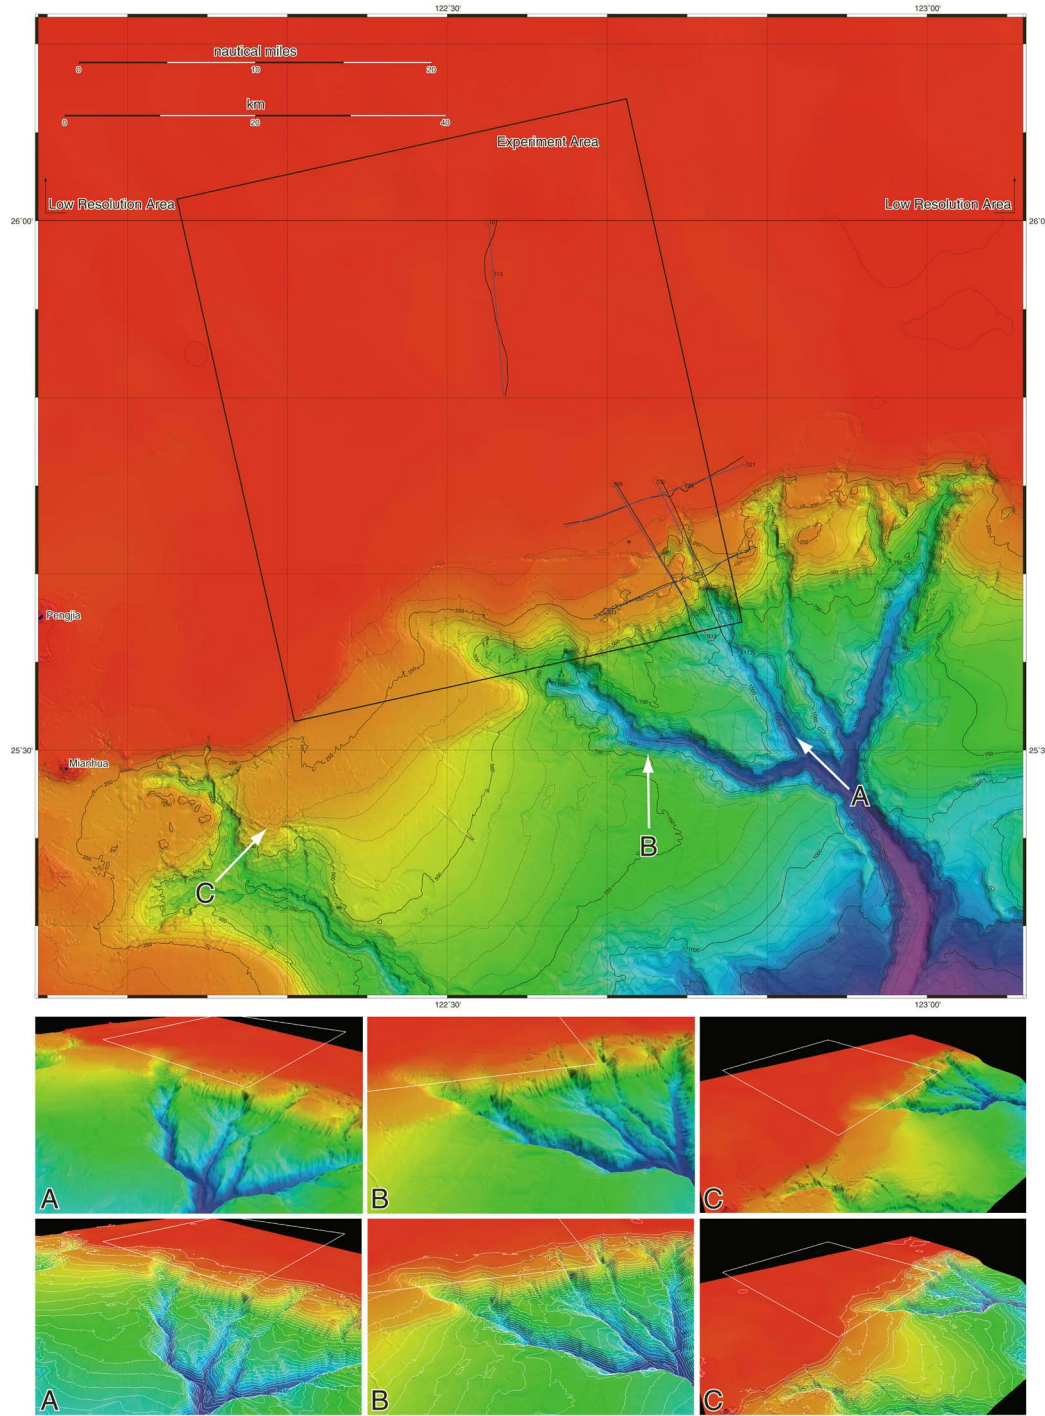


Figure 2: Example of poster-sized products from publicly available data used for planning, including profiles from the bathymetry in areas of interest and perspective views of the bathymetry to illustrate slopes and canyon complexities. Original size of image is 0.64x0.95m.

Figure 3-6: These figures describe results derived from the Limited Distribution data, and cannot be reproduced in this document; full details are available in the “Distribution D” version of this report.

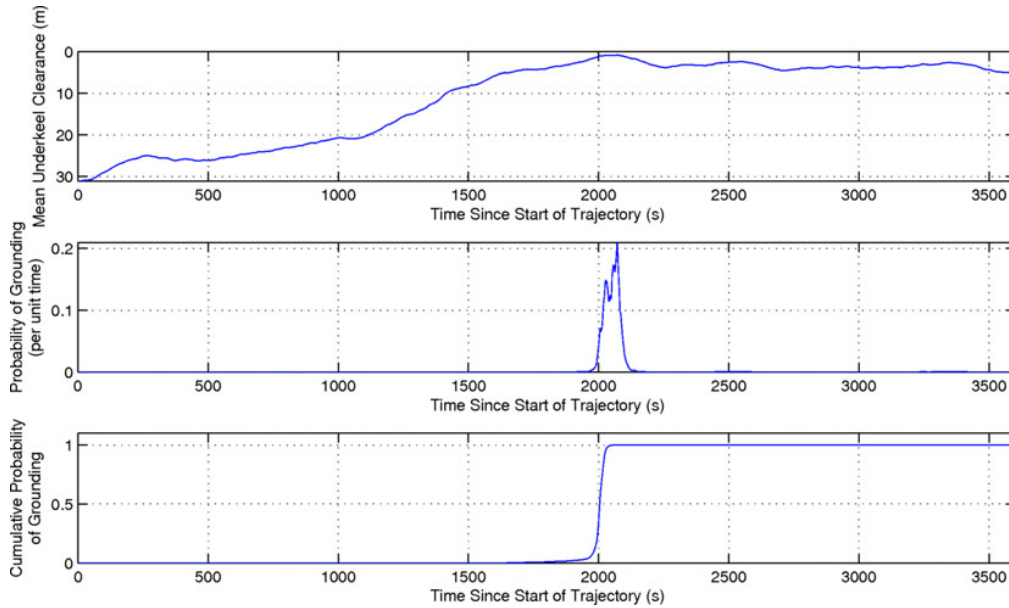


Figure 7: *An example of the marked spatial (non-homogeneous, Poisson) point process models in use to describe the mean stochastic effect of unobserved bathymetric features, using probability of grounding as an output metric. Here, the effect of the unobserved object's height on the clearance for a surface vessel result in modulation of the probability of grounding that depends on local spatio-temporal history, global circumstances, and the stochastic characterization of the unobserved.*

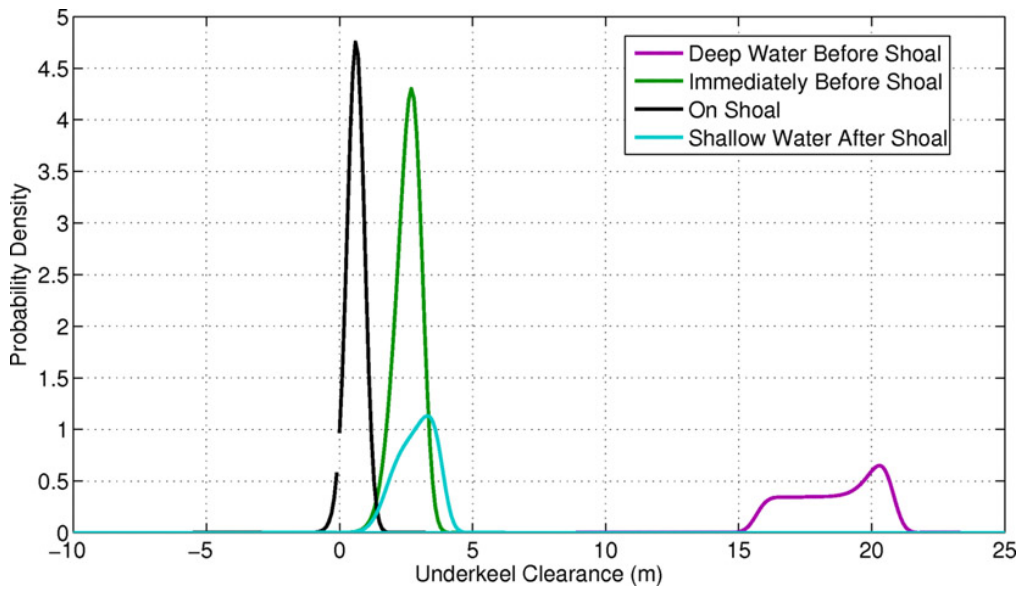


Figure 8: Examples of typical probability distributions driving the simulation of Figure 7.
The effects of the unobserved object distributions are evident in the non-Gaussian shape of the clearance distribution in deep water [purple curve] (one of the unobserved is modeled as uniform in height over a ~5m range), but such differences are not as significant in shallow water [black, green curves]; some recovery of effect is evident after the primary shoal [cyan curve] as circumstances stabilize.