

# Stability of the IMEX methods, CNLF and BDF2-AB2, for uncoupling systems of evolution equations

W. Layton<sup>a,1,2</sup>, C. Trenchea<sup>a,3,4</sup>

<sup>a</sup>*Department of Mathematics, University of Pittsburgh, Pittsburgh, PA 15260, USA*

---

## Abstract

Stability is proven for two second order, two step methods for uncoupling a system of two evolution equations with exactly skew symmetric coupling: the Crank-Nicolson Leap Frog (CNLF) combination and the BDF2-AB2 combination. The form of the coupling studied arises in spatial discretizations of the Stokes-Darcy problem. For CNLF we prove stability for the coupled system under the time step condition suggested by linear stability theory for the Leap-Frog scheme. This seems to be a first proof of a widely believed result. For BDF2-AB2 we prove stability under a condition that is better than the one suggested by linear stability theory for the individual methods. This report is an expanded version of the one submitted for publication.

*Key words:* partitioned methods, IMEX methods, CNLF, Stokes-Darcy coupling

---

## 1 Introduction

**This is an expanded version, containing supplementary material, of a report with the same title.**

In this report we prove stability of two, second order IMEX methods for uncoupling two evolution equations with exactly skew symmetric coupling:

---

<sup>1</sup> Email: wjl@pitt.edu, <http://www.math.pitt.edu/~wjl>.

<sup>2</sup> Partially supported by NSF grant DMS-0810385.

<sup>3</sup> Email: trenchea@pitt.edu, <http://www.math.pitt.edu/~trenchea>.

<sup>4</sup> Partially supported by Air Force grant FA 9550-09-1-0058

## Report Documentation Page

*Form Approved*  
*OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE <b>01 FEB 2011</b>	2. REPORT TYPE	3. DATES COVERED <b>00-00-2011 to 00-00-2011</b>			
4. TITLE AND SUBTITLE <b>Stability of the IMEX methods, CNLF and BDF2-AB2, for uncoupling systems of evolution equations</b>		5a. CONTRACT NUMBER			
		5b. GRANT NUMBER			
		5c. PROGRAM ELEMENT NUMBER			
6. AUTHOR(S)		5d. PROJECT NUMBER			
		5e. TASK NUMBER			
		5f. WORK UNIT NUMBER			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>University of Pittsburgh, Department of Mathematics, Pittsburgh, PA, 15260</b>		8. PERFORMING ORGANIZATION REPORT NUMBER			
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)			
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)			
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>Stability is proven for two second order, two step methods for uncoupling a system of two evolution equations with exactly skew symmetric coupling: the Crank-Nicolson Leap Frog (CNLF) combination and the BDF2-AB2 combination. The form of the coupling studied arises in spatial discretizations of the Stokes-Darcy problem. For CNLF we prove stability for the coupled system under the time step condition suggested by linear stability theory for the Leap-Frog scheme. This seems to be a first proof of a widely believed result. For BDF2-AB2 we prove stability under a condition that is better than the one suggested by linear stability theory for the individual methods. This report is an expanded version of the one submitted for publication.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>	<b>Same as Report (SAR)</b>	<b>17</b>	

$$\begin{aligned} \frac{du}{dt} + A_1 u + C\phi &= f(t), \text{ for } t > 0 \text{ and } u(0) = u_0 \\ \frac{d\phi}{dt} + A_2 \phi - C^T u &= g(t), \text{ for } t > 0 \text{ and } \phi(0) = \phi_0. \end{aligned}$$

This problem occurs, for example, after spatial discretization of the evolutionary Stokes-Darcy problem, e.g., [16,12,18,17]. Here

$$u : [0, \infty) \rightarrow \mathbb{R}^N, \phi : [0, \infty) \rightarrow \mathbb{R}^M,$$

and  $f, g, u_0, \phi_0$  and the matrices  $A_{1/2}, C$  have compatible dimensions (and in particular  $C$  is  $N \times M$ ). Note especially the exactly skew symmetric coupling linking the two equations. We assume that **the  $A_i$  are SPD**. Our analysis extends to the case of  $A_i$  positive real or even nonlinear with  $\langle A(v), v \rangle \geq \text{Const.}|v|^2$ . With superscript denoting the time step number, the first method is CNLF, the combination of Crank-Nicolson and Leap Frog given by: for  $n \geq 2$

$$\begin{aligned} \frac{u^{n+1} - u^{n-1}}{2\Delta t} + A_1 \frac{u^{n+1} + u^{n-1}}{2} + C\phi^n &= f^n, \\ \frac{\phi^{n+1} - \phi^{n-1}}{2\Delta t} + A_2 \frac{\phi^{n+1} + \phi^{n-1}}{2} - C^T u^n &= g^n. \end{aligned} \quad (\text{CNLF})$$

Since the stability region of LF is the interval  $-1 < \text{Im}(z) < +1$ , from the scalar case we expect a stability restriction of the form  $\Delta t \sqrt{\lambda_{\max}(C^T C)} \leq 1$ . Interestingly, it seems that sufficiency in the non-commutative case is not yet proven Verwer [22], remark 3.1, page 6. We prove in Section 2 that CNLF is indeed stable under (1), exactly the condition suggested by the linear stability theory.

For vectors of the same length, denote the usual euclidean inner product and norm by  $\langle u, v \rangle := u^T v$ ,  $|\phi|^2 := \langle \phi, \phi \rangle$ . We denote the weighted norms by

$$|u|_{A_1}^2 := u^T A_1 u, \text{ and } |\phi|_{A_2}^2 := \phi^T A_2 \phi.$$

**Theorem 1 (Stability of CNLF)** *Consider CNLF. Suppose the time step restriction holds:*

$$\Delta t \sqrt{\lambda_{\max}(C^T C)} \leq \alpha < 1, \text{ for some } \alpha < 1. \quad (1)$$

Then for any  $n \geq 2$

$$\begin{aligned}
& \frac{1-\alpha}{2} \left[ |u^{n+1}|^2 + |\phi^{n+1}|^2 + |u^n|^2 + |\phi^n|^2 \right] \\
& + \Delta t \sum_{\ell=1}^n \frac{1}{4} \left( |u^{\ell+1} + u^{\ell-1}|_{A_1}^2 + |\phi^{\ell+1} + \phi^{\ell-1}|_{A_2}^2 \right) \\
& \leq \frac{1}{2} \left[ |u^1|^2 + |\phi^1|^2 + |u^0|^2 + |\phi^0|^2 \right] + \Delta t \left[ \langle C\phi^0, u^1 \rangle - \langle C\phi^1, u^0 \rangle \right] \\
& \quad + \Delta t \sum_{\ell=1}^n \left( \lambda_{\min}^{-1}(A_1) |f^\ell|^2 + \lambda_{\min}^{-1}(A_2) |g^\ell|^2 \right).
\end{aligned}$$

Next we establish the stability of BDF2 with explicit AB2 coupling

$$\begin{aligned}
\frac{3u^{n+1} - 4u^n + u^{n-1}}{2\Delta t} + A_1 u^{n+1} + C(2\phi^n - \phi^{n-1}) &= f^{n+1}, \quad (\text{BDF2-AB2}) \\
\frac{3\phi^{n+1} - 4\phi^n + \phi^{n-1}}{2\Delta t} + A_2 \phi^{n+1} - C^T(2u^n - u^{n-1}) &= g^{n+1}.
\end{aligned}$$

The stability region of AB2 suggests that this combination is strictly worse than CNLF. However, we prove that the combination inherits enough stability from BDF2 to be stable under a time step condition that in many cases is better than the one for CNLF.

**Theorem 2 (Stability of BDF2-AB2)** *Consider BDF2-AB2. Suppose that the time step restriction holds*

$$\Delta t \max\{\lambda_{\max}(A_1^{-1}CC^T), \lambda_{\max}(A_2^{-1}C^TC)\} \leq \alpha < 1, \quad \text{for some } \alpha > 0, \quad (2)$$

then BDF2-AB2 is stable:

$$|u^n|^2 + |\phi^n|^2 \leq C(\text{initial data, forcing terms}), \text{ for any } n \geq 2.$$

More precisely, for all  $n \geq 1$ , we have that

$$\begin{aligned}
& \frac{1}{2} \left( |u^{n+1}|^2 + |\phi^{n+1}|^2 \right) + \frac{1}{2} \left( |2u^{n+1} - u^n|^2 + |2\phi^{n+1} - \phi^n|^2 \right) + \Delta t \sum_{\ell=1}^n \frac{1}{2} \left( \mathcal{R}^{\ell+1} + \mathfrak{R}^{\ell+1} \right) \\
& \leq \frac{1}{2} \left( |u^1|^2 + |\phi^1|^2 \right) + \frac{1}{2} \left( |2u^1 - u^0|^2 + |2\phi^1 - \phi^0|^2 \right) \\
& \quad + \Delta t \sum_{\ell=1}^n \frac{1}{2(1-\alpha)} \left( \frac{|f^{\ell+1}|^2}{\lambda_{\min}(A_1)} + \frac{|g^{\ell+1}|^2}{\lambda_{\min}(A_2)} \right),
\end{aligned}$$

where we have denoted

$$\begin{aligned}\mathcal{R}^{\ell+1} &= \left| \sqrt{\Delta t} C^T u^{\ell+1} - \frac{1}{2\sqrt{\Delta t}} (\phi^{\ell+1} - 2\phi^\ell + \phi^{\ell-1}) \right|^2 \\ &\quad + \left| \sqrt{\Delta t} C \phi^{\ell+1} + \frac{1}{2\sqrt{\Delta t}} (u^{\ell+1} - 2u^\ell + u^{\ell-1}) \right|^2, \\ \mathfrak{R}^{\ell+1} &= \left| \lambda_{\min}^{1/2}(A_1 - \Delta t C C^T) u^{\ell+1} - \frac{1}{2\lambda_{\min}^{1/2}(A_1 - \Delta t C C^T)} f^{\ell+1} \right|^2 \\ &\quad + \left| \lambda_{\min}^{1/2}(A_2 - \Delta t C^T C) \phi^{\ell+1} - \frac{1}{2\lambda_{\min}^{1/2}(A_2 - \Delta t C^T C)} g^{\ell+1} \right|^2.\end{aligned}$$

Note that (2) implies that  $A_1 - \Delta t C C^T, A_2 - \Delta t C C^T$  are SPD.

Both methods use 3 levels; approximations are needed at the first two time steps to begin. We suppose these are computed to appropriate accuracy, Verwer [22].

Because the problem and methods are linear, stability immediately implies that the error is bounded by its consistency error.

### 1.1 Connection to the coupled Stokes-Darcy problem

To specify the motivating problem leading to the system of evolution equations considered, let two domains be denoted by  $\Omega_f, \Omega_p$  and lie across an interface  $I$  from each other. The fluid velocity and porous media piezometric head (Darcy pressure) satisfy

$$\begin{aligned}u_t - \nu \Delta u + \nabla p &= \mathbf{f}_f(x, t), \nabla \cdot u = 0, \quad \text{in } \Omega_f, \\ S_0 \phi_t - \nabla \cdot (\mathcal{K} \nabla \phi) &= f_p, \quad \text{in } \Omega_p, \\ \phi(x, 0) &= \phi_0, \quad \text{in } \Omega_p \text{ and } u(x, 0) = u_0, \quad \text{in } \Omega_f, \\ \phi(x, t) &= 0, \quad \text{in } \partial\Omega_p \setminus I \text{ and } u(x, t) = 0, \quad \text{in } \partial\Omega_f \setminus I, \\ &+ \text{coupling conditions across } I.\end{aligned}\tag{3}$$

Let  $\hat{n}_{f/p}$  denote the indicated, outward pointing, unit normal vector on  $I$ . The coupling conditions are conservation of mass and balance of forces on  $I$

$$\begin{aligned}u \cdot \hat{n}_f + \mathbf{u}_p \cdot \hat{n}_p &= 0, \quad \text{on } I \Leftrightarrow u \cdot \hat{n}_f - \frac{1}{\eta} \mathcal{K} \nabla \phi \cdot \hat{n}_p = 0, \quad \text{on } I, \\ p - \nu \hat{n}_f \cdot \nabla u \cdot \hat{n}_f &= \rho g \phi \quad \text{on } I.\end{aligned}$$

The last condition needed is a tangential condition on the fluid region's velocity on the interface. The most correct condition is not completely understood (possibly due to matching a pointwise velocity in the fluid region with an

averaged or homogenized velocity in the porous region). We take the Beavers-Joseph-Saffman (-Jones) interfacial coupling

$$-\nu \nabla u \cdot \hat{n}_f = \frac{\alpha}{\sqrt{\hat{\tau}_i \cdot \mathcal{K} \cdot \hat{\tau}_i}} u \cdot \hat{\tau}_i, \text{ on } I \text{ for any } \hat{\tau}_i \text{ tangent vector on } I.$$

This is a simplification of the original and more physically realistic Beavers-Joseph conditions (in  $u \cdot \hat{\tau}_i$  which is replaced by  $(u - \mathbf{u}_p) \cdot \hat{\tau}_i$ ). Here:

- $\phi$  = Darcy pressure + elevation induced pressure = piezometric head
- $\mathbf{q}$  = volume discharge,
- $\mathbf{u}_p$  = fluid velocity in porous media region,  $\Omega_p$ ,
- $\mathbf{u}$  = fluid velocity in Stokes region,  $\Omega_f$ ,
- $\mathbf{f}_f, f_p$  = body forces in fluid region and source in porous region,
- $\mathcal{K}$  = hydraulic conductivity tensor,
- $\nu$  = kinematic viscosity of fluid,
- $S_0$  = specific mass storativity coefficient,
- $\eta$  = volumetric porosity,
- $\rho$  = density,
- $g$  = gravitational acceleration constant.

We shall assume that the boundary conditions are simple Dirichlet conditions on the exterior boundaries (not including the interface  $I$ ).

We denote the  $L^2(I)$  norm by  $\|\cdot\|_I$  and the  $L^2(\Omega_{f/p})$  norms by  $\|\cdot\|_{f/p}$ , respectively; the corresponding inner products are denoted by  $(\cdot, \cdot)_{f/p}$ . Define

$$\begin{aligned} X_f &:= \{v \in (H^1(\Omega_f))^d : v = 0 \text{ on } \partial\Omega_f \setminus I\}, \\ X_p &:= \{\psi \in H^1(\Omega_p) : \psi = 0 \text{ on } \partial\Omega_p \setminus I\}, \\ Q &= L_0^2(\Omega_f). \end{aligned}$$

Define the bilinear forms

$$\begin{aligned} a_f(u, v) &= (\nu \nabla u, \nabla v)_f + \sum_i \int_I \frac{\alpha}{\sqrt{\hat{\tau}_i \cdot \mathcal{K} \cdot \hat{\tau}_i}} (u \cdot \hat{\tau}_i)(v \cdot \hat{\tau}_i) ds, \\ a_p(\phi, \psi) &= (K \nabla \phi, \nabla \psi)_p, \\ c_I(u, \phi) &= n \rho g \int_I \phi u \cdot \hat{n}_f ds. \end{aligned}$$

A (monolithic) variational formulation of the coupled problem is to find  $(u, p, \phi) : [0, \infty) \rightarrow X_f \times Q_f \times X_p$  satisfying the given initial conditions and, for all

$v \in X_f, q \in Q_f, \psi \in X_p$

$$\begin{aligned} (u_t, v)_f + a_f(u, v) - (p, \nabla \cdot v)_f + c_I(v, \phi) &= (\mathbf{f}_f, v)_f, \\ (q, \nabla \cdot u)_f &= 0, \\ S_0(\phi_t, \psi)_p + a_p(\phi, \psi) - c_I(u, \psi) &= (f_p, \psi)_p. \end{aligned} \tag{4}$$

Note that, setting  $v = u, \psi = \phi$  and adding, the coupling terms exactly cancel in the monolithic sum yielding the energy estimate for the coupled system.

To discretize the Stokes-Darcy problem in space by the finite element method, we select finite element spaces

velocity:  $X_f^h \subset X_f$ , Darcy pressure:  $X_p^h \subset X_p$ , Stokes pressure:  $Q_f^h \subset Q_f$

based on a conforming FEM triangulation with maximum triangle diameter denoted "h". No mesh compatibility at the interface  $I$  between the FEM meshes in the two subdomains is assumed. The Stokes velocity-pressure FEM spaces are assumed to satisfy the usual discrete inf-sup condition for stability of the discrete pressure. We denote the discretely divergence free velocities by

$$V^h := X_f^h \cap \{v_h : (q_h, \nabla \cdot v_h)_f = 0, \text{ for all } q_h \in Q_f^h\}$$

The semi-discrete approximations are maps  $(u_h, p_h, \phi_h) : [0, \infty) \rightarrow X_f^h \times Q_f^h \times X_p^h$  satisfying the given initial conditions and, for all  $v_h \in X_f^h, q_h \in Q_f^h, \psi_h \in V_p^h$

$$\begin{aligned} (u_{h,t}, v_h)_f + a_f(u_h, v_h) - (p_h, \nabla \cdot v_h)_f + c_I(v_h, \phi_h) &= (\mathbf{f}_f, v_h)_f, \\ (q_h, \nabla \cdot u_h)_f &= 0, \\ S_0(\phi_{h,t}, \psi_h)_p + a_p(\phi_h, \psi_h) - c_I(u_h, \psi_h) &= (f_p, \psi_h)_p. \end{aligned} \tag{5}$$

Note in particular the exactly skew symmetric coupling between the Stokes and the Darcy sub-problems. If the velocity is restricted to the discretely divergence free subspace we obtain The semi-discrete approximations are maps  $(u_h, \phi_h) : [0, \infty) \rightarrow V_f^h \times X_p^h$  satisfying the given initial conditions and, for all  $v_h \in V_f^h, \psi_h \in V_p^h$

$$\begin{aligned} (u_{h,t}, v_h)_f + a_f(u_h, v_h) + c_I(v_h, \phi_h) &= (\mathbf{f}_f, v_h)_f, \\ S_0(\phi_{h,t}, \psi_h)_p + a_p(\phi_h, \psi_h) - c_I(u_h, \psi_h) &= (f_p, \psi_h)_p. \end{aligned}$$

The exactly skew symmetric coupling between the Stokes and the Darcy sub-problems is retained. Picking a basis for the FEM spaces in the above, this leads to a system:

$$\begin{aligned} M_f \frac{du}{dt} + A_1 u + C\phi &= f(t), \text{ for } t > 0 \text{ and } u(0) = u_0 \\ S_0 M_p \frac{d\phi}{dt} + A_2 \phi - C^T u &= g(t), \text{ for } t > 0 \text{ and } \phi(0) = \phi_0. \end{aligned}$$

Here the respective FEM mass matrices are denoted  $M_{f/p}$ . These are often spectrally equivalent to the identity. The above system can also be reduced to the one studied by a further change of variable. The Stokes-Darcy problem has experienced a rapid development of numerical methods. We end the paper with a list of some additional papers that, while not relevant to the precise problem considered herein, are on numerical methods for the Stokes -Darcy problem.

## 1.2 Previous work

When  $A_i$  are SPD, IMEX methods, like CNLF and BDF2-AB2 require the solution of two, smaller SPD systems per time step (which can be done by legacy codes for the independent sub-problems) as compared to one larger, nonsymmetric system for monolithically coupled methods. Given this potentially large simplification, it is not surprising that IMEX methods (and associated partitioned schemes) have been used extensively in the computational practice of multi-domain, multiphysics applications. The theory of IMEX methods is also developing; see [11,21,2] and [13] for early papers and [1,10] and particularly [22] and the book [14] for recent work. CNLF is itself a classic (e.g. [15]) combination of methods in computational fluid dynamics with wide practical use, including in the dynamic core of the NCAR climate model, [19].

Partitioned methods are often motivated by available codes for subproblems [20] and tend to be application specific. Examples of partitioned methods include ones designed for fluid-structure interaction [3,4,7], Maxwell's equations [23] and atmosphere-ocean coupling [8,10,9]. The block system we study arises in evolutionary groundwater-surface water coupling, e.g., [6,5,12,16]. Mu and Zhu [17] gave the first (in 2010) numerical analysis of a partitioned method based on the backward Euler-forward Euler IMEX scheme; this has been extended to, so-called, asynchronous time stepping (different time steps for different system components) in [18]. Our work herein is motivated by the search for partitioned methods for the Stokes-Darcy problem with higher accuracy and better stability.

## 2 Proof of stability of CNLF

This section gives a complete proof of Theorem 1.

**Lemma 3** *We estimate*

$$\langle C\phi, u \rangle = \frac{1}{2}|C\phi|^2 + \frac{1}{2}|u|^2 - \frac{1}{2}|u - C\phi|^2$$



and, if  $A_i$  are SPD

$$\begin{aligned} |u| &\leq \lambda_{\min}^{-1/2}(A_1)|u|_{A_1}, |\phi| \leq \lambda_{\min}^{-1/2}(A_2)|\phi|_{A_2}, \\ |C\phi| &\leq \sqrt{\lambda_{\max}(C^T C)}|\phi|. \end{aligned}$$

Thus

$$|\langle C\phi, u \rangle| \leq \frac{1}{2}\sqrt{\lambda_{\max}(C^T C)}|\phi|^2 + \frac{1}{2}\sqrt{\lambda_{\max}(C^T C)}|u|^2.$$

**Proof.** The first claim is the polarization identity. The second inequality is elementary while the fourth follows by inserting the third into the first. For the third, we have

$$|C\phi| = \langle C\phi, C\phi \rangle^{1/2} = \langle C^T C\phi, \phi \rangle^{1/2} \leq \lambda_{\max}^{1/2}(C^T C)|\phi|.$$

■

The **first** of three main steps in the proof of Theorem 1 is to take the inner product of CNLF with  $u^{n+1} + u^{n-1}$  and  $\phi^{n+1} + \phi^{n-1}$  and add:

$$\begin{aligned} &\frac{1}{2\Delta t} \left[ |u^{n+1}|^2 + |\phi^{n+1}|^2 \right] - \frac{1}{2\Delta t} \left[ |u^{n-1}|^2 + |\phi^{n-1}|^2 \right] \\ &\quad + \frac{1}{2} \left[ |u^{n+1} + u^{n-1}|_{A_1}^2 + |\phi^{n+1} + \phi^{n-1}|_{A_2}^2 \right] \tag{6} \\ &\quad + \langle C\phi^n, u^{n+1} + u^{n-1} \rangle - \langle C^T u^n, \phi^{n+1} + \phi^{n-1} \rangle \\ &\quad = \langle f^n, u^{n+1} + u^{n-1} \rangle + \langle g^n, u^{n+1} + u^{n-1} \rangle. \end{aligned}$$

The **second** step is to rearrange the coupling terms as an exact difference between two time levels:  $Coupling = \langle C\phi^n, u^{n+1} - u^{n-1} \rangle - \langle C^T u^n, \phi^{n+1} - \phi^{n-1} \rangle = C^{n+1/2} - C^{n-1/2}$ , where

$$\begin{aligned} C^{n+1/2} &:= \langle C\phi^n, u^{n+1} \rangle - \langle C\phi^{n+1}, u^n \rangle, \\ C^{n-1/2} &:= \langle C\phi^{n-1}, u^n \rangle - \langle C\phi^n, u^{n-1} \rangle. \end{aligned}$$

The **third** step is to add and subtract  $|u^n|^2 + |\phi^n|^2$  to the control the energy at level  $t_n$ :

$$\begin{aligned} &\frac{1}{2\Delta t} \left[ |u^{n+1}|^2 + |\phi^{n+1}|^2 + |u^n|^2 + |\phi^n|^2 \right] - \frac{1}{2\Delta t} \left[ |u^n|^2 + |\phi^n|^2 + |u^{n-1}|^2 + |\phi^{n-1}|^2 \right] \\ &\quad + \frac{1}{2} \left[ |u^{n+1} + u^{n-1}|_{A_1}^2 + |\phi^{n+1} + \phi^{n-1}|_{A_2}^2 \right] + C^{n+1/2} - C^{n-1/2} \\ &= \langle f^n, u^{n+1} + u^{n-1} \rangle + \langle g^n, u^{n+1} + u^{n-1} \rangle \equiv \mathbf{RHS}. \end{aligned}$$

Using Lemma 3 we treat **RHS** in a standard way:

$$\begin{aligned} \mathbf{RHS} &\leq |f^n| \lambda_{\min}^{-1/2}(A_1) |u^{n+1} + u^{n-1}|_{A_1} + |g^n| \lambda_{\min}^{-1/2}(A_2) |\phi^{n+1} + \phi^{n-1}|_{A_2} \\ &\leq \left( \lambda_{\min}^{-1}(A_1) |f^n|^2 + \lambda_{\min}^{-1}(A_2) |g^n|^2 \right) + \frac{1}{4} (|u^{n+1} + u^{n-1}|_{A_1}^2 + |\phi^{n+1} + \phi^{n-1}|_{A_2}^2). \end{aligned}$$

Thus, define the system energy

$$E^{n+1/2} := \frac{1}{2} \left[ |u^{n+1}|^2 + |\phi^{n+1}|^2 + |u^n|^2 + |\phi^n|^2 \right] + \Delta t C^{n+1/2}.$$

Collecting terms we obtain

$$\begin{aligned} E^{n+1/2} - E^{n-1/2} + \Delta t \left( |u^{n+1} + u^{n-1}|_{A_1}^2 + |\phi^{n+1} + \phi^{n-1}|_{A_2}^2 \right) \\ \leq \Delta t \left( \lambda_{\min}^{-1}(A_1) |f^n|^2 + \lambda_{\min}^{-1}(A_2) |g^n|^2 \right). \end{aligned}$$

Obviously,  $E^{n+1/2} - E^{n-1/2} + \{\text{positive\_terms}\} \leq RHS$  immediately implies stability provided only that  $E^{n+1/2} > 0$  for every  $n$ . We have (using Lemma 3 to bound the coupling terms)

$$\begin{aligned} E^{n+1/2} &\geq \frac{1}{2} \left[ |u^{n+1}|^2 + |\phi^{n+1}|^2 + |u^n|^2 + |\phi^n|^2 \right] \\ &\quad - \frac{\Delta t}{2} \sqrt{\lambda_{\max}(C^T C)} \left[ |u^{n+1}|^2 + |u^n|^2 + |\phi^{n+1}|^2 + |\phi^n|^2 \right]. \end{aligned}$$

This is positive (completing the proof) provided

$$\Delta t \sqrt{\lambda_{\max}(C^T C)} < 1.$$

### 3 Proof of stability of BDF2-AB2

We proceed to prove Theorem 2. Take the inner product of BDF2-AB2 with  $u^{n+1}$ ,  $\phi^{n+1}$ , respectively, and add. There are two keys to the proof of stability. The **first key** is the treatment of the *BDF2 term*. Apply the identity

$$\left[ \frac{a^2}{4} + \frac{(2a-b)^2}{4} \right] - \left[ \frac{b^2}{4} + \frac{(2b-c)^2}{4} \right] + \frac{(a-2b+c)^2}{4} = \frac{1}{2} (3a-4b+c)a$$

with  $a = u^{n+1}, b = u^n, c = u^{n-1}$ , and once with  $a = \phi^{n+1}, b = \phi^n, c = \phi^{n-1}$ . This gives

$$\begin{aligned}
& \frac{1}{4\Delta t} \left( |u^{n+1}|^2 + |2u^{n+1} - u^n|^2 \right) - \frac{1}{4\Delta t} \left( |u^n|^2 + |2u^n - u^{n-1}|^2 \right) \\
& \quad + \frac{1}{4\Delta t} |u^{n+1} - 2u^n + u^{n-1}|^2 \\
& + \frac{1}{4\Delta t} \left( |\phi^{n+1}|^2 + |2\phi^{n+1} - \phi^n|^2 \right) - \frac{1}{4\Delta t} \left( |\phi^n|^2 + |2\phi^n - \phi^{n-1}|^2 \right) \\
& \quad + \frac{1}{4\Delta t} |\phi^{n+1} - 2\phi^n + \phi^{n-1}|^2 \\
& + |u^{n+1}|_{A_1}^2 + |\phi^{n+1}|_{A_2}^2 + \langle C(2\phi^n - \phi^{n-1}), u^{n+1} \rangle - \langle C^T(2u^n - u^{n-1}), \phi^{n+1} \rangle \\
& = \langle f^{n+1}, u^{n+1} \rangle + \langle g^{n+1}, \phi^{n+1} \rangle.
\end{aligned} \tag{7}$$

The **second key** is to *rearrange the coupling terms*. We use the skew-symmetry of the coupling term and the polarization identity (Lemma 3) to write it as follows:

$$\begin{aligned}
\text{Coupling} &= \langle C(2\phi^n - \phi^{n-1}), u^{n+1} \rangle - \langle C^T(2u^n - u^{n-1}), \phi^{n+1} \rangle \\
&= -\langle C(\phi^{n+1} - 2\phi^n + \phi^{n-1}), u^{n+1} \rangle + \langle C^T(u^{n+1} - 2u^n + u^{n-1}), \phi^{n+1} \rangle \\
&= -\frac{1}{4\Delta t} |\phi^{n+1} - 2\phi^n + \phi^{n-1}|^2 - \Delta t |u^{n+1}|_{CC^T}^2 \\
& \quad - \frac{1}{4\Delta t} |u^{n+1} - 2u^n + u^{n-1}|^2 - \Delta t |\phi^{n+1}|_{C^TC}^2 + \mathcal{R}^{n+1}.
\end{aligned} \tag{8}$$

Then (7) and (8) give

$$\begin{aligned}
& \frac{1}{4\Delta t} \left( |u^{n+1}|^2 + |2u^{n+1} - u^n|^2 \right) - \frac{1}{4\Delta t} \left( |u^n|^2 + |2u^n - u^{n-1}|^2 \right) \\
& \quad + \frac{1}{4\Delta t} \left( |\phi^{n+1}|^2 + |2\phi^{n+1} - \phi^n|^2 \right) - \frac{1}{4\Delta t} \left( |\phi^n|^2 + |2\phi^n - \phi^{n-1}|^2 \right) \\
& \quad + |u^{n+1}|_{A_1}^2 + |\phi^{n+1}|_{A_2}^2 - \Delta t |u^{n+1}|_{CC^T}^2 - \Delta t |\phi^{n+1}|_{C^TC}^2 + \mathcal{R}^{n+1} \\
& = \langle f^{n+1}, u^{n+1} \rangle + \langle g^{n+1}, \phi^{n+1} \rangle.
\end{aligned}$$

Using again the polarization identity yields

$$\begin{aligned}
& \frac{1}{4\Delta t} \left( |u^{n+1}|^2 + |2u^{n+1} - u^n|^2 \right) - \frac{1}{4\Delta t} \left( |u^n|^2 + |2u^n - u^{n-1}|^2 \right) \\
& \quad + \frac{1}{4\Delta t} \left( |\phi^{n+1}|^2 + |2\phi^{n+1} - \phi^n|^2 \right) - \frac{1}{4\Delta t} \left( |\phi^n|^2 + |2\phi^n - \phi^{n-1}|^2 \right) \\
& \quad + |u^{n+1}|_{A_1}^2 + |\phi^{n+1}|_{A_2}^2 - \Delta t |u^{n+1}|_{CC^T}^2 - \Delta t |\phi^{n+1}|_{C^TC}^2 + \mathcal{R}^{n+1} \\
& = \lambda_{\min}(A_1 - \Delta t CC^T) |u^{n+1}|^2 + \frac{1}{4\lambda_{\min}(A_1 - \Delta t CC^T)} |f^{n+1}|^2 \\
& \quad + \lambda_{\min}(A_2 - \Delta t C^TC) |\phi^{n+1}|^2 + \frac{1}{4\lambda_{\min}(A_2 - \Delta t C^TC)} |g^{n+1}|^2 - \mathfrak{R}^{n+1},
\end{aligned}$$

which by summation implies the stability result

$$\begin{aligned}
& \frac{|u^{n+1}|^2}{4\Delta t} + \frac{1}{4\Delta t}|2u^{n+1}-u^n|^2 + \frac{|\phi^{n+1}|^2}{4\Delta t} + \frac{1}{4\Delta t}|2\phi^{n+1}-\phi^n|^2 + \sum_{\ell=1}^n (\mathcal{R}^{\ell+1} + \mathfrak{R}^{\ell+1}) \\
& \leq \frac{|u^1|^2}{4\Delta t} + \frac{1}{4\Delta t}|2u^1 - u^0|^2 + \frac{|\phi^1|^2}{4\Delta t} + \frac{1}{4\Delta t}|2\phi^1 - \phi^0|^2 \\
& \quad + \sum_{\ell=1}^n \left( \frac{1}{4(1-\alpha)\lambda_{\min}(A_1)} |f^{n+1}|^2 + \frac{1}{4(1-\alpha)\lambda_{\min}(A_2)} |g^{n+1}|^2 \right).
\end{aligned}$$

#### 4 Numerical verification of the Theorems

We give two numerical tests that confirm the theory (showing in particular that the restriction (1) is sharp). The examples also illustrate that there are cases where each method's time step restriction is better than the other method.

In all test cases, the initial conditions are

$$u^0 = \begin{pmatrix} 1 \\ 1 \end{pmatrix}, \quad \phi^0 = \begin{pmatrix} 1 \\ 1 \end{pmatrix}$$

and  $u^1, \phi^1$  are computed using the implicit backward Euler. We take  $f = g = 0$ , so that *any growth* in the energy is an instability.

Test 1. In the first case the matrices are

$$A_1 = \begin{pmatrix} 10 & 0 \\ 0 & 20 \end{pmatrix}, \quad A_2 = \begin{pmatrix} 30 & 0 \\ 0 & 50 \end{pmatrix}, \quad C = \begin{pmatrix} 2 & 3 \\ 4 & 5 \end{pmatrix}$$

yielding the following time step restrictions

$$\Delta t_{\text{CNLF}} = 0.1361, \quad \Delta t_{\text{BDFAB}} = 0.2990.$$

With the time step

$$\Delta t = 0.99 * \Delta t_{\text{CNLF}}$$

both methods are observed to be stable, Figure 1). With the time step  $\Delta t = 1.01 * \Delta t_{\text{CNLF}}$  the CNLF approximations exhibit growth and thus are unstable. Since  $1.01 * \Delta t_{\text{CNLF}} < \Delta t_{\text{BDFAB}}$  the theory predicts BDF2-AB2 to be stable and this is indeed seen in Figure 2.

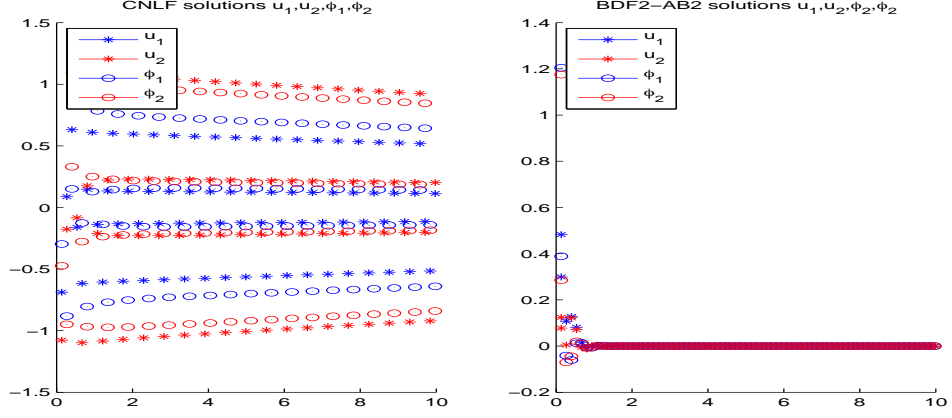


Fig. 1. Both methods stable, as predicted.

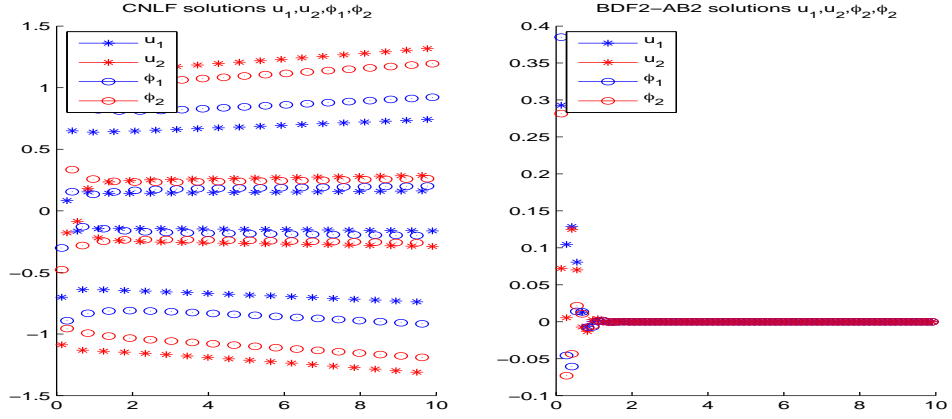


Fig. 2. CNLF unstable, BDF2-AB2 stable, as predicted.

Test 2. With matrices

$$A_1 = \begin{pmatrix} 1 & 0 \\ 0 & 2 \end{pmatrix}, \quad A_2 = \begin{pmatrix} 3 & 0 \\ 0 & 5 \end{pmatrix}, \quad C = \begin{pmatrix} 2 & 3 \\ 4 & 5 \end{pmatrix}$$

the time step restrictions are

$$\Delta t_{\text{CNLF}} = 0.1361, \quad \Delta t_{\text{BDFAB}} = 0.0299.$$

With time step  $\Delta t = .99 * \Delta t_{\text{CNLF}}$  the CNLF converges, while with BDF2-AB2 the solution is unstable, Figure 3.

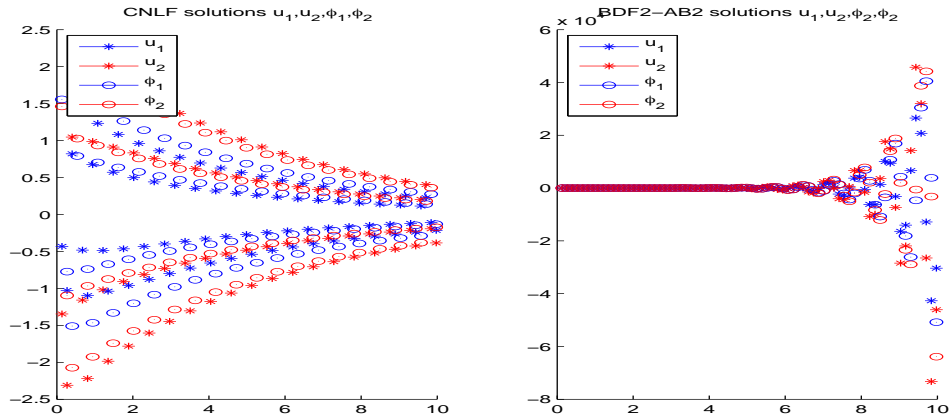


Fig. 3. CNLF stable, BDF2-AB2 unstable, as predicted.

## References

- [1] M. Anitescu, F. Pahlevani, W. J. Layton, Implicit for local effects and explicit for nonlocal effects is unconditionally stable, *Electron. Trans. Numer. Anal.* 18 (2004) 174–187.
- [2] U. M. Ascher, S. J. Ruuth, B. T. R. Wetton, Implicit-explicit methods for time-dependent partial differential equations, *SIAM J. Numer. Anal.* 32 (3) (1995) 797–823.
- [3] E. Burman, M. A. Fernández, Stabilized explicit coupling for fluid-structure interaction using Nitsche’s method, *C. R. Math. Acad. Sci. Paris* 345 (8) (2007) 467–472.
- [4] E. Burman, M. A. Fernández, Stabilization of explicit coupling in fluid-structure interaction involving fluid incompressibility, *Comput. Methods Appl. Mech. Engrg.* 198 (5-8) (2009) 766–784.
- [5] Y. Cao, M. Gunzburger, X. Hu, F. Hua, X. Wang, W. Zhao, Finite element approximations for Stokes-Darcy flow with Beavers-Joseph interface conditions, *SIAM J. Numer. Anal.* 47 (6) (2010) 4239–4256.
- [6] Y. Cao, M. Gunzburger, F. Hua, X. Wang, Coupled Stokes-Darcy model with Beavers-Joseph interface boundary condition, *Commun. Math. Sci.* 8 (1) (2010) 1–25.
- [7] P. Causin, J. F. Gerbeau, F. Nobile, Added-mass effect in the design of partitioned algorithms for fluid-structure problems, *Comput. Methods Appl. Mech. Engrg.* 194 (42-44) (2005) 4506–4527.
- [8] J. M. Connors, J. Howell, A fluid-fluid interaction method using decoupled subproblems and differing timesteps, *Tech. rep., Univ. of Pittsburgh* (2010).
- [9] J. M. Connors, J. S. Howell, W. J. Layton, Decoupled time stepping methods for fluid-fluid interaction, submitted *SIAM J. Numer. Anal.*

- [10] J. M. Connors, A. Miloua, Partitioned time discretization for parallel solution of coupled ode systems, *BIT Numerical Mathematics* (2010) 1–21.
- [11] M. Crouzeix, Une méthode multipas implicite-explicite pour l’approximation des équations d’évolution paraboliques, *Numer. Math.* 35 (3) (1980) 257–276.
- [12] M. Discacciati, E. Miglio, A. Quarteroni, Mathematical and numerical models for coupling surface and groundwater flows, *Appl. Numer. Math.* 43 (1-2) (2002) 57–74, 19th Dundee Biennial Conference on Numerical Analysis (2001).
- [13] J. Frank, W. Hundsdorfer, J. Verwer, Stability of Implicit-Explicit linear multistep methods, Tech. rep., Centrum Wiskunde and Informatica (CWI) (1996).
- [14] W. Hundsdorfer, J. Verwer, Numerical solution of time-dependent advection-diffusion-reaction equations, vol. 33 of Springer Series in Computational Mathematics, Springer-Verlag, Berlin, 2003.
- [15] O. Johansson, H.-O. Kreiss, Über das Verfahren der zentralen Differenzen zur Lösung des Cauchy problems für partielle Differentialgleichungen, *Nordisk Tidskr. Informations-Behandling* 3 (1963) 97–107.
- [16] W. J. Layton, F. Schieweck, I. Yotov, Coupling fluid flow with porous media flow, *SIAM J. Numer. Anal.* 40 (6) (2002) 2195–2218 (2003).
- [17] M. Mu, X. Zhu, Decoupled schemes for a non-stationary mixed Stokes-Darcy model, *Math. Comp.* 79 (270) (2010) 707–731.
- [18] L. Shan, H. Zheng, W. Layton, Decoupled schemes with different time sizes for the time-dependent Stokes-Darcy model, Tech. rep., Univ. Pittsburgh (<http://www.math.pitt.edu/technical-reports>, 2011).
- [19] S. J. Thomas, R. D. Loft, The NCAR spectral element climate dynamical core: semi-implicit Eulerian formulation, *J. Sci. Comput.* 25 (1-2) (2005) 307–322.
- [20] A. Valli, G. Carey, A. Coutinho, On decoupled time step/subcycling and iteration strategies for multiphysics problems, *Commun. Numer. Methods Eng.* 24 (12) (2008) 1941–1952.
- [21] J. Varah, Stability restrictions on second order, three level finite difference schemes for parabolic equations, *SIAM J. Numer. Anal.* 17 (2) (1980) 300–309.
- [22] J. Verwer, Convergence and component splitting for the Crank-Nicolson Leap-Frog integration method, Tech. rep., Centrum Wiskunde and Informatica (CWI) (2009).
- [23] J. Verwer, Component splitting for semi-discrete Maxwell equations, *BIT Numerical Mathematics* (2010) 1–19.

## 5 Some additional references on the Stokes-Darcy problem

M. Amara, D. Capatina, and L. Lizaik, Coupling of Darcy-Forchheimer and compressible Navier-Stokes equations with heat transfer, *SIAM J. Sci. Comput.* 31 (2008/09), no. 2, 1470 - 1499.

T. Arbogast and D. S. Brunson, A computational method for approximating a Darcy-Stokes system governing a vuggy porous medium, *Comput. Geosci.* 11 (2007), no. 3, 207 - 218.

T. Arbogast and M. Gomez, A discretization and multigrid solver for a Darcy-Stokes system of three dimensional vuggy porous media, *Comput. Geosci.* 13 (2009), no. 3, 331 - 348.

T. Arbogast and H. L. Lehr, Homogenization of a Darcy-Stokes system modeling vuggy porous media, *Comput. Geosci.* 10 (2006), no. 3, 291 - 302.

S. Badia and R. Codina, Unifed stabilized fnite element formulations for the Stokes and the Darcy problems, *SIAM J. Numer. Anal* 47 (2009), no. 3, 1971 - 2000.

E. Burman, Pressure projection stabilizations for Galerkin approximations of Stokes' and Darcy's problem, *Numer. Methods Partial Differential Equations* 24 (2008), no. 1, 127 - 143.

E. Burman and P. Hansbo, Stabilized Crouzeix-Raviart element for the Darcy-Stokes problem, *Numer. Methods Partial Differential Equations* 21 (2005), no. 5, 986 - 997.

E. Burman and P. Hansbo, A unified stabilized method for Stokes' and Darcy's equations, *J. Comput. Appl. Math.* 198 (2007), no. 1, 35 - 51.

M. Cai, M. Mu, and J. Xu, Numerical solution to a mixed Navier-Stokes/Darcy model by the two-grid approach, *SIAM J. Numer. Anal.* 47 (2009), no. 5, 3325 - 3338.

M. Cai, M. Mu, and J. Xu, Preconditioning techniques for a mixed Stokes/Darcy model in porous media applications, *J. Comput. Appl. Math.* 233 (2009), no. 2, 346 - 355.

Y. Cao, M. Gunzburger, X.-M. He, and X. Wang, Robin-Robin domain decomposition methods for the steady Stokes-Darcy model with Beaver-Joseph interface condition, submitted.

Y. Cao, M. Gunzburger, X.-M. He, and X. Wang, Parallel, non-iterative multi-physics domain decomposition methos for the time-dependent Stokes-Darcy



problem, tech report, 2011.

Y. Cao, M. Gunzburger, X. Hu, F. Hua, X. Wang, and W. Zhao, Finite element approximation for Stokes-Darcy flow with Beavers-Joseph interface conditions, *SIAM. J. Numer. Anal.* 47 (2010), no. 6, 4239 - 4256.

Y. Cao, M. Gunzburger, F. Hua, and X. Wang, Coupled Stokes-Darcy model with Beavers-Joseph interface boundary condition, *Comm. Math. Sci.* 8 (2010), no. 1, 1 - 25.

A. Cesmelioglu and B. Riviere, Analysis of time-dependent Navier-Stokes flow coupled with Darcy flow, *J. Numer. Math.* 16 (2008), no. 4, 249 - 280.

N. Chen, M. Gunzburger, and X. Wang, Asymptotic analysis of the differences between the Stokes-Darcy system with different interface conditions and the Stokes-Brinkman system, *J. Math. Anal. Appl.* 368 (2010), no. 2, 658 - 676.

W. Chen, M. Gunzburger, F. Hua, and X. Wang, A parallel Robin-Robin domain decomposition method for the Stokes-Darcy system, *SIAM. J. Numer. Anal.* (to appear).

M. Discacciati, Domain decomposition methods for the coupling of surface and groundwater flows, Ph.D. thesis, Ecole Polytechnique Federale de Lausanne, Switzerland, 2004.

M. Discacciati, E. Miglio, and A. Quarteroni, Mathematical and numerical models for coupling surface and groundwater flows, *Appl. Numer. Math.* 43 (2002), no. 1-2, 57 - 74.

M. Discacciati and A. Quarteroni, Convergence analysis of a subdomain iterative method for the finite element approximation of the coupling of Stokes and Darcy equations, *Comput. Vis. Sci.* 6 (2004), no. 2-3, 93 - 103.

M. Discacciati, A. Quarteroni, and A. Valli, Robin-Robin domain decomposition methods for the Stokes-Darcy coupling, *SIAM J. Numer. Anal.* 45 (2007), no. 3, 1246 - 1268.

J. Galvis and M. Sarkis, Non-matching mortar discretization analysis for the coupling Stokes- Darcy equations, *Electron. Trans. Numer. Anal.* 26 (2007), 350 - 384.

V. Girault and B. Riviere, DG approximation of coupled Navier-Stokes and Darcy equations by Beaver-Joseph-Saffman interface condition, *SIAM J. Numer. Anal.* 47 (2009), no. 3, 2052 - 2089.

F. Hua, Modeling, analysis and simulation of Stokes-Darcy system with Beavers-Joseph interface condition, Ph.D. dissertation, The Florida State University

(2009).

B. Jiang, A parallel domain decomposition method for coupling of surface and groundwater flows, *Comput. Methods Appl. Mech. Engrg.* 198 (2009), no. 9-12, 947 - 957.

T. Karper, K. A. Mardal, and R. Winther, Unified finite element discretizations of coupled Darcy-Stokes flow, *Numer. Methods Partial Differential Equations* 25 (2009), no. 2, 311 - 326.

K. A. Mardal, X. C. Tai, and R. Winther, A robust finite element method for Darcy-Stokes flow, *SIAM J. Numer. Anal.* 40 (2002), no. 5, 1605 - 1631.

A. Masud, A stabilized mixed finite element method for Darcy-Stokes flow, *Int. J. Numer. Meth. Fluids* 54 (2007), no. 6-8, 665 - 681.

M. Mu and J. Xu, A two-grid method of a mixed Stokes-Darcy model for coupling fluid flow with porous media flow, *SIAM J. Numer. Anal.* 45 (2007), no. 5, 1801 - 1813.

P. Popov, Y. Efendiev, and G. Qin, Multiscale modeling and simulations of flows in naturally fractured karst reservoirs, *Commun. Comput. Phys.* 6 (2009), no. 1, 162 - 184.

B. Riviere, Analysis of a discontinuous finite element method for the coupled Stokes and Darcy problems, *J. Sci. Comput.* 22/23 (2005), 479 - 500.

B. Riviere and I. Yotov, Locally conservative coupling of Stokes and Darcy flows, *SIAM J. Numer. Anal.* 42 (2005), no. 5, 1959 - 1977.

H. Rui and R. Zhang, A unified stabilized mixed finite element method for coupling Stokes and Darcy flows, *Comput. Methods Appl. Mech. Engrg.* 198 (2009), no. 33-36, 2692 - 2699.

P. Saffman, On the boundary condition at the interface of a porous medium, *Stud. in Appl. Math.* 1 (1971), 77 - 84.

J. M. Urquiza, D. N'Dri, A. Garon, and M. C. Delfour, Coupling Stokes and Darcy equations, *Appl. Numer. Math.* 58 (2008), no. 5, 525 - 538.

X. Xie, J. Xu, and G. Xue, Uniformly-stable finite element methods for Darcy-Stokes-Brinkman models, *J. Comput. Math.* 26 (2008), no. 3, 437 - 455.

S. Zhang, X. Xie, and Y. Chen, Low order nonconforming rectangular finite element methods for Darcy-Stokes problems, *J. Comput. Math.* 27 (2009), no. 2-3, 400 - 424.