



AFRL-RX-TY-TP-2011-0052

SUSTAINABLE LAND USE FOR BIOENERGY IN THE 21ST CENTURY

Robert A. Diltz and Glenn R. Johnson
Airbase Technologies Division
Air Force Research Laboratory
139 Barnes Drive, Suite 2
Tyndall Air Force Base, FL 32403-5323

Heather R. Luckarift
Universal Technology Corporation
139 Barnes Drive Suite 2
Tyndall Air Force Base, FL 32403

Contract No. FA4819-09-C-0031

June 2011

DISTRIBUTION A: Approved for public release; distribution unlimited.
325FW-1104, 4 October 2011

**AIR FORCE RESEARCH LABORATORY
MATERIALS AND MANUFACTURING DIRECTORATE**

REPORT DOCUMENTATION PAGE

*Form Approved
OMB No. 0704-0188*

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY) 17-JUN-2011	2. REPORT TYPE Journal Article POSTPRINT	3. DATES COVERED (From - To) 01-OCT-2010 -- 15-JUN-2011
---	--	---

4. TITLE AND SUBTITLE Sustainable Land Use for Bioenergy in the 21st Century	5a. CONTRACT NUMBER FA4819-09-C-0031
	5b. GRANT NUMBER
	5c. PROGRAM ELEMENT NUMBER 060192F

6. AUTHOR(S) *Diltz, Robert A.; ^Luckarift, Heather R.; *Johnson, Glenn R.	5d. PROJECT NUMBER 4915
	5e. TASK NUMBER D2
	5f. WORK UNIT NUMBER Q110D8D2

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) ^Universal Technology Corporation 1270 North Fairfield Road Dayton, OH 45432	8. PERFORMING ORGANIZATION REPORT NUMBER
---	---

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) *Air Force Research Laboratory Materials and Manufacturing Directorate Airbase Technologies Division 139 Barnes Drive, Suite 2 Tyndall Air Force Base, FL 32403-5323	10. SPONSOR/MONITOR'S ACRONYM(S) AFRL/RXQES
	11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RX-TY-TP-2011-0052

12. DISTRIBUTION/AVAILABILITY STATEMENT
Distribution Statement A: Approved for public release; distribution unlimited.

13. SUPPLEMENTARY NOTES
Ref Public Affairs Case # 325FW-1104, 4 October 2011. Document contains color images.
Published in Industrial Biotechnology, Vol 7, No 6, Dec 2011, p437-447

14. ABSTRACT
As fossil fuel resources become more difficult to find, the cost of extraction becomes inherently more expensive. Thus, alternative energy solutions must be explored to meet exponentially increasing energy demand due to population growth and industrial development. Solutions that derive energy from alternative resources, including sunlight, wind, tides, and biomass, are in various stages of maturity, ranging from theoretical concepts to commercially available commodities.
Power derived from biomass, for example, is widely promoted as an alternative to both transportation fuel and electricity for the national power grid. Before biomass-derived power can be realized on a wide scale, however, several technological and political hurdles need to be overcome. Current challenges include extending the sources of available biomass, optimizing conversion processes to increase yield, effectively utilizing land, and developing the infrastructure to accommodate the new industrial processes.
The following review addresses the 21st century techniques and challenges associated with growing and extracting power from biomass. The summary assesses challenges in three specific areas: 1) growing biomass, in regards to the energy available from a variety of sources; 2) engineering challenges associated with thermo-chemical conversion of biomass; and 3) management challenges associated with land and resource requirements necessary to create a sustainable biomass-to-energy industry. The information will be analyzed to determine the feasibility of biomass-based power as a solution to address dwindling conventional resources.

15. SUBJECT TERMS
biomass, bioenergy, land use, fuel

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 11	19a. NAME OF RESPONSIBLE PERSON Reza Salavani
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) 850-283-3715

Reset

Review

Sustainable Land Use for Bioenergy in the 21st Century

Robert A. Diltz,¹ Heather R. Luckarift,^{1,2} and Glenn R. Johnson¹

¹Air Force Research Laboratory, Materials and Manufacturing Directorate, Airbase Technologies Division, 139 Barnes Drive, Suite #2, Tyndall Air Force Base, FL 32403, USA

²Universal Technology Corporation, 1270 North Fairfield Road, Dayton, OH 45432, USA

Abstract

As fossil fuel resources become more difficult to find, the cost of extraction becomes inherently more expensive. Thus, alternative energy solutions must be explored to meet exponentially increasing energy demand due to population growth and industrial development. Solutions that derive energy from alternative resources, including sunlight, wind, tides, and biomass, are in various stages of maturity, ranging from theoretical concepts to commercially available commodities.

Power derived from biomass, for example, is widely promoted as an alternative to both transportation fuel and electricity for the national power grid. Before biomass-derived power can be realized on a wide scale, however, several technological and political hurdles need to be overcome. Current challenges include extending the sources of available biomass, optimizing conversion processes to increase yield, effectively utilizing land, and developing the infrastructure to accommodate the new industrial processes.

The following review addresses the 21st century techniques and challenges associated with growing and extracting power from biomass. The summary assesses challenges in three specific areas: 1) growing biomass, in regards to the energy available from a variety of sources; 2) engineering challenges associated with thermo-chemical conversion of biomass; and 3) management challenges associated with land and resource requirements necessary to create a sustainable biomass-to-energy industry. The information will be analyzed to determine the feasibility of biomass-based power as a solution to address dwindling conventional resources.

Key words: biomass, bioenergy, land use, fuel

Introduction

As the global population continues to increase and supplies of petroleum and fossil fuel become depleted, alternative resources will be needed to meet energy demands. The challenge fuels a drive to identify renewable sources of energy that could either replace or supplement the use of fossil fuels. Many alternatives under investigation are derived from natural re-

sources, including wind, sunlight, tides, hot springs, and biomass. The technologies are in varying stages of maturity, ranging from commercially available sources such as photovoltaic panels and wind turbines, to concepts that are more experimental, such as the conversion of microbial biomass to liquid fuels.¹⁻⁶

Natural gas, coal, and oil still account for 95% of the world's energy consumption, so demand for alternatives, such as energy from biomass, is still relatively low.⁷ Currently, plant biomass is primarily grown for food and some industrial purposes, such as paper production and insulation. In recent years, however, the trend has begun to shift, and land is now being utilized to grow crops specifically for energy production; e.g., exploiting the high starch and sugar content of corn and sugarcane for bio-ethanol production.⁸ For large-scale biomass-derived energy to become a feasible technology, new sources of biomass materials must be identified and the processing optimized to utilize available resources effectively.⁹ Currently, large-scale power plants produce electricity from the conversion of various types of biomass.^{10,11} Many of these industrial processes utilize conventional energy production facilities—such as coal-fired power plants—and simply supplement the fuel source with locally available biomass.¹² In order to increase the effectiveness of biomass for energy production, efforts are underway to develop alternative methodologies or provide incremental improvements that will increase the yield of harvestable biomass and maximize the efficiency of energy extraction.

Herein, we discuss the potential of utilizing biomass as a feedstock for energy conversion processes, compare the technology areas that address this goal, and consider the comparative stages of technical maturity.

Biomass Resources

The use of biomass for energy production is certainly not new; wood burning was the primary source of energy long before the Industrial Revolution. In developing countries biomass derived from diverse natural resources remains a significant source of fuel.¹³ Unlike fossil fuels, biomass is theoretically carbon-neutral; i.e., carbon dioxide is fixed by plants and used for growth and then returned to the environment upon combustion. Biomass energy sources are also remarkably diverse and can include wood, grasses, agricultural crops and the processing by-products of food crops, municipal and animal waste as well as aquatic plants and algae. The production of useful by-products from certain biomass species also enhances commercial applications. Waste wood from lumber production, for example, includes bark, sawdust, and wood off-cuts that provide a commodity product for energy production.¹⁴ Predictably, there are

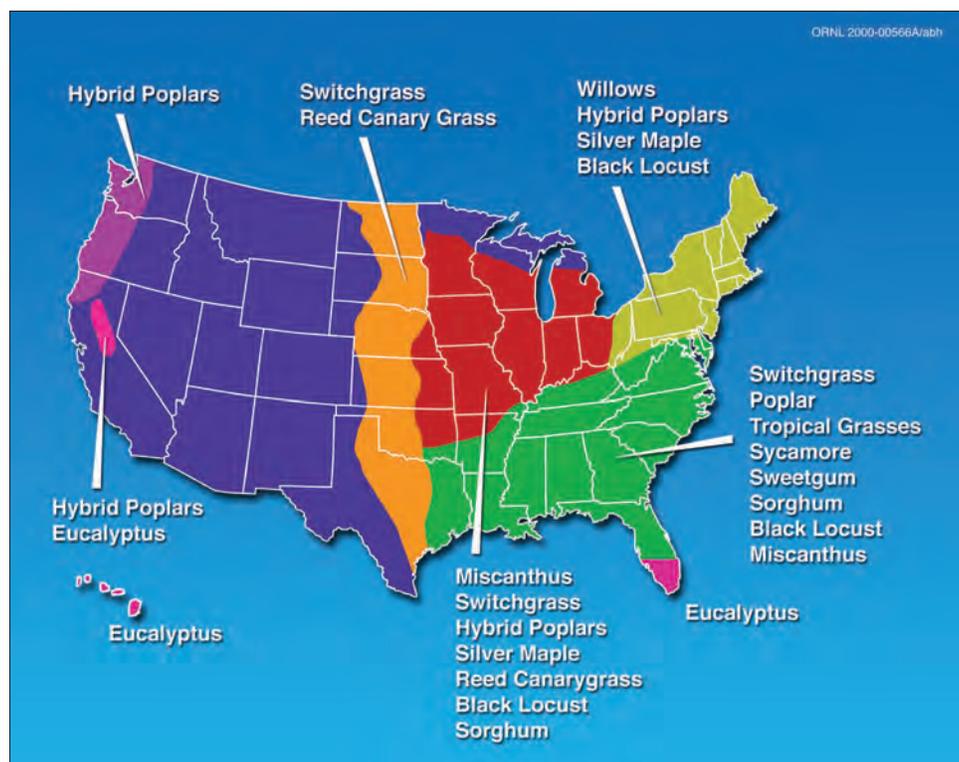


Fig. 1. Proposed sources of biomass energy crops from selected regions.¹²

inherent benefits and drawbacks to biomass production, such as variations in geographical climates and environmental conditions that affect growth rates, species diversity, and energy yields.

Throughout the United States, for example, there are defined regions capable of producing various biomass sources for commercial use, dictated by the regional climate and environmental conditions (Fig. 1).¹⁵ In the Southeast and Central United States, the most cost-effective types of biomass materials come from grasses and small woody trees. In the cooler northern climates of the United States, vegetation shifts to slow growing, more energy-dense species of trees.¹⁵ By comparison, much of the semiarid western United States has been deemed unsuitable for sustaining traditional biomass energy crops due to poor soil quality and arid conditions.¹⁶ The West, however, may provide a unique growth environment for microbial biomass, such as algal growth. Algae are unicellular plants that assimilate carbon dioxide through photosynthesis in the same way as terrestrial plants, but do not require fertile soil or fresh water and can take advantage of high solar incidence.¹⁷ Algal biomass, therefore, exhibits inherent advantages for energy conversion that will be considered herein, by comparison to conventional terrestrial resources.

GRASSES AND CELLULOSIC MATERIAL

Grasses and cellulosic materials (such as sugarcane and bamboo) are useful biomass energy crops due to rapid growth rates and high

annual yield per acre.¹⁸ The southern region of the United States, for example, is an ideal place to grow grasses due to the availability of fertile soil, a moderate climate and good year-round solar exposure.^{19,20} These factors also provide opportunity for more than one growing season in a year by planting a smaller, but cold-tolerant grass that can be harvested through fall and winter.^{21,22} Most grass species grow relatively quickly and have high cellulose content, which can be harvested for energy production. As cellulose can be digested and converted into sugars using relatively straightforward biological processes, grasses also make an ideal source for production of ethanol which can be used to supplement gasoline supplies or burned as a heat source.²³ Since storage polymers, such as starch, can be broken down easily into sugar monomers and fermented in one process such as simultaneous saccharification/fermentation, cellulose in grasses are also an ideal candidate for production of biogas (gas produced by anaerobic biological breakdown of organic matter) or other forms of biologically derived electricity.^{20,24} Grasses can

also be used as a fuel to supplement coal in coal-burning power plants.¹⁹

Since the goal of producing biomass to create an energy source, it is beneficial to understand and then optimize the potential energy available.^{19,21,23} The accessible yield of energy from biomass, however, is a complex issue that is dictated not only by the overall energy available, but by the accessibility of energy-rich components, such as carbohydrates and lipids. With a broad range of biomass sources available for conversion into energy, one caveat to consider is the chemical composition of biomass, as it directly affects the productivity of the conversion processes.²⁵ The content of celluloses, lignocelluloses, protein and ash, for example, can vary across grass species (Table 1) and determines the extractable by-products that are formed during the conversion process.²⁶⁻³¹

WOODY BIOMASS

Unlike cellulosic materials and grasses, trees are relatively slow growing, with harvest cycles that range from a few years to over a decade.³² While wood requires a much longer time to reach a harvestable state, it is a high-yield, dense material. In addition, slower-growing species that do not demand the high sunlight exposure required by grasses can be grown in cooler climates.³² And unlike grasses and other seasonal biomass, once these slower growing woods reach maturity they can be harvested when needed, thus

	CELLULOSE	HEMICELLULOSE	LIGNIN	PROTEIN	EXTRACTIVES	ASH
Grasses						
Switch grass	37.3	28.5	19.1	3		6
Corn Stover	37.5	26.1	18.9	5		6
Wheat Straw	37.6	28.8	14.5	4		6
Trees						
Olive Wood	27.3	16.0	10.3		45.0	1.4
Eucalyptus	42.7	22.3	16.0		18.6	0.1
Pine	35.5	21.5	19.7		22.9	0.4

reducing storage and maintenance costs. Woody biomass has been used for centuries in industrial applications such as pulp and paper processing, primarily because of the high lignocellulosic content (Table 1).¹⁴ Industrial wood processing also generates a great deal of wasted biomass such as tree limbs, bark, and the brush associated with silviculture, which can provide a valuable resource for energy production.^{33–35} In addition to biomass from common industrial timber operations, a further resource may be derived from commercial wood crops, such as the residual fibrous materials that remain following the extraction of liquid oils from palms.^{36,37}

As with grasses, the composition of woody biomass differs amongst species, and can be substantially affected by harvest schedule and fertilizer regime (Table 1). The composition of biomass inherently dictates how well a particular species may be utilized for energy production.^{33,38,39} Since the time between wood harvests is so much greater than between grass harvests, it is beneficial to fully characterize the genotypes and phenotypes of biomass to select the most favorable, energy-dense species to maximize yield. Przyborowski and Sulima, for example, conducted analyses of Polish willows to identify candidates suitable for cross breeding that would provide enhanced biomass yields.⁴⁰

MICROALGAL AND BACTERIAL BIOMASS

Bacteria and microalgae are microscopic organisms that are geographically ubiquitous and can be cultivated without rich soil. Bacterial biomass requires only nutrients, water, and favorable environmental conditions to grow and reproduce.² As algae are similar in structure to terrestrial plants, they can be considered a source of lipids, carbohydrates, and other compounds useful in energy production (Table 2).^{41–43} In fact, one of the unique aspects of microbial biomass is the presence of energy-dense storage compounds, such as long-chain fatty acids, which can account for up to 80% of the cell weight of some algal species.^{4,44,45}

There are challenges and limitations inherent to the cultivation and processing of microbial biomass for power, however. Production of algae for oils and energy conversion has focused on

microalgae, including species of diatoms and cyanobacteria (as opposed to macroalgae, such as seaweed), although production of biologically derived hydrogen and methane has been demonstrated from some bacterial species (such as *Clostridium* spp.).^{46,47} A wealth of microbial biomass resources is also available as a by-product of industrial activities such as sewage treatment, brewing industries, and food processing.^{48,49} Plant biomass is dependent on atmospheric carbon dioxide for a carbon source, with other nutrients coming typically from fertilization. Industrial microbial biomass, by comparison, is usually dependent on the addition of a carbon dioxide feed and fertilization to provide sufficient carbon for high levels of biomass growth. Growing microbial biomass without the addition of carbon is inefficient and, as such, not economically or technologically sustainable. The financial and energetic cost of separating algal biomass from water is also a hurdle.^{2,4} Since most microbial biomass streams are in dilute aqueous suspensions, it is inefficient to convert biomass into a form that is dry enough for effective combustion. The primary focus of energy from microbial biomass, therefore, has been from either lipid extraction and subsequent conversion to biodiesel or processes that harvest hydrogen or methane during bacterial metabolism.^{4,45} With a recent

SPECIES	PROTEIN	CARBOHYDRATE	LIPID
<i>Ankistrodesmus</i>	36	24	31
<i>Nitzschia</i>	36	14	22
<i>Chlorella</i>	55	24	21
<i>C. protothecoides</i>	38	52	11
<i>C. emersonii</i>	32	41	29
<i>C. vulgaris</i>	29	51	18

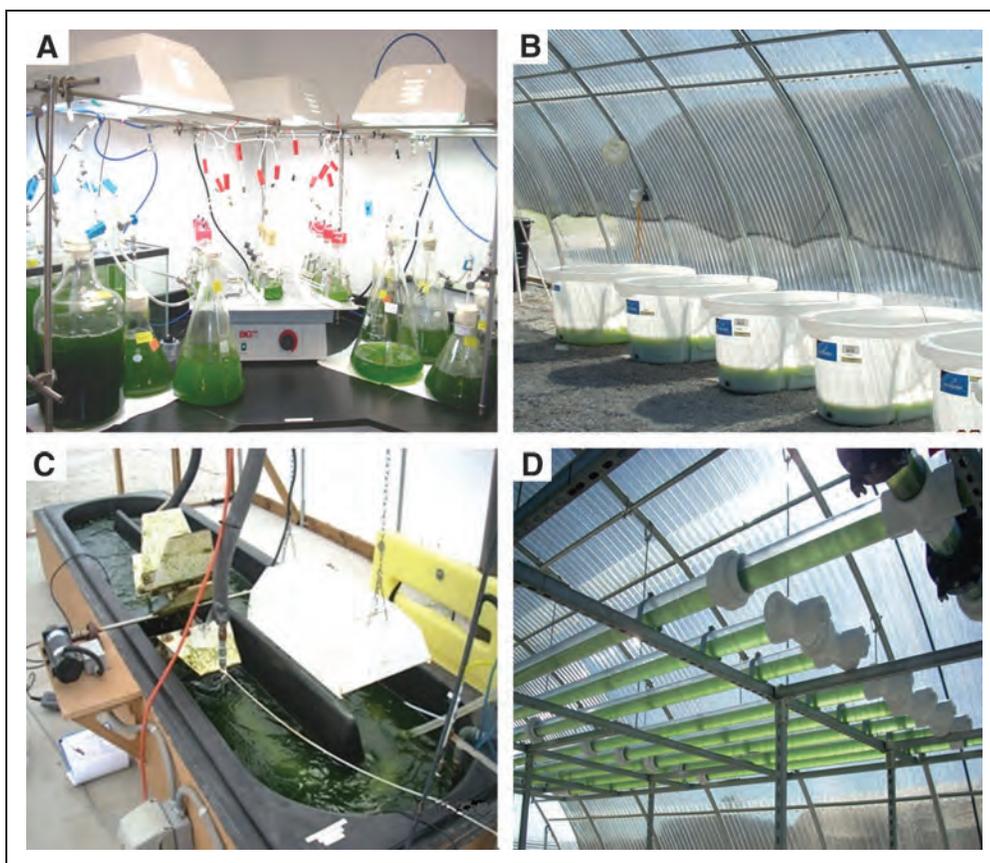


Fig. 2. Aquatic and marine species of algae at various experimental culturing scales: **(A)** Benchtop flasks (50–2,000 mL); **(B)** Open pond reactor (~50 gallons); **(C)** Open raceway pond (100 gallon); **(D)** a prototype photobioreactor (300 gallon).

commercial push for biomass-derived energy, however, research assessing various methods to optimize the potential of thermal conversion processes is underway.^{2,50}

Microbial biomass has a number of advantages as a technology for energy production, particularly in respect to rapid growth and turnover rates, the ability to utilize a wide range of different nutrients for growth, and the scalability of the process (*Fig. 2*). Compared to grass and woody biomass, microbial growth is rapid, with monthly and even shorter harvest cycles. The high turnover rate of microbial biomass, therefore, allows for multiple harvests per year. Another significant advantage of microbial biomass is that culture techniques eliminate any requirement for fertile land. Algae, for example, can grow in diverse aqueous environments, including oceans, lakes, rivers, and wastewater streams.² Due to the ability of phototrophic algae to utilize trace amounts of nutrients such as nitrogen and phosphorus, it is possible for these species to survive in “treated” water sources (or contaminated water), which opens up an additional avenue for tertiary wastewater treatment operations combined with energy production.⁵¹ Algae have also been considered for use as scrubber systems to remove carbon dioxide from industrial facilities,

which would reduce greenhouse gases while providing an abundant source of carbon for biomass growth.^{52,53}

COMPARISON OF BIOMASS RESOURCES

Biomass does not need to be grown specifically for energy production. Several studies have been conducted using waste biomass materials such as weeds and leaves that are unwanted for other agricultural purposes, as well as residues from traditional farming and logging practices.^{18,48} An example of biomass-derived energy production from by-products is the conversion of rice husks and residues such as bagasse (fibrous remnants) from sugarcane processing.^{18,26,27,54}

Each type of biomass available for energy production has inherent advantages and disadvantages. Studies of biomass content and theoretical energy yields have been conducted on both the micro (individual plant and smaller) and macro (acreage to regional) scale and provide valuable data that can be used to guide the design and development of commercial-scale operations.^{24,56} Along with changes in chemical composition

that occur under traditional farming practices, varying harvest times are known to alter biomass yield (and subsequent energy and biogas production) as land quality can affect moisture content and the ability of plants to extract and store energy.^{57,58} Fertilization can also affect the composition and harvest cycle of various grasses.^{56,59,60}

The most significant variables in comparing different types of biomass are the amount of material obtained per harvest and the turnover rate. Trees, for example, grow slowly but yield a large quantity of biomass per crop. Grasses, in comparison, yield less biomass per unit mass, but can be repeatedly planted and harvested over many seasonal cycles. Annual production rates for terrestrial biomass are comparable on a per-acre basis. When considering the average biomass yield per acre and the average time before harvesting, the overall harvested yield per year is approximately equivalent for terrestrial biomass (wood and grass). In comparison, the rapid growth rates observed for algal biomass (and the fast turnover of subsequent harvests) provides a biomass source that on an annual basis is an order of magnitude more productive than terrestrial plant biomass (*Fig. 3*).^{21,32}

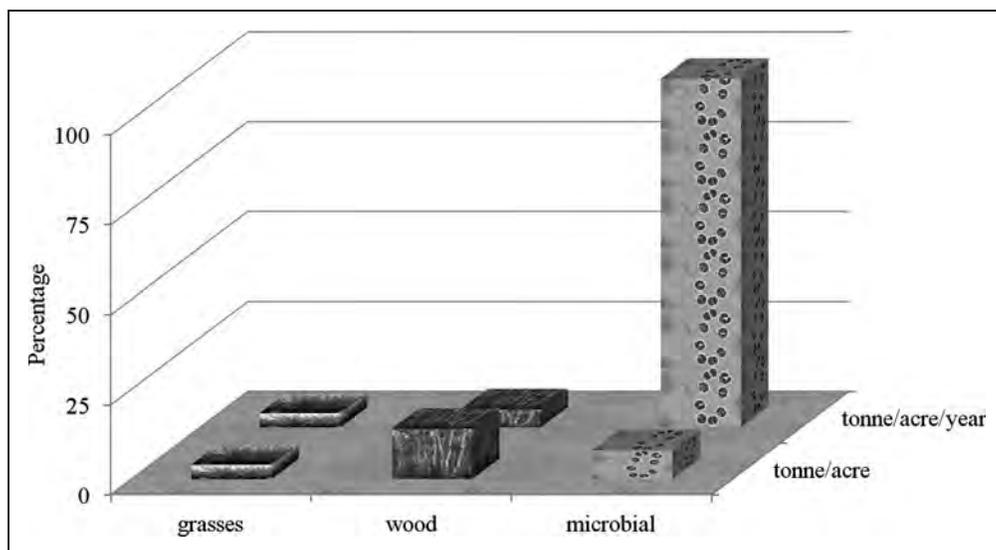


Fig. 3. Typical harvest yields of biomass sources per harvest (tonne/acre) and per year (tonne/acre/year).

Microbial biomass provides vast amounts of material for energy production, but the high water content of the unprocessed material requires filtration, centrifugation, or separation processes that may be cost prohibitive depending on the technique as well as the cost of electricity. By comparison, grasses and woody biomass do not have such energy-intensive requirements to harvest and process into useful products. The most influential criterion for comparison, however, may be geography; the need for fertile soil, adequate sunlight, and specific climates limits plant biomass growth to defined geographical locations. Microbial biomass, however, is far less constrained by such requirements.

Thermal Conversion of Biomass

The processes for engineered thermal conversion were developed during the Industrial Revolution to harvest power from petroleum and coal. Typically, thermal conversion methods such as gasification and pyrolysis generate heat and steam to produce electricity for a power grid. Due to the dense fibrous nature of wood, techniques such as pyrolysis and gasification are also applicable to burn biomass and produce electricity.^{61–63} Biomass can be used directly in existing coal-fired fossil fuel power plants. Since biomass typically has a low energy density compared to fossil fuels, however, there are economic considerations, particularly in respect to the transportation of materials over long distances. This restricts the use of biomass to smaller regional facilities that generate power for local communities rather than for large-scale, mass distribution markets.

The thermal conversion of biomass is typically achieved by gasification, liquefaction, or pyrolysis, which all have inherent advantages and disadvantages in respect to efficiency, yield, and by-product formation (whether it be value-added products or waste streams). Accordingly, the process parameters required for each type of conversion scheme vary widely.

GASIFICATION

Gasification is a process in which carbonaceous materials are exposed to heat and a sub-stoichiometric concentration of air to produce partially oxidized gaseous products that still have a high heating value.⁶⁴ This process creates a stream of gas that is rich in hydrogen, carbon monoxide, and methane, with relatively low concentrations of carbon dioxide compared to a typical combustion process. The resulting product stream is usually referred to as synthesis gas (syngas) and can be used directly in turbine or certain internal combustion engines.⁶¹ Alternatively, syngas can be catalytically reformed into a liquid fuel through the Fischer-Tropsch process, which converts carbon monoxide and hydrogen into long-chain

hydrocarbons. One benefit of producing liquid fuels from gasification products is the ability to utilize the products for blending or replacement of liquid petroleum fuels.^{61,64} By-products of the process include ash (formed from alkali-metal promoters present in the original reaction), char, and tars created due to inefficiencies in mixing and heat distribution. Three main types of gasification reactors are commonly used in industry: fixed bed, fluidized bed, and moving bed. Each process has inherent advantages and drawbacks based on the complexity of the reactors, operating costs, and product quality. A more in-depth discussion of the design criteria and problems associated with using biomass as a fuel source for gasification reactors can be found in recent review articles.^{61,65}

LIQUEFACTION

Liquefaction is a process of converting biomass into a “bio-oil” in the presence of a solvent—usually water, an alcohol, or acetone—and a catalyst.⁶⁶ Liquefaction operates at milder temperatures than gasification, but requires higher pressures. Liquefaction can be indirect, wherein biomass is first converted into gas and thence into liquid, or direct, in which biomass is converted directly into liquid fuel.⁶⁷ Direct liquefaction processes usually produce heavy oils with high heating values and value-added chemicals as by-products. Direct liquefaction also produces relatively little char compared to other thermochemical processes that do not utilize solvents. Liquefaction also has the advantage that the method is not hindered by the water content of the biomass. As a large portion of biomass waste is water (up to 95%), liquefaction eliminates the high drying costs associated with gasification reactions. The use of water as a solvent can significantly reduce operating costs, and recent studies with sub- and super-critical water have demonstrated increased process productivity by overcoming heat-transfer limitations.^{68,69} Operating parameters and

Table 3. Common traits of typical thermal conversion systems for biomass

REACTOR TYPE	TEMP. (°C)	PRESSURE (ATM)	GAS FEED	WATER (MAX %WT)	OUTPUT	RESIDUAL	EFFICIENCY
Pyrolysis (Slow/Fast/Flash)	300–550	10–20	Inert gas	10	Pyrolysis oil/ Heating value gas	Char/Tar	
Direct Liquefaction	200–400	100–300	H ₂ /H ₂ :CO	100	Heavy Organic Oil	Char/Coke	
Gasification	950 ¹	20–35 ¹	Air/O ₂	15 ¹	Syngas	Tar/Ash	
	850 ²	2 ²		10 ²			

¹Pressurized gasification, ²Atmospheric gasification

feed quality significantly influence the overall quality of the oil produced by these processes. A recent review presented an exhaustive comparison of the operational variables that affect the liquefaction of biomass and concluded that a well-defined temperature range is the most influential parameter for optimizing bio-oil yield and biomass conversion.⁶⁶ If the processing temperature is too low, biomass conversion efficiency is reduced. In contrast, if the processing temperature is too high, excessive gas formation inhibits oil production. Similarly, catalyst choice can alter the heating value of the final liquefaction product and reduce the quantity of solid residue.⁶⁹

PYROLYSIS

Pyrolysis is a process in which organic matter is exposed to heat and pressure in the absence of oxygen. The primary components of this process are syngas molecules like those found in gasification, as well as bio-oils and charred solid residues.⁶⁵ These oils and solids are very high in combustible organic content and can be easily burned for heat and energy production. Pyrolysis methods are defined by the rate of heating, which directly affects the residence time of the reaction.⁷⁰ In slow pyrolysis, for example, the material is exposed to reactor conditions for five minutes; in fast pyrolysis, residence time is reduced to one to two minutes; and in flash pyrolysis to less than five seconds. The residence time of the pyrolysis reaction greatly influences the composition of oils, gases, and chars that are formed.^{28,43,50,71,72} Several studies have identified the effect of operational variables—reactor conditions and variations in feedstock material—on the quality of the pyrolysis oils, gases, and chars.^{70–72} The oils typically produced during pyrolysis reactions are high in moisture content and corrosive due to low pH. Pyrolysis of biomass is typically constrained by the high water content of the raw material, and current pyrolysis methods for biomass conversion have not reached commercial development. Ongoing research, however, aims to maximize energy potential from biomass and optimize conversion methods to achieve commercialization at marketable levels.^{33,37} Blasi, for example, modeled the chemical and physical processes of wood and biomass pyrolysis to measure

the potential energy of the system, allowing a theoretical maximum energy output to be calculated.⁷³ Studies such as this identify engineering specifications that may ultimately lead to high process efficiency.

COMPARISON OF BIOMASS THERMAL CONVERSION PROCESSES

Gasification, liquefaction, and pyrolysis conversion systems each produce a specific type of product for energy production, as well as by-products that may have added value. In addition, each process generates a specific waste stream. The process parameters required for each system vary widely,

as do the requirements for feedstock pretreatment to ensure efficient conversion of biomass into energy (*Table 3*).^{63,66,71–74}

In most cases, the char and ash components that come from these conversion systems can be reapplied to crop lands as mineral-enriched fertilizers. Tars and cokes, however, must be removed and treated as waste.⁷⁵ Pyrolysis oils and heavy organic oils will vary in composition and energy content according to the type of biomass utilized.⁵⁰ The heating value gas produced as a by-product of pyrolysis would primarily be recycled and utilized in process heating to raise the overall system efficiency. Syngas produced during gasification also has a high heating value due to its low oxygen content and can be used either in direct combustion systems or be processed into liquid fuels through a Fischer–Tropsch process.⁷⁴ If air is used as the feed gas during the conversion process, the resulting syngas will have a lower heating value due to atmospheric nitrogen content. To increase the calorific value of the syngas, conversion would need to include a process that removes carbon dioxide (from the combustion reactions) and inert nitrogen (from the feed).

Land Use and Resource Analysis

The formation of fossil fuels historically required the transformation of decayed biomass, under immense heat and pressure for millions of years, into energy-dense hydrocarbons. To replace these energy-rich resources, large volumes of new-growth biomass are required. The resulting biomass is then similarly subjected to extreme conditions that in essence mimic the formation of fossil fuels. Biomass on this scale, however, necessitates a corresponding expanse of land with economic impacts dictated by the type of biomass and resources required for harvesting. The practicality of using biomass to produce energy will be dependent on the ability to provide necessary nutrients to maintain the biomass growth as well as effective processes to remove unwanted materials.^{76–78}

The feasibility of using biomass as an energy source, therefore, requires consideration of current total energy demands and production rates to determine the scale of biomass-to-energy conversion that would be required to sustain current levels of electricity

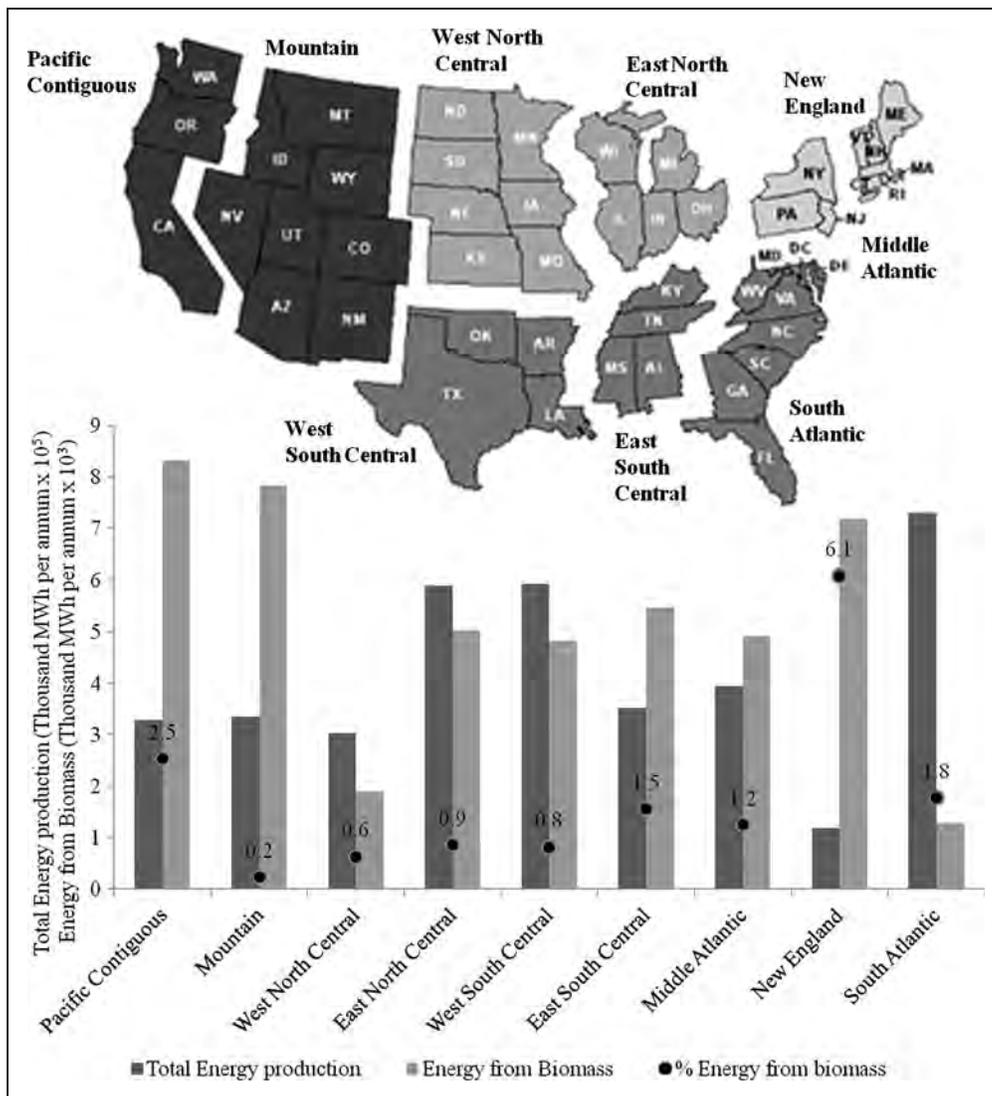


Fig. 4. Total and biomass-derived energy production in the United States by region, 2008. (Source: U.S. Energy Information Administration, 2011). Note: For clarity, values for “total energy” and “energy from biomass” are expressed as thousand megawatt hours per annum x 10⁵ and x 10³ respectively.

production. On average, less than 2% of the overall production of electricity across the continental United States comes from biomass production (Fig. 4). The bulk of the remaining power demand comes from coal, natural gas, oil, hydroelectric, and nuclear sources.¹ The exception is in the New England region, where ~6% of energy is derived from biomass, and is attributed to energy from direct combustion of wood for heat and power.

The average heat of combustion for grasses, woods, and algae can be estimated to be 8.7 MWh/t, 9.4 MWh/t, and 12.8 MWh/t respectively, with slight variations dependent on the specific makeup of the biomass as well as the conversion type. Using these numbers, however, an example scheme for the monthly requirements for biomass production can be determined (Fig. 5 and Supplementary Figure S1; Supplementary Data are available online at www.libertonline.com/

ind). The theoretical calculations are based on consideration of a common crop typical of the region (Table 4) with algae as a potential alternative source of biomass. Algal biomass is not considered a workable option in northern regions, such as the New England division, due to harsh winters and a lack of sufficient sunlight hours during winter months.

A comparison of the bio-oil production capacity from algal biomass and oil crops provides some credence to this principle. Production of soybean oil, for example, yields approximately 1,050 L/acre annually. Using this metric, ~1,500 million acres of cropland would be required to yield sufficient energy to displace 50% of the current demand for diesel; this land requirement, however, is > 3 times the current area of existing cropland in the United States.⁴ High-yielding oil crops such as coconut and oil palms reduce the land use significantly when grown in

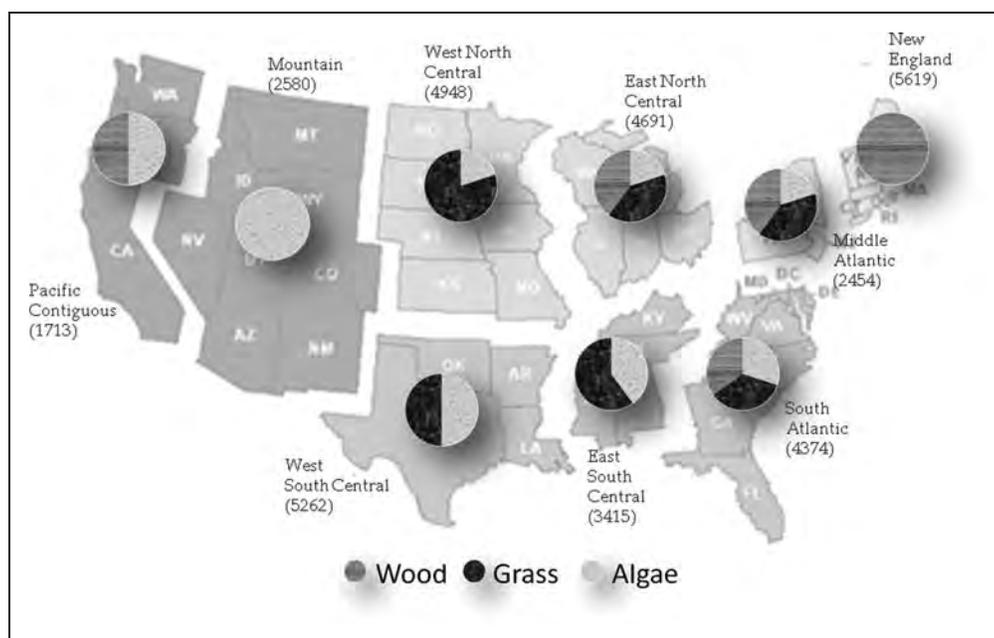


Fig. 5. Theoretical calculation for biomass contributions by geographical region and monthly acreage requirements (shown in parenthesis).

favorable locations (~50% and 25%, respectively, of current existing cropland). By comparison, less than 3% of the current area devoted to cropland in the United States would be required to produce sufficient algal biomass to offset approximately half of the current fuel needs for transportation.⁴ However, algae does not require displacement of useable cropland, meaning that less agriculturally valuable land can be utilized, saving fertile cropland for food crops.

For calculation purposes, the following conversions (1.0 kWh = 3.6 kJ and 1,000,000 g = 1 t) and assumptions have been made; conversion efficiency for gasification (43% with 14% solids remaining), pyrolysis (4% with 2% solids remaining) and liquefaction (35% with 3% solids remaining). Conversion systems for calculations are assumed to be gasification for grasses, pyrolysis for wood, and liquefaction for algal biomass.

Table 4. Monthly regional biomass demands and residual material

REGION	ELECTRICITY DEMAND (TWH)	BIOMASS REQUIRED (TONNES)	LAND REQUIRED (ACRES)	BIOMASS TYPE (%)			RESIDUE (TONNES)
				ALGAE	GRASS	WOOD	
New England	5.59	2341	5619			100	328
Middle Atlantic	18.67	9203	2454	20	40	40	1583
East North Central	35.69	17590	4691	20	40	40	3025
West North Central	18.02	9319	4948	20	80		1603
South Atlantic	35.84	18772	4374	30	35	35	3529
East South Central	20.14	11742	3415	40	60		2392
West South Central	35.65	22145	5262	50	50		4872
Pacific Contiguous	12.59	20857	2580	50		50	6257
Mountain	22.30	7281	1713	100			1602

In New England, for example, the electricity demand (5,593,000 MWh/month) can be met by supplying biomass totally from wood. The mass of wood required to satisfy demand is equivalent to ~5,619 acres of land. This process will generate 328 t/month of residue that must also be removed. This acreage requirement, however, represents only a small percentage of the total acreage for this region. In comparison, if we consider the use of algal biomass in the mountain region, the electricity demand for this region is 22,305,000 MWh and requires a mass of biomass approaching 20,857 tonnes. The high-energy content of algal biomass (12.8 MWh/t), however, necessitates a comparatively low land requirement to meet this need (2,580 acres) but is offset somewhat by a higher ash/residue load (6,257 t/month). In general, increasing the percentage of algal biomass that contributes to the overall biomass tonnage significantly reduces the acreage required for land use (Table 4).

One important consideration in the growth of biomass for any purpose is the fertilizer requirement. Fertilizers contribute the fixed nitrogen required for biomass synthesis as well as many other nutrients necessary for the optimal growth and cellular function of these organisms.^{79,80} Not only will the requirement for fertilizer greatly influence the cost of operating biomass-to-energy systems, it will affect the overall efficiency of the system. The use of fertilizers requires an infrastructure based on ground transportation of feed that adds to the energy consumption of the system and the overall carbon footprint.

Theoretical calculations of the impact that a bioenergy-based economy would have on the fertilizer industry indicated that fertilizer production would need to increase by a factor of 5.5 to sustain any significant benefit.⁸⁰ Algal biomass will also require heavy fertilization to sustain high growth yields, but sources such as wastewater treatment effluent may provide a viable source for the nutrients required. Algal biomass, therefore, does not necessarily require increased fertilizer production, and growth of algal biomass may actually be used to mitigate the unpolished discharge from wastewater treatment operations.

IMPACTS OF CONVERSION PROCESS TECHNIQUES ON LAND USE

Another consideration in producing vast quantities of biomass for energy conversion is appropriate handling of residual materials that will be created during processing. If not managed correctly, the waste material alone can create substantial changes in land use due to requirements for landfills and additional treatment facilities. Some materials such as ash and char can be reutilized as a component of mineral/nutrient fertilizers. Other waste products such as tars and cokes presently have little commercial value and must be disposed of through conventional waste treatment methods. Alternative uses for these waste products may develop in parallel with improvements in biomass conversion technologies. If a large-scale biomass-derived energy program is established, new markets may emerge that transform specific waste streams of tars, cokes, chars, and ashes into value-added products.⁸¹

Conclusions

Given current technologies, there are logical conversion practices for various types of biomass. Due to the high water content of algae,

liquefaction appears to be the logical choice because the need to remove large amounts of water is eliminated. By analogy, pyrolysis and gasification techniques seem advantageous for thermal conversion of wood and grass due to the lower water content and higher concentration of celluloses and proteins. The downside of this strategy is that algae will produce a much larger volume of waste material since liquefaction produces larger volumes of solid residue as well as liquid products that serve little commercial purpose. The char produced from liquefaction, however, can be considered sequestered carbon and reused as a slow-release nutrient addition to amend soils. Understanding the fundamental principles of how living organisms convert carbon, nutrients, and energy into biomass can rapidly lead to effective strategies to enable the conversion of biomass to be realized as a practical source of renewable alternative energy. The identification of type-specific biomass processing parameters, in combination with land usage and treatment options required for specific waste streams, will reveal a sustainable and effective strategy to maximize biomass production and ultimately benefit the energy infrastructure. A bioenergy-derived electrical grid will require substantial capital, real estate, and infrastructure investments. To reach the magnitude of material required to sustain such a large electrical requirement, vast amounts of land must be utilized for growing and processing of biomass as well as disposing of waste components from conversion of biomass into energy. Steps must be taken to minimize this impact and understand how it will affect environmental quality and—most importantly—the ability of the nation to continue to sustain itself in terms of food and materials. If resources must be diverted from other processes to supplement the development of bioenergy, additional solutions such as other sources of alternative energy should be implemented to most effectively utilize the limited resources of the nation.

Further work must be done to increase energy yield from current biomass systems. Studies should include methods to increase the energy density of biomass while decreasing the need for fertilizers and other nutrients and the time between harvests. Further methods are needed to utilize wastes generated during the various steps of the energy process, not only to increase the overall efficiency of the system, but also to minimize the impact of land use change. With improvements in energy yield and growth requirements, bioenergy systems can have a great impact on the way the United States as well as the rest of the world produces energy.

Acknowledgments

The authors thank the Air Force Research Laboratory for providing funding to support this effort.

Author Disclosure Statement

No competing financial interests exist.

REFERENCES

1. M.S. Dresselhaus, I.L. Thomas. Alternative Energy Technologies. *Nature* 2001:414:332.

2. Amin S. Review on biofuel oil and gas production processes from microalgae. *Energ Convers Manage* 2009;50:1834–1840.
3. Berndes G, Hoogwijk M, van den Broek R. *Biomass Bioenerg* 2003;25:1.
4. Cherubini F. The biorefinery concept: Using biomass instead of oil for producing energy and chemicals. *Energ Convers Manage* 2010;51(7):1412–1421.
5. Hall DO. *Forest Eco Manag* 1997;91:17.
6. Chisti Y. Biodiesel from microalgae. *Biotechno Adv* 2007;25:294–306.
7. Kalita D. *Renew Sust Energ Rev* 2008;12(2) 455–471.
8. Hahn-Hagerdal B, Galbe M, Gorwa-Grauslund MF, et al. Bio-ethanol - the fuel of tomorrow from the residues of today. *Trends Biotechnol* 2006;24(12):549–556.
9. Regalbutto JR. Cellulosic Biofuels—Got Gasoline? *Science* 2009;325:822–824.
10. Perry M, Rosillo-Calle F. Recent trends and future opportunities in UK bioenergy. Maximising biomass penetration in a centralised energy system. *Biomass Bioenerg* 2008;32(8): 688–701.
11. Viana H, Cohen WB, Lopes D, et al. Assessment of forest biomass for use as energy. GIS-based analysis of geographical availability and locations of wood-fired power plants in Portugal. *Appl Energ* 2010;87(8):2551–2560.
12. Savolainen K. Co-firing of biomass in coal-fired utility boilers. *Appl Energ* 2003;74(3–4):369–381.
13. Demirbas MF, Balat M, Balat H. Potential contribution of biomass to the sustainable energy development. *Energ Convers Manage* 2009;50(7):1746–1760.
14. Ragauskas AJ, Nagy M, Kim, DH, et al. From wood to fuels: Integrating biofuels and pulp production. *Ind Biotechnol* 2006;2(1):55–65.
15. U.S. Department of Energy, Breaking the Biological Barriers to Cellulosic Ethanol: A Joint Research Agenda, DOE/SC/EE-0095. (2006) Available at: <http://genomicscience.energy.gov/biofuels>
16. Rosenberg NM, Smith SJ. A sustainable biomass industry for the North American Great Plains. *Curr Opin Environ Sustain* 2009;1(2):121–132.
17. Anemaet IG, Bekker M, Hellingwerf KJ. Algal photosynthesis as the primary driver for a sustainable development in energy, feed, and food production. *Mar Biotechnol* 2010;12(6): 619–629.
18. Osadolor OO. Availability of grasses, weeds and leaves as energy resource. *Renew Energ* 2009;34(3):486–491.
19. Florine SE, Moore KJ, Fales SL, et al. Yield and composition of herbaceous biomass harvested from naturalized grassland in southern Iowa. *Biomass Bioenerg* 2006;30(6):522–528.
20. Lewandowski I, Scurlock JMO, Lindvall E, et al. The development and current status of perennial rhizomatous grasses as energy crops in the US and Europe. *Biomass Bioenerg* 2003;25(4):335–361.
21. Aravindhakshan SC, Epplin FM, Taliaferro CM. Switchgrass, Bermudagrass, Flaccidgrass, and Lovegrass biomass yield response to nitrogen for single and double harvest. *Biomass Bioenerg* 2011;35(1):308–319.
22. Fike JH, Parrish DJ, Wolf DD, et al. Switchgrass production for the upper southeastern USA: Influence of cultivar and cutting frequency on biomass yields. *Biomass Bioenerg* 2006;30(3):207–213.
23. Felix E, Tilley DR. Integrated energy, environmental and financial analysis of ethanol production from cellulosic switchgrass. *Energ* 2009;34(4):410–436.
24. Smyth BM, Murphy JD, O'Brien CM. What is the energy balance of grass biomethane in Ireland and other temperate northern European climates? *Renew Sust Energ Rev* 2009;13(9):2349–2360.
25. Bridgeman TG, Jones JM, Shield I, et al. Torrefaction of reed canary grass, wheat straw and willow to enhance solid fuel qualities and combustion properties. *Fuel* 2008;87(6):844–856.
26. Delagarde R, Peyraud JL, Delaby L et al., *Animal Feed Science and Technology* 2000:84:49.
27. Maiti S, Dey S, Purakayastha S et al., *Bioresource Technology* 2006:97,2065.
28. Hajaligol M, Waymack B, Kellogg D. Low temperature formation of aromatic hydrocarbon from pyrolysis of cellulosic materials. *Fuel* 2001;80(12):1799–1807.
29. Huang H-J, Ramaswamy S, Al-Dajani W, et al. Effect of biomass species and plant size on cellulosic ethanol: A comparative process and economic analysis. *Biomass Bioenerg* 2009;33(2):234–246.
30. Khiari R, Mhenni MF, Belgacem MN, et al. Chemical composition and pulping of date palm rachis and *Posidonia oceanica*—A comparison with other wood and non-wood fibre sources. *Bioresour Technol* 2010;101(2):775–780.
31. Lee DK, Owens VN, Boe A, et al. Report No. SGINC1-07. (2007).
32. Vande Walle I, Van Camp N, Van de Castele L, et al. Short-rotation forestry of birch, maple, poplar and willow in Flanders (Belgium) I. Biomass production after 4 years of tree growth. *Biomass Bioenerg* 2007;31(5): 267–275.
33. Fowler P, Krajacic G, Loncar D, et al. Modeling the energy potential of biomass—H₂RES. *Int J Hydrogen Energ* 2009;34(16):7027–7040.
34. Freppaz D, Minciardi R, Robba M, et al. Optimizing forest biomass exploitation for energy supply at a regional level. *Biomass Bioenerg* 2004;26(1):15–25.
35. Gautum S, Pulkki R, Shahi C, et al. Economic and energy efficiency of salvaging biomass from wildfire burnt areas for bioenergy production in northwestern Ontario: A case study. *Biomass Bioenerg* 2010;34(11): 15621572.
36. Teixeira MA. Babassu—A new approach for an ancient Brazilian biomass. *Biomass Bioenerg* 2008;32(9): 887–864.
37. Kelly-Yong TL, Lee KT, Mohamed AR, et al. Potential of hydrogen from oil palm biomass as a source of renewable energy worldwide. *Energ Policy* 2007;35(11):5692–5701.
38. M.J. Stolarski, S. Szczukowski, J. Tworkowski et al., *Ind Crops Products* 2011;33:217.
39. Andre F, Jonard M, Ponette Q. Biomass and nutrient content of sessile oak (*Quercus petraea* (Matt.) Liebl.) and beech (*Fagus sylvatica* L.) stem and branches in a mixed stand in southern Belgium. *Sci Total Environ* 2010;408(11):2285–2294.
40. Przyborowski JA, Sulima P. The analysis of genetic diversity of *Salix viminalis* genotypes as a potential source of biomass by RAPD markers. *Ind Crop Prod* 2010;31(2): 395–400.
41. Illman AM, Scragg AH, Shales SW. Increase in *Chorella* strains calorific values when grown in low nitrogen medium. *Enzyme Microb Technol* 2000;27(8):631–635.
42. Corder RE, Hill AM, Lindsey H, et al. Report No. SERI/PR-231–2272 (1983).
43. Pan P, Hu C, Yang W, et al. The direct pyrolysis and catalytic pyrolysis of *Nannochloropsis* sp. residue for renewable bio-oils. *Bioresour Technol* 2010;101(12):4593–4599.
44. Chiu SY, Kao CY, Tsai MT, et al. Lipid accumulation and CO₂ utilization of *Ananchochloropsis oculata* in response to CO₂ aeration. *Bioresour Technol* 2009;100(2):833–838.
45. Meng X, Yang J, Xu X, et al. Biodiesel production from oleaginous microorganisms. *Renew Energ* 2009;34(1):1–5.
46. Collet C, Adler N, Schwitzguebel, JP et al., Hydrogen production by *Clostridium thermolacticum* during continuous fermentation of lactose. *Int J Hydrogen Energ* 2004;29(14):1479–1485.
47. Lo YC, Huang CY, Fu TN, et al. Fermentative hydrogen production from hydrolyzed cellulosic feedstock prepared with a thermophilic anaerobic bacterial isolate. *Int J Hydrogen Energ* 2009;34(15):6189–6200.
48. Virmond E, Schacker RL, Albrecht W, et al. Organic solid waste originating from the meat processing industry as an alternative energy source. *Energ* 2011;36(6):3897–3906.
49. Iakovou E, Karagiannidis A, Vlachos D, et al. *Waste Manage* 2010;30(10):1860–1870.
50. Demirbas A. The influence of temperature on the yields of compounds existing in bio-oils obtained from biomass samples via pyrolysis. *Fuel Process Technol* 2007;88(6):591–597.
51. Sturm BSM, Lamer SL. An energy evaluation of coupling nutrient removal from wastewater with algal biomass production. *Appl Energ* 2011;88(10):3499–3506.

52. Mulbry W, Kangas P, Kondrad S. Toward scrubbing the bay: Nutrient removal using small algal turf scrubbers on Chesapeake Bay tributaries. *Ecol Eng* 2010;36(4):536–541.
53. Packer M. Algal capture of carbon dioxide; biomass generation as a tool for greenhouse gas mitigation with reference to New Zealand energy strategy and policy. *Energy Policy* 2009;37(9):3428–3437.
54. Filho PA, Badr O. Biomass resources for energy in North-Eastern Brazil. *App Energ* 2004;77(1):51–67.
55. Zekic V, Rodic V, Jovanovic M. Potentials and economic viability of small grain residue use as a source of energy in Serbia. *Biomass Bioenergy* 2010;34(12):1789–1795.
56. Cosic B, Stanic Z, Duic N. Geographic distribution of economic potential of agricultural and forest biomass residual for energy use: Case study, Croatia. *Energy* 2011;36(4):2017–2028.
57. Mulkey VR, Owens VN, Lee DK. Management of warm-season grass mixtures for biomass production in South Dakota USA. *Bioresour Technol* 2008;99(3):609–617.
58. Schittenhelm S. Chemical composition and methane yield of maize hybrids with contrasting maturity. *Eur J Agron* 2008;29(2–3):72–79.
59. Z. Hrevusova, M. Hejcman, V.V. Pavlu et al. *Agriculture, Ecosystems and Environment* 2009;130:123.
60. Angelini LG, Ceccarini L, Bonari E. Biomass Yield and energy balance of giant reed (*Arundo donax* L.) cropped in central Italy as related to different management practices. *Eur J Agron* 2005;22(4):375–389.
61. Wang L, Weller CL, Jones, DD, et al. Contemporary issues in thermal gasification of biomass and its application to electricity and fuel production. *Biomass and Bioenergy* 2008;32(7):573–581.
62. Caputo AC, Palumbo M, Pelagagge PM, et al. Economics of biomass energy utilization in combustion and gasification plants: Effects of logistic variables. *Biomass Bioenergy* 2005;28(1):35–51.
63. Bridgwater AV, Toft AJ, Brammer JG. A techno-economic comparison of power production by biomass fast pyrolysis with gasification and combustion. *Renew Sust Energ Rev* 2002;6(3):181–246.
64. Balat M, Balat M, Kirtay E, et al. Main routes for the thermo-conversion of biomass into fuels and chemicals. Part 2: Gasification systems. *Energy Convers Manage* 2009;50(12):3158–3168.
65. Balat M, Balat M, Kirtay E, et al. Main routes for the thermo-conversion of biomass into fuels and chemicals. Part 1: Pyrolysis systems. *Energy Convers Manage* 2009;50(12):3147–3157.
66. Akhtar J, Aihah NAS. A review on process conditions for optimum bio-oil yield in hydrothermal liquefaction of biomass. *Renew Sus Energ Rev* 2011;15(3):1615–1624.
67. Rustamov VR, Abdullayev KM, Samedov EA. Biomass conversion to liquid fuel by two-stage thermochemical cycle. *Energy Convers Manage* 1998;39(9):869–875.
68. Xu C, Etcheverry T. Hydro-liquefaction of woody biomass in sub- and super-critical ethanol with iron-based catalysts. *Fuel* 2008;87(3):335–345.
69. Sun P, Heng M, Sun S, et al. Direct liquefaction of paulownia in hot compressed water: Influence of catalysis. *Energy* 2010;35(12):5421–5429.
70. Onay O, Kockar OM. Slow, fast and flash pyrolysis of rapeseed. *Renew Energy* 2003;28(15):2417–2433.
71. Smets K, Adriaensens P, Reggers G, et al. Flash pyrolysis of rapeseed cake: Influence of temperature on the yield and the characteristics of the pyrolysis liquid. *J Analyt Appl Pyrol* 2011;90(2):118–125.
72. Luik H, Luik L, Vink N, et al. in *Zero Emission Power Generation Workshop*. Tubitak MRC, Gebze, Turkey (2007).
73. Blasi CD. Modeling chemical and physical processes of wood and biomass pyrolysis. *Prog Energy Combust* 2008;34(1):47–90.
74. Tijmensen MJA, Faaij APC, Hamelinck CN, et al. Exploration of the possibilities for production of Fischer Tropsch liquids and power via biomass gasification. *Biomass and Bioenergy* 2002;23(2):129–152.
75. Devi L, Ptasinski KJ, Janssen JGG. A review of the primary measures for tar elimination in biomass gasification processes. *Biomass and Bioenergy* 2003;24(2):125–140.
76. Yamamoto H, Yamaji K, Fujino J. Scenario analysis of bioenergy resources and CO₂ emissions with a global land use and energy model. *Appl Energy* 2000;66(4):325–337.
77. Faaij A, Steetskamp I, van Wijk A, et al. Exploration of the land potential for the production of biomass for energy in the Netherlands. *Biomass Bioenergy* 1998;14(5–6):439–456.
78. Wolf J, Bindraban PS, Luijten JC, et al. Exploratory study on the land area required for global food supply and the potential global production of bioenergy. *Agr Sys* 2003;76(3):841–861.
79. Fixen PE. Presentation at the Proceedings of the 2007 Fluid Forum, Scottsdale, AZ (2007).
80. Han FX, King RL, Lindner JS, et al. Nutrient fertilizer requirements for sustainable biomass supply to meet U.S. bioenergy goal. *Biomass Bioenergy* 2011;35(1):253–262.
81. Lyberatos G, Nzihou A. Biological and pretreatment processes for the valorization of waste and biomass into energy/fuel and useful materials – Waste Eng, 3–5 June 2008, Patras (Greece) *Bioresour Technol* 2009;100(15):3689.

Address correspondence to:

Robert A. Diltz

Air Force Research Laboratory

139 Barnes Drive, Suite #2

Tyndall AFB, FL 32403

Phone: +001 (850) 283-6058

Fax: +001 (850) 283-2035

E-mail: robert.diltz@tyndall.af.mil