

Urban Terrain Building Types, Second Edition Public Releasable Version

by Richard Ellefsen and David Fordyce

ARL-TR-4395a November 2012

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5067

ARL-TR-4395a November 2012

Urban Terrain Building Types, Second Edition Public Releasable Version

Richard Ellefsen Professor Emeritus, San Jose State University

David Fordyce Survivability/Lethality Analysis Directorate, ARL

Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)	2. REPORT TYPE	3. DATES COVERED (From - To)	
November 2012	Final	November 2006–November 2007	
4. TITLE AND SUBTITLE	•	5a. CONTRACT NUMBER	
Urban Terrain Building Types,	Second Edition	W911QX-07-P-0039	
Public Releasable Version		5b. GRANT NUMBER	
		5c. PROGRAM ELEMENT NUMBER	
a AUTUOD(O)		E L DDG (FOT NUMBER	
6. AUTHOR(S)		5d. PROJECT NUMBER	
Richard Ellefsen* and David Fo	ordyce	622618H8000	
		5e. TASK NUMBER	
		5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NA	ME(S) AND ADDRESS(ES)	8. PERFORMING ORGANIZATION	
San Jose State University		REPORT NUMBER	
San Jose, CA 95192		ARL-TR-4395a	
9. SPONSORING/MONITORING AGEN	CY NAME(S) AND ADDRESS(ES)	10. SPONSOR/MONITOR'S ACRONYM(S)	
U.S. Army Research Laborator	у		
ATTN: AMSRD-ARL-SL-BA		11. SPONSOR/MONITOR'S REPORT	
Aberdeen Proving Ground, MI	21005-5067	NUMBER(S)	
42 DICTRIBUTION/AVAILABILITY CT	ATEMENT		

12. DISTRIBUTION/AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

13. SUPPLEMENTARY NOTES

*Professor Emeritus, San Jose State University, San Jose, CA 95192

14. ABSTRACT

The structure target is a common element of concern to military planners, weaponeers, battle damage assessors, munition designers, firing platform designers, evaluators, modeling and simulation analysts, and developers of suitable range targets for use in live fire and training exercises. Using a precise and comprehensive set of standard geotypical building descriptions as a baseline eliminates a significant variable in estimating weapon effects. To date, a set of building descriptions has not been available to this community. The U.S. Army Research Laboratory, Survivability/Lethality Analysis Directorate, directed the development of this report, which provides these descriptions on a worldwide basis using an established and accepted methodology. This document is an extract of the original ARL technical report (ARL-TR-4395), published in March 2008.

15. SUBJECT TERMS

urban terrain building types, urban terrain zones, standard building descriptions

16. SECURITY CLASSIFICATION OF:		17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON David Fordyce	
a. REPORT	b. ABSTRACT	c. THIS PAGE	SAR	392	19b. TELEPHONE NUMBER (Include area code)
Unclassified	Unclassified	Unclassified	SAIC	392	410-278-6340

Standard Form 298 (Rev. 8/98) Prescribed by ANSI Std. Z39.18

Contents

List	t of F	igures	v
List	t of T	lables	xiv
Aut	thors	' Biographies	XV
1.	Nee	d	1
2.	Goa	ls	2
3.	App	oroach	2
4.	Met	hod	3
5.	Intr	oduction to Tables 2 Through 6	4
6.	An	Overview of the UTBT Catalog by Method of Construction and by Function	10
7.	Cata	alog Organization	16
8.	Plat	e 1: Place on the Building Construction Chart	16
9.	Plat	e Group 2: Elevation	17
	9.1	Venting: Windows and Doors	17
		9.1.1 Building Construction Type Differences (Mass vs. Framed)	18
		9.1.2 Generalizations on Windows and Doors Relative to Building Function	18
		9.1.3 Venting Measurements	19
		9.1.4 Data Organization	19
		9.1.5 Data Analysis	21
		9.1.6 Discrete Construction Type Buildings by Function	23
		9.1.7 Window Dimensions	25
		9.1.8 Window Thickness	26
		9.1.9 Window Patterns	27
	9.2	Roofs	29
		9.2.1 Method	29

9.2.2 Analysis of Roof Shape	30
9.2.3 Analysis of Building Function	32
9.2.4 Worldwide Roof Constants	39
9.2.5 Roof Material Types	40
10. Plate Group 3: Floor Plans/Room Dimensions	43
11. Plate Group 4: Construction Features	46
12. The Catalog of Urban Terrain Building Types	46
13. Urban Terrain Zones	294
Appendix	317
Bibliography	359
Glossary	360
Index	364
Distribution List	373

List of Figures

Figure 1. Mass construction (red) is intended to imply buildings that have walls that bear significant weight (both dead and live loads), i.e., "load-bearing walls." Framed construction (blue) indicates structures in which a frame carries the required loads	11
Figure 2. A half-timbered frame house resting on a stone ground floor	12
Figure 3. The reinforced concrete end wall of a steel-framed high-rise office building	12
Figure 4. Reinforced concrete shear walls in the basement parking area of a framed building while under construction.	13
Figure 5. Wood-framed structure being built upon a reinforced concrete base. This is the same structure as in figure 4, at a more advanced state.	13
Figure 6. Place on the building construction chart.	16
Figure 7. A framed, light-clad office building with a spandrel window pattern. Glass, both clear and opaque, lies between vertical mullions	27
Figure 8. Windows set in between column and beam members in a framed office building form an infill pattern.	28
Figure 9. An example of a curtain wall being placed on a R/C-framed office building. Glass, clear and opaque, is being placed between narrow spandrels and mullions	, 28
Figure 10. Clear and opaque glass form a curtain wall being installed on a framed office building.	29
Figure 11. Typical "flat" roof with air conditioning and ventilation units. Note tar paper strips, parapet, and slight slope to gable roof	31
Figure 12. Five basic roof shapes.	32
Figure 13. European row houses with terra cotta tile pitched roofs.	33
Figure 14. Mostly flat roofs on masonry structures in Africa	33
Figure 15. Northern European administrative/cultural building with pitched roof	34
Figure 16. Temple building in Thailand with typical pitched roof	
Figure 17. Flat-roofed high-rise apartment buildings in Northeast Asia	36
Figure 18. Stylized pitched roofs on Asian office buildings.	
Figure 19. Most of the industrial/storage buildings in this complex have metal pitched roofs.	
Figure 20. Metal-roofed industrial storage buildings in South America.	38
Figure 21. Terra cotta pitched roofs on academic buildings in the Middle East	39
Figure 22. Corrugated steel roofs on shanties in Asia.	40
Figure 23. Concrete flat roofs on buildings in the Middle East	41
Figure 24. Terra cotta–tiled roof in southern Europe. Detailed photo shows a common practice of convex tile placed over flat tiles.	41

Figure 25.	Ribbed terra cotta tile hip-roof on a CMU construction in South Asia	42
	Ribbed steel roof (middle), tile roof (left), and rolled roofing (right) in northern	42
Figure 27.	Planimetric floor plan and isometric rendering of an industrial/storage building	44
Figure 28.	Mass 1-1 place on building construction chart.	48
Figure 29.	Mass 1 elevation.	49
Figure 30.	Mass 1-3-a floor plans.	50
Figure 31.	Mass 1-4 construction.	51
Figure 32.	Mass 2-1 place on building construction chart.	52
Figure 33.	Mass 2-2 elevations.	53
Figure 34.	Mass 2-3 floor plan	54
Figure 35.	Mass 2-4-a construction.	55
Figure 36.	Mass 2-4-b construction.	56
Figure 37.	Mass 2-4-c construction.	57
Figure 38.	Mass 3-1 place on building construction chart.	58
Figure 39.	Mass 3-2-a elevation and isometric rendering.	59
Figure 40.	Mass 3-2-b elevations.	60
Figure 41.	Mass 3-3-a floor plan	61
Figure 42.	Mass 3-4-a construction.	62
Figure 43.	Mass 3-4-b construction method.	63
Figure 44.	Mass 4-1 place on building construction chart.	64
Figure 45.	Mass 4-2 elevations.	65
Figure 46.	Mass 4-3-a floor plan	66
Figure 47.	Mass 4-4-a construction: building materials.	67
Figure 48.	Mass 4-4-b construction: materials.	68
Figure 49.	Mass 4-4-c construction: materials	69
Figure 50.	Mass 4-4-d construction: roof materials.	70
Figure 51.	Mass 5-1 place on building construction chart.	71
Figure 52.	Mass 5-2 elevations.	72
Figure 53.	Mass 5-3-a floor plan	73
Figure 54.	Mass 5-3-b floor plan.	74
Figure 55.	Mass 5-4-a construction.	75
Figure 56.	Mass 5-4-b construction.	76
Figure 57.	Mass 5-4-c construction (brick courses)	77

Figure 58.	Mass 6-1 place on building construction chart.	78
Figure 59.	Mass 6-2 elevations.	79
Figure 60.	Mass 6-3-a floor plan	80
Figure 61.	Mass 6-3-b isometric floor plan.	81
Figure 62.	Mass 6-3-c isometric floor plan.	82
Figure 63.	Mass 6-4-a construction.	83
Figure 64.	Mass 6-4-b construction.	84
Figure 65.	Mass 7-1 place on building construction chart.	85
Figure 66.	Mass 7-2-a elevation.	86
Figure 67.	Mass 7-2-b elevation.	87
Figure 68.	Mass 7-3-a floor plan	88
Figure 69.	Mass 7-3-b floor plan.	89
Figure 70.	Mass 7-3-c isometric floor plan.	90
Figure 71.	Mass 7-4 construction.	91
Figure 72.	Mass 8-1 place on building construction chart.	92
Figure 73.	Mass 8-2 elevation.	93
Figure 74.	Mass 8-3-a floor plan	94
Figure 75.	Mass 8-3-b floor plan.	95
Figure 76.	Mass 8-4 construction.	96
Figure 77.	Mass 9-1 place on building construction chart.	97
Figure 78.	Mass 9-2 elevation.	98
Figure 79.	Mass 9-3-a floor plans.	99
Figure 80.	Mass 9-4 construction: wall and window.	100
Figure 81.	Mass 10-1 place on building construction chart.	101
Figure 82.	Mass 10-2 elevation.	102
Figure 83.	Mass 10-3-a floor plan	103
Figure 84.	Mass 10-3-b floor plan.	104
Figure 85.	Mass 10-4 construction, interiors.	105
Figure 86.	Mass 11-1 place on building construction chart.	106
Figure 87.	Mass 11-2 elevation.	107
Figure 88.	Mass 11-3-a floor plan	108
Figure 89.	Mass 11-4 construction	109
Figure 90.	Mass 12-1 place on building construction chart.	110
Figure 91.	Mass 12-2 elevation and floor plan.	111

Figure 92. Mass 12-3-a floor plan	112
Figure 93. Mass 12-4 construction.	114
Figure 94. Mass 13-1 place on building construction chart.	115
Figure 95. Mass 13-2 elevation.	116
Figure 96. Mass 13-3-a floor plan	117
Figure 97. Mass 13-4 construction.	118
Figure 98. Mass 14-1 place on building construction chart	119
Figure 99. Mass 14-2 elevations.	120
Figure 100. Mass 14-3-a floor plan.	121
Figure 101. Mass 14-4-a construction.	122
Figure 102. Mass 14-4-b construction.	123
Figure 103. Mass 15-1 place on building construction chart.	124
Figure 104. Mass 15-2 elevations.	125
Figure 105. Mass 15-3-a floor plan.	
Figure 106. Mass 15-4 construction.	127
Figure 107. Mass 16-1 place on building construction chart	128
Figure 108. Mass 16-2 elevation.	129
Figure 109. Mass 16-3-a floor plans.	130
Figure 110. Mass 16-3-b isometric floor plan.	131
Figure 111. Mass 16-4 construction	132
Figure 112. Mass 17-1 place on building construction chart	133
Figure 113. Mass 17-2 elevation and construction.	134
Figure 114. Mass 17-3-a floor plan and construction.	135
Figure 115. Mass 17-4 construction	136
Figure 116. Mass 18-1 place on building construction chart	
Figure 117. Mass 18-2 elevation	138
Figure 118. Mass 18-3-a floor plan	139
Figure 119. Mass 18-4-a construction.	140
Figure 120. Mass 18-4-b construction.	141
Figure 121. Mass 18-4-c construction.	142
Figure 122. Mass 19-1 place on building construction chart	
Figure 123. Mass 19-2 elevation.	144
Figure 124. Mass 19-3-a floor plan	145
Figure 125. Mass 19-3-b isometric floor plan.	146

Figure 126.	Mass 19-4 construction method and dimensions	147
Figure 127.	Mass 20-1 place on building construction chart.	148
Figure 128.	Mass 20-2 elevation.	149
Figure 129.	Mass 20-3-a floor plan	150
Figure 130.	Mass 20-4 construction.	151
Figure 131.	Mass 21-1 place o n building construction chart.	152
Figure 132.	Mass 21-2 elevations.	153
Figure 133.	Mass 21-3-a floor plan	154
Figure 134.	Mass 21-4-a construction.	155
Figure 135.	Mass 21-4-b construction.	156
Figure 136.	Mass 22-1 place on building construction chart.	157
Figure 137.	Mass 22-2 elevation.	158
Figure 138.	Mass 22-3-a floor plan.	159
Figure 139.	Mass 22-3-b floor plan.	160
Figure 140.	Mass 22-3-c floor plan.	161
_	Mass 22-3-d isometric floor plan, an upper floor	
Figure 142.	Mass 22-4-a construction.	163
Figure 143.	Mass 22-4-b construction.	164
Figure 144.	Mass 22-4-c construction.	165
•	Mass 22-4-d construction.	
Figure 146.	Mass 22-5 locale	167
Figure 147.	Mass 23-1 place on building construction chart.	168
Figure 148.	Mass 23-2 elevations.	169
Figure 149.	Mass 23-3-a floor plan	170
Figure 150.	Mass 23-3-b floor plan.	171
Figure 151.	Mass 23-4 construction details.	172
Figure 152.	Framed 1-1 place on building construction chart.	174
Figure 153.	Framed 1-2 elevation and construction description	175
	Framed 1-3-a floor plan and structure.	
Figure 155.	Framed 1-4 construction.	177
Figure 156.	Framed 2-1 place on building construction chart.	178
Figure 157.	Framed 2-2 elevation and construction description	179
Figure 158.	Framed 2-3-a floor plan.	180
Figure 159	Framed 2-4-a construction method	181

Figure 160.	Framed 2-4-b construction details.	182
Figure 161.	Framed 3-1 place on building construction chart.	183
Figure 162.	Framed 3-2 elevations.	184
Figure 163.	Framed 3-3-a floor plan.	185
Figure 164.	Framed 3-4-a construction.	186
Figure 165.	Framed 3-4-b construction.	187
Figure 166.	Framed 3-4-c construction.	188
Figure 167.	Framed 4-1 place on building construction chart.	189
Figure 168.	Framed 4-2 elevations.	190
Figure 169.	Framed 4-3-a floor plan.	191
Figure 170.	Framed 4-4 construction.	192
Figure 171.	Framed 5-1 place on building construction chart.	193
Figure 172.	Framed 5-2 elevations.	194
Figure 173.	Framed 5-3-a floor plan.	195
Figure 174.	Framed 5-4 construction method.	196
Figure 175.	Framed 6-1 place on building construction chart.	197
Figure 176.	Framed 6-2-a elevation.	198
Figure 177.	Framed 6-2-b elevations.	199
Figure 178.	Framed 6-3-a floor plan.	200
Figure 179.	Framed 6-3-b floor plan.	201
Figure 180.	Framed 6-3-c floor plan	202
Figure 181.	Framed 6-3-d floor plan.	203
Figure 182.	Framed 6-4 construction.	204
Figure 183.	Framed 7-1 place on building construction chart.	205
Figure 184.	Framed 7-2 elevation.	206
Figure 185.	Framed 7-3-a floor plan.	207
Figure 186.	Framed 7-3-b floor plan.	208
Figure 187.	Framed 7-3-c floor plan.	209
Figure 188.	Framed 7-3-d floor plan.	210
Figure 189.	Framed 7-4-a construction.	211
Figure 190.	Framed 7-4-b construction.	212
Figure 191.	Framed 7-4-c construction.	213
Figure 192.	Framed 8-1 place on building construction chart.	214
Figure 193.	Framed 8-2 elevation.	215

Figure 194.	Framed 8-3-a floor plan.	216
Figure 195.	Framed 8-4 construction.	217
Figure 196.	Framed 9-1 place on building construction chart.	218
Figure 197.	Framed 9-2 elevation.	219
Figure 198.	Framed 9-3-a floor plan.	220
Figure 199.	Framed 9-3-b floor plan	221
Figure 200.	Framed 9-3-c floor plan.	222
Figure 201.	Framed 9-4-a construction.	223
Figure 202.	Framed 9-4-b construction.	224
Figure 203.	Framed 9-4-c construction.	225
Figure 204.	Framed 10-1 place on building construction chart.	226
Figure 205.	Framed 10-2 elevation.	227
Figure 206.	Framed 10-3-a floor plan.	228
Figure 207.	Framed 10-4-a construction.	229
Figure 208.	Framed 10-4-b construction.	230
Figure 209.	Framed 11-1 place on building construction chart.	231
Figure 210.	Framed 11-2 elevations.	232
Figure 211.	Framed 11-3-a floor plan.	233
Figure 212.	Framed 11-4-a construction.	234
Figure 213.	Framed 11-4-b construction.	235
Figure 214.	Framed 11-4-c construction.	236
Figure 215.	Framed 12-1 place on building construction chart.	237
Figure 216.	Framed 12-2-a elevation.	238
Figure 217.	Framed 12-2-b elevation.	239
Figure 218.	Framed 12-3-a floor plan.	240
Figure 219.	Framed 12-3-b floor plan.	241
Figure 220.	Framed 12-4-a construction.	242
Figure 221.	Framed 12-4-b construction.	243
Figure 222.	Framed 12-4-c construction.	244
Figure 223.	Framed 12-4-d construction.	245
Figure 224.	Framed 12-4-e construction.	246
Figure 225.	Framed 12-4-f construction.	247
Figure 226.	Framed 13-1 place on building construction chart.	248
Figure 227.	Framed 13-2-a elevation.	249

Figure 228.	Framed 13-2-b elevation	250
Figure 229.	Framed 13-3-a floor plan.	251
Figure 230.	Framed 13-3-b floor plan	252
Figure 231.	Framed 13-4-a construction.	253
Figure 232.	Framed 13-4-b construction.	254
Figure 233.	Framed 14-1 place on building construction chart.	255
Figure 234.	Framed 14-2-a elevation.	256
Figure 235.	Framed 14-2-b elevation.	257
Figure 236.	Framed 14-3-a floor plan.	258
Figure 237.	Framed 14-3-b floor plan.	259
Figure 238.	Framed 14-4-a construction.	260
Figure 239.	Framed 14-4-b construction.	261
Figure 240.	Framed 15-1 place on building construction chart.	262
Figure 241.	Framed 15-2 elevations.	263
Figure 242.	Framed 15-3-a floor plans.	264
Figure 243.	Framed 15-4 construction.	265
Figure 244.	Framed 16-1 place on building construction chart.	266
Figure 245.	Framed 16-2-a elevation.	267
Figure 246.	Framed 16-2-b elevation.	268
Figure 247.	Framed 16-3-a floor plan.	269
Figure 248.	Framed 16-4 construction.	270
Figure 249.	Framed 17-1 place on building construction chart.	271
Figure 250.	Framed 17-2-a elevation.	272
Figure 251.	Framed 17-2-b elevation.	273
Figure 252.	Framed 17-3-a floor plan.	274
Figure 253.	Framed 17-4 construction.	275
Figure 254.	Framed 18-1 place on building construction chart.	276
Figure 255.	Framed 18-2-a elevation.	277
Figure 256.	Framed 18-2-b elevation.	278
Figure 257.	Framed 18-3-a floor plan.	279
Figure 258.	Framed 18-4 construction.	280
Figure 259.	Framed 19-1 place on building construction chart.	281
Figure 260.	Framed 19-2 elevation.	282
Figure 261	Framed 19-3-a floor plan	283

Figure 262.	Framed 19-3-b floor plan	284
Figure 263.	Framed 19-4 construction.	285
Figure 264.	Framed 20-1 place on building construction chart.	286
Figure 265.	Framed 20-2 elevation.	287
Figure 266.	Framed 20-3-a floor plan.	288
Figure 267.	Framed 20-4 construction.	289
Figure 268.	Framed 21-1 place on building construction chart.	290
Figure 269.	Framed 21-2 elevation.	291
Figure 270.	Framed 21-3-a floor plan.	292
Figure 271.	Framed 21-4 construction.	293
Figure 272.	UTZ of Al Fallujah, Iraq.	296
Figure 273.	Contemporary UTZs in a partial of the city of Al Fallujah, Iraq	297
Figure 274.	UTZ A1: attached commercial buildings.	299
Figure 275.	UTZ A2: attached apartments and hotels.	300
Figure 276.	UTZ A3: attached houses.	301
Figure 277.	UTZ A4: attached industrial/storage buildings.	302
Figure 278.	UTZ A5: attached commercial buildings along arterial streets	303
Figure 279.	UTZ Dc1: closely spaced high-rise office buildings.	304
Figure 280.	UTZ Dc2: closely spaced apartment buildings.	305
Figure 281.	UTZ Dc3: closely spaced houses.	306
Figure 282.	UTZ Dc4: closely spaced industrial/storage buildings	307
Figure 283.	UTZ Dc5: closely spaced commercial buildings	308
Figure 284.	UTZ Dc6: closely spaced administrative/cultural buildings.	309
Figure 285.	UTZ Do1: widely spaced commercial buildings, shopping centers	310
Figure 286.	UTZ Do2: widely spaced apartment buildings	311
Figure 287.	UTZ Do3: widely spaced houses	312
Figure 288.	UTZ Do4: widely spaced industrial/storage buildings	313
Figure 289.	UTZ Do5: widely spaced commercial buildings.	314
Figure 290.	UTZ Do6: widely spaced administrative/cultural buildings.	315

List of Tables

Table 1. Set of 14 structures selected for detail design.	1
Table 2. Current UTZ classification system.	4
Table 3. Common locales by UTZs for building types.	5
Table 4. Forty-four universal UTBTs by method of mass construction and by function	6
Table 5. Forty-four universal UTBTs by method of framed construction and by function	7
Table 6. Building properties table	8
Table 7. Comprehensive list of universal building materials in mass and framed construction.	.14
Table 8. Building types by function grouped under construction types.	.15
Table 9. Cities and countries where venting measurements were taken	.20
Table 10. Windows as a proportion of front walls (grouped by construction and function type).	.21
Table 11. Windows and doors as a proportion of front walls (grouped by construction and function type).	.21
Table 12. Mass construction buildings.	.23
Table 13. Framed construction buildings	.24
Table 14. Mean window size in square meters (grouped by construction and function type)	.26
Table 15. Roof shapes in selected world cities.	.30
Table 16. Room dimensions by function for worldwide buildings.	.45
Table 17. Mass urban terrain building types.	.47
Table 18. Framed urban terrain building types1	173

Authors' Biographies

Richard A. Ellefsen, Ph.D. is a professor emeritus from the San Jose State University. His field of study has been in geography. Dr. Richard Ellefsen is a recognized expert in the areas of urban morphology and city characterization. He has instituted a classification system for urban terrain that is used currently by the U.S. Government. Dr. Ellefsen's work spans a time period of more than 40 years and has numerous publications to his credit. His publications are considered "primary sources."

David Fordyce is a practicing Mechanical Engineer employed by the U.S. Army Research Laboratory Survivability/Lethality Analysis Directorate at APG. Mr. Fordyce has worked for the U.S. Army for 24 years of which 9 have been for ARL. Mr. Fordyce received his B.S.M.E. from the University of Maryland Baltimore County and his M.S.M.E. from the University of Maryland College Park, concentration in Solid Mechanics. Mr. Fordyce has been working on characterizing the urban environment and weapon effects in urban terrain for the past 12 years.

INTENTIONALLY LEFT BLANK.

1. Need

The structure target is a common element of concern to military planners, weaponeers, battle damage assessors, munition designers, firing platform designers, evaluators, modeling and simulation analysts, and developers of suitable range targets for use in live fire and training exercises. Using a precise and comprehensive set of standard geotypical building descriptions as a baseline eliminates a significant variable in estimating weapon effects. To date, a set of building descriptions has not been available to this community. The U.S. Army Research Laboratory, Survivability/Lethality Analysis Directorate, directed the development of this report. This report provides these descriptions on a worldwide basis using an established and accepted methodology.

The first edition of Urban Terrain Building Types was released informally in at a DoD working group meeting held in Vicksburg, MS. The document detailed 40 structure types and regional incidence of occurrence information. During the meeting, a subset of the 40 structure types was chosen by the working group in attendance for developing a more detailed description of the selected structures. The reduced set consists of 14 structure types—7 that have been selected from the mass construction category and 7 from the framed construction category (table 1).

Table 1. Set of 14 structures selected for detail design.

Mass Construction	Framed Construction
Adobe house (UTBT mass 3)	R/C-framed house with brick infill (UTBT framed 12)
Triple brick house (UTBT mass 5)	R/C-framed store/apartment building (UTBT framed 14)
Triple brick Middle Eastern house (UTBT mass 6)	R/C-framed light-clad hotel (UTBT framed 9)
CMU house (UTBT mass 14)	R/C-framed light-clad office (UTBT framed 10)
Box wall apartment (UTBT mass 22)	Central pylon light-clad office (UTBT framed 11)
Box wall hotel (UTBT mass 23)	R/C-framed industrial building with infills (UTBT framed 16)
Brick mosque (UTBT mass 23)	Light steel-framed industrial building with corrugated
	cladding (UTBT framed 20)

Note: CMU = concrete masonry unit. R/C = reinforced concrete. UTBT = urban terrain building type.

Based on review and input from various DoD organizations, the document was expanded (adding sections on venting, roof characteristics, and 4 additional structures to the original set of 40), made more user-friendly, and submitted to a formal publication process. The second edition of *Urban Terrain Building Types* is the result.

2. Goals

To date, wall and structure target descriptions available for testing and evaluation,¹ analysis, planning, and training² are few in type and may not fit within the urban terrain zone (UTZ) methodology. Some of these targets originated in the Cold War of the 1970s and 1980s and do not reflect the current theater of operations. Further, the targets are not standardized across the services, and specifications do not exist for the target construction. The specific goals of this document are as follows:

- Provide a set of representative geotypical target building types comprising a comprehensive data set of types and specifications that could be encountered in urban operations activities on a global basis, and reflect appropriate regional variation using an established and accepted methodology.
- 2. Organize the set of target descriptions into a standardized, manageable, readily transferable, and useful form for use by the urban operations community.
- 3. Provide a comprehensive data set of information on each building type. The data for each building type are:
 - a. Building exterior shape and dimensions.
 - b. Type of construction method and material characteristics.
 - c. Wall composition and thickness (interior and exterior).
 - d. Venting character and dimensions (doors and windows).
 - e. Interior configurations (room dimensions and room use).
 - f. Regional incidence of building-type occurrence (where in the world does the type occur).

3. Approach

Responding to the statement of need and goals discussed earlier, the approach taken was to develop a broad base of information on the physical and functional characteristics of urban terrain building types (UTBTs). Information is organized by primary construction type (mass and framed), specific method of construction and materials used, and details on building

¹International Test Operating Procedure 5-2-503, Human Engineering Laboratory Technical Memorandum 30-78, STANAG 4536.

²McKenna MOUT, Joint Readiness Training Center, and others.

interiors. The building representations and examples in this report are geotypical in nature, i.e., buildings of a common type in a geographical region or structures that are constructed using a common construction method. Usually, these structures are ubiquitous in the geographical area considered. Geospecific building representations describe a particular building in a particular location and are not the subject of this report. A total of 44 UTBTs are presented in the catalog section of the report. This catalog consists of 243 separate plates showing various characteristics and properties. The plates range from 5 to 12 for each building type (the number of plates reflecting levels of complexity).

Several factors were considered when selecting the 44 building types, such as ascertaining that all major worldwide structure types are represented and that the selection met the DoD working group's purpose to present to the broader urban operations community building types that match the interests of a wide variety of users engaged in testing, modeling and simulation, combat development, and weapons/munitions development.

4. Method

The building types presented in this report (see tables 4 and 5) come from canvassing the open literature covering international architecture and structural engineering. Examples of these building types were photographed on numerous field expeditions to 71 cities in 41 countries over an elapsed 50-year period. Many of these photographs serve as examples for users and as the source from which measurements were taken, e.g., venting dimensions. Window patterns also serve as an exterior clue to floor plans. The view of building materials provides valuable keys to construction, e.g., the specific bonding type of brick walls.

Almost all buildings used in the report were photographed by Richard Ellefsen during the course of numerous study trips abroad. Photographs of Koblenz, Germany, were taken by David Fordyce.

Other details, such as floor plans, were taken from occurrences in the literature. Sources used were published books and information from the Web. An especially valuable Internet source is the World Housing Encyclopedia Report (www.world-housing.net) maintained by the Earthquake Engineering Research Institute. Data on building height and spatial placement in an urban setting were derived from open-source aerial photographs and high-resolution satellite data, now available on the Internet for virtually all major urban areas in the world.

An integrated collation of the building types was performed according to the UTZ methodology found in section 13 of this report.

5. Introduction to Tables 2 Through 6

In this report, building types are linked to appearances in UTZ. The UTZ classification system is presented in section 13 of this report. Table 2 provides the urban morphology categories that comprise the UTZ classification system developed by the primary author. The cross-indexing between building types and the UTZ system is presented as table 3. Reference to table 2 and the UTZ plates found in the UTZ methodology section of this report will serve to enhance understanding of both the building types and the UTZs. All but one UTZ plate has an oblique air-photo example (on the right-side panel of each plate). Choosing examples from many cities in the world was a fairly simple task thanks to the universality of the classification system. This serves to confirm that both the cause and the response to urban/economic/social stimuli are universal, even when countries vary widely in their form of government. (For example, the People's Republic of China's approach in their large cities does not differ from capitalistic countries.)

Tables 4–6 form an integral trio. Tables 4 and 5 serve the purpose of providing an index (see page numbers in the right column referring to the plate location for each building type in the catalog). These two tables indicate the primary type of construction (mass or framed), the more specific methods of construction (e.g., unit masonry), and the discrete type of building material of which each building type is made (e.g., kiln-dried brick). That some groups have more entries than others expresses the incidence of building-type occurrence on a global basis. For instance, only two entries are listed for stone buildings, as such structures are uncommon (at least, all-stone structures as opposed to those with a stone veneer over other forms of construction). Kiln-dried brick construction and various forms of infill wall associated with framed buildings have nine and eight entries, reflecting their broad worldwide occurrence.

Table 2. Current UTZ classification system.

Atta	nched Buildings UTZs		Detached, Closely Spaced Buildings UTZs	Detached, Widely Spaced Buildings UTZs			
A1	Attached commercial buildings	Dc1	Detached, closely spaced high- rise office buildings	Do1	Shopping centers with parking lots		
A2	Attached hotels and apartment buildings	Dc2	Detached, closely spaced apartment buildings	Do2	Detached, widely spaced apartment buildings		
A3	Attached houses	Dc3	Detached, closely spaced houses	Do3	Detached, widely spaced houses		
A4	Attached industrial /storage buildings	Dc4	Detached, closely spaced industrial/storage buildings	Do4	Detached, widely spaced industrial/storage buildings		
A5	Attached commercial buildings along arterial streets	Dc5	Detached, closely spaced commercial buildings	Do5	Detached, widely spaced commercial buildings		
	_	Dc6	Detached, closely spaced administrative/cultural buildings	Do6	Detached, widely spaced administrative/cultural buildings		

Note: UTZ = urban terrain zone.

Table 3. Common locales by UTZs for building types.

Target Type	Hakan Tannain Building Tons	UTZs Where
(UTBT Designation) Mass 1-1	Urban Terrain Building Type Stone house	Type Is Common Old A1
Mass 2-1	Stone institutional	A1
Mass 3-1	Adobe house	Developing Nation A3
Mass 4-1		Developing Nation A3 Developing Nation A1
Mass 5-1	Mud brick single-floor store	A3, Dc3
	Triple brick house	
Mass 6-1 Mass 7-1	Triple brick Middle Eastern house Brick row house	A3, Dc3
Mass 8-1		A3
	Brick apartment building	A2, Dc2
Mass 9-1	Brick hotel	A1, A2
Mass 10-1	Brick office	A1
Mass 11-1	Brick store	A1, A5
Mass 12-1	Brick mosque	A1, A3, Dc3, Dc6, Do6
Mass 13-1	Brick industrial/storage	A4, Dc4
Mass 14-1	CMU house	Dc3, Do3
Mass 15-1	CMU store	A5, Dc5
Mass 16-1	CMU industrial/storage	Dc4, Do4
Mass 17-1	Brick-over-block house	A3, Dc3, Do3
Mass 18-1	German brick-over-block house	A3, Dc3, Do3
Mass 19-1	Unreinforced apartment with masonry cover	A2
Mass 20-1	Retail store	A1, Dc5, Do1, Do5
Mass 21-1	Tilt-up industrial/storage	Do4
Mass 22-1	Box-wall apartment building	Do2
Mass 23-1	Box-wall hotel	A1, A2, Do5
Framed 1-1	Half-timbered wood house	A1, A3
Framed 2-1	Half-timbered wood store	A1, A5
Framed 3-1	Wood-framed house	Dc3, Do3
Framed 4-1	Brick veneer house	Dc3, Do3
Framed 5-1	Wood-framed store	A5, Dc5
Framed 6-1	Heavy-clad hotel	A1, Dc1, Do1
Framed 7-1	Heavy-clad office	A1, Dc1, Do1
Framed 8-1	Light-clad apartment building	Do2
Framed 9-1	Light-clad hotel	A1, Dc1, Do1
Framed 10-1	Light-clad office	A1, Dc1, Do1
Framed 11-1	Central pylon office building	Dc1, Do1
Framed 12-1	Brick infill house	A3, Dc3
Framed 13-1	Terra cotta infill house	A3, Dc3
Framed 14-1	Store/apartment	A5, Dc5
Framed 15-1	Brick infill store/office	A5, Dc5
Framed 16-1	Industrial/storage with CMU infill	A4, Dc4, Do4
Framed 17-1	Industrial/storage with terra cotta infill	A4, Dc4, Do4
Framed 18-1	Industrial/storage with brick infill	A4, Dc4, Do4
Framed 19-1	School with brick infill	Do6
Framed 20-1	Light steel-framed industrial storage	Dc4, Do4
Framed 21-1	Light steel-framed double-industrial storage	Dc4, Do4
	44 Total Types	· /
	J F	

Note: UTBT = urban terrain building type. UTZ = urban terrain zone.

Table 4. Forty-four universal UTBTs by method of mass construction and by function.

Table of Structures and Index to Building Types								
Principal Construction Method	Sub Type	Building Material	Function	UTBT Title	UTBT I.D. No.	UTBT Page No.		
Mass	Buildings that	Stone	Residential	Stone house	Mass 1	50		
construction	use masonry		Institutional	Stone institutional	Mass 2	55		
	units	Sun-dried mud	Residential	Adobe house	Mass 3	61		
		brick (adobe)	Retail	Single floor store	Mass 4	68		
		Kiln-fired	Residential	Triple brick house	Mass 5	76		
		brick		Middle Eastern house	Mass 6	84		
				Row house	Mass 7	92		
				Brick apartment building	Mass 8	100		
			Hotel	Brick hotel	Mass 9	106		
			Office	Brick office	<u>Mass 10</u>	111		
			Store	Brick store	<u>Mass 11</u>	117		
			Institutional	Brick mosque	<u>Mass 12</u>	122		
			Industrial	Industrial/storage	<u>Mass 13</u>	127		
		CMU	Residential	CMU house	<u>Mass 14</u>	132		
			Retail	CMU store	<u>Mass 15</u>	138		
			Industrial	CMU industrial/storage	<u>Mass 16</u>	143		
		Brick over	Residential	Brick over block	<u>Mass 17</u>	148		
		block		German brick over block	<u>Mass 18</u>	153		
	Concrete	Poured in place	Residential	Unreinforced apartment with masonry cover	<u>Mass 19</u>	160		
			Retail	Retail store	<u>Mass 20</u>	166		
		Tilt-up	Industrial	Industrial/storage	<u>Mass 21</u>	171		
		Box-wall	Residential	Apartment building	<u>Mass 22</u>	177		
		principle (panel)	Hotel	Hotel	<u>Mass 23</u>	189		

Note: UTBT = urban terrain building type. CMU = concrete masonry unit.

The function column gives the use of each building type, in systematic order, beginning with residential (houses and apartment buildings) and followed by hotels, offices, retail stores, institutional buildings, and industrial/storage buildings. These general classes are in accord with the widely accepted land-use classes seen in such U.S. government documents as the *Standard Land Use Coding Manual*.

Table 6 expands upon the entries in tables 4 and 5. It is designed to provide users with a quick, comprehensive reference guide to a variety of physical UTBT properties covered in this report. For each building type, data are provided on wall dimensions and materials; floors; roof sizes and materials; venting; and room dimensions. All of these data items refer to and are derived from detailed data presented in the 243 plates (for 44 distinctive UTBTs) in the catalog.

Table 5. Forty-four universal UTBTs by method of framed construction and by function.

	Table of Structures and Index to Building Types								
Principal Construction Method	Sub Type	Building Material	Function	UTBT Title	UTBT I.D. No.	UTBT Page No.			
Framed	Wood post	Half-timbered	Residential	House	Framed 1	196			
construction	and lintel		Retail	Store	Framed 2	201			
		Light wood	Residential	Wood-framed house	Framed 3	207			
		frame		Brick veneer house	Framed 4	214			
			Retail	Store	Framed 5	219			
	Steel or R/C		Hotel	Hotel	Framed 6	224			
	frame	heavy clad	Office	Office	Framed 7	233			
		Steel- or R/C-	Residential	Apartment building	Framed 8	243			
		framed light	Hotel	Hotel	Framed 9	248			
		clad	Office	Office	Framed 10	257			
			Central pylon office	Office	Framed 11	263			
		R/C-framed	Residential	Brick infill house	Framed 12	270			
		with infill walls		Terra cotta infill house	Framed 13	282			
			Mixed residential /commercial	Store/apartment	Framed 14	290			
			Retail	Brick infill store/office	Framed 15	298			
			Industrial	Industrial/storage with CMU infill	Framed 16	303			
				Industrial/storage with terra cotta infill	Framed 17	309			
				Industrial/storage with brick infill	Framed 18	315			
			Institutional	School with brick infill walls	Framed 19	321			
		Very light steel	Industrial	Industrial/storage	Framed 20	327			
		framed		Double industrial/storage	Framed 21	332			

Note: UTBT = urban terrain building type. R/C = reinforced concrete. CMU = concrete masonry unit.

 ∞

Table 6. Building properties table.

Building Type Mass Construction	Building I.D.	Location	External Wall Thick. (cm)	External Wall Masonry Unit Size (cm)	Interior Wall Thick. (cm)	Interior Wall Masonry Unit Size (cm)	Interior Wall Material	Floor Material	Roof Shape	Roof Material	Roof Thick. (cm)	Mean Percent Window Front Wall	Mean Percent Doors Front Wall	Mean Window Size (m²)	Mean Room Size (m²)
Stone house	Mass 1	Europe	40	Varied	20	Varied	Stone	Wood	Pitched	Tile	2	7.8	4.1	1.2	16.0
Stone institutional building	Mass 2	Europe	40–100	Varied	Varied	Varied	Stone	Stone	Pitched	Tile	4	10.3	6.2	2.2	125.0
Adobe house	Mass 3	Southwest Asia	80	40 × 26	80	40 × 26	Adobe	Adobe	Flat/domed	Mud/wattle	10	7.8	5.9	1.2	19.8
Adobe store	Mass 4	Southwest Asia	48	30 × 15	48	30 × 15	Adobe	Adobe	Flat	Mud/wattle	10	6.9	6.2	1.9	40.0
Triple brick house	Mass 5	World	36	11.5 × 23	23	11.5 × 23	Brick	Wood	Pitched	Tile	2	13.3	6.9	1.2	12.7
Middle Eastern house	Mass 6	SWA	34.5	11 × 22	34.5	11 × 22	Brick	Concrete	Flat	Concrete	10	0.0	6.2	0.0	24.8
Row house	Mass 7	World	36	11.5 × 23	23	11.5×23	Brick	Wood	Pitched	Tile	2	12.1	6.9	2.4	17.7
Brick apartment building	Mass 8	World	48–96	11.5 × 23	23	11.5 × 23	Brick	Wood	Pitched	Tile	2	13.1	10.5	2.4	19.3
Brick hotel	Mass 9	World	48–96	11.5×23	23	11.5×23	Brick	Wood	Pitched	Tile	2	16.4	11.8	1.9	17.8
Brick office	Mass 10	World	48–96	11.5 × 23	23	11.5×23	Brick	Wood	Pitched	Tile	2	15.0	2.6	2.1	26.7
Brick store	Mass 11	World	36	11.5 × 23	23	11.5×23	Brick	Wood	Pitched	Tile	2	20.8	20.8	1.9	20.0
Brick mosque	Mass 12	Southwest Asia	60	11.5 × 23	None	NA	NA	Tile	Flat/domed	Brick	10	6.3	1.1	NA	125.0
Brick industrial/storage	Mass 13	World	36	11.5 × 23	23	11.5 × 23	Brick	Concrete	Pitched	Tile	2	18.1	2.6	3.8	360.0
CMU house	Mass 14	World	20	20 × 40	10	10×40	CMU	Concrete	Pitched	Tile	2	10.1	7.5	1.2	11.2
CMU store	Mass 15	World	20	20×40	20	20×40	CMU	Concrete	Pitched	Composite	1	48.7	25.5	1.9	16.0
CMU industrial/storage	Mass 16	World	20	20 × 40	10	10 × 40	CMU	Concrete	Pitched	Steel	0.2	18.1	2.6	1.5	78.5
Brick/block house	Mass 17	North America	32.5	Combination ^a	20	20×40	CMU	Concrete	Pitched	Tile	2	13.3	6.4	1.2	13.3
German brick/block house	Mass 18	Europe	35.5	Combination ^b	23	23 × 46	CMU	Concrete	Pitched	Tile	2	13.3	5.6	1.2	15.5
Concrete apartment	Mass 19	Southwest Asia	45	Combination ^c	15	NA	Concrete	Concrete	Flat	Concrete	10	13.1	10.5	2.4	13.5
Concrete store	Mass 20	World	20	Non unit	10	Stud	Steel/wood	Concrete	Flat	Concrete	10	16.3	7.5	1.9	504.0
Tilt-up industrial	Mass 21	North America	20	Non unit	10	Stud	Steel/wood	Concrete	Flat	Concrete	10	5.4	13	3.8	280.0
Box wall apartment	Mass 22	Europe	20	Non unit	16	NA	Concrete	Concrete	Flat	Concrete	10	24.2	2.4	3.0	16.3
Box wall hotel	Mass 23	North America	15	Non unit	15	NA	Concrete	Concrete	Flat	Concrete	10	39.4	1.1	4.0	28.0

 a Combination: CMU block (20 cm) and brick (11.5 cm). b Combination: CMU (German, 25 cm) and brick (11.5 cm). c Combination: poured concrete (30 cm) plus stone (15 cm). NA = not applicable.

9

Table 6. Building properties table (continued).

Building Type Mass Construction	Building I.D.	Location	External Wall Thick. (cm)	External Wall Masonry Unit Size (cm)	Interior Wall Thick. (cm)	Interior Wall Masonry Unit Size (cm)	Interior Wall Material	Floor Material	Roof Shape	Roof Material	Roof Thick. (cm)	Mean Percent Window Front Wall	Mean Percent Doors Front Wall	Mean Window Size (m²)	Mean Room Size (m²)
Half-timbered house	Framed 1	Europe	15	Non unit	15	Stud	Wood	Wood	Pitched	Tile	2	9.1	2.4	1.9	18.2
Half-timbered store	Framed 2	Europe	15	Non unit	15	Stud	Wood	Wood	Pitched	Tile	2	12.0	5.1	1.9	32.0
Wood-framed house	Framed 3	Regional	14–24	Non unit	12	Stud	Wood	Wood	Pitched	Tile	2	9.1	10.5	1.9	14.3
Brick veneer house	Framed 4	Regional	24	11.5×23	12	Stud	Wood	Wood	Pitched	Tile	2	9.1	10.5	1.9	14.3
Wood store	Framed 5	Regional	12	Non unit	12	Stud	Wood	Wood	Pitched	Tile	2	0.0	70	0.0	30.0
Steel-framed hotel	Framed 6	World	35.5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	18.3	2.8	2.4	21.6
Steel-framed office	Framed 7	World	35.5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	17.6	0.8	24.4	74.2
Light clad apt	Framed 8	World	2–5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	21.9	0.6	2.7	16.2
Light clad hotel	Framed 9	World	2–5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	23.9	1.3	2.4	28.0
Light clad office	Framed 10	World	2–5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	33.7	0.6	26.7	112.0
Central pylon office	Framed 11	World	2–5	Non unit	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	33.7	0.8	26.7	264.0
Brick infill house	Framed 12	World	23	11.5×23	11.5	11.5×23	Brick	Concrete	Flat	Concrete	10	13.9	2.9	1.9	11.6
Terra cotta infill house	Framed 13	World	25	25 × 40	11.5	11.5 × 23	Brick	Concrete	Flat	Concrete	10	10.1	2.9	1.9	11.6
CMU infill store/apartment	Framed 14	World	20	20 × 40	10	10 × 20	CMU	Concrete	Flat	Concrete	10	13.4	3	2.7	40.0
Brick infill store	Framed 15	World	23	11.5×23	12	Stud	Steel/wood	Wood	Flat	Concrete	10	20.8	1.8	3.6	27.0
CMU infill industrial/storage	Framed 16	World	20	20×40	20	20 × 40	CMU	Concrete	Pitched	Steel	0.2	2.5	9.1	2.0	592.0
Terra cotta infill industrial/storage	Framed 17	World	25	25 × 40	12	Stud	Steel	Concrete	Pitched	Steel	0.2	2.5	9.1	2.0	592.0
Brick infill industrial/storage	Framed 18	World	23	11.5 × 23	12	Stud	Steel/wood	Wood	Flat	Concrete	10	2.5	9.1	2.0	592.0
Brick infill school	Framed 19	World	23	11.5×23	12	Stud	Steel/wood	Concrete	Flat	Concrete	10	20.9	0.7	11.5	68.6
Light-framed industrial/storage	Framed 20	World	0.2	Non unit	None	Stud	Steel/wood	Concrete	Pitched	Steel	0.2	4.4	7.4	8.0	105.0
Double light-framed industrial/storage	Framed 21	World	0.2	Non unit	None	Stud	Steel/wood	Concrete	Pitched	Steel	0.2	4.4	5.7	2.5	950.0

Note: 12 cm includes air space between studs. Non unit: wall not composed of masonry units. Regional: Northwest Europe, North America, Japan, tropics.

6. An Overview of the UTBT Catalog by Method of Construction and by Function

The UTBT catalog is organized based on a melding of both morphology (the physical characteristics of buildings) and function (a building's use). Knowledge of both are essential to urban operations in order to know the arrangement, shape, and dimensions of a building's interior as well as its setting in the urban environment.

Morphology is more important than function considering that the battlefield's physical aspects at the beginning of urban operations during a conflict far outweigh the building's functions prior to the start of the conflict. Here, emphasis on morphology is intended to counter the literature's often overly generalized focus on function alone, e.g., industry, retail, or residential.

While the broader term "urban morphology" comprises all physical aspects of a city (ranging from street dimensions, pattern, and trafficability to other non-built-upon surface space, buildings, and monuments), this document focuses on the morphology of buildings.

The primary forms of building construction are mass and framed. A major distinction is made between mass construction—where walls have to be stout as they need to bear both live and dead loads of walls, floors, and roof—and framed construction where it is the frame that bears all loads, allowing walls to be thin and lightweight. Figure 1 is used here to provide a basic organization of building construction types.

For mass construction, the primary components are unit masonry and concrete. The former refers to walls built with units, i.e., stone, adobe, brick, and CMUs. Concrete walls are made by pouring the material into forms where it hardens into walls and other shapes. A CMU wall, when grout fills cavities in the blocks, is, in effect, a concrete wall.

Framed construction differences are based on the type of frame being employed, e.g., wood, steel, or reinforced concrete. The catalog outlines both frame materials and configuration, and cladding- and infill-material characteristics.

There are some exceptions to the generalized construction types listed in figure 1 whose emphasis is on wall vulnerability. Construction of some buildings employs features of both mass and framed construction. Commonly seen forms of construction are (1) use of a mass construction foundation on which sits a framed structure (figure 2); (2) a mass-construction (reinforced concrete) end wall of a high-rise steel-framed building (figure 3); (3) a shear wall in the basement of a framed structure (figure 4); and (4) a wood-framed building resting on a reinforced concrete base (figure 5). Another example is the central pylon type of construction for some high-rise framed buildings (see section 12, framed 11-1) which uses a mass construction reinforced-concrete central unit (a pylon) onto which frame members are attached.

An everyday U.S. example is that of a wood-framed house or other small building supported by a concrete perimeter foundation.

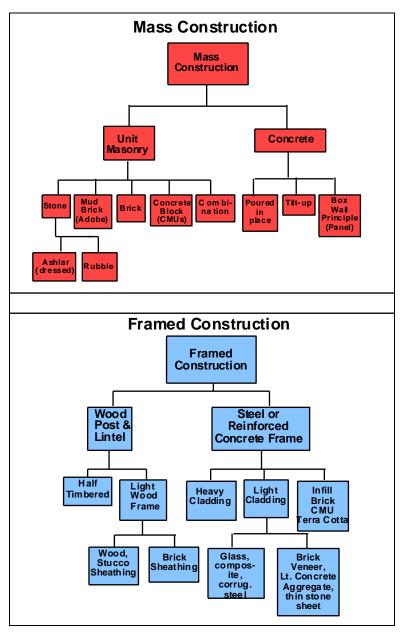


Figure 1. Mass construction (red) is intended to imply buildings that have walls that bear significant weight (both dead and live loads), i.e., "load-bearing walls." Framed construction (blue) indicates structures in which a frame carries the required loads.



Figure 2. A half-timbered frame house resting on a stone ground floor.



Figure 3. The reinforced concrete end wall of a steel-framed high-rise office building.



Figure 4. Reinforced concrete shear walls in the basement parking area of a framed building while under construction.



Figure 5. Wood-framed structure being built upon a reinforced concrete base. This is the same structure as in figure 4, at a more advanced state.

The following comprehensive list (table 7) groups universal building materials employed in each type of construction. Almost all are represented in the catalog (with the exception of infrequently occurring types, e.g., a log load-bearing wall [log cabin]).

Table 7. Comprehensive list of universal building materials in mass and framed construction.

Mass	Construction
Formed, Shaped Material	Unit Masonry
Concrete	Stone
Poured in situ or off-site	Rubble (natural, irregular shape)
Without reinforcement	Ashlar (shaped or dressed)
With reinforcement	Brick
With steel rebars	Mud brick (adobe)
With webbing	Kiln-dried brick
	Triple brick
	Quadruple and more brick
	CMUs
	Structural terra cotta
	Brick and block (see U.S. Army Human
	Engineering Laboratory Technical
	Memorandum 30-78)
	Poured-in-place concrete with pilasters
	Stone over concrete
	Stucco over brick
	CMU with brick veneer (brick over block)
	Log load-bearing wall
Framed	l Construction
Wood Framed	Steel of R/C Framed
Post and beam	Light-steel frame
With infill walls	Corrugated sheathing
Wattle	Steel
Balloon and platform	Asbestos
Siding	
Boards	Cladding
Brick	Heavy clad
Stucco	Brick
	Stone
	Concrete
	Terra cotta
	Light clad
	Glass
	Foam concrete
	Aluminum
	Sheet stone
	Fiberglass
	Unspecified
	R/C with infill walls
	CMU
	Brick
	Terra cotta
	R/C mass central pylon
	With steel columns and beams

Note: CMU = concrete masonry unit. R/C = reinforced concrete.

Organizing the catalog's 44 building types by function (but grouped under construction types) yields the following list (table 8):

Table 8. Building types by function grouped under construction types.

D. 21
Residential (Mass Construction)
Stone house
Triple brick house
Middle Eastern house
Row house
Brick apartment
CMU house
Brick over block
Unreinforced apartment with stone facing
Residential (Framed Construction)
Half-timbered house
Light wood-framed house with wood siding
Light wood-framed house with brick veneer
R/C-framed light-clad apartment building
R/C-framed with brick infill house
Hotels (Mass Construction)
Brick hotel
Box-wall principle apartment building
Hotels (Framed Construction)
Steel-framed heavy-clad hotel
R/C-framed light-clad hotel
Offices (Mass Construction)
Brick office
Offices (Framed Construction)
Steel-framed heavy-clad office building
R/C-framed light-clad office building
Central pylon office building
Retail (Mass Construction)
Mud brick store
Brick store
CMU store
Poured-in-place concrete store
Retail (Framed Construction)
Half-timbered store
Light wood-framed store
R/C-framed brick infill store
Industrial (Mass Construction)
Brick industrial/storage building
ž ž
CMU industrial/storage building
Tilt-up industrial/storage building
Industrial (Framed Construction)
CMU infill wall industrial/storage building
Terra cotta infill wall industrial/storage building
Very light steel-framed industrial/storage building
Very light steel-framed double industrial/storage building
Institutional (Mass Construction)
Stone church
Brick mosque
Institutional (Framed Construction)
R/C-framed with brick infill wall school

Note: CMU = concrete masonry unit. R/C = reinforced concrete.

7. Catalog Organization

The catalog body consists of a series of four groups of plates for each of the 44 UTBTs. Plate 1 consists of just a single entry (see figure 6). Plate groups 2, 3, and 4 contain from 5 to 12 detailed plates. The number varies with the building type's complexity.

- Plate 1: Place of the building type among major world types.
- Plate group 2: Elevation. Common building elevations for the type, including venting and roof types.
- Plate group 3: Floor Plan. Detailed floor plans for each of the 44 types, including hypothetical projectile paths and the interior walls encountered.
- Plate group 4: Construction Features. Type and dimensions of materials and method of construction.

8. Plate 1: Place on the Building Construction Chart

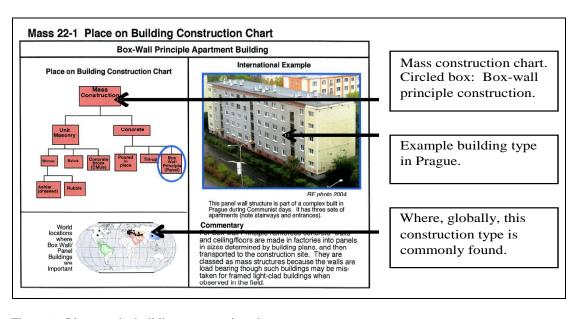


Figure 6. Place on the building construction chart.

This example of a plate 1 (figure 6) begins the series of plates for each UTBT and can be seen in full size as catalog plate 22. Each plate 1 (of 44) consists of the type of construction (circled on the chart), an international photo example, global occurrences of the construction type, and an explanatory commentary.

9. Plate Group 2: Elevation

Profile drawings (elevations) have long been used by architects to demonstrate a planned project for clients. These show window and door placement and, at scale, record venting and other dimensions. All elevations are tied to floor plans. In the catalog, as many elevations as necessary are given for each building type. If front and rear are identical, only one elevation appears. If front, rear, and sides vary, all elevations are shown. Detailed examination and analysis of venting (as depicted in the elevation plates) and roofs (also appearing in the elevation plates) leads to findings as given in the following pages.

9.1 Venting: Windows and Doors

The term venting comprises windows and doors. Venting, in addition to allowing the passage of air through a building, provides lighting, ingress/egress (persons and, in some cases, vehicles), fire safety, and, where appropriate, display of goods or information. Measurements of both windows and doors by building type are included here, shown both separately and in aggregation. See the appendix for 132 measured venting types.

In response to concerns from the urban operations community, the following building characteristics are included in the catalog:

- 1. Representatives of all UTBTs are measured.
- 2. Major function types are covered (e.g., residential, commercial, and industrial).
- 3. Representative buildings from throughout the world are offered.
- 4. Distinction is made between building elevations, front, back, and side, considering that the number and distribution of windows on commercial buildings in cities are far greater on the front than the rear. Often, when buildings are attached (a UTZ grouping), abutted buildings have no side wall venting at all.
- 5. Building setting (location with UTZs) is important when considering buildings as artillery targets susceptible to air attacks.
- 6. Differences between the ground floor and upper floors are also considered. Except for some unusual circumstance, doors can be only at ground-floor level. Accordingly, the proportion of door openings to total exterior wall area in tall buildings is quite small.

9.1.1 Building Construction Type Differences (Mass vs. Framed)

Inherent and essential differences in venting result from the restricting limitations present in mass buildings but not occurring in framed construction. Mass buildings, drawing their support and integrity from the strength and thickness of their load-bearing outer walls—thus having the ability to support the dead load of wall, floor, and roof, plus the live loads of humans and materials—cannot afford to have wall integrity diminished by windows without certain principles being followed. First, windows and doors must be aligned vertically, leaving the undisturbed wall space between to support loads. Second, integrity reduction caused by the window opening must be replaced with some support, such as a lintel above the window (its load being distributed on both sides of the window), or with an arch above the window (both are, in effect, bridges across openings in the wall). Third, the corners of mass buildings cannot have windows, for it is at the corners with their right-angle joining that the mass buildings are the strongest and are able to carry much of the total load. The result is that mass buildings will have a smaller proportion of their walls devoted to windows than will framed buildings.

Framed buildings, where all loads are supported directly by columns or directed to the columns by beams, can have as much wall space devoted to windows as the building designer chooses. In some instances, virtually all exterior walls could be of glass, though requirements of a building's function normally dictate otherwise. Considering that frame members of these buildings bear all loads, while walls (cladding or infill) bear no loads, windows can be placed anywhere on the building's exterior walls, even at the corners. They do not need to be aligned vertically and may be of any size, shape, or variety, as is often called for by the architect to achieve aesthetic effects.

Recognizing these characteristics, this report groups all venting data first by major building construction type (mass vs. framed) and then by generalized function.

9.1.2 Generalizations on Windows and Doors Relative to Building Function

Used in the study are the building functions of houses, apartments, hotels, offices, industrial/storage, and, in the case of mass construction buildings, a class called large masonry structures (churches, mosques, and some institutional buildings).

Window size, shape, and pattern respond to a building's function. Thus:

- Retail stores have large windows to display merchandise.
- Storage buildings have few or no windows.
- Office buildings are designed to provide natural light to workers.
- Industrial buildings have various lighting requirements. Some prefer abundant natural light for factory workers while other industrial functions require little or no natural light.
- Apartments require that each room have some natural light (sometimes by employing a light well) for air circulation, light for activities, and safety.

• Houses have the same requirement. In recent years in advanced countries, window openings are restricted by building code for energy conservation purposes.

The opportunities and constraints imposed by building construction type to match these basic needs are discussed in detail in following sections.

9.1.3 Venting Measurements

Key venting items are window and door dimensions; the proportion of wall space occupied by venting; and forms and patterns of venting seen in various morphological and functional building types. Data were obtained by making measurements from a broad range of buildings (located in urban areas throughout much of the world) in 71 cities located in 41 separate countries. Specifics are in noted in table 9.

Also considered in the selection of measured buildings was the age of structures. Some are several centuries old, some are of recent vintage, and several are under construction (where construction method is revealed).

Buildings of the same function, e.g., hotels, in both mass and frame construction are represented. This shows that the same function may have similar window patterns in either mass or framed construction. In another observation, the lack of constraint on window placement and size in framed buildings results in very large window areas, e.g., modern high-rise glass-curtain wall buildings, structures that are the mode in redeveloped city core areas, and buildings in clusters at major airports and in other outlying commercial developments.

9.1.4 Data Organization

Venting measurements were made using photographs of buildings in cities throughout much of the world. In addition to the 44 buildings shown in the catalog plates, another 49 are incorporated and are referred to collectively as the world set. Data from the 44 plates record venting on all sides of a building. Only front wall venting is measured for the additional 49 plates. Data, organized by building construction type and function, appear in table 10. Combined figures for doors and windows appear in table 11. Separate tables provide data on components of tables 10 and 11, and are listed as:

- Table 11: Percent windows of mass and framed construction buildings in the world set.
- Table 12: Percent windows for specific building types of mass construction buildings in the world set.
- Table 13: Percent windows for specific building types of framed construction in the world set.
- Table 14: Mean window dimensions by groups for mass and framed construction types.

The complete set of window measurements (83 mass construction and 59 framed construction buildings) appears in the appendix.

Table 9. Cities and countries where venting measurements were taken.

Region	Country	Cities			
	Andorra	Andorra			
	Austria	Linz, Vienna			
	Czech Republic	Prague			
	Finland	Helsinki			
	France	Chartes, Limoges, Paris, Reims			
	Germany	Berlin, Braunschweig, Bremen, Falkenberg, Hammelburg, Koblenz, Salzgitter			
	Gibraltar	Gibraltar			
Биново	Greece	Athens			
Europe	Hungary	Budapest			
	Italy	Rome, Castellina			
	Netherlands	Rotterdam			
	Norway	Stavanger			
	Portugal	Lisbon			
	Spain	Seville			
	Sweden	Helsingborg, Norrokoping, Uppsala			
	United Kingdom	Bath, Canterbury, Edinburgh, London, Wilton			
Subtotal	16	33			
	China	Guilin, Shanghai			
	Hong Kong	Hong Kong			
	India	Chenai (Madras), Delhi/New Delhi, Mumbai (Bombay)			
	Iran	Tehran, Elburz Mountains			
	Israel	Haifa, Jerusalem, Tel Aviv			
	Japan	Tokyo			
Asia	Macao	Macao			
	Malaysia	Kuala Lulmpur			
	Philippines	Manila			
	Singapore	Singapore			
	Sri Lanka	Colombo			
	Thailand	Bangkok			
	Vietnam	Ho Chi Minh City			
Subtotal	13	19			
	Costa Rica	Heredia, Puntarenas, San Jose			
	Mexico	Juarez			
Latin America	Panama	Panama City			
	Peru	Lima, Andes Mountain village			
	Virgin Islands	St. Croix			
Subtotal	5	8			
Africa	Egypt	Cairo, Luxor			
	Tunisia	Tunis			
Subtotal	2	3			
	Australia	Sydney			
Australia, NZ	New Zealand	Auckland, Wellington			
	Yap	village			
Subtotal	3	4			
North America	Canada	Edmonton			
	United States	Baltimore, Philadelphia			
Subtotal	2	3			
Total	41	70			

Table 10. Windows as a proportion of front walls (grouped by construction and function type).

Windows as a Proportion of Front Walls UTBT and World Set Aggregated by Groups (Construction and Function Type)							
	Mas	ss Construct	ion	Framed Construction			
Group	No. of Examples	Percent Range	Mean Percent	No. of Examples	Percent Range	Mean Percent	
Houses	39	3.9-22.3	11.1	7	7.8–13.1	10.7	
Apartments	17	10.4-34.3	17.6	13	9.9-39.4	21.0	
Hotels	6	12.4-37.3	16.9	20	12.1-38.0	22.6	
Offices	10	9.9–20.5	15.0	19	11.3-58.8	34.3	
Industrial/storage	7	5.6-27.4	18.1	9	1.3-7.2	3.9	
Large masonry buildings	13	5.1-24.4	8.5		_		
All buildings	92	3.9–37.3	13.4	68	1.3-58.8	21.3	

Note: UTBT = urban terrain building type.

Table 11. Windows and doors as a proportion of front walls (grouped by construction and function type).

Windows and Doors as a Proportion of Front Walls UTBT and World Set Aggregated by Groups (Construction and Function Type)							
	Ma	ss Construc	tion	Framed Construction			
Group	Percent Percent Windows Windows Doors and Doors		Percent Windows	Percent Doors	Percent Windows and Doors		
Houses	11.1	4.7	15.5	10.7	4.5	15.5	
Apartments	17.6	5.4	19.9	21.0	4.0	20.6	
Hotels	16.9	3.5	23.2	22.6	2.2	23.3	
Offices	15.0	3.0	18.6	34.3	2.1	34.3	
Industrial/storage	18.1	5.7	14.3	3.9	19.8	16.8	
Large masonry buildings	8.5	3.3	10.8	_	_	_	
Mean percent	13.4	4.4	16.7	21.3	4.2	25.3	

Note: UTBT = urban terrain building type.

9.1.5 Data Analysis

The data in table 10 are grouped by construction type and function.

The functional types listed (houses, apartments, hotels, offices, industrial/storage, and large stone buildings [mass only]) are universal. The data show relationships between function and construction type.

All percentages are mean, not median, and are broadly representative. Data are not just a mean of the percentages. For example, the figure 11.1% for mass construction houses is the mean for all 39 house examples.

The mean percentages that windows form of houses' front walls are almost identical in both mass and framed construction houses (11.1% mass vs. 10.7% framed). Common house architecture and style are more important than the construction method. The universal practice of providing windows to each room is evident. In addition, window size is a near constant for rooms of

various functions (covered in table 14). Bedroom windows are small for privacy and to limit light. By design, kitchen windows are also fairly small. Bathroom windows are even smaller. The largest windows are in the daytime living areas, the living room, the great room, etc. The opportunity to have large windows with framed buildings and their non-load-bearing walls is not taken.

The same principles apply to some degree for apartments, but the percentage differences (17.6% mass vs. 21.0% framed) are accounted for by the fact that framed apartment buildings are often modern-design high-rise structures with large windows enhancing the total appearance of the building. And, especially in upper floors, there is less concern for privacy than in a low-rise building where "view" apartments are desired (and always command the highest rent). The window figure for mass apartments (17.6%) is higher than that for houses (11.1%) thanks mainly to the practice of having glass occupy nearly all of the outer wall of a "box" in box-wall construction.

The figures for hotels (16.9% mass vs. 22.6% framed) show a similar pattern. Not only are large windows seen as desirable, but individual hotel rooms in modern framed construction hotels are larger than those found in older mass buildings. (Small room size has posed a special problem in bringing old hotels up to modern standards.)

Differences between the two forms of construction show markedly when comparing window percentages for offices (15.0% mass vs. 34.3% framed). Part of this difference is that abundant light was always desired in old masonry buildings, but the structure limitations would not allow it. Another reason is the sea change that has occurred in the design and use of offices. Prior to about 1950, office buildings were designed for a market of individual professionals renting single offices. In modern times, with large corporations as major players, offices are designed to have large, open bays with space divided (if at all) with low partitions, i.e., "cubicles."

The reverse is seen with industrial/storage buildings (18.1% mass vs. 3.9% framed). The older buildings (mass) supported functions, such as a textile factory, that needed as much natural light as possible, especially in the early days of electricity. (Largely abandoned factory buildings in New England are good examples.) Modern framed structures, especially large-volume buildings, rely on artificial light, and, in many instances, require a controlled environment.

The entry for large masonry buildings can, by definition, mean only mass construction buildings. Here, the small figure of 8.5% reflects in part the unwillingness to devote much space to integrity-robbing windows and in part to window technology before large plates of glass were viable. The use of small pieces of stained glass in churches is a good example.

The aggregate totals of 13.4% for mass structures vs. 21.3% for framed is telling.

The data in table 11 are grouped by construction and function type. The proportion of wall space devoted to doors is essentially very small, ranging from 2.1% to 5.7% for all structures, excluding framed industrial/storage that has large openings to allow truck entrance. Architects

keep door size to a minimum for security reasons. Doors must be lockable and generally entry-proof. Guards are posted in critical instances.

One reason for differences between morphological/functional building types is simply building height. Low buildings have a higher proportion of doors to walls than do tall buildings. A good example are the figures for houses vs. a tall (framed) office building. The proportion of doors in houses is 4.7% for mass and 4.5% for framed construction, while the framed office class has a door proportion of only 2.1%. Mass construction hotels have 3.5%, but framed hotels, owing to their greater number of floors, typically have only 2.2%. Aggregate figures for all functions are only 4.4% for mass and 4.2% for framed buildings.

The figures for doors and windows combined contributes little to the figures for the proportions of windows (as seen in table 10) due to the relatively low figures for doors.

9.1.6 Discrete Construction Type Buildings by Function

Window-to-wall proportions for specific construction/function forms (table 12 for mass construction and table 13 for framed construction) vary somewhat from the aggregations reported in the previous two tables.

Table 12. Mass construction buildings.

Windows as a Proportion of Front Walls World Set by Specific Mass Construction Building Types							
	Mass Construction						
Specific Buildings	No. of Examples	Percent Range	Mean Percent				
Houses							
Stone houses	6	4.6-12.5	7.8				
Adobe house	1		6.5				
Brick houses	12	5.3-22.3	13.9				
Brick row houses	6	5.4–16.5	12.1				
CMU house	6	3.9–15.3	10.1				
Apartments							
Brick apartments	9	10.4–16.9	13.1				
Box-wall apartments	6	13.7-34.3	24.2				
Hotels							
Brick hotels	5	12.4–22.1	16.9				
Offices							
Brick offices	9	9.9–20.5	15.0				
Industrial/Storage Buildings							
Brick	5	6.4–27.4	18.1				
Large masonry buildings	12	1.6–19.1	8.5				
Total Nun	nber of Buildings: 7	17					

Note: CMU = concrete masonry unit.

Table 13. Framed construction buildings.

Windows as a Proportion of Front Walls World Set by Specific Framed Construction Building Types							
	Framed Construction						
Specific Buildings	No. of Examples	Percent Range	Mean Percent				
Houses							
Wood framed	4	7.8-11.2	9.1				
Apartments							
Light-clad curtain wall	6	13.3-39.4	27.2				
Light-clad infill wall	6	9.3-21.3	15.7				
Hotels							
Heavy clad	9	12.1–30.9	18.3				
Light-clad curtain wall	6	10.7-44.2	21.8				
Light-clad infill wall	3	15.9–35.3	28.1				
Offices							
Light-clad curtain wall	9	16.3–58.8	41.1				
Light-clad infill wall	6	11.3–34.9	22.6				
Industrial/Storage Buildings							
Light clad	6	2.1-7.2	4.4				
Total Number of Buildings: 55							

For mass-constructed houses (table 12), stone houses (7.8%) and adobe houses (6.5%) have very low window-to-wall percentages. While the form of construction would allow for more and larger windows, other restrictions emerge. Many of these structures are found in poor areas where providing windows represents an unacceptable construction expense. Security is also a factor (a good example are the small windows seen in American frontier log cabins). Another factor is a requirement for as much insulation as possible in desert climates. Finally, in the case of adobe dwellings in Muslim countries, privacy needs are paramount; lighting and ventilation in these cases normally come from a central courtyard and not from windows facing the outer world.

Brick houses, on the other hand, with their higher average window-to-wall percentages (13.9%), are located in the modern Western world and in higher latitudes where lighting needs dominate. Average figures for window percentages here are in the neighborhood of twice those of stone and adobe houses. Figures for row houses (12.1%) and CMU houses (10.1%) show nearly the same differences.

The apartment class has two very different forms of construction, even though they both fall under the rubric of mass. The brick apartments (13.1% window) use unit masonry construction while the box-wall buildings (24.2% window) are made of poured concrete slabs. Brick walls have the usual restriction that wall integrity cannot be compromised while box-wall cells have one open end devoted almost entirely to a window.

The figures for brick hotels, brick offices, brick industrial/storage buildings, and large masonry buildings are repeated from table 11.

The opportunities afforded through the use of frame construction to provide windows larger than those associated with mass construction are clear with only houses having small proportions (just 9.1% for wood-framed houses and industrial/storage buildings with 4.4%, contrasted with double-digit figures for the other building types). Again, style and human scale dominate.

Table 13 makes a distinction between windows that are a part of cladding of a framed structure as opposed to situations where a window forms part of an infill wall. Cladding is applied on the outside of a building's frame while infill walls or windows fill the space between columns and beams.

For apartment buildings, curtain walls have a higher proportion of windows than do those with infill walls (27.2% vs. 15.7% for infill walls). For the hotels measured, however, the infill walls have a somewhat higher proportion of windows (28.1% to 21.8%). These numbers are appreciably higher than the window proportion of heavy-clad hotels (18.3%). For offices, as would also be expected, curtain walls have a higher percentage of glass (41.6%) than do infill walls (22.6%).

9.1.7 Window Dimensions

Several factors affect window size. Building morphology, i.e., mass vs. framed, provides one set of parameters, and building function forms the other.

As noted earlier, buildings of mass construction have the limitation that reduced wall integrity restricts the number and size of windows—framed structures have no such limitation. A curtain wall of a framed building can be all glass, although in practice, opaque glass usually masks floor ends and structural members.

Table 14 reveals significant differences in window size for some building construction types and functions, and very little for others. Little difference is seen for houses whether they are mass or framed (1.2 m² for the former, 1.9 m² for the latter). Looking at the range of sizes, the size of windows in a house is in direct response to the need and desirability for lighting and ventilation for the various room functions. Daytime occupancy rooms favor larger windows than do sleeping rooms, kitchens, or bathrooms.

The same reasoning applies to apartments, although box-wall apartments will often have large windows at the exposed end of the box, contributing to the aggregate figure for mass apartments (2.4 m²), while framed apartments are similar at 2.7 m².

With hotels, the range is also fairly close (1.9 m² for mass to 2.4 m² for framed). That the differences are as close as they are reflects the small windows of masonry-styled, heavy-clad framed buildings, even though windows physically could have been designed larger. Also, windows in some modern framed buildings are kept intentionally small where a factor, such as heat preservation in cool climate areas, is a consideration.

Table 14. Mean window size in square meters (grouped by construction and function type).

Mean Window Size in Square Meters by Groups (Construction and Function Type)						
	Mass Construction			Framed Construction		
Group	No. of Examples	Range (m)	Mean (m²)	No. of Examples	Range (m)	Mean (m²)
Houses	21	0.5×0.5 to 1×2	1.2	9	1×1 to 2×2	1.9
Apartments	8	0.75×1.5 to 1.5×3	2.4	17	1×1 to 1.5×3	2.7
Hotels	5	1×1.5 to 1.5×2	1.9	24	1×1 to 1.5×3.5	2.4
Offices	10	1 x 1.5 to 1.5×2	2.1	16	1×2 to 1.5×40	26.7
Industrial/storage	5	1×2.5 to 2×2.5	3.8	7	1×1 to 1.5×5	2.5
Large masonry buildings	11	0.7×1 to 2×2	2.2	_	_	_
All buildings	60	0.5×0.5 to 2×2.5	1.9	73	0.5×1 to 1.5×40	7.8

The greatest difference in window size is seen with mass construction vs. framed construction offices. Windows of the former average but 2.1 m², while the aggregate for framed buildings is 26.7 m². Many of the glistening high-rise office buildings in major cities throughout the world will have very high proportions of glass, around 50% and more (see photo examples in the appendix).

Window sizes for industrial/storage buildings reverse the previous situation in that the mass construction buildings have larger windows than do modern framed structures because building users were seeking natural illumination for the manufacturing processes conducted within. In addition, buildings were smaller and especially narrower, thus allowing greater natural light to penetrate interiors. Windows on walls of modern industrial/storage buildings would be of little use.

Windows in large masonry structures are traditionally very small (at 2.2%). Some of this is a function of style, e.g., the long, narrow windows of Gothic-style European cathedrals.

9.1.8 Window Thickness

The thickness of window glass, thus the strength, is a function of overall window dimensions. Small-area windows are thin, and big windows must be thicker and stronger. House windows are about 2 mm thick, apartment windows range from 2 to 4 mm, and hotel windows range from 3 to 6 mm. The office windows of high-rise structures range from 6 to 9 mm, where resistance to high winds is a factor. Several forms of protection have been devised.

9.1.9 Window Patterns

The arrangement of a building's windows produces certain replicating patterns. These result in part from the form of construction (mass or framed) and in part from the functions the building serves. For some functions, an architect has several choices. For instance, a modern-framed high-rise office building might have windows placed in long horizontal rows (the spandrel pattern, figure 7), or windows may simply be infills among columns and beams (figure 8). Alternatively, the windows may be bounded by vertical mullions (figure 9) or placed on the outside of the frame members as curtain walls (figure 10).



Figure 7. A framed, light-clad office building with a spandrel window pattern. Glass, both clear and opaque, lies between vertical mullions.

In other functions, such as a framed, heavy-clad, or brick masonry hotel, the structure must provide a window for each guest room, resulting in an easily recognizable pattern. In the case of brick masonry construction, the windows must be aligned vertically so as to maximize wall integrity. Framed, heavy-clad buildings followed masonry style. Relating windows to room function is seen with houses. Observed from outside, window size and placement provide ready clues to the floor plan of a house.

While great variety within window pattern types is found, the following figures will serve to define the general types of patterns.



Figure 8. Windows set in between column and beam members in a framed office building form an infill pattern.



Figure 9. An example of a curtain wall being placed on a R/C-framed office building. Glass, clear and opaque, is being placed between narrow spandrels and mullions.



Figure 10. Clear and opaque glass form a curtain wall being installed on a framed office building.

9.2 Roofs

A building's roof—a component of its elevation, its configuration, and its composition—is of key interest to the urban operations community. This report provides geographic distribution of various roofing materials in theaters throughout the world, the morphological and functional types and characteristics of buildings involved, the physical characteristics of the roofing materials themselves, and the shapes of the target roofs. An unanticipated benefit from a focus on roofs is the development of principles involving the nature of building construction, the relationships to climate, the tie to a region's customs, and the presence of various roof types to the level and history of economic development, especially in developing nations.

9.2.1 Method

Examples of the physical shapes of roofs come from a spectrum of cities in various world regions, i.e., Europe, the Middle East, Northeast Asia, Latin America, and Tropical Africa. Cities selected for observation within these regions are listed in table 15.

Visual images came from various sources. For Bremen, a book of aerial oblique photos was most useful, especially when combined with ground truth photographs. For Uppsala, local knowledge plus aerial photo coverage in both oblique and vertical form (supplied by the Swedish government) were used. Cairo was covered by oblique air photographs and supplemented with a Digital Globe satellite image. Ground truth photographs in Tel Aviv were supported with a book of oblique air photos. An enhanced satellite image of Al Fallujah provided the required information. An Ikonos satellite image of Kuwait City gave ample information. An Ikonos

image of Shanghai was also used, supplemented with ground truth photos and oblique photographs posted on the Web. For both Seoul and Pyongyang, a combination of satellite views and oblique and ground photos from the Web were employed. For Panama City, an Ikonos image supported ground truth photos. For San Jose, Costa Rica, a combination of vertical air photographs, low-altitude oblique air photographs taken by Ellefsen, and ground truth photos were used. Finally, for Lagos, an Ikonos image was supported by a Digital Globe image and ground photos from the Web.

A standard procedure was followed in interpreting the information from the images used.

9.2.2 Analysis of Roof Shape

Conclusions can be drawn from examining the data in table 15, which is divided into (1) similarities and differences by class of function, i.e., houses, apartment buildings, offices, commercial buildings, industrial/storage buildings, and institutional buildings, and (2) relationships to regional characteristics, especially the climatic factors of wetness and aridity.

Table 15 focuses on a basic distinction in roof morphology, flat vs. pitched roofs. Considering that all roof forms must have enough slope for water to drain, the term "flat" is used to describe roofs that appear flat to the casual observer. The minimum pitch for a flat roof to have drainage is 20 mm in 1 m. Figure 11 shows a typical flat roof.

Table 15. Roof shapes in selected world cities.

Roof Shape: Selected World Cities Percentage Pitched Roof								
	Function/Land Use							
Region/City	Houses (%)	Apartment Buildings (%)	Offices (%)	Commercial (%)	Industrial /Storage (%)	Institutional (%)		
Europe								
Bremen	90–100	20–30	30–40	60–70	20–30	90–100		
Uppsala	100	80–90	90-100	50-60	80–90	100		
Middle East								
Cairo	0	0	0	0	20-30	0		
Tel Aviv	80–100	10–20	0	0	70–80	60–70		
Al Fallujah	0	0	0	0	30–40	0		
Kuwait City	0	0	0	0	80–90	10–20		
Northeast Asia								
Shanghai	100	10-20	10-20	10-20	90–100	20-30		
Seoul	100	10–20	10-20	0–10	80–90	80–90		
Pyongyang	100	20-30	10-20	0–10	80–90	80–90		
Latin America								
Panama City	100	10–20	10-20	90–100	90–100	80–90		
San Jose	90–100	20–30	10-20	20-30	90–100	90–100		
Tropical Africa	Tropical Africa							
Lagos	100	0	0	0	90–100	90–100		



Figure 11. Typical "flat" roof with air conditioning and ventilation units. Note tar paper strips, parapet, and slight slope to gable roof.

Pitched roofs vary in steepness from around 45° to 20°. In the building trades, roof pitch is a term used to express the ratio of a roof's vertical rise in inches (in the United States) to each foot of run—the horizontal distance. A 3-in-12 pitch describes a roof that rises 3 in vertically for every 12 in of horizontal distance.

Pitched roofs also have a distinctive morphology. See figure 12 for the five basic shapes.

The use of flat or pitched (and degree of pitch) varies in accordance with the following:

- 1. Climate and the need to protect a structure from heavy and frequent rainfall, or, in some cases, to support heavy snow loads.
- 2. Availability of local materials for both roof structure and surfacing materials, and access to modern building materials, e.g., steel rebar for constructing reinforced concrete roofs on R/C buildings.
- 3. Relationship to construction type. For example, R/C roofs are practical for high-rise frame or box wall construction where preparing a roof is simply a repeat of constructing another floor, with the exception that the roof surface must have some protective material.
- 4. Tradition and style. To be aesthetically pleasing and to match a traditional look associated with a region, pitched roofs are sometimes seen on a framed construction high-rise building.

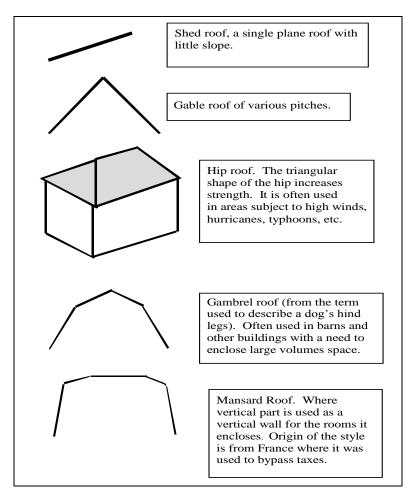


Figure 12. Five basic roof shapes.

9.2.3 Analysis of Building Function

9.2.3.1 Houses. Looking first at houses (refer to table 15), we see manifestations of the previous four principles. Pitched roofs dominate in the two European sample cities, Bremen and Uppsala, with 90% to 100% for the former and 100% for the latter. Response to a damp marine West Coast climate is one response, but historical tradition, tracing its roots to steeply pitched thatch roofs, is also followed (see figure 13).

Houses in the Middle Eastern cities of Cairo, Al Fallujah, and Kuwait City have mainly flat roofs that are not only a response to the dry climates in which they're found, but also to the lack of wood for rafters. In some Middle Eastern cities (such as Baghdad), the flat roofs may have a wall running along the edge of the building (perimeter parapet). The flat roofs of houses in dry climates are well demonstrated by figure 14 of Kano, Nigeria (located in the dry climate area of the northern part of the country). Tel Aviv is the exception, where for free-standing houses (probably because of the European origin of most of the country's citizens) the preferred roof type is pitched. Most are made with semicircular red terra cotta tile.



Figure 13. European row houses with terra cotta tile pitched roofs.

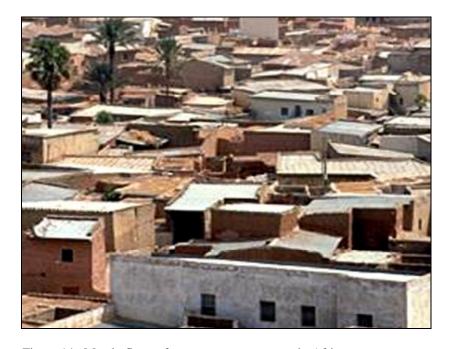


Figure 14. Mostly flat roofs on masonry structures in Africa.

Northern European institutional structures have historically pitched roofs (see figure 15). For the Northeast Asian cities examined—Shanghai, Seoul, and Pyongyang—house roofs are all pitched, accounted for by the generally moist summer climate, the snow in North Korea, and the tradition of pitched roofs in temple buildings where roof shape has spiritual origins. Figure 16 illustrates the point.



Figure 15. Northern European administrative/cultural building with pitched roof.

The Latin American representative cities, Panama City and San Jose, also have predominantly pitched roofs. Panama City, with its tropical rainforest climate (rainfall throughout the year), has a special need for sloping roofs. A few flat roofs are seen in San Jose with its only seasonally wet climate.

Finally, Lagos, also located in a tropical rainforest climate close to the Equator, has a practical need for sloping roofs.

9.2.3.2 Apartment Buildings. The apartment class used here broadly comprises both low-rise buildings (3 to 5 stories) and very tall buildings (50 stories). Both the form of construction (often R/C framed with the taller buildings) and tradition come into play to explain the variances in the proportion of pitched roofs in the different regions. For the European cities, Bremen has a high proportion of flat roofs, especially in the extensive post—World War II developments at the edge of the city. Apartment buildings near the city's center follow the regional tradition for houses and have pitched terra cotta tile roofs. Uppsala shows this characteristic to an even greater degree with its pitched roof apartments reaching 80% to 90% of all apartment roofs.



Figure 16. Temple building in Thailand with typical pitched roof.

The same three Middle Eastern cities that have flat-roofed houses also have all flat-roofed apartment buildings. In Tel Aviv, however, thanks to a European-based population tradition, some 10% to 20% of apartment buildings have pitched roofs.

In the Northeast Asian cities, the pitched roof tradition is observed somewhat in Shanghai and Seoul apartment buildings. Their great number of modern R/C-framed high-rise apartment buildings shows the fewest pitched roofs. Tall, flat-roofed apartment buildings also dominate in Seoul and Pyongyang (see figure 17), although a few pitched roof buildings occur.

A small proportion of apartment buildings in the Latin American cities group has pitched roofs (10% to 30%).

In Lagos, even though the tradition of houses is universally pitched, the modern apartment buildings all have flat roofs.



Figure 17. Flat-roofed high-rise apartment buildings in Northeast Asia.

9.2.3.3 Office Buildings. One would expect tall, framed office buildings to have flat roofs. This is essentially true, although some buildings have such roof structures as elevator housings and air-conditioning-equipment protective shelters; some also have reinforced helicopter-landing platforms. Exceptions on the list (table 15) are the European cities Bremen and Uppsala where tradition reigns and climate must be considered. Interestingly, Beijing and other Chinese cities have some office buildings with decorative pitched roofs (see figure 18).



Figure 18. Stylized pitched roofs on Asian office buildings.

9.2.3.4 Commercial Buildings. These structures are mainly lower-rise and are found in central parts of cities and along major commercial streets. Being lower than the high-rise office buildings, many have pitched roofs following the tradition of houses and some apartment buildings. Roughly half of the commercial buildings in Bremen and Uppsala have pitched roofs. A few (0% to 20%) are seen in the Northeast Asian cities. For the Latin American cities, 90% to 100% of Panama City's structures have pitched roofs because of concern with its often heavy rainfall. San Jose, with less of a rain problem, has some 20% to 30% pitched roofs.

9.2.3.5 Industrial/Storage Buildings. Of all the building types in the table, industrial/storage buildings, with only two minor exceptions, predominantly have pitched roofs, regardless of location. The reason is straightforward. Most of these buildings—used either for the manufacturing process, storage, or a combination—require a large volume of interior enclosed space, are not internally subdivided into rooms of various sizes, and do not require air conditioning. Pitched roofs, usually supported by trusses, are common. See figures 19 and 20.



Figure 19. Most of the industrial/storage buildings in this complex have metal pitched roofs.



Figure 20. Metal-roofed industrial storage buildings in South America.

In the Middle East, where a great majority of buildings have flat roofs, high percentages of the industrial/storage structures have pitched roofs. Cairo has 20% to 30%, Tel Aviv has 70% to 80%, Al Fallujah has 30% to 40%, and Kuwait City has 80% to 90%. A common occurrence in an industrial complex is to see a flat-roofed structure housing the administrative offices (almost always air conditioned) while adjacent industrial/storage buildings have pitched roofs. A similar situation is seen in the Latin American cities of Panama City and San Jose, and in the African city of Lagos.

9.2.3.6 Institutional Buildings. Institutional structures, such as governmental, religious, or academic, have traditionally elected to use pitched roofs over flat for architectural and spiritual reasons. Bremen and Uppsala both have classic-styled governmental structures. The Middle East has numerous such structures (see figure 21). In Cairo, Al Fallujah, and Kuwait City, where most other buildings have flat roofs, mosques, museums, and the like have non-flat roofs. Tradition comes into play in Northeast Asia where temples and other monumental buildings have classic, decorative pitched roofs (see figure 16). Panama City, San Jose, and Lagos show the same favoring of traditional pitched roofs.

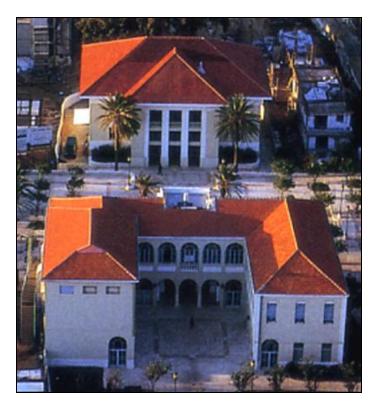


Figure 21. Terra cotta pitched roofs on academic buildings in the Middle East.

9.2.4 Worldwide Roof Constants

Although aberrations are inevitable when looking at building and roofing practices for cities around the world, certain constants can be identified.

- 1. Houses in rainy areas have pitched roofs, and those in arid areas have flat roofs.
- 2. High-rise office buildings, hotels, etc., commonly are light-clad framed structures or box-wall principle structures and, accordingly, have flat roofs, unless some cultural factor governs architecture.
- 3. Commercial buildings (stores for goods and services), especially along major streets or roads, have flat roofs.
- 4. Industrial/storage buildings will mainly have pitched roofs.
- 5. Institutional buildings will also mainly have pitched roofs.
- 6. Modern high-rise, framed construction buildings have been erected in great numbers in the developing world in recent decades, and most have flat roofs made with concrete.
- 7. Corrugated (and shaped) metal (steel, aluminum) is in wide use throughout the world for industrial/storage buildings. These buildings normally have pitched roofs. They are

especially common in wet tropical areas. The material is also frequently used in shanty towns (see figure 22).

8. Corrugated and shaped composite roof sheets are also widely used.

9.2.5 Roof Material Types

9.2.5.1 Concrete. Concrete is commonly used for flat roofs and especially for R/C-framed or box-wall buildings where the roof is simply another floor with weather proofing added. Foamed light-weight concrete can take the form of shakes or planks and can be used for pitched roofs when the underlying roof structure is made sufficiently strong. With flat roofs, factory-made lightweight foamed concrete planks are often used and placed upon a supporting structure. Or, a layer of concrete may be poured on top of a corrugated steel base, reinforced with a steel mesh layer. A layer of felt is usually laid on top of the concrete with a layer of bitumen (asphalt and coal tar pitch) atop that. A thin layer of gravel (10 to 13 mm) is placed atop the bitumen to protect the felt and the bitumen. Figure 23 is an example.

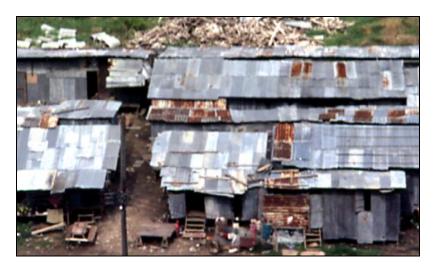


Figure 22. Corrugated steel roofs on shanties in Asia.

- 9.2.5.2 Terra Cotta. Tiles of this material have been used since early times, taking a flat form, a concave, or a convex form and laid on a pitched roof in an overlay pattern (with the covered part thinner than the uncovered part); thickness varies from 10 to 20 mm. A mix of flat and convex tiles is seen in the photo of rooftops in southern Europe (figure 24). Ribbed tiles are seen on the hip-roofed house in South Asia (figure 25).
- 9.2.5.3 Wood. Sawn shingles and split shakes are commonly used where wood is plentiful or can be imported at low cost.



Figure 23. Concrete flat roofs on buildings in the Middle East.



Figure 24. Terra cotta–tiled roof in southern Europe. Detailed photo shows a common practice of convex tile placed over flat tiles.

9.2.5.4 Metal. Steel and aluminum are used widely for roofing and fabricated into a great variety of shapes, from simple corrugation to many forms of ribbing. Thickness is only 1 to 3 mm. A typical developing nation shanty in Asia shows ribbed galvanized sheet-metal steel in various stages of rust (figure 22). Figure 26 shows a ribbed steel-pitched roof on the middle house (terra cotta tile on the left house and rolled asphalt material on the flat roof on the right). Corrugated steel is classed by the distance between the ridges; a common figure is a ridge to ridge distance of 2 1/2 in with a 1/2-in-deep valley. Thickness is reported by gage.



Figure 25. Ribbed terra cotta tile hip-roof on a CMU construction in South Asia.



Figure 26. Ribbed steel roof (middle), tile roof (left), and rolled roofing (right) in northern Europe.

- 9.2.5.5 Composite. Various fibers are combined with resins to form an effective roof material; coir (from coconuts) and jute are used in India. Asbestos has been employed widely. Thickness is usually greater than with metal, ranging from 4 to 8 mm. Sheets are often made of a combination of asbestos fiber and Portland cement. The product is light gray in color and, as it doesn't require paint, it is readily identified in the field. Lightweight steel-framed industrial/storage buildings will frequently use this material.
- 9.2.5.6 Brick and Stone. Brick and stone are used in dome and vault forms to enclose space. They are also widely used in mosques and houses in arid Middle Eastern areas. Low brick arches are used in conjunction with joists to form flat roofs; a veneer of concrete is put on top.
- 9.2.5.7 Wattle. Integrated with mud, this material is seen on many adobe houses in the Middle East.
- 9.2.5.8 Thatch. A traditional roof material in Europe and elsewhere in rural areas, but not often seen today.
- 9.2.5.9 Pitched Roof Support. Pitched roofs are supported by rafters on which purlins are attached at right angles. Trusses may be required to support these.

10. Plate Group 3: Floor Plans/Room Dimensions

Floor plans are provided for each of the 44 building types. Planimetric plans are provided for each building type, and, in some instances, isometric drawings (at 45°) are included to enhance the visual perception of building interiors. For multiple floor buildings, the upper floor (in the case of a two-story building) is provided, and for buildings with more than two floors, a representative upper floor plan is given. Note that the terms ground floor and upper floors are employed to be compatible with international standards. The U.S. usage of the term "first floor" for the "ground floor" is not applied abroad where the term ground floor indicates exactly what that suggests, with the first floor above the ground floor being designated the first floor, and so on to the full height of the building.

Room dimensions are given in meters. Venting (windows and doors) is shown at scale, as are dimensions of both exterior and interior walls. An example of a single-story industrial/storage building is displayed in figure 27 (from plate framed 16-3-a in the catalog).

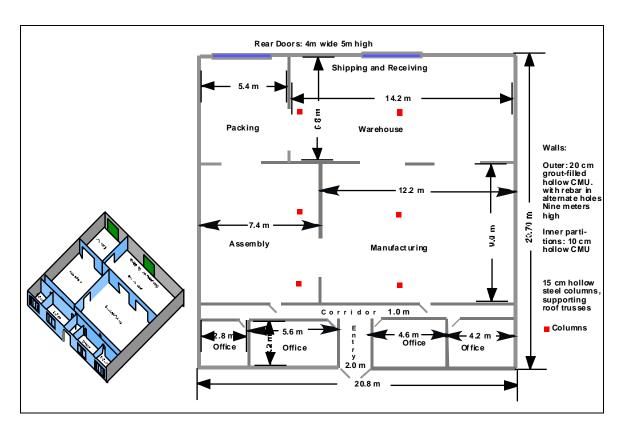


Figure 27. Planimetric floor plan and isometric rendering of an industrial/storage building.

Table 16 gives room dimensions by functional classes of the 44 building types (houses, apartments, row houses, hotels, offices, industrial/storage buildings, retail stores, and institutions). Specifics are given by type of room within these functions where applicable, e.g., living rooms, bedrooms, kitchens for houses and apartments/row houses.

Typical floor plan dimensions of length and width, extracted from the planimetric floor plans for each building type, were used to calculate the average room area (in square meters). The average room volume (in cubic meters) was calculated by multiplying the average room area by the room height.

The number of rooms is given by type, as are range, area, height, volume, and type of UTZ where found. The ranges in room sizes are narrow in residential cases but spreads are greater for rooms located in hotel public areas, corporate offices, industrial/storage spaces, retail stores, and institutions.

The room sizes recorded in table 16, although derived independently, are consistent with the room measurements provided in other independent works such as Harold R. Sleeper's *Building Planning Design Standards*.

Table 16. Room dimensions by function for worldwide buildings.

Room Dimensions: By Function for Worldwide Buildings						
Function	Number of Cases	Range (m)	Average Area (m²)	Height (m)	Average Volume (m³)	UTZs Where Found
			House			
Living room	12	$4 \times 4/8 \times 4$	21.5	3	64.5	A3, Dc3, Do3
Bedroom	27	$3 \times 3/4 \times 5$	13.1	2.5	32.9	A3, Dc3, Do3
Kitchen	12	$2 \times 3/4 \times 4$	10.8	2.5	27.1	A3, Dc3, Do3
		Apartm	ents/Row Houses			
Living room	8	$4 \times 3/6 \times 4$	20.1	3	60.4	A2, Dc2, Do2
Bedroom	10	$3 \times 3/5 \times 3$	12.9	2.5	32.3	A2, Dc2, Do2
Kitchen	11	$2 \times 2/4 \times 2$	7.5	2.5	18.6	A2, Dc2, Do2
			Hotels			
Guest rooms	6	$6 \times 4/4 \times 3$	17.8	3	53.5	A1, A2, Dc1
Public rooms	5	16 × 10/40 × 21	417.2	5–7	2639.2	A1, A2, Dc1
			Offices			
Private	11	$7 \times 4/8 \times 6$	37.9	3	113.7	A1, A2, Dc1, Dc5
Pub/Corp.	8	$8 \times 8/30 \times 20$	242.3	4–6	1288.5	A1, A2, Dc1, Dc5
Industrial/Storage						
Functional spaces	10	$7 \times 5/40 \times 25$	428.0	6–8	3032.4	A4, Dc4, Do4
Retail Stores	3	$10 \times 6/36/30$	406.7	3–6	2326.7	A1, A2, A5, Dc1
Institutional	4	$7\times12/16\times12$	125.0	4	500.0	Dc6, Do6

Note: UTZ = urban terrain zone.

As would be expected, rooms in houses (living rooms, bedrooms, and kitchens) are all slightly larger than those found in apartments and row houses.

In the main, house rooms in most parts of the world will be smaller than the U.S. average. Still, they cannot be smaller than the minimum required for particular functions, considering that the size of humans and furniture is virtually universal.

While dimensions for houses and apartments/row houses show relatively little variance, hotel guest rooms show even less, considering the dedicated use of the rooms and the requirement for hotel builders to attain maximum cost-benefit. Public rooms do, of course, vary with need and function of the hotel (a hotel providing only guest rooms vs. a large convention/business-type establishment). At any rate, volumes of public rooms in major hotels are large and on par with many industrial/storage buildings or retail stores.

For large public space use or corporate offices—associated with framed high-rises—room size and volume are often large. A not uncommon situation is to find a room the width of a prestressed concrete beam (some 10 m) and the length of a few of these beams, giving a total open area often exceeding 300 or 400 m² and broken only by cubicle partitions.

The figures for the industrial/storage buildings reflect only the sample structures in this volume and do not include truly large industrial structures, such as an automobile or aircraft assembly plant.

Retail stores also range from the small examples herein (seen in crowded parts of developing nation cities) to the largest "big box" stores.

The last entry, institutional, cannot include the largest (but relatively rare) enclosed spaces, as in a major church or sports arena, but is intended to be representative of those widely encountered average spaces, such as schools.

11. Plate Group 4: Construction Features

Construction features illustrated in this group of plates vary in accordance with the nature of the particular type of construction. For mass construction (table 17), emphasis is placed on the types and dimensions of the material—concrete, the masonry units of mud brick, kiln-dried brick, CMUs, and terra cotta. Brick bonding types are also shown. Details are provided on concrete panel walls as used in box-wall principle construction and tilt-ups.

Mass construction examples include (1) mud brick composition, dimensions, and how they're made; (2) materials and methods used in roofs of simple adobe buildings; (3) method of laying triple brick walls using English bonding; (4) nature of ultra-thick brick walls as seen in multistory brick buildings; and (5) composition and dimensions of R/C box-wall principle buildings.

For framed construction (table 18), the emphasis is on the nature of the frame and either the wall cladding or infill. Framed construction examples include (1) details on joining components of post- and beam-wood construction; (2) the form and composition of heavy cladding on tall steel-framed buildings; (3) the nature of central pylon construction used for some high-rises; (4) variations in infill materials as used in R/C-framed buildings; and (5) nature of very light corrugated steel walls in industrial/storage buildings.

12. The Catalog of Urban Terrain Building Types

The catalog is designed to serve as a reference to users interested in buildings as target types and support to urban operations worldwide by providing information on typical structures and construction types found in each region. Tables 4 and 5 provide the summary view of basic forms of construction. Table 6 provides building properties, e.g., wall and material thicknesses,

for the 44 urban terrain building types in one location for easy reference. The catalog offers specific data on all of the 44 universal building types. This is achieved in the 122 plates covering 23 mass construction building types, and the 121 plates covering the 21 framed construction building types.

Table 17. Mass urban terrain building types.

Twenty-Three Urban Terrain Building Types							
Building Type	No. of Plates	Building Type Name	Building Material				
Mass 1	5	Stone house	Stone				
Mass 2	6	Stone institutional building	Stone				
Mass 3	7	Adobe house	Sun-dried mud brick (adobe)				
Mass 4	8	Adobe store	Sun-dried mud brick (adobe)				
Mass 5	8	Triple brick house	Kiln-fired brick				
Mass 6	8	Triple brick Middle Eastern house	Kiln-fired brick				
Mass 7	8	Brick row house	Kiln-fired brick				
Mass 8	6	Brick apartment building	Kiln-fired brick				
Mass 9	5	Brick hotel	Kiln-fired brick				
<u>Mass 10</u>	5	Brick office building	Kiln-fired brick				
Mass 11	5	Brick store	Kiln-fired brick				
Mass 12	5	Brick mosque	Kiln-fired brick				
Mass 13	5	Brick industrial/storage building	Kiln-fired brick				
Mass 14	6	CMU house	CMUs				
Mass 15	5	CMU store	CMUs				
<u>Mass 16</u>	6	CMU industrial/storage building	CMUs				
<u>Mass 17</u>	5	Brick-over-block house	CMUs and brick				
<u>Mass 18</u>	7	Brick-over-block house German house	Large CMUs and brick				
<u>Mass 19</u>	6	Concrete with stone cover apartment building	Poured concrete and stone				
<u>Mass 20</u>	5	Concrete stone	Poured concrete				
Mass 21	6	Tilt-up industrial storage building	Poured concrete				
Mass 22	11	Box wall principle apartment building	Concrete panels				
Mass 23	5	Box wall principle hotel	Concrete panels				
		Total Plates: 143					

Note: CMU = concrete masonry unit.

Mass 1-1 Place on Building Construction Chart

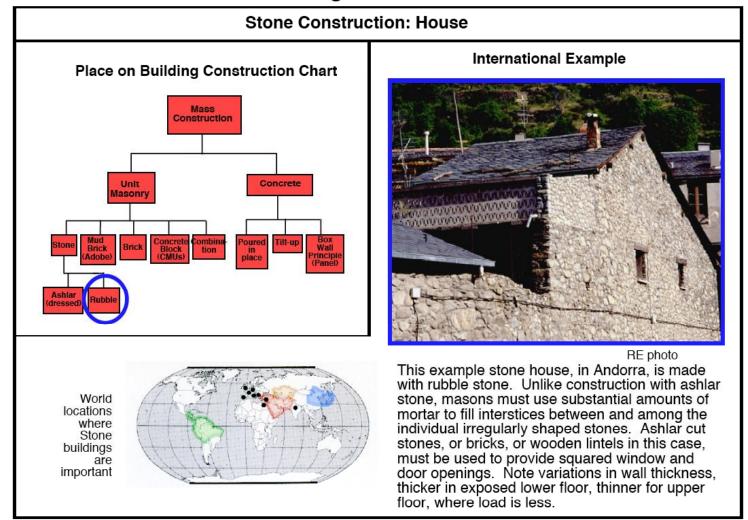


Figure 28. Mass 1-1 place on building construction chart.

Mass 1-2 Elevation

Stone Construction House

Commentary

This example, in a fortified hilltop village in Italy, shows a house with ashlar stone exposed on the two lower floors and rubble stone exposed on the top floor. Several modifications are suggested (by the presence of two entry doors) in this building that is at least 500 years old. Note: alignment of windows to preserve wall strength; and the tile pitched roof.

Terra cotta tile is used as a roofing material. The tiles lie on slats, at right angles, and the slats rest on rafters.



RE Photo 2004

Figure 29. Mass 1 elevation.

Mass 1-3-a Floor Plans

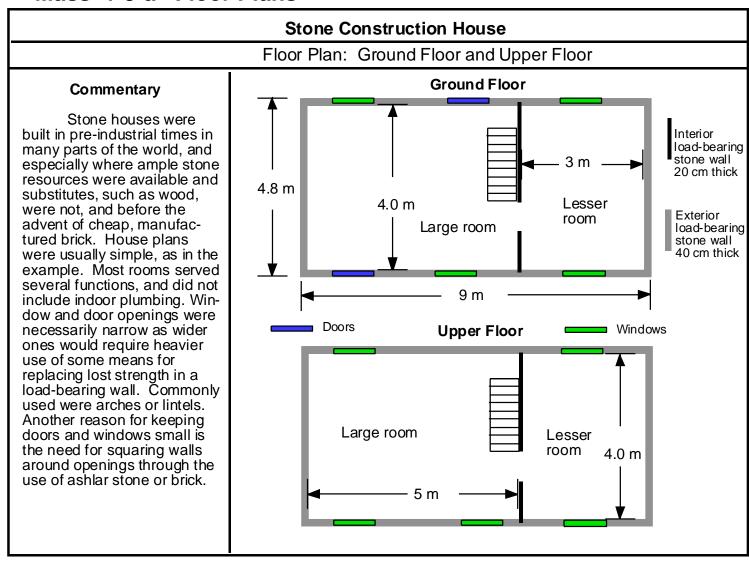


Figure 30. Mass 1-3-a floor plans.

Mass 1-4 Construction

Stone Construction House

700-Year-Old Buildings, Italy

Stone House Construction Examples





RE Photo

Commentary:

Immediately striking in these views of old stone houses is the mix of exposed building materials. A few ashlar stones are visible, used particularly for squaring building corners, in arches, and around doors and windows. Also visible are indications of wall repair over the centuries involving rubble stone, brick, and parts of ashlar stone. Wall thickness of around 40 cm is visible in the doorway and window in the right frame.

Figure 31. Mass 1-4 construction.

Mass 2-1 Place on Building Construction Chart

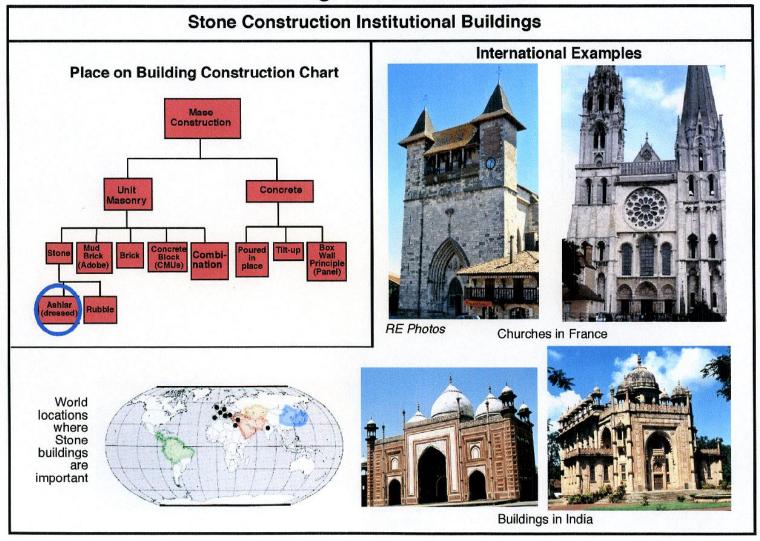


Figure 32. Mass 2-1 place on building construction chart.

Mass 2-2 Elevations

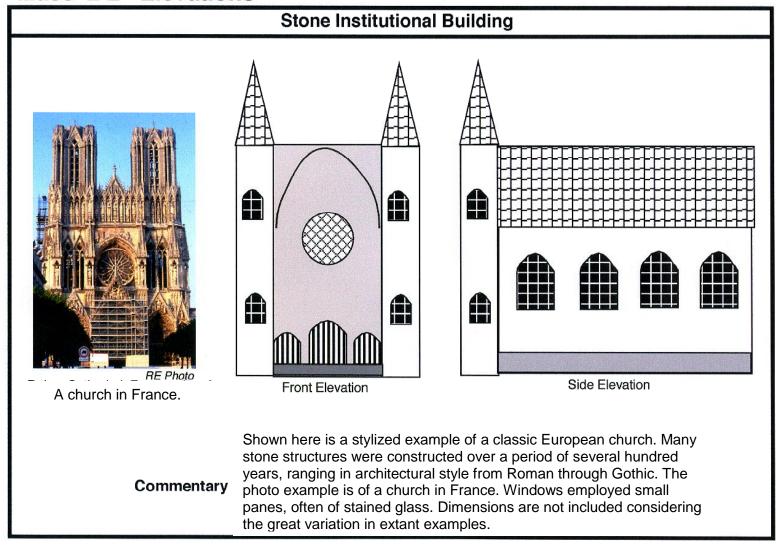


Figure 33. Mass 2-2 elevations.

Mass 2-3 Floor Plan

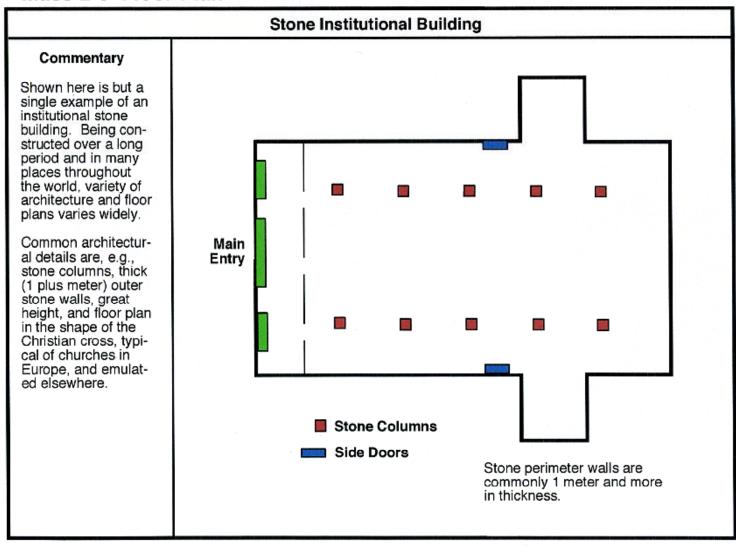


Figure 34. Mass 2-3 floor plan.

Mass 2-4-a Construction

Stone Construction Institutional Buildings



RE Photo

This building (in Tunis, Tunisia) provides a good example of the use of ashlar (dressed) stone in conjunction with rubble (irregular) stone units, the ashlar (being much more expensive and requiring intensive labor with simple tools) used to square corners while the irregularities of the rubble stone are compensated through use of ample quantities of grout.

Rubble stone theoretically offers less resistance to a munition than would the fitted ashlar stone.



RE Photo

This wall (in a building in London) uses three different materials to offset the irregularities of rubble stone: ashlar units at the wall end, concrete near and at the top, and brick to form an arch at the window. Note the remnants of a pilaster, part in rubble stone and part in ashlar stone.

Figure 35. Mass 2-4-a construction.

Mass 2-4-b Construction

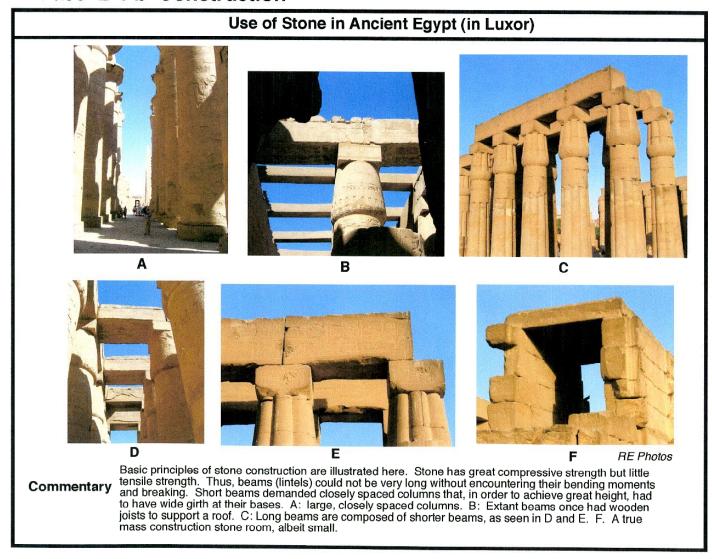



Figure 36. Mass 2-4-b construction.

Mass 2-4-c Construction

Principles Concerning Stone Walls



China's Great Wall manifests the principle that a wall exterior will employ ashlar (dressed) stone while rubble stone is used in the interior. The roadway on the wall top, on the right, has disintegrated to the point where vegetation is growing in the exposed soil. Note the use of brick for the castellated walls. RE photo

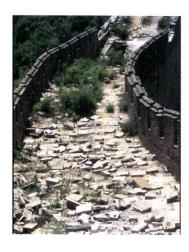



The rubble stone wall, on the left, was covered with thin sheets of stone to give the appearance of ashlar stone. Wall is in Greece. RE photo.



Stone walls, as is also true of brick walls, are thicker at the base to support loads than they are above. RE photo

Figure 37. Mass 2-4-c construction.

Mass 3-1 Place on Building Construction Chart

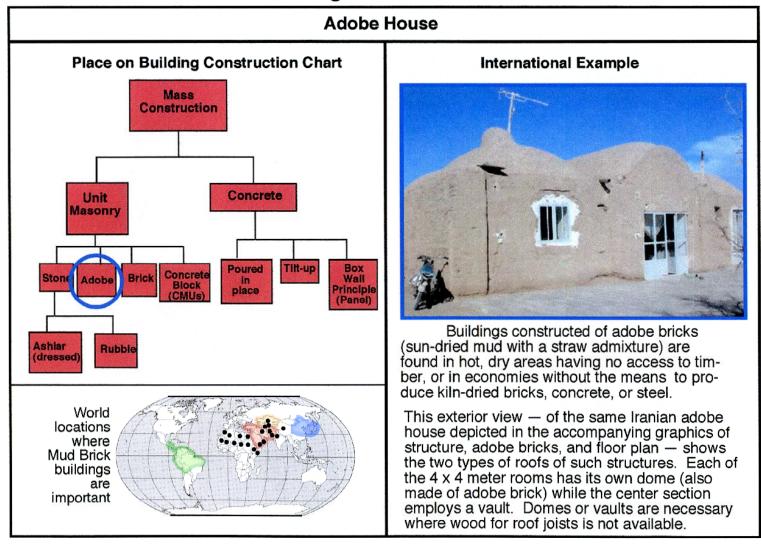


Figure 38. Mass 3-1 place on building construction chart.

Mass 3-2-a Elevation and Isometric Rendering

Commentary

Using a standard size for adobe bricks in Iran — 40 x 26 x 10 cm, and using a conventional triple brick method of building walls — results in 80 cm thick walls. Such thickness is required for strength and insulation from seasonal temperature extremes.

The Iranian example here has domes and a vault roof (for the center section). Adobe houses, where wood is available, will have flat roofs composed of, from bottom to top: (1) wooden floor joists, usually poles, often projecting out through the upper wall; (2) boards laid cross-wise to the joists; (3) reeds covering the boards (a sort of lath); and (4) a mixture of adobe mud laid on top of the reeds.

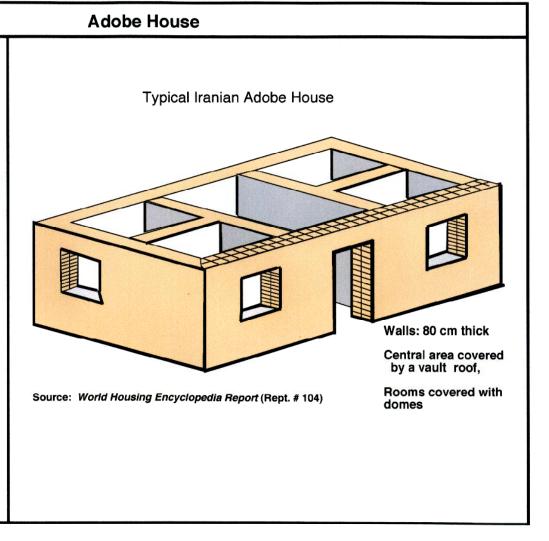


Figure 39. Mass 3-2-a elevation and isometric rendering.

Mass 3-2-b Elevations

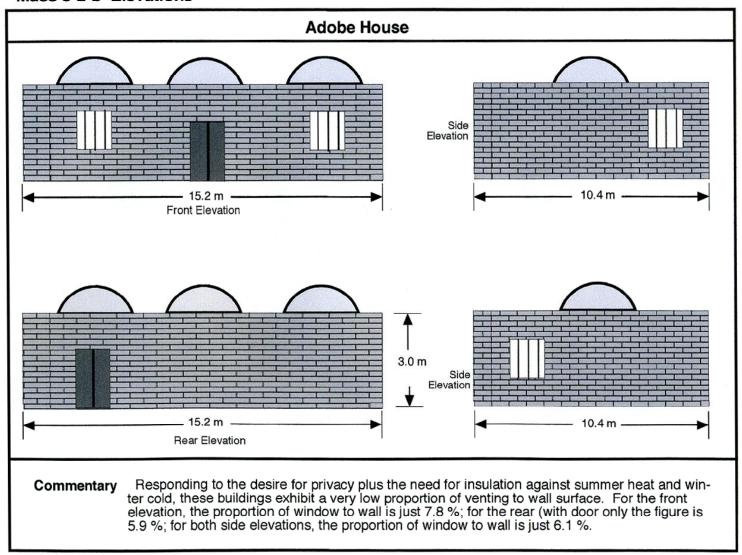


Figure 40. Mass 3-2-b elevations.

Mass 3-3-a Floor Plan

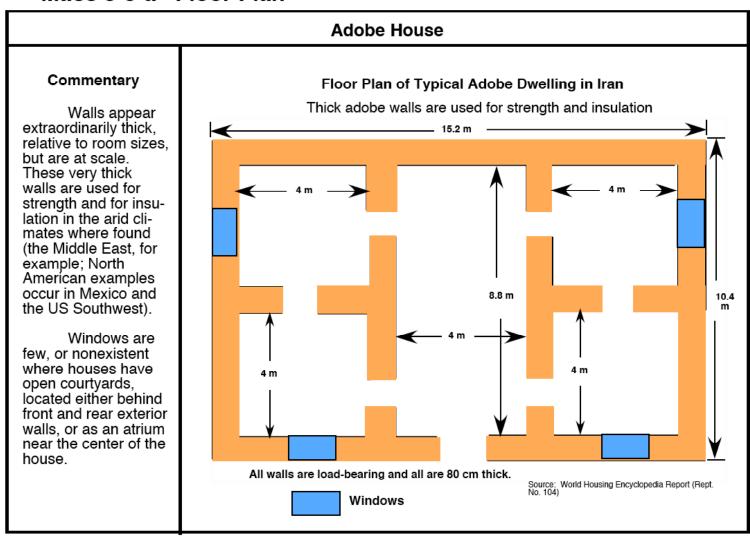


Figure 41. Mass 3-3-a floor plan.

Mass 3-4-a Construction

Adobe House Commentary A triple adobe Example of an Adobe Wall (one course): from Iran brick — using dimensions 40 x 26 x 10 cm - results in a wall that uses both three widths and two lengths to achieve a Mortar of same material as total width of 80 cm. adobe bricks To construct a wall of the same width using standard American bricks would require a 6 brick thickness. This thickness 10 cm gives structural strength and mitiga-tion of extreme diurnal and seasonal temper-A Standard ature fluctuations. **American** brick, to scale Adobe walls ordinarily use alternate courses (English Bond) to provide strength.

Figure 42. Mass 3-4-a construction.

Mass 3-4-b Construction Method

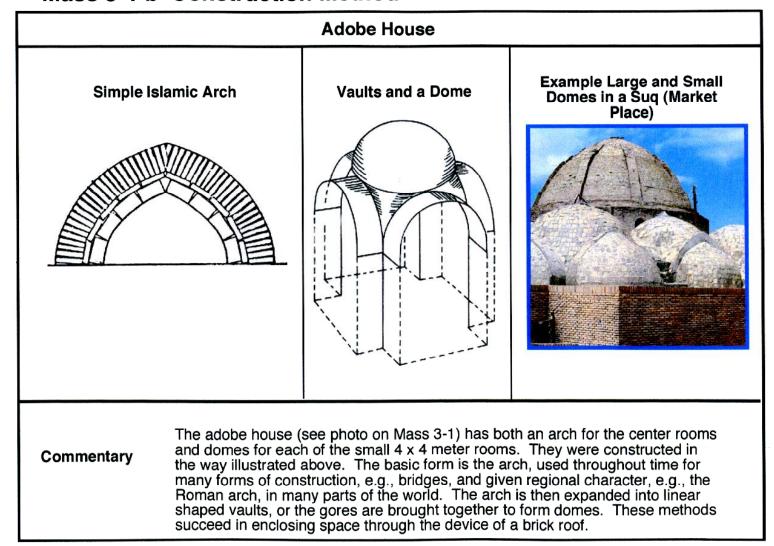


Figure 43. Mass 3-4-b construction method.

Mass 4-1 Place on Building Construction Chart

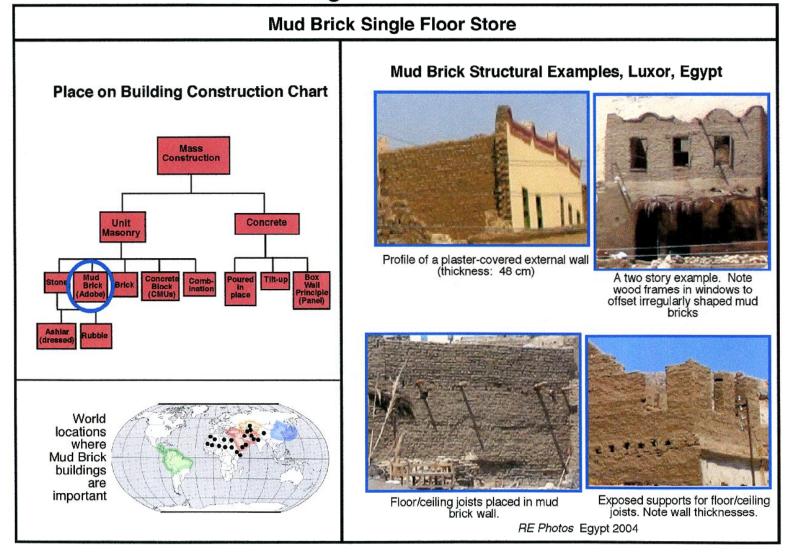


Figure 44. Mass 4-1 place on building construction chart.

Mass 4-2 Elevations

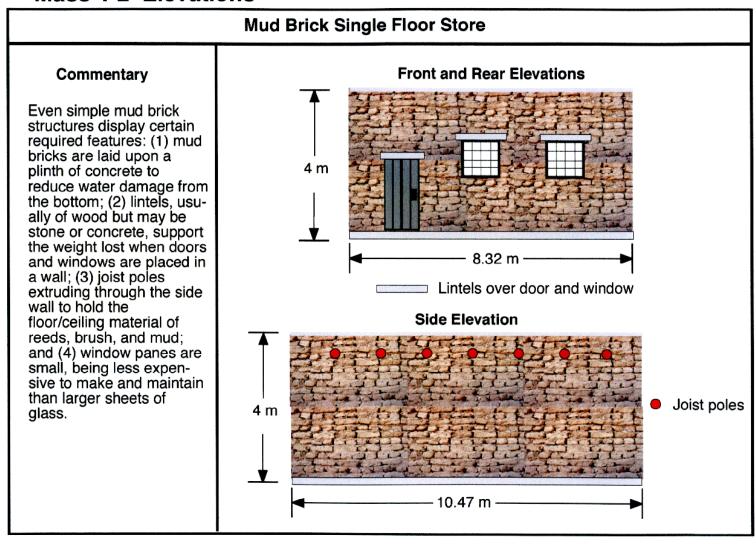


Figure 45. Mass 4-2 elevations.

Mass 4-3-a Floor Plan

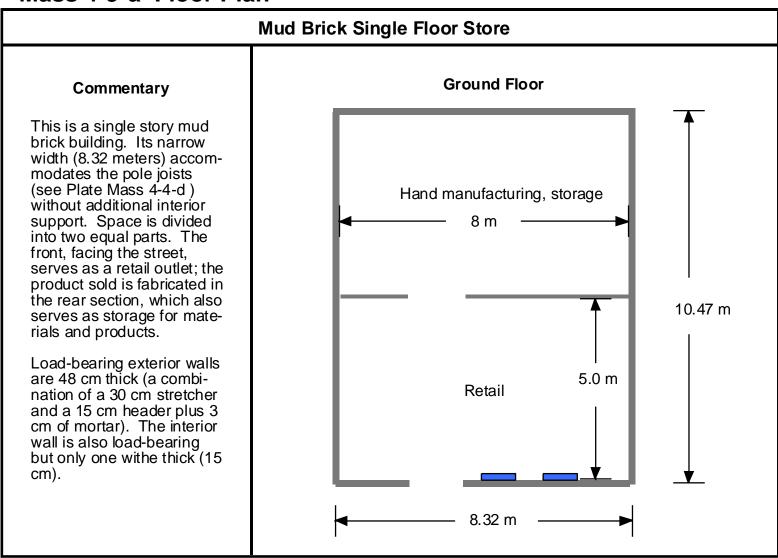


Figure 46. Mass 4-3-a floor plan.

Mass 4-4-a Construction: Building Materials

Mud Brick Single Floor Store

Mud Brick Examples: Egypt 2004



A Quadruple Mud Brick Wall



Straw in Mud Brick, added for Strength



Close-up of Mud Brick Wall Using English Bonding

Commentary

The character of mud brick is revealed here. Bricks are uneven in shape, and courses are not laid neatly as is the practice with kiln-dried brick. However, English bond (alternate courses of stretchers and headers) is commonly used. Straw, used to strengthen the clay, is exposed in many instances. This quadruple brick wall (in Luxor, Egypt) is about 66 cm in thickness. *RE Photos 2004*.

Figure 47. Mass 4-4-a construction: building materials.

Mass 4-4-b Construction: Materials

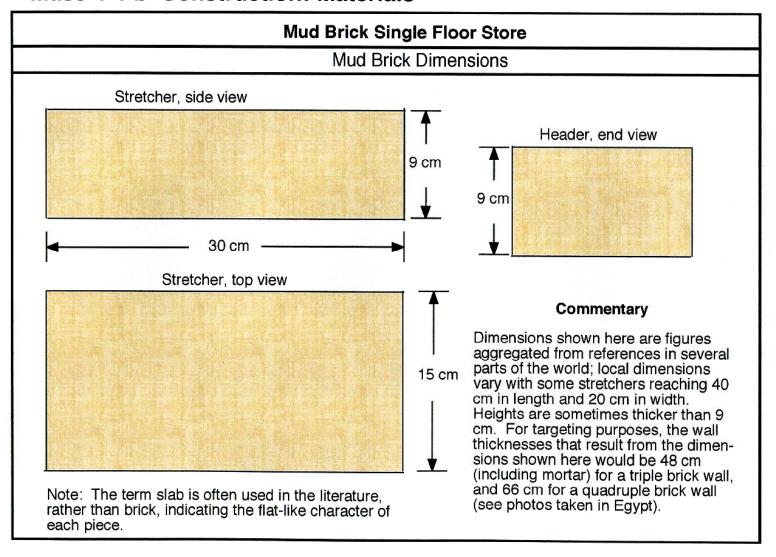


Figure 48. Mass 4-4-b construction: materials.

Mass 4-4-c Construction: Materials

Mud Brick Single Floor Store

Commentary

Two stages of mud brick making are visible here. In the upper part of the group, near the worker, bricks are in an advanced stage of drying: those in the lower area have apparently just been formed and are now beginning the drying process. That mud bricks are larger than kiln dried clay bricks is also evident. The latter are designed so that a mason can span the width of the header (some 4 inches or so) with one hand to place the brick onto the wall being built, while keeping the trowel in the other hand. Mud bricks are definitely too wide to use this technique and must be placed with two hands.

Freshly Made Mud Bricks Drying in the Sun



Figure 49. Mass 4-4-c construction: materials.

Mass 4-4-d Construction: Roof Materials

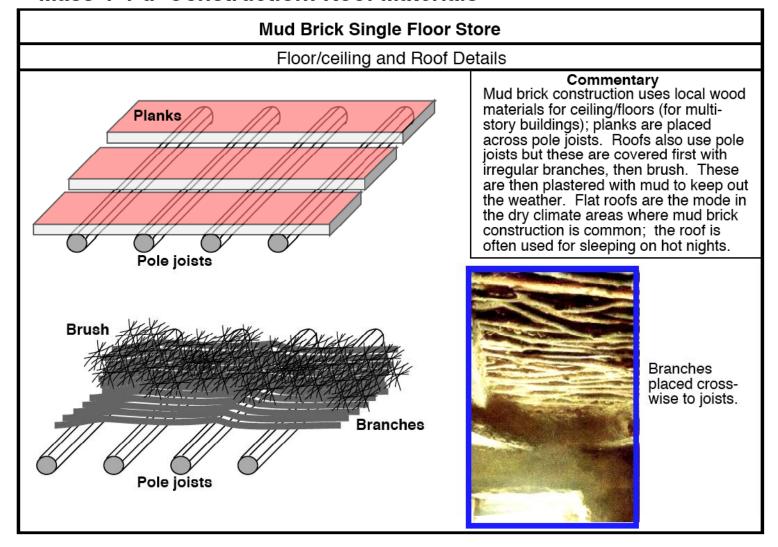


Figure 50. Mass 4-4-d construction: roof materials.

Mass 5-1 Place on Building Construction Chart

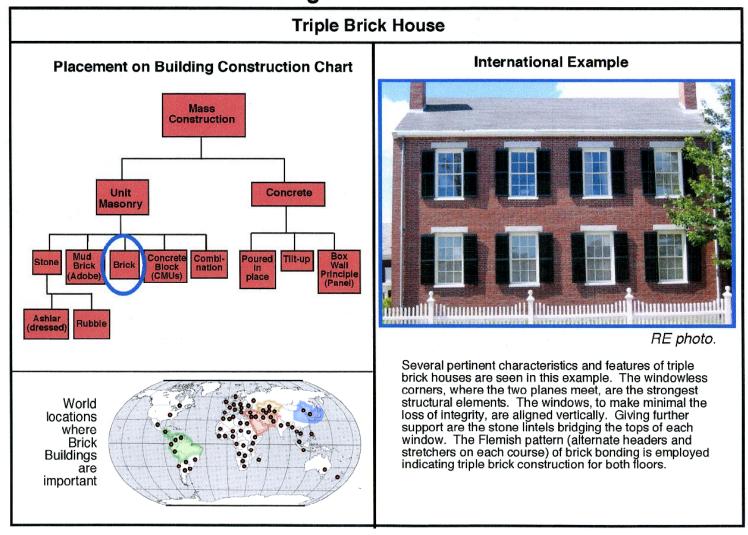


Figure 51. Mass 5-1 place on building construction chart.

Mass 5-2 Elevations

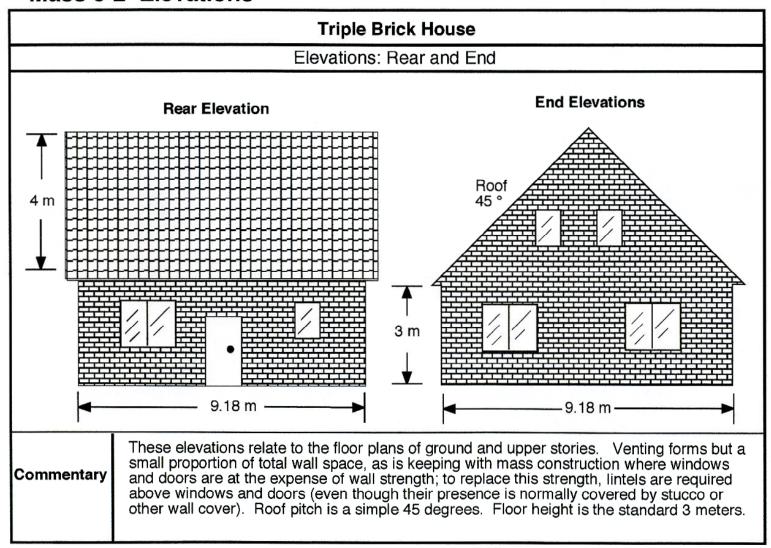


Figure 52. Mass 5-2 elevations.

Mass 5-3-a Floor Plan

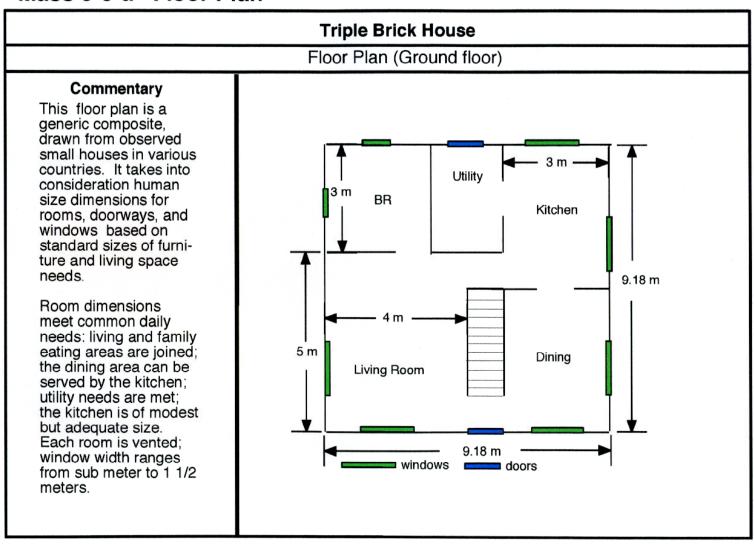


Figure 53. Mass 5-3-a floor plan.

Mass 5-3-b Floor Plan

Triple Brick House Floor Plan: Upper Floor Commentary **Upper Story Floor Plan** The upper floor of this one and a half story house has a smaller footprint than the ground floor owing to the slope of the roof. It provides the bedrooms (3) and the bathroom for the Bedroom Bathroom 2 m house (water pipes are directly above those for the kitchen). The stairs from the ground floor give Corridor 6.46 m access. Strengthening of the 4 m structure is achieved Bedroom through the interior load-Bedroom bearing walls that extend upward from the ground floor. The only venting is 9.18 m through the end walls, although in Europe, windows openable roof skylights to provide extra lighting and ventilation are common.

Figure 54. Mass 5-3-b floor plan.

Mass 5-4-a Construction

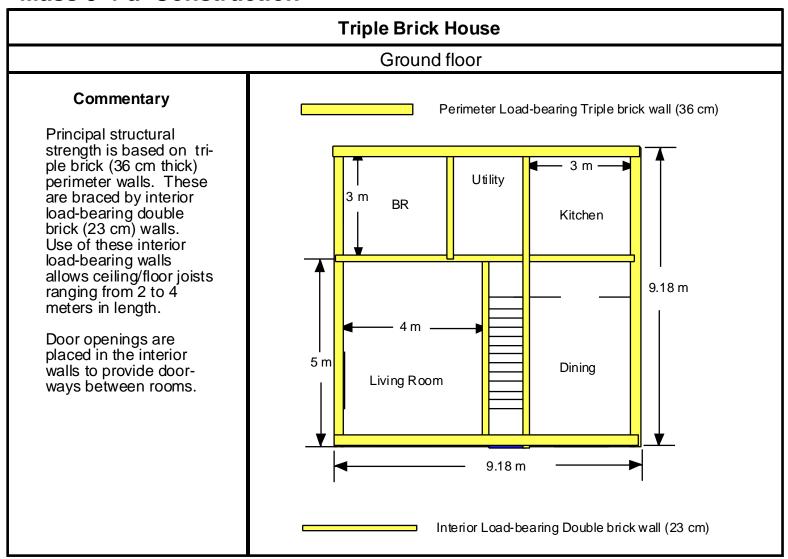


Figure 55. Mass 5-4-a construction.

Mass 5-4-b Construction

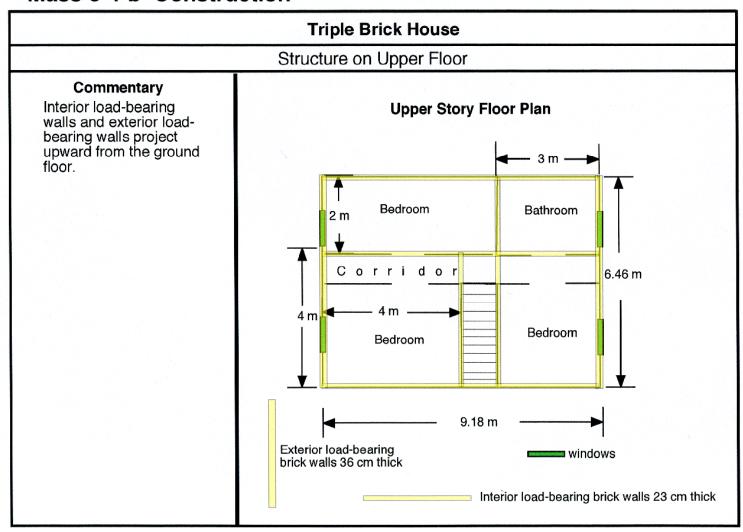


Figure 56. Mass 5-4-b construction.

Mass 5-4-c Construction (Brick Courses)

Triple Brick House Construction: Triple Brick load-bearing Walls Commentary Front Elevation: Brick This building employs the very common method of forming a load-bearing brick wall, namely use of Triple Brick, sufficient in strength for a single story or two story building. It is formed of one stretcher and one header. This arrangement manifests itself in the English bond (alternate courses of headers and stretchers) illustrated here. This combination of bricks and intervening mortar yields a total wall thickness of 36 cm. **English Bond (Alternate Course)** While well mortared brick can withstand the elements, the common practice is to cover the brick with stucco. This front elevation shows the windows for the living room the left and the dining room on the right, with the front door in the middle. 23 cm ----

Figure 57. Mass 5-4-c construction (brick courses).

Mass 6-1 Place on Building Construction Chart

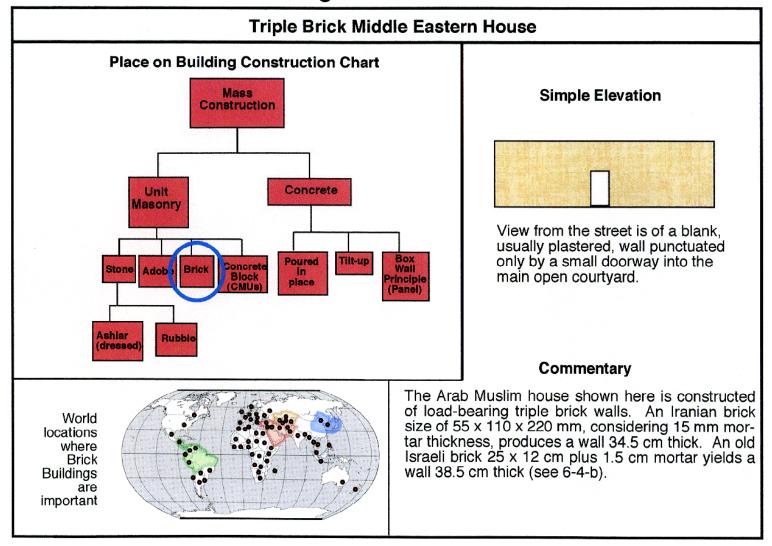


Figure 58. Mass 6-1 place on building construction chart.

Mass 6-2 Elevations

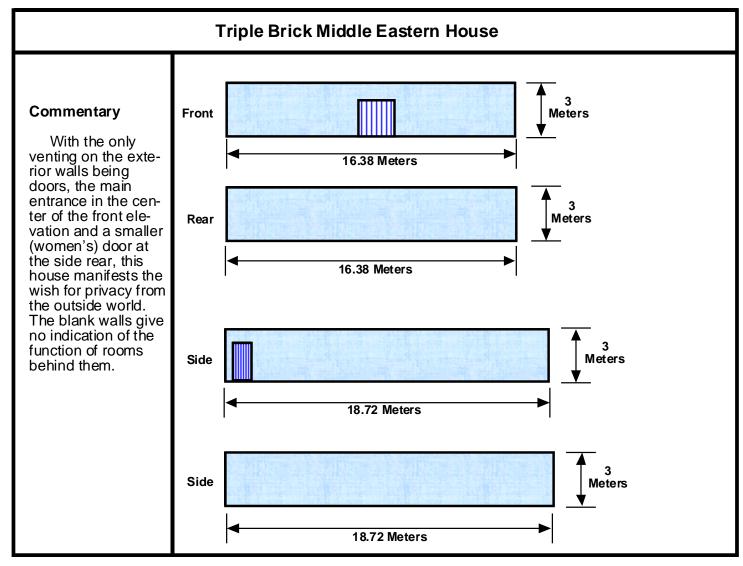


Figure 59. Mass 6-2 elevations.

Mass 6-3-a Floor Plan

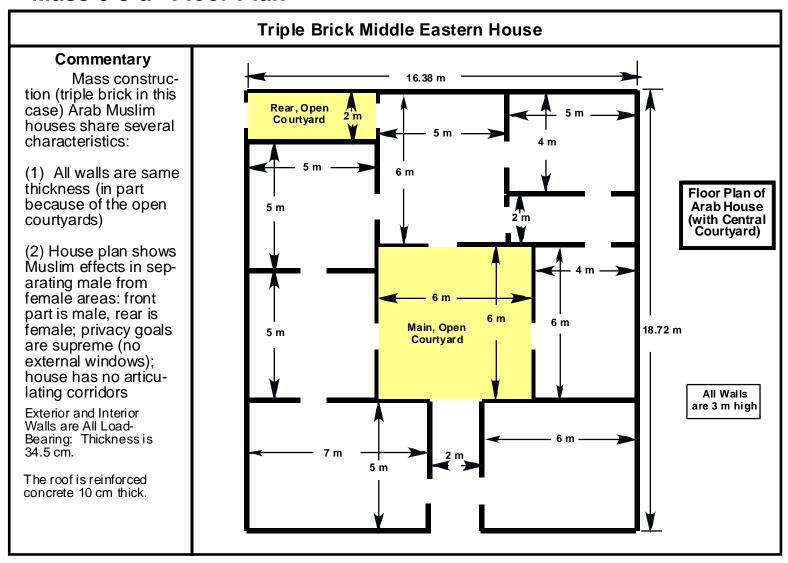


Figure 60. Mass 6-3-a floor plan.

Mass 6-3-b Isometric Floor Plan

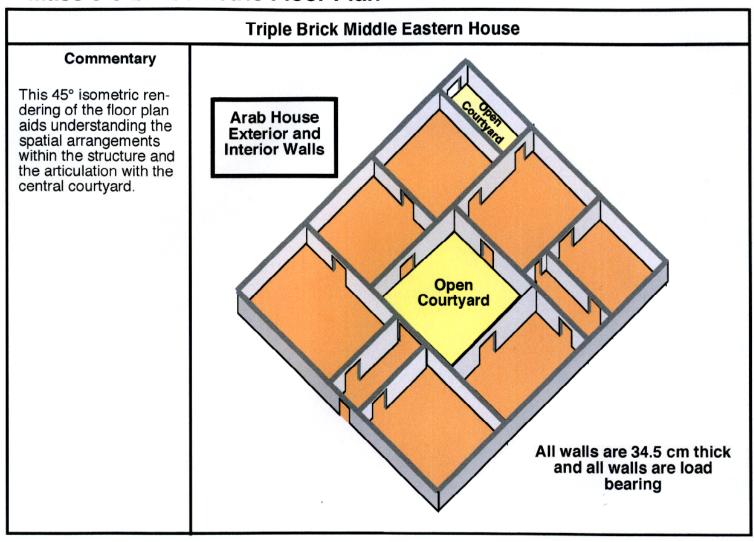


Figure 61. Mass 6-3-b isometric floor plan.

Mass 6-3-c Isometric Floor Plan

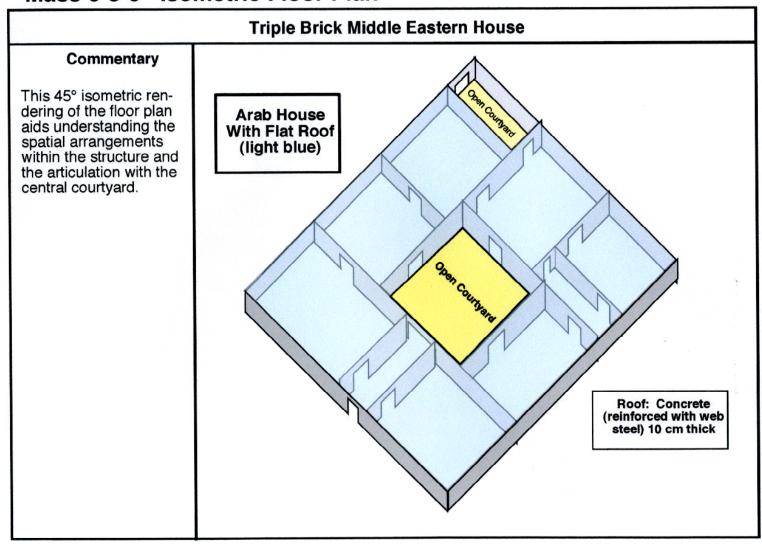


Figure 62. Mass 6-3-c isometric floor plan.

Mass 6-4-a Construction

Triple Brick Middle Eastern House

Construction Method and Dimensions

Commentary

Bricks used in the Arab Muslim world, although a single standard is not found, are somewhat larger in all dimensions than the standard American brick (8 x 4 x 2.5 inches), or in metric measurement (to nearest mm), 200 mm x 100 mm x 60 mm. Brick dimensions on the drawing are those reported for a typical building in Iran. An old Israeli brick (shown on following plate) is a little larger.

Compressive strength of brick also varies. A range of 101 kg/cm² to 152 kg/cm² is found.

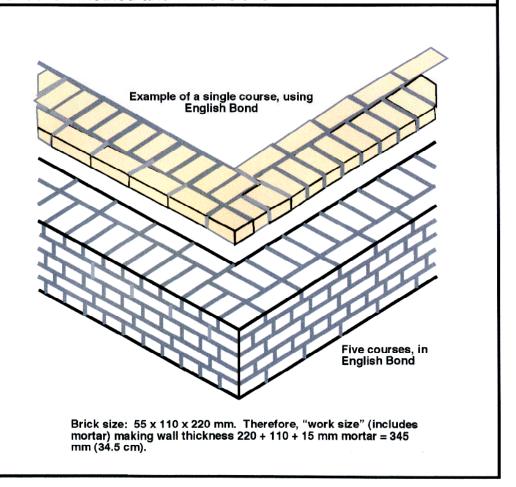


Figure 63. Mass 6-4-a construction.

Mass 6-4-b Construction

Triple Brick Middle Eastern House

Construction Method and Dimensions

Commentary

This segment of a brick wall (of an old building in Tel Aviv, as photographed and measured in 1999 shows bricks to have: headers of 12.0 cm; and stretchers of 25.0 cm. The wall was laid using English Bond (alternate courses).

Wall thickness, with such a bonding pattern, would be 12 cm plus 25 cm plus 2 cm of mortar to equal 39 cm (or aprx. 15 inches). A triple brick wall made with US standard brick dimensions would be about 12 1/4 inches.


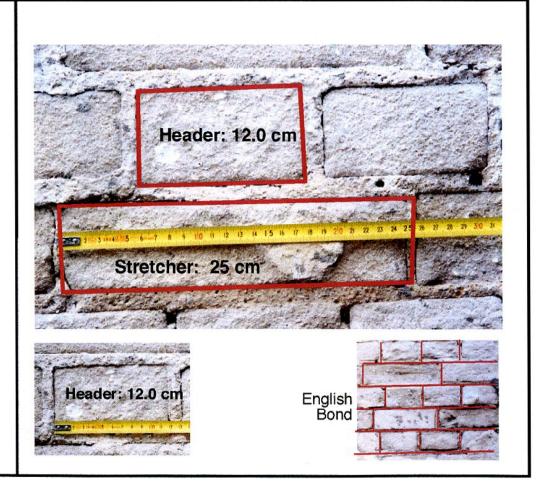


Figure 64. Mass 6-4-b construction.

Mass 7-1 Place on Building Construction Chart



International Example

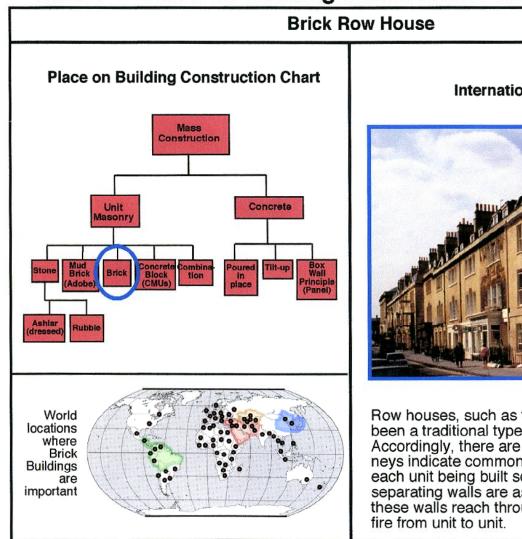

RE photo.

Row houses, such as this example in England, have been a traditional type of housing for a long time. Accordingly, there are many extant examples. Chimneys indicate common wall construction (as opposed to each unit being built separately), and thus load-bearing separating walls are as thin as possible. In the UK, these walls reach through the attic to prevent spread of fire from unit to unit.

Figure 65. Mass 7-1 place on building construction chart.

Mass 7-2-a Elevation

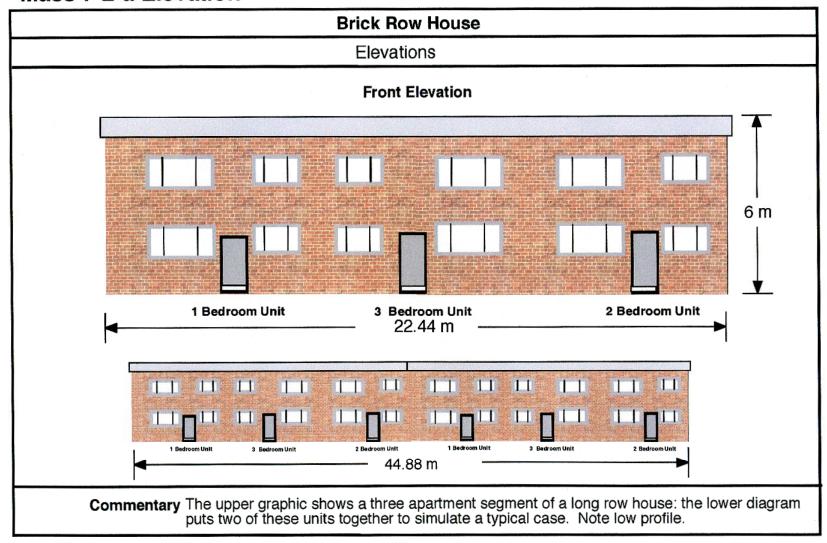


Figure 66. Mass 7-2-a elevation.

Mass 7-2-b Elevation

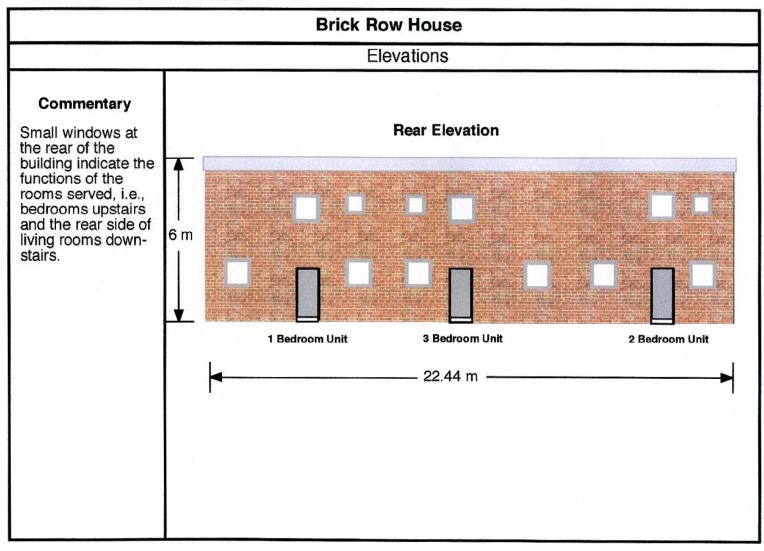


Figure 67. Mass 7-2-b elevation.

Mass 7-3-a Floor Plan

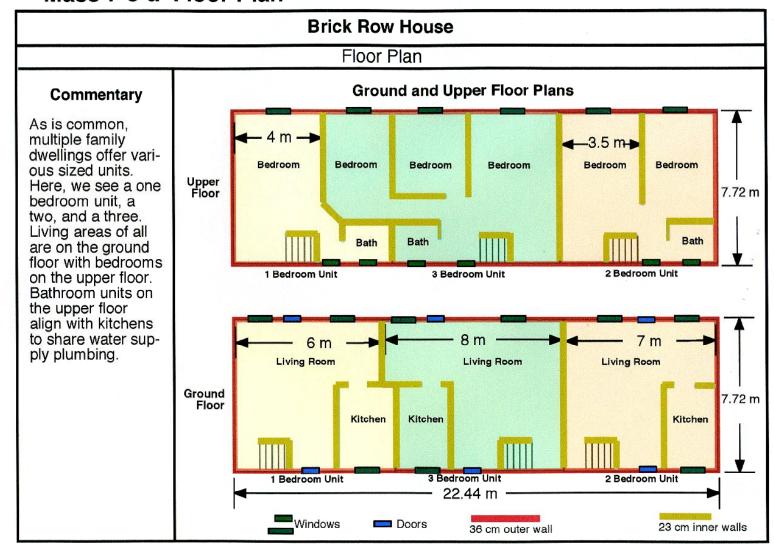


Figure 68. Mass 7-3-a floor plan.

Mass 7-3-b Isometric Floor Plan

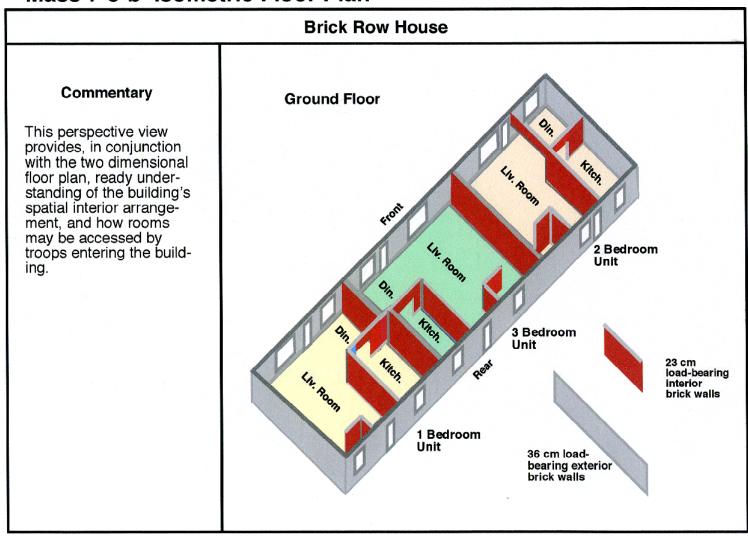


Figure 69. Mass 7-3-b floor plan.

Mass 7-3-c Isometric Floor Plan

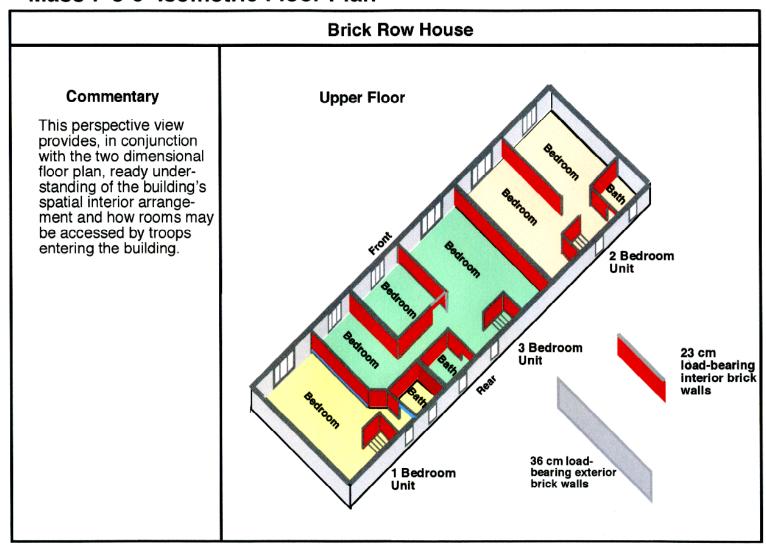


Figure 70. Mass 7-3-c isometric floor plan.

Mass 7-4 Construction

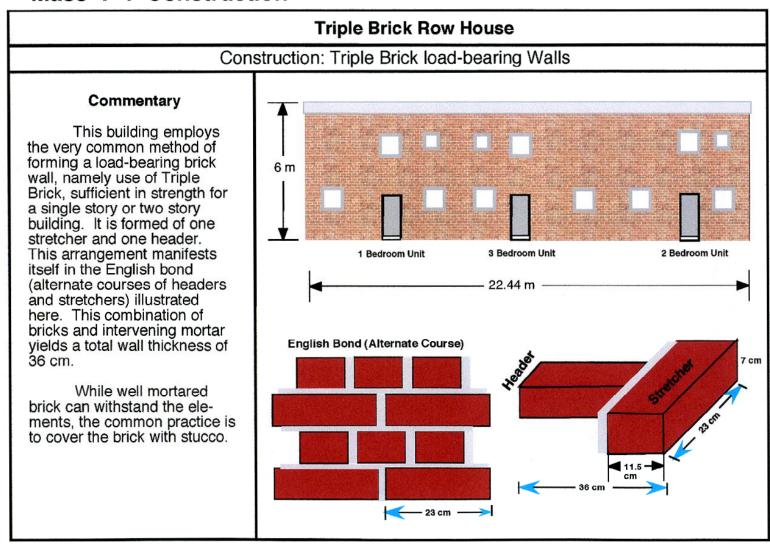


Figure 71. Mass 7-4 construction.

Mass 8-1 Place on Building Construction Chart

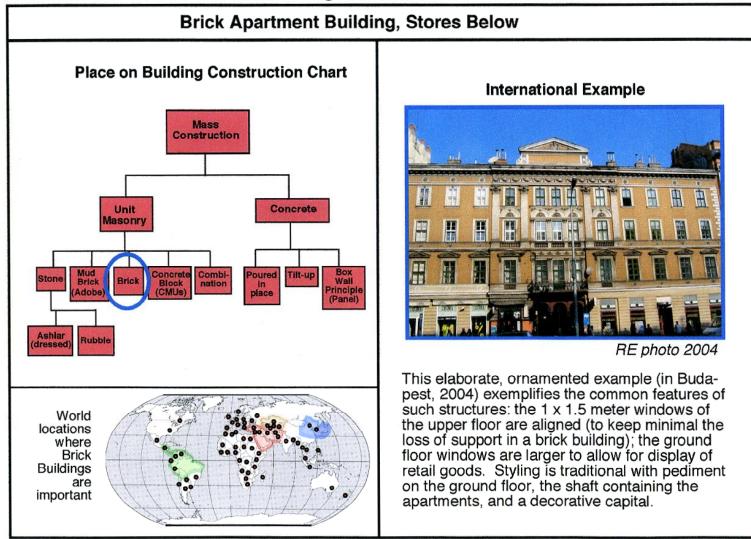


Figure 72. Mass 8-1 place on building construction chart.

Mass 8-2 Elevation

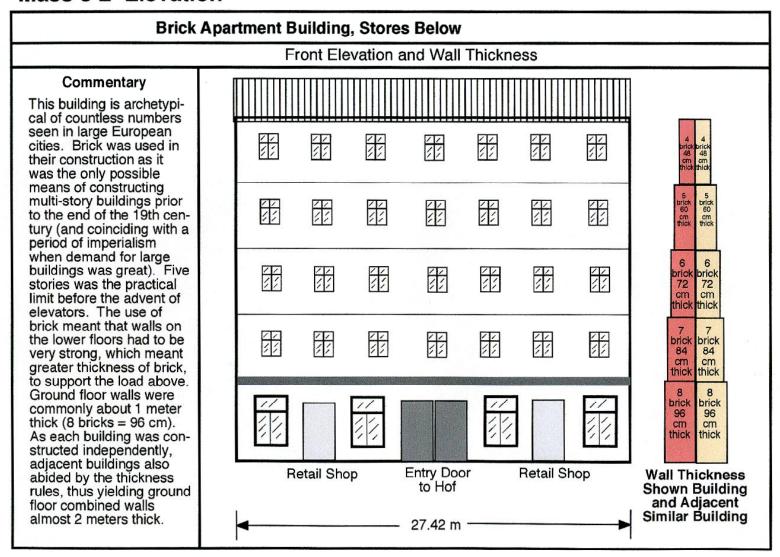


Figure 73. Mass 8-2 elevation.

Mass 8-3-a Floor Plan

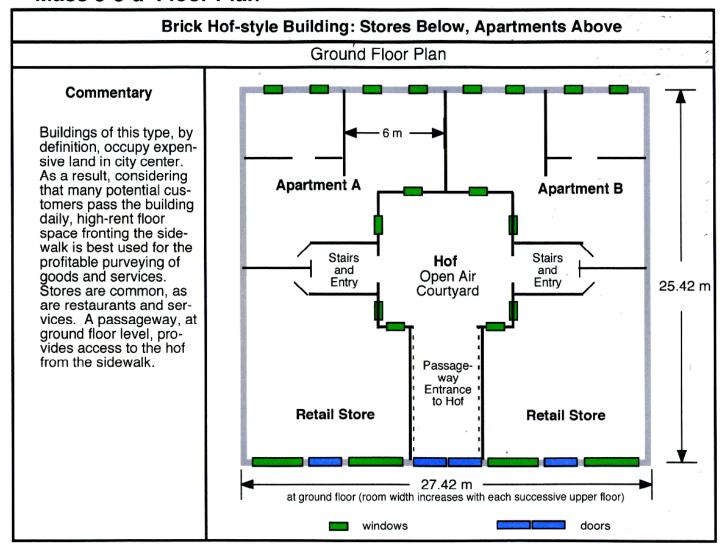


Figure 74. Mass 8-3-a floor plan.

Mass 8-3-b Floor Plan

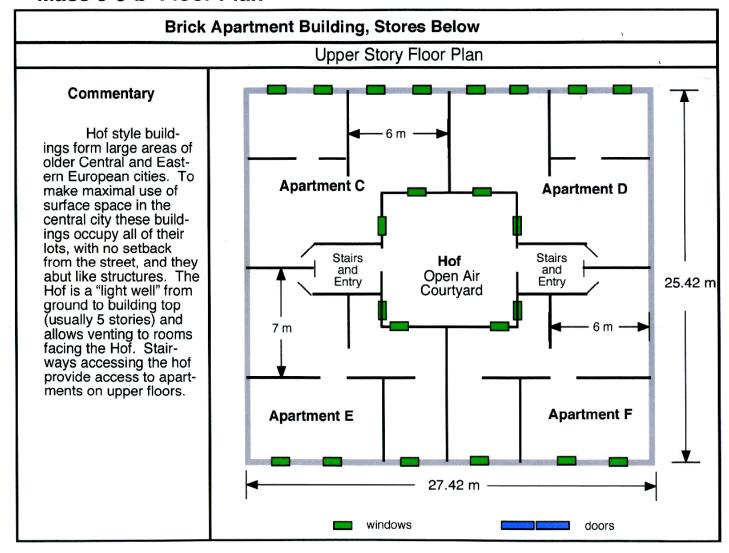


Figure 75. Mass 8-3-b floor plan.

Mass 8-4 Construction

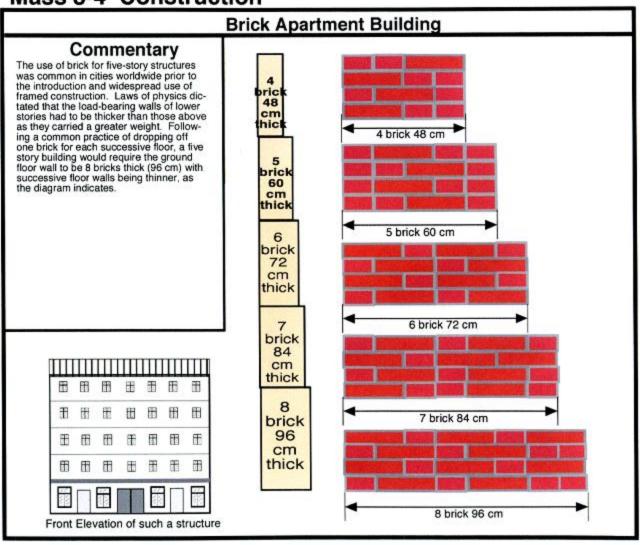


Figure 76. Mass 8-4 construction.

Mass 9-1 Place on Building Construction Chart

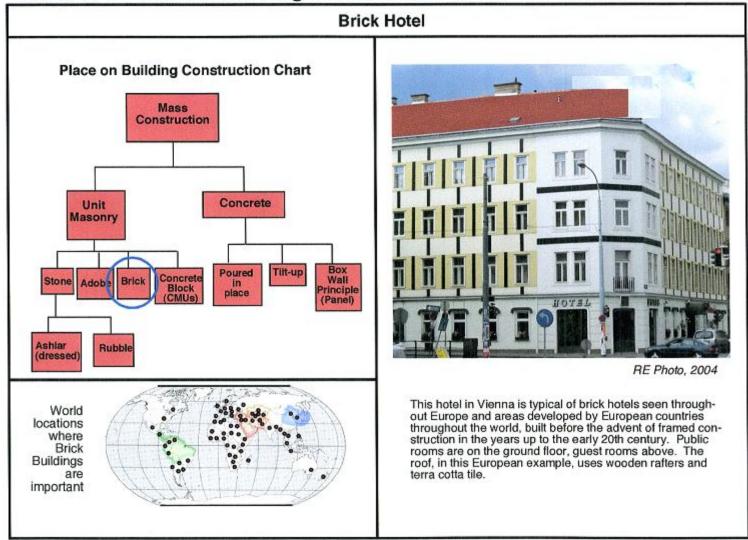


Figure 77. Mass 9-1 place on building construction chart.

Mass 9-2 Elevation

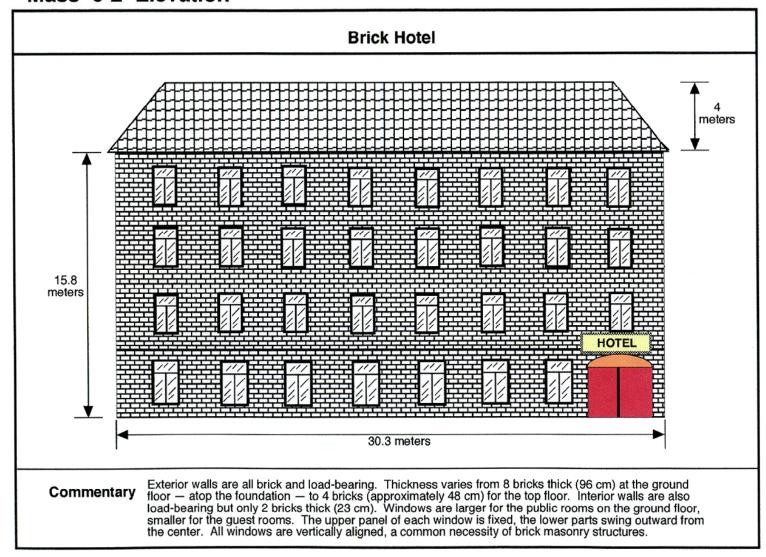


Figure 78. Mass 9-2 elevation.

Mass 9-3-a Floor Plans

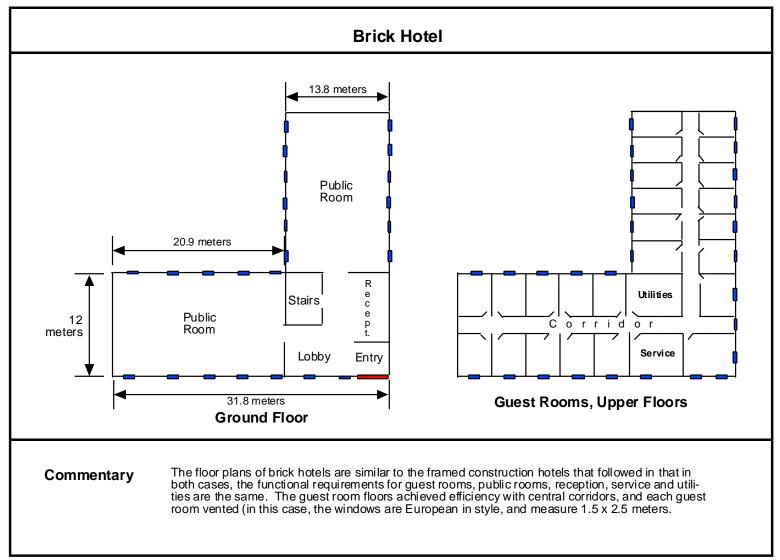


Figure 79. Mass 9-3-a floor plans.

Mass 9-4 Construction: Wall and Window

Brick Apartment Building, Stores Below

Wall Thickness of Brick Building, Measured at Windows at Ground and Fifth Floor



Wall thickness at Ground Floor: 96 cm (8 bricks)



Window at Fourth Floor: 1.5 meters high, 1 meter wide



Wall thickness at Fourth Floor: 48 cm (4 bricks)

RE Photos

The photos demonstrate how tall, mass, brick buildings must have very thick walls on the ground floor to support all loads above and have walls that get progressively thinner with each story upward. The ground floor wall is almost a full meter thick, the fourth floor close to half a meter.

Figure 80. Mass 9-4 construction: wall and window.

Mass 10-1 Place on Building Construction Chart

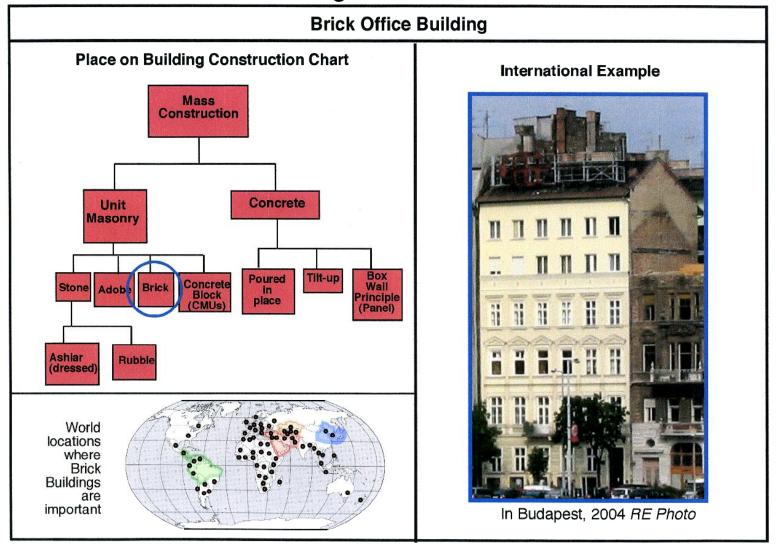


Figure 81. Mass 10-1 place on building construction chart.

Mass 10-2 Elevation

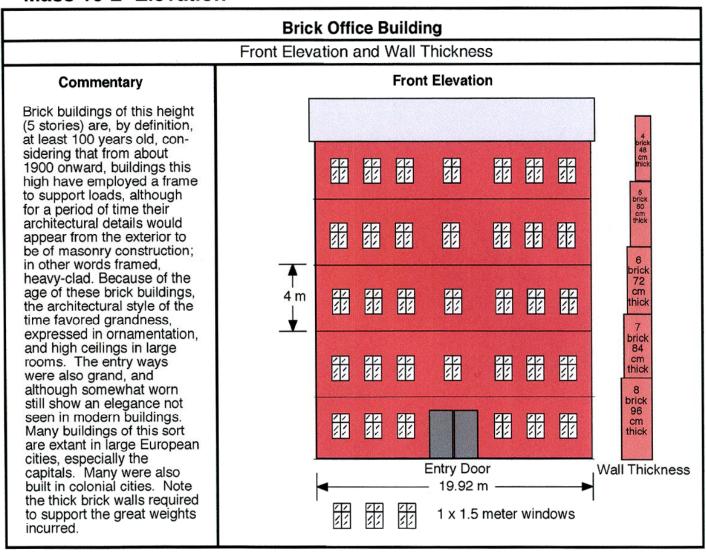


Figure 82. Mass 10-2 elevation.

Mass 10-3-a Floor Plan

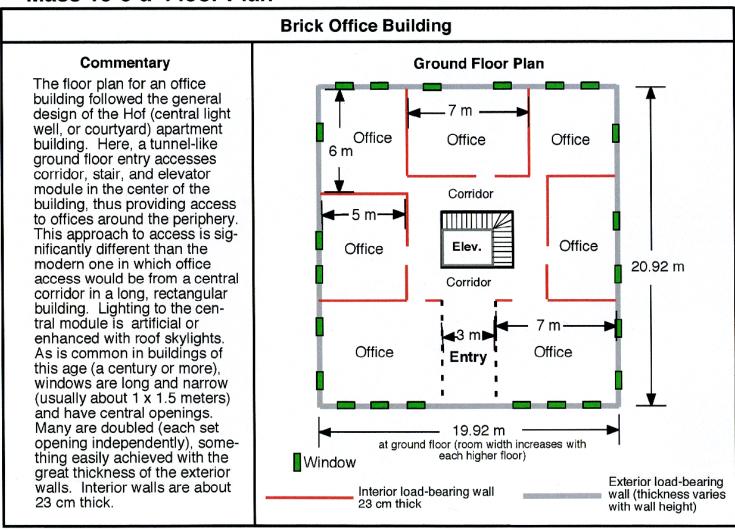


Figure 83. Mass 10-3-a floor plan.

Mass 10-3-b Floor Plan


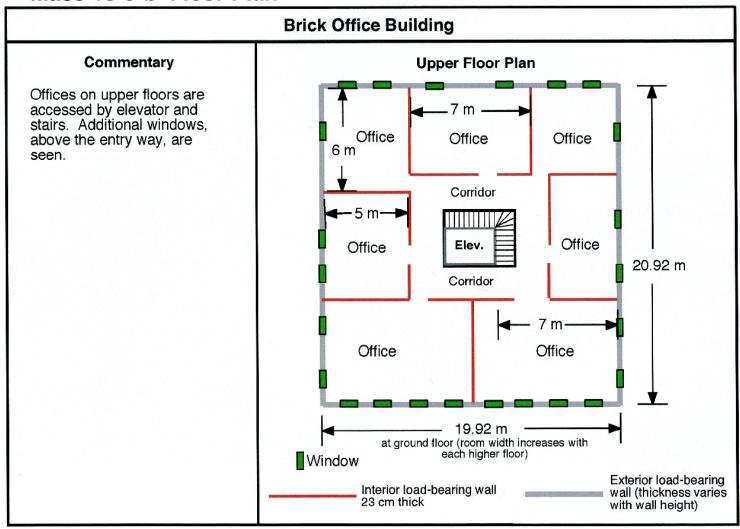


Figure 84. Mass 10-3-b floor plan.

Mass 10-4 Construction, Interiors

Brick Office Building

Entry, Stairway and Elevator

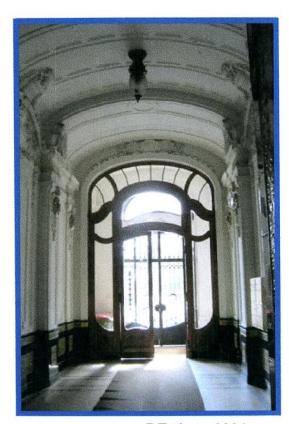

RE photo 2004



RE photo 2004

Commentary

Design of these buildings (this one in Vienna) required a long entry way to the center of the building, the location of the elevator and stairs. Photo on the left, looking outward to the street entrance, demonstrates the commonly seen grand ornamentation. The photo above shows an elaborate door entrance to an office, the Victorian style elevator cage, and the decorated stair handrail.

Figure 85. Mass 10-4 construction, interiors.

Mass 11-1 Place on Building Construction Chart

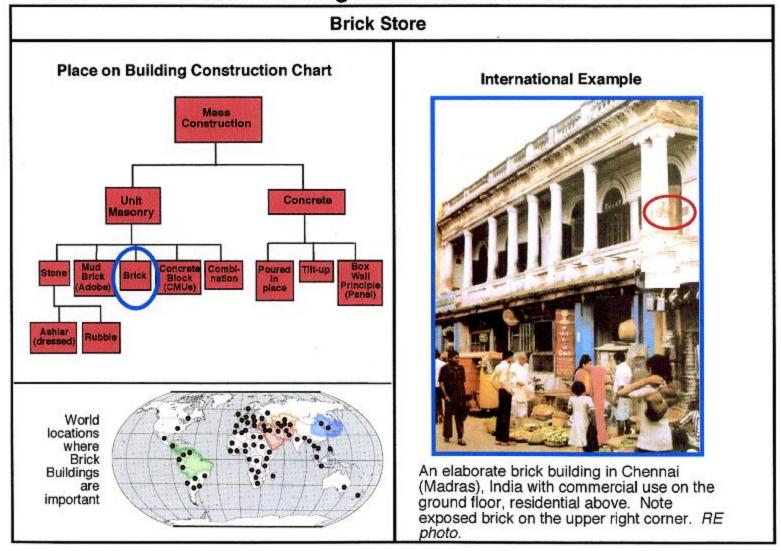


Figure 86. Mass 11-1 place on building construction chart.

Mass 11-2 Elevation

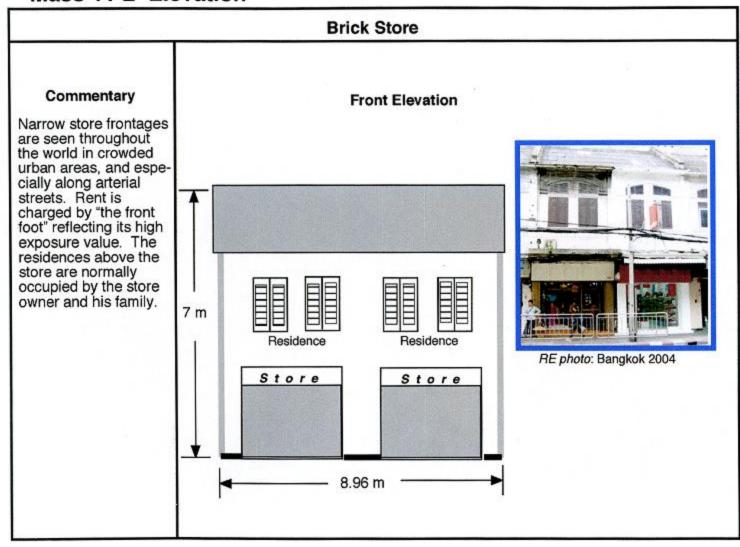


Figure 87. Mass 11-2 elevation.

Mass 11-3-a Floor Plan

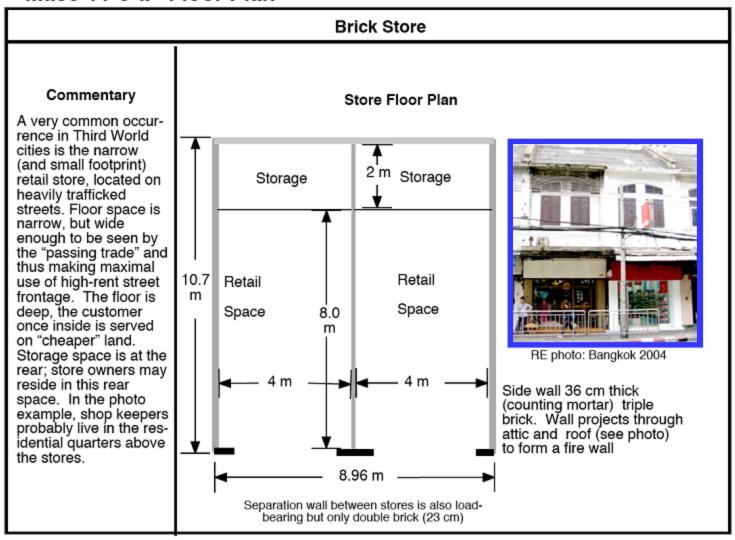


Figure 88. Mass 11-3-a floor plan.

Mass 11-4 Construction

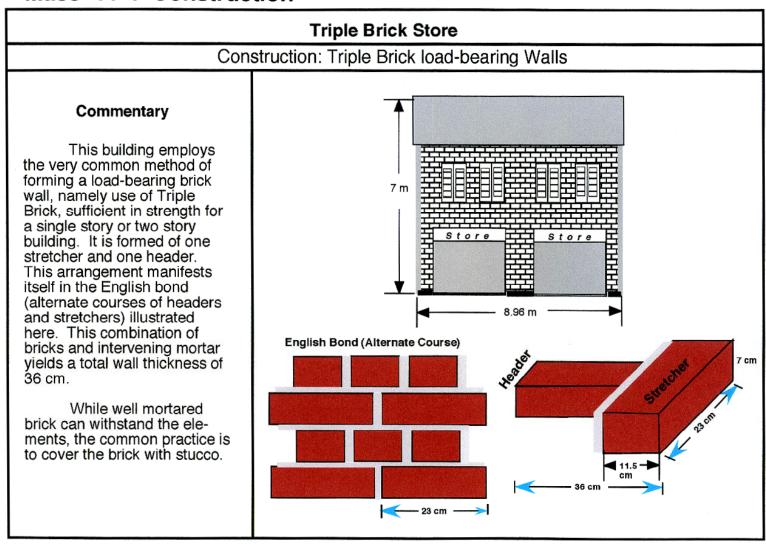


Figure 89. Mass 11-4 construction.

Mass 12-1 Place on Building Construction Chart

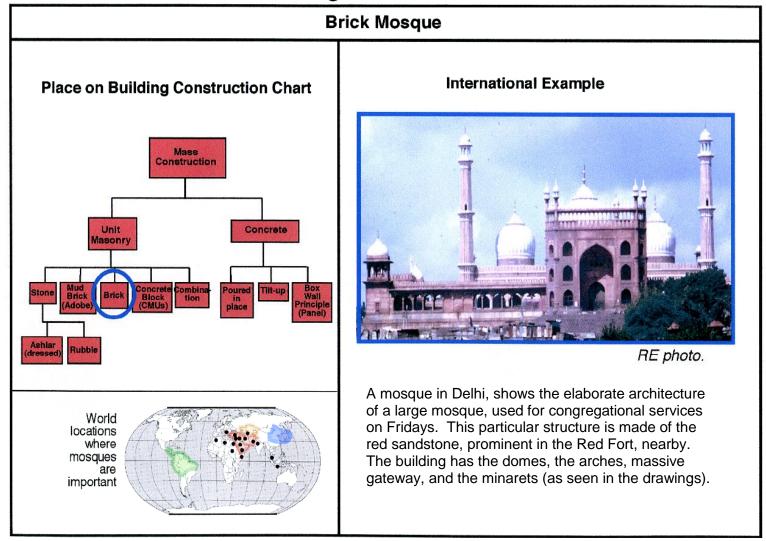


Figure 90. Mass 12-1 place on building construction chart.

Mass 12-2 Elevation and Floor Plan

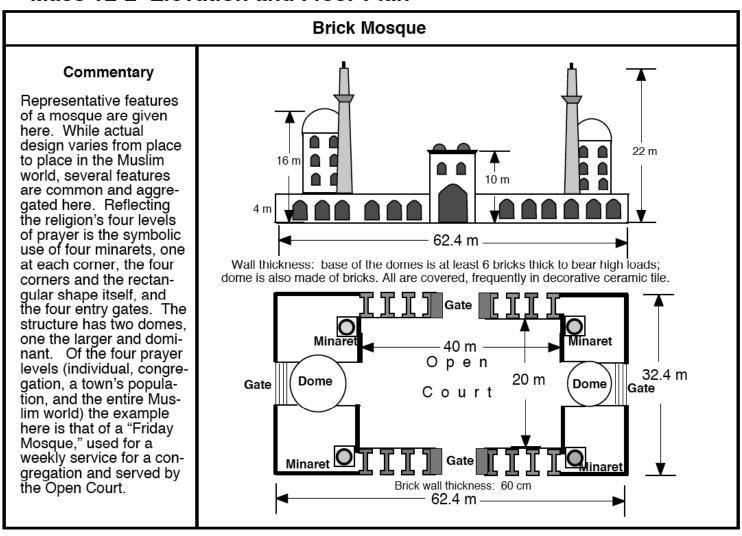


Figure 91. Mass 12-2 elevation and floor plan.

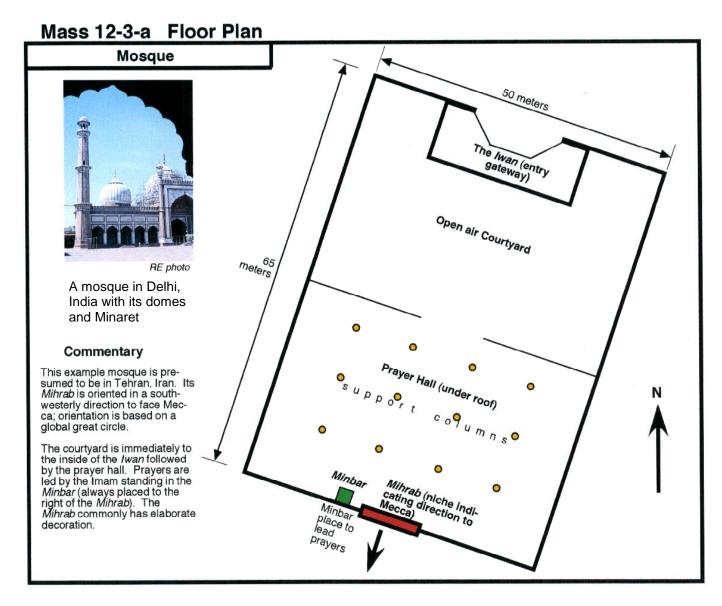


Figure 92. Mass 12-3-a floor plan.

INTENTIONALLY LEFT BLANK.

Mass 12-4 Construction

Mosque Commentary Considering that Islam is found in many diverse regions of the world, a variety of construction forms occur. Examples of con-Interior colstruction here, common mainly umns often to the Middle East, Central and use stacked stones. Southwest Asia, employ brick Brick and and stone construction. concrete are also Selected are features basic to used. all mosques, i.e., the entry gateway (the Iwan); minarets; RE photo domes: interior columns to Domes are complex structures. support the roof of the They can be made of brick, enclosed prayer room. Examstone, wood, or reinforced conples of materials and dimencrete. sions are intended to represent an average. Many variations occur due to local physical situations and to history; recently built mosques will often employ modern building techniques RE photo and materials, such as rein-A minaret with its Cross-section of part of the exterior wall, 96 cm forced concrete. typical tapered form and the thick. The complex platforms for the Flemish bond, illustrated, call to prayer. is commonly used in Stairways to the top are internal. mosque construction. 96 cm

Figure 93. Mass 12-4 construction.

Mass 13-1 Place on Building Construction Chart

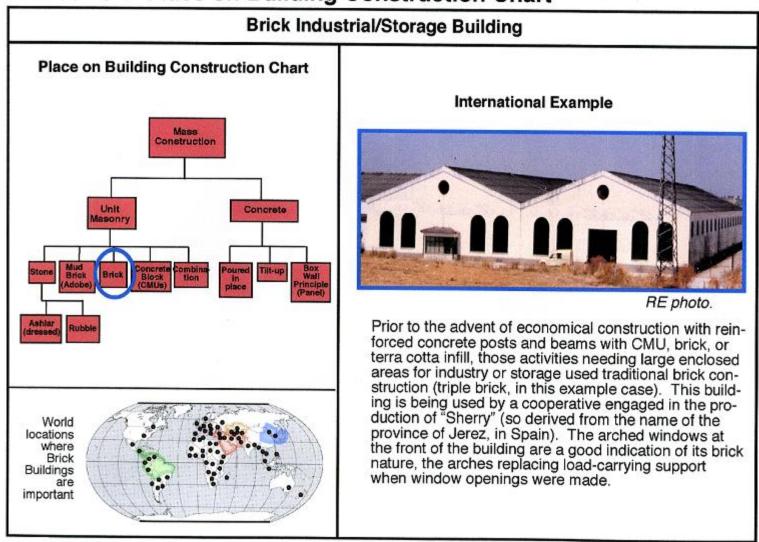


Figure 94. Mass 13-1 place on building construction chart.

Mass 13-2 Elevation

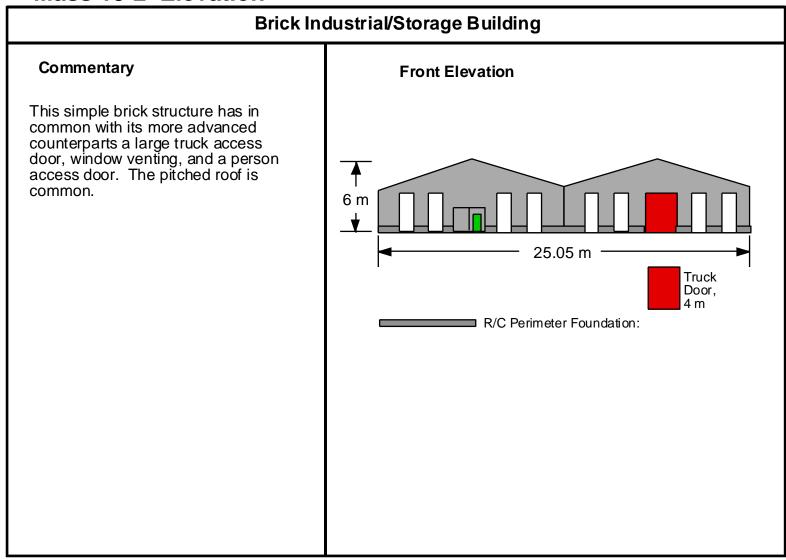


Figure 95. Mass 13-2 elevation.

Mass 13-3-a Floor Plan

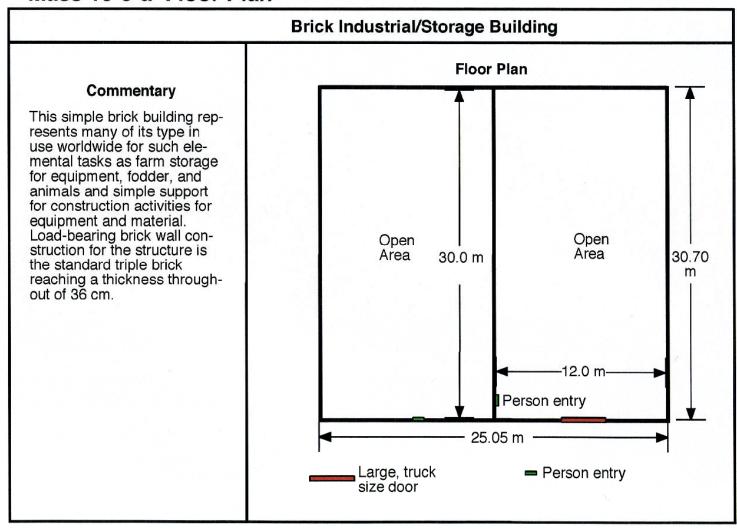


Figure 96. Mass 13-3-a floor plan.

Mass 13-4 Construction

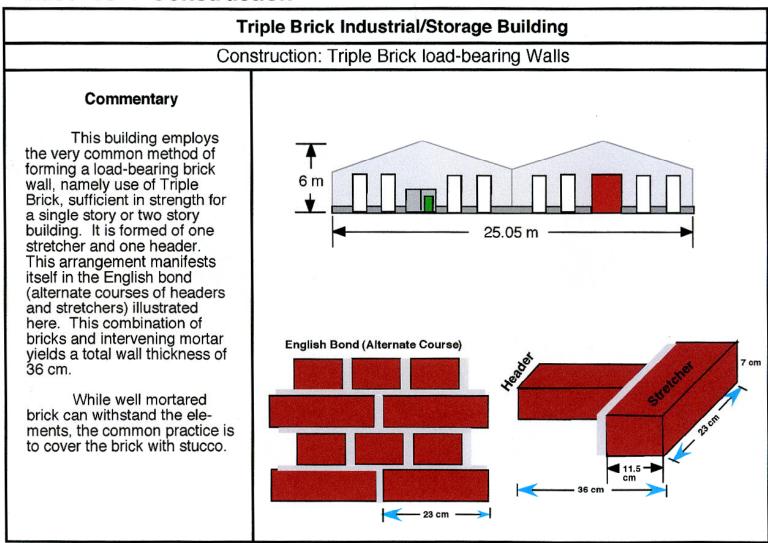


Figure 97. Mass 13-4 construction.

Mass 14-1 Place on Building Construction Chart

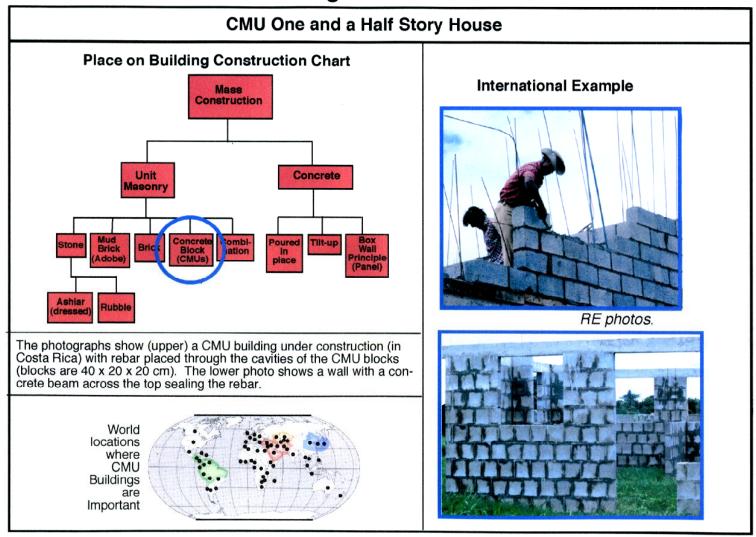


Figure 98. Mass 14-1 place on building construction chart.

Mass 14-2 Elevations

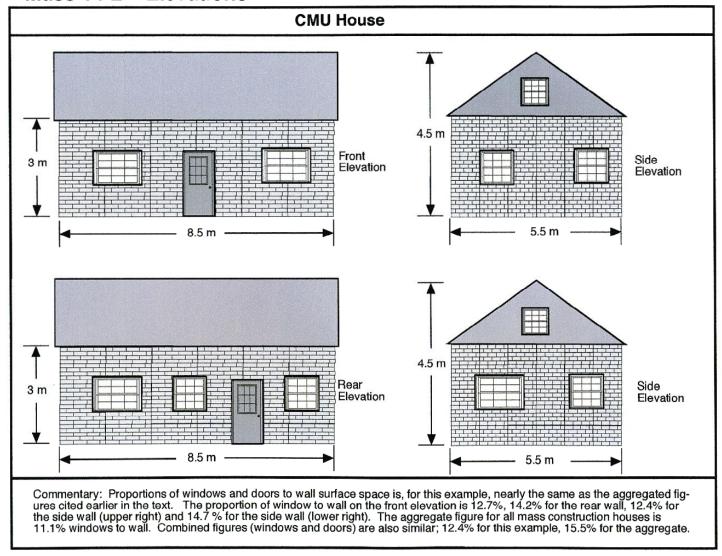


Figure 99. Mass 14-2 elevations.

Mass 14-3-a Floor Plan

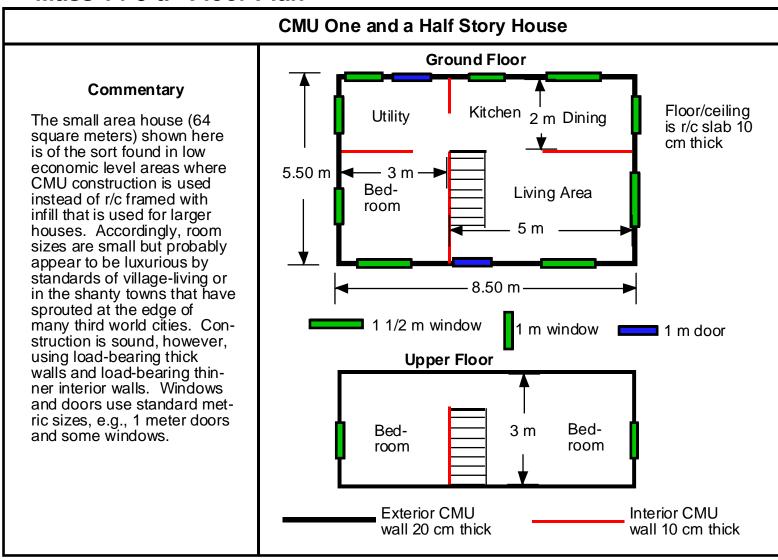


Figure 100. Mass 14-3-a floor plan.

Mass 14-4-a Construction

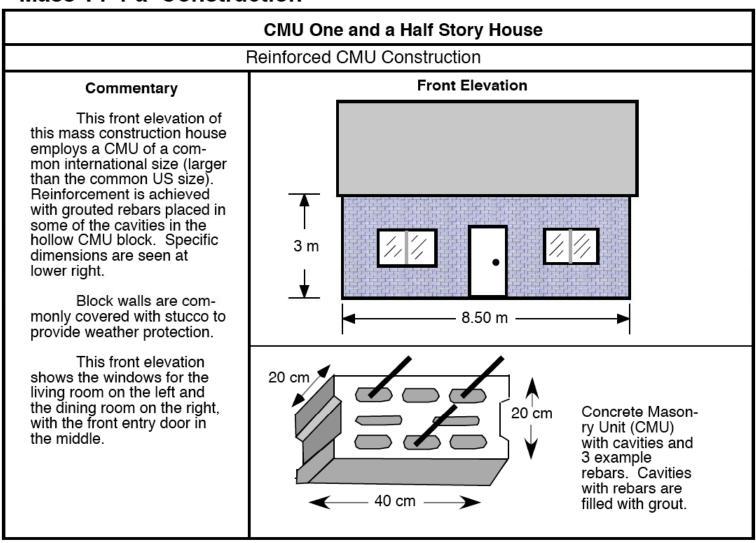


Figure 101. Mass 14-4-a construction.

Mass 14-4-b Constructon

CMU One and a Half Story House



Two cavity CMU blocks have a single rebar in each cavity. Grout has been poured and tamped as each course is added. Maximum construction here meets earthquake code in California. *RE photo*.



Another method of reinforcement uses two rebars placed in alternate cavities.



The same wall as above showing double rebar at the wall's corner. *RE photo*.

Commentary

Use of reinforcement and its density and use of grout vary from no reinforcement in simple Third World buildings and simple structures in the First World to maximum reinforcement in well capitalized construction in advanced areas, especially where code dictates and structures are built to last.

Figure 102. Mass 14-4-b construction.

Mass 15-1 Place on Building Construction Chart

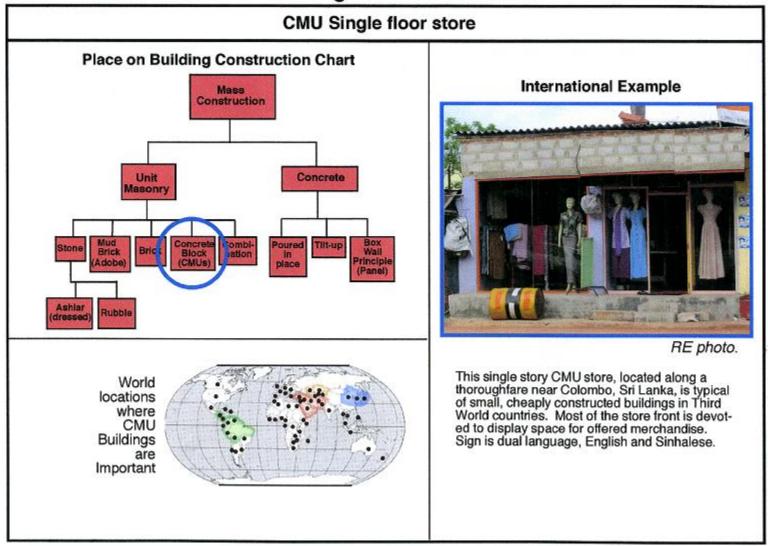


Figure 103. Mass 15-1 place on building construction chart.

Mass 15-2 Elevations

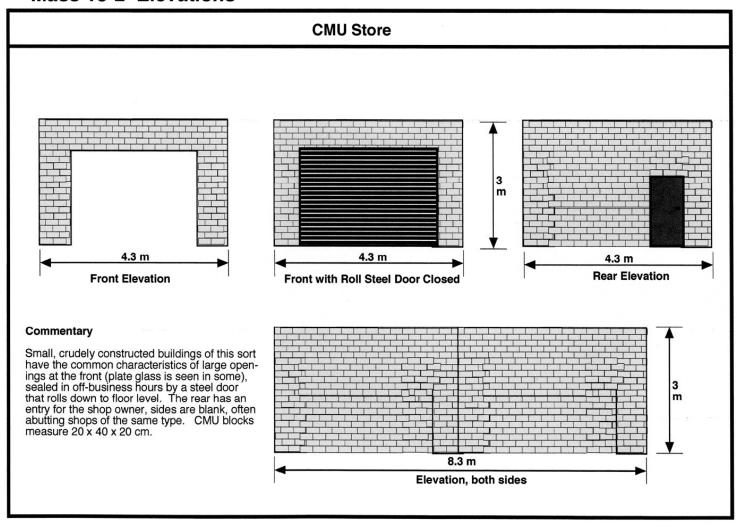


Figure 104. Mass 15-2 elevations.

Mass 15-3-a Floor Plan

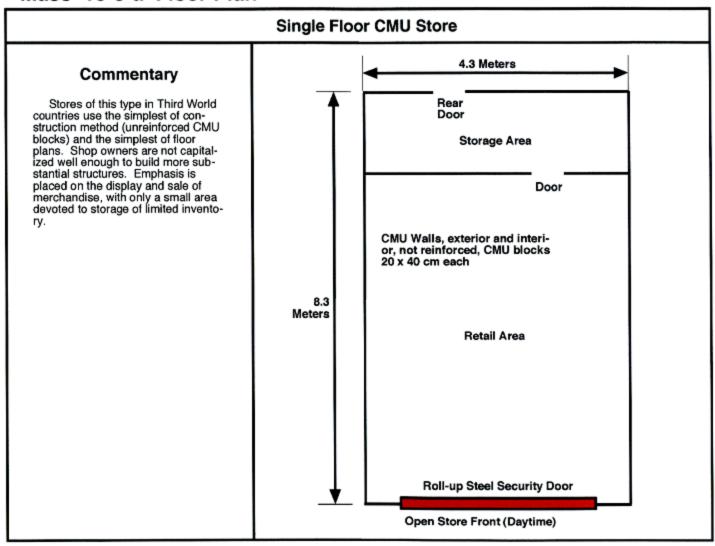


Figure 105. Mass 15-3-a floor plan.

Mass 15-4 Construction

CMU Single floor Store



Top row CMUs being laid in construction of a single story building. No rebar has been used in its construction. This form of construction is common for single story structures in Third World countries.



CMU blocks in Tel Aviv, Israel. Two styles of cavities are seen. Blocks measure 40 \times 20 \times 20 cm.

Figure 106. Mass 15-4 construction.

Mass 16-1 Place on Building Construction Chart

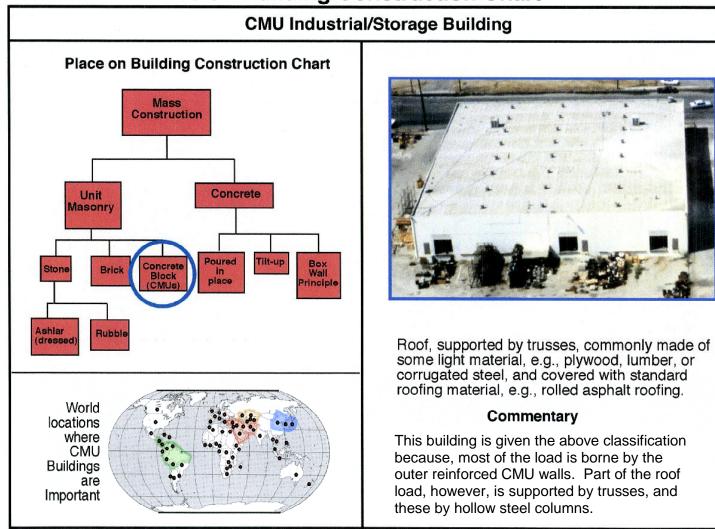


Figure 107. Mass 16-1 place on building construction chart.

Mass 16-2 Elevation

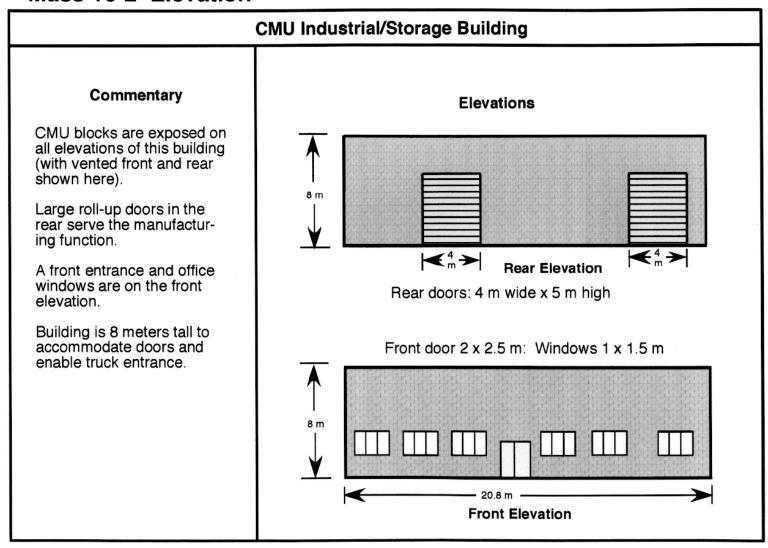


Figure 108. Mass 16-2 elevation.

Mass 16-3-a Floor Plans

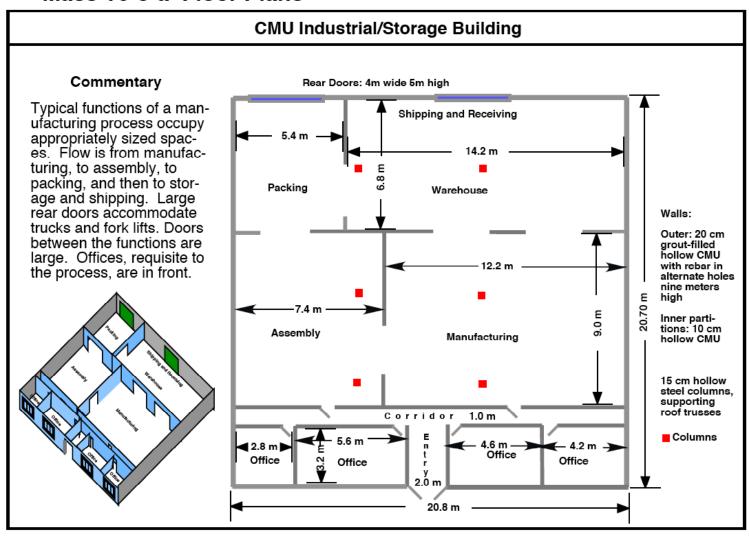


Figure 109. Mass 16-3-a floor plans.

Mass 16-3-b Isometric Floor Plan

CMU Industrial/Storage Building Commentary This building is classed as a mass construction structure because of the use of CMU blocks (20 cm thick) to form the outer wall. To provide adequate strength, for this outer wall of 9 meters in height, the blocks must be reinforced with rebar (in every other cavity) and these then filled with grout. The 20 meter trusses (in blue, and stretching from side wall to side wall) that assist in bearing the weight of the roof, must be supported by columns (in red). While this example is drawn to a specification of 20 x 20 meters, observation of build-20.71 ings of this type in various parts of the world suggests Columns that most such structures are longer than they are wide. A typical example would be a Trusses structure that is 34 m wide by 40 m long.

Figure 110. Mass 16-3-b isometric floor plan.

Mass 16-4 Construction

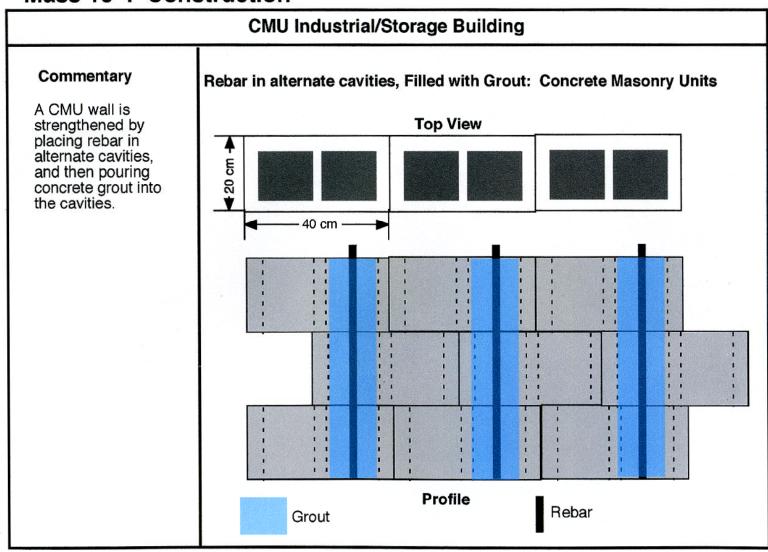


Figure 111. Mass 16-4 construction.

Mass 17-1 Place on Building Construction Chart

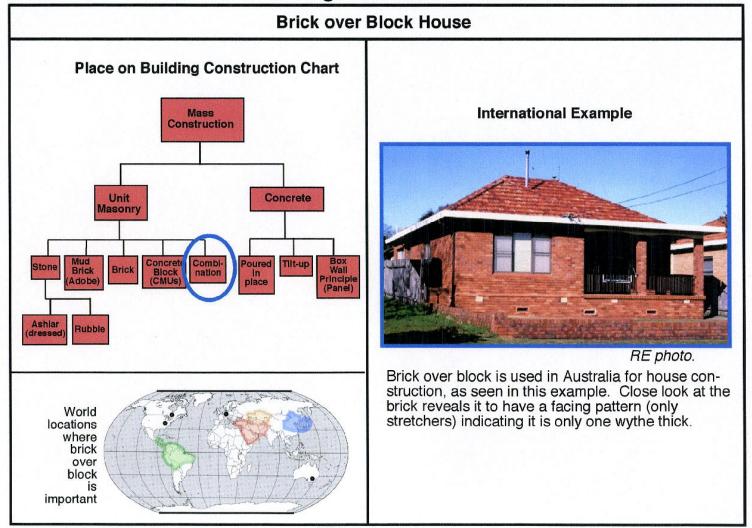


Figure 112. Mass 17-1 place on building construction chart.

Mass 17-2 Elevation and Construction

Brick over Block House Brick Covering Concrete Masonry Units (CMUs) Commentary Here, a brick layer covers concrete masonry units (CMUs) to provide protection from the elements. Exposed are the sides of stretchers, laid in what is called a facing pattern. The brick layer is 11.5 cm thick. Total wall is 32.5 cm thick, given 1 cm thickness of mortar. The Front Elevation CMU blocks, along with the perimeter foundation are load-bearing; the brick layer is but a veneer. Note: bricks rest upon an extension of the concrete perime-CMU^{cm} ter foundation but are not load bearing. **Block** CMU wall commonly employs strengthening with rebar placed O Concrete 0 through some of the cavities, then filled with OPerimeter 0 grout. O Poundation o

Figure 113. Mass 17-2 elevation and construction.

Mass 17-3-a Floor Plan and Construction

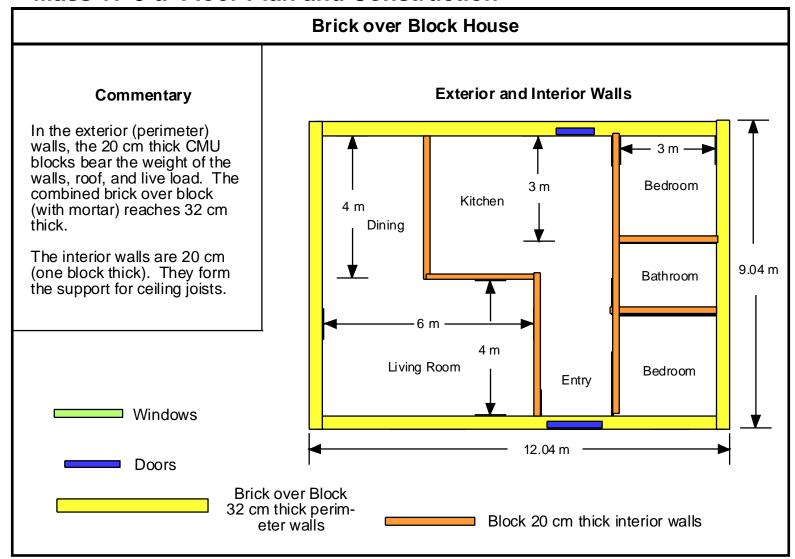


Figure 114. Mass 17-3-a floor plan and construction.

Mass 17-4 Construction

Brick over Block House

Load bearing walls

Commentary

In this full two story example, in Costa Rica, a concrete beam has been placed at the top of the row of CMUs of the ground floor as a place to connect a concrete slab floor/ceiling. The same sort of column has been built on the top of the second floor (note the forms have not been removed on the left side). A truss supported roof is in the process of construction. As can be seen in the photo, only the CMUs are an integral part of the structure. The brick fac-ing is applied as a decorative and weather resistant cover.



Two story CMU house under construction in Costa Rica.

RE photo.

Figure 115. Mass 17-4 construction.

Mass 18-1 Place on Building Construction Chart

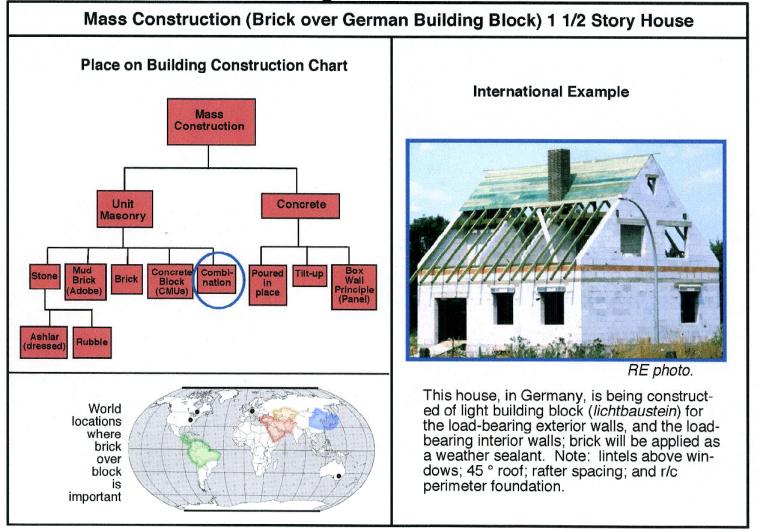


Figure 116. Mass 18-1 place on building construction chart.

Mass 18-2 Elevation

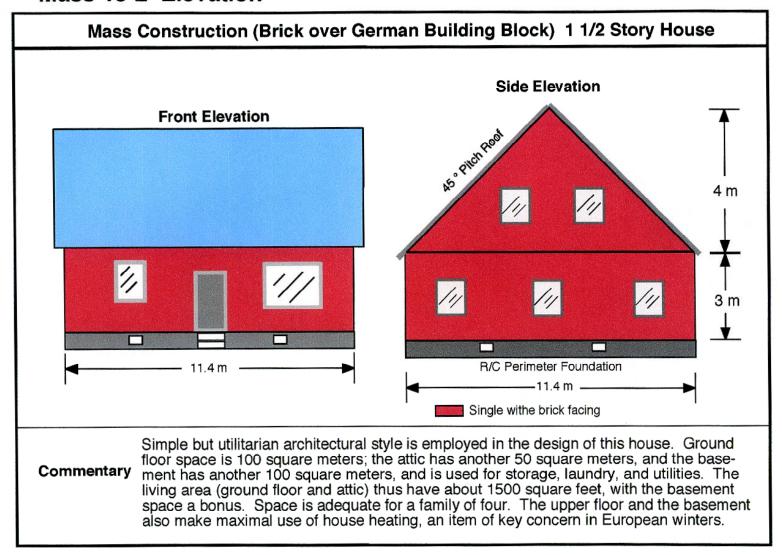


Figure 117. Mass 18-2 elevation.

Mass 18-3-a Floor Plan

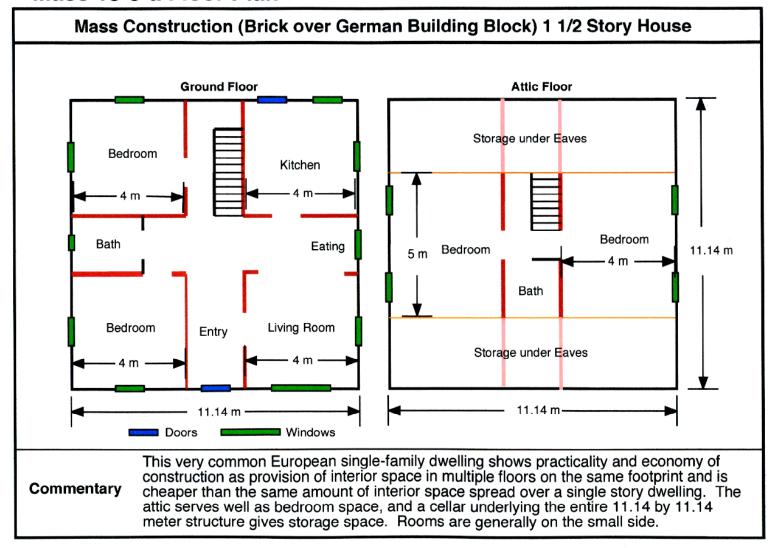


Figure 118. Mass 18-3-a floor plan.

Mass 18-4-a Construction

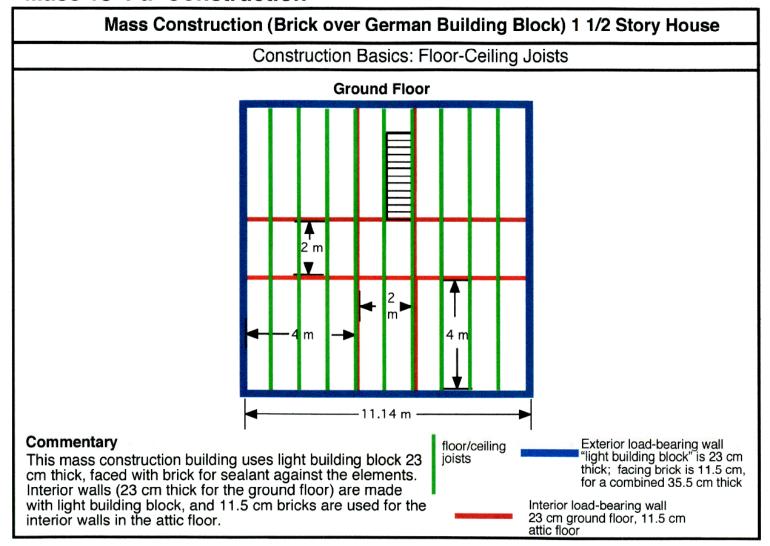


Figure 119. Mass 18-4-a construction.

Mass 18-4-b Construction

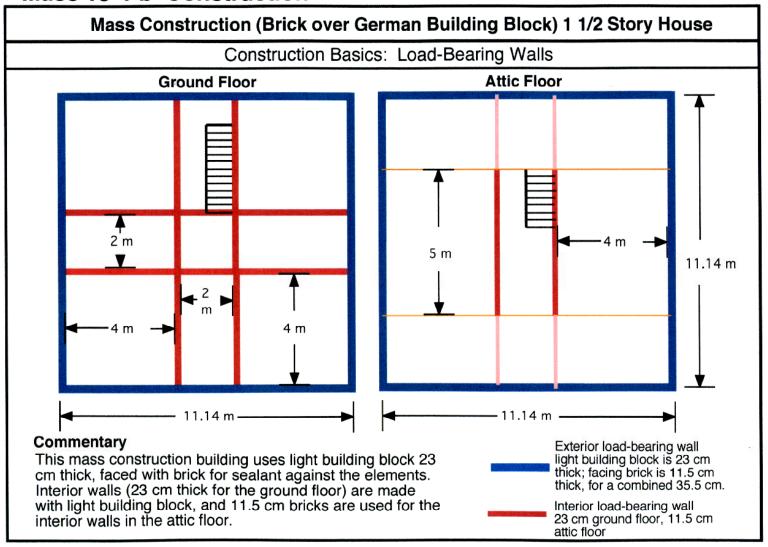


Figure 120. Mass 18-4-b construction.

Mass 18-4-c Construction

Mass Construction (Brick over German Building Block) 1 1/2 Story House

Construction: Light Building Block with Brick Cover

Commentary

A form of mass construction common in Western Europe employs a large (46 x 23 x 23 cm) building block made of composition materials and light in weight. These blocks are not formed with holes for the placement of rebar; their large size alone provides the necessary strength to uphold all structural loads.

Their light material, however, requires a protective cover from the elements. Stucco is often used, and in this example, courses of brick are mortared to the building block.

This front elevation shows the windows for the living room on the left and the dining room on the right, with the front entry door in the middle.

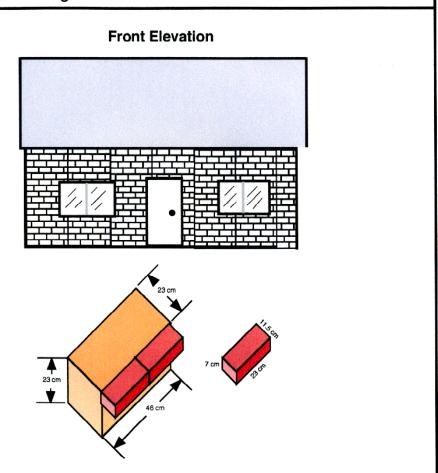


Figure 121. Mass 18-4-c construction.

Mass 19-1 Place on Building Construction Chart

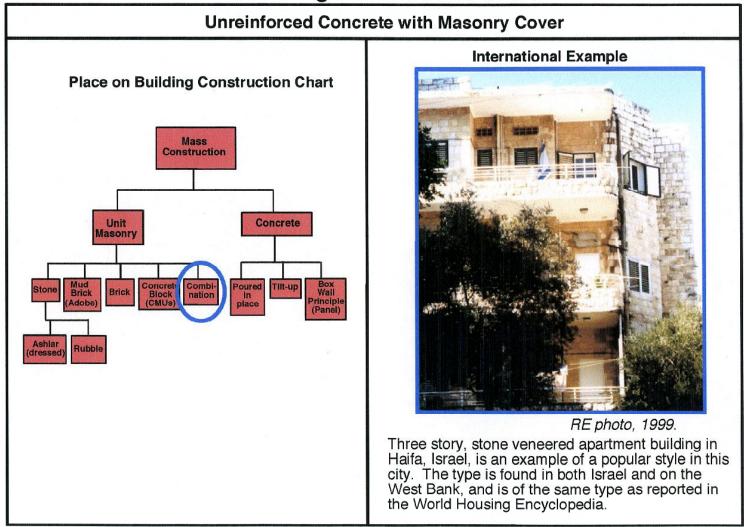


Figure 122. Mass 19-1 place on building construction chart.

Mass 19-2 Elevation

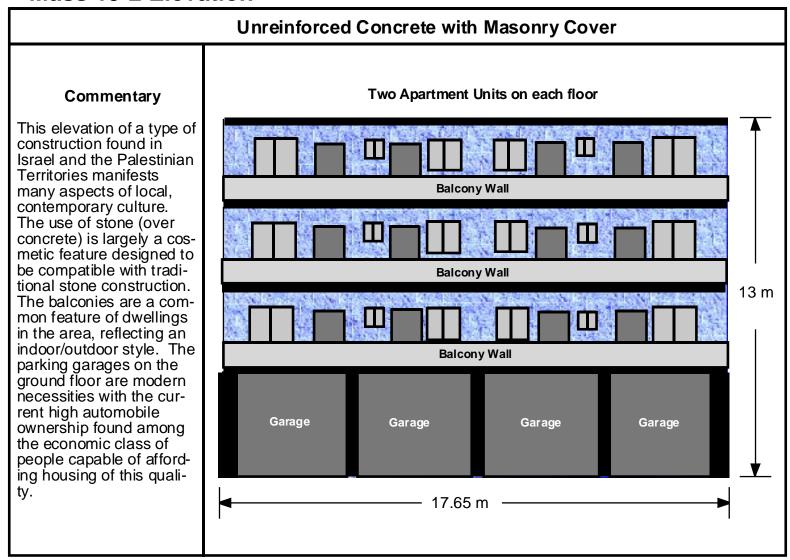


Figure 123. Mass 19-2 elevation.

Mass 19-3-a Floor Plan

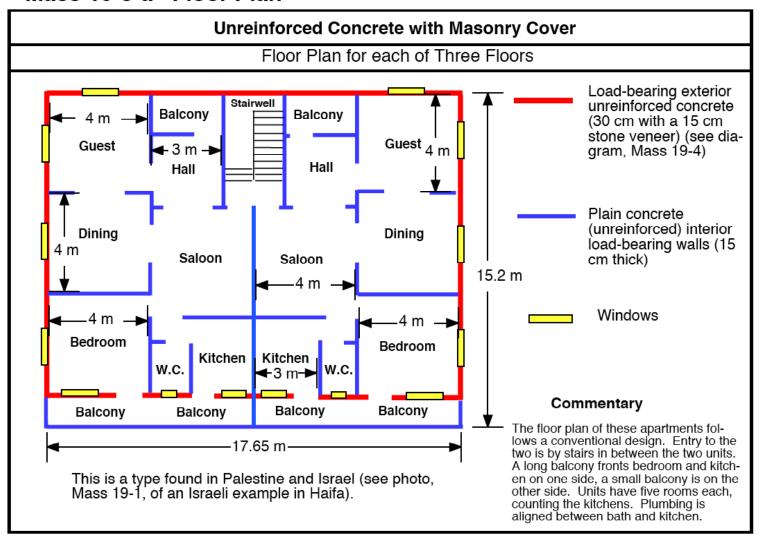


Figure 124. Mass 19-3-a floor plan.

Mass 19-3-b Isometric Floor Plan

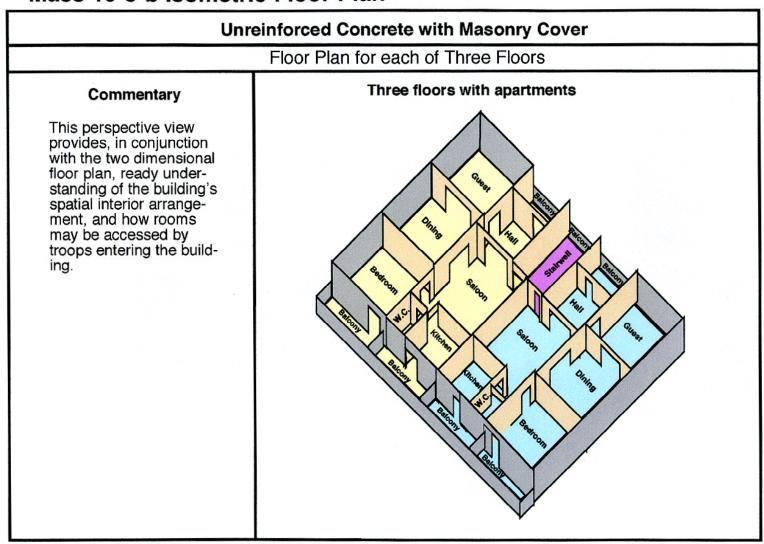


Figure 125. Mass 19-3-b isometric floor plan.

Mass 19-4 Construction Method and Dimensions

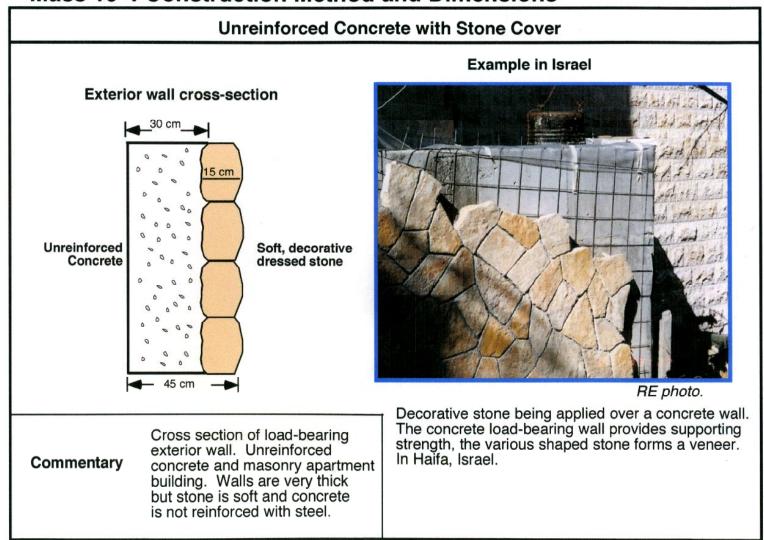


Figure 126. Mass 19-4 construction method and dimensions.

Mass 20-1 Place on Building Construction Chart

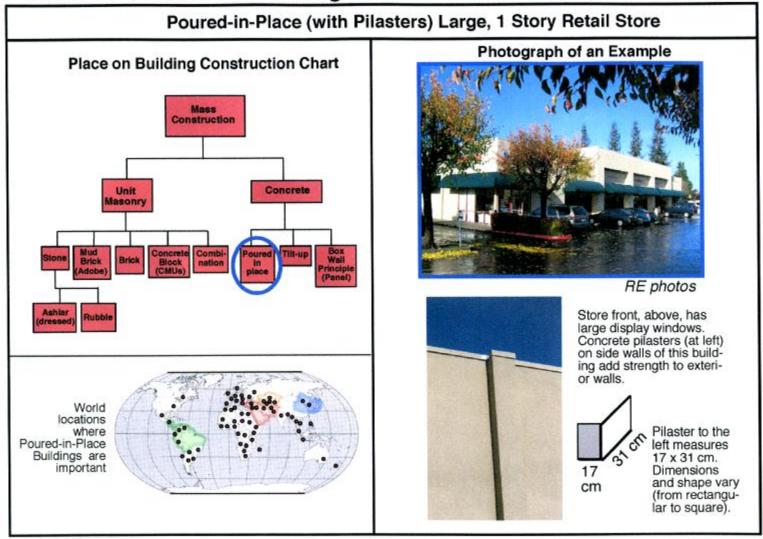


Figure 127. Mass 20-1 place on building construction chart.

Mass 20-2 Elevation

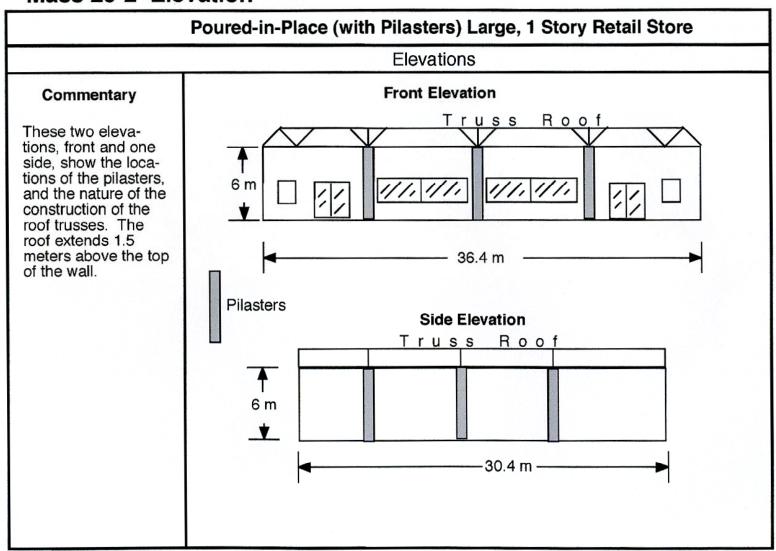


Figure 128. Mass 20-2 elevation.

Mass 20-3-a Floor Plan

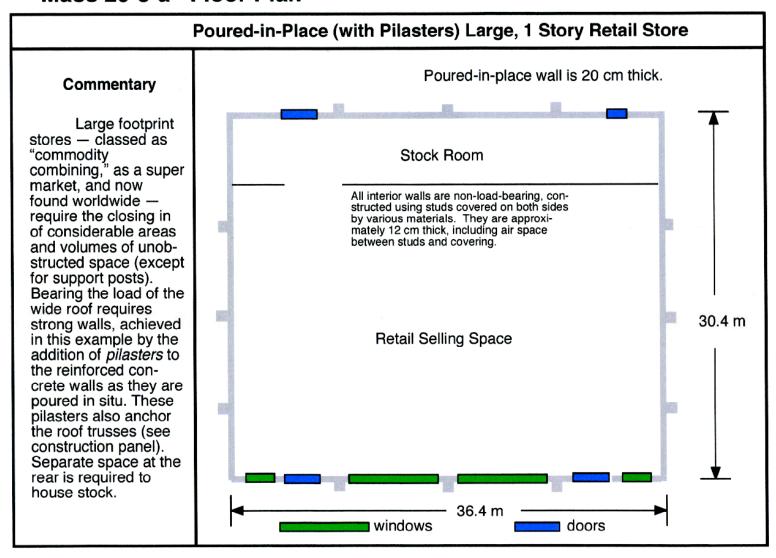


Figure 129. Mass 20-3-a floor plan.

Mass 20-4 Construction

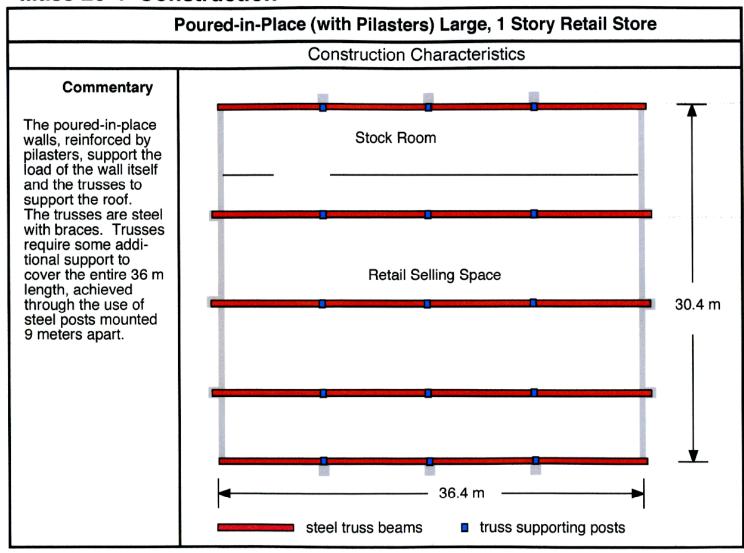


Figure 130. Mass 20-4 construction.

Mass 21-1 Place on Building Construction Chart

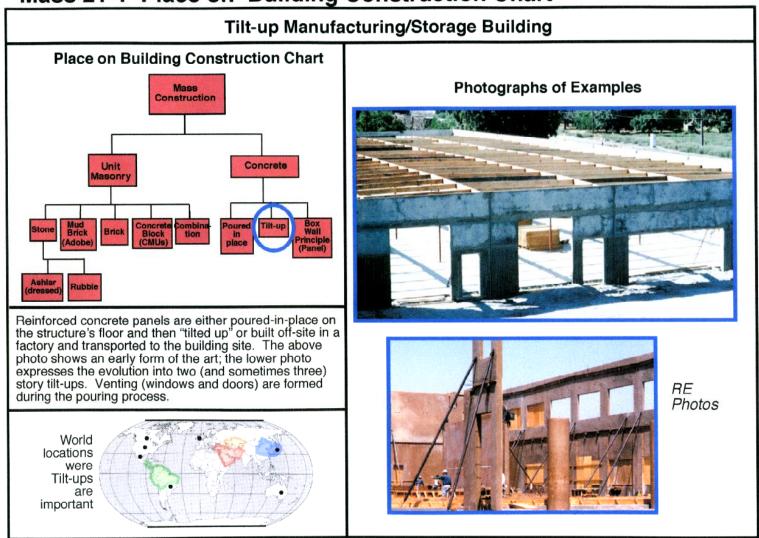


Figure 131. Mass 21-1 place on building construction chart.

Mass 21-2 Elevations

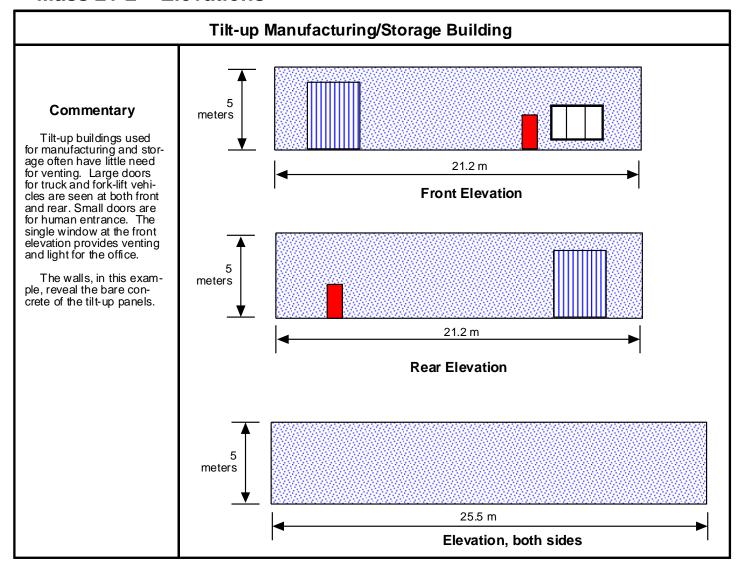


Figure 132. Mass 21-2 elevations.

Mass 21-3-a Floor Plan

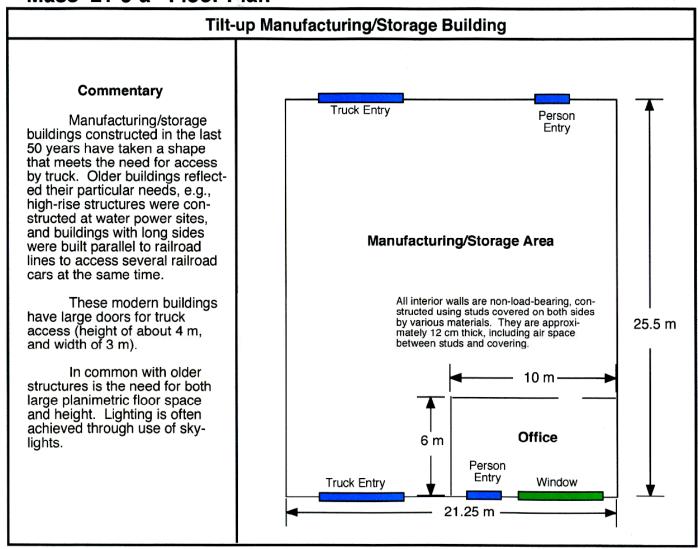


Figure 133. Mass 21-3-a floor plan.

Mass 21-4-a Construction

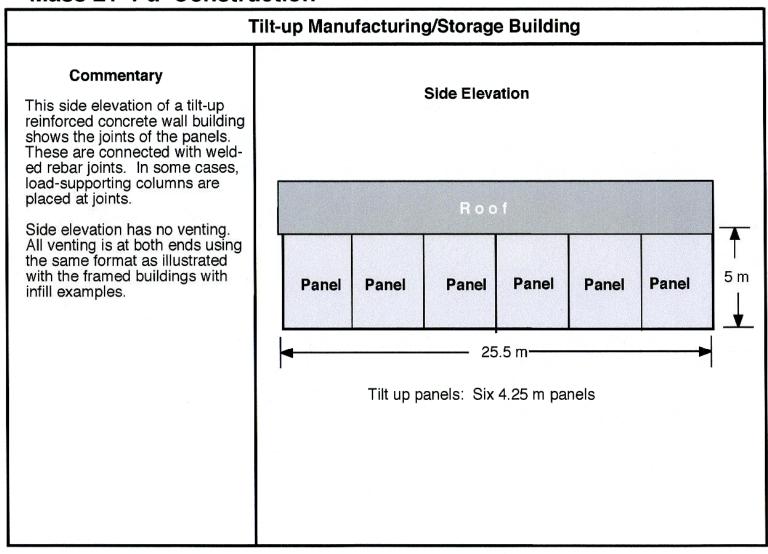


Figure 134. Mass 21-4-a construction.

Mass 21-4-b Construction

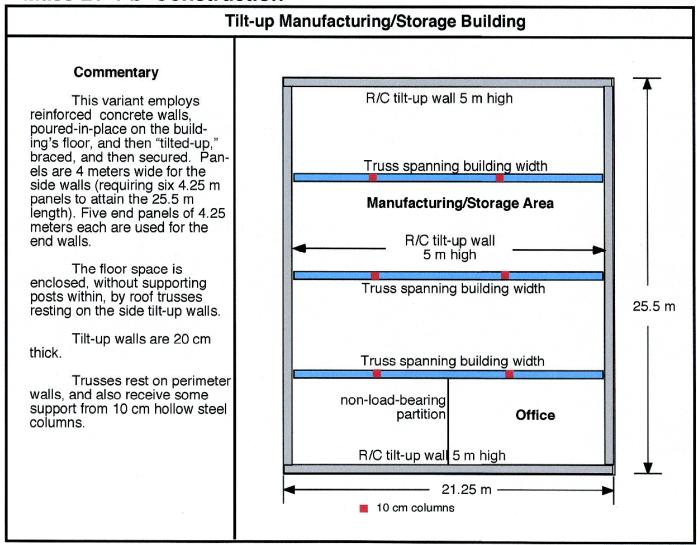


Figure 135. Mass 21-4-b construction.

Mass 22-1 Place on Building Construction Chart

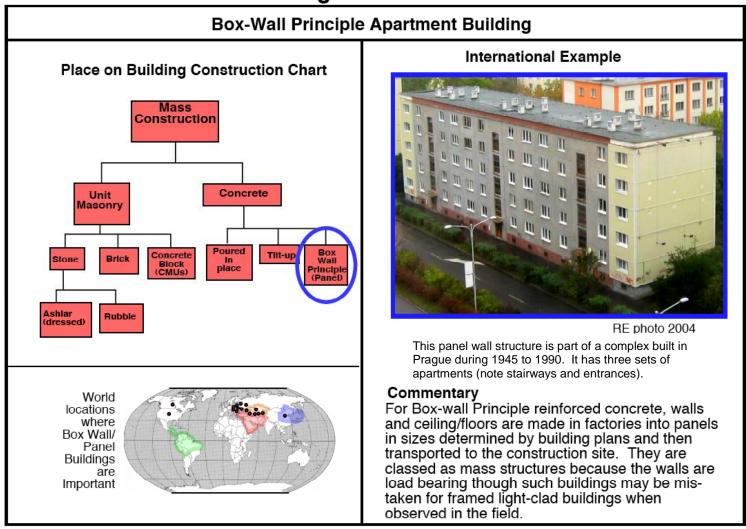


Figure 136. Mass 22-1 place on building construction chart.

Mass 22-2 Elevation

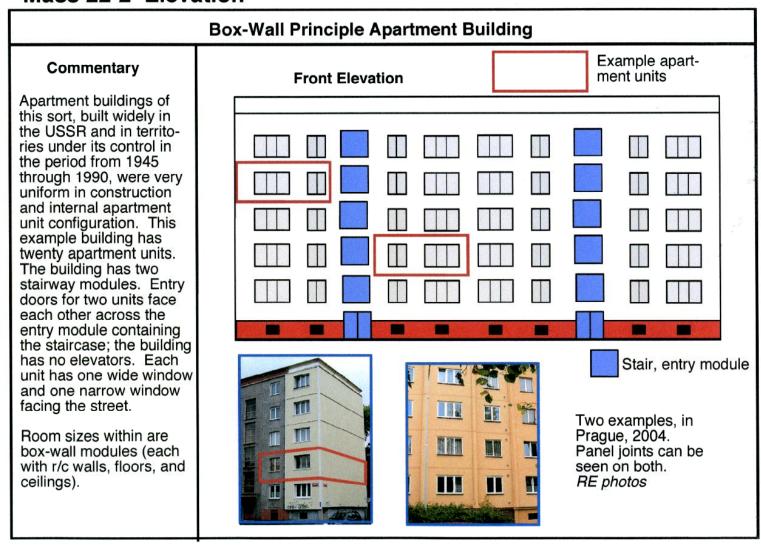


Figure 137. Mass 22-2 elevation.

Mass 22-3-a Floor Plan

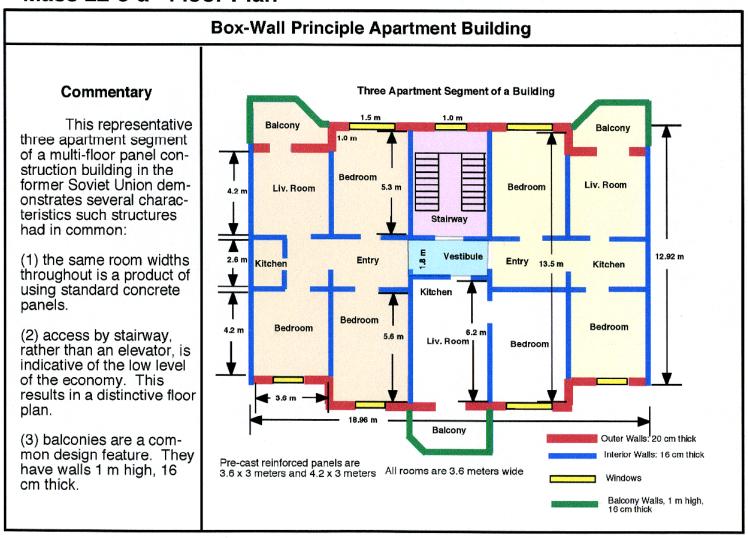


Figure 138. Mass 22-3-a floor plan.

Mass 22-3-b Floor Plan

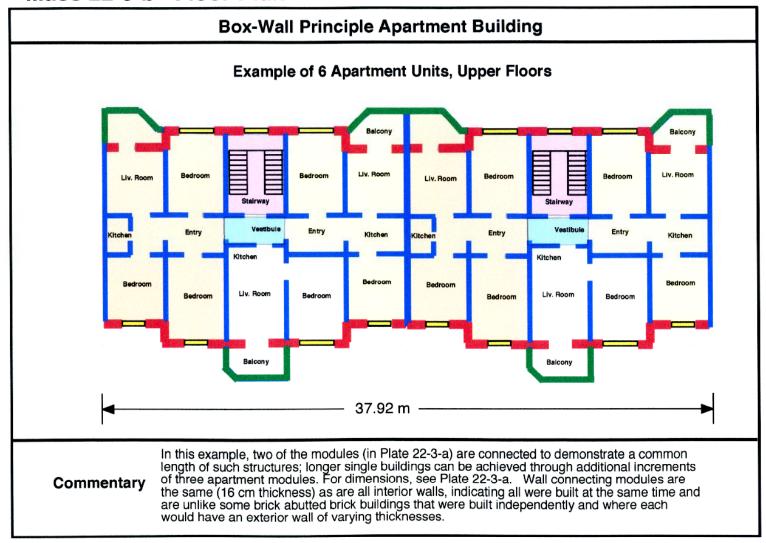


Figure 139. Mass 22-3-b floor plan.

Mass 22-3-c Floor Plan

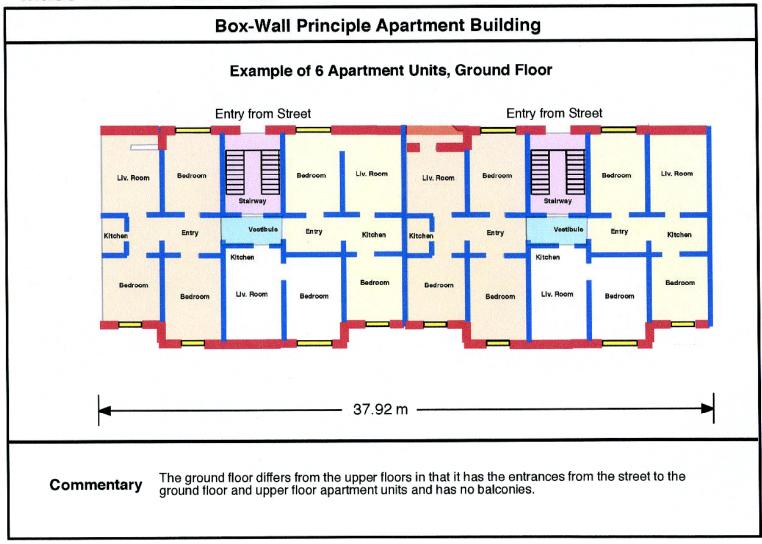


Figure 140. Mass 22-3-c floor plan.

Mass 22-3-d Isometric Floor Plan, an Upper Floor

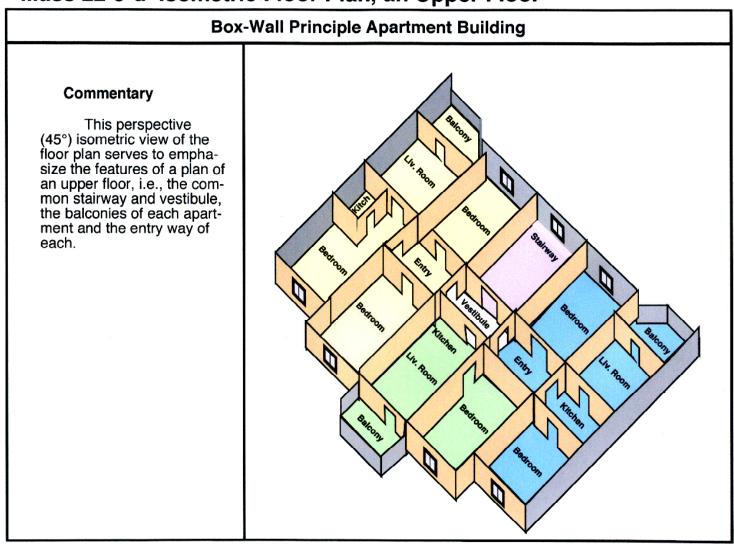


Figure 141. Mass 22-3-d isometric floor plan, an upper floor.

Mass 22-4-a Construction

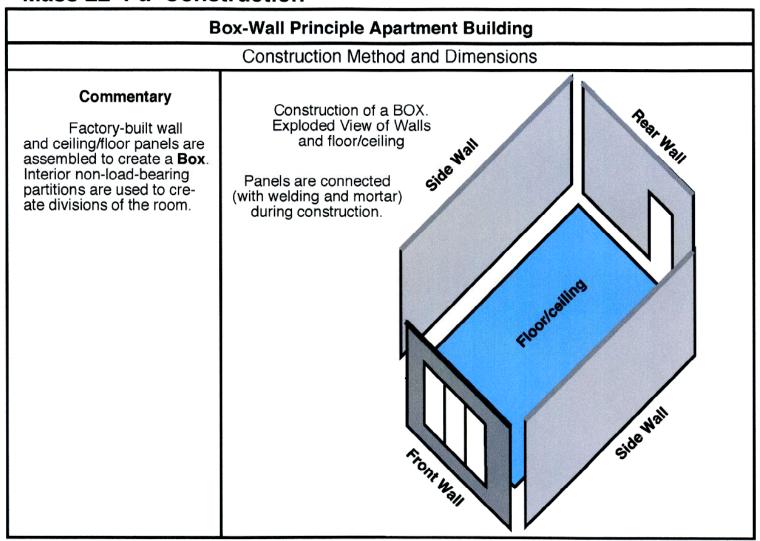


Figure 142. Mass 22-4-a construction.

Mass 22-4-b Construction

Box-Wall Principle Apartment Building

Construction Method and Dimensions

Commentary

Box-wall Principle construction, aka Panel Construction, is a form of Mass Construction, in that all the walls bear the load of the whole building (walls, ceilings, roofs, and live load). The exterior concrete walls are necessarily strong, being 20 centimeters thick and supported with reinforcement bars; interior walls are r/c and 16 cm thick. Panels are usually built off-site in a factory. This construction form is useful when individual "boxes" are used for rooms in apartments, or hotels, and thus where there is no desire to convert them to uses requiring large rooms, e.g., offices, such as is done with framed construction.

Concrete compressive strength is 326 kg/cm².

This form is found widely in Russia, former Soviet Republics, and in Eastern European former satellite countries, and is used widely for hotels and apartments worldwide.

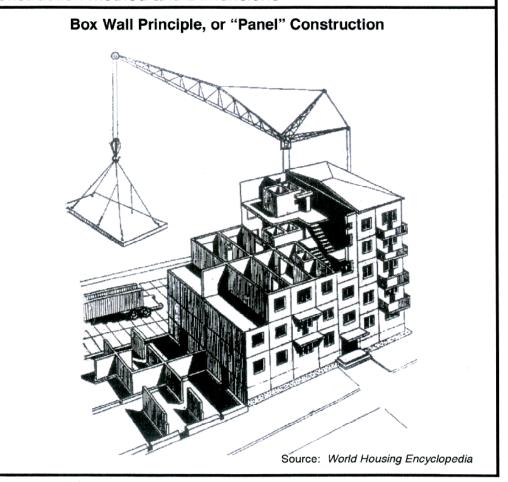


Figure 143. Mass 22-4-b construction.

Mass 22-4-c Construction

Box-Wall Principle Apartment Building Floor/Ceilings and Dimensions Commentary Panels used to serve as both ceilings and floors are made of concrete poured around a steel mesh frame, placed in the middle of a 10 cm thick slab that measures 3.2 by 6.7 meters, and then transported to the construction site. Strength is 305 kg/cm². Reinforcement bar connections are placed into the concrete during the process, the ends project on sides and end of slab. Location of steel hoop connections. Hoops in wall and floor panels are welded to counterparts in walls and mortar is then poured around connection.

Figure 144. Mass 22-4-c construction.

Mass 22-4-d Construction

Box-Wall Principle Apartment Building Walls and Dimensions **Wall Panel** Commentary Panels are concrete, reinforced with a steel mesh grid (with 20 cm spacing), and measure —in this example — 2.4 x 6.6 meters. As with the floor/ceilings, rebar extends Wall Pauel Panel Thickness: outward from the panel at the connection points, allowing 16 cm them to be tied to counterparts for welding and mortar-Connection ing. Strength is 326 kg/cm². Steel mesh reinforcement As with the 20 cm floor/ceilings, they are built in a factory and transported to apart 2.4 the building site for assembly. meters Connection

Figure 145. Mass 22-4-d construction.

Mass 22-5 Locale

Box-Wall Principle Apartment Building

Commentary

State planning is clearly manifested in apartment developments of this sort. The Soviets used this form widely and is common in countries under their domination but it is also seen in many parts of the western world, especially in Europe. The form provides shelter and open spaces between and among the buildings.

Complex of Box-Wall Apartment Buildings, Prague, Czech Republic (Typical UTZ Do2)



RE photo 2004

Developments of this type were replicated countless times in the Soviet Union and the Warsaw Pact to replace housing lost during WW II. Their construction followed state-directed plans expressed in buildings in the five story range (and without elevators). Entrances and stairways served a set of units on each side of each stair complex. Ventilation (see rooftops) was also by sets of units.

Mass 23-1 Place on Building Construction Chart

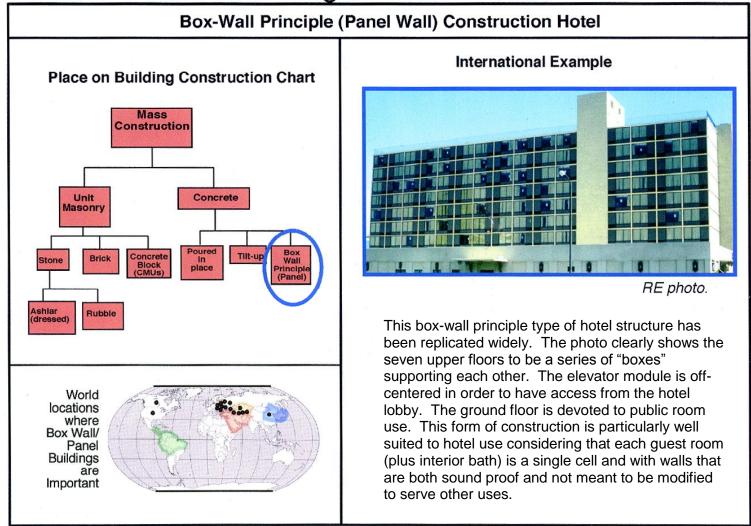


Figure 147. Mass 23-1 place on building construction chart.

Mass 23-2 Elevations

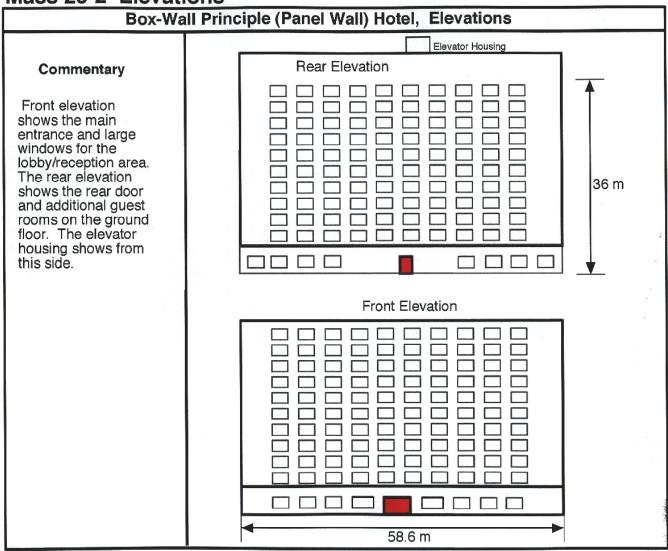


Figure 148. Mass 23-2 elevations.

Mass 23-3-a Floor Plan

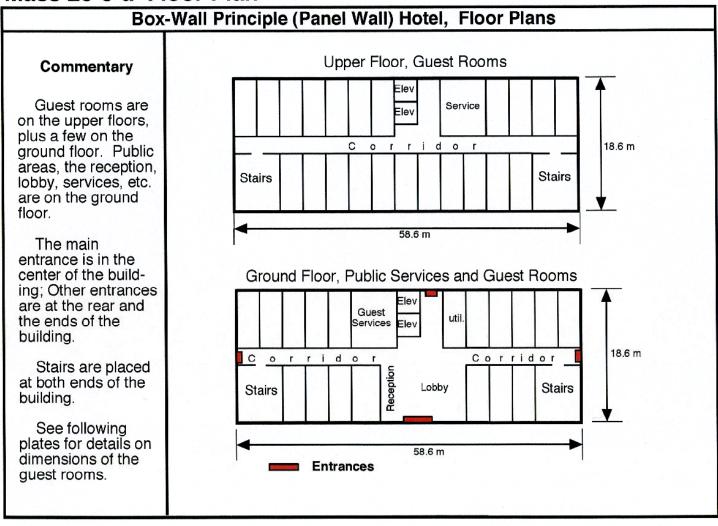


Figure 149. Mass 23-3-a floor plan.

Mass 23-3-b Floor Plan

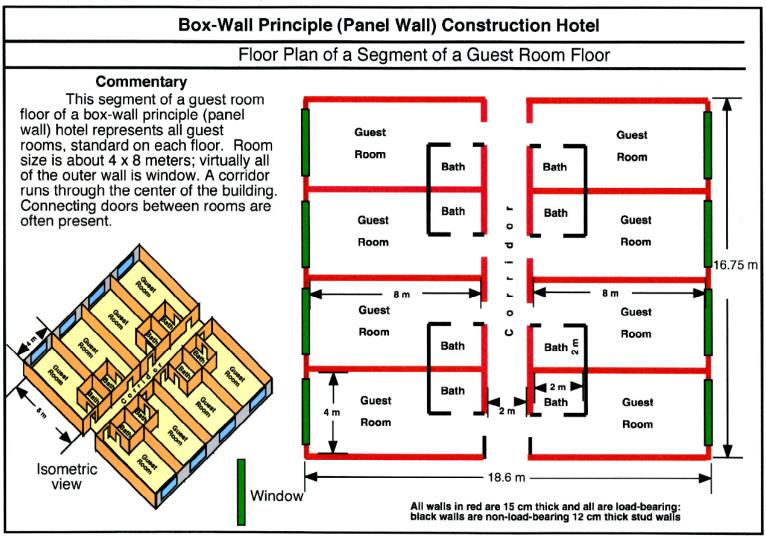


Figure 150. Mass 23-3-b floor plan.

Mass 23-4 Construction Details

Box-Wall Principle (Panel Wall) Construction Hotel

Commentary

The mass nature of construction is clear in this example. The side, bottom, top, and rear walls form a closed box of reinforced concrete (15 cm in thickness). The end wall is open, with much of its area being devoted to a large window, the only ventilation and light for each cell. Some light partition material is used for the small part of the end wall not devoted to the window.

Box-wall Building Under Construction



RE Photo

Figure 151. Mass 23-4 construction details.

Table 18. Framed urban terrain building types.

Twenty-One Urban Terrain Building Types			
Building Type	Number of Plates	Building Type Name	Building Material
Framed 1	5	Half-timbered post and lintel house	Wood framed
Framed 2	6	Half-timbered store with residence above	Wood framed
Framed 3	7	Wood-framed one-story house	Wood framed/wood
Framed 4	5	Wood-framed house with brick veneer cover	Wood framed/brick
Framed 5	5	Wood-framed store	Wood framed/wood
Framed 6	9	Steel-framed heavy-clad hotel	Steel framed
Framed 7	10	Steel-framed heavy-clad office building	Steel framed
Framed 8	5	R/C-framed light-clad apartment building	Steel/R/C framed
Framed 9	9	R/C-framed light-clad hotel	Steel/R/C framed
Framed 10	6	R/C-framed light-clad office building	Steel/R/C framed
Framed 11	7	Central pylon with light-clad steel frame office	Steel/R/C framed
Framed 12	12	R/C-framed house with brick infill walls	R/C framed with brick
Framed 13	8	R/C-framed house with terra cotta infill walls	R/C framed with terra cotta
Framed 14	8	R/C-framed CMU infill store/apartment building	R/C framed with CMU
Framed 15	5	R/C-framed with brick infill walls store/office	R/C framed with brick
Framed 16	7	R/C-framed CMU infill industrial/storage building	R/C framed with CMU
Framed 17	6	R/C-framed terra cotta infill industrial/storage	R/C framed with terra cotta
Framed 18	6	R/C-framed brick infill industrial/storage building	R/C framed with brick
Framed 19	6	R/C-framed school with brick veneer over infill	R/C framed with brick
Framed 20	5	Steel-framed light cladding industrial/storage	Steel framed with steel
Framed 21	5	Steel-framed double light cladding industrial storage	Steel framed with steel
Total plates: 142			

Note: R/C = reinforced concrete. CMU = concrete masonry unit.

Framed 1-1 Place on Building Construction Chart

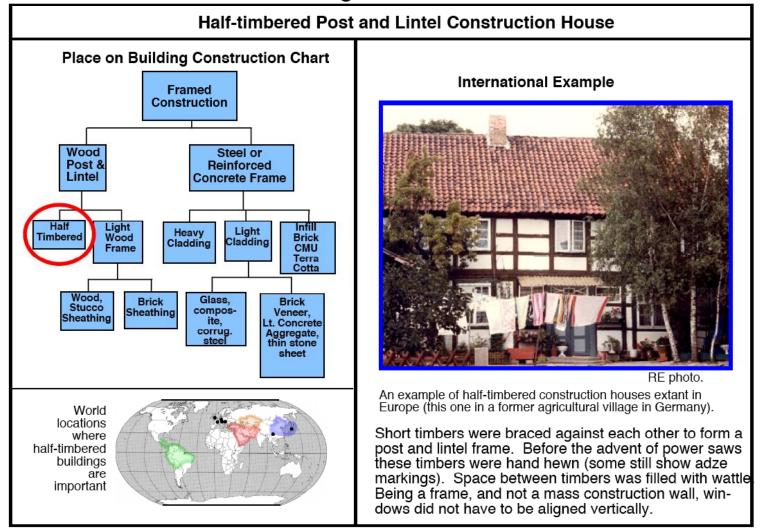



Figure 152. Framed 1-1 place on building construction chart.

Framed 1-2 Elevation and Construction Description

Half-timbered Post and Lintel Construction House

Commentary

In this type of construction, hewn timbers were used as frame members in a way similar to that employed today by reinforced concrete or steel columns and beams. Because of the difficulty of forming long columns and beams. builders - not having powered circular saws were forced to hew square timbers from logs using a hand adze as the principal tool. Short pieces were used then to strengthen the structure; signature diagonal braces complete the image of this type of construction. Non-load-bearing fill (called wattle and daub) was placed between frame members. See plate Framed 1-4 for details.

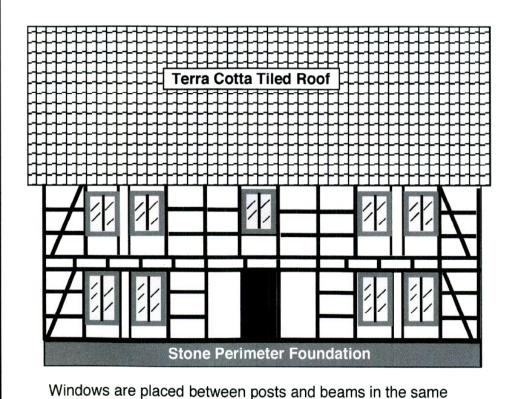

fashion as windows are placed in modern framed structures.

Figure 153. Framed 1-2 elevation and construction description.

Framed 1-3-a Floor Plan and Structure

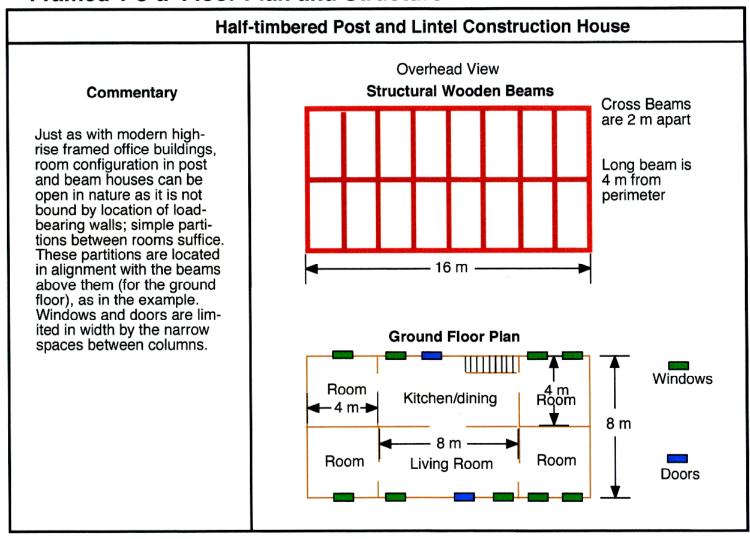


Figure 154. Framed 1-3-a floor plan and structure.

Framed 1-4 Construction

Half-timbered Post and Lintel Construction House **Construction Details** Commentary Half-timbered structures employ hewn timbers in the form of posts and beams to form a skeleton frame. Connections are made by Tenon forming tenons and inserting Mortise these into mortises to form a joint. This joint is then anchored with dowels. The red circled example of one joint is representative of all ioints. Post Beam Space between the posts and beams is taken up, Posts and beams are 15 cm thick in a traditional fashion, with non-load-bearing wattle and daub (the wattles are wooden poles, held together with a clay daub); the surface was usually whitewashed resulting in a highly contrasting dark wood with white wall in Wattle and daub infill 15 cm thick between. The wall is a nonload-bearing infill wall, performing the same function as an infill wall between r/c or steel does in framed structures.

Figure 155. Framed 1-4 construction.

Framed 2-1 Place on Building Construction Chart

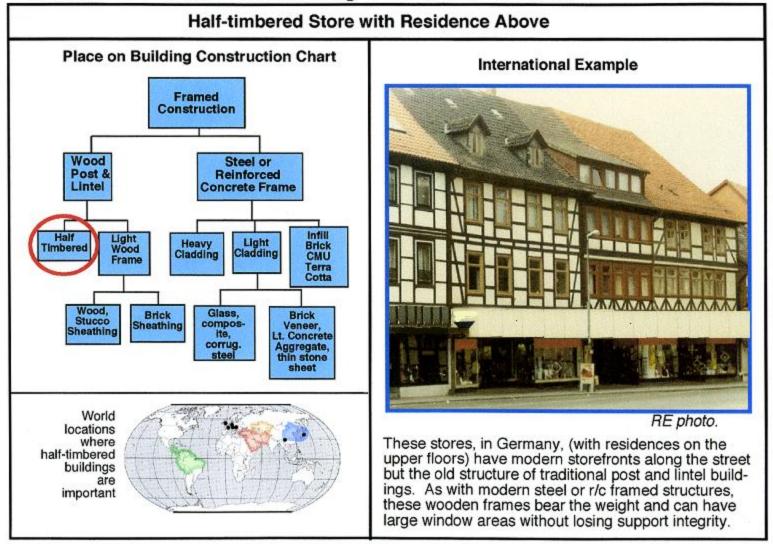


Figure 156. Framed 2-1 place on building construction chart.

Framed 2-2 Elevation and Construction Description

Half-timbered Store with Residence Above Commentary In this type of con-**Terra Cotta Tiled Roof** struction, hewn timbers were used as frame members in a way similar to that employed today by reinforced concrete or steel columns and beams. Because of the difficulty of forming long columns and beams, builders, not having powered circular saws, were forced to hew square timbers from logs using a hand adze as the principal tool. Short pieces were then used to strengthen the structure; signature diagonal braces complete the image of this type of construction. Non-loadbearing fill (called wattle and daub) was placed between frame members. See plate 2-4-a and b for details. Windows are placed between posts and beams in the same fashion as windows are placed in modern framed structures.

Figure 157. Framed 2-2 elevation and construction description.

Framed 2-3-a Floor Plan

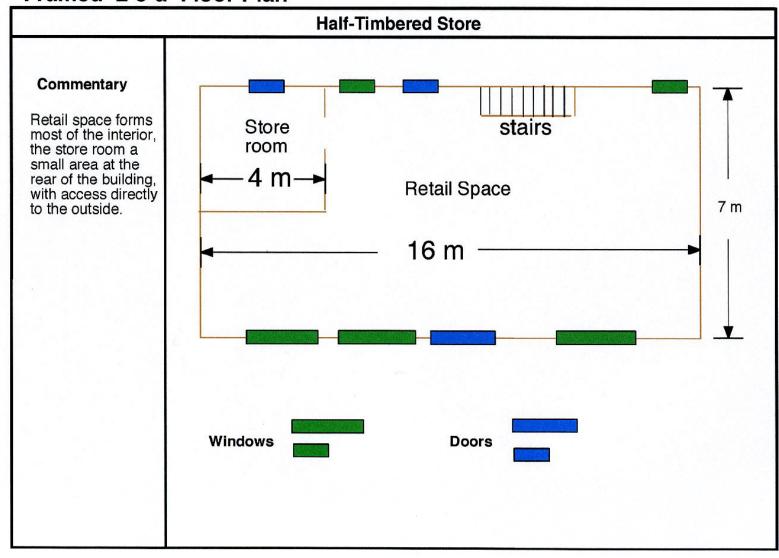


Figure 158. Framed 2-3-a floor plan.

Framed 2-4-a Construction Method


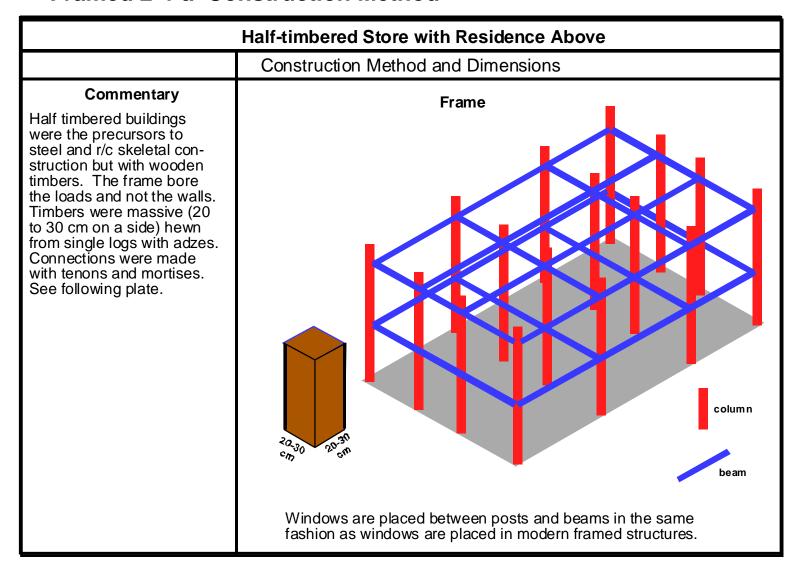


Figure 159. Framed 2-4-a construction method.

Framed 2-4-b Construction Details

Half-timbered Store with Residence Above







Purlins and truss of the house to the left. The vertical beam is mortised on to the purlin. *RE photo*.



Dowels fix tenon to mortise in this example in the UK. *RE photo.*

Figure 160. Framed 2-4-b construction details.

Framed 3-1 Place on Building Construction Chart

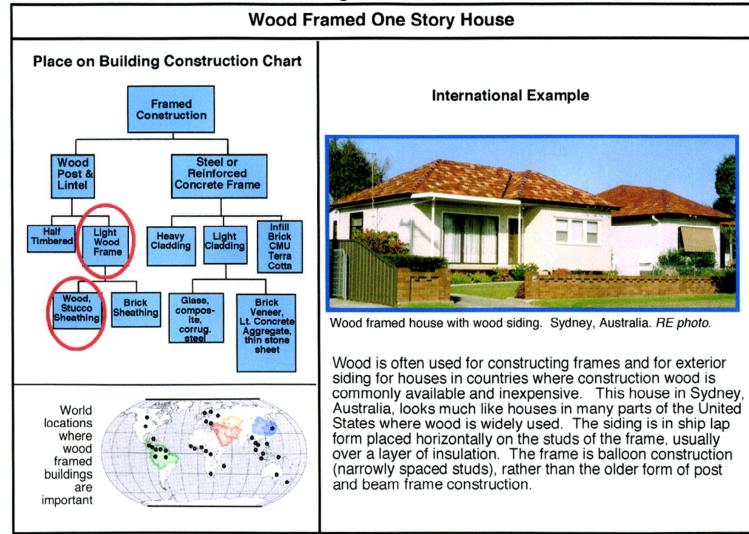


Figure 161. Framed 3-1 place on building construction chart.

Framed 3-2 Elevations

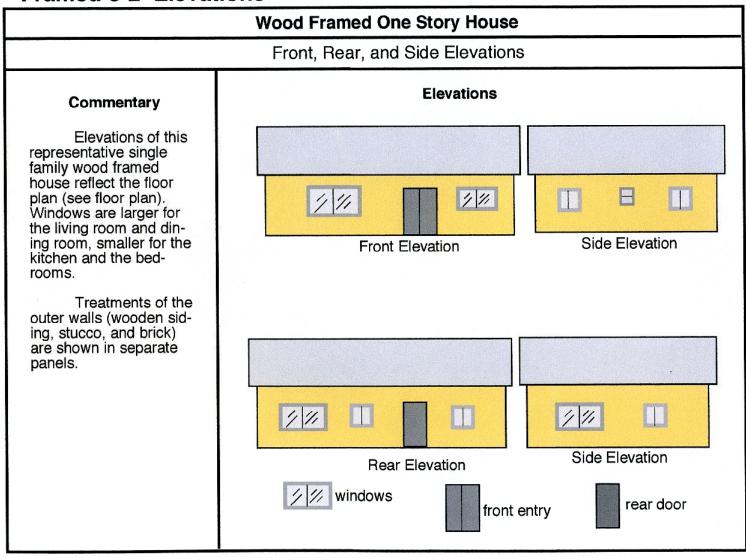


Figure 162. Framed 3-2 elevations.

Framed 3-3-a Floor Plan

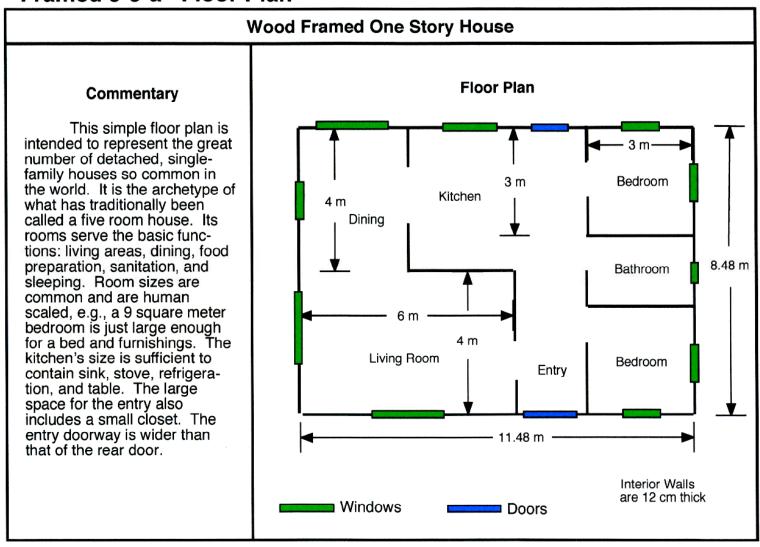


Figure 163. Framed 3-3-a floor plan.

Framed 3-4-a Construction

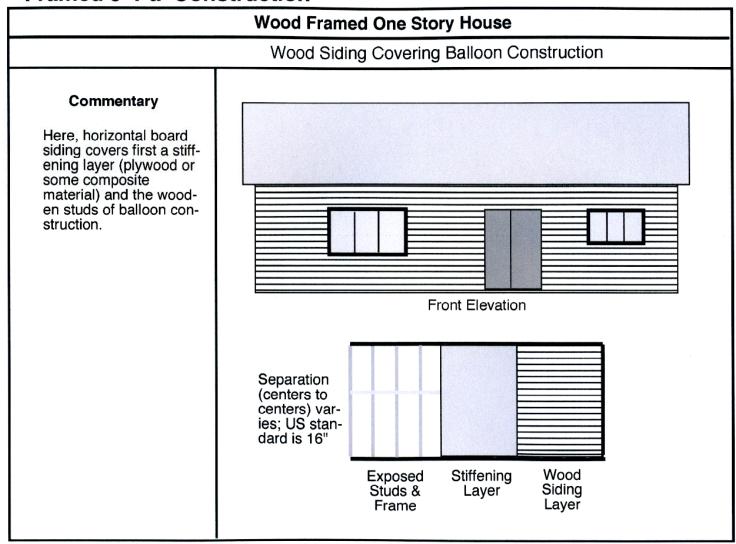


Figure 164. Framed 3-4-a construction.

Framed 3-4-b Construction

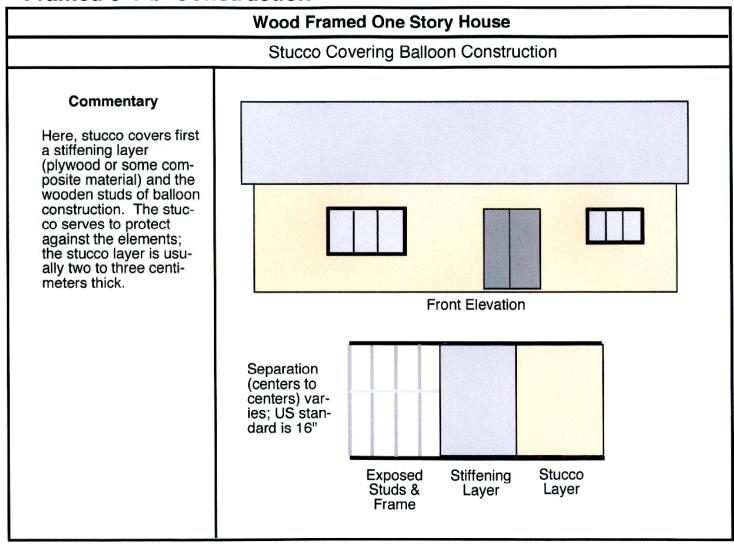


Figure 165. Framed 3-4-b construction.

Framed 3-4-c Construction

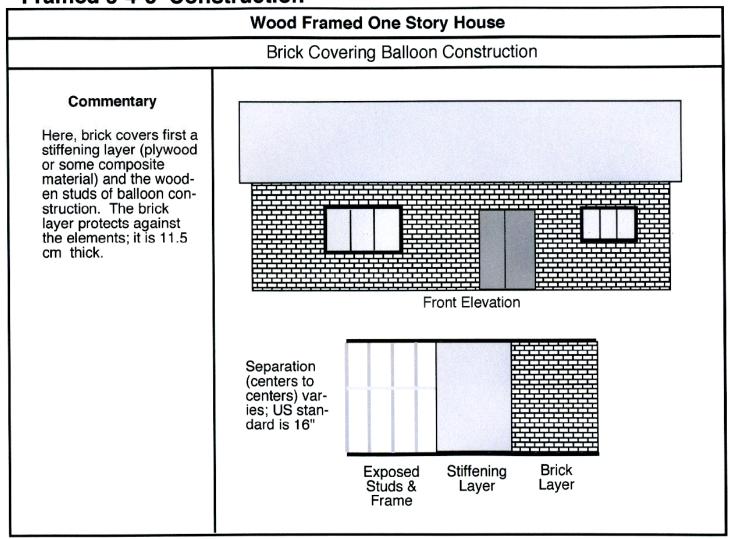


Figure 166. Framed 3-4-c construction.

Framed 4-1 Place on Building Construction Chart

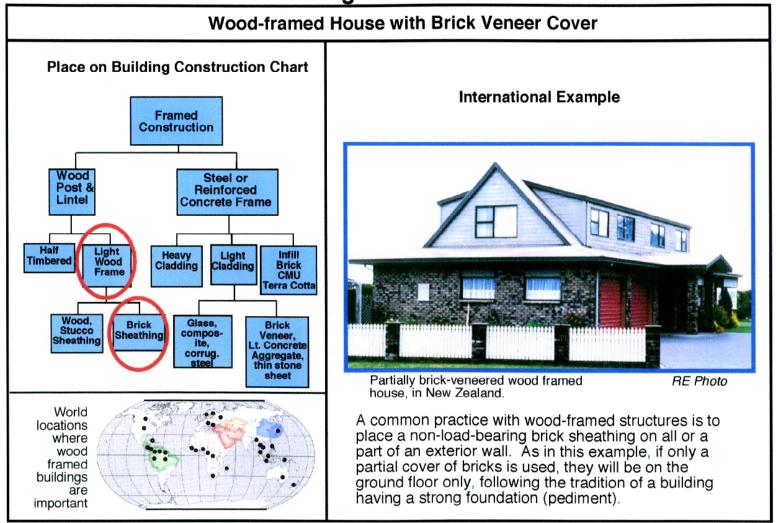


Figure 167. Framed 4-1 place on building construction chart.

Framed 4-2 Elevations

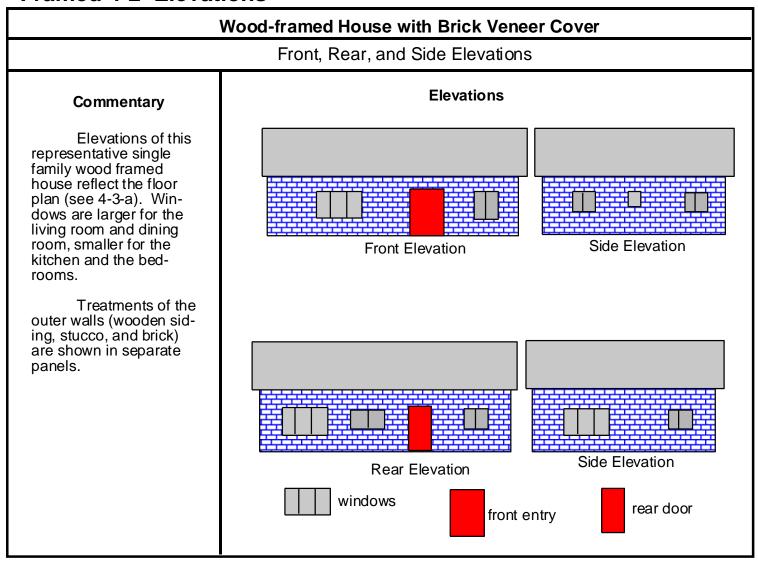


Figure 168. Framed 4-2 elevations.

Framed 4-3-a Floor Plan

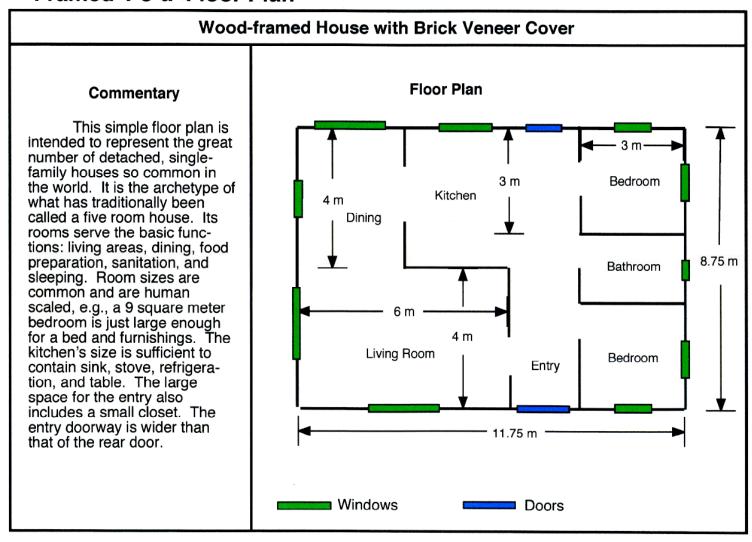


Figure 169. Framed 4-3-a floor plan.

Framed 4-4 Construction

Wood-framed House with Brick Veneer Cover Commentary Here, a brick layer covers first a stiffening layer (plywood or some composite material) and the wooden studs of balloon construction. The brick layer serves to protect against the elements. Exposed are the sides of stretchers. Front Elevation laid in what is called a facing pattern. The brick A gap (2 cm or so) often separates the stiffening layer from the brick and is connected with "brick segment of the wall is 11.5 cm thick. Studs ties" to achieve ventilation and prevent water build-up. and stiffening (1 cm) add 12 cm for a total of 24 cm. This includes a 10 cm air space between the studs and a 1 cm covering on the interior tiffening side of the wall. Layer Separation (centers to Brick Exposed Stiffening centers) var-Studs & Layer Layer ies; US stan-Frame dard is 16"

Figure 170. Framed 4-4 construction.

Framed 5-1 Place on Building Construction Chart

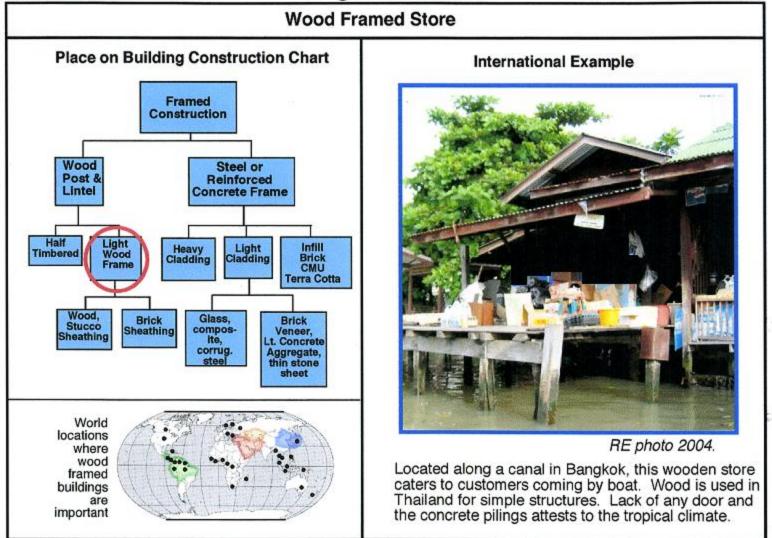


Figure 171. Framed 5-1 place on building construction chart.

Framed 5-2: Elevations

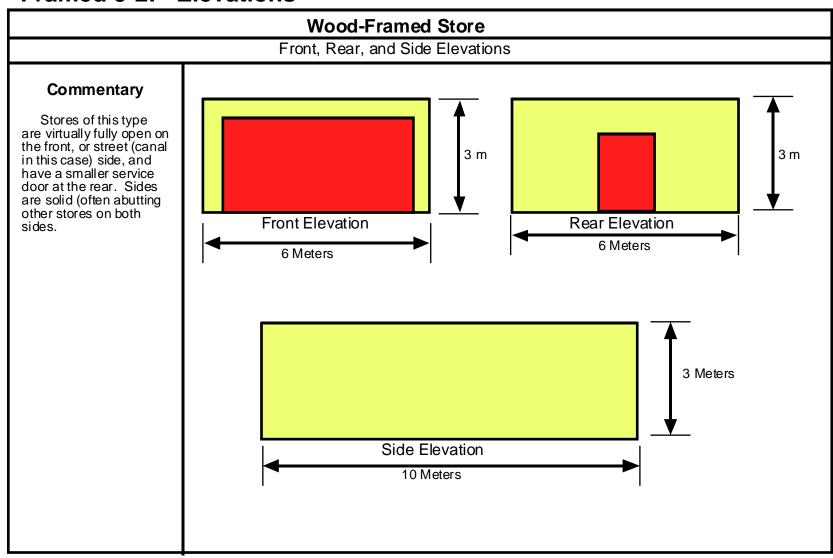


Figure 172. Framed 5-2 elevations.

Framed 5-3-a Floor Plan

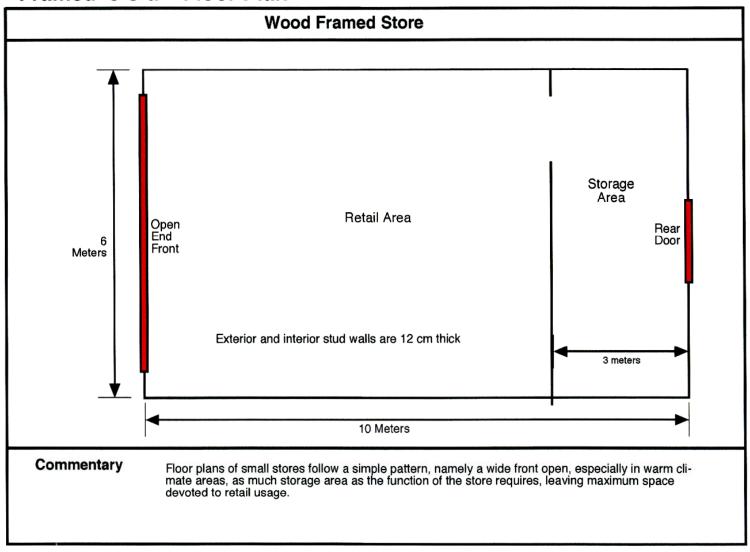


Figure 173. Framed 5-3-a floor plan.

Framed 5-4 Construction Method

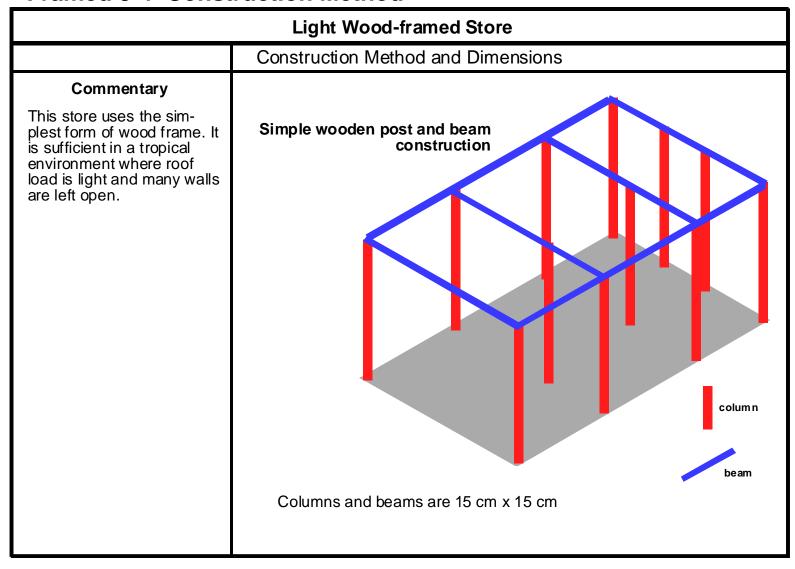


Figure 174. Framed 5-4 construction method.

Framed 6-1 Place on Building Construction Chart

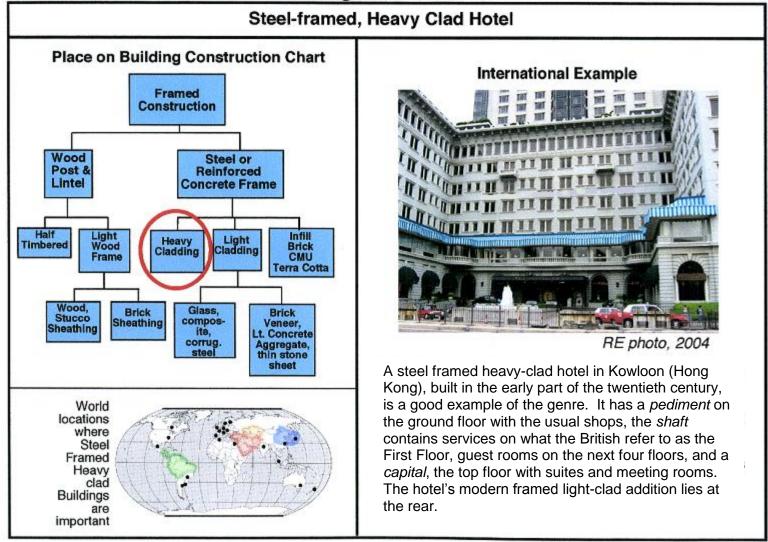


Figure 175. Framed 6-1 place on building construction chart.

Framed 6-2-a Elevation

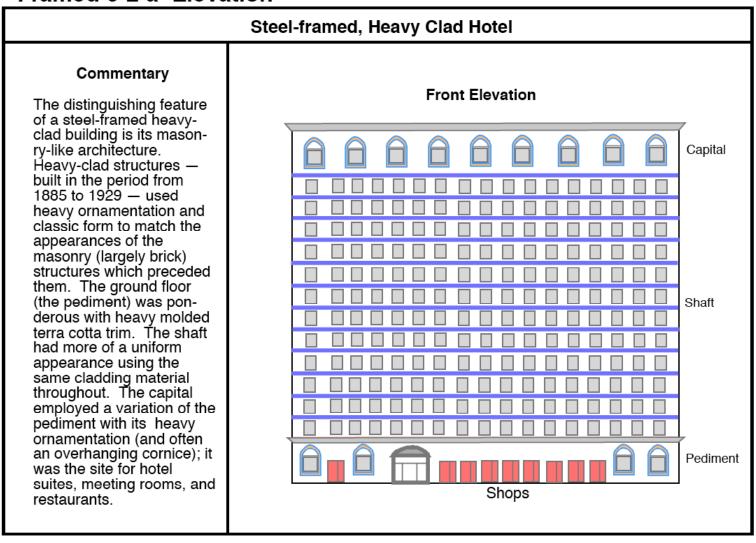


Figure 176. Framed 6-2-a elevation.

Framed 6-2-b Elevations

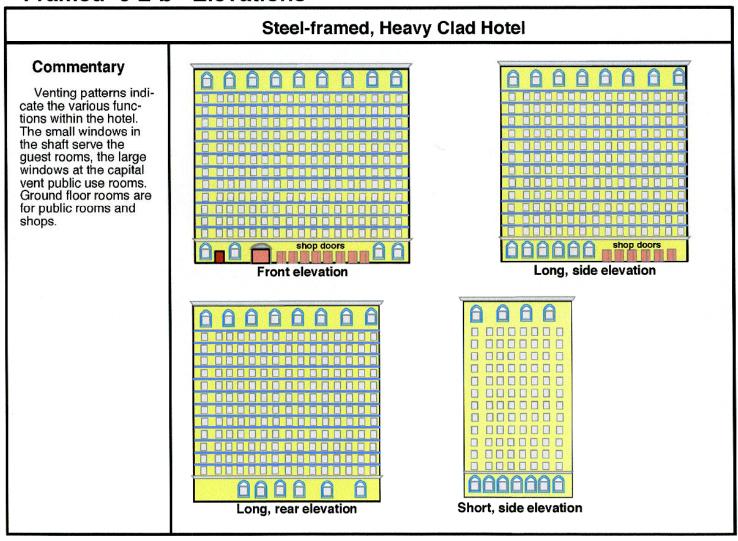


Figure 177. Framed 6-2-b elevations.

Framed 6-3-a Floor Plan

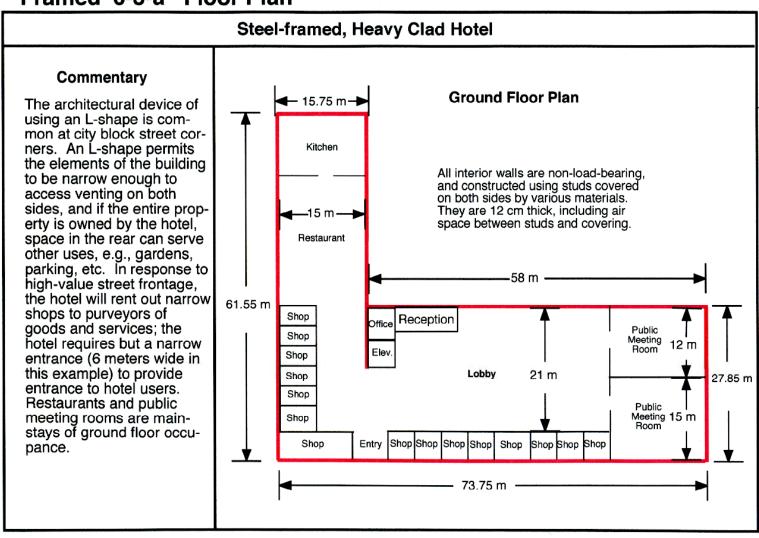


Figure 178. Framed 6-3-a floor plan.

Framed 6-3-b Floor Plan

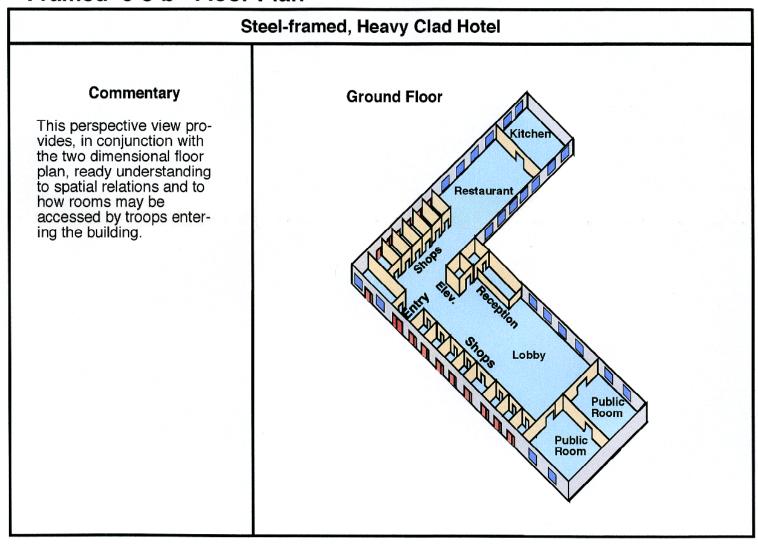


Figure 179. Framed 6-3-b floor plan.

Framed 6-3-c Floor Plan

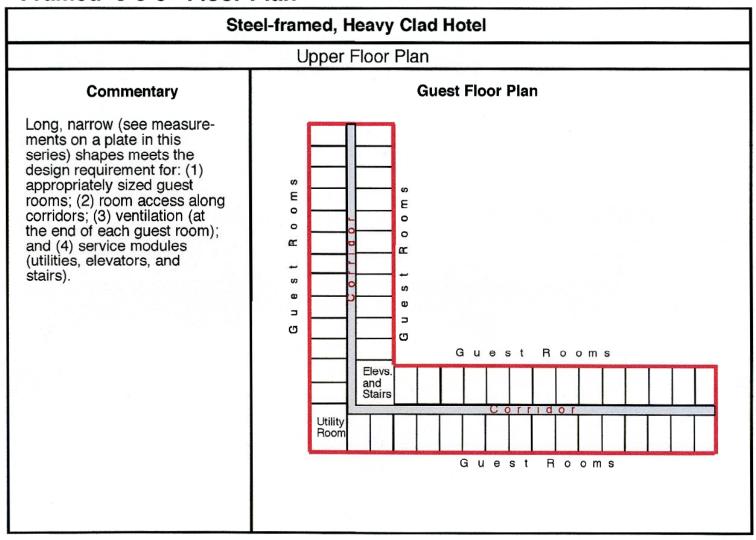


Figure 180. Framed 6-3-c floor plan.

Framed 6-3-d Floor Plan

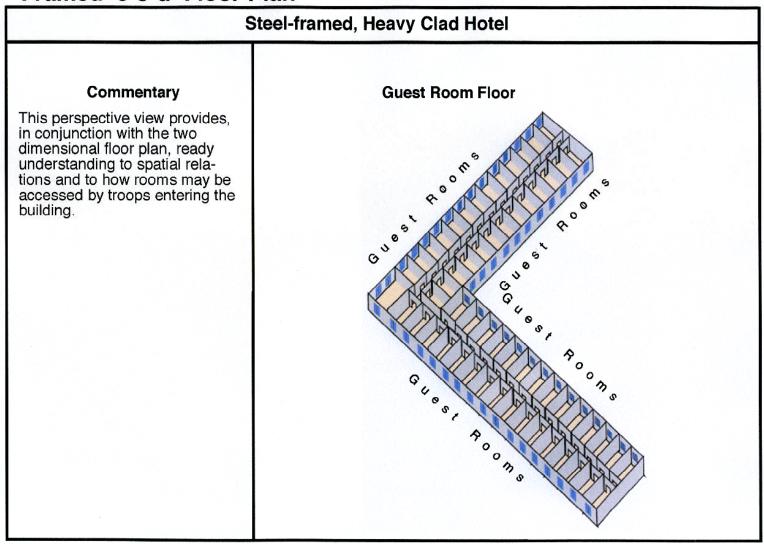


Figure 181. Framed 6-3-d floor plan.

Framed 6-4 Construction

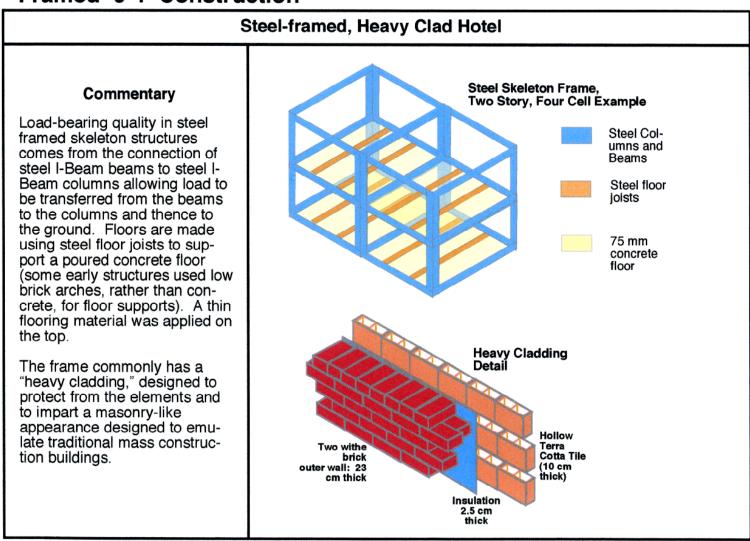


Figure 182. Framed 6-4 construction.

Framed 7-1 Place on Building Construction Chart

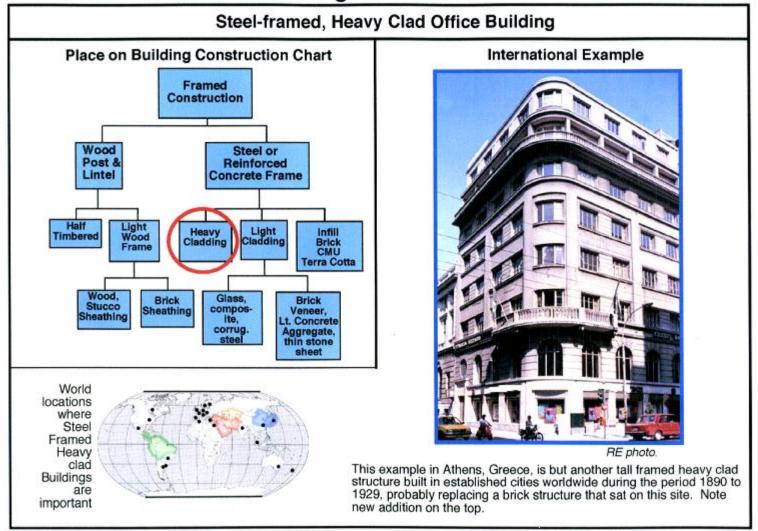


Figure 183. Framed 7-1 place on building construction chart.

Framed 7-2 Elevation

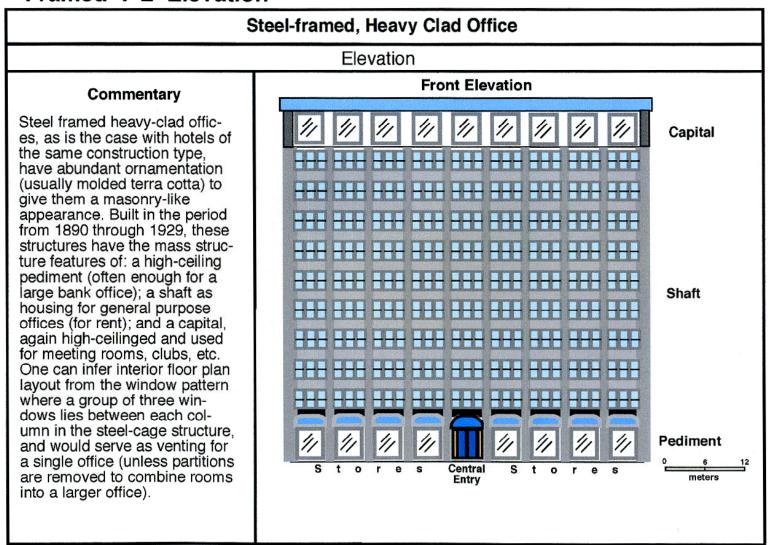


Figure 184. Framed 7-2 elevation.

Framed 7-3-a Floor Plan

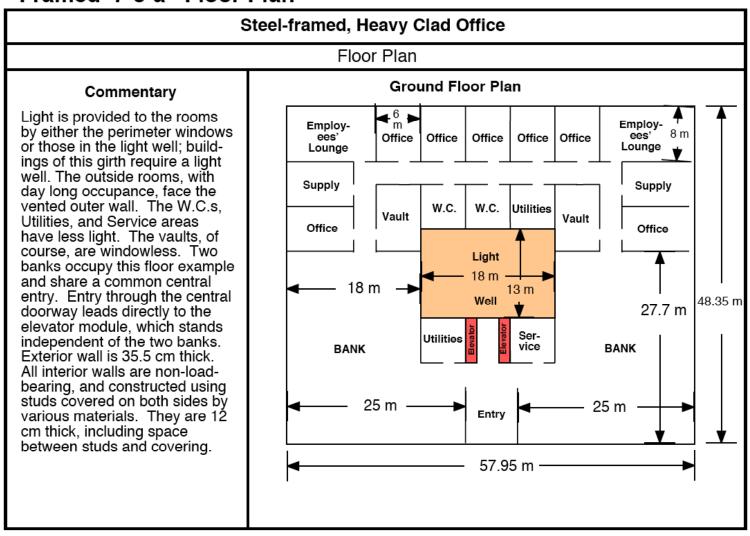


Figure 185. Framed 7-3-a floor plan.

Framed 7-3-b Floor Plan

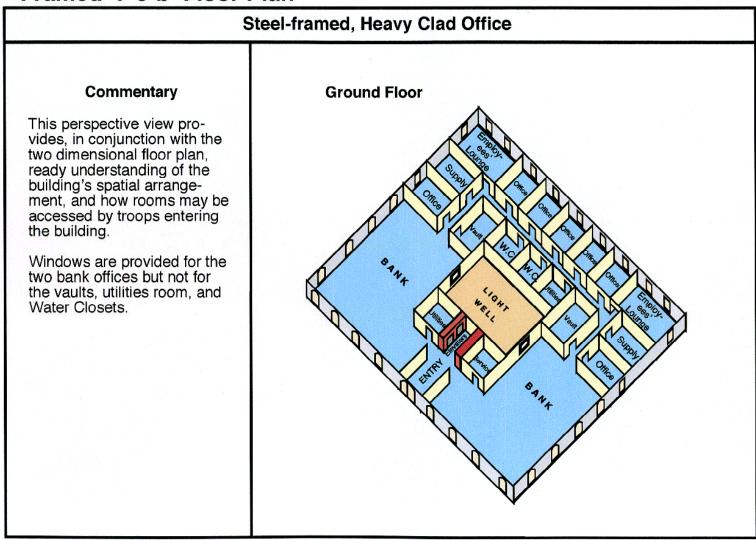


Figure 186. Framed 7-3-b floor plan.

Framed 7-3-c Floor Plan

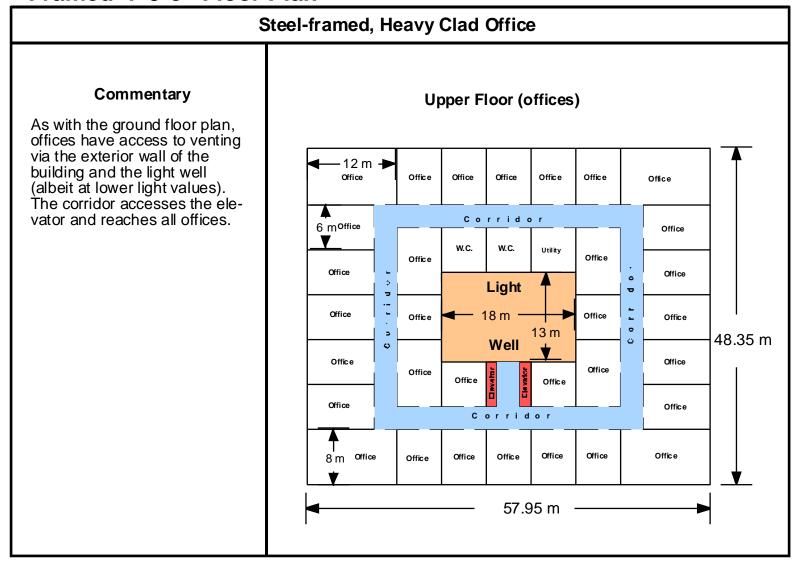


Figure 187. Framed 7-3-c floor plan.

Framed 7-3-d Floor Plan

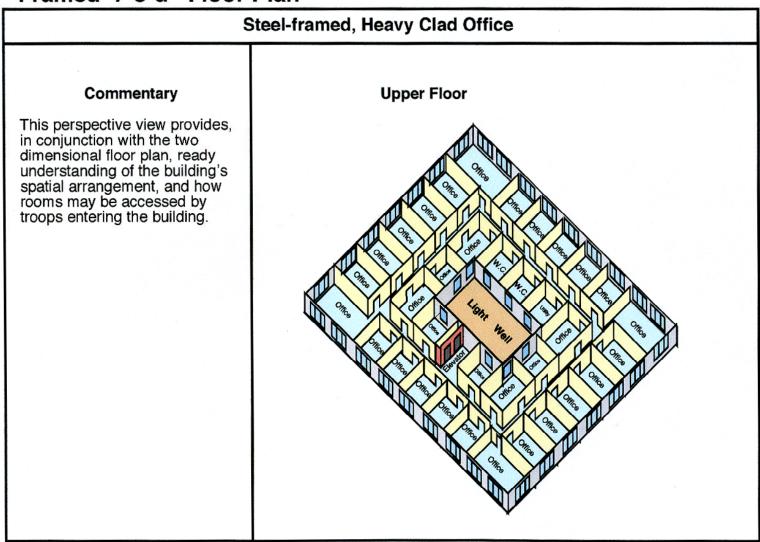


Figure 188. Framed 7-3-d floor plan.

Framed 7-4-a Construction

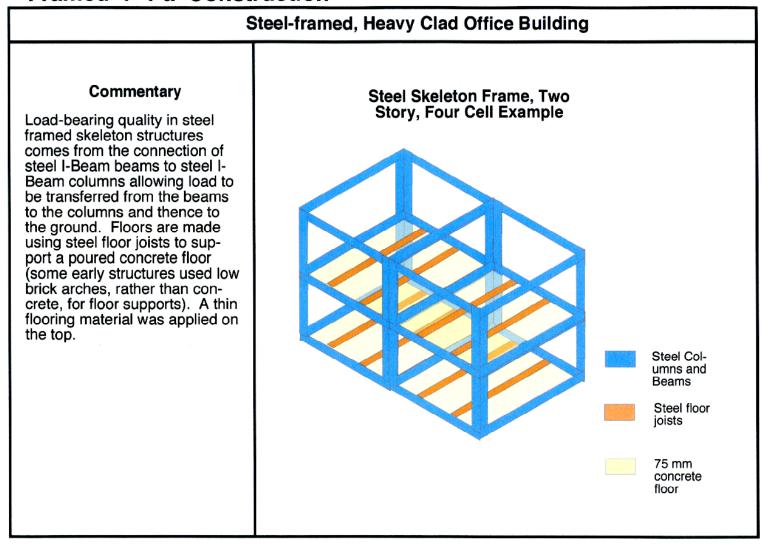


Figure 189. Framed 7-4-a construction.

Framed 7-4-b Construction

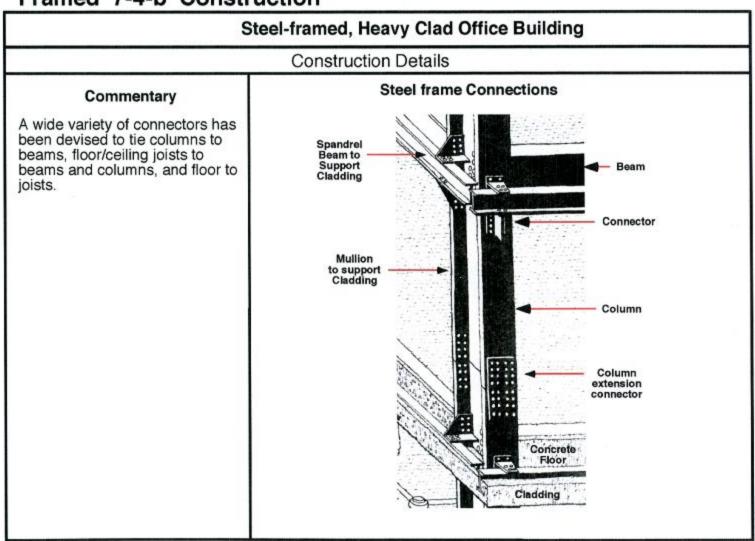


Figure 190. Framed 7-4-b construction.

Framed 7-4-c Construction

Steel-framed, Heavy Clad Office Building **Construction Details** Commentary **Heavy Cladding Components** In order to achieve a masonry-like appearance, designers of steel framed, heavy clad buildings (while at the same time sealing the frame from the elements) used hollow terra cottá tile (10 cm thick), then a layer of insulation (2.5 cm), topped by a double brick outer wall. The combination of the three elements is connected to steel frame members, columns, beams, and mul-**Hollow Terra** lions. Cotta Tile (10 cm thick) Two withe brick outer wall: 23 cm thick Insulation 2.5 cm thick

Figure 191. Framed 7-4-c construction.

Framed 8-1 Place on Building Construction Chart

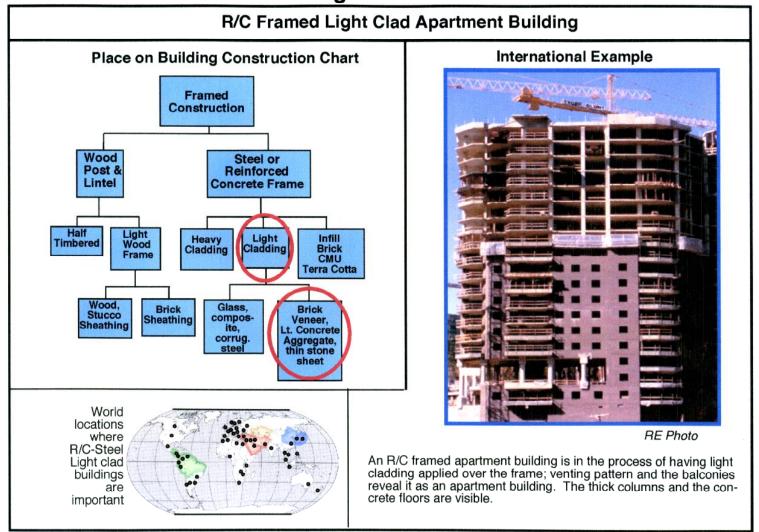


Figure 192. Framed 8-1 place on building construction chart.

Framed 8-2 Elevation

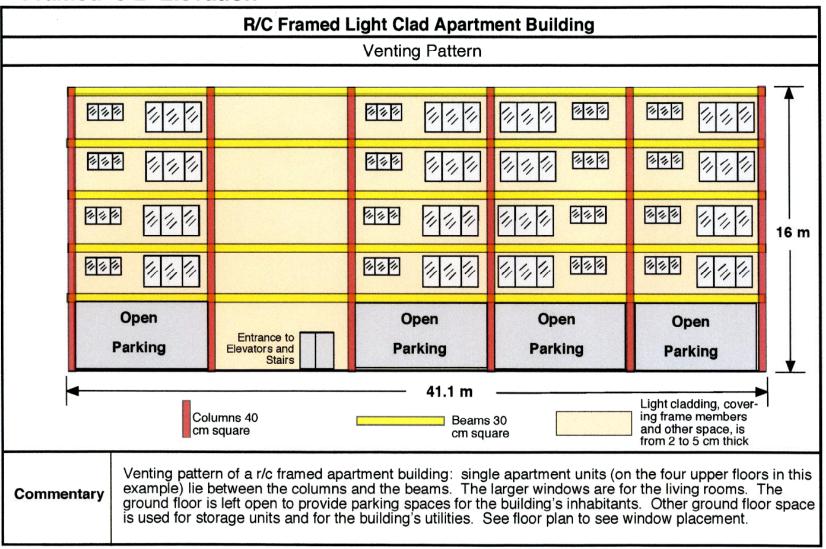


Figure 193. Framed 8-2 elevation.

Framed 8-3-a Floor Plan

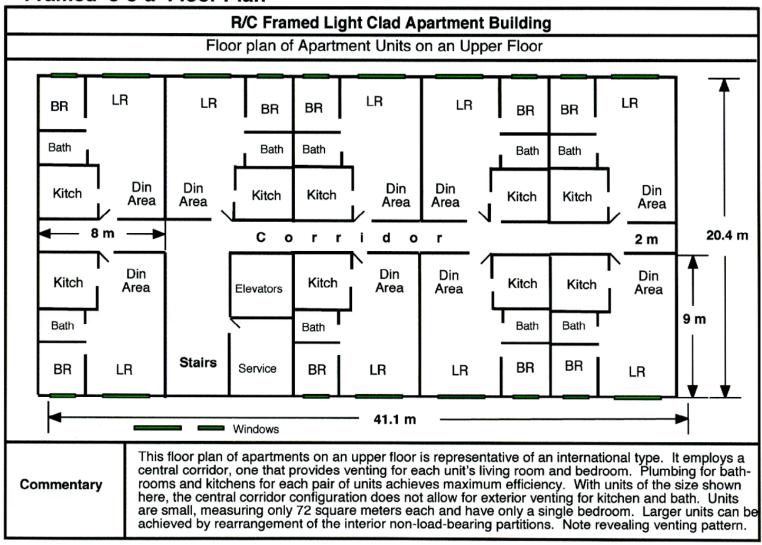


Figure 194. Framed 8-3-a floor plan.

Framed 8-4 Construction R/C Framed Light Clad Apartment Building Column and Beam construction (Apartment Building, upper floor) LR LR LR LR LR BR BR BR BR BR Bath Bath Bath Bath Bath Din Din Din Din Din Kitch Kitch Kitch Kitch Kitch Area Area Area Area Area 20.4 m 2 m 0 Din Din Din Din Kitch Kitch Kitch Kitch Area Elevators Area Area Area_ Bath Bath Bath Bath 8 m **Stairs** BR BR LR Service BR LR BR LR LR

41.1 m Beams Columns A planimetric view of reinforced concrete columns and beams of an apartment building floor. Columns are square, measuring 40 cm on a side. Beams are also square, 30 cm on a side. Connections are Commentary assumed to meet international standards. Interior partitions between and within the apartment units are non-load-bearing; the standard of using light weight studs (wood or metal) and general wall material (plywood, drywall, etc.). Note that interior partitions are independent of the structural columns and beams.

Figure 195. Framed 8-4 construction.

Framed 9-1 Place on Building Construction Chart

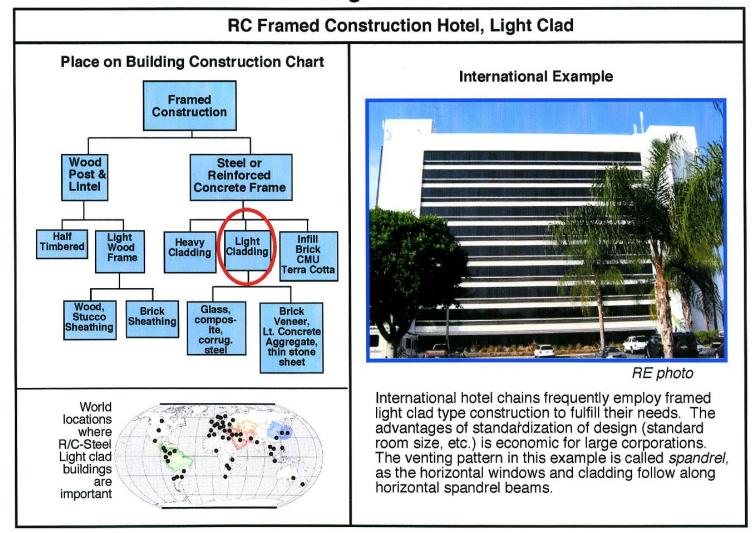


Figure 196. Framed 9-1 place on building construction chart.

Framed 9-2 Elevation

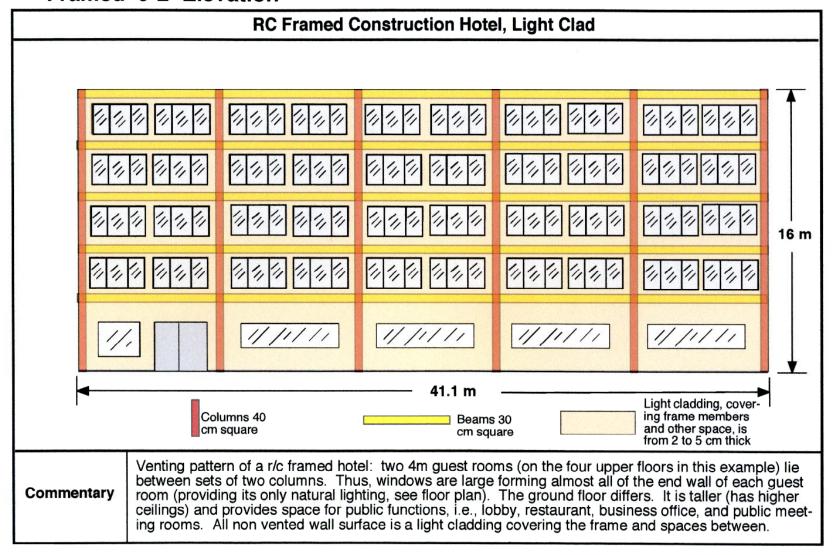


Figure 197. Framed 9-2 elevation.

Framed 9-3-a Floor Plan

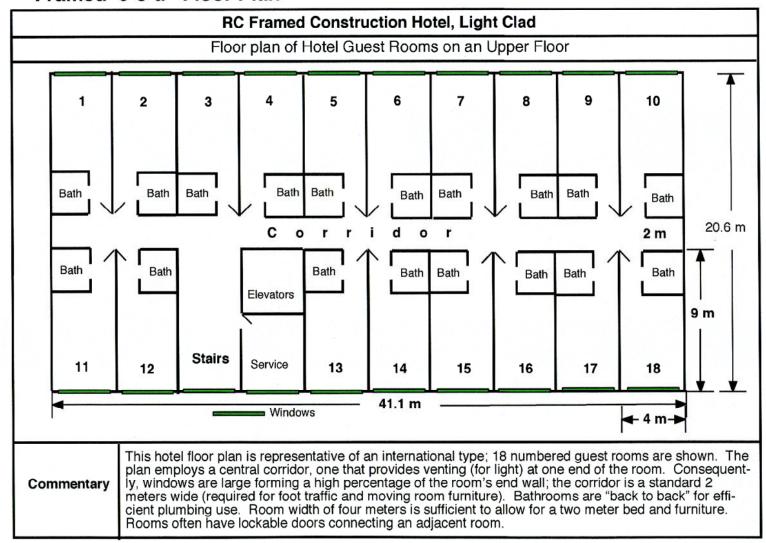


Figure 198. Framed 9-3-a floor plan.

Framed 9-3-b Floor Plan

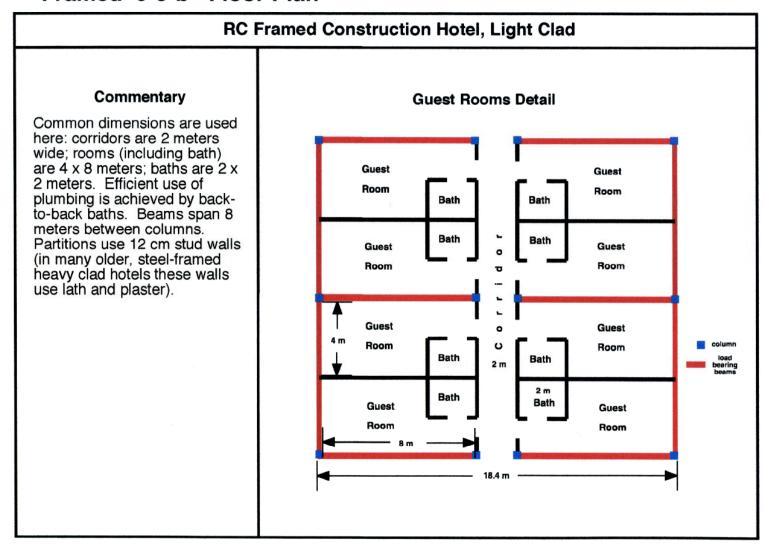


Figure 199. Framed 9-3-b floor plan.

Framed 9-3-c Floor Plan

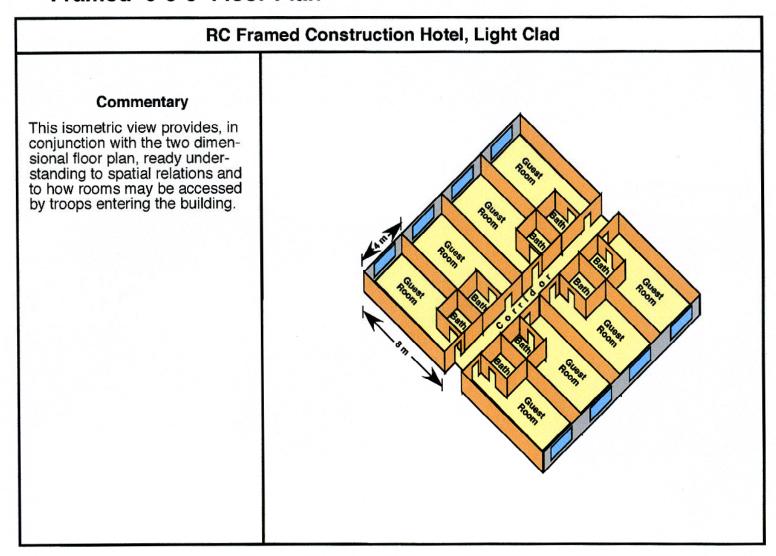


Figure 200. Framed 9-3-c floor plan.

Framed 9-4-a Construction

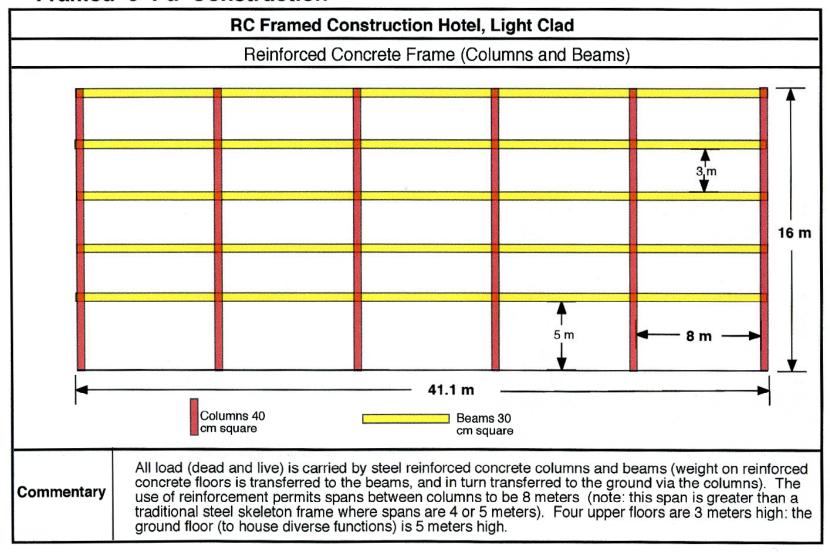


Figure 201. Framed 9-4-a construction.

Framed 9-4-b Construction

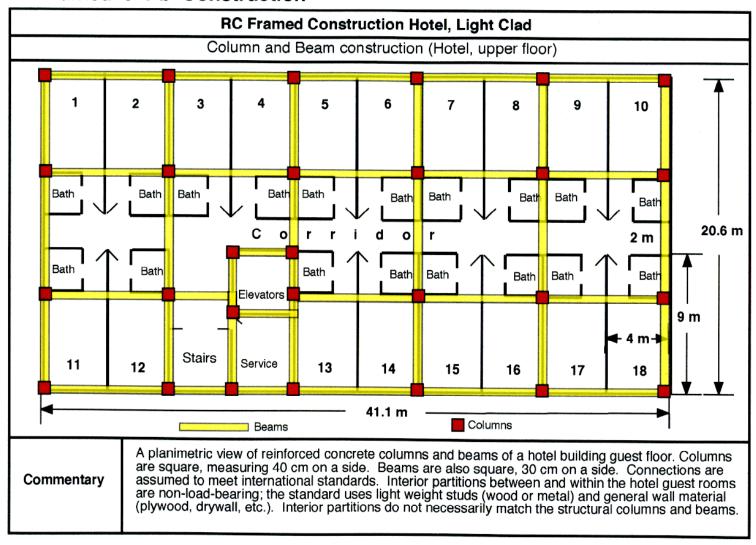


Figure 202. Framed 9-4-b construction.

Framed 9-4-c Construction

RC Framed Construction Hotel, Light Clad

Construction Method and Dimensions

Commentary

Many fundamental characteristics of reenforced concrete framed buildings are seen in the example, from Tel Aviv.

The intended function of the building will be that of a hotel, judging from the venting pattern. The cladding is light, being some highly reflective material; it is affixed to light weight mullions (vertical members). The columns are made of reinforced concrete, spaced some four meters apart. Column shapes vary from square to rectangular, ranging from 30 x 30 cm to 30 by 50 cm. The floor/ceilings are also of concrete (commonly some 10 to 15 cm thick. The lower three stories — serving functions such as public gathering, lobby, and restaurants — have what is probably foamed concrete cladding, to give the impression of stability and strength.

Strengths:

R/C columns: 356 kg/cm²

R/C floors: 356 kg/cm²

Concrete Framed building under construction in Tel Aviv



RE Photo

Figure 203. Framed 9-4-c construction.

Framed 10-1 Place on Building Construction Chart

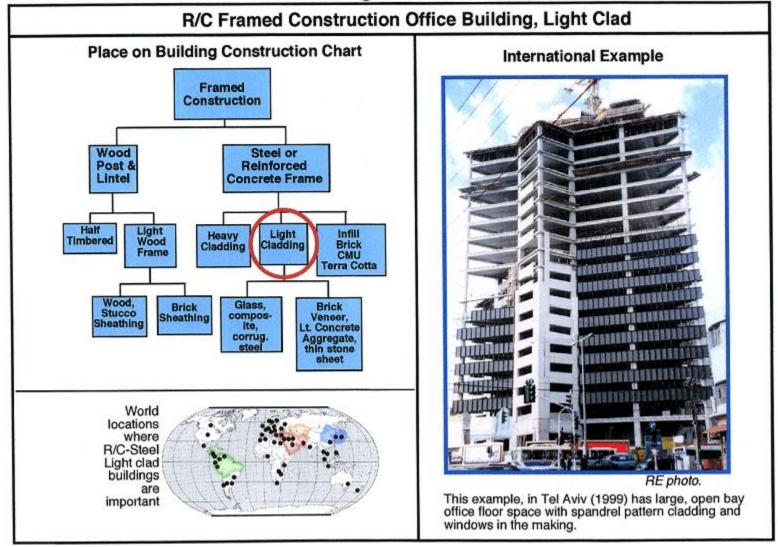


Figure 204. Framed 10-1 place on building construction chart.

Framed 10-2 Elevation

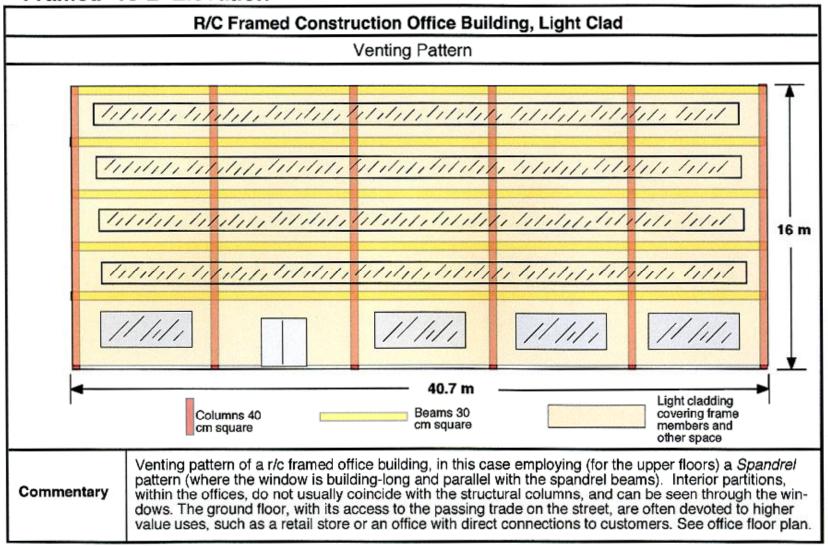


Figure 205. Framed 10-2 elevation.

Framed 10-3-a Floor Plan

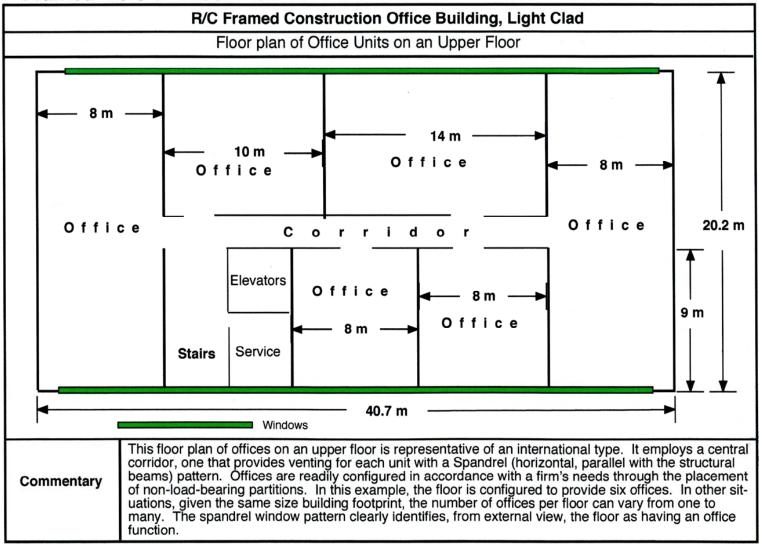


Figure 206. Framed 10-3-a floor plan.

Framed 10-4-a Construction

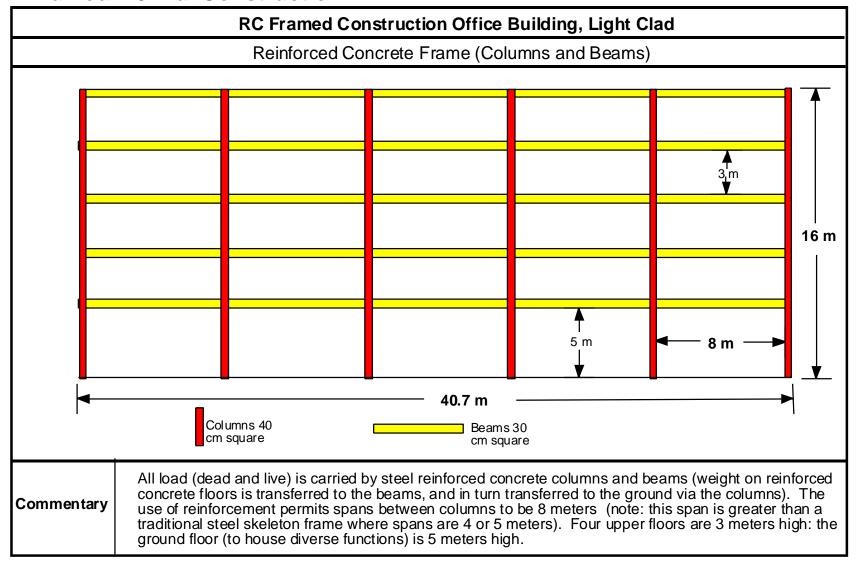


Figure 207. Framed 10-4-a construction.

Framed 10-4-b Construction

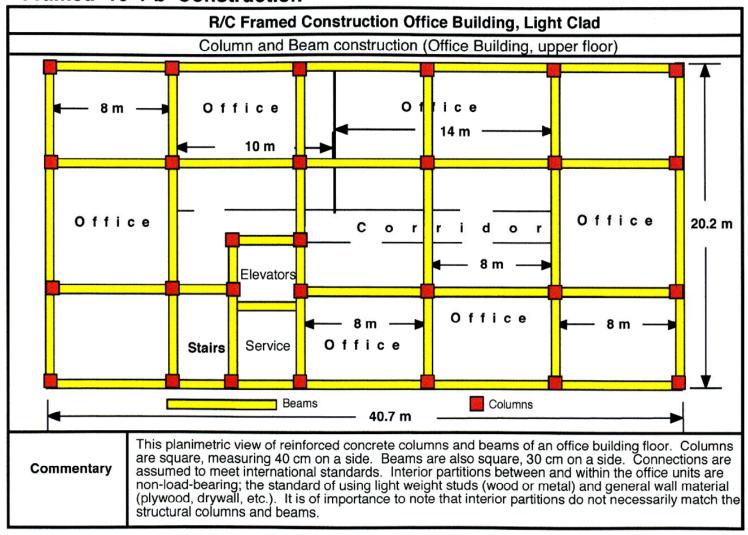


Figure 208. Framed 10-4-b construction.

Framed 11-1 Place on Building Construction Chart

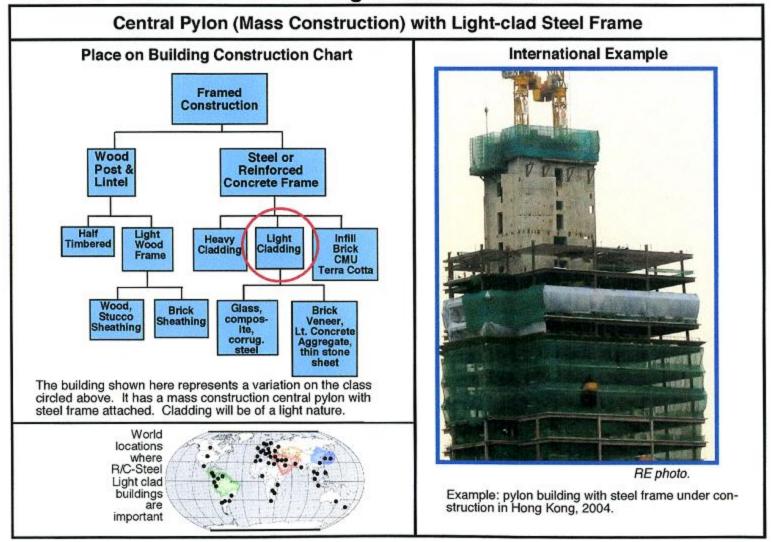


Figure 209. Framed 11-1 place on building construction chart.

Framed 11-2 Elevations

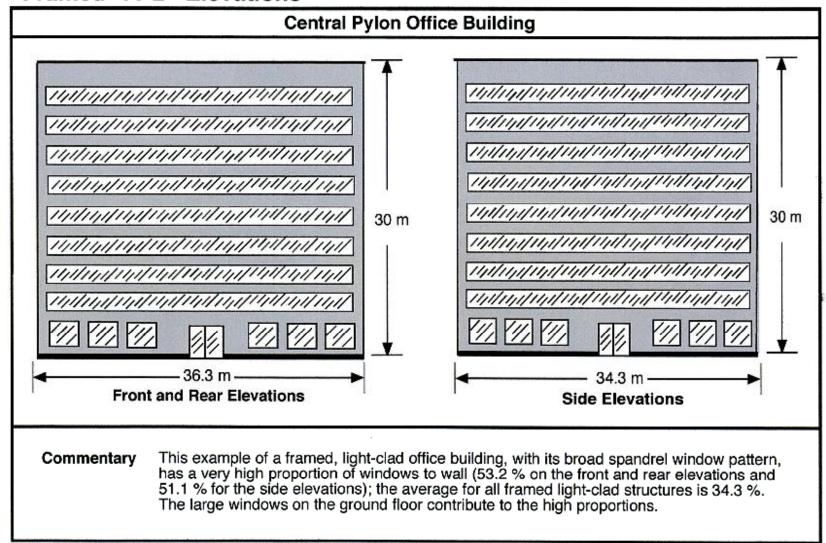


Figure 210. Framed 11-2 elevations.

Framed 11-3-a Floor Plan

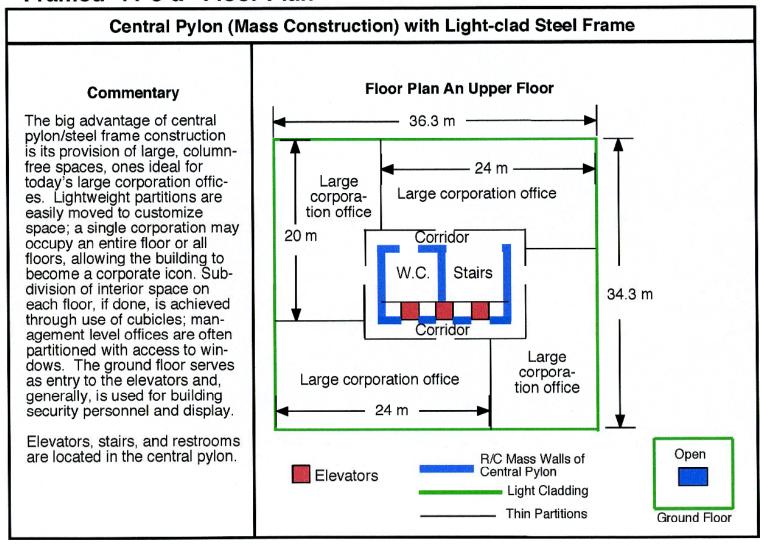


Figure 211. Framed 11-3-a floor plan.

Framed 11-4-a Construction

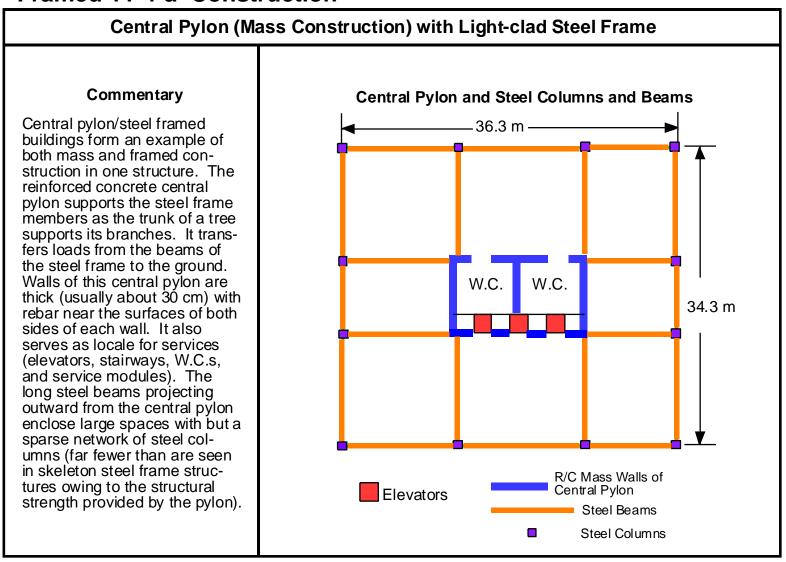


Figure 212. Framed 11-4-a construction.

Framed 11-4-b Construction

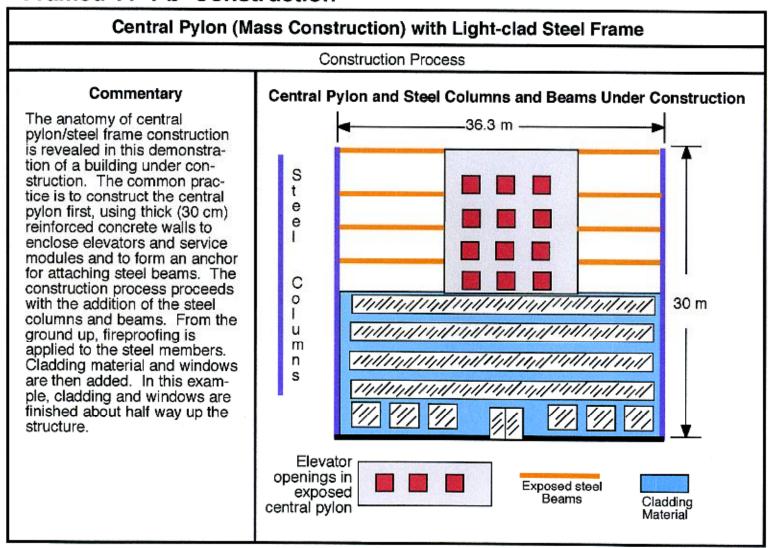


Figure 213. Framed 11-4-b construction.

Framed 11-4-c Construction

Central Pylon (Mass Construction) with Light-clad Steel Frame

Construction details: pylon, frame, and floors



Central pylon building under construction in Tel Aviv, 1999. RE photo.



Beam connections and column/beam connections. *RE photo*



Support for corrugated steel floor. RE photo

Commentary

The central pylon building, to the left, shows pouring concrete into forms in the pylon, erection of the frame, and placement of cladding and windows. Connection details are seen in the center photo. Support for the corrugated steel floor is seen on the right.

Figure 214. Framed 11-4-c construction.

Framed 12-1 Place on Building Construction Chart

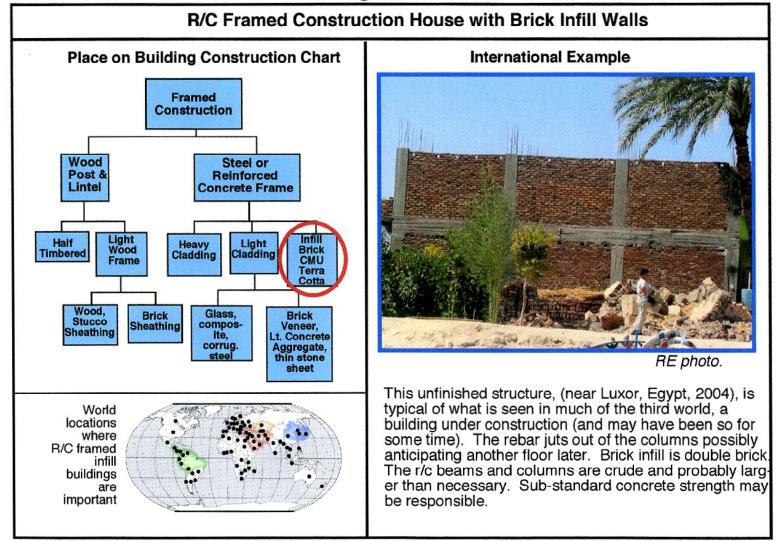


Figure 215. Framed 12-1 place on building construction chart.

Framed 12-2-a Elevation

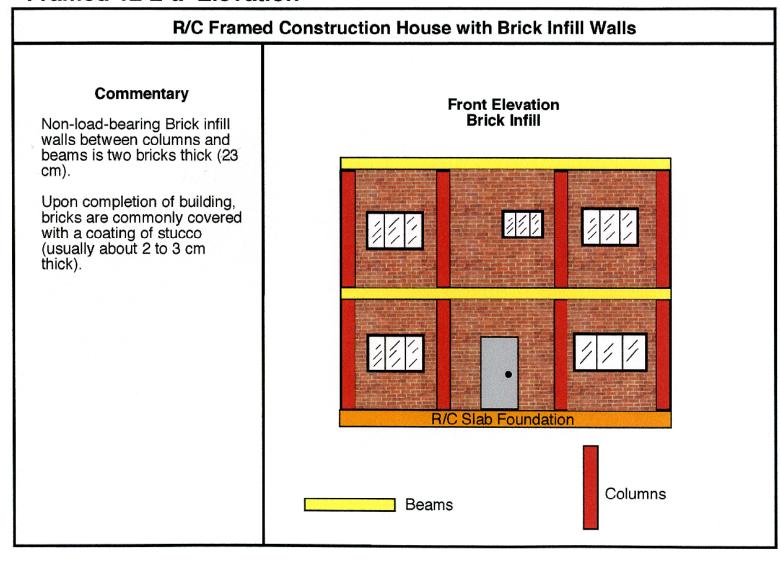


Figure 216. Framed 12-2-a elevation.

Framed 12-2-b Elevation

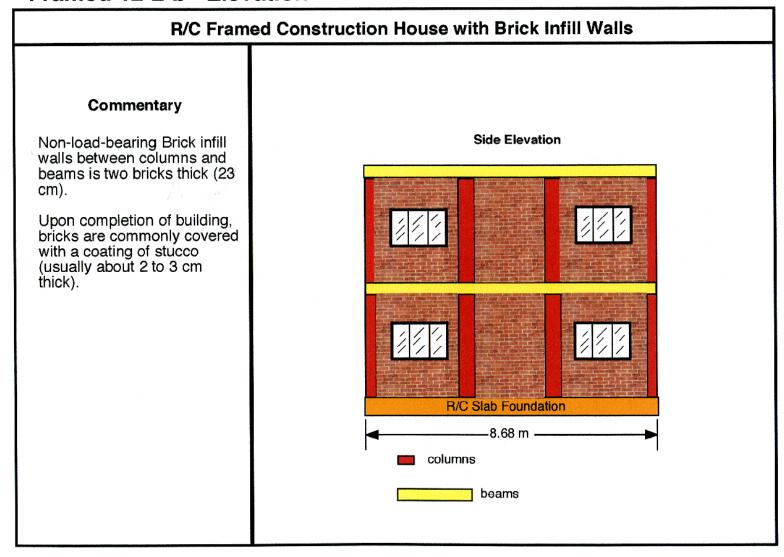


Figure 217. Framed 12-2-b elevation.

Framed 12-3-a Floor Plan

R/C Framed Construction House with Brick Infill Walls Floor Plan (Ground floor of a 2 story house) Commentary While variations on the floor plan given here are infinite, this plan serves as a generic composite. It takes into Family eating consideration dimen-Utility 3 m área sions of rooms, corridor, Kitchen doorways, and windows that have a human scale, based on standard sizes of furniture 1 m Corridor and living space needs. 8.68 m This ground floor plan has rooms, in appropriate sizes, required to Living Room meet common daily 1 m needs: living and family Dining eating areas are joined; 4 m the dining area can be 4 m served by the kitchen; utility needs are met by a small utility room; the 9.78 m kitchen is of modest but adequate size. Entry hall and stairway meet windows doors common needs.

Figure 218. Framed 12-3-a floor plan.

Framed 12-3-b Floor Plan

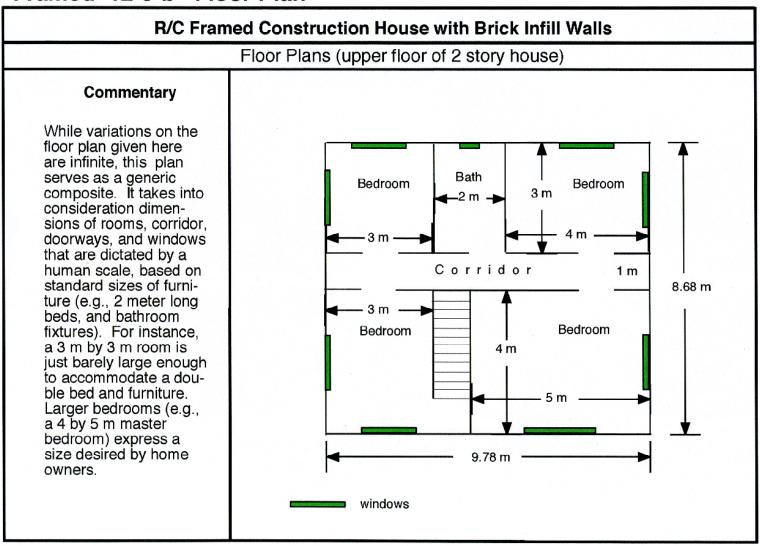


Figure 219. Framed 12-3-b floor plan.

Framed 12-4-a Construction

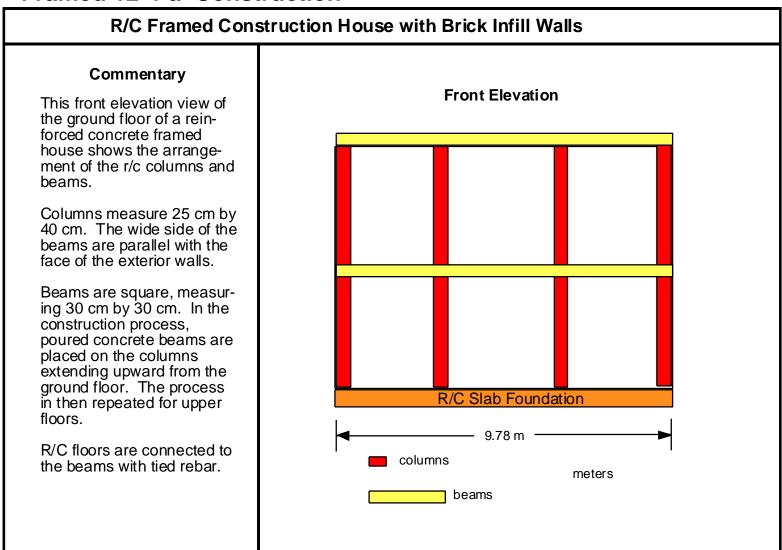


Figure 220. Framed 12-4-a construction.

Framed 12-4-b Construction

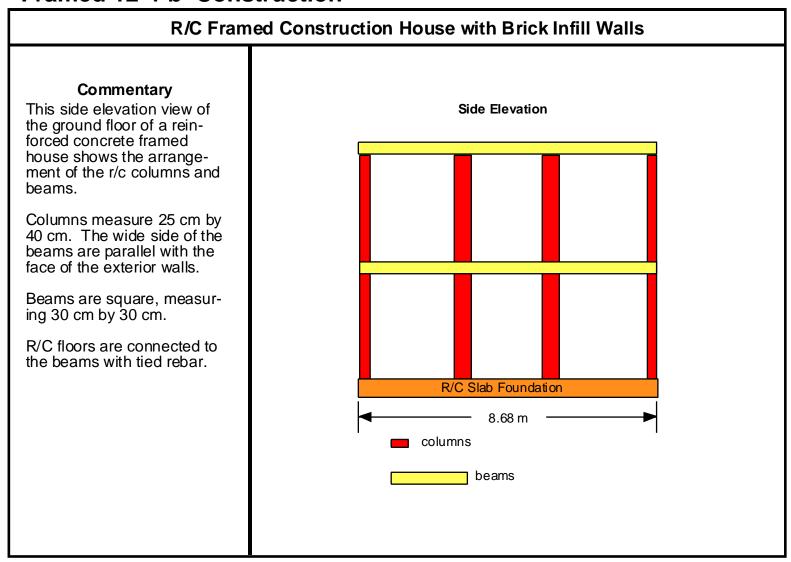


Figure 221. Framed 12-4-b construction.

Framed 12-4-c Construction

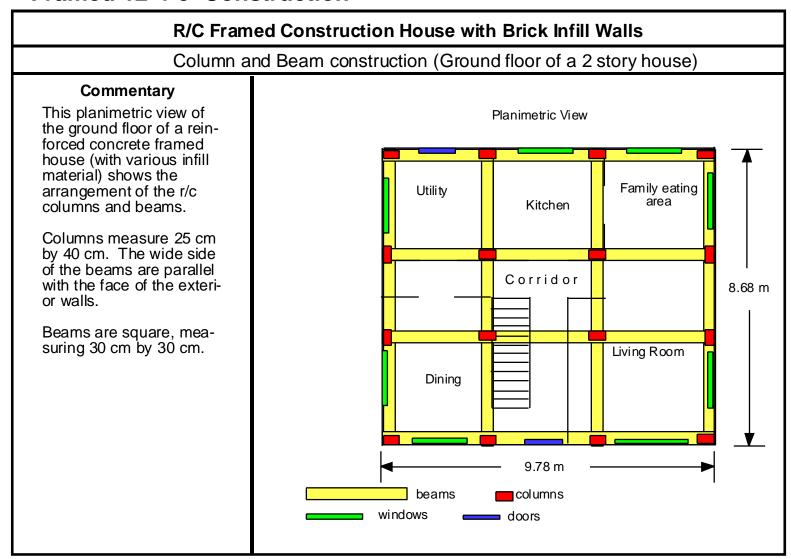


Figure 222. Framed 12-4-c construction.

Framed 12-4-d Construction

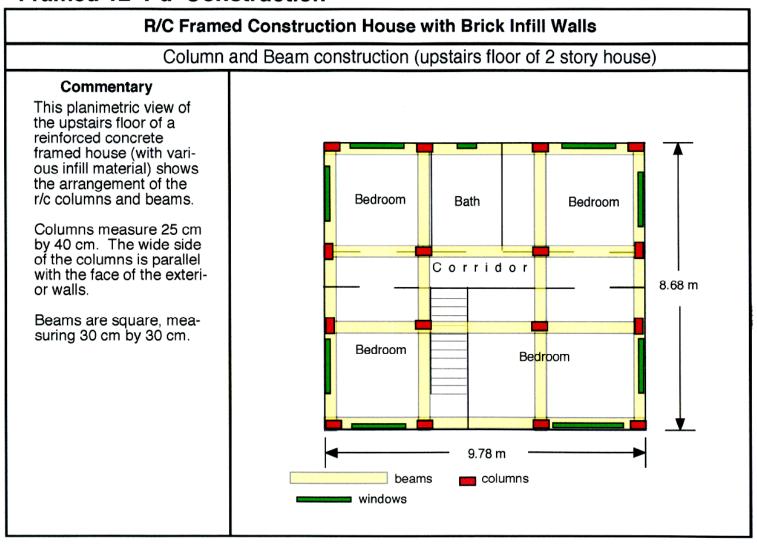


Figure 223. Framed 12-4-d construction.

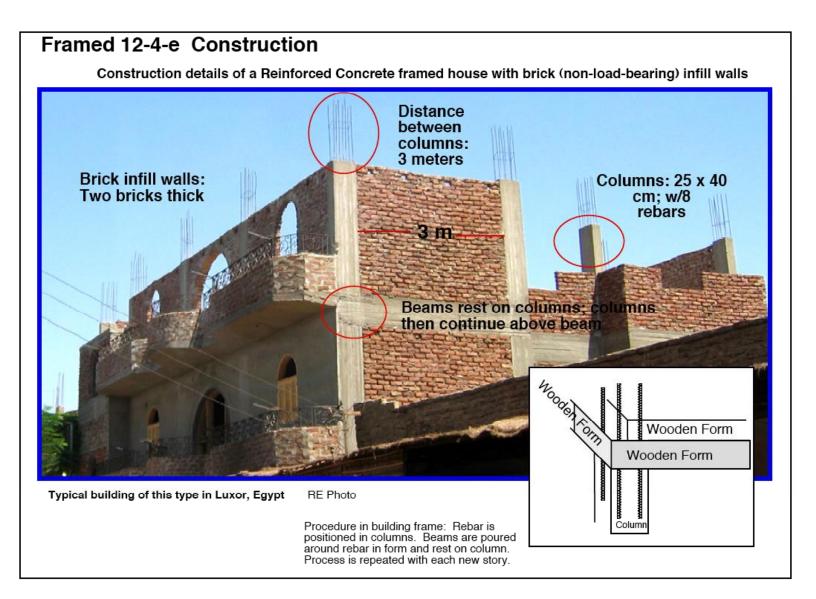


Figure 224. Framed 12-4-e construction.

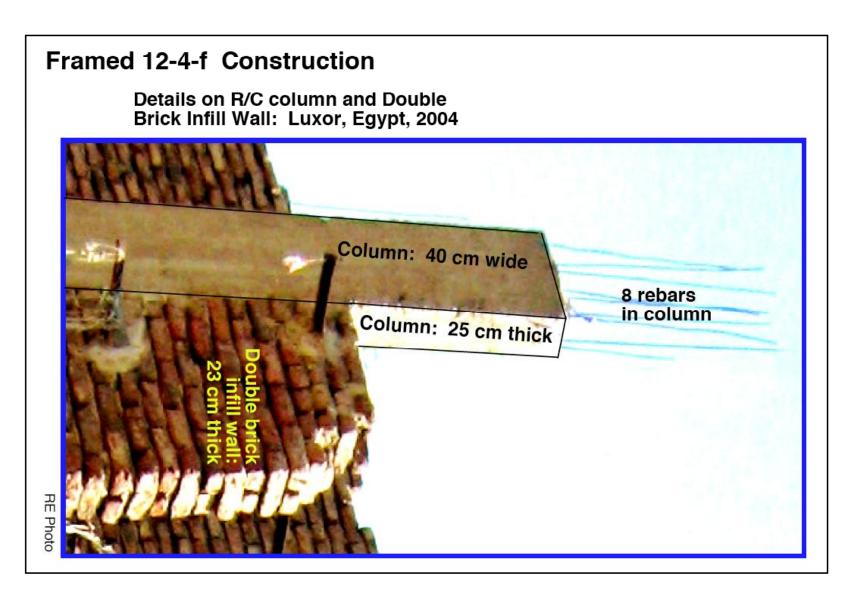


Figure 225. Framed 12-4-f construction.

Framed 13-1 Place on Building Construction Chart

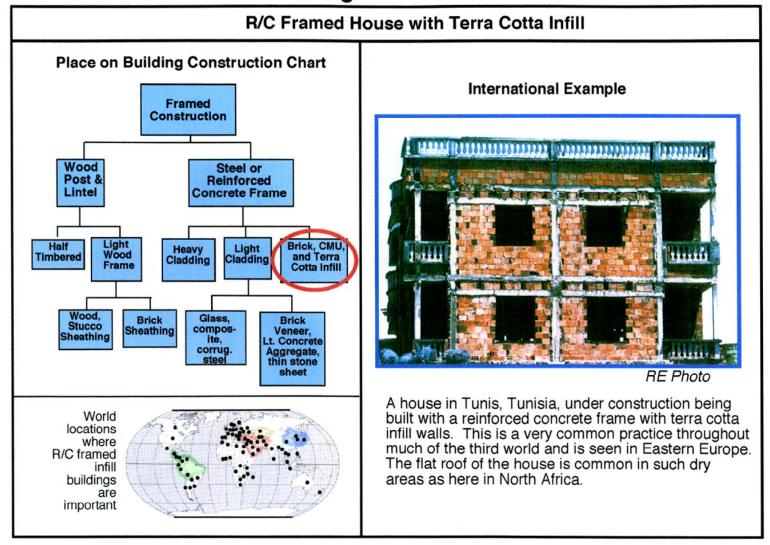


Figure 226. Framed 13-1 place on building construction chart.

Framed 13-2-a Elevation

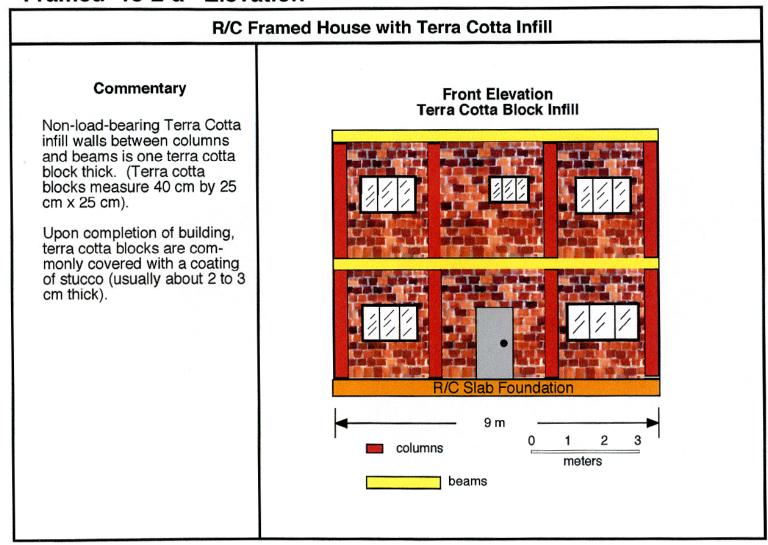


Figure 227. Framed 13-2-a elevation.

Framed 13-2-b Elevation

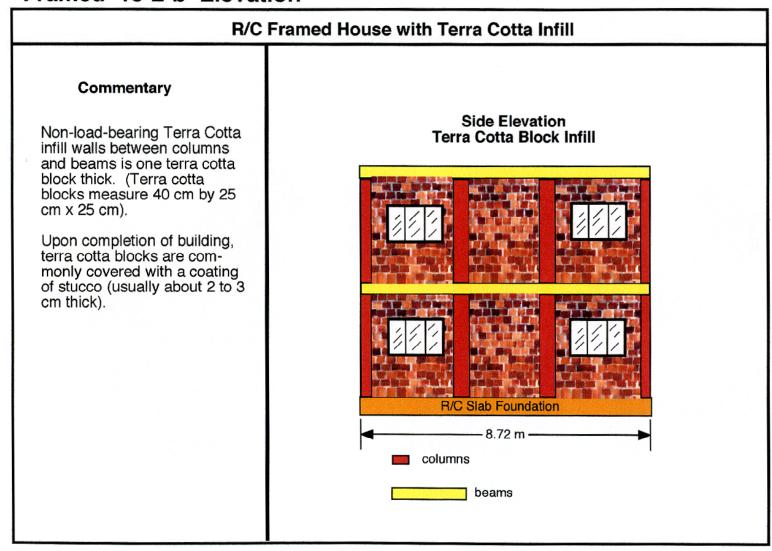


Figure 228. Framed 13-2-b elevation.

Framed 13-3-a Floor Plan

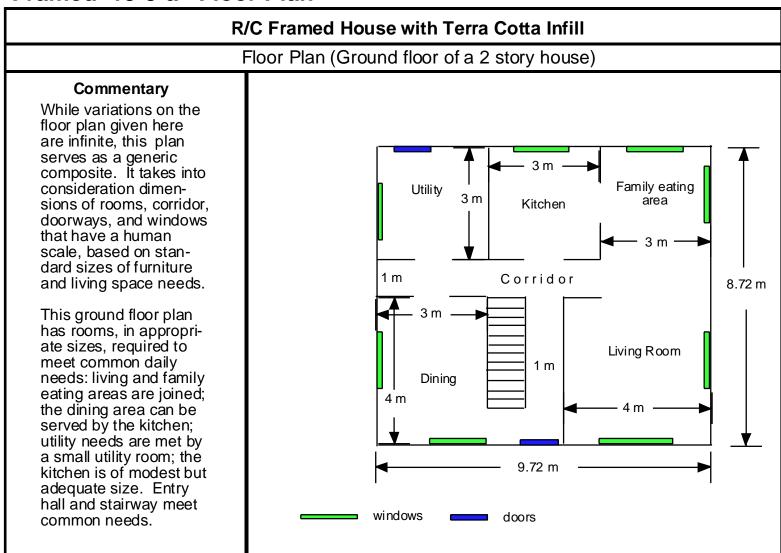


Figure 229. Framed 13-3-a floor plan.

Framed 13-3-b Floor Plan

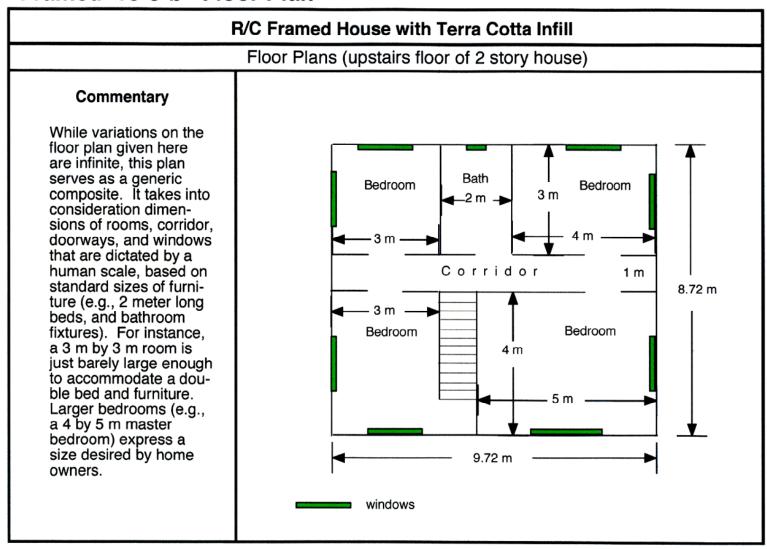


Figure 230. Framed 13-3-b floor plan.

Framed 13-4-a Construction

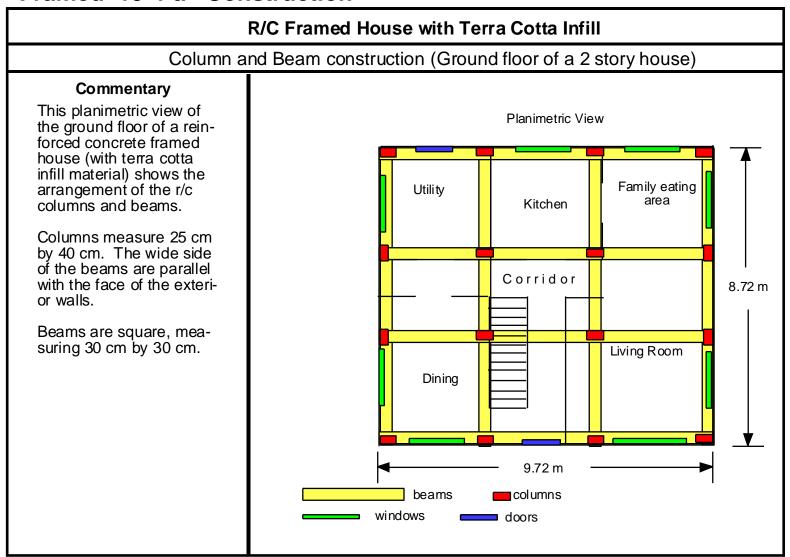


Figure 231. Framed 13-4-a construction.

Framed 13-4-b Construction

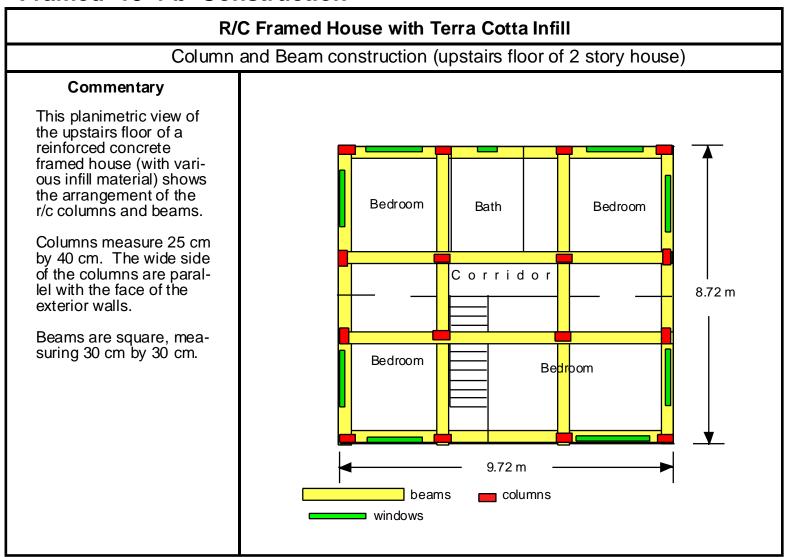


Figure 232. Framed 13-4-b construction.

Framed 14-1 Place on Building Construction Chart

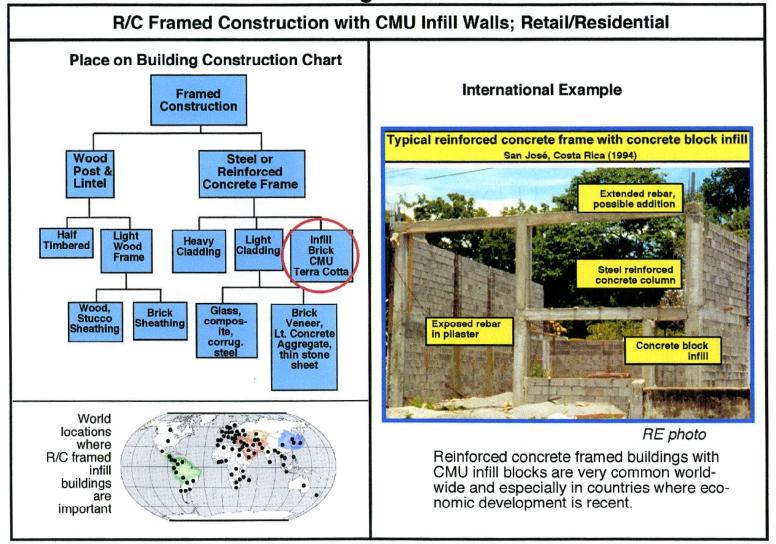


Figure 233. Framed 14-1 place on building construction chart.

Framed 14-2-a Elevation

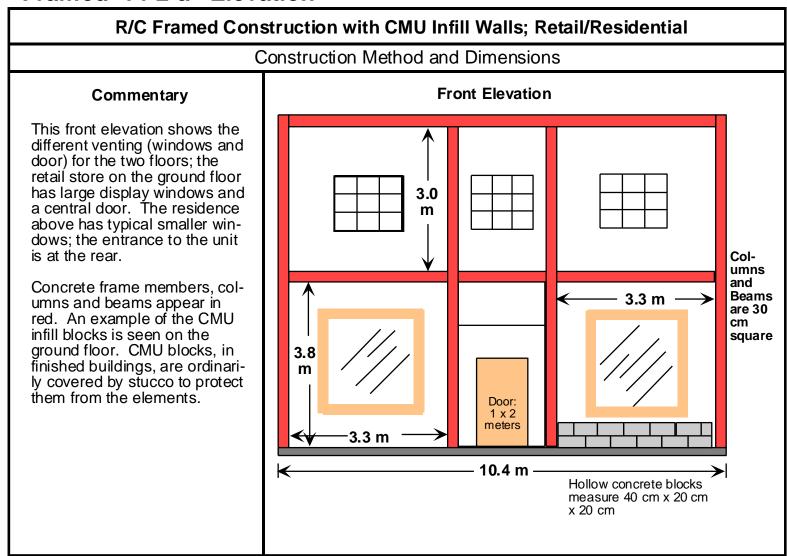


Figure 234. Framed 14-2-a elevation.

Framed 14-2-b Elevation

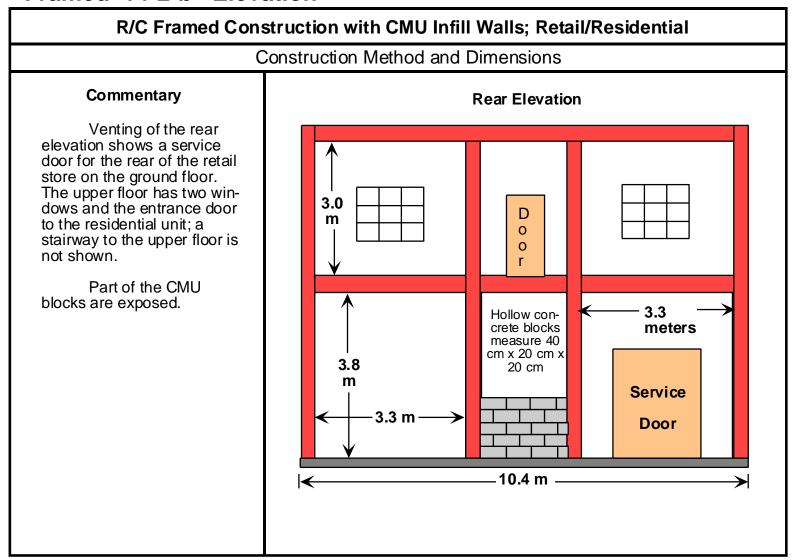


Figure 235. Framed 14-2-b elevation.

Framed 14-3-a Floor Plan

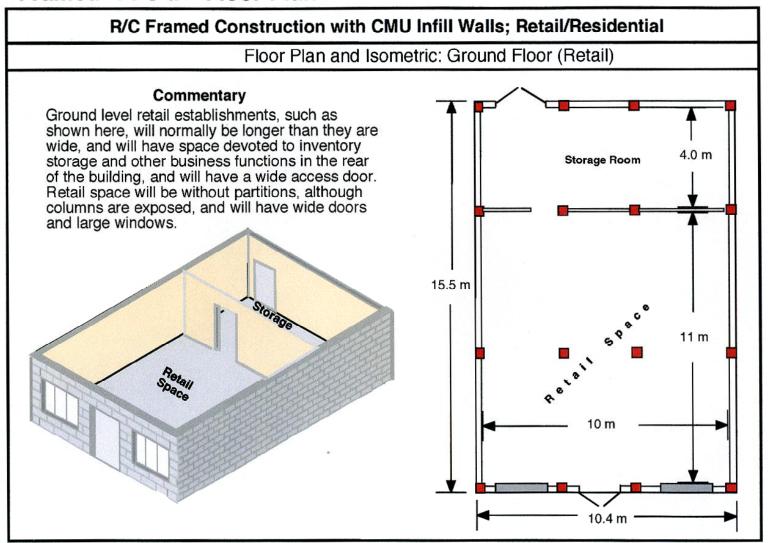


Figure 236. Framed 14-3-a floor plan.

Framed 14-3-b Floor Plan

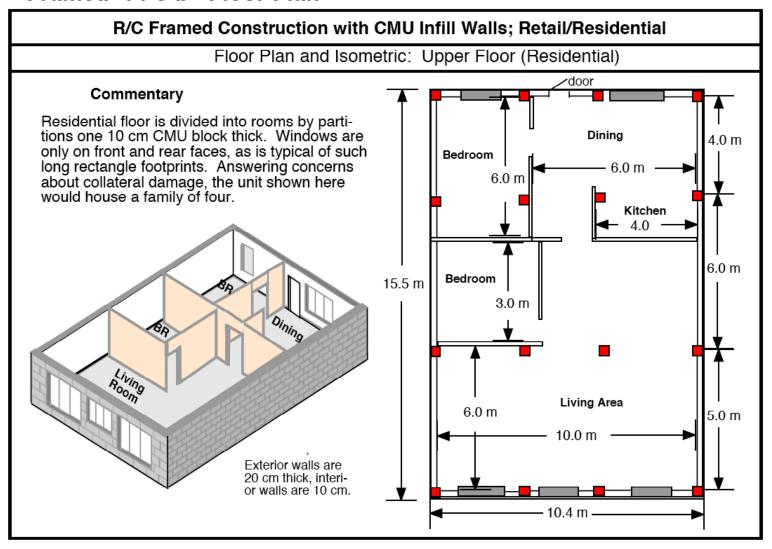


Figure 237. Framed 14-3-b floor plan.

Framed 14-4-a Construction

R/C Framed Construction with CMU Infill Walls; Retail/Residential Construction Method and Dimensions Frame Commentary Loads, in this two story example, are borne by the reinforced concrete columns and beams. Amount of rebar and strength of concrete varies with: height of building; potential earthquake mitigation; economic level of the country in which building is located; quality of materials; local building Hoop Rebar codes; and adherence to those codes by contractors Ноор and inspectors. Structures are built on concrete platforms, and have web reinforced concrete roofs, and floor/ceilings column between stories. Strength of columns: 305 kg/cm² Strength of floor/ceilings: 255 kg/cm²

Figure 238. Framed 14-4-a construction.

Framed 14-4-b Construction

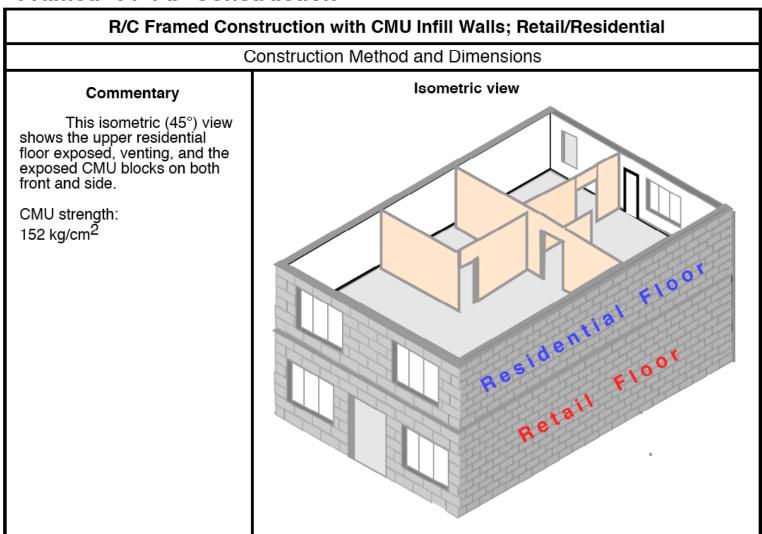


Figure 239. Framed 14-4-b construction.

Framed 15-1 Place on Building Construction Chart

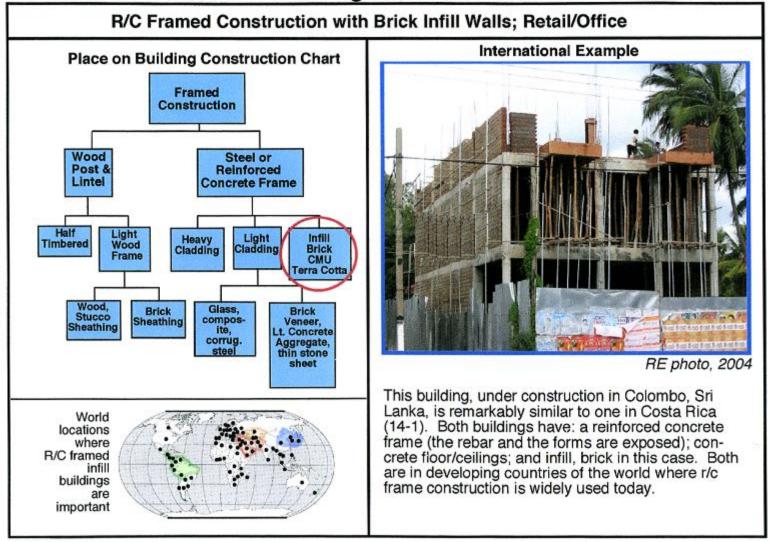


Figure 240. Framed 15-1 place on building construction chart.

Framed 15-2 Elevations

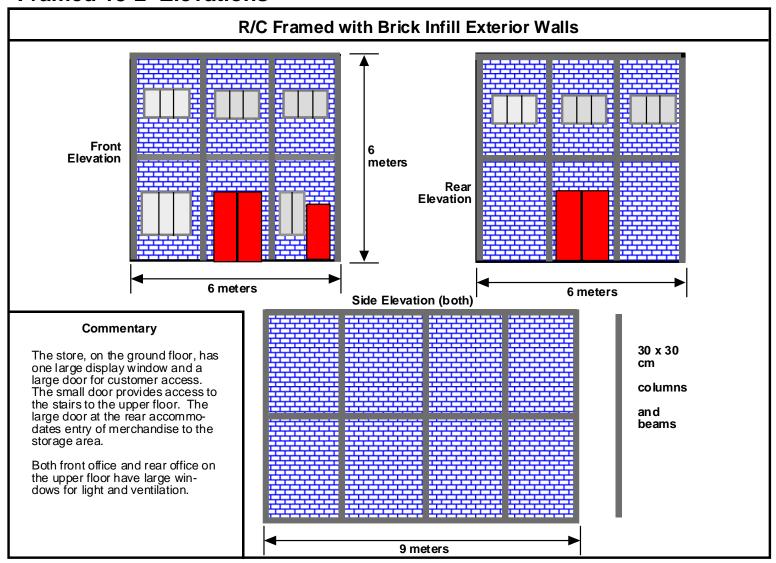


Figure 241. Framed 15-2 elevations.

Framed 15-3-a Floor Plans

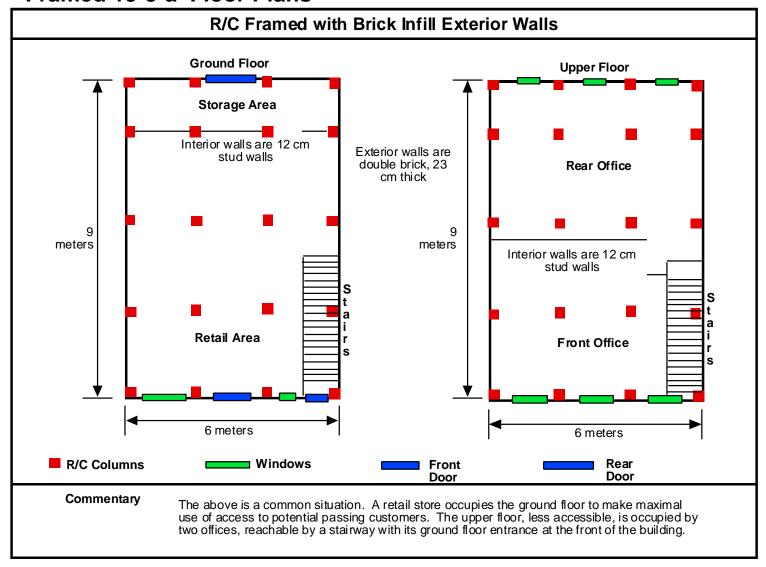


Figure 242. Framed 15-3-a floor plans.

Framed 15-4 Construction

R/C Framed with Brick Infill Exterior Walls 9 meters The standard wall showing r/c columns and beams and brick infill walls.

Commentary

Brick infill can vary greatly in quantity and quality. The upper right example, a street-facing side of a building in Bremen, Germany, uses a refined form of brick infill between R/C mullions. The lower right example, a building in Tel Aviv, Israel, reveals an exceptionally wide (approximately 50 cm) column (with the pattern of the wooden forms still showing). The brick infill is of a size common to the Middle East (23 x 11.5 x 5.7 cm). The wall uses English bond and is apparently three bricks (triple brick) thick. Grouting is irregular indicating that the wall is not structural but serves only to enclose space and provide protection from the elements. from the elements.



Figure 243. Framed 15-4 construction.

Framed 16-1 Place on Building Construction Chart

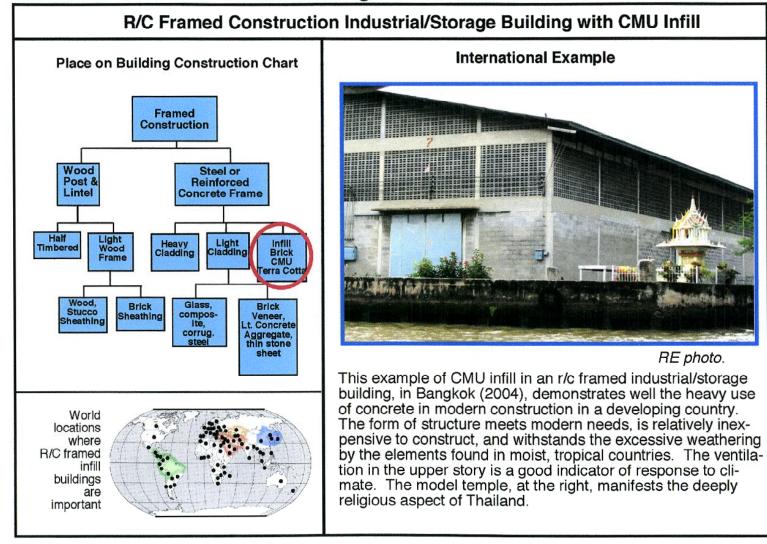


Figure 244. Framed 16-1 place on building construction chart.

Framed 16-2-a Elevation

R/C Framed Construction Industrial/Storage Building (with CMU Infill) Construction Method and Dimensions Commentary **Front Elevation** This elevation (front of building) displays common elements found in such structures. Loads are borne by the rein-Steel Truss forced concrete columns and (Shown exposed) beams. The columns rest on a mass construction reinforced concrete perimeter foundation that is 1 m tall and 20 cm thick. The infill walls are made with CMU blocks that are also 20 5 m cm thick. The roof (of corrugated R/C columns placed 4 m apart Person sheet metal in this example) is Truck Door door supported by steel trusses sup- $3.0 \times 4 \text{ m}$ 1 x 2 m ported by the top beam. 24.51 m The truck entrance to the large open area within the building is 3.0 x 4 m. The person door, leading to the office, is a standard 1 x 2 m. The single window is also 2 x 1 m. The window indicates the location of the office.

Figure 245. Framed 16-2-a elevation.

Framed 16-2-b Elevation

R/C Framed Construction Industrial/Storage Building (with CMU Infill) Construction Method and Dimensions Commentary **Rear Elevation** This rear elevation has the same physical characteristics as the front elevation but shows the doors in their proper Steel Truss locations. (Shown exposed) The roof (of corrugated sheet metal in this example) is supported by steel trusses supported by the top beam. 5 m The truck entrance to the large open area within the m high r/c perimeter foundation building is 3.0 x 4 m. The per-Truck Door Person son door is a standard 1 x 2 m. R/C columns placed 4 m apart door $3.0 \times 4 \text{ m}$ 1 x 2 m 24.51 m

Figure 246. Framed 16-2-b elevation.

Framed 16-3-a Floor Plan

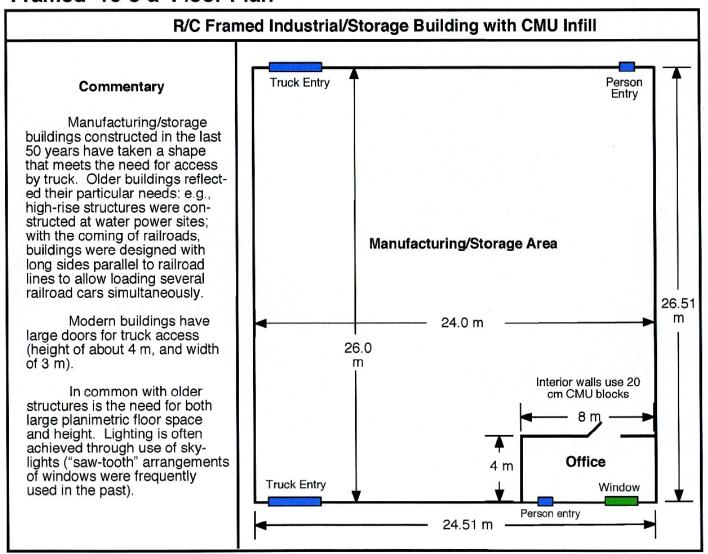


Figure 247. Framed 16-3-a floor plan.

Framed 16-4 Construction

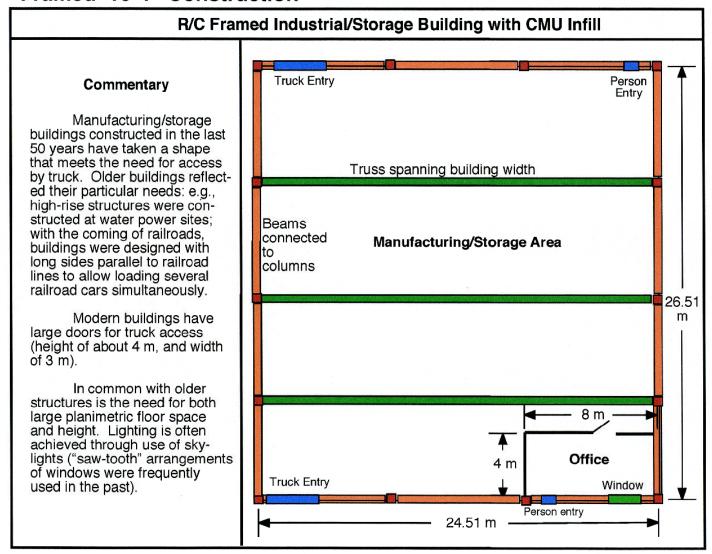


Figure 248. Framed 16-4 construction.

Framed 17-1 Place on Building Construction Chart

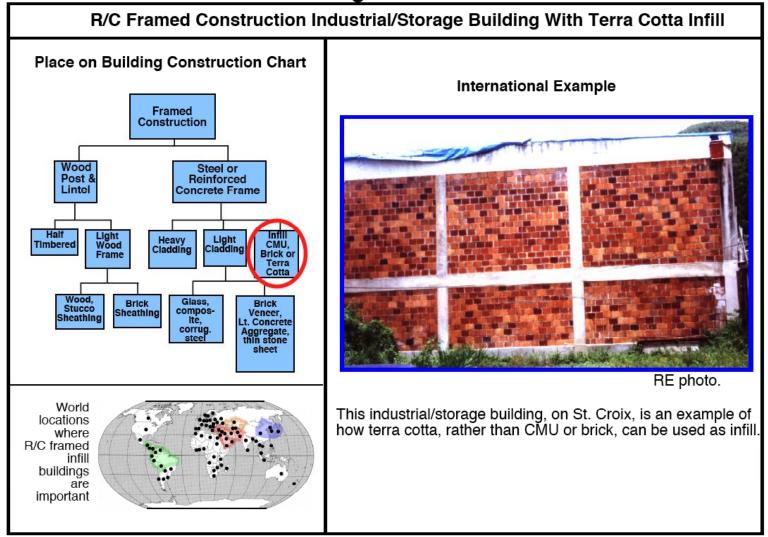


Figure 249. Framed 17-1 place on building construction chart.

Framed 17-2-a Elevation

R/C Framed Construction Industrial/Storage Building (with Terra Cotta Infill) Construction Method and Dimensions Commentary Front Elevation This elevation (front of building) displays common elements found in such structures. Loads are borne by the rein-Steel Truss (Shown exposed) forced concrete columns and beams; beams rest on corbels. The columns rest on a mass construction reinforced concrete perimeter foundation and is 1 m tall and 20 cm thick. 5 m Terra cotta infill measures 40 cm by 25 cm x 25 cm) and the wall is thus 25 cm thick. R/C columns placed 4 m apart Person Truck Door The roof (of corrugated door 3.0 x 4 m 1 x 2 m sheet metal in this example) is supported by steel trusses supported by the top beam. 24.51 m The truck entrance to the large open area within the building is 3.0 x 4 m. The person door, leading to the office, is a standard 1 x 2 m. The single window, also 2 x 1 m. shows office location.

Figure 250. Framed 17-2-a elevation.

Framed 17-2-b Elevation

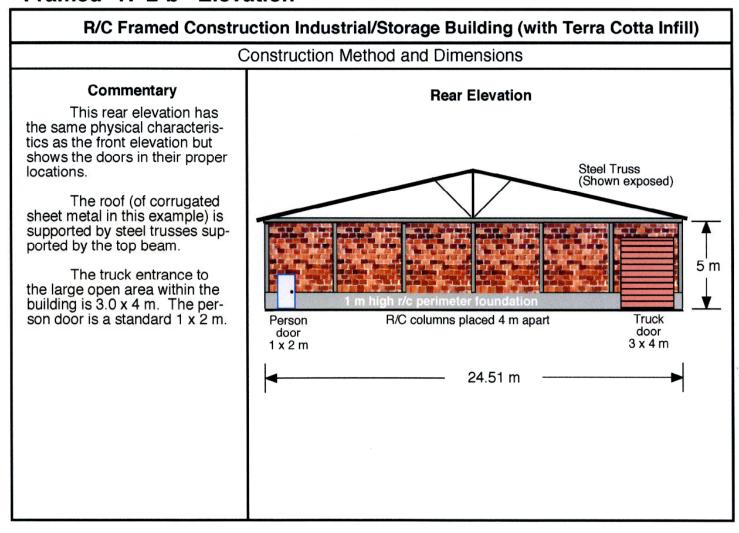


Figure 251. Framed 17-2-b elevation.

Framed 17-3-a Floor Plan

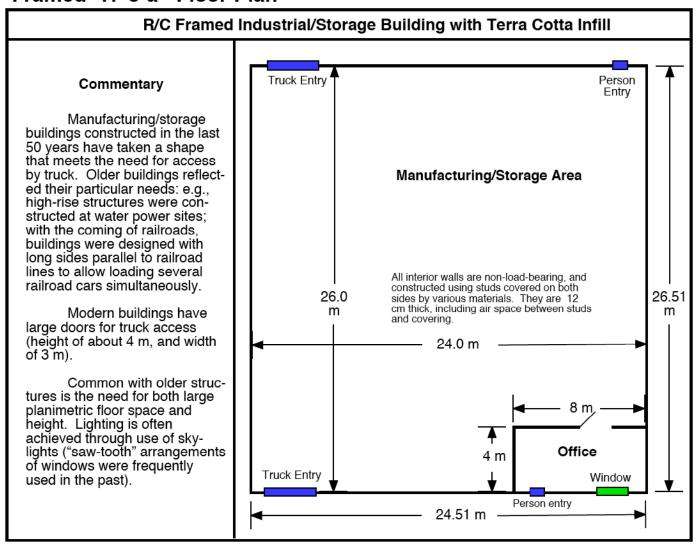


Figure 252. Framed 17-3-a floor plan.

Framed 17-4 Construction

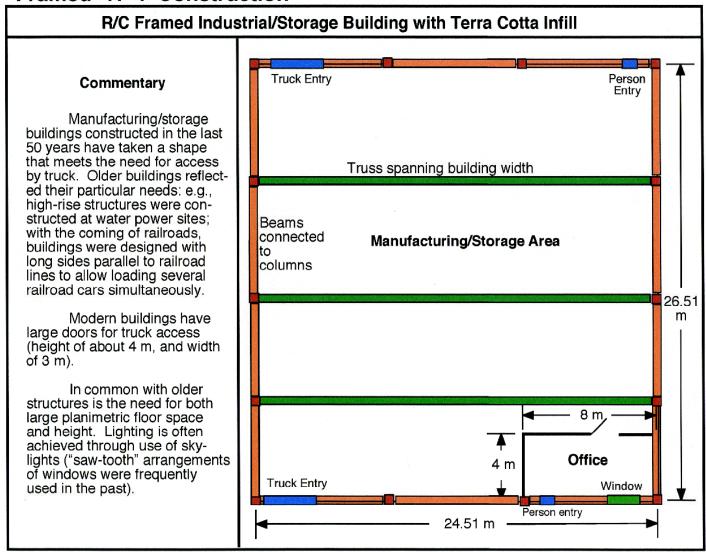


Figure 253. Framed 17-4 construction.

Framed 18-1 Place on Building Construction Chart

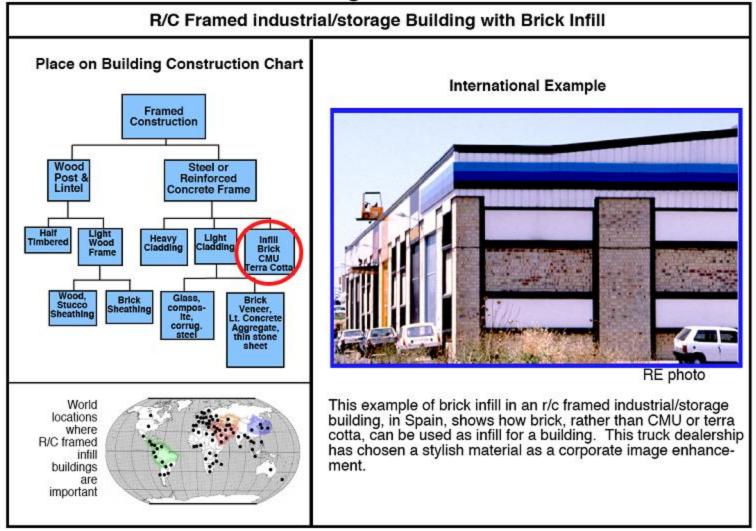


Figure 254. Framed 18-1 place on building construction chart.

Framed 18-2-a Elevation

R/C Framed Construction Industrial/Storage Building (with Brick Infill) Commentary **Front Elevation** This front elevation displays common elements found in such structures. Loads are borne by the reinforced con-Steel Truss crete columns and beams: (Shown exposed) beams rest on corbels. The columns rest on a 1 meter high, 25 cm thick mass construction reinforced concrete perimeter foundation. 23 cm brick infill walls fill space between col-5 m 11/1 umns. The roof (of corrugated Steel columns placed 4 m apart Person Truck Door sheet metal in this example) is door 3 x 4 m supported by steel trusses sup-1 x 2 m ported by the top beam. 24.51 m The truck entrance to the large open area within the building is 3 x 4 m. The person door, leading to the office, is a standard 1 x 2 m. The single window, 2 x 1 m, shows office location.

Figure 255. Framed 18-2-a elevation.

Framed 18-2-b Elevation

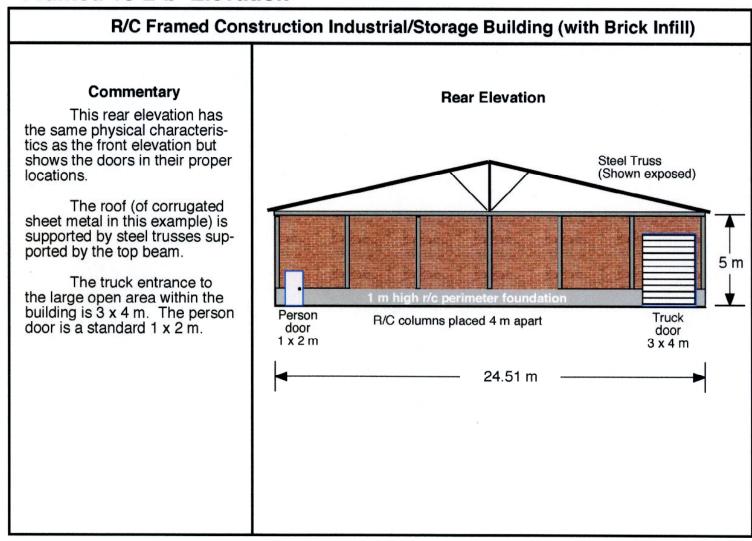


Figure 256. Framed 18-2-b elevation.

Framed 18-3-a Floor Plan

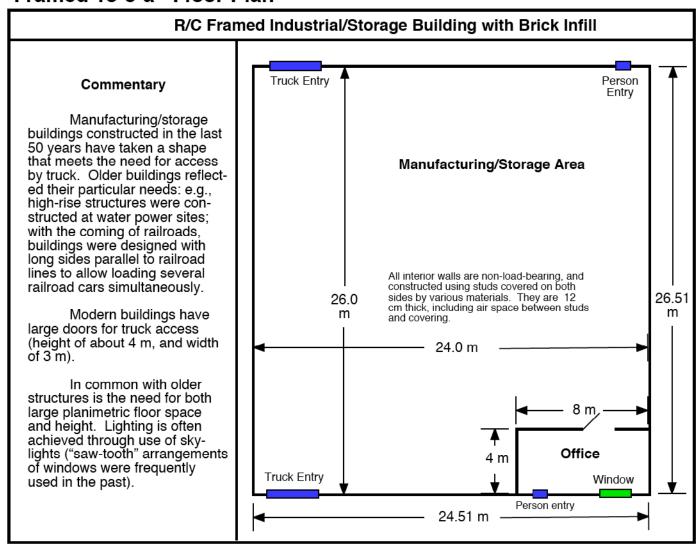


Figure 257. Framed 18-3-a floor plan.

Framed 18-4 Construction

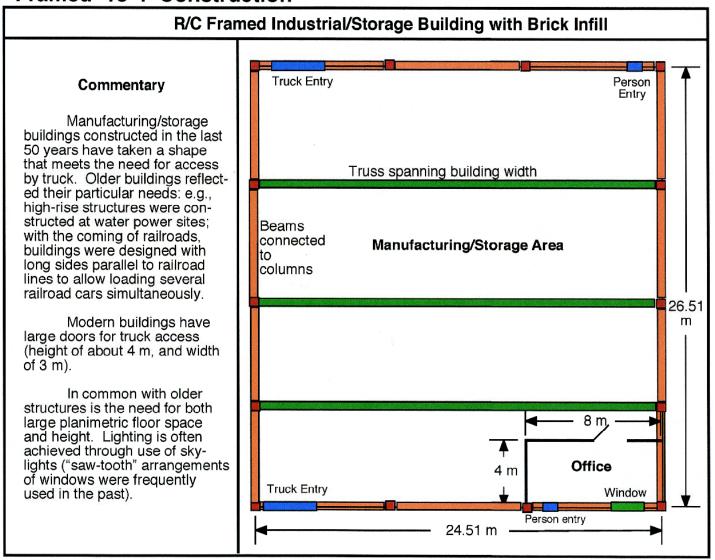


Figure 258. Framed 18-4 construction.

Framed 19-1 Place on Building Construction Chart

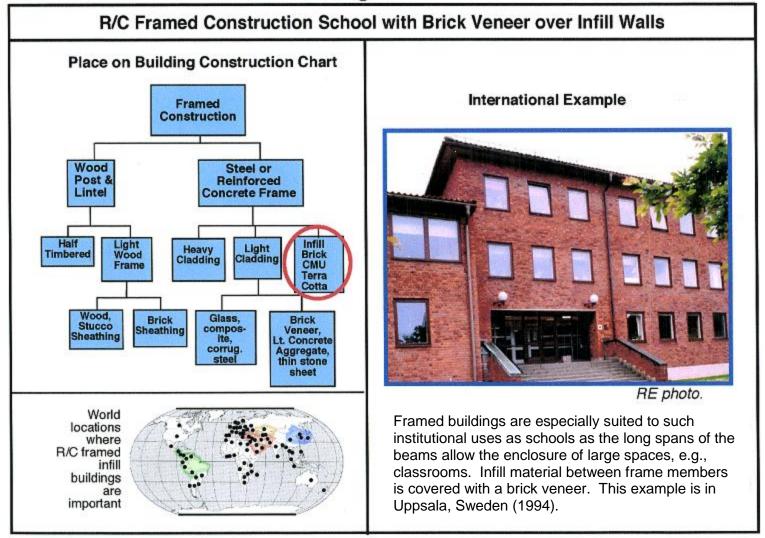


Figure 259. Framed 19-1 place on building construction chart.

Framed 19-2 Elevation

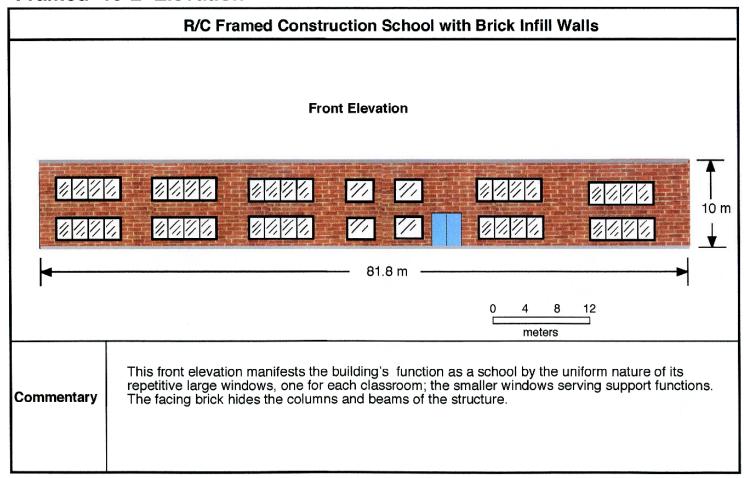


Figure 260. Framed 19-2 elevation.

Framed 19-3-a Floor Plan

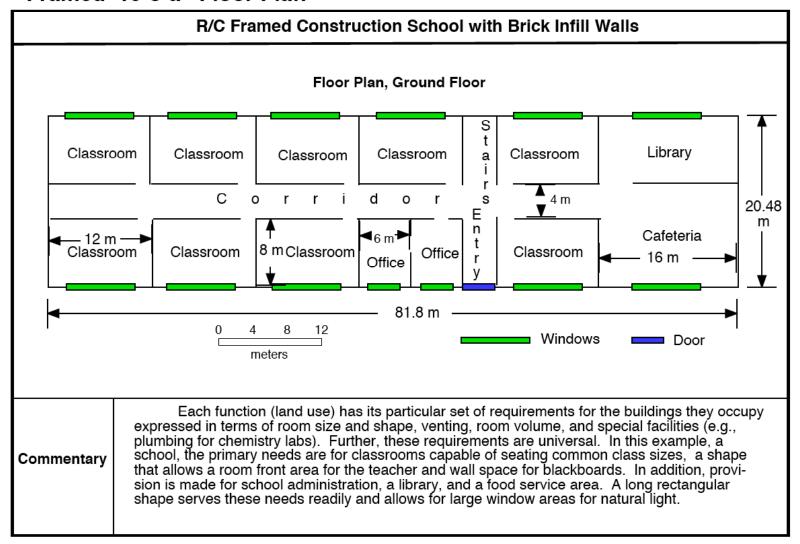


Figure 261. Framed 19-3-a floor plan.

Framed 19-3-b Floor Plan

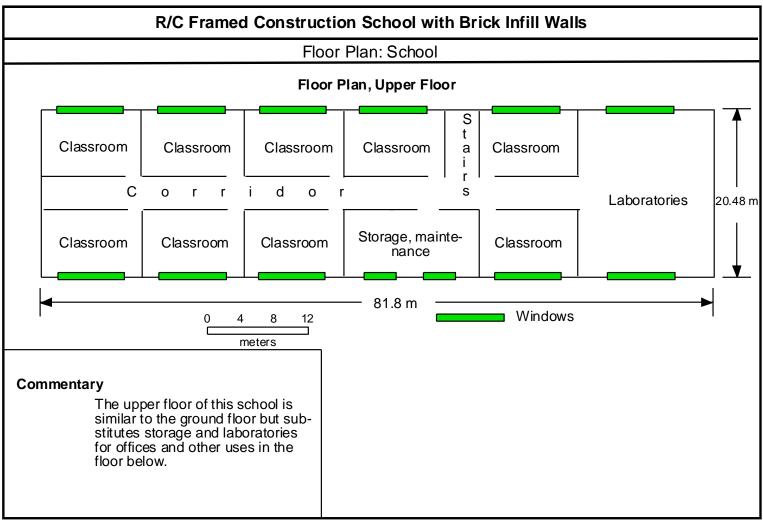


Figure 262. Framed 19-3-b floor plan.

Framed 19-4 Construction

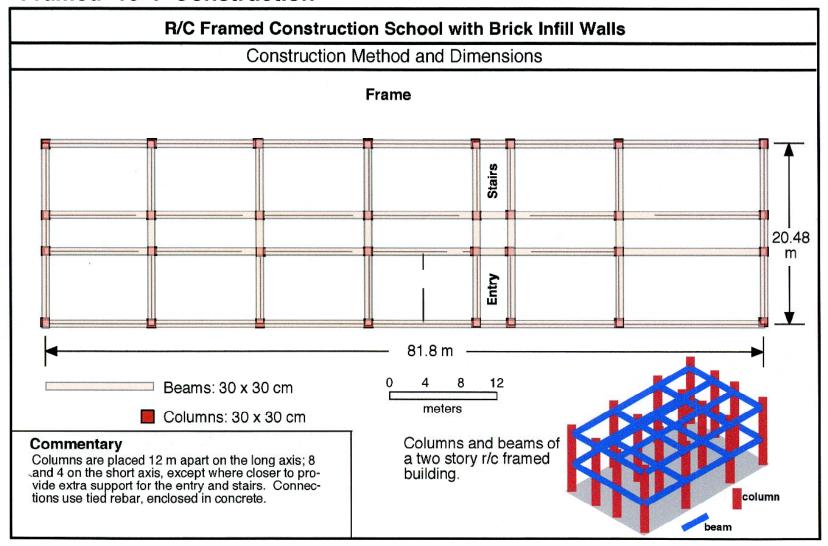


Figure 263. Framed 19-4 construction.

Framed 20-1 Place on Building Construction Chart

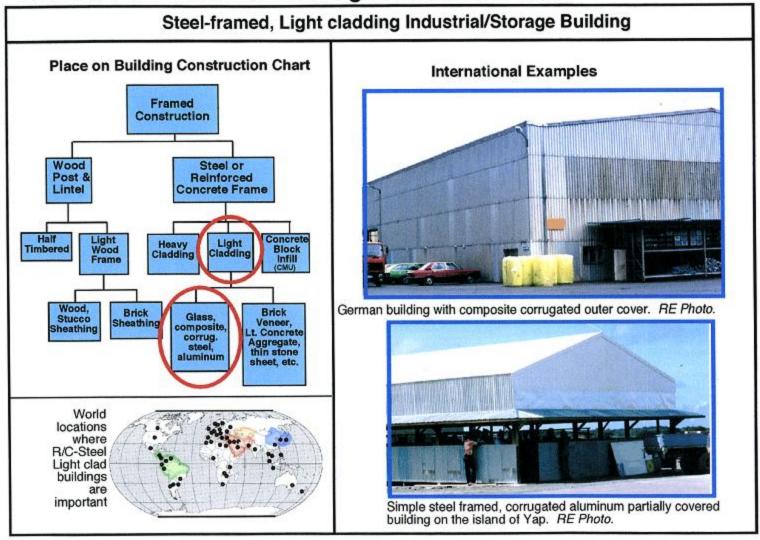


Figure 264. Framed 20-1 place on building construction chart.

Framed 20-2 Elevation

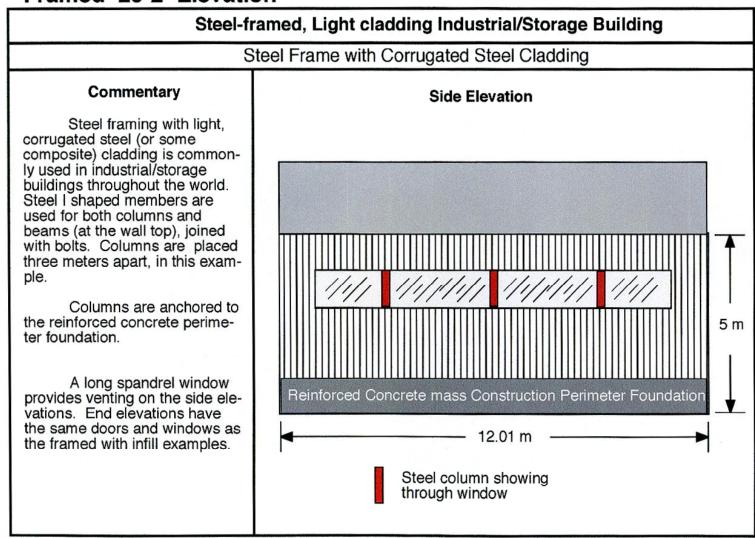


Figure 265. Framed 20-2 elevation.

Framed 20-3-a Floor Plan

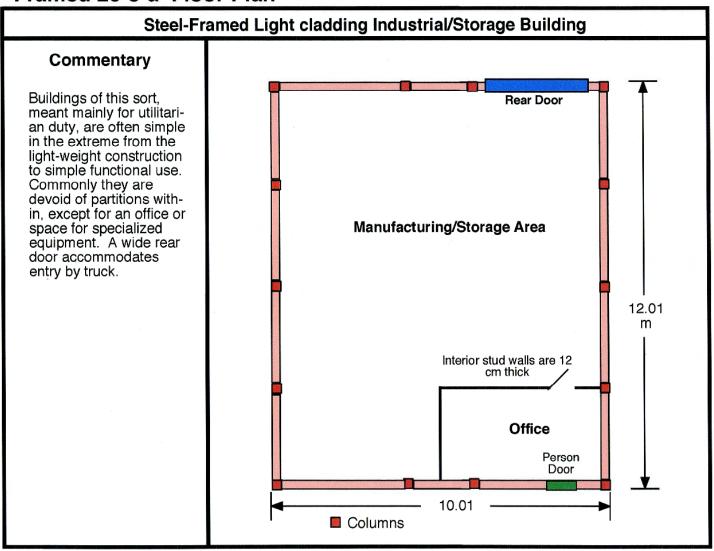


Figure 266. Framed 20-3-a floor plan.

Framed 20-4 Construction

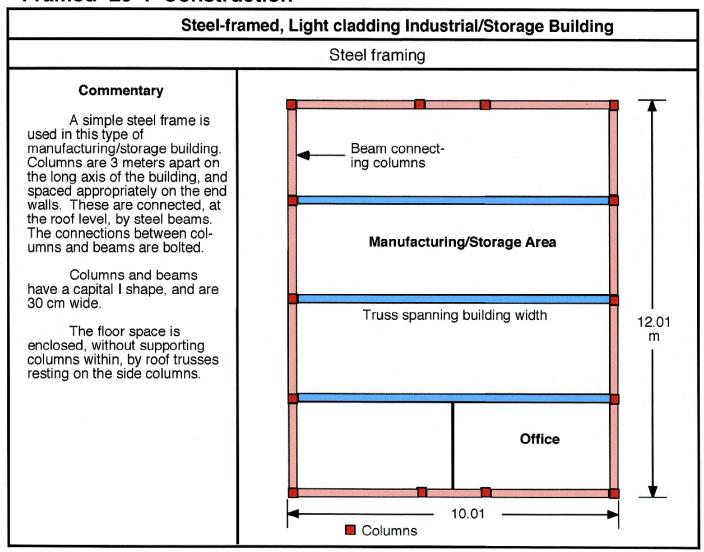


Figure 267. Framed 20-4 construction.

Framed 21-1 Place on Building Construction Chart

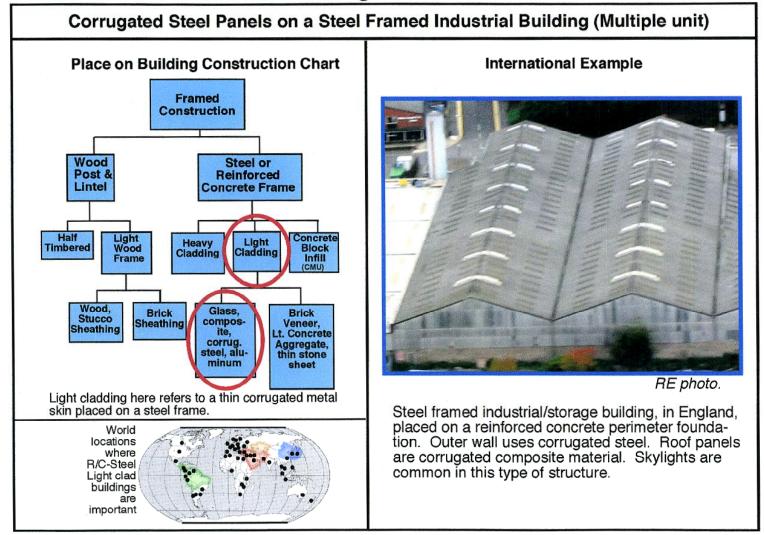


Figure 268. Framed 21-1 place on building construction chart.

Framed 21-2 Elevation

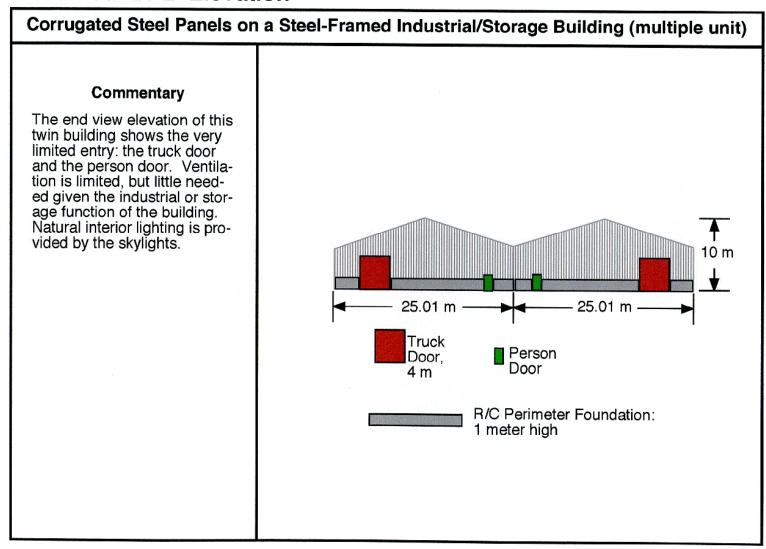


Figure 269. Framed 21-2 elevation.

Framed 21-3-a Floor Plan

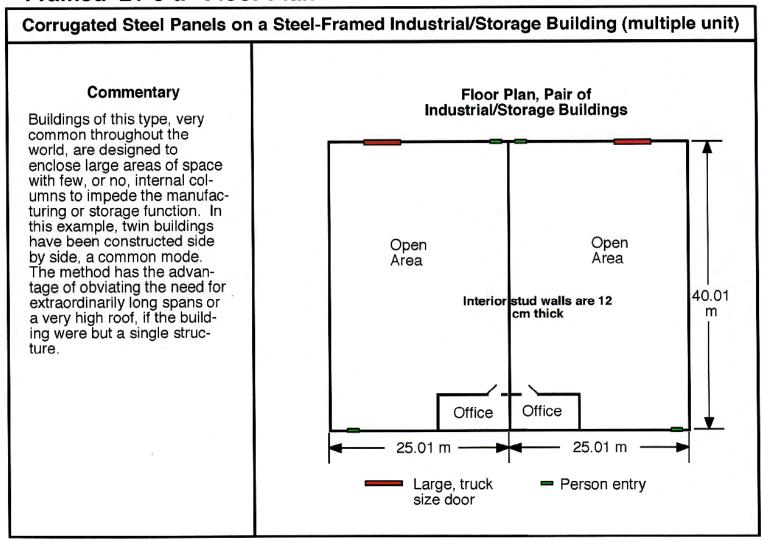


Figure 270. Framed 21-3-a floor plan.

Framed 21-4 Construction

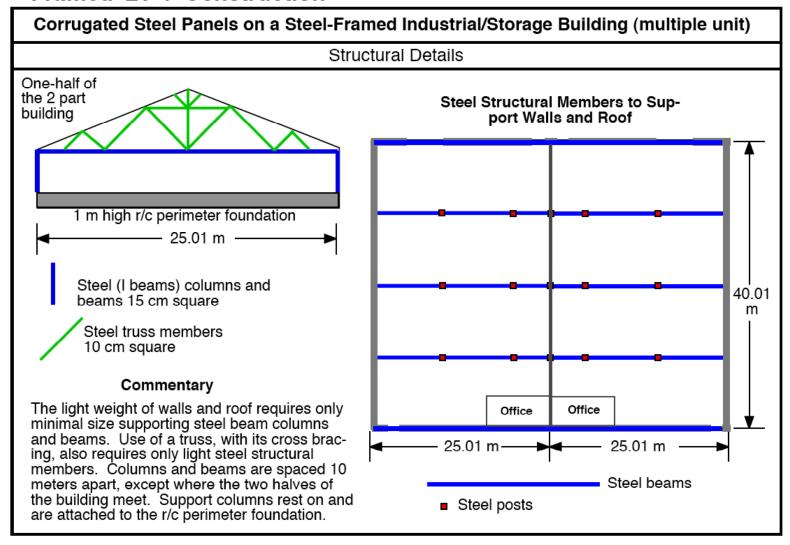


Figure 271. Framed 21-4 construction.

13. Urban Terrain Zones

The UTZ inventory system plays an integral supporting role to the UTBTs depicted in this report. While the building type catalog provides details on the characteristics of each structure type, the UTZs give them a locational home within a city. Indeed, the UTZ system—applicable worldwide—was designed for the express purpose of providing the urban operations planner with information on the nature of buildings to be anticipated in various parts (zones) of the urban environment.

To delineate a UTZ, the presence of various building types and settings is first observed, either from synoptic aerial or satellite views, and confirmed with ground truth if possible. Areas of homogeneous building types then become the UTZs. Then, lines are drawn to bound these homogeneous areas of like buildings; the appropriate UTZ class number is then assigned. For each UTZ plate, the building characteristics are as follows:

- Building Function and Density (as in the title of each UTZ). The function outlines common land-use classes, i.e., houses, apartments, commercial, industrial, and institutions. The density outlines buildings that are attached (or abutted); detached but closely spaced; or detached and widely spaced.
- 2. Building Separation. Statement and measurement of the amount of space separating buildings, either attached, closely spaced (less than 13 m), or widely spaced (more than 13 m).

- 3. Building Setting. Where the UTZ is located within the city, e.g., city core, new residential development at the edge of the city, or along railroad lines.
- 4. Building Construction Type. The general type of construction is listed, e.g., brick or R/C framed with infill walls.
- 5. Range of Building Heights. The height is given in stories, ranging from houses 2 to 3 stories, to city core areas with buildings from 5 to 50+ stories.
- 6. Age. The period when most of the buildings in a UTZ were constructed, e.g., post–World War II for a modern suburban development.

The UTZ system is essentially a method to inventory the morphology of an entire city (covering the full area of the corporate city and its adjacent contiguously built-up area that frequently includes other corporate units and built-up unincorporated areas). Taking such an inventory produces a map on which boundaries demarcating the zones have been drawn (see figures 274 and 275 for examples). For a variety of users—ranging from urban operations to weapons and munitions testers, to combat development, and to the modeling and simulation community—UTZ maps give critical information on the quantity and spatial distribution of the various building construction types. Analysis of the map product quickly reveals, for example, the relative number of framed high-rise buildings vs. low-rise brick houses.

Urban operations can take advantage of the naturally occurring spatial clustering of similar building types in homogeneous zones, or sectors, within a city. This is the product of a universal response to economic laws and principles, such as the A1 UTZ with its attached buildings occupying much of their land parcels to make maximal use of expensive land, made so by being located at significant junction points, such as road intersections or river confluences. In another example, industrial land uses and their associated building types are found along rail lines or at a break-of-bulk point where rails meet navigable water. Urban zoning, coming along later, simply codifies these natural occurring clusters of like land uses.

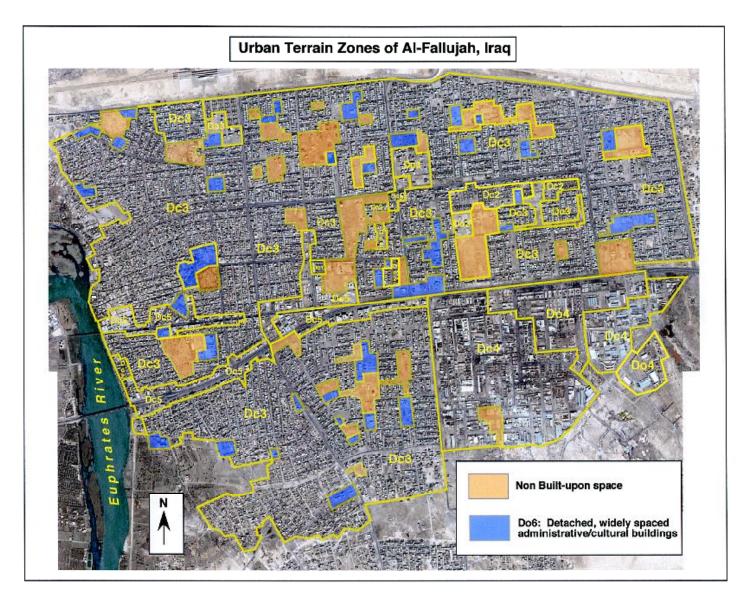


Figure 272. UTZ of Al Fallujah, Iraq.

Contemporary Urban Terrain Zones (UTZs) in a part of the city of Al Fallujah, Iraq



Several Urban Terrain Zones appear in this segment of Al Fallujah. Boundaries are located mainly along the center line of streets. Commercial stores are located along the major boulevard (the Do5 class). The Do6 polygon contains a mosque. Detached industrial/storage buildings are either closely spaced (Dc4) or widely spaced (Do4).

Urban Terrain Zones in this window

Dc: Detached, closely spaced buildings < 13 meters apart

Dc3: Detached, closely spaced houses

Dc4: Detached, closely spaced industrial/storage buildings

Do: Detached, widely spaced buildings > 13 meters apart

Do4: Detached, widely spaced industrial/storage buildings

Do5: Detached, widely spaced commercial buildings

Do6: Detached, widely spaced institutional buildings

Figure 273. Contemporary UTZs in a partial of the city of Al Fallujah, Iraq.

In short, the spatial distribution of the various building types is predictable. Attached buildings occupy expensive land in the city's core and along commercial arterials extending outward. Closely spaced buildings are found near the core on quite expensive land. Widely spaced buildings are found on the least expensive land at the city's periphery or anywhere within the city as they are the product of comprehensive planning, as in an urban redeveloped area or on public space, e.g., a city or national government complex, as in Washington D.C.

The UTZ classification scheme, being a full inventory of a city's homogeneous urban areas, should not be confused with the sort of spatial models seen in such publications as FM 90-10-1 where hypothetical, broad, general zones of a city are portrayed. Examples are city core, commercial ribbon, and outlying high-rise area.

Of special value to using the 44 types of buildings in this document, each UTZ title includes the predominant building type. The complete list, organized into the three basic density groups, is found in table 2.

Urban Terrain Zone (UTZ) A1: Attached Commercial Buildings

Urban Terrain Zone A1

Building Function and Density:

Attached commercial buildings, mainly in city centrum

Building Separation:

Attached along streets

Building Setting:

The evolved part of the city where buildings were built one by one, and not part of a planned whole

Building Construction Type:

Brick buildings, framed heavy clad buildings, and some replacement framed light clad buildings

Range of Building Heights:

5 - 50 Stories

Age:

From several hundred year old brick buildings, to framed heavy clads 1890-1930, to recent light clad buildings

A1 Example: San Jose, Costa Rica



RE Photo

Figure 274. UTZ A1: attached commercial buildings.

Urban Terrain Zone (UTZ) A2: Attached Apartments and Hotels

Urban Terrain Zone A2

Building Function and Density:

Attached apartment and hotel buildings in core periphery

Building Separation:

Attached along streets

Building Setting:

The evolved part of the city where buildings were built one by one, and not part of a planned whole

Building Construction Type:

Brick buildings, framed heavy clad buildings, and some replacement framed light clad buildings

Range of Building Heights:

5 - 10 Stories

Age:

From several hundred year old brick buildings, to framed heavy clads 1890-1930

A2 Example: Budapest, Hungary



RE Photo

Figure 275. UTZ A2: attached apartments and hotels.

Urban Terrain Zone (UTZ) A3: Attached Houses

Urban Terrain Zone A3

Building Function and Density:

Attached houses

Building Separation:

Attached along streets

Building Setting:

The evolved part of the city where buildings were built one by one, and not part of a planned whole

Building Construction Type:

Mainly brick buildings with some framed replacements

Range of Building Heights:

2-3 Stories

Age:

19th and early 20th century

A3 Example: Bremen, Germany

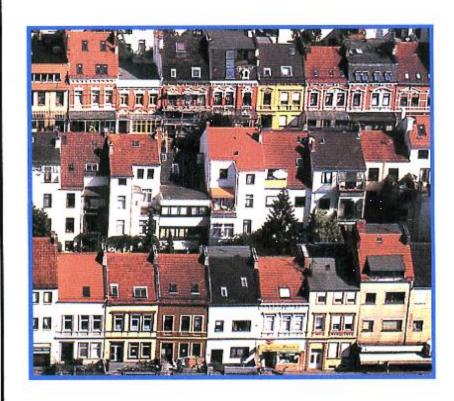


Figure 276. UTZ A3: attached houses.

Urban Terrain Zone (UTZ) A4: Attached Industrial/Storage Buildings

Urban Terrain Zone A4

Building Function and Density:

Attached Industrial/storage

Building Separation:

Attached

Building Setting:

Usually found near the original core of cities

Building Construction Type:

Mainly brick buildings with some framed replacements

Range of Building Heights:

2-3 Stories

Age:

19th and early 20th century

A4 Example: Xian, China



RE Photo

Figure 277. UTZ A4: attached industrial/storage buildings.

Urban Terrain Zone (UTZ) A5: Attached Commercial Buildings Along Arterial Streets

Urban Terrain Zone A5

Building Function and Density:

Attached commercial buildings along string streets

Building Separation:

Attached

Building Setting:

Usually found near the original core of cities and along major streets outward from center

Building Construction Type:

Mainly brick buildings with some framed replacements


Range of Building Heights:

2-3 Stories

Age:

19th and early 20th century

A5 Example: Quebec City

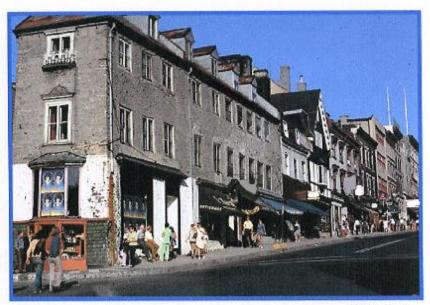

RE photo

Figure 278. UTZ A5: attached commercial buildings along arterial streets.

Urban Terrain Zone (UTZ) Dc1: Closely spaced High-rise Office Buildings

Urban Terrain Zone Dc1

Building Function and Density:

Detached, closely-spaced office buildings

Building Separation:

Less than 13 meters

Building Setting:

In newly developed areas in central city

Building Construction Type:

Framed light clad

Range of Building Heights:

High-rises, 10 to 50 Stories

Age:

Since 1950

Dc1 Example: Singapore



RE photo 2004

Urban Terrain Zone (UTZ) Dc2: Closely spaced Apartment Buildings

Urban Terrain Zone Dc2

Building Function and Density:

Detached, closely-spaced apartments

Building Separation:

Less than 13 meters

Building Setting:

In the first rings of suburbs outward from central city

Building Construction Type:

Framed light clad or box-wall principle (panel wall) buildings

Range of Building Heights:

5 to 30 Stories

Age:

Mainly since World War II

Dc2 Example: Cairo, Egypt



RE photo 2004

Urban Terrain Zone (UTZ) Dc3: Closely Spaced Houses

Urban Terrain Zone Dc3

Building Function and Density:

Detached, closely-spaced houses

Building Separation:

Less than 13 meters

Building Setting:

In residential areas both near the center (older) and at city edge (newer)

Building Construction Type:

Framed with various sidings (brick, wood, stucco) and mass brick, CMU, and framed with infill walls

Range of Building Heights:

1 - 3 Stories

Age:

All ages

Dc3 Example: Germany



Figure 281. UTZ Dc3: closely spaced houses.

Urban Terrain Zone (UTZ) Dc4: Closely Spaced Industrial/storage Buildings

Urban Terrain Zone Dc4

Building Function and Density:

Detached, closely spaced industrial/storage buildings

Building Separation:

Less than 13 meters

Building Setting:

At the edge of the city

Building Construction Type:

Brick, CMUs, R/C Framed with Infill walls, and Light Steel framed

Range of Building Heights:

1-4 Stories

Age:

Mainly since World War II

Dc4 Example: England



RE photo, 2004

Figure 282. UTZ Dc4: closely spaced industrial/storage buildings.

Urban Terrain Zone (UTZ) Dc5: Closely Spaced Commercial Buildings

Urban Terrain Zone Dc5

Building Function and Density:

Detached, closely spaced commercial buildings

Building Separation:

Less than 13 meters

Building Setting:

At the edge of the city

Building Construction Type:

Brick, CMUs, R/C Framed with Infill walls, and Light Steel framed

Range of Building Heights:

1-4 Stories

Age:

Mainly since World War II

Dc5 Example: Germany



Figure 283. UTZ Dc5: closely spaced commercial buildings.

Urban Terrain Zone (UTZ) Dc6: Closely Spaced Administrative/Cultural Buildings

Urban Terrain Zone Dc6

Building Function and Density:

Detached, closely spaced administrative/cultural buildings

Building Separation:

Less than 13 meters

Building Setting:

Anywhere in the city

Building Construction Type:

Brick, CMUs, and R/C Framed with Infill walls

Range of Building Heights:

1-4 Stories

Age:

Spanning time

Dc6 Example: Bangkok



RE photo 2004

Figure 284. UTZ Dc6: closely spaced administrative/cultural buildings.

Urban Terrain Zone (UTZ) Do1: Widely spaced Commercial Buildings, Shopping Centers

Urban Terrain Zone Do1

Building Function and Density:

Detached, widely spaced (> 13 meters) commercial buildings, shopping center, malls

Building Separation:

13 meter to 100 meters

Building Setting:

Located in modern, planned developments with large parking lots.

Building Construction Type:

Mass construction: tilt-ups, CMU load-bearing, poured-in-place concrete, and framed with various infill materials

Range of Building Heights:

1-3 Stories

Age:

Since about 1960

Do1 Example: U.S.



RE Photo

Figure 285. UTZ Do1: widely spaced commercial buildings, shopping centers.

Urban Terrain Zone (UTZ) Do2: Widely spaced Apartment Buildings

Urban Terrain Zone Do2

Building Function and Density:

Detached, widely spaced (> 13 meters) apartment buildings.

Building Separation:

13 meter to 100 meters

Building Setting:

This type of UTZ demonstrates that its buildings were planned as a cohesive complex with integrated large, public areas for landscaping, recreation, and parking.

Building Construction Type:

Two major types are common: (1) framed, light-clad structures; and (2) mass construction "box-wall principle" (panel type)

Range of Building Heights:

3 - 15 Stories

Age:

Most buildings in Do2 zones have been built since World War II.

Do2 Example: Prague, Czech Republic



RE Photo 2004

Developments of this type were replicated countless times in the Soviet Union and areas under its influence in post World War II times to replace lost housing. Their construction followed state-directed plans expressed in buildings in the five story range (and without elevators). Entrances and stairways served a set of units on each side of each stair complex. Ventilation (see rooftops) was also by sets of units.

Urban Terrain Zone (UTZ) Do3: Widely Spaced Houses

Urban Terrain Zone Do3

Building Function and Density:

Detached, widely spaced houses

Building Separation:

More than 13 meters

Building Setting:

At the edge of the city

Building Construction Type:

R/C Framed with Infill walls, wood framed, and concrete masonry units with veneers

Range of Building Heights:

1-3 Stories

Age:

Mainly since World War II

Do3 Example: Austria



RE photo, 2004

Urban Terrain Zone (UTZ) Do4: Widely Spaced Industrial/Storage Buildings

Urban Terrain Zone Do4

Building Function and Density:

Detached, widely spaced industrial/storage buildings

Building Separation:

More than 13 meters

Building Setting:

In areas designated for industrial use, at city edge

Building Construction Type:

R/C framed with light cladding and R/C Framed with Infill walls,

Range of Building Heights:

1-3 Stories

Age:

Mainly since World War II

Do4 Example: Germany



Figure 288. UTZ Do4: widely spaced industrial/storage buildings.

Urban Terrain Zone (UTZ) Do5: Widely Spaced Commercial Buildings

Urban Terrain Zone Do5

Building Function and Density:

Detached, widely spaced commercial buildings

Building Separation:

More than 13 meters

Building Setting:

In new areas, either redeveloped in older sections or in new sections

Building Construction Type:

R/C framed with light cladding and R/C Framed with Infill walls

Range of Building Heights:

3-15 Stories

Age:

Mainly since World War II

Do5 Example: Germany



Figure 289. UTZ Do5: widely spaced commercial buildings.

Urban Terrain Zone (UTZ) Do6: Widely Spaced Administrative/Cultural Buildings

Urban Terrain Zone Do6

Building Function and Density:

Detached, widely spaced administrative/cultural buildings

Building Separation:

More than 13 meters

Building Setting:

At various places where a society places a government center, monuments, campuses, religious centers, etc.

Building Construction Type:

Stone, brick, concrete, CMUs, R/C framed with light cladding and R/C Framed with Infill walls


Range of Building Heights:

3-15 Stories

Age:

Spanning time

Do6 Example: Costa Rica

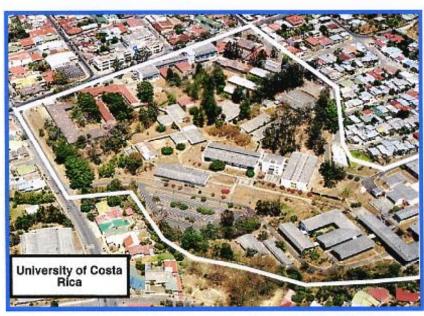

RE Photo

INTENTIONALLY LEFT BLANK.

Appendix A

Global Set, Buildings with Venting as a proportion of Front Walls: Mass Construction Buildings

Note: all photographs by R. Ellefsen, unless otherwise indicated

Stone Houses: Venting



Stone House (Mass 1)

Windows 12.5 % Doors 2.6 % Combined 15.1 %

House located in Edinburgh, Scotland. Windows have wooden frames and sashes with small panes.

Photo: 1994



Stone House (Mass 1)

Windows 5.6 % Doors obscured

House located near Limoge, France in a *Bastide* town. Windows have wooden frames and sashes with small panes.

Photo: 1991



Stone House (Mass 1)

Windows 5.9 % Doors 2.2 % Combined 8.1 %

House is located in Hammelburg, Germany. Windows have wooden frames and sashes with small panes.



Stone House (Mass 1)

Windows 4.6 % Doors 4.5 % Combined 9.1 %

House located in Castellina, Tuscany, Italy. Structure shows indications of having been modified several times.

Photo: 2004



Stone House (Mass 1)

Windows 6.9 % Doors not visible

House located in Salzgitter, Germany. Vertically aligned windows have arched reinforcement wooden frames, small panes.

Photo 1980




Stone House (Mass 1)

Windows 11.4 % Doors.8 % Combined 12.2 %

Manor House located in Wilton, England. Windows have wooden frames and sashes with small panes.

Adobe House: Venting

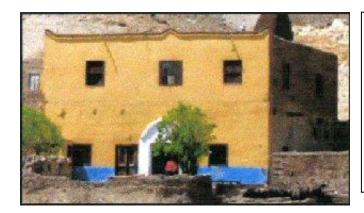

Adobe House (Mass 3)

Windows 6.5 % Doors 5.8 % Combined 12.3 %

House located in Luxor, Egypt.

Photo: 2004

Brick Houses: Venting



Brick House (Mass 5)

Windows 14.1 % Doors 2.8 % Combined 16.9 %

House, located in Koblenz, Germany is a duplex, one unit on floor one and two plus a small apartment in the attic.

Photo: 2004 by Dave Fordyce, ARL



Brick House (Mass 5)

Windows 9.6 % Door 5.3 % Combined 14.9 %

House located in Elburz Mountains near Caspian Sea.



Brick House (Mass 5)

Windows 17.9 % Door 2.8 % Combined 20.7 %

House located in Uppsala, Sweden. House has classical vertical alignment of windows.

Photo: 1992



Brick House (Mass 5)

Windows 15.3 % Door 3.4 % Combined 18.7 %

House in Bremen, Germany. Note uniform windows.

Photo: 1999



Brick House (Mass 5)

Windows 22.3 % Door not visible

House in Bremen, Germany. Arches over basement windows reveal brick construction.




Brick House (Mass 5)

Windows 13.6 % Doors 2.6 % Combined 16.2 %

House in Juarez, Chihuahua, Mexico

Photo: 1999

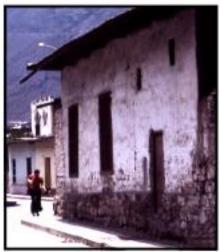

Brick House (Mass 5)

Windows 7.4 % Doors 4.6 % Combined 12.0 %

House in Andean village, Peru

Photo: 1980



Brick House (Mass 5)

Windows 15.4 % Doors not visible

House in a North China village, near Xian

Photo: 1997



Brick House (Mass 5)

Windows 12.8 % Door 9.2 % Combined 15.8 %

House converted to a store in San Jose, Costa Rica. "Dog House" dormer on rusted corrugated steel roof has a swinging sash window.



Brick House (Mass 7)

Windows 15.5 % Door 4.8 % Combined 20.3 %

House is in Baltimore, MD, USA. Note vertical window alignment, wooden sashes and frames, and small panes.

Photo: 1988



Brick House (Mass 5)

Windows 10.2 % Door 2.6 % Combined 12.8 %

House in Norrokoping, Sweden.

Photo: 1992



Brick House (Mass 5)

Windows 12.5 % Door 3.3 % Combined 15.8 %

House in Bremen, Germany. Note French doors. Frames and sashes are wooden.



Brick Row House (Mass 7)

Windows 12.3 % Doors 6.1 % Combined 18.4 %

Building is in Vienna, Austria. It has a door for each set of five apartments.

Photo: 2004



Brick Row House (Mass 7)

Windows 16.5 % Doors 6.3 % Combined 22.8 %

Building is in Bremen, Germany. Door and windows have wood frames.

Photo: 1999



Brick Row House (Mass 7)

Windows 5.4 % Doors 1.3 % Combined 6.7 %

Building is in Lebenstedt, Salzgitter, Germany. It is part of a development built in the 1930s to house steel workers.



Brick Row House (Mass 7)

Windows 12.3 % Doors 9.0 % Combined 21.3 %

Building is in Wilton, England. It is typical of factory workers' housing in the nineteenth century.

Photo: 1993



Brick Row House (Mass 7)

Windows 14.7 % Doors 12.6 % Combined 27.3 %

Building is near Guilin, China


Photo: 1996



Brick Row House (Mass 7)

Windows 11.4 % Doors 4.3 % Combined 15.7 %

Building is in Stratford, England, another typical English row house.

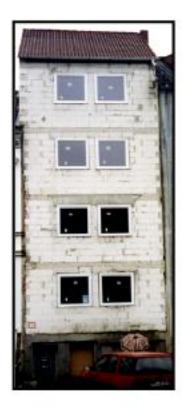

CMU House (Mass 14)

Windows 12.2 % Door 2.3 % Combined 14.5 %

Building is in Bremen, Germany. It is being constructed as a replacement for a brick house

Photo: 1999



CMU House (MASS 14)

Windows: 15.3 % Doors 2.7 % Combined 18.0 %

Building is in Lebenstadt, Salzgitter, Germany. CMUs are light-weight foamed concrete.


Photo: 1982



CMU House (Mass 14)

Windows 9.1 % Doors 3.8 % Combined 12.9 %

House is in Puntarenas, Costa Rica. CMUs are covered with stucco in front.

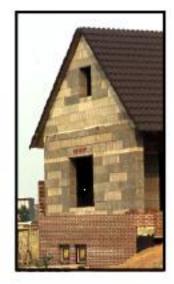

CMU House (Mass 14)

Windows 11.1 % Door not visible

Building is in Salzgitter, Germany. Blocks are typical, in Germany, large dimension foam.

Photo: 1982



CMU House (Mass 14)

Windows 9.2 % Doors 4.1 % Combined 13.3 %

House in Puntarenas, Costa Rica

Photo: 1980



CMU House (Mass 14)

Windows 3.9 % Doors 6.3 % Combined 10.2 %

House is in Lima, Peru, built on the slopes of the Andes in the eastern part of the city.

Brick Apartment Buildings: Venting



Brick Apartment Building (Mass 8)

Windows 11.6 % Doors 9.8 % Combined 21.4 %

Building in Budapest, Hungary. Apartments on upper floor undergoing renovation. Entry doorway into a corridor is made of wood

Photo: 2004



Brick Apartment Building (Mass 8)

Windows 13.6 % Doors 3.7 % Combined 17.3 %

Building is in Koblenz, Germany. Classic windows are center open topped by a single pane.

Photo by Dave Fordyce, ARL, 2004



Brick Apartment Building (Mass 8)

Windows 11.6 % Doors 2.1 % Combined 13.7 %

Building in Uppsala, Sweden. Apartments occupy upper floors, retail store on ground floor.



Brick Apartment Building (Mass 8)

Windows 13.1 % Doors 1.4 % Combined 14.5 %

Building is in Koblenz, Germany Windows follow classic style.

Photo by Dave Fordyce, ARL, 2004



Brick Apartment Building (Mass 8)

Windows 13.9 % Doors 2.1 % Combined 16.0 %

Building is in Koblenz, Germany

Photo by Dave Fordyce, ARL, 2004



Brick Apartment Building (Mass 8)

Windows 16.8 % Doors 3.4 % Combined 20.2 %

Building in Rome, Italy. Vertically aligned windows help identify the building as having brick construction.



Brick Apartment Building (Mass 8)

Windows 16.9 % Door 3.6 % Combined 20.5 %

Building is in Bath, England. Windows are longer and narrower than those found on the continent.

Photo: 1993



Brick Apartment Building (Mass 8)

Windows 10.4 % Door 6.2 % Combined 16.6 %

Building is in Mumbai (Bombay), India.

Photo: 1967



Brick Apartment Building (Mass 8)

Windows 10.4 % Door 5.4 % Combined 15.8 %

Building in Linz, Austria. Baroque decorations don't disguise the standard window types.

Box Wall Principle Apartment Buildings



Box Wall Principle Apartment Building (Mass 22)

Windows 13.7 % Doors 5.5 % Combined 19.2 %

Building in Prague, Czech Republic. Structure is a typical Soviet style building.

Photo: 2004



Box Wall Apartment Building (Mass 22)

Windows 23.5 %

Building in East Berlin, Germany

Photo 1980



Box Wall Apartment Building (Mass 22)

Windows 28.3 %

Building in East Berlin, Germany. Each apartment unit has a veranda. Windows and door occupy most of one end of the "box."



Box Wall Apartment Building (Mass 22)

Windows 26.7 %

Building in West Berlin. Apartment units have large windows for the daytime occupancy rooms and small windows for bedrooms.

Photo: 1980



Box Wall Apartment Building (Mass 22)

Windows 34.3 %

Building in Philadelphia, PA, USA. Each cell has large windows and a door entry to the veranda.

Photo: 1985



Box Wall Apartment Building (Mass 22)

Windows 18.8 %

Building in Braunschweig, Germany.

Brick Hotels: Venting



Brick Hotel (Mass 9)

Windows 16.3 % Doors 2.8 % Combined 19.1 %

Building is in Vienna, Austria. Windows on upper three floors measure one by one and a half meters.

Photo: 2004



Brick Hotel (Mass 9)

Windows 18.4 % Doors 3.4 % Combined 21.8 %

Building is in Reims, France. Note lack of windows at strong corner of this brick structure, in accordance with basic theory. Building has a Mansard roof, a device to reduce taxes based on a full floor.

Photo: 1993



Brick Hotel (Mass 9)

Windows 15.1 % Doors 2.6 % Combined 17.7 %

Each of the upper floor windows serves but a single room, indicating rather common narrow guest rooms in hotels of this class.



Brick Hotel (Mass 9)

Windows 12.4 % Doors 3.3 % Combined 15.7 %

Building is in Falkenberg, Germany. Windows are variations of the European standard.

Photo: 1983



Brick Hotel (Mass 9)

Windows 22.1 % Doors 5.3 % Combined 27.4 %

Building is in Helsingborg, Sweden. Note brick arches over windows to replace wall's lost integrity.

Photo: 1983

Brick Office Buildings: Venting



Brick Office Building (Mass 10)

Windows 14.3 % Doors 2.3 % Combined 16.6 %

Building is in Helsinki, Finland in the Empire style.



Brick Office Building (Mass 10)

Windows 19.2 % Doors 4.5 % Combined 23.7 %

Building, a government office building, is in Vienna, Austria.

Photo: 2004



Brick Office Building (Mass 10)

Window 11.6 % Doors 4.9 % Combined 16.5 %

Building, a remnant of British colonial days, is in Singapore.

Photo: 2004



Brick Office Building (Mass 10)

Windows 16.9 % Doors 3.4 % Combined 20.3 %

Building is in Bremen, Germany

Photo: 1999



Brick Office Building (Mass 10)

Windows 12.3 % Doors 3.7 % Combined 16.0 %

Building is in Lima, Peru



Brick Office Building (Mass 10)

Windows 20.5 % Door 1.9 % Combined 22.4 %

Building is in Uppsala, Sweden

Photo: 1993



Brick Office Building (Mass 10)

Windows 16.8 % Doors 2.8 % Combined 19.6 %

Building is in Wellington, New Zealand. Note: windows are narrower than those in German buildings.

Photo: 1995



Brick Office Building (Mass 10)

Windows 9.9 %

Building is in Koblenz, Germany

Photo by Dave Fordyce, ARL 2004



Brick Office Building (Mass 10)

Windows 13.4 % Doors 1.3 % Combined 14.7 %

Building, a government office, is in Bath, England

Photo: 1992

Masonry Industrial/storage Buildings: Venting



Brick Industrial/storage Building (Mass 13)

Windows 22.1 % Doors 0.7 % Combined 22.8 %

Building is in Norrokoping, Sweden. Note arches over windows and joistend plates in walls

Photo 1995




Brick Industrial/storage Building (Mass 13)

Windows 17.4 %

Building, in Shanghai, is concrete, note pilasters. Uses open windows for ventilation

Photo: 1996

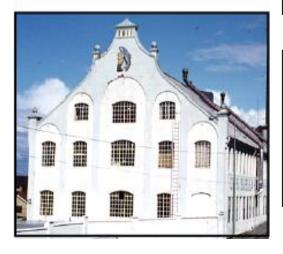

Brick Industrial/storage Building (Mass 13)

Windows 16.8 %

Building is in Stavanger, Norway. Note arches over windows and small panes



Brick Industrial/storage Building (Mass 13)

Windows 27.4 % Doors 1.7 % Combined 29.1 %

Building is in Helsinki, Finland

Photo: 1976




Brick Industrial/Storage Building (Mass 13)

Windows 6.4 % Doors 7.9 % Combined 14.3 %

Building is in Singapore, an old "godown," remnant of British days (probably no longer standing)

Photo: 1984

Large Masonry Buildings, Churches and Mosques

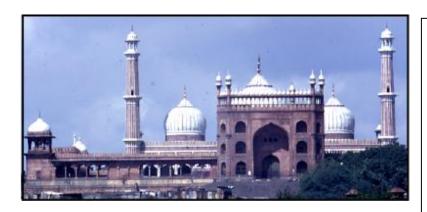

Mosque (Mass 12)

Windows 11.8 % Doors 4.4 % Combined 16.2 %

Friday Mosque in Delhi, India



Temple (Mass 12)

Windows 6.7 % Doors 2.4 % Combined 9.1 %

Building is in Bangkok, Thailand

Photo: 2004



Islamic Religious Building (Mass 12)

Windows 5.4 % Doors 6.1 % Combined 11.5 %

Building is in Chinai (Madras), India, an example of the propagation of Islamic Architecture to the southern end of the Indian sub-continent.


Photo: 1967



Mosque (Mass 12)

Windows 1.6 % Doors 6.8 % Combined 8.4 %

Building is in Teheran, Iran. The small proportion of venting is typical.

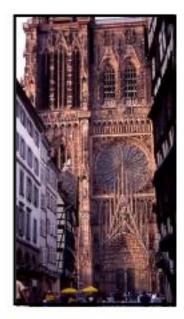

Church (Mass 2)

Windows 17.2 % Doors 1.8 % Combined 19.0 %

Building is in Strasbourg, France. Windows do not provide air circulation.

Photo: 2002



Church (Mass 12)

Windows 4.6 % Doors 1.6 % Combined 6.2 %

Building is a Roman Catholic Church in Heredia, Costa Rica


Photo: 1994



Church (Mass 2)

Windows 14.1 % Doors 4.5 % Combined 18.6 %

Building is a Church of England cathedral in Canterbury, England

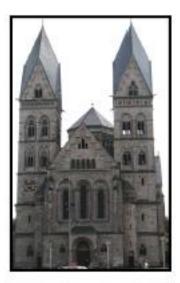


Church (Mass 2)

Windows 7.1 % Doors 1.3 % Combined 8.4 %

Church is in Koblenz, Germany

Photo by Dave Fordyce, ARL, 2004

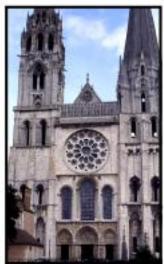


Church (Mass 2)

Windows 8.3 % Doors 1.9 % Combined 10.2 %

Building is a cathedral in Chartes, France, known for its stained glass windows.

Photo: 1995

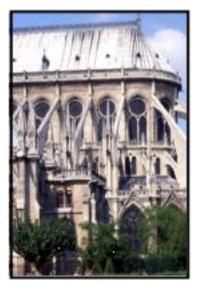

Church (Mass 2)

Windows 19.1 %

Building is a cathedral in Paris, known for its flying buttresses to support its tall, narrow structure.




Church (Mass 12)

Windows 10.2 % Doors 3.1 % Combined 13.3 %

Building is a Roman Catholic church on St. Thomas Mount in southern Chenai (Madras), India

Photo: 1958

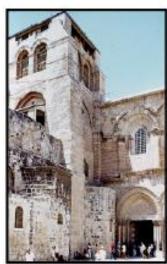

Religious Building (Mass 2)

Windows 2.6 % Doors 2.2 % Combined 4.8 %

This stone structure is in Jerusalem, Israel

Framed Construction Buildings

Wood Framed Houses: Venting



Wood Framed House (Framed 3)

Windows 11.2 % Doors 3.1 % Combined 14.3 %

House is in Stavanger, Norway

Photo: 1976

Wood Framed House (Framed 3)

Windows 7.8 %

Building is in Kuala Lumpur, Malaysia

Photo: 1984



Wood Framed House (Framed 3)

Windows 9.5 % Doors 3.8 % Combined 13.3 % Building is in Imeln, Sweden

Photo: 1983



Wood Framed House (Framed 3)

Windows 7.9 %

Building in Helsinki, Finland is of a traditional style



Framed, Curtain Wall Apartment: Venting (Framed 8)

Windows 17.6 %

Building is in Macao. Larger windows are for daytime occupancy, smaller ones for bedrooms and kitchens.

Photo: 1997



Framed, Curtain Wall Apartment: Venting (Framed 8)

Windows 13.3 %

Building is in Lisbon, Portugal. Window size varies, as in above photo.

Photo: 1991



Framed, Curtain Wall Apartment: Venting (Framed 8)

Windows 24.7 % Doors 8.3 % Combined 33.0 %

Building is in London, England

Photo: 1991



Framed, Curtain Wall Apartment: Venting (Framed 8)

Windows 39.4 %

Building is in Rotterdam, Netherlands

Photo by Glenn Schumacher, 1980



Framed, Curtain Wall Apartment: (Framed 8)

Windows 39.4 %

Building is in Panama City, Panama

Aluminum frames separate large panes in each module.

Photo: 1999



Framed, Curtain Wall Apartment: (Framed 8)

Windows 34.1 %

Building is in Hong Kong. Each apartment unit is fully vented at its outside wall.

Photo: 1983

Framed Heavy Clad Hotels: Venting



Framed, Heavy Clad Hotel (Framed 6)

Windows 20.4 %

Building is in Denver, Colorado

Each guest room has a window.



Framed, Heavy Clad Hotel (Framed 6)

Windows 16.2 % Doors 4.7 % Combined 20.9 %

Building is in Tunis, Tunisia, classic hotel from French colonial days

Photo: 1984



Framed, Heavy Clad Hotel (Framed 6)

Windows 18.8 % Doors 1.9 % Combined 20.7 %

Building is in Ho Chi Minh City (then Saigon). Shutters in windows are typical in tropical areas.

Photo: 1958



Framed, Heavy Clad Hotel (Framed 6)

Windows 12.1 % Doors 1.4 % Combined 13.5 %

Building is in San Jose, Costa Rica. Windows use wooden sashes.

Photo: 1994



Framed, Heavy Clad Hotel (Framed 6)

Windows 17.4 % Doors 1.4 % Combined 18.8 %

Building is in Singapore, the famous Raffles



Framed Heavy Clad Hotel (Framed 6)

Windows 30.9 % Doors 1.1 % Combined 32.0 %

Building is in Hong Kong

Photo: 2004



Framed Heavy Clad Hotel (Framed 6)

Windows 14.9 % Doors 3.4 % Combined 18.3 %

Building is in Tokyo, Japan. Its replacement is a framed, light clad structure with larger windows.

Photo: 1984



Framed Heavy Clad Hotel (Framed 6)

Windows 12.4 % Doors 1.6 % Combined 14.0 %

Building is in Paris, France

Photo 1992



Framed Heavy Clad Hotel (Framed 6)

Windows 21.8 %

Building is in Colombo, Sri Lanka. Smallish windows are similar to those seen in Brick hotels.

Framed Light Clad Apartments with Infill Windows



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 15.6 % Doors 3.3 % Combined 18.9 %

Building is in San Jose, Costa Rica

Photo: 1994



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 12.4 % Doors 3.4 % Combined 15.8 %

Building is in New Delhi, India. Window setback provides valuable shade

Photo: 1967



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 21.5 % Doors 6.1 % Combined 27.6 %

Building is in Guilin, China



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 19.9 %

Building is in Cairo, Egypt

Photo: 2004



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 9.9 % Doors 2.2 % Combined 12.1 %

Building is in Tel Aviv, Israel

Photo: 1999



Framed Light Clad Apartment with Infill Windows (Framed 8)

Windows 14.6 %

Building in Gibraltar

Framed Light Clad Curtain Wall Hotels: Venting



Light Clad Curtain Wall Hotel (Framed 9)

Windows 13.3 % Door 2.0 % Combined 15.3 %

Building is in Uppsala, Sweden. Small size of rooms are apparent from the window spacing. Windows tilt vertically to open.

Photo: 1992



Light Clad Curtain Wall Hotel (Framed 9)

Windows 10.7 %

Building in California

Photo: 1989



Light Clad Curtain Wall Hotel (Framed 9)

Windows 44.2 %

Building is in Macao (now China). Windows occupy most of end wall of each guest room.




Light Clad Curtain Wall Hotel (Framed 9)

Windows 23.8 %

Building is in Edmonton, Alberta, Canada. Mullions separate windows.

Photo: 1982

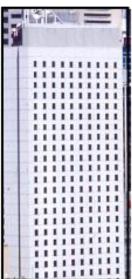

Light Clad Curtain Wall Hotel (Framed 9)

Windows 14.3 %

Building is in Sydney, New South Wales, Australia. Window style falls into the class of "minimum."

Photo: 1992



Light Clad Curtain Wall Hotel (Framed 9)

Windows 24.4 %

Building is in Shanghai, China.

Framed Light Clad Infill Wall Hotel: Venting



Light Clad Infill Wall Hotel (Framed 9)

Windows 33.2 %

Building is in Bangkok, Thailand. Sliding glass window/door provides access to deck for each guest room.

Photo: 2004



Light Clad Infill Wall Hotel (Framed 9)

Windows 15.9 %

Building is in Singapore. Again, note window-glass window/door for entry onto deck.

Photo: 2004



Light Clad Infill Wall Hotel (Framed 9)

Windows 35.3 % Doors 2.6 % Combined 37.9 %

Building is in Guilin, China. Note mullions separating guest rooms.

Framed Light Clad Curtain Wall Office Building: Venting



THE SECTION AND ADDRESS OF THE SECTION ADDRESS OF THE SECTION ADDRESS OF THE SECTION ADDRESS OF THE SECTION AND ADDRESS OF THE SECTION ADDRESS OF T

Light Clad Curtain Wall Office Building (Framed 10)

Windows: 50.0%

Building is in Bangkok, Thailand. Open tilting windows suggest either building has no air conditioning or occupants choose

not to use it.

Photo: 1983



Light Clad Curtain Wall Office Building (Framed 10)

Windows 42.4 % Doors 1.4 % Combined 43.8 %

Building is in Stavanger, Norway. Windows are in a spandrel pattern.

Photo: 1976



Light Clad Curtain Wall Office Building (Framed 10)

Windows 32.2 %

Building is in Manila, Philippines. Spandrel

pattern is seen again.

Photo: 1981



Light Clad Curtain Wall Office Building (Framed 10)

Windows 16.3 %

Building is in Uppsala, Sweden



Light Clad Curtain Wall Office Building (Framed 10)

Windows 28.4 %

Building is in Haifa, Israel. Spandrels.

Photo: 1999



Light Clad Curtain Wall Office Building (Framed 10)

Windows 56.7 % Doors 2.7 % Combined 59.4 %

Building in Tel Aviv, Israel. Photo: 1999



Light Clad Curtain Wall Office Building (Framed 10)

Windows 28.5 % Doors 3.7 % Combined 32.3 %

Building is in Prague, Czech Republic.

Photo: 2004




Light Clad Curtain Wall Office Building (Framed 10)

Windows 56.3 % Doors 1.5 % Combined 57.8 %

Building is in Koblenz, Germany

Photo by Dave Fordyce, ARL, 2004



Light Clad Curtain Wall Office Building (Framed 10)

Windows 58.8 %

Building is in Hong Kong. Another example of the popular spandrel type of window pattern.

Photo: 2004

Framed Light Clad Infill Wall Office Building: Venting



Light Clad Infill Wall Office (Framed 10)

Windows 28.3 % Doors 1.7 % Combined 30.3 % Building in Lima, Peru

Photo: 1980



Light Clad Infill Wall Office (Framed 10)

Windows 17.2 % Doors 2.8 % Combined 20.0 %

Building is in Manila, Philippines. Note again the provision of shade for tropical area buildings.

Photo: 1981



Light Clad Infill Wall Office (Framed 10)

Windows 25.9 %

Building is in Salzgitter, Germany. Tilt windows are seen.



Light Clad Infill Wall Office (Framed 10)

Windows 17.7 % Doors 1.9 % Combined 19.6 %

Building is in Chenai (Madras), India.

Photo: 1967



Light Clad Infill Wall Office (Framed 10)

Windows 34.9 %

Building is in Salzgitter, Germany. Visible partitions as seen through windows reveal different size office units.

Photo: 1999



Light Clad Infill Wall Office (Framed 10)

Windows 11.3 % Doors 1.3 % Combined 12.6 %

Building is in San Jose, Costa Rica. Again, smallish windows are seen in a tropical environment.

Light Steel Framed Industrial/Storage Buildings: Venting



Steel Framed I/S Building (Framed 20)

Windows 5.2 % Doors 8.7 % Combined 13.9 % Building in Bangkok, Thailand. Photo 2004



Steel Framed I/S Building (Framed 20)

Windows 4.1 % Open end. Building in Tokyo, Japan.

Photo 1967



Steel Framed Industrial/storage Building (Framed 20)

Windows 5.1 %

Building is in Salzgitter, Germany

Minimum lighting but maximum security afforded by small windows.



Steel Framed Industrial/Storage Building (Framed 20)

Windows 7.2 %

Building is in Switzerland, near Zurich

Photo: 2004



Steel Framed Industrial/Storage Building (Framed 20)

Windows 2.1 % Doors 20.4 % Combined 22.5 %

Building is in Uppsala, Sweden

Photo: 1992

Steel Framed Industrial/Storage Building (Framed 20)

Windows 2.9 %

Building is in Uppsala, Sweden

INTENTIONALLY LEFT BLANK.

Bibliography

- Brannigan, Francis. "Building Construction for the Fire Service", National Fire Protection Association, Boston, MA, 1979.
- Kharrufa, Sahar. Reduction of Building Waste in Baghdad Iraq", Building and Environment Journal.
- Macaulay, David. "Unbuilding", HMCo 1981.
- Maheri, Mahmoud R.; Naeim, Farzad; Mehrain, Michael. "Performance of Adobe Residential Buildings in the 2003 Bam, Iran, Earthquake", Earthquake Spectra, Volume 21, No. S1, pages S337-S344, December 2005.

World Housing Encyclopedia Reports (many countries worldwide) over several recent years Other references available upon request

Publications and reports by Richard Ellefsen

- "A Method for Inventorying Urban Morphology", Fourth Symposium on the Urban Environment, American Meteorological Society, Norfolk, VA, 20-24 May 2002, pages 29,30, with Ron Cionco.
- "Design for a Remote Sensing Project for USAID, Peru" (with R. Campbell and S. Sader) Resources Development Associates, 154 pages.
- "Monitoring the Areal Growth of San Jose, Costa Rica," Proceedings of the Fourteenth International Symposium on Remote Sensing of the Environment, Environmental Research Institute of Michigan, Ann Arbor, MI, 1980.
- "Urban Terrain Zone Based GIS for MOUT," published in the Proceedings of LIS/GIS '94, Bethesda, MD.
- "Use of Vertical and Oblique Aerial Photography to Inventory Building Surface Materials," Development of Extrapolation Procedures for a Materials Distribution Data Base (a report), Life Systems, Inc. Cleveland, OH, December, 1986.

Glossary

- Ashlar Stone a thin slab of squared stone, used for facing or building
- **Balloon frame construction** involves the employment of small dimension studs set closely together (16 inch centers in the U.S.) to form the support for a wall
- **Box-wall (aka panel) construction** construction of a building using walls and floor/ceilings to form five sides of a "box," used commonly for hotels and apartments where room size is designed to remain stationary
- Brick veneer where only stretchers are exposed on a wall and the bricks cover either a mass construction wall or are used as sheathing over a framed wall
- Brick wall width terminology double brick refers to a brick wall the length of two headers (some 8" in the U.S., and 12 cm abroad); triple brick refers to a thickness equivalent of three headers, plus mortar; quadruple brick refers to a thickness equivalent of four headers, plus mortar, and so on with each brick increment
- Capital The ornamental top of stone column, also applied to the decorated top floor of a classic styled building, either masonry or framed heavy-clad
- Cladding The material covering the frame of either a steel heavy-clad structure or a steel or reinforced concrete frame light-clad structure
- CMU A concrete masonry unit, commonly referred to as a concrete block, or cinder block (even when the material is concrete and does not contain any light-weight volcanic [cinder] material) Sizes vary internationally but the dimensions used in this report are 40 cm long by 20 centimeters deep and 20 centimeters tall
- **Corbel** A bracket of stone, wood, brick, or other building material, projecting from the face of a wall and generally used to support a cornice, an arch, or a beam or concrete floor
- **Dowel** A usually round pin that fits tightly into a corresponding hole to fasten or align two adjacent pieces
- English Bond A form of laying brick where rows of headers alternate with rows of stretchers

- Flemish Bond A form of laying brick where a header and a stretcher are alternated
- Framed Construction Use of wood, steel, reinforced concrete columns and beams to support loads
- Grout Various cement-based materials poured around rebar in cavities in concrete masonry units to provide strength and to tie CMU's together
- Half-timbered Construction Where braced squared wooden columns and beams support a structure, and where wattle and daub and other materials are used as infill
- Header The end of a single brick
- Heavy cladding Where a combination of materials terra cotta, stiffening, and brick or stone — cover a steel framed structure with the purpose of protection against the elements, stiffening of the frame, and giving the appearance of a masonry structure
- Infill Non load-bearing material placed between columns and beams, and floorceilings, in a framed structure, to protect from the elements (see cover photo example)
- Light cladding Involves use of a variety of light-weight, and thin, materials to cover either a steel framed structure or a steel-reinforced concrete framed structure; material may be glass, metal, a composite, lightweight foamed concrete, or a thin sheet of stone
- Lintel A horizontal beam placed above a door or window in a mass construction building to support the load above, and to replace the wall integrity that has been lost by removing some of it for the window or door
- Mass Construction Use of stone, brick (kiln-dried or sun dried), structural grade terra cotta, poured-in-place or panel concrete walls, or even wood in a solid log structure, where the walls of a structure are load-bearing thus supporting dead loads and live loads
- Mortar A mixture of cement or lime mixed with sand and water that is used in building
- **Mortise** A cavity, usually rectangular, in a piece of wood, stone, or other material, prepared to receive a similarly shaped projection or tenon of another piece, to hold the two together

- Mud Bricks Blocks made of a local clay in a mod and strengthened with a variety of materials, usually straw, and then cured in the sun. Sizes are larger than kiln-dried bricks, often about 30 by 15 by 5 centimeters
- Pediment Literally the foot, or base of a classic Greek column. The term is used here to refer to the ornamented ground floor of a Framed Heavy-clad structure, one that is taller (to about 7 meters) than the upper floors (at about 3 meters each)
- Perimeter Foundation A mass construction base for a structure, made of either reinforced concrete or stone upon which other building material is constructed
- Pilaster A column set into a wall to add strength and stability; pilasters are commonly employed with poured-in-place concrete walls
- Pinons Shaped ends of a wooden beam inserted into a mortise, and connected with dowels
- Platform Framed Construction Similar to Balloon Framed construction but employing a platform floor at each floor level, rather than having columns extend the full height of the structure
- Plinth A solid pedestal foundation or base on which to rest a wall
- Post and Beam Wood Construction As with half-timbered structures, walls are supported by fairly wide-spaced columns, tied to the foundation and to beams. Columns are larger in dimension than those used in balloon construction and are placed farther apart. Many older wooden structures in the U.S. and abroad have used this method of construction.
- Purlin One of several horizontal members supporting the rafters of a roof
- Rebar Steel rods placed in concrete to provide strength and to prevent failure in the event of breakage of the concrete; sizes and density vary with need
- Reinforced concrete The abbreviation R/C is used in this report; reinforcement is achieved either with rebar or steel mesh (in the case of walls or floor/ceilings)
- Rubble Stone Irregularly placed stones formed into a wall with varying amounts of mortar poured among them
- Running Bond A type of laying bricks in a wall where a row of headers is exposed at the outer surface of the wall every fifth or sixth course

Shaft The main part of a classic columns (between pediment and capital) and also used to refer to the many floors of a framed heavy-clad building lying between the pediment floor, at ground level, and the capital floor

Sheathing A layer of boards or of other wood or fiber materials applied to the outer studs, joists, and rafters of a building to strengthen the structure and serve as a base for an exterior weatherproof cladding

Soldier A brick laid in a vertical position in a wall

Stretcher The length of a brick

Stucco A durable finish for exterior walls, applied wet and usually composed of cement, sand, or lime

Terra Cotta A hard, semi-fired, waterproof ceramic tile used in building construction

Tilt-up Construction Where the walls of a building are eigher poured on the structure's floor or delivered from off-site and then "tilted up" into a vertical position, and then diagonally braced temporarily by steel poles prior to being anchored by rafters and roof

Venting Refers to both windows and doors of a building

Wattle and Daub Wattle refers to poles intertwined with twigs, reeds, or branches for use as walls: daub refers to the mud mix that covers the wattle wall

Wythe One masonry unit thick

Index

```
Adobe 47, 58
 buildings, geographic distribution 58, 62
 construction method 11, 59, 61, 62-65, 70
 dimensions 8, 58, 62, 66
 material 62, 67, 69
 venting 60
 wall thickness 62, 68
Ashlar stone walls 48, 49, 55
Bibliography 359
Bonding (brick)
 English bonding 67, 77, 265
 Flemish bonding 70, 114
Box wall construction 157, 158
 apartments 157, 159, 167
 construction method 163, 164, 165, 166
 floors 163, 165
 walls 163, 164, 166
Box-wall apartments 157-167
 construction method 163-167
 elevation 158
 floor plans 159-162
Box-wall hotels 168-172
```

```
construction method 170,171,172
 elevation 169
 floor plans 170-171
Brick infill walls 237-239, 246, 262, 263, 265
 brick wall thickness (double brick) 246-247, 262
Brick over block 133, 137, 142
 construction method 133, 134, 140-142
Brick walls 75, 76, 78, 83-84, 92, 96-98
 abutted brick walls cross-section 93
 differential thickness 110, 114, 116, 119, 121
 five-story building cross-section 114
 brick wall thickness 77, 78, 80, 81, 88, 92, 96, 98, 100, 102, 108, 109, 111, 118, 188,
192, 204, 213, 238, 239, 246, 247, 265
 differential thickness, 93, 96, 98, 100, 102
 five-story building cross section, 96
Brick dimensions
 kiln-dried, 77, 78, 83, 84, 91, 93, 96, 102, 109, 118
 mud-dried, 62
Building properties table 8, 9
Central pylon building 231-236
 cladding 235
 construction method 233-236
 mass construction pylon 231, 233-236
 office floor plan 233
```

steel beam connections 236

```
Cladding 46
 heavy-cladding example (hotel),198, 204
 heavy-cladding example (office), 213
 light-cladding example (apartment building), 214, 215
 light-cladding example (hotel), 219
 light-cladding example (office), 226, 227
 central pylon office example, 233-235
 industrial/storage building example, 286, 287, 290
CMU (Concrete Masonry Unit) Blocks
 dimensions 119, 121, 122, 125, 127
 rebar placement 122, 123, 132
CMU construction 119, 120, 123, 127, 130, 131, 134, 136, 140, 141, 255-257, 260, 262,
263
 use in infill walls 255-257, 262, 263
 use in load-bearing walls 123, 126, 127, 132, 136, 137
Concrete poured-in-place construction 143, 145, 147, 148, 150, 151
 use of pilasters 148, 149
Construction type, materials used 14-15
Corrugated steel roofing 267, 277, 286, 287, 290
Courtyard Houses 78-84
 construction 78-82, 83, 84
  women's courtyard 80
  roof 82
 articulation with rooms 80
Curtain wall 28
```

```
Domes
 adobe house 58, 60, 63
 Mosques 110, 111, 113, 114
Door dimensions
 personnel 267,268, 277
 truck 116, 267,268, 277
Double brick walls (infil) 246, 247
English bond (brick) 77, 83, 265
English bond (adobe) 67
Facing 134, 142
Flemish bond (brick) 114
Floor plans 43
 apartments 94, 95, 145, 159-161, 259
 churches 54
 hotels 99, 170, 171, 200-203, 220-222, 224
 houses 50, 61, 73, 74, 80, 88, 89, 121, 135, 139, 176, 185, 191, 216, 240, 241, 251,
          252
 industrial/storage buildings 117, 130, 131, 154, 269, 274, 279, 288, 292
 mosques 111, 124
 offices 103, 207-210, 228, 233, 264
 school 283-284
 stores 66, 108, 126, 150, 179, 195, 264
Framed Construction
```

function 15

definition 10, 18

```
materials 14
```

Military Operations in Urban Terrain (MOUT) significance 10

Framed Construction flow chart 11

Glossary of terms 360-363

Half-timbered buildings 174-182

construction method 175, 176, 177, 179, 181, 182

elevations 175, 179

floor plans 176, 180

materials 176, 177, 181, 182

Headers 68, 77, 84

Heavy cladding 198, 204, 213

Hof-style building 92

floor plans, ground floor 94

floor plans, upper floors 95

Industrial-storage buildings 115-118, 128-132, 266-280, 286-293

brick 115

framed construction 266, 271, 276, 286-291, 293

Infill walls

brick 237-239, 246, 262, 263, 265

CMU 255-257, 262, 263

terra cotta 248-250, 271-273

windows 26

Light steel framed construction 286-291

Light well 95

Lintels 56, 65, 364

```
Mass Construction
 definition 10
 function 15
 materials 14
Mass Construction flow chart 11
Mass versus Framed construction 18
Morphology 10
Mortise 364
Mosque orientation 112
Mullion 27
Pediment, shaft, and capital 198
Pilaster 365
Post and beam construction 175-177, 182
Purlins 182, 365
Rebar placement in CMU walls 122, 123, 132
Roofs 29-43
 roof pitch/land use 30-38
 roof material 40-43
 roof types 29-32
Reinforced concrete framed buildings 214-230
 construction methods 215, 217, 219, 221, 223, 224, 227, 229, 230
 floor plans 215, 216, 219-222, 228
Reinforced concrete framed buildings with infill walls 237-280
 construction methods 237-239, 242-250, 253-257, 260, 262-268, 270-273, 275-278, 280
 floor plans 240, 241, 251, 252, 258, 259, 261, 264, 269, 274, 279
```

```
Reinforced concrete framed school 281-285
 construction methods 285
 floor plans 283, 284
Room dimensions 43-46
Rubble stone walls 48, 49, 55
Shear walls 10, 11
Spandrel 27
Steel framed construction 197-198
 column spacing 204, 211, 212, 215, 223, 224, 229, 230, 234
 connections 212, 236
Stone buildings
 houses 48-51
 institutional building 52-57
 stone over concrete 143, 147
 stone wall thickness 50, 51, 54
 window to wall ratio 21
Stone lintels 56
Stretchers 68, 77, 84
Stud walls 186, 187, 192, 217, 221, 224, 230, 288
Sun-dried brick 47, 58
Tenon 177, 179
Terra cotta block infill walls 248-250, 271-273
Tilt-up buildings 152-156
 concrete wall thickness 156
```

construction method 152, 155

```
Triple Brick walls 77, 91, 118, 265
 English bonding 77, 265
 Flemish bonding 114
Urban Terrain Zones classification scheme 294-315
Urban Terrain Zones types 299-315
Venting explained 17
 measurements and dimensions 21-26
 proportion windows to walls 21-25, 72, 120
 venting types 26-27, Appendix A 317-357
Wall thicknesses
 brick 8, 93, 96, 98, 100, 102, 108-109, 111, 118, 188, 192, 204, 213, 238, 239, 246, 247
 CMU 119, 121, 122, 127
 heavy cladding 204, 213
 light cladding 219
 stone 48, 50, 51-57
Wattle 177
Web reinforcement 166
Windows
 dimensions 25-26
 proportion of wall area 21-25
Wood framed houses 183-192
 floor plans 185, 191
 siding 184, 186, 187, 192
 wall construction 186-188, 192
```

Wood framed store 193-196

construction 195, 196

NO. OF COPIES ORGANIZATION

20 US ARMY RSRCH LAB
ATTN RDRL SLB E D FORDYCE
BLDG 328
ABERDEEN PROVING GROUND MD
21005

INTENTIONALLY LEFT BLANK.